




DATE: 13 June 2006

**I.T.L. (PRODUCT TESTING) LTD.
FCC EMC/Radio Test Report
for
Roseman Engineering Ltd.**

**Equipment under test:
915 MHz Transceiver Module
RM915**

Written by: 
D. Shidlow, Documentation

Approved by: 
E. Pitt, Test Engineer

Approved by: 
I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.
This report relates only to items tested.

Measurement/Technical Report for Roseman Engineering Ltd.

Equipment under test:
915 MHz Transceiver Module

FCC ID: JAKRM915

DATE: 13 June 2006

This report concerns: Original Grant: Class II change: X

Class B verification: Class A verification Class I change:

Equipment type: Spread Spectrum Transmitter Module

Request Issue of Grant:

 x Immediately upon completion of review

Limits used:

CISPR 22: Part 15: X

Measurement procedure used is ANSI C63.4-2003.

Application for Certification

prepared by:

Ishaiahou Raz
ITL (Product Testing) Ltd.
1 Batsheva St.
P.O.B. 87
Lod 71100
Israel
Tel: +972-8-915-3100
Fax: +972-8-915-3101
Email: sraz@itl.co.il

Applicant for this device:

(different from "prepared by")

Lior Yehoshua
Roseman Engineering Ltd.
65 Weizman St.
Givataim
53468
Israel
Tel: +972-3-573-1801
Fax: +972-3-573-1807
Email: lior@roseman.co.il

TABLE OF CONTENTS

1.	GENERAL INFORMATION	4
1.1	Administrative Information	4
1.2	List of Accreditations	5
1.3	Product Description	6
1.4	Test Methodology	6
1.5	Test Facility	6
1.6	Measurement Uncertainty	7
2.	SYSTEM TEST CONFIGURATION	8
2.1	Justification	8
2.2	EUT Exercise Software	8
2.3	Special Accessories	8
2.4	Equipment Modifications	8
2.5	Configuration of Tested System	8
3.	BLOCK DIAGRAM	9
3.1	Schematic Block/Connection Diagram	9
3.2	Theory of Operation	9
4.	RADIATED MEASUREMENT PHOTO	10
5.	SPURIOUS RADIATED EMISSION DATA BELOW 1 GHZ	11
5.1	Spurious Radiated Emission 30MHz-1000 MHz	11
5.2	Measured Data	11
5.3	Test Instrumentation Used, Radiated Measurements	12
5.4	Field Strength Calculation	13
6.	SPURIOUS RADIATED EMISSION ABOVE 1 GHZ	14
6.1	Spurious Radiated Emission Above 1 GHz	14
6.2	Test Data	14
6.3	Test Instrumentation Used, Spurious Radiated Measurements Above 1 GHz	19
7.	RADIATED EMISSION RX MODE	20
7.1	Test Specification	20
7.2	Test Procedure	20
7.3	Test Results	21
7.4	Test Instrumentation Used, Radiated Measurements	24
7.5	Field Strength Calculation	25
8.	PHOTOGRAPHS OF TESTED E.U.T. ANTENNAS	26
9.	APPENDIX A - CORRECTION FACTORS	28
9.1	Correction factors for CABLE	28
9.2	Correction factors for CABLE	29
9.3	Correction factors for CABLE	30
9.4	Correction factors for CABLE	31
9.5	Correction factors for CABLE	32
12.6	Correction factors for LOG PERIODIC ANTENNA	33
9.6	Correction factors for LOG PERIODIC ANTENNA	34
9.7	Correction factors for BICONICAL ANTENNA	35
9.8	Correction factors for BICONICAL ANTENNA	36
9.9	Correction factors for BICONICAL ANTENNA	37
9.10	Correction factors for BICONICAL ANTENNA	38
10.	APPENDIX B - CORRESPONDENCE	39

1. General Information

1.1 Administrative Information

Manufacturer: Roseman Engineering Ltd.

Manufacturer's Address: 65 Weizman St.
Givataim 53468
Israel
Tel: +972-3-573-1801
Fax: +972-3-573-1807

Manufacturer's Representative: Lior Yehoshua
Ziv Bakal

Equipment Under Test (E.U.T): 915 MHz Transceiver Module

Equipment Model No.: RM915

Equipment Serial No.: Not designated

Date of Receipt of E.U.T: 28.05.6

Start of Test: 28.05.6

End of Test: 29.05.06

Test Laboratory Location: I.T.L (Product Testing) Ltd.
Kfar Bin Nun,
ISRAEL 99780

Test Specifications: FCC Part 15, Sub-Part C

1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), File No. IC 4025.
6. TUV Product Services, England, ASLLAS No. 97201.
7. Nemko (Norway), Authorization No. ELA 207.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

1.3 **Product Description**

See details in original application for FCC ID no. JAKRM915.

Description of change:

Two new antennas were added (See photograph of the new antennas below).



1.4 **Test Methodology**

Radiated testing was performed according to the procedures in ANSI C63.4: 2003.

1.5 **Test Facility**

The radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing December 12, 2003).



I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

1.6 Measurement Uncertainty

Radiated Emission

The Open Site complies with the ± 4 dB Normalized Site Attenuation requirements of ANSI C63.4-2003. In accordance with Paragraph 5.4.6.1 of this standard, this tolerance includes instrumentation calibration errors, measurement technique errors, and errors due to site anomalies.

2. System Test Configuration

2.1 Justification

See details in original application for FCC ID no. JAKRM915. Spurious radiated emissions re-testing was performed according to correspondence with Timco dated 18 January 2006. See Appendix B Correspondence.

2.2 EUT Exercise Software

See details in original application for FCC ID no. JAKRM915.

2.3 Special Accessories

See details in original application for FCC ID no. JAKRM915.

2.4 Equipment Modifications

See details in original application for FCC ID no. JAKRM915.

2.5 Configuration of Tested System

The configuration of the tested system is described below.

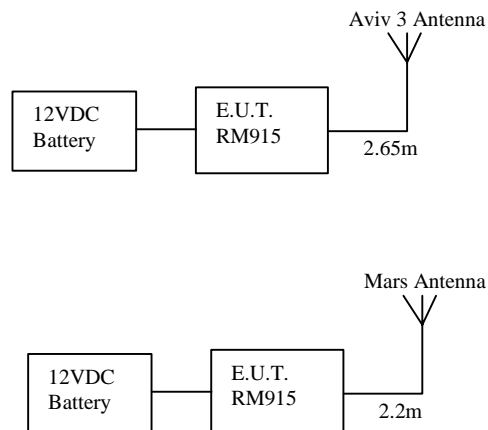


Figure 1. Configuration of Tested System

3. Block Diagram

3.1 Schematic Block/Connection Diagram

See details in original application for FCC ID no. JAKRM915.

3.2 Theory of Operation

See details in original application for FCC ID no. JAKRM915.

4. Radiated Measurement Photo



Figure 2. Radiated Emission Test Aviv 3 Antenna



Figure 3. Radiated Emission Test Mars antenna

5.3 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3411A00102	March 22, 2006	1 year
RF Section	HP	85420E	3427A00103	March 22, 2006	1 year
Antenna Bioconical	ARA	BCD 235/B	1041	March 19, 2006	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	November 17, 2005	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	ThinkJet 2225	2738508357.0	N/A	N/A

5.4 Field Strength Calculation

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$[\text{dB}\mu\text{v}/\text{m}] \text{ FS} = \text{RA} + \text{AF} + \text{CF}$$

- FS: Field Strength [dB μ v/m]
- RA: Receiver Amplitude [dB μ v]
- AF: Receiving Antenna Correction Factor [dB/m]
- CF: Cable Attenuation Factor [dB]

6. Spurious Radiated Emission Above 1 GHz

6.1 Spurious Radiated Emission Above 1 GHz

The E.U.T operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground.

The emission levels were compared to the requirement of Section 15.249.

In the frequency range 1-2.9 GHz, a computerized EMI receiver complying to CISPR 16 requirements and a High Pass Filter were used. The test distance was 3 meters.

In the frequency range 2.9-9.5 GHz, a spectrum analyzer including a low noise amplifier was used. The test distance was 3 meters. During peak measurements, the I.F. bandwidth was 1 MHz, and video bandwidth 3 MHz. During average measurements, the I.F. bandwidth was 1 MHz and video bandwidth was 100 Hz.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

The configuration tested is shown in Figure 1.

6.2 Test Data

JUDGEMENT: Passed by 5.4 dB With Mars Antenna

JUDGEMENT: Passed by 5.5 dB With Aviv 3 Antenna

The margin between the emission level and the specification limit is 5.4 dB in the worst case at the frequency of 2744.60 MHz, vertical polarization with the Mars antenna at the operating frequency of 921.25 MHz.

The margin between the emission level and the specification limit is 5.5 dB in the worst case at the frequency of 2744.60 MHz, vertical polarization with the Aviv 3 antenna at the operating frequency of 914.85 MHz.

The EUT met the requirements of the F.C.C. Part 15, Subpart C Section 15.247, specification.

The details of the highest emissions are given in Figure 4 to Figure 7.

TEST PERSONNEL:

Tester Signature:  Date: 14.06.06

Typed/Printed Name: E. Pitt

6.3 Test Instrumentation Used, Spurious Radiated Measurements Above 1 GHz

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3411A00102	March 22, 2006	1 year
RF Section	HP	85420E	3427A00103	March 22, 2006	1 year
Antenna-Log Periodic	A.H.System	SAS-200/511	253	January 24, 2005	2 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS- 0411N313	013	October 16, 2005	1 year
Spectrum Analyzer	HP	8592L	3926A01204	February 6, 2006	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	ThinkJet 2225	2738508357.0	N/A	N/A

7. Radiated Emission Rx Mode

7.1 Test Specification

30-1000 MHz, FCC Part 15, Subpart B, CLASS B

7.2 Test Procedure

The E.U.T operation mode and test set-up are as described in section 7.1.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The effect of varying the position of the cables was investigated to find the configuration that produces maximum emission.

The E.U.T. highest frequency source or used frequency is 16 MHz.

The frequency range 30-1000 MHz was scanned, and the list of the highest emissions was verified and updated accordingly.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods:

- Turning the E.U.T on and off.

- Using a frequency span less than 10 MHz.

- Observation of the signal level during turntable rotation. Background noise is not affected by the rotation of the E.U.T.

The emissions were measured at a distance of 3 meters.

The E.U.T. was tested the operating frequencies of 914.85, 921.25, and 927.65 MHz and both Aviv 3 and Mars antennas.

Radiated Emission

E.U.T Description 915 MHz Transceiver Module
 Type RM915
 Serial Number: Not designated

Specification: FCC Part 15, Subpart B, Class B

Antenna Polarization: Horizontal/Vertical Frequency range: 30 MHz to 1000 MHz
 Antenna: 3 meters distance Detectors: Peak, Quasi-peak

Frequency (MHz)	Peak Amp (dB μ V/m)	QP Amp (dB μ V/m)	Correction (dB)	Specification (dB μ V/m)	Margin (dB)
32.77	24.7	18.1	14.8	40.0	-21.9
42.80	24.0	17.3	12.4	40.0	-22.7
64.20	25.9	20.2	10.1	40.0	-19.8
81.92	26.0	20.5	10.5	40.0	-19.5
163.84	31.1	25.1	15.0	43.5	-18.4
311.30	28.9	23.4	23.1	46.0	-22.6

**Figure 8. Radiated Emission. Antenna Polarization: HORIZONTAL.
 Detectors: Peak, Quasi-peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.


Radiated Emission

E.U.T Description 915 MHz Transceiver Module
 Type RM915
 Serial Number: Not designated

Specification: FCC Part 15, Subpart B, Class B

Antenna Polarization: Horizontal/Vertical Frequency range: 30 MHz to 1000 MHz
 Antenna: 3 meters distance Detectors: Peak, Quasi-peak

10:19:14 MAY 29, 2006

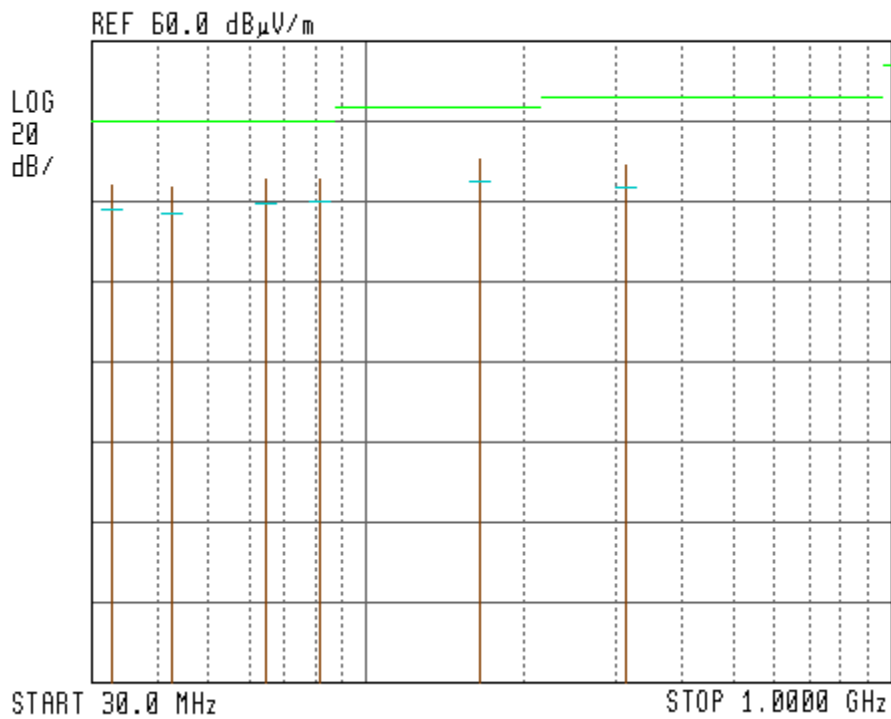

**Figure 9. Radiated Emission. Antenna Polarization: HORIZONTAL
 Detectors: Peak, Quasi-peak**

Note:

1. Horizontal axis shows logarithmic frequency scale.
2. The vertical axis shows amplitude (in dB μV/m).
3. Peak detection is designated by the top of each vertical line.
4. Quasi-peak detection is designated by the first dash mark (from the top) of each vertical line.

7.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3411A00102	March 22, 2006	1 year
RF Section	HP	85420E	3427A00103	March 22, 2006	1 year
Antenna Bioconical	ARA	BCD 235/B	1041	March 19, 2006	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	November 17, 2005	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	ThinkJet 2225	2738508357.0	N/A	N/A

7.5 *Field Strength Calculation*

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

FS:	Field Strength [dB μ v/m]
RA:	Receiver Amplitude [dB μ v]
AF:	Receiving Antenna Correction Factor [dB/m]
CF:	Cable Attenuation Factor [dB]

No external pre-amplifiers are used.

8. Photographs of Tested E.U.T. Antennas



Figure 10 Mars Antenna



Figure 11 Mars Antenna



Figure 12 Aviv 3 Antenna



Figure 13 Aviv 3 Antenna

9. APPENDIX A - CORRECTION FACTORS

9.1 Correction factors for CABLE from EMI receiver to test antenna at 3 meter range.

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	7.3
20.0	0.6	1400.0	7.8
30.0	0.8	1600.0	8.4
40.0	0.9	1800.0	9.1
50.0	1.1	2000.0	9.9
60.0	1.2	2300.0	11.2
70.0	1.3	2600.0	12.2
80.0	1.4	2900.0	13.0
90.0	1.6		
100.0	1.7		
150.0	2.0		
200.0	2.3		
250.0	2.7		
300.0	3.1		
350.0	3.4		
400.0	3.7		
450.0	4.0		
500.0	4.3		
600.0	4.7		
700.0	5.3		
800.0	5.9		
900.0	6.3		
1000.0	6.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".

9.2 Correction factors for CABLE
from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

NOTES:

- 1. The cable type is RG-8.*
- 2. The overall length of the cable is 10 meters.*

9.3 Correction factors for CABLE
from EMI receiver
to test antenna

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.2	1200.0	1.6
20.0	0.2	1400.0	1.8
30.0	0.2	1600.0	2.1
40.0	0.2	1800.0	2.2
50.0	0.3	2000.0	2.3
60.0	0.4	2300.0	2.8
70.0	0.4	2600.0	2.7
80.0	0.4	2900.0	3.1
90.0	0.5		
100.0	0.5		
150.0	0.6		
200.0	0.6		
250.0	0.7		
300.0	0.8		
350.0	0.9		
400.0	1.0		
450.0	1.1		
500.0	1.2		
600.0	1.3		
700.0	1.4		
800.0	1.4		
900.0	1.5		
1000.0	1.5		

NOTES:

- 1. The cable type is RG-214.*
- 2. The overall length of the cable is 5.5 meters.*

9.4 Correction factors for CABLE
from spectrum analyzer
to test antenna above 2.9 GHz

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

NOTES:

- 1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.*
- 2. The cable is used for measurements above 2.9 GHz.*
- 3. The overall length of the cable is 10 meters.*

9.5 Correction factors for CABLE
from EMI receiver
to test antenna
at 10 meter range.

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	9.8
20.0	0.8	1400.0	10.0
30.0	0.9	1600.0	11.3
40.0	1.2	1800.0	12.2
50.0	1.4	2000.0	13.1
60.0	1.6	2300.0	14.5
70.0	1.8	2600.0	15.9
80.0	1.9	2900.0	16.4
90.0	2.0		
100.0	2.1		
150.0	2.6		
200.0	3.2		
250.0	3.8		
300.0	4.2		
350.0	4.6		
400.0	5.1		
450.0	5.3		
500.0	5.6		
600.0	6.3		
700.0	7.0		
800.0	7.6		
900.0	8.0		
1000.0	8.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 34 meters.
3. The above data is located in file 34M10MO.CBL on the disk marked "Radiated Emissions Tests EMI Receiver".

12.6 Correction factors for LOG PERIODIC ANTENNA

**Type LPD 2010/A
at 3 and 10 meter ranges.**

Distance of 3 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.1
250.0	10.2
300.0	12.5
400.0	15.4
500.0	16.1
600.0	19.2
700.0	19.4
800.0	19.9
900.0	21.2
1000.0	23.5

Distance of 10 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.0
250.0	10.1
300.0	11.8
400.0	15.3
500.0	15.6
600.0	18.7
700.0	19.1
800.0	20.2
900.0	21.1
1000.0	23.2

NOTES:

1. Antenna serial number is 1038.
2. The above lists are located in file number 38M30.ANT for a 3 meter range,
and file number 38M100.ANT for a 10 meter range.
3. The files mentioned above are located on the disk marked "Radiated Emission
Test EMI Receiver".

9.6 Correction factors for

LOG PERIODIC ANTENNA

**Type SAS-200/511
at 3 meter range.**

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
1.0	24.9
1.5	27.8
2.0	29.9
2.5	31.2
3.0	32.8
3.5	33.6
4.0	34.3
4.5	35.2
5.0	36.2
5.5	36.7
6.0	37.2
6.5	38.1

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
7.0	38.6
7.5	39.2
8.0	39.9
8.5	40.4
9.0	40.8
9.5	41.1
10.0	41.7
10.5	42.4
11.0	42.5
11.5	43.1
12.0	43.4
12.5	44.4
13.0	44.6

NOTES:

1. Antenna serial number is 253.
2. The above lists are located in file number SAS3M0.ANT for a 3 meter range.
3. The files mentioned above are located on the disk marked "Antenna Factors".

**9.7 Correction factors for BICONICAL ANTENNA
Type BCD-235/B,
at 3 meter range**

FREQUENCY (MHz)	AFE (dB/m)
20.0	19.4
30.0	14.8
40.0	11.9
50.0	10.2
60.0	9.1
70.0	8.5
80.0	8.9
90.0	9.6
100.0	10.3
110.0	11.0
120.0	11.5
130.0	11.7
140.0	12.1
150.0	12.6
160.0	12.8
170.0	13.0
180.0	13.5
190.0	14.0
200.0	14.8
210.0	15.3
220.0	15.8
230.0	16.2
240.0	16.6
250.0	17.6
260.0	18.2
270.0	18.4
280.0	18.7
290.0	19.2
300.0	19.9
310	20.7
320	21.9
330	23.4
340	25.1
350	27.0

NOTES:

1. Antenna serial number is 1041.
2. The above list is located in file 19BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".

**9.8 Correction factors for BICONICAL ANTENNA
Type BCD-235/B,
10 meter range**

FREQUENCY (MHz)	AFE (dB/m)
30.0	12.1
40.0	10.6
50.0	10.6
60.0	8.9
70.0	8.5
80.0	9.6
90.0	9.4
100.0	9.6
110.0	10.3
120.0	10.7
130.0	12.6
140.0	12.7
150.0	12.7
160.0	13.8
170.0	13.7
180.0	14.9
190.0	13.4
200.0	13.1
210.0	14.0
220.0	14.5
230.0	15.8
240.0	16.0
250.0	16.6
260.0	16.7
270.0	18.3
280.0	18.5
290.0	19.3
300.0	20.9

NOTES:

1. Antenna serial number is 1041.
2. The above list is located in file 41BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".

**9.9 Correction factors for BICONICAL ANTENNA
Type 3109,
1.0 meter range**

FREQUENCY (MHz)	AFE (dB/m)
20.0	11.1
30.0	12.0
40.0	12.0
50.0	11.4
60.0	10.3
70.0	10.7
80.0	8.3
90.0	9.0
100.0	10.0
110.0	11.6
120.0	13.6
130.0	14.2
140.0	13.5
150.0	12.7
160.0	12.7
170.0	13.6
180.0	15.3
190.0	14.6
200.0	14.7
210.0	15.3
220.0	15.8
230.0	17.0
240.0	18.0
250.0	18.1
260.0	18.0
270.0	17.5
280.0	18.2
290.0	19.7
300.0	21.8

NOTES:

1. Antenna serial number is 3244.
2. The above list is located in file 44BIC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver"

**9.10 Correction factors for BICONICAL ANTENNA
Type 3109,
3 meter range**

FREQUENCY (MHz)	AFE (dB/m)
20.0	18.4
30.0	14.0
40.0	12.3
50.0	10.6
60.0	8.3
70.0	8.7
80.0	7.2
90.0	8.6
100.0	10.1
110.0	11.2
120.0	11.8
130.0	12.3
140.0	12.7
150.0	12.5
160.0	12.4
170.0	12.1
180.0	12.2
190.0	12.8
200.0	13.7
210.0	14.5
220.0	15.4
230.0	15.9
240.0	16.3
250.0	16.7
260.0	17.1
270.0	17.2
280.0	17.5
290.0	18.1
300.0	18.9

NOTES:

1. Antenna serial number is 3244.
2. The above list is located in file 44BIC3M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver"



10. APPENDIX B - CORRESPONDENCE

Date: 18/01/2006

From: Sid Sanders

To: EMC

Subject: RE: Permissive Change Class II for RM 915-Roseman Engineering
18 Jan 2006

Shaik,

You are correct, this can be done by a Class II change. They can add new antenna this way & leave the original antenna on the Certification.

Regards,

Sid

-----Original Message-----

From: Emc [mailto:emc@itl.co.il]

Sent: 18 January, 2006 10:02 AM

To: Sid Sanders (E-mail)

Cc: Shmuel Hazon (E-mail); Lior Yehoshua (E-mail)

Subject: Permissive Change Class II for RM 915-Roseman Engineering

Hi Sid,

1. The subject product is a 902-928 spread spectrum transceiver authorized for FCC (ID # JAKRM915).
2. The customer would like to change the antenna in use to another antenna having 0 dBi gain.
3. To authorize the above change, I suggest a Permissive Change Class II and re-testing of radiated emission 30 MHz- 9.3 GHz.
4. Please verify/comment.

Regards

Shaik Raz

EMC Laboratory Manager

EMC Laboratory

ITL (Product Testing) Ltd.

Kfar Bin Nun

Israel

Tel: +972-8-979-7799

Fax: +972-8-979-7702

Email: sraz@itl.co.il/emc@itl.co.il

<http://www.itl.co.il>

This e-mail message may contain privileged or confidential information. If you are not the intended recipient, you may not disclose, use, disseminate, distribute, copy or rely upon this message or attachment in any way. If you received this e-mail message in error, please return by forwarding the message and its attachments to the sender.