

**ZACTA** Technology Corporation Yonezawa Testing Center  
4149-7 Hachimanpara 5-chome Yonezawa-shi Yamagata 992-1128 Japan  
Phone: +81-238-28-2880 Fax: +81-238-28-2888

# TEST REPORT

Report No.: Z01C-01134

Issue Date: March 30, 2001

The device, as described herewith, was tested pursuant to applicable test procedure indicated below and complies with the requirements of;

FCC Part15 Subpart B, Class B

The EUT complies with section 15.37 "Transition provision for compliance with the rules".

The test results are traceable to international or national standards.

Applicant	:	Sanyo Electric Co., Ltd. Information Products Division 1-1-1, Sakata, Oizumi-machi Ora-gun , Gunma-ken 370-0596 Phone: +81-276-61-8006 Fax.: +81-276-61-8752
Equipment under test (EUT)	:	CD-RW Drive
FCC ID	:	JBQCDR022
Trade Name	:	SANYO
Model Number	:	CRD-BP1500P
Serial Number	:	PP091
EUT Condition	:	Pre-production

Test procedure	:	ANSI C63.4-1992
Date of test	:	March 27, 28, 2001
Test place	:	Site 3
Test results	:	Complied

Zacta Technology Corporation certifies that no party to the application is subject to a denial of federal benefits, that include FCC benefits, pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21U.S.C. 853(a).

The results in this report are applicable only to the samples tested.  
This report shall not be re-produced except in full without the written approval of ZACTA Technology Corporation.

Test performed by: Takuya Osato / EMC engineer

Authorized by: Kiyoshi Endo / Manager of Technical Division



NVLAP LAB CODE 200306-0

## ***Table of contents***

---

	Page
<b><i>1. Equipment description</i></b> .....	<b>3</b>
1.1 EUT information.....	3
1.2 Operating flow.....	3
<b><i>2. Configuration information</i></b> .....	<b>4</b>
2.1 Peripheral(s) information.....	4
2.2 Cable(s) information.....	4
2.3 System configuration.....	5
<b><i>3. Test procedure</i></b> .....	<b>6</b>
3.1 Description of Conducted Emission testing.....	6
3.2 Test equipment for Conducted emission.....	6
3.3 Description of Radiated emission testing.....	7
3.4 Test equipment for Radiated emission.....	8
<b><i>4. Laboratory description</i></b> .....	<b>9</b>
4.1 Description for Test Site.....	9
4.2 Uncertainty.....	10
<b><i>5. Results of the measurements</i></b> .....	<b>11</b>
5.1 Results of the measurements.....	11
5.2 Deviation from the standard.....	11
5.3 Sample of field strength calculation.....	11
<b><i>6. Test Data</i></b> .....	<b>12</b>

## 1. Equipment description

### 1.1 EUT information

No.	EUT	Company	Model No.	Serial No.	FCC ID/DoC	Comment
1	CD-RW Drive	SANYO	CRD-BP1500P	PP091	JBQCDR022	-

Max. used frequency : 310.00MHz ( $\pm 25\%$ )

Oscillator(s)/Crystal(s) : 20.00MHz, 33.86MHz, 310.00MHz ( $\pm 25\%$ )

Operating frequency

Power ratings : DC +5V, +12V  
[EUT is powered from Host PC.  
Power supply for Host PC in testing was AC 120V 60Hz.]


Port(s) : Headphones jack  
Audio connector  
IDE connector  
DC connector (DC input)

Size : (W) 146 x (H) 41.3 x (D) 188.5 mm

Operating mode : CD READ mode  
CD WRITE mode

Variation of model(s) : Not applicable

### 1.2 Operating flow

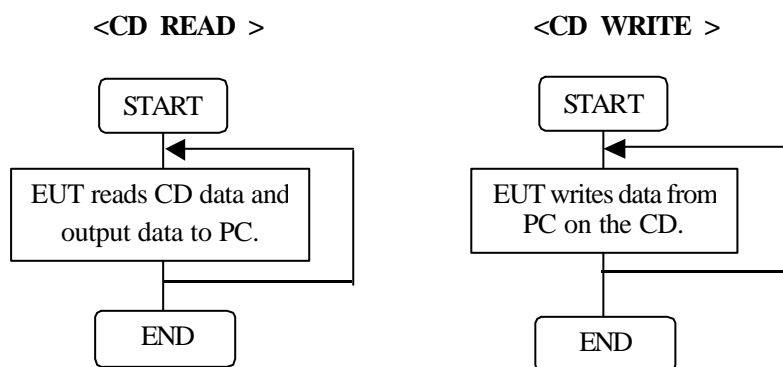

## 2. Configuration information

### 2.1 Peripheral(s) information

No.	Equipment	Company	Model No.	Serial No.	DoC / FCC ID	Comment
2	Main board	COMPAQ	N/A	N/A	N/A	-
3	Personal Computer	COMPAQ	Prosig 320 C500/ M1 JPN2	7016 CZLIPO116	DoC	-
4	Headphone	FISHER	N/A	N/A	N/A	-
5	Speaker	Panasonic	RP-SP30	N/A	N/A	-
6	Printer	HP	C4555A	SG69A1425N	B94C4555X	-
7	Display	Goldstar	Studio Works 56i	15005G004960	BEJCS585	-
8	Modem	US Robotics	839	000839032BK6YV4J	DoC	-
9	AC adapter for Modem	US Robotics	N/A	N/A	N/A	-
10	Keyboard	COMPAQ	KB-9965	B13B00WBUJ6150	DoC	-
11	Mouse	COMPAQ	Intel liMouse	0805393-5	DoC	-

### 2.2 Cable(s) information

No.	Cable	Length [m]	Shield	Connector	From	To	Comment
a	IDE cable	0.4	Unshielded	Plastic	EUT	Main board	-
b	Audio cable	0.5	Unshielded	Plastic	EUT	Main board	-
c	DC cable	0.2	Unshielded	Plastic	EUT	Power supply	-
d	Headphone cable	2.0	Unshielded	Metal	EUT	Headphone	-
e	Speaker cable	1.0	Unshielded	Metal	PC	Speaker	-
f	Centronics cable	2.0	Shielded	Metal	PC	Printer	-
g	AC power cord for Printer	2.0	Shielded	Plastic	Printer	AC outlet	-
h	Video cable	1.5	Shielded	Metal	PC	Display	Bundled excess cable.
i	AC power cord for Display	2.2	Unshielded	Plastic	Display	AC outlet	-
j	RS232C cable	2.0	Shielded	Metal	PC	Modem	Bundled excess cable.
k	DC cable for Modem AC adapter	2.0	Unshielded	Metal	Modem	AC adapter	-
l	Keyboard cable	2.0	Unshielded	Metal	PC	Keyboard	Coiled
m	Mouse cable	1.8	Unshielded	Metal	PC	Mouse	-
n	AC power cord for PC	2.0	Shielded	Plastic	PC	AC outlet	-



### 3. Test procedure

#### 3.1 Description of Conducted Emission testing


Conducted emission testing is performed using test receiver. The detector function of the receiver is set to CISPR quasi-peak mode and the bandwidth is set to 9kHz. The frequency range from 450kHz to 30 MHz is scanned, and six highest emissions (Min.) are reported. The test results represent the worst-case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation.

EUT and support equipment is on a 1 meter x 1.5 meter surface, 0.8-meter height wooden table that is placed 40 cm away from the vertical metal ground plane.

Conducted emission of Host PC was tested because EUT is powered from Host PC. 50  $\Omega$  /50uH Line Impedance Stabilization Network (LISN) are 80cm away from the Host PC and placed on the conducting ground plane. LISN for peripheral is terminated in 50  $\Omega$ .

Sufficient time for the EUT, support equipment and test equipment are allowed in order for them to warm up to their normal operating condition.

**Test Configuration for Conducted emission Test**

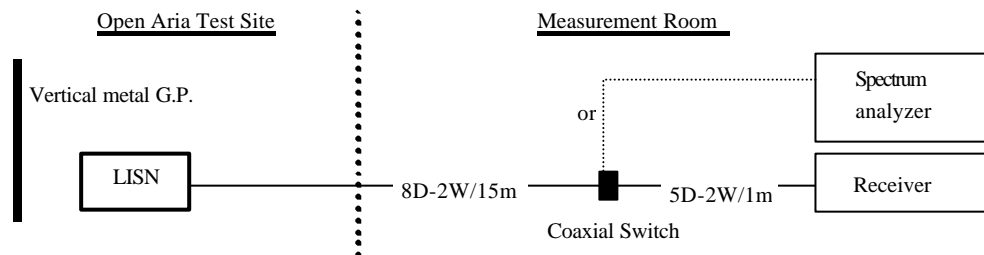

#### 3.2 Test equipment for Conducted emission

Equipment	Company	Model No.	Serial No.	Calibration date	Period
Spectrum analyzer	Agilent Technologies	8568B	2841A04243	Sep. 2000	1 year
Test Receiver	Kyoritsu Electrical Works, Ltd.	KNM-2402	4N-220-1	Sep. 2000	1 year
Line Impedance Stabilization Network for Host PC	Kyoritsu Electrical Works, Ltd.	KNW-242C	8-1096-3	Mar. 2001	1 year
Line Impedance Stabilization Network for Peripheral	Kyoritsu Electrical Works, Ltd.	KNW-242	8-1094-5	May. 2000	1 year
50 $\Omega$ terminator	Agilent Technologies	11593A	N/A	Aug. 2000	1 year
Coaxial cable	FUJIKURA	8D-2W/15m 5D-2W/1m	H120601#3/C	May. 2000	1 year
Coaxial Switch	ANRITSU	MP59B	M52767	May. 2000	1 year

\*The above equipment calibration is traceable to NIST or an equivalent standards reference organization.

### 3.3 Description of Radiated emission testing

Radiated emission testing is performed at 3m distance using broadband antenna (Biconical antenna, log-periodic antenna and double-ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission. Frequency Range: 30MHz –1GHz is scanned and investigated using receiver, and above 1GHz, using spectrum analyzer. The detector function of the test receiver is set to CISPR Quasi-peak mode and the bandwidth is set to 120kHz. Peak and average detectors are used for measurements above 1GHz. The bandwidth of spectrum analyzer is set to 1MHz.


The EUT and support equipment are placed on a 1 meter x 1.5 meter surface, 0.8 meter height wooden table. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission.

Interconnecting cables, which hanging closer than 40cm to the horizontal metal ground plane are bundled its excess in center. Six highest emissions (Min.) are reported. The test results represent the worst-case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation.

Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.

The highest frequency used in the EUT is 310MHz, therefore, the frequency range is investigated from 30MHz up to the frequency 2GHz, as specified in CFR section 15.33.

**Test Configuration for Radiated emission Test**

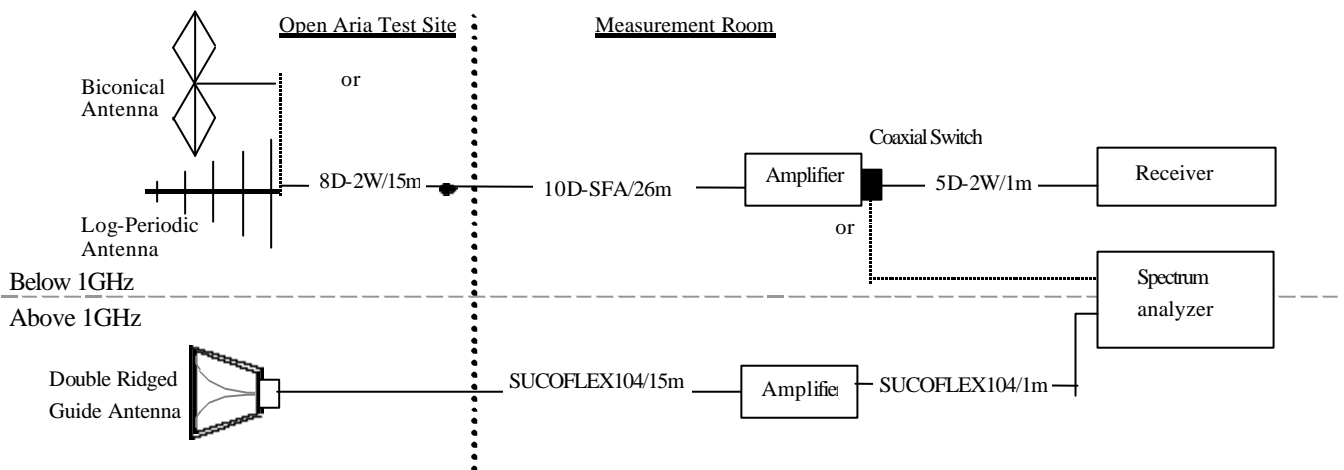

**3.4 Test equipment for Radiated emission**

**[Testing below 1GHz]**

Equipment	Company	Model No.	Serial No.	Calibration date	Period
Spectrum analyzer	Agilent Technologies	8568B	2841A04243	Sep. 2000	1 year
RF Preamplifier	Anritsu	MH648A	M96257	Nov. 2000	1 year
Test Receiver	Kyoritsu Electrical Works, Ltd.	KNM-5002 KCV-6002	4N-187-2 4-288-1	Sep. 2000	1 year
Biconical Antenna	Schwarzbeck	BBA9106/VHA9103LE	02130847	Jun. 2000	1 year
Log Periodic Antenna	Schwarzbeck	UHALP9108A	0398	Mar. 2001	1 year
Coaxial cable	FUJIKURA	8D-2W/15m 10D-SFA/26m 5D-2W/1m	H120601#3/R3	May. 2000	1 year
Coaxial Switch	ANRITSU	MP59B	M52767	May. 2000	1 year
Site attenuation	ZACTA Technology Corp.	Site 3	N/A	Dec.2000	1 year

**[Testing above 1GHz]**

Equipment	Company	Model No.	Serial No.	Calibration date	Period
Spectrum Analyzer	ADVANTEST	R3271A	65050042	May. 2000	1 year
RF Preamplifier	Agilent Technologies	8449B	3008A00589	May. 2000	1 year
Double Ridged Guide Antenna	EMCO	3115	4328	Sep. 2000	1 year
Coaxial cable	SUHNER	SUCOFLEX 104/15m SUCOFLEX 104/1m	108014/4 108015/4	May. 2000	1 year

Calibration is traceable to NIST or an equivalent standards reference organization.



## 4. Laboratory description

---

### 4.1 Description for Test Site

**1. Location:** ZACTA Technology Corporation Yonezawa Testing Center  
4149-7 Hachimanpara 5-chome Yonezawa-shi Yamagata 992-1128 Japan  
Phone: +81-238-28-2880 Fax: +81-238-28-2888

**2. The Number and Type of Site:**

Site name: Site 1, Site 2 and Site 3 - Total 3 sites.  
Site type : Whether protected site  
\*3m/10m Radiated emission & Conducted emission testing can be performed on each site

**3. Facility filing information:**

1) FCC site filing: Pursuant to CFR47§2.948

Site name	Final filing date
Site 1, Site 2 and Site 3	March 6, 2000

2) VCCI site filing: Pursuant to V-5/99.05 VCCI Regulations for Registration of measurement facilities

Site name	Radiated emission Registration No.	Conducted emission Registration No.	Duration of Registration
Site 1	R-136	C-132	September 30, 2003
Site 2	R-137	C-133	September 30, 2003
Site 3	R-138	C-134	September 30, 2003

3) NVLAP Accreditation:

NVLAP Lab. code: **200306-0**

NVLAP information: NVLAP accreditation does not constitute any product endorsement by NVLAP or any agent of the U.S. Government

**4.2 Uncertainty**

Expanded Uncertainties stated were calculated with a coverage Factor  $k=2$ .

- $\pm 2.97\text{dB}$  . . . For Conducted Emission
- $\pm 5.23\text{dB}$  . . . For 3m Radiated Emission
- $\pm 4.26\text{dB}$  . . . For 10m Radiated Emission

**Judgment of Uncertainty under the measurement data and the scope of permission**

Example A	Example B	Example C	Example D
Judgment: Complied	Judgment: Complied	Judgment: Not complied	Judgment: Not complied
The result of measurement is compliance with the limit in 95% or more confidence probability.	The result of measurement is compliance with the limit with less extent of uncertainty of the measurement. It is impossible to consider it complies with the limit in 95% confidence probability, but the result satisfies the limit in high probability.	The result of measurement is not compliance with the limit with less extent of uncertainty of the measurement. It is impossible to consider it complies with the limit in 95% confidence probability, but the result does not satisfy the limit in high probability.	The result of measurement is not compliance with the limit.

————— : Limit      ■ : Result of the measurements----- : Uncertainty

## 5. Results of the measurements

### 5.1 Results of the measurements

The minimum margins to the limits are as follows.

Conducted emission	Margin	Frequency	Detector	Operating mode	Data sheet
	8.4dB	0.482MHz	Quasi-peak	CD Read mode	No. 2

Radiated emission	Margin	Frequency	Antenna Polarity	Antenna Height	Table degree	Operating mode	Data sheet
	2.8dB	569.22MHz	Vertical	1.0m	15°	CD Read mode	No. 4

### 5.2 Deviation from the standard

Not applicable.

### 5.3 Sample of field strength calculation

**Conducted Emission** [Sample Calculation]  $\text{dBuV} = 20\log_{10}(\text{uV})$

Class B
Limit @ 3.332MHz = 250uV = 48.0dBuV
Reading = 41.6dBuV
Cable Loss + LISN Factor = 0.2 + 0.5 = 0.7dB
Total = 41.6 + 0.7 = 42.3dBuV
Margin = 48.0 - 42.3 = <u>5.7dB</u>

**Radiated Emission** [Sample Calculation]  $\text{dBuV/m} = 20\log_{10}(\text{uV/m})$

Class B
Limit @ 147.6MHz = 150uV/m = 43.5dBuV/m
Reading = 42.8dBuV
Ant. Factor + Cable Loss - Amp. Gain = 14.2 + 3.0 - 30.0 = -12.8dB
Total = 42.8 - 12.8 = 30.0dBuV/m
Margin = 43.5 - 30.0 = <u>13.5dB</u>

## 6. Test Data

\*\*\*\*\* CONDUCTED EMISSION \*\*\*\*\*

Standard : FCC Part15 SubpartB  
Class : B

Sheet Number : 1

Date of test : 2001/3/28  
Test Site : 3  
Temperature [C] : 20.0  
Humidity [%] : 40.0  
Operator : T.Osato  
Company Name : SANYO  
EUT : CD-RW Drive  
Model Number : CRD-BP1500P  
Serial Number : PP091  
Test Mode : CD Write Mode  
Comment :

Signature : \_\_\_\_\_

[Quasi-Peak]							
Phase	Frequency	Reading	Factor	Emission Level	Limit	Margin	Comment
	[MHz]	[dBuV]	[dB]	[dBuV]	[dBuV]	[dB]	
L1	0.483	38.6	0.1	38.7	48.0	9.3	*
L1	1.174	35.4	0.2	35.6	48.0	12.4	
L1	1.453	35.9	0.2	36.1	48.0	11.9	
L1	1.728	36.6	0.2	36.8	48.0	11.2	
L1	2.213	35.9	0.2	36.1	48.0	11.9	
L1	2.490	34.4	0.2	34.6	48.0	13.4	
L2	0.483	38.5	0.1	38.6	48.0	9.4	
L2	0.669	30.3	0.1	30.4	48.0	17.6	
L2	1.151	34.0	0.2	34.2	48.0	13.8	
L2	1.451	35.7	0.2	35.9	48.0	12.1	
L2	1.730	36.4	0.2	36.6	48.0	11.4	
L2	2.490	34.0	0.2	34.2	48.0	13.8	

\* The worst emission.

Factor LISN Factor + Cable Loss

Ver.2.00 F3#007

\*\*\*\*\* CONDUCTED EMISSION \*\*\*\*\*

Standard : FCC Part15 SubpartB  
Class : B

Sheet Number : 2

Date of test : 2001/3/28  
Test Site : 3  
Temperature [C] : 20.0  
Humidity [%] : 40.0  
Operator : T.Osato  
Company Name : SANYO  
EUT : CD-RW Drive  
Model Number : CRD-BP1500P  
Serial Number : PP091  
Test Mode : CD Read Mode  
Comment :

Signature : \_\_\_\_\_

[Quasi-Peak]							Comment
Phase	Frequency [MHz]	Reading [dBuV]	Factor [dB]	Emission Level [dBuV]	Limit [dBuV]	Margin [dB]	
L1	0.482	37.4	0.1	37.5	48.0	10.5	
L1	0.577	35.1	0.1	35.2	48.0	12.8	
L1	1.463	35.9	0.2	36.1	48.0	11.9	
L1	2.004	35.2	0.2	35.4	48.0	12.6	
L1	2.282	34.6	0.2	34.8	48.0	13.2	
L1	2.836	33.5	0.2	33.7	48.0	14.3	
L2	0.482	39.5	0.1	39.6	48.0	8.4	*
L2	0.691	36.2	0.1	36.3	48.0	11.7	
L2	1.451	38.2	0.2	38.4	48.0	9.6	
L2	1.730	36.6	0.2	36.8	48.0	11.2	
L2	2.281	35.0	0.2	35.2	48.0	12.8	
L2	2.491	35.0	0.2	35.2	48.0	12.8	

\* :The worst emission.

Factor LISN Factor + Cable Loss

Ver.2.00 F3#007

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*

Standard : FCC Part15 SubpartB  
 Class : B  
 Distance [m] : 3  
 Date of test : 2001/3/27  
 Test Site : 3  
 Temperature [C] : 22.0  
 Humidity [%] : 40.0  
 Operator : T.Osato  
 Company Name : SANYO  
 EUT : CD-RW Drive  
 Model Number : CRD-BP1500P  
 Serial Number : PP091  
 Test Mode : CD-Write Mode  
 Comment :

Sheet Number : 3

Signature : \_\_\_\_\_

Antenna Pol.	Antenna Height [m]	Table Radian [Deg.]	Reading Frequency [MHz]	Reading Level [dBuV]	Factor [dBuV/m]	Emission Level [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Comment
HOR/VER	1.6	90	129.96	49.2	-14.1	35.1	43.5	8.4	*
VER	1.0	0	142.77	44.8	-13.2	31.6	43.5	11.9	
HOR	2.8	180	172.83	45.8	-11.4	34.4	43.5	9.1	
HOR	1.5	0	208.28	44.2	-10.4	33.8	43.5	9.7	
VER	2.1	135	311.17	42.7	-12.6	30.1	46.0	15.9	
HOR	1.3	275	465.33	42.3	-8.8	33.5	46.0	12.5	
VER	2.4	45	465.95	38.3	-8.8	29.5	46.0	16.5	
VER	2.4	215	571.31	35.3	-6.4	28.9	46.0	17.1	
VER	1.5	270	609.58	42.9	-6.0	36.9	46.0	9.1	
HOR	1.5	270	677.37	40.3	-4.9	35.4	46.0	10.6	
VER	1.4	15	763.31	37.5	-3.7	33.8	46.0	12.2	
VER	1.3	0	984.25	38.6	0.3	38.9	54.0	15.1	
HOR	1.5	250	998.23	39.3	0.5	39.8	54.0	14.2	

-----  
 \* :The worst emission. Factor :Antenna Factor + Cable Loss - Amp Gain Ver.2.00 F3#007

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*

Standard : FCC Part15 SubpartB  
 Class : B  
 Distance [m] : 3  
 Date of test : 2001/3/27  
 Test Site : 3  
 Temperature [C] : 22.0  
 Humidity [%] : 40.0  
 Operator : T.Osato  
 Company Name : SANYO  
 EUT : CD-RW Drive  
 Model Number : CRD-BP1500P  
 Serial Number : PP091  
 Test Mode : CD-Read Mode  
 Comment :

Sheet Number : 4

Signature : \_\_\_\_\_

Antenna Pol.	Antenna Height [m]	Table Radian [Deg.]	Reading Frequency [MHz]	Reading Level [dBuV]	Factor [dBuV/m]	Emission Level [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Comment
HOR	2.3	147	146.55	43.0	-12.9	30.1	43.5	13.4	
HOR	1.5	270	197.31	42.8	-10.6	32.2	43.5	11.3	
HOR	1.5	90	208.59	41.9	-10.4	31.5	43.5	12.0	
VER	1.0	270	284.74	36.3	-8.3	28.0	46.0	18.0	
HOR	1.1	270	284.84	48.6	-8.3	40.3	46.0	5.7	
VER	1.0	15	569.22	49.9	-6.7	43.2	46.0	2.8	*
HOR	2.2	90	569.46	45.6	-6.7	38.9	46.0	7.1	
VER	1.2	150	854.01	44.4	-2.1	42.3	46.0	3.7	
HOR	2.2	265	854.10	40.1	-2.1	38.0	46.0	8.0	
VER	1.0	180	1139.12	33.8	-7.5	26.3	54.0	27.7	AV

\* The worst emission.

Factor = Antenna Factor + Cable Loss - Amp Gain

Ver.2.00 F3#007