

**ZACTA** Technology Corporation Yonezawa Testing Center  
4149-7 Hachimurapara 5-chome Yonezawa-shi Yamagata 992-1128 Japan  
Phone: +81-238-28-2880 Fax: +81-238-28-2888

# TEST REPORT

Report number: Z01C-02310

Issue date: January 15, 2003

The device, as described herewith, was tested pursuant to applicable test procedure indicated below and complies with the requirements of;

FCC Part 15 Subpart B, Class B

The EUT complies with section 15.37 "Transition provision for compliance with the rules".

The test results are traceable to the international or national standards.

Applicant	: Sanyo Electric Co., Ltd. Optical Device Division 1-1-1, Sakata, Oizumi-machi Ora-gun, Gunma-ken 370-0596 Phone: +81-276-61-8006 Fax: +81-276-61-8752
Equipment under test (EUT)	: DVD-WRITER
FCC ID	: JBQCDR031
Trade name	: SANYO
Model number	: CRD-BPDV2
Serial number	: PP2003
EUT condition	: Pre-production

Test procedure : ANSI C63.4-1992  
Date of test : January 11, 2003  
Test place : Site 3  
Test results : Complied

Zacta Technology Corporation certifies that no party to the application is subject to a denial of federal benefits, that include FCC benefits, pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).

The results in this report are applicable only to the samples tested.

This report shall not be re-produced except in full without the written approval of ZACTA Technology Corporation.

Test performed by: Nobuaki Marukawa  
EMC engineer



Authorized by: Hiroaki Suzuki  
Chief engineer



**NVLAP**<sup>®</sup>  
NVLAP LAB CODE 200306-0

## ***Table of contents***

---

	Page
<b><i>1. Equipment description</i></b> .....	<b>3</b>
1.1 EUT information.....	3
1.2 Operating flow.....	3
<b><i>2. Configuration information</i></b> .....	<b>4</b>
2.1 Peripheral(s) information.....	4
2.2 Cable(s) information.....	4
2.3 System configuration.....	5
<b><i>3. Test procedure</i></b> .....	<b>6</b>
3.1 Description of Conducted emission testing.....	6
3.2 Test equipment for Conducted emission.....	6
3.3 Description of Radiated emission testing.....	7
3.4 Test equipment for Radiated emission.....	8
<b><i>4. Laboratory description</i></b> .....	<b>9</b>
4.1 Description for Test site.....	9
4.2 Uncertainty.....	10
<b><i>5. Results of the measurements</i></b> .....	<b>11</b>
5.1 Results of the measurements.....	11
5.2 Deviation from the standard.....	11
5.3 Sample of field strength calculation.....	11
<b><i>6. Test Data</i></b> .....	<b>12</b>


## 1. Equipment description

### 1.1 EUT information

No.	EUT	Company	Model No.	Serial No.	FCC ID/DoC	Comment
1	DVD-WRITER	SANYO	CRD-BPDV2	PP2003	JBQCDR031	-

Max. used frequency : 380.00MHz (±80MHz)  
Oscillator(s)/Crystal(s) : 20.00MHz, 33.8688MHz, 380MHz(±80MHz)  
Operating frequency  
Power ratings : DC +5V, +12V  
[EUT is powered from Host PC.  
Power supply for Host PC in testing was AC 120V 60Hz.]  
Port(s) : Headphones jack  
Audio connector  
IDE connector  
DC connector (DC input)  
Size : (W) 148 x (D) 194.2 x (H) 42.3 mm  
Operating mode : CD Read mode  
CD Write mode  
DVD Read mode  
DVD Write mode  
Variation of model(s) : Not applicable

### 1.2 Operating flow

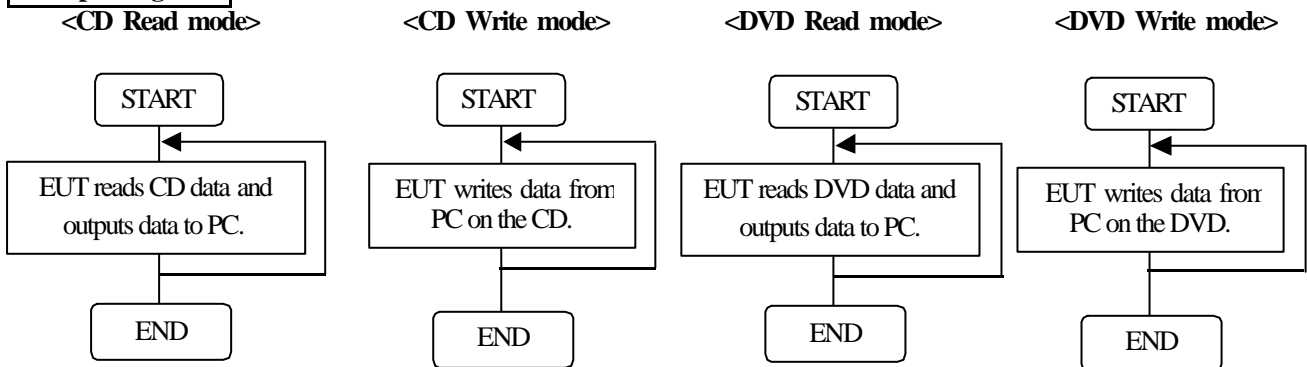

## 2. Configuration information


### 2.1 Peripheral(s) information

No.	Equipment	Company	Model No.	Serial No.	DoC / FCC ID	Comment
2	Main board	COMPAQ	N/A	N/A	N/A	-
3	Personal Computer	COMPAQ	Prosig 320 C500/M1 JPN2	7016 CZHP0116	DoC	-
4	Headphone	N/A	N/A	N/A	N/A	-
5	Speaker	Panasonic	RP-SP30	N/A	N/A	-
6	Printer	HP	C4555A	US6BC212N	B94C4555X	-
7	Display	Goldstar	Studio Works 56i	15005G004960	BEJCS585	-
8	Modem	US Robotics	Sport_Ster 33.6Kbps	000839032BK6YV4J	DoC	-
9	AC adapter for Modem	US Robotics	N/A	N/A	N/A	-
10	Keyboard	COMPAQ	KB-9965	B13B00WBUI6150	DoC	-
11	Mouse	COMPAQ	Intelli Mouse	0805393-5	DoC	-

### 2.2 Cable(s) information

No.	Cable	Length[m]	Shield	Connector	From	To	Comment
a	IDE cable	0.4	Unshielded	Plastic	EUT	Main board	-
b	Audio cable	0.5	Unshielded	Plastic	EUT	Main board	-
c	DC cable	0.2	Unshielded	Plastic	EUT	Power supply	-
d	Headphone cable	1.5	Unshielded	Metal	EUT	Headphone	-
e	Speaker cable	1.0	Unshielded	Metal	PC	Speaker	-
f	Centronics cable	1.2	Shielded	Metal	PC	Printer	-
g	AC power cord for Printer	2.7	Unshielded	Plastic	Printer	AC outlet	-
h	RGB cable	1.5	Shielded	Metal	PC	Display	-
i	AC power cord for Display	2.2	Unshielded	Plastic	Display	AC outlet	-
j	RS232C cable	2.0	Shielded	Metal	PC	Modem	-
k	DC cable for Modem AC adapter	2.0	Unshielded	Metal	Modem	AC adapter	-
l	Keyboard cable	2.0	Unshielded	Metal	PC	Keyboard	-
m	Mouse cable	1.8	Unshielded	Metal	PC	Mouse	-
n	AC power cord for PC	2.0	Unshielded	Plastic	PC	AC outlet	-

**2.3 System configuration**

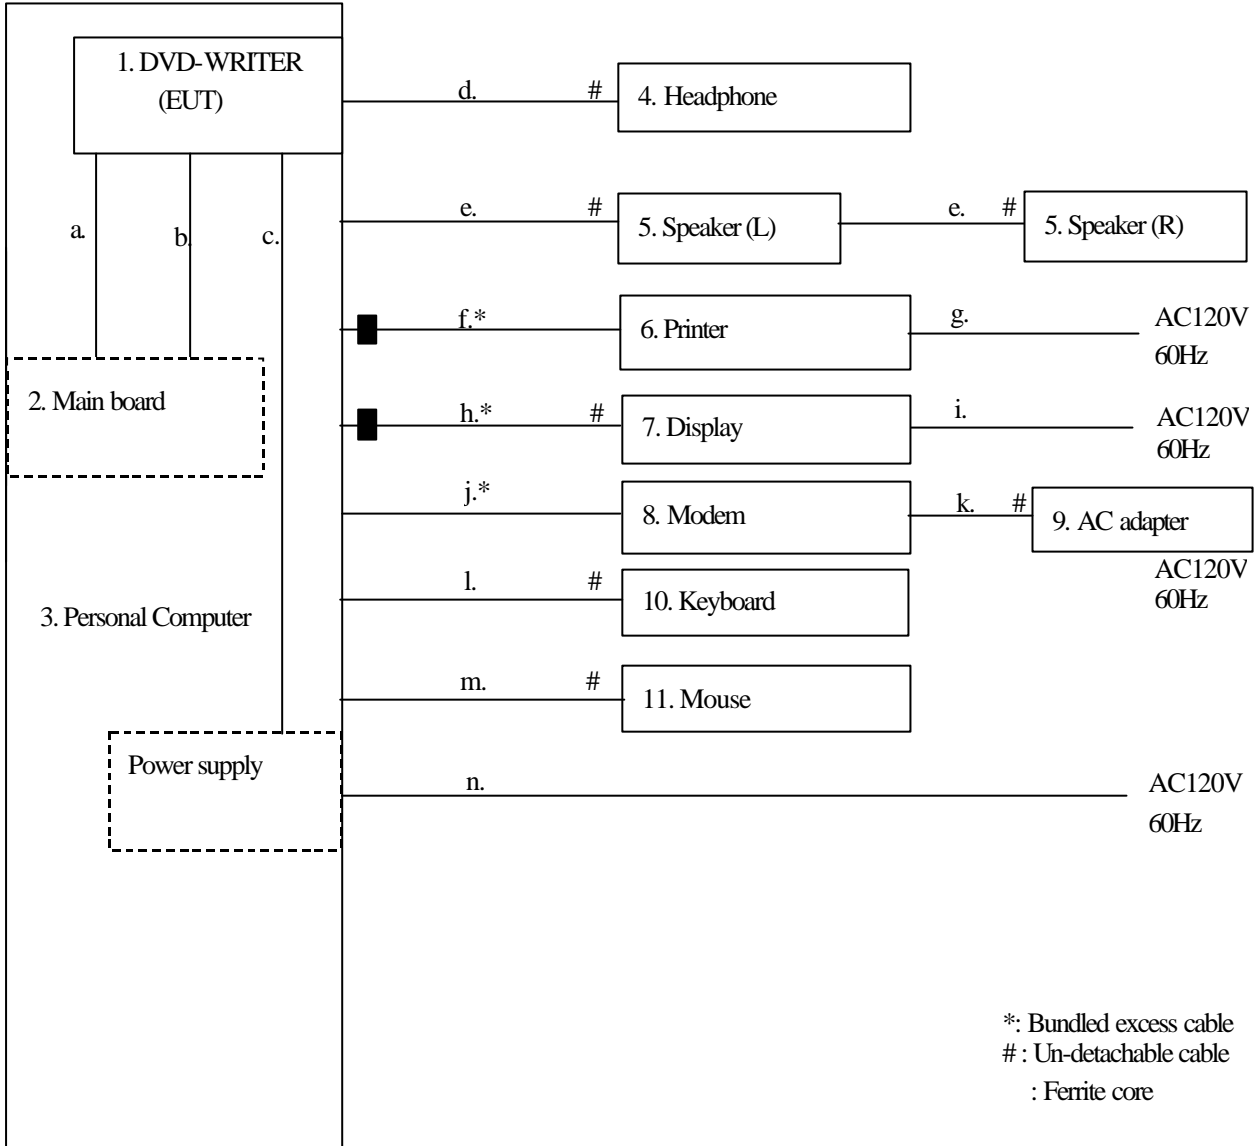

Note 1: Numbers assigned to equipment or cables on this diagram correspond to the list in "1.1 EUT information", "2.1 Peripheral(s) information" and "2.2 Cable(s) information".

Note 2: One ferrite core for Centronics cable(No. f) is not added during testing.

Note 3: RGB cable(No. h) with one ferrite core is un-detachable from Display. Ferrite core is not added during testing.

### 3. Test procedure

#### 3.1 Description of Conducted emission testing


The conducted emission measurements are performed with the test receiver. The detector function of the test receiver is set to CISPR quasi-peak mode and the bandwidth is set to 9kHz. The frequency range from 150kHz to 30 MHz is scanned, and at least six highest emissions are reported. The test results represent the worst-case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation.

EUT and support equipment are on a 1 meter x 2.3 meter surface, 0.8 meter height wooden table. The vertical metal ground plane of 2.4 meter x 2.7 meter in size is placed 40 cm away from the rear of table top.

50  $\Omega$  /50  $\mu$  H Line Impedance Stabilization Network (LISN) are 80cm away from the Host PC and placed on the conducting ground plane. LISN for peripheral is terminated in 50  $\Omega$ .

Sufficient time for the EUT, support equipment and test equipment are allowed in order for them to warm up to their normal operating condition.

Test configuration for Conducted emission test

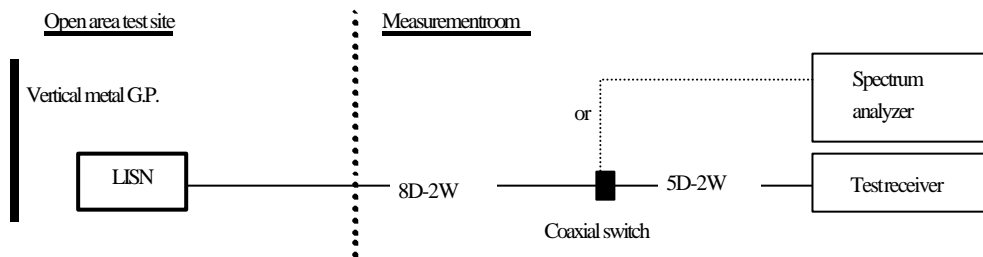

#### 3.2 Test equipment for Conducted emission

Equipment	Company	Model No.	Serial No.	Calibration date	Period
Spectrum analyzer	Agilent Technologies	8568B	2634A03228	Oct. 2002	1 year
Test receiver	Kyoritsu Electrical Works, Ltd.	KNM-2402	4N-220-1	Dec. 2002	1 year
Line impedance stabilization network for Host PC	Kyoritsu Electrical Works, Ltd.	KNW-407	8-663-4	May. 2002	1 year
Line impedance stabilization network for peripheral	CDI	8012-50-R-24-BNC	887116	May. 2002	1 year
50 $\Omega$ terminator	Agilent Technologies	11593A	N/A	Sep. 2002	1 year
Coaxial cable	FUJIKURA	8D-2W/15m 5D-2W/1m	YTCRFC#3C	May. 2002	1 year
Coaxial switch	ANRITSU	MP59B	6100097270	May. 2002	1 year

\* The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.

**3.3 Description of Radiated emission testing**


Radiated emission measurements are performed at 3m distance with the broadband antenna (Biconical antenna, log-periodic antenna and double-ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission. Frequency range: 30MHz – 1GHz is scanned and investigated with the test receiver, and above 1GHz, with the spectrum analyzer. The detector function of the test receiver is set to CISPR Quasi-peak mode and the bandwidth is set to 120kHz. Peak and average detectors are used for measurements above 1GHz. The bandwidth of the spectrum analyzer is set to 1MHz.

The EUT and support equipment are placed on a 1 meter x 2.3 meter surface, 0.8 meter height wooden table. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission.

Interconnecting cables, which hanging closer than 40cm to the horizontal metal ground plane are bundled its excess in center. The highest frequency used in the EUT is 380MHz, therefore, the frequency range is investigated from 30MHz up to the frequency 2GHz, as specified in CFR section 15.33, and at least six highest emissions are reported. The test results represent the worst-case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation.

Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.

**Test configuration for Radiated emission test**

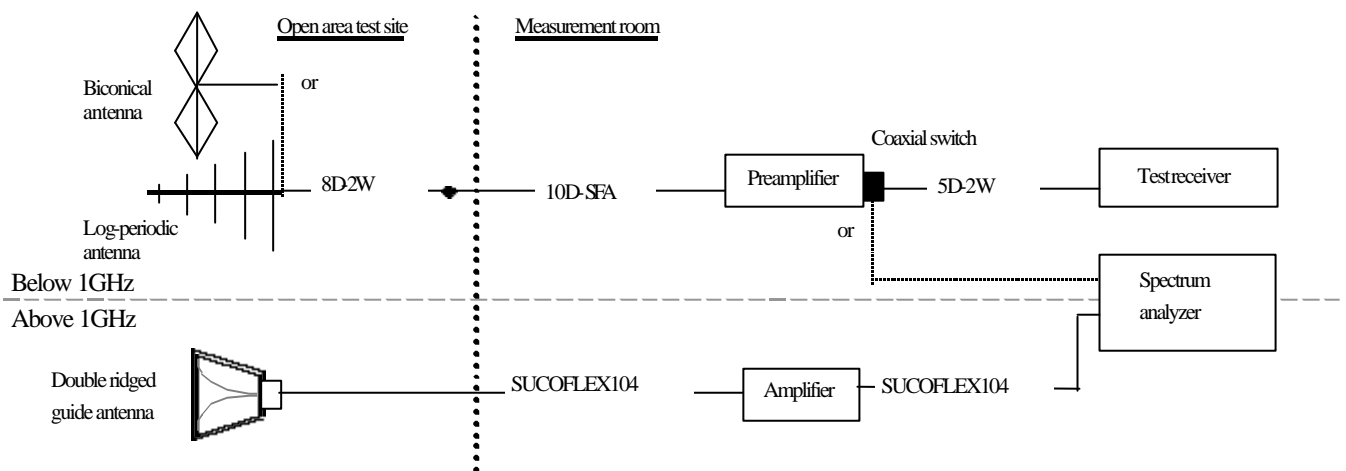

**3.4 Test equipment for Radiated emission**

**[Testing below 1GHz]**

Equipment	Company	Model No.	Serial No.	Calibration date	Period
Spectrum analyzer	Agilent Technologies	8568B	2634A03228	Oct. 2002	1 year
Preamplifier	Anritsu	MH648A	M96257	Nov. 2002	1 year
Test receiver	Kyoritsu Electrical Works, Ltd.	KNM-5002 KCV-6002	4N-187-2 4-288-1	Aug. 2002	1 year
Biconical antenna	Schwarzbeck	VHA9103/BBA9106	1488	May. 2002	1 year
Log Periodic antenna	Schwarzbeck	UHALP9108A	0398	May. 2002	1 year
Coaxial cable	FUJIKURA	8D-2W/8m 10D-SFA/29m 5D-2W/1m	YTCRFC#3R	May. 2002	1 year
Coaxial switch	ANRITSU	MP59B	6100097270	May. 2002	1 year
Site attenuation	ZACTA Technology Corp.	Site 3	N/A	Nov. 2002	1 year

**[Testing above 1GHz]**

Equipment	Company	Model No.	Serial No.	Calibration date	Period
Spectrum analyzer	ADVANTEST	R3271A	65050042	Jun. 2002	1 year
Preamplifier	Agilent Technologies	HP8449B	3008A01008	Nov. 2002	1 year
Double ridged guide antenna	EMCO	3115	4327	Sep. 2001	2 year
Coaxial cable	SUHNER	SUCOFLEX 104/15m SUCOFLEX 104/1m	108014/4 108015/4	Nov. 2002	1 year

\* The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.



## 4. Laboratory description

### 4.1 Description for Test site

**1. Location:** ZACTA Technology Corporation Yonezawa Testing Center  
4149-7 Hachimanpara 5-chome Yonezawa-shi Yamagata 992-1128 Japan  
Phone: +81-238-28-2880 Fax: +81-238-28-2888

**2. The number and type of Site:**

Site name: Site 1, Site 2 and Site 3 - Total 3 sites.  
Site type : Whether protected site  
\*3m/10m Radiated emission & Conducted emission testing can be performed on each site

**3. Facility filing information:**

1) FCC site filing: Pursuant to CFR47 § 2.948

Site name	Final filing date (Terms of validity: 3 years)
Site 1, Site 2 and Site 3	December 17, 2002

2) Industry Canada Oats site filing: Pursuant to RSS 212, Issue 1(Provisional)

Site name	Sites on file: Oats 3m/10m	Filing date (Terms of validity: 3 years)
Site 1	4224-1	January 31, 2002
Site 2	4224-2	January 31, 2002
Site 3	4224-3	January 31, 2002

3) VCCI site filing: Pursuant to V-5/99.05 VCCI Regulations for Registration of measurement facilities

Site name	Radiated emission Registration No.	Conducted emission Registration No.	Duration of Registration
Site 1	R-136	C-132	September 30, 2003
Site 2	R-137	C-133	September 30, 2003
Site 3	R-138	C-134	September 30, 2003

4) NVLAP accreditation:

NVLAP Lab. code: 200306-0

This test report must not be used by client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Scope of accreditation

Emission test methods: CISPR 22, FCC Part 15-Digital devices (Conducted / Radiated emission), AS/NZS 3548.

Immunity test methods: IEC 61000-4-2, 4-3, 4-4, 4-5, 4-6, 4-8, 4-11

**4.2 Uncertainty**

Expanded uncertainties stated were calculated with a coverage Factor  $k=2$

- $\pm 2.97\text{dB}$      ... For Conducted emission
- $\pm 5.23\text{dB}$      ... For 3m Radiated emission
- $\pm 4.26\text{dB}$      ... For 10m Radiated emission

**Judgment of uncertainty under the measurement data and the scope of permission**

Example A	Example B	Example C	Example D
Judgment: Complied	Judgment: Complied	Judgment: Not complied	Judgment: Not complied
The result of measurement is compliance with the limit in 95% or more confidence probability.	The result of measurement is compliance with the limit with less extent of uncertainty of the measurement. It is impossible to consider it complies with the limit in 95% confidence probability, but the result satisfies the limit in high probability.	The result of measurement is not compliance with the limit with less extent of uncertainty of the measurement. It is impossible to consider it complies with the limit in 95% confidence probability, but the result does not satisfy the limit in high probability.	The result of measurement is not compliance with the limit.

————— : Limit     ■ : Result of the measurements     - - - - - : Uncertainty

## 5. Results of the measurements

### 5.1 Results of the measurements

The minimum margins to the limits are as follows.

Conducted emission	Margin	Frequency	Detector	Phase	Operating mode	Data sheet
	5.4dB	0.202MHz	Average	L2	DVD Read mode	No. 3

Radiated emission	Margin	Frequency	Antenna polarity	Antenna height	Table degree	Operating mode	Data sheet
	2.5dB	1000.01MHz	Horizontal	1.0m	130°	DVD Read mode	No. 7

### 5.2 Deviation from the standard

Not applicable.

### 5.3 Sample of field strength calculation

**Conducted emission** [Sample calculation]  $\text{dBuV} = 20\log_{10}(\text{uV})$

Class B
Limit @3.332MHz = 250uV = 48.0dBuV
Reading = 41.6dBuV Cable loss + LISN Factor = 0.2 + 0.5 = 0.7dB Total = 41.6 + 0.7 = 42.3dBuV
Margin = 48.0 - 42.3 = <u>5.7dB</u>

**Radiated emission** [Sample calculation]  $\text{dBuV/m} = 20\log_{10}(\text{uV/m})$

Class B
Limit @147.6MHz = 150uV/m = 43.5dBuV/m
Reading = 42.8dBuV Ant. Factor + Cable loss - Amp. Gain = 14.2 + 3.0 - 30.0 = -12.8dB Total = 42.8 - 12.8 = 30.0dBuV/m
Margin = 43.5 - 30.0 = <u>13.5dB</u>

## 6. Test Data

\*\*\*\*\* CONDUCTED EMISSION \*\*\*\*\*

Standard : FCC Part 15 Subpart B  
Class : B

Sheet number : 1

Date of test : 2003/1/11  
Test site : 3  
Temperature [°C] : 24.3  
Humidity [%] : 18.4  
Operator : N.Marukawa  
Company name : Sanyo Electric Co., Ltd.  
EUT : DVD-WRITER  
Model number : CRD-BPDV2  
Serial number : PP2003  
Test mode : CD Read mode  
Comment :

Signature :



Phase	Frequency [MHz]	Reading		Factor [dB]	Emission level		Limit		Margin		Comment
		QP [dB μ V]	AV [dB μ V]		QP [dB μ V]	AV [dB μ V]	QP [dB μ V]	AV [dB μ V]	QP [dB]	AV [dB]	
L1	0.202	48.0	44.9	0.3	48.3	45.2	63.5	53.5	15.2	8.3	
L1	0.474	36.4	36.1	0.3	36.7	36.4	56.4	46.4	19.7	10.0	
L1	0.697	32.5	31.2	0.3	32.8	31.5	56.0	46.0	23.2	14.5	
L1	0.745	36.2	36.0	0.3	36.5	36.3	56.0	46.0	19.5	9.7	
L1	1.292	37.0	35.2	0.4	37.4	35.6	56.0	46.0	18.6	10.4	
L1	1.898	36.4	35.2	0.4	36.8	35.6	56.0	46.0	19.2	10.4	
L2	0.202	50.0	47.5	0.3	50.3	47.8	63.5	53.5	13.2	5.7	*
L2	0.474	37.1	37.1	0.3	37.4	37.4	56.4	46.4	19.0	9.0	
L2	0.696	33.4	32.4	0.3	33.7	32.7	56.0	46.0	22.3	13.3	
L2	0.746	37.5	37.2	0.3	37.8	37.5	56.0	46.0	18.2	8.5	
L2	1.292	38.8	36.2	0.4	39.2	36.6	56.0	46.0	16.8	9.4	
L2	1.898	38.8	36.6	0.4	39.2	37.0	56.0	46.0	16.8	9.0	

\*: The worst emission. Factor: AMN Factor + Cable Loss

Ver.2.31 F3#008

\*\*\*\*\* CONDUCTED EMISSION \*\*\*\*\*

Standard : FCC Part 15 Subpart B  
Class : B

Sheet number : 2

Date of test : 2003/1/11  
Test site : 3  
Temperature [°C] : 23.9  
Humidity [%] : 18.4  
Operator : N.Marukawa  
Company name : Sanyo Electric Co., Ltd.  
EUT : DVD-WRITER  
Model number : CRD-BPDV2  
Serial number : PP2003  
Test mode : CD Write mode  
Comment :

Signature :



Phase	Frequency [MHz]	Reading		Factor [dB]	Emission level		Limit		Margin		Comment
		QP [dB μ V]	AV [dB μ V]		QP [dB μ V]	AV [dB μ V]	QP [dB μ V]	AV [dB μ V]	QP [dB]	AV [dB]	
L1	0.201	47.4	44.5	0.3	47.7	44.8	63.6	53.6	15.9	8.8	
L1	0.474	36.4	36.2	0.3	36.7	36.5	56.4	46.4	19.7	9.9	
L1	0.696	32.3	31.3	0.3	32.6	31.6	56.0	46.0	23.4	14.4	
L1	0.745	36.0	35.8	0.3	36.3	36.1	56.0	46.0	19.7	9.9	
L1	1.289	38.6	35.4	0.4	39.0	35.8	56.0	46.0	17.0	10.2	
L1	1.898	34.8	33.5	0.4	35.2	33.9	56.0	46.0	20.8	12.1	
L2	0.202	50.4	47.7	0.3	50.7	48.0	63.5	53.5	12.8	5.5	*
L2	0.474	36.5	36.5	0.3	36.8	36.8	56.4	46.4	19.6	9.6	
L2	0.697	33.6	32.6	0.3	33.9	32.9	56.0	46.0	22.1	13.1	
L2	0.746	37.4	37.0	0.3	37.7	37.3	56.0	46.0	18.3	8.7	
L2	1.288	38.9	35.9	0.4	39.3	36.3	56.0	46.0	16.7	9.7	
L2	1.898	37.7	35.4	0.4	38.1	35.8	56.0	46.0	17.9	10.2	

\* : The worst emission. Factor: AMN Factor + Cable Loss

\*\*\*\*\* CONDUCTED EMISSION \*\*\*\*\*

Standard : FCC Part 15 Subpart B  
Class : B

Sheet number : 3

Date of test : 2003/1/11  
Test site : 3  
Temperature [°C] : 24.0  
Humidity [%] : 18.5  
Operator : N.Marukawa  
Company name : Sanyo Electric Co., Ltd.  
EUT : DVD-WRITER  
Model number : CRD-BPDV2  
Serial number : PP2003  
Test mode : DVD Read mode  
Comment :

Signature :



Phase	Frequency [MHz]	Reading		Factor [dB]	Emission level		Limit		Margin		Comment
		QP [dB μ V]	AV [dB μ V]		QP [dB μ V]	AV [dB μ V]	QP [dB μ V]	AV [dB μ V]	QP [dB]	AV [dB]	
L1	0.201	47.8	44.6	0.3	48.1	44.9	63.6	53.6	15.5	8.7	
L1	0.474	36.2	35.8	0.3	36.5	36.1	56.4	46.4	19.9	10.3	
L1	0.698	32.4	31.2	0.3	32.7	31.5	56.0	46.0	23.3	14.5	
L1	0.745	36.0	35.8	0.3	36.3	36.1	56.0	46.0	19.7	9.9	
L1	1.292	38.3	35.0	0.4	38.7	35.4	56.0	46.0	17.3	10.6	
L1	1.898	36.1	35.0	0.4	36.5	35.4	56.0	46.0	19.5	10.6	
L2	0.202	50.6	47.8	0.3	50.9	48.1	63.5	53.5	12.6	5.4	*
L2	0.474	37.2	37.1	0.3	37.5	37.4	56.4	46.4	18.9	9.0	
L2	0.698	33.6	32.7	0.3	33.9	33.0	56.0	46.0	22.1	13.0	
L2	0.746	37.6	37.3	0.3	37.9	37.6	56.0	46.0	18.1	8.4	
L2	1.288	38.8	36.8	0.4	39.2	37.2	56.0	46.0	16.8	8.8	
L2	1.898	38.4	36.1	0.4	38.8	36.5	56.0	46.0	17.2	9.5	

\* : The worst emission. Factor: AMN Factor + Cable Loss

Ver.2.51 F3#008

\*\*\*\*\* CONDUCTED EMISSION \*\*\*\*\*

Standard : FCC Part 15 Subpart B  
Class : B

Sheet number : 4

Date of test : 2003/1/11  
Test site : 3  
Temperature [°C] : 24.3  
Humidity [%] : 18.1  
Operator : N.Marukawa  
Company name : Sanyo Electric Co., Ltd.  
EUT : DVD-WRITER  
Model number : CRD-BPDV2  
Serial number : PP2003  
Test mode : DVD Write mode  
Comment :

Signature :



Phase	Frequency [MHz]	Reading		Factor [dB]	Emission level		Limit		Margin		Comment
		QP [dB μ V]	AV [dB μ V]		QP [dB μ V]	AV [dB μ V]	QP [dB μ V]	AV [dB μ V]	QP [dB]	AV [dB]	
L1	0.200	46.4	44.2	0.3	46.7	44.5	63.6	53.6	16.9	9.1	
L1	0.474	36.4	36.0	0.3	36.7	36.3	56.4	46.4	19.7	10.1	
L1	0.696	32.4	31.3	0.3	32.7	31.6	56.0	46.0	23.3	14.4	
L1	0.745	36.0	35.9	0.3	36.3	36.2	56.0	46.0	19.7	9.8	
L1	1.289	38.9	36.0	0.4	39.3	36.4	56.0	46.0	16.7	9.6	
L1	1.898	36.0	35.0	0.4	36.4	35.4	56.0	46.0	19.6	10.6	
L2	0.202	49.8	47.3	0.3	50.1	47.6	63.5	53.5	13.4	5.9	*
L2	0.474	36.7	36.5	0.3	37.0	36.8	56.4	46.4	19.4	9.6	
L2	0.698	33.6	32.9	0.3	33.9	33.2	56.0	46.0	22.1	12.8	
L2	0.746	37.5	37.4	0.3	37.8	37.7	56.0	46.0	18.2	8.3	
L2	1.288	37.3	36.6	0.4	37.7	37.0	56.0	46.0	18.3	9.0	
L2	1.898	38.8	36.6	0.4	39.2	37.0	56.0	46.0	16.8	9.0	

\* : The worst emission. Factor: AMN Factor + Cable Loss

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*

Standard : FCC Part 15 Subpart B  
 Class : B  
 Distance [m] : 3  
 Date of test : 2003/1/11  
 Test site : 3  
 Temperature [°C] : 24.3  
 Humidity [%] : 18.1  
 Operator : N.Marukawa  
 Company name : Sanyo Electric Co., Ltd.  
 EUT : DVD-WRITER  
 Model number : CRD-BPDV2  
 Serial number : PP2003  
 Test mode : CD Read mode  
 Comment :

Sheet number : 5

Signature :



Antenna Pol.	Height [m]	Table Radian [Deg.]	Reading		Factor [dB/m]	Emission Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Comment
			Frequency [MHz]	Level [dB $\mu$ V]					
HOR	3.5	280	67.74	50.0	-21.7	28.3	40.0	11.7	
HOR	1.6	280	199.68	46.3	-11.6	34.7	43.5	8.8	
HOR	1.7	280	203.22	49.6	-11.7	37.9	43.5	5.6	
HOR	1.0	295	304.82	49.1	-13.2	35.9	46.0	10.1	
VER	1.6	175	412.15	49.2	-11.3	37.9	46.0	8.1	
HOR	1.5	80	412.20	52.1	-11.3	40.8	46.0	5.2	
HOR	1.5	300	768.05	42.2	-3.6	38.6	46.0	7.4	
VER	1.0	320	768.97	45.0	-3.6	41.4	46.0	4.6	
HOR	1.6	150	824.22	37.4	-2.7	34.7	46.0	11.3	
VER	1.0	180	824.22	40.2	-2.7	37.5	46.0	8.5	
HOR	1.0	135	1000.01	58.6	-7.4	51.2	54.0	2.8	PK
HOR	1.0	135	1000.01	32.9	-7.4	25.5	54.0	28.5	AV
VER	1.0	140	1000.01	58.8	-7.4	51.4	54.0	2.6	* PK
VER	1.0	140	1000.01	32.8	-7.4	25.4	54.0	28.6	AV
VER	1.0	350	1130.03	57.3	-7.0	50.3	54.0	3.7	PK
VER	1.0	350	1130.03	33.7	-7.0	26.7	54.0	27.3	AV
HOR	1.0	220	1130.54	56.2	-7.0	49.2	54.0	4.8	PK
HOR	1.0	220	1130.54	32.6	-7.0	25.6	54.0	28.5	AV

\*: The worst emission.

Factor: Antenna Factor + Cable Loss - Amp Gain

Ver.2.51 F3#008



\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*

Standard : FCC Part 15 Subpart B  
 Class : B  
 Distance [m] : 3  
 Date of test : 2003/1/11  
 Test site : 3  
 Temperature [°C] : 25.7  
 Humidity [%] : 18.0  
 Operator : N.Marukawa  
 Company name : Sanyo Electric Co., Ltd.  
 EUT : DVD-WRITER  
 Model number : CRD-BPDV2  
 Serial number : PP2003  
 Test mode : CD Write mode  
 Comment :

Sheet number : 6

Signature : N. Marukawa

Antenna Pol.	Height [m]	Table Radian [Deg.]	Reading		Factor [dB/m]	Emission Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Comment
			Frequency [MHz]	Level [dB μ V]					
HOR	2.2	235	90.02	51.3	-20.2	31.1	43.5	12.4	
VER	1.0	155	199.47	41.1	-11.6	29.5	43.5	14.0	
HOR	1.0	40	335.66	45.6	-12.7	32.9	46.0	13.1	
HOR	1.0	265	621.74	46.2	-7.8	38.4	46.0	7.6	
VER	1.2	350	622.89	41.0	-7.8	33.2	46.0	12.8	
HOR	1.8	220	682.10	42.6	-5.7	36.9	46.0	9.1	
VER	1.3	350	683.87	46.4	-5.7	40.7	46.0	5.3	
HOR	1.6	150	807.23	35.0	-2.8	32.2	46.0	13.8	
VER	1.0	350	848.73	40.4	-2.6	37.8	46.0	8.2	
HOR	1.0	145	1000.01	58.0	-7.4	50.6	54.0	3.4	PK
HOR	1.0	145	1000.01	33.5	-7.4	26.1	54.0	28.0	AV
VER	1.0	335	1000.01	58.4	-7.4	51.0	54.0	3.0	* PK
VER	1.0	335	1000.01	33.7	-7.4	26.3	54.0	27.7	AV
VER	1.0	345	1130.00	57.2	-7.0	50.2	54.0	3.8	PK
VER	1.0	345	1130.00	33.1	-7.0	26.1	54.0	27.9	AV
HOR	1.0	215	1131.14	56.1	-7.0	49.1	54.0	5.0	PK
HOR	1.0	215	1131.15	32.6	-7.0	25.6	54.0	28.5	AV

\* : The worst emission.

Factor: Antenna Factor + Cable Loss - Amp Gain

Ver.2.51 F3#008

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*

Standard : FCC Part 15 Subpart B  
 Class : B  
 Distance [m] : 3  
 Date of test : 2003/1/11  
 Test site : 3  
 Temperature [°C] : 25.5  
 Humidity [%] : 18.2  
 Operator : N.Marukawa  
 Company name : Sanyo Electric Co., Ltd.  
 EUT : DVD-WRITER  
 Model number : CRD-BPDV2  
 Serial number : PP2003  
 Test mode : DVD Read mode  
 Comment :

Sheet number : 7

Signature :



Antenna Pol.	Height [m]	Table Radian [Deg.]	Reading		Factor [dB/m]	Emission Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Comment
			Frequency [MHz]	Level [dB $\mu$ V]					
HOR	1.7	280	203.22	45.6	-11.7	33.9	43.5	9.6	
VER	1.0	230	287.89	47.6	-8.1	39.5	46.0	6.5	
HOR	1.0	295	304.82	51.1	-13.2	37.9	46.0	8.1	
HOR	1.0	150	364.11	50.8	-12.2	38.6	46.0	7.4	
HOR	1.0	140	381.02	49.7	-11.9	37.8	46.0	8.2	
HOR	1.0	350	409.62	44.1	-11.4	32.7	46.0	13.3	
VER	1.4	175	409.66	40.5	-11.4	29.1	46.0	16.9	
HOR	1.0	335	440.29	47.6	-10.8	36.8	46.0	9.2	
HOR	1.0	0	474.16	48.6	-10.2	38.4	46.0	7.6	
HOR	1.0	130	1000.01	58.9	-7.4	51.5	54.0	2.5	* PK
HOR	1.0	130	1000.01	32.7	-7.4	25.3	54.0	28.7	AV
VER	1.0	145	1000.20	58.4	-7.4	51.0	54.0	3.0	PK
VER	1.0	145	1000.20	32.9	-7.4	25.5	54.0	28.5	AV
VER	1.0	345	1130.06	57.1	-7.0	50.1	54.0	3.9	PK
VER	1.0	345	1130.06	31.9	-7.0	24.9	54.0	29.1	AV
HOR	1.0	240	1130.60	56.6	-7.0	49.6	54.0	4.4	PK
HOR	1.0	240	1130.60	32.9	-7.0	25.9	54.0	28.1	AV

\* : The worst emission.

Factor: Antenna Factor + Cable Loss - Amp Gain

Ver.2.51 F3#008

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*

Standard : FCC Part 15 Subpart B  
 Class : B  
 Distance [m] : 3  
 Date of test : 2003/1/11  
 Test site : 3  
 Temperature [°C] : 25.8  
 Humidity [%] : 18.1  
 Operator : N.Marukawa  
 Company name : Sanyo Electric Co., Ltd.  
 EUT : DVD-WRITER  
 Model number : CRD-BPDV2  
 Serial number : PP2003  
 Test mode : DVD Write mode  
 Comment :

Sheet number : 8

Signature :



Antenna Pol.	Antenna Height [m]	Table Radian [Deg.]	Reading		Factor [dB/m]	Emission Level		Limit [dB $\mu$ V/m]	Margin [dB]	Comment
			Frequency [MHz]	Level [dB $\mu$ V]		[dB $\mu$ V/m]	[dB $\mu$ V/m]			
VER	1.0	155	90.00	52.1	-20.2	31.9	43.5	11.6		
HOR	2.6	35	135.11	46.4	-14.4	32.0	43.5	11.5		
HOR	1.6	35	197.00	47.5	-11.6	35.9	43.5	7.6		
HOR	1.0	190	300.01	47.0	-13.2	33.8	46.0	12.2		
HOR	1.0	250	340.82	47.9	-12.6	35.3	46.0	10.7		
HOR	1.0	145	400.02	45.1	-11.5	33.6	46.0	12.4		
VER	1.4	175	452.22	44.7	-10.6	34.1	46.0	11.9		
HOR	1.0	140	1000.01	57.8	-7.4	50.4	54.0	3.6	PK	
HOR	1.0	140	1000.01	33.0	-7.4	25.6	54.0	28.4	AV	
VER	1.0	355	1130.09	57.2	-7.0	50.2	54.0	3.8	PK	
VER	1.0	355	1130.09	34.1	-7.0	27.1	54.0	26.9	AV	
HOR	1.0	215	1130.74	58.1	-7.0	51.1	54.0	2.9	* PK	
HOR	1.0	215	1130.74	35.5	-7.0	28.5	54.0	25.6	AV	

\* : The worst emission.

Factor: Antenna Factor + Cable Loss - Amp Gain

Ver.2.51 F3#008