



# FCC DOC TEST REPORT

## Declaration of Conformity

According to

**47 CFR, Part 2, Part 15, CISPR PUB. 22 ,  
Canada ICES-003 Issue 5**

Applicant : GIGA-BYTE TECHNOLOGY CO., LTD.  
Address : No.6, Bao Chiang Road, Hsin-Tien Dist., New  
Taipei City 231, Taiwan  
Manufacturer : 1. G-STYLE Ltd.  
2. GIGA-BYTE TECHNOLOGY CO., LTD.  
Equipment : Slate PC  
Model No. : S1082xx (x = 0~9, A~Z or Black)  
Trade Name : GIGABYTE

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of **Cerpass Technology Corp.**, the test report shall not be reproduced except in full.



## Contents

<b>1. Summary of Test Procedure and Test Result.....</b>	<b>5</b>
<b>2. Test Configuration of Equipment under Test .....</b>	<b>5</b>
2.1. Feature of Equipment under Test.....	5
2.2. Test Manner .....	6
2.3. Description of Test System.....	7
2.4. General Information of Test.....	8
2.5. Measurement Uncertainty .....	8
<b>3. Test of Conducted Emission.....</b>	<b>9</b>
3.1. Test Limit .....	9
3.2. Test Procedures .....	9
3.3. Typical test Setup.....	10
3.4. Measurement Equipment.....	10
3.5. Test Result and Data.....	11
3.6. Test Photographs .....	13
<b>4. Test of Radiated Emission .....</b>	<b>14</b>
4.1. Test Limit .....	14
4.2. Test Procedures .....	14
4.3. Typical test Setup.....	15
4.4. Measurement Equipment.....	15
4.5. Test Result and Data (30MHz ~ 1000MHz) .....	16
4.6. Test Result and Data (1GHz ~ 15GHz).....	20
4.7. Test Photographs (30MHz ~ 1GHz).....	22
4.8. Test Photographs (1GHz ~ 15GHz) .....	23
<b>Appendix A. Photographs of EUT.....</b>	<b>A1 ~ A7</b>





# FCC DOC TEST REPORT

## Declaration of Conformity

According to

**47 CFR, Part 2, Part 15, CISPR PUB. 22  
Canada ICES-003 Issue 5**

Applicant : GIGA-BYTE TECHNOLOGY CO., LTD.  
Address : No.6, Bao Chiang Road, Hsin-Tien Dist., New  
Taipei City 231, Taiwan  
Manufacturer : 1. G-STYLE Ltd.  
2. GIGA-BYTE TECHNOLOGY CO., LTD.  
Equipment : Slate PC  
Model No. : S1082xx (x = 0~9, A~Z or Black)

### I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 – 2009** and the energy emitted by this equipment was **passed CISPR PUB. 22, FCC Part 15, and Canada ICES-003 Issue 5** in both radiated and conducted emission class B limits. Testing was carried out on Oct. 11, 2012 at CerpPASS Technology Corp.

Signature

Hill Chen  
EMC/RF B.U. Assistant Manager



## 1. Summary of Test Procedure and Test Result

Test Item	Normative References	Test Result
Conducted Emission	ANSI C63.4-2009 FCC Part 15 Subpart B Canada ICES-003 Issue 5	PASS
Radiated Emission	ANSI C63.4-2009 FCC Part 15 Subpart B Canada ICES-003 Issue 5	PASS

## 2. Test Configuration of Equipment under Test

### 2.1. Feature of Equipment under Test

Keyparts	Brand	Model No.	Description
Mother Board	Gigabyte	GA-S1082	
CPU	Intel	Celeron ULV 847	1.1GHz, 1023pin
CAMERA MODULE	Lite-on	12P2BF125	
Memory	Transcend	---	DDR3 1333 2G
Panel	Hannstar	101PHW1-A	10.1" TFT-LCD with LED Backlight
Wifi+BT MODULE	Intel	2230BNHMW	802.11b/g/n+BT4.0
HDD	Hitachi	Z5K320-320	320G 5400rpm
Battery	DARFON	GND-D20	7.4V, 4000mAh
	Getec	GAG-820	7.5V, 2700mAh
AC/DC Adapter	Delta	ADP-40PH BB	Input: 100-240V~, 1.2A, 50-60Hz Output: 19V, 2.1A



## 2.2. Test Manner

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.4.
- b. The complete test system included remote workstation, Monitor, Mouse, iPod, Earphone, SD Card, SIM Card, and EUT for EMI test. The remote workstation included Notebook\*2 and Router.
- c. An executive program, "WinFCC" under WIN 8, which generates a complete line of continuously repeating "H" pattern was used as the test software.  
The program was executed as follows:
  1. Turn on the power of all equipment.
  2. The PC reads the test program from the hard disk drive and runs it.
  3. The PC sends "H" messages to the EUT, and the EUT displays "H" patterns on the screen.
  4. The PC sends "H" messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
  5. Repeat the steps from 2 to 4.
- d. An executive program, "WINTHRAX.exe" under WIN 8 was executed to read and write data from iPod and SD Card.
- e. An executive program, "color bar.exe" under WIN 8 was executed to play 1kHz audio.
- f. An executive program, "Ping.exe" under WIN 8 was executed to transmit and receive data to the remote workstation through WLAN.
- g. An executive program, " Ping.exe" under WIN 8 was executed to transmit and receive data to the remote workstation through LAN.
- h. The test modes of conduction test as follow:  
Test Mode 1: EUT: 1366\*768+ HDMI: 1920\*1200  
Test Mode 2: EUT: 1366\*768+ VGA: 2560\*1600  
Test Mode 3: VGA: 2560\*1600+ HDMI: 1920\*1200  
Test Mode 4: EUT: 1024\*768+ HDMI: 1600\*1050  
The "Test Mode 1" generated the worst test result, it was reported as final data.
- i. The test modes of radiation test(30MHz-1GHz) as follow:  
Test Mode 1: EUT: 1366\*768+ HDMI: 1920\*1200  
Test Mode 2: EUT: 1366\*768+ VGA: 2560\*1600  
Test Mode 3: VGA: 2560\*1600+ HDMI: 1920\*1200  
Test Mode 4: EUT: 1024\* 768+ VGA: 1600\*1050  
The "Test Mode 2" generates the worst case; it was reported as final result.
- j. The test modes of radiation test(1GHz-6GHz) as follow:  
Test Mode 1: EUT: 1366\*768+ HDMI: 1920\*1200  
Test Mode 2: EUT: 1366\*768+ VGA: 2560\*1600  
Test Mode 3: VGA: 2560\*1600+ HDMI: 1920\*1200  
Test Mode 4: EUT: 1024\*768+ VGA: 1600\*1050  
The "Test Mode 1" generates the worst case; it was reported as final result.



### 2.3. Description of Test System



Device	Manufacturer	Model No.	Description
Monitor	DELL	U2410f	HDMI Cable, Shielding 1.8m Power Cable, Unshielding 1.8m
Monitor	PHILIPS	202P73	VGA Cable, Shielding, 1.8m Power Cable, Unshielding, 1.8m
Mouse	DELL	MOC5UO	USB Cable, Shielding 1.85m
iPod	APPLE	A1320	USB Cable, Shielding, 1.0m
Earphone	MIC	MIC-4	Audio Cable, Unshielding 1.35m
SD Card	TranScend	2GB	N/A
SIM Card	N/A	N/A	N/A
Remote workstation			
Notebook*2	SONY	VPCEB25FW	Power Cable, Unshielding 1.8m
Router	ZyXEL	VSDL P874	N/A

Use Cable:

Cable	Quantity	Description
RJ45	1	Unshielding 15m



## 2.4. General Information of Test

Test Site :	Cerpass Technology Corp. 2F-11, No. 3, Yuan Qu St., (Nankang Software Park), Taipei, Taiwan 115, R.O.C.
Test Site Location (OATS2-SD) :	No.68-1, Shihbachongsi, Shihding Township, Taipei City 223, Taiwan, R.O.C.
FCC Registration Number :	TW1049, TW1061, 488071, 390316
IC Registration Number :	4934B-1, 4934D-1
VCCI Registration Number :	T-1173 for Telecommunication Test C-4139 for Conducted emission test R-3428 for Radiated emission test G-97 for radiated disturbance above 1GHz
Frequency Range Investigated :	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 15,000 MHz
Test Distance :	The test distance of radiated emission below 1GHz from antenna to EUT is 10 M. The test distance of radiated emission above 1GHz from antenna to EUT is 3 M.
Laboratory Accreditation	 

## 2.5. Measurement Uncertainty

Measurement Item	Measurement Frequency	Polarization	Uncertainty
Conducted Emission	9 kHz ~ 30 MHz	LINE / NEUTRAL	3.25 dB
Radiated Emission	30 MHz ~ 1,000 MHz	Vertical / Horizontal	3.93 dB
	1,000 MHz ~ 18,000 MHz	Vertical / Horizontal	5.18 dB





### 3. Test of Conducted Emission

#### 3.1. Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2009 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.


##### Conducted Emission Limits:

Frequency (MHz)	Quasi Peak (dB $\mu$ V)	Average (dB $\mu$ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50

#### 3.2. Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

### 3.3. Typical test Setup

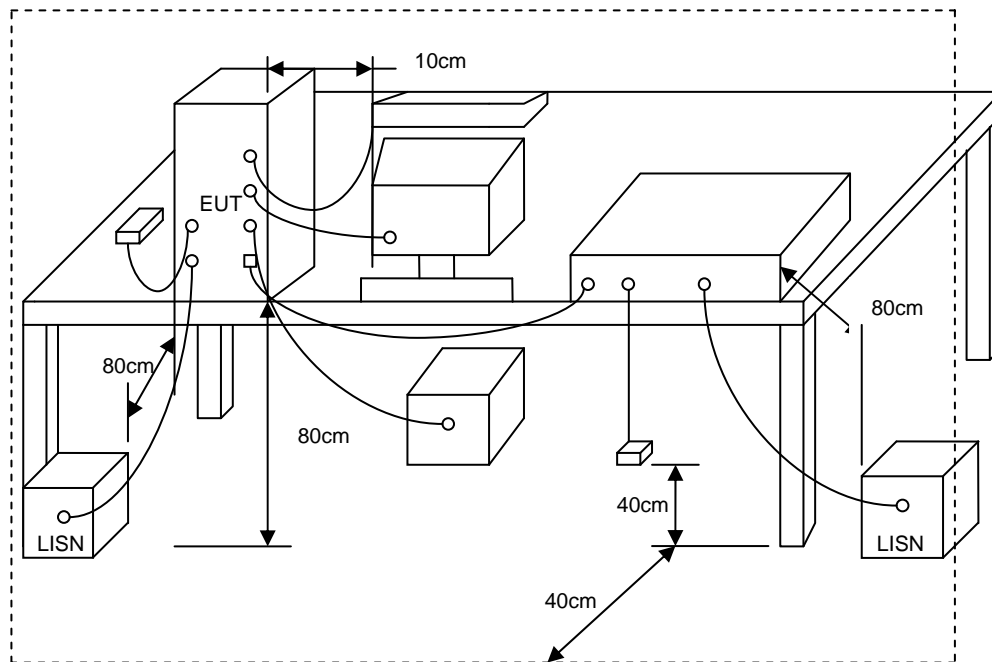


### 3.4. Measurement Equipment

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
EMI Receiver	R&S	ESCI	100443	2012/01/12	2013/01/11
LISN	Schwarzbeck	NSLK 8127	8127-516	2012/03/08	2013/03/07
LISN	Schwarzbeck	NSLK 8127	8127-568	2012/08/22	2013/08/21



### 3.5. Test Result and Data

Power	: AC 120V	Pol/Phase	: LINE
Test Mode 1	: EUT: 1366*768+ HDMI: 1920*1200	Temperature	: 22°C
Test Date	: 2012/10/11	Humidity	: 60 %

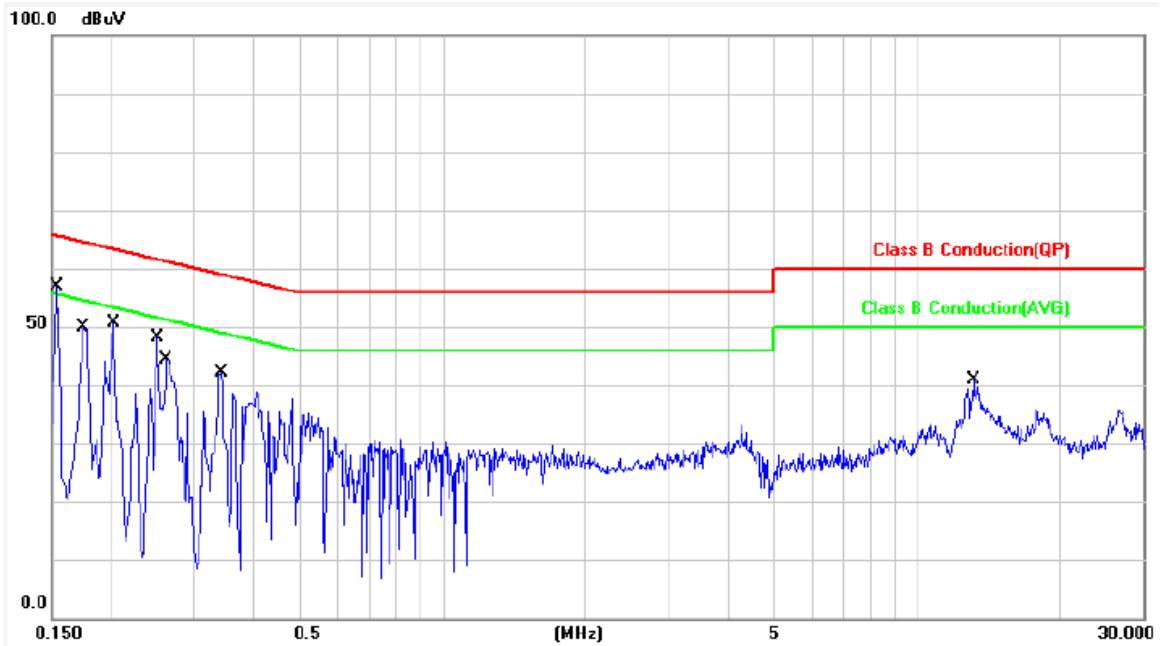

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1539	0.11	49.83	49.94	65.78	-15.84	QP	P
2	0.1539	0.11	25.80	25.91	55.78	-29.87	AVG	P
3	0.1740	0.11	46.93	47.04	64.76	-17.72	QP	P
4	0.1740	0.11	20.62	20.73	54.76	-34.03	AVG	P
5	0.2020	0.12	50.01	50.13	63.52	-13.39	QP	P
6	0.2020	0.12	34.08	34.20	53.52	-19.32	AVG	P
7	0.2500	0.12	39.72	39.84	61.75	-21.91	QP	P
8	0.2500	0.12	20.42	20.54	51.75	-31.21	AVG	P
9	0.2620	0.12	41.44	41.56	61.36	-19.80	QP	P
10	0.2620	0.12	29.06	29.18	51.36	-22.18	AVG	P
11	0.3420	0.12	37.08	37.20	59.15	-21.95	QP	P
12	0.3420	0.12	22.60	22.72	49.15	-26.43	AVG	P
13	13.1940	0.80	33.36	34.16	60.00	-25.84	QP	P
14	13.1940	0.80	26.34	27.14	50.00	-22.86	AVG	P

Note: Level = Reading + Factor  
Margin = Level – Limit






### 3.6. Test Photographs

Front View



Rear View

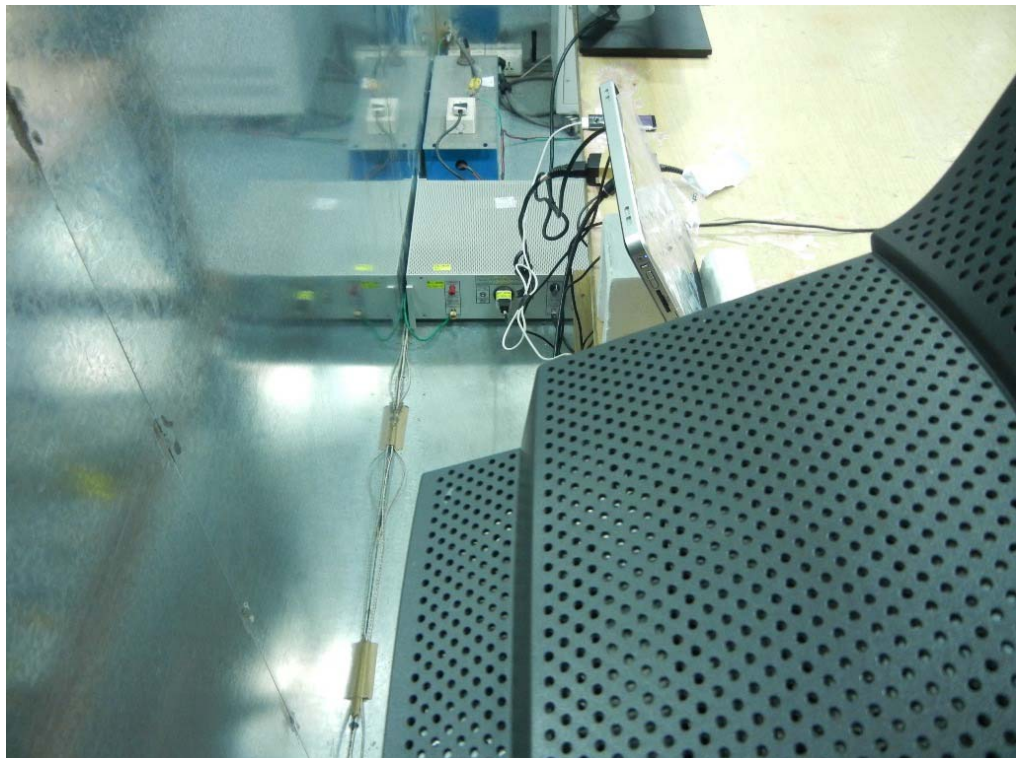



## 4. Test of Radiated Emission

### 4.1. Test Limit

Radiated emissions from 30 MHz to 15,000 MHz were measured with a bandwidth of 120 kHz according to the methods defines in ANSI C63.4-2009. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in section 3.2. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions. For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance Meters	Radiated ( $\mu$ V / M)	Radiated (dB $\mu$ V / M)
30-88	3	100	40.0
88-216	3	150	43.5
216-960	3	200	46.0
Above 960	3	500	54.0

For unintentional device, according to CISPR PUB.22, for Class B digital devices, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 10 meters shall not exceed the below table.


Frequency (MHz)	Distance Meters	Radiated (dB $\mu$ V / M)
30-230	10	30
230-1000	10	37

### 4.2. Test Procedures


- The EUT was placed on a Rota table top 0.8 meter above ground.
- The EUT was set 3/10 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.

### 4.3. Typical test Setup

Below 1GHz Test Setup

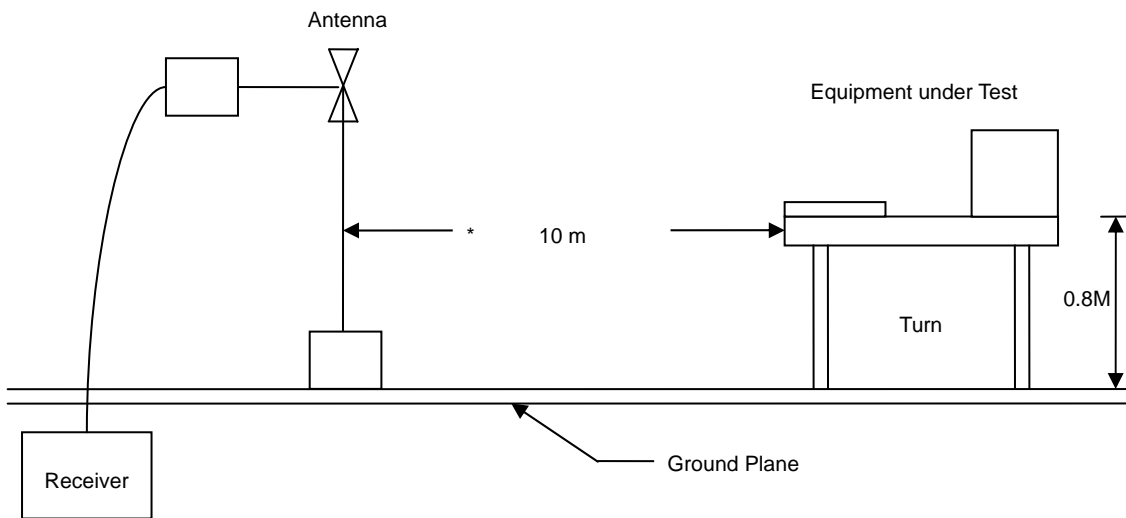

Above 1GHz Test Setup

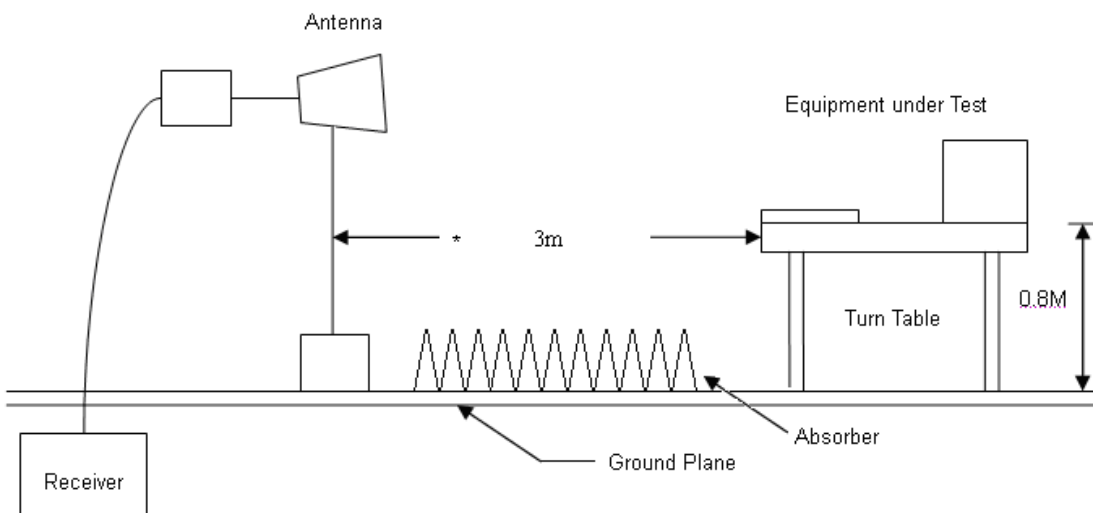


### 4.4. Measurement Equipment

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
Bilog Antenna	Schaffner	CBL6112B	2840	2012/03/23	2013/03/22
Amplifier	Agilent	8447D	2944A10593	2012/03/21	2013/03/20
EMI Receiver	HP	8546A/ 85460A	3807A00454/ 3704A00386	2012/08/22	2013/08/21
Spectrum Analyzer	R&S	FSP40	100047	2012/03/01	2013/02/28
Horn Antenna	EMCO	3115	31589	2012/03/01	2013/02/28
Preamplifier	Agilent	8449B	3008A01954	2012/02/29	2013/02/28



### 4.5. Test Result and Data (30MHz ~ 1000MHz)

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 2	: EUT: 1366*768+ VGA: 2560*1600	Temperature	: 23 °C
Test Date	: Oct. 04, 2012	Humidity	: 68 %

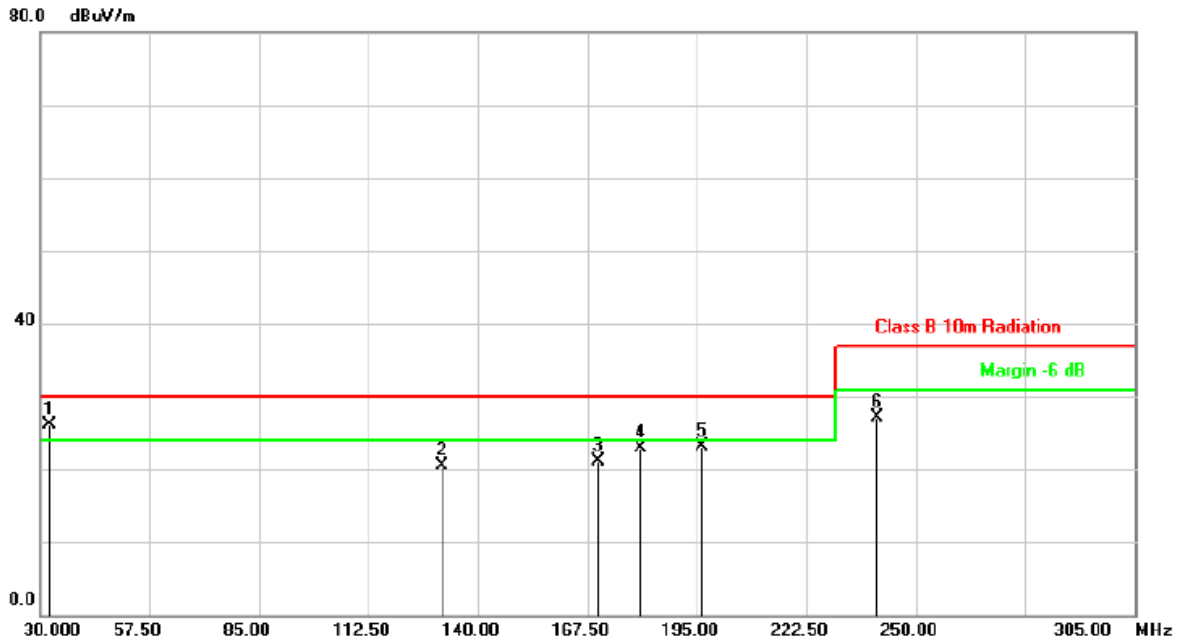

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	32.2100	-9.62	35.66	26.04	30.00	-3.96	QP	105	221	P
2	131.1179	-14.36	34.94	20.58	30.00	-9.42	QP	400	0	P
3	170.4280	-16.00	37.04	21.04	30.00	-8.96	QP	400	0	P
4	181.0520	-16.28	39.21	22.93	30.00	-7.07	QP	400	0	P
5	196.2540	-16.02	39.10	23.08	30.00	-6.92	QP	400	0	P
6	240.2150	-13.25	40.40	27.15	37.00	-9.85	QP	400	0	P


Note: Level = Reading + Factor

Margin = Level – Limit





Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 2	: EUT: 1366*768+ VGA: 2560*1600	Temperature	: 23 °C
Test Date	: Oct. 04, 2012	Humidity	: 68 %

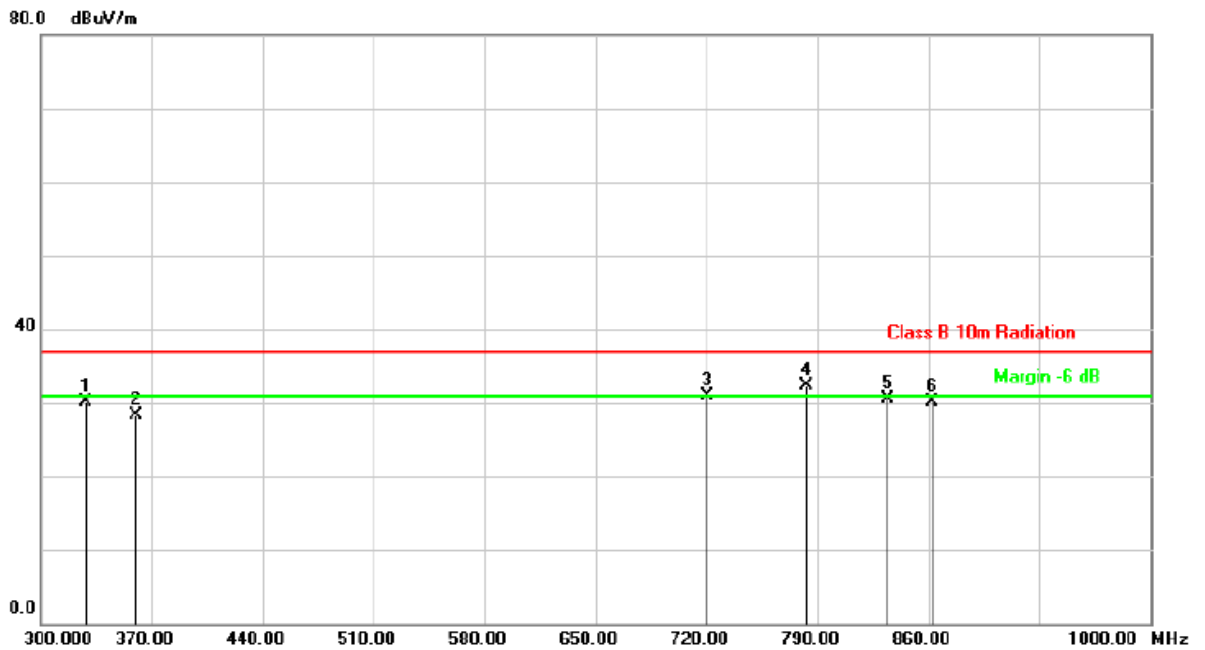


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	328.2400	-9.88	39.99	30.11	37.00	-6.89	QP	100	0	P
2	360.1200	-8.99	37.27	28.28	37.00	-8.72	QP	100	0	P
3	720.1140	-2.40	33.23	30.83	37.00	-6.17	QP	100	0	P
4	782.8200	-0.95	33.17	32.22	37.00	-4.78	QP	323	114	P
5	834.0210	0.48	30.04	30.52	37.00	-6.48	QP	100	0	P
6	862.2100	1.21	28.93	30.14	37.00	-6.86	QP	100	0	P

Note: Level = Reading + Factor

Margin = Level – Limit



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 2	: EUT: 1366*768+ VGA: 2560*1600	Temperature	: 23 °C
Test Date	: Oct. 04, 2012	Humidity	: 68 %

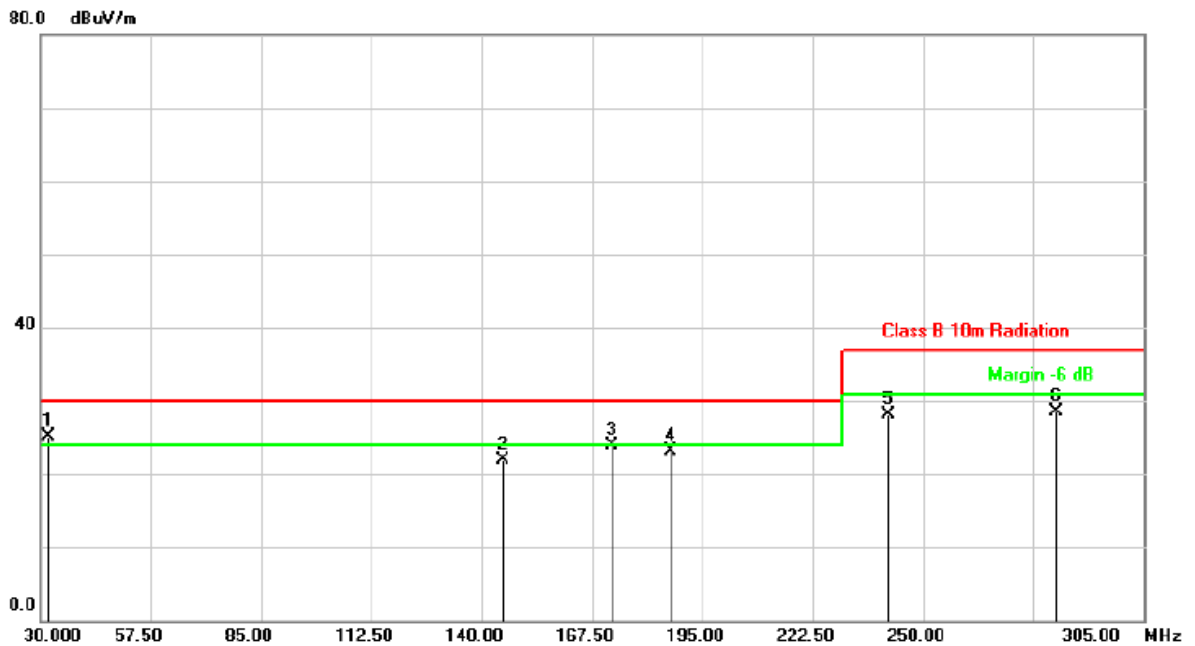


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	32.1800	-9.60	34.77	25.17	30.00	-4.83	QP	400	118	P
2	145.1720	-15.07	36.95	21.88	30.00	-8.12	QP	400	0	P
3	172.6300	-16.06	39.99	23.93	30.00	-6.07	QP	400	0	P
4	187.2100	-16.30	39.47	23.17	30.00	-6.83	QP	400	0	P
5	241.3260	-13.10	41.21	28.11	37.00	-8.89	QP	400	0	P
6	283.1500	-11.01	39.46	28.45	37.00	-8.55	QP	400	0	P

Note: Level = Reading + Factor

Margin = Level – Limit



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 2	: EUT: 1366*768+ VGA: 2560*1600	Temperature	: 23 °C
Test Date	: Oct. 04, 2012	Humidity	: 68 %

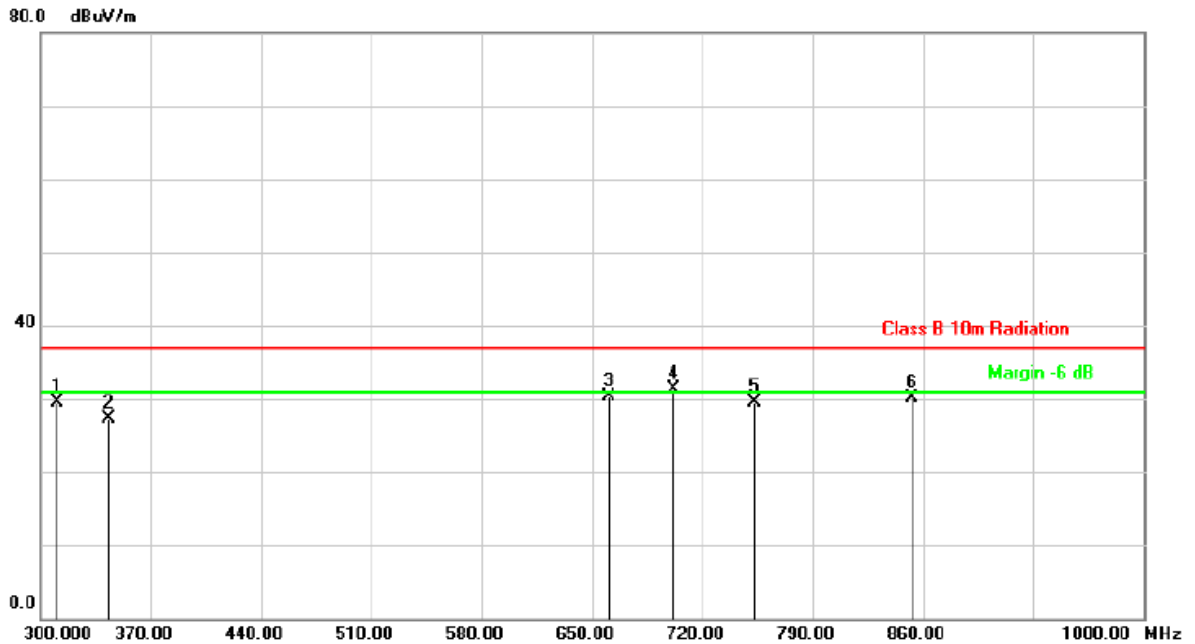

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	311.1520	-10.33	39.75	29.42	37.00	-7.58	QP	100	0	P
2	343.1820	-9.49	36.84	27.35	37.00	-9.65	QP	100	0	P
3	660.8224	-3.20	33.47	30.27	37.00	-6.73	QP	100	0	P
4	701.8340	-3.06	34.33	31.27	37.00	-5.73	QP	100	0	P
5	753.1180	-1.26	30.67	29.41	37.00	-7.59	QP	100	0	P
6	853.1740	1.11	29.06	30.17	37.00	-6.83	QP	100	0	P

Note: Level = Reading + Factor


Margin = Level – Limit

Test engineer: Ken



### 4.6. Test Result and Data (1GHz ~ 15GHz)

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 1	: EUT: 1366*768+ HDMI: 1920*1200	Temperature	: 24 °C
Test Date	: 2012/10/11	Humidity	: 58 %

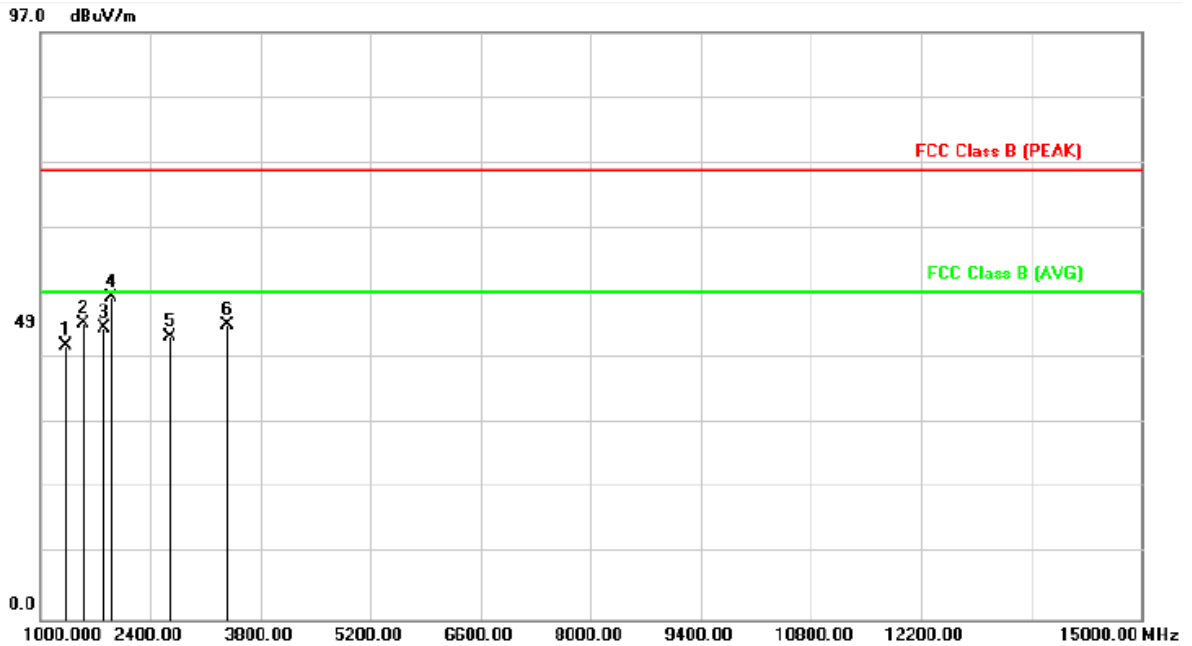


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	1322.000	-17.78	62.94	45.16	74.00	-28.84	peak	400	0	P
2	1546.000	-16.82	65.58	48.76	74.00	-25.24	peak	400	0	P
3	1812.000	-15.57	63.74	48.17	74.00	-25.83	peak	400	0	P
4	1910.000	-15.12	68.27	53.15	74.00	-20.85	peak	400	0	P
5	2652.000	-12.48	59.16	46.68	74.00	-27.32	peak	400	0	P
6	3380.000	-9.61	58.33	48.72	74.00	-25.28	peak	400	0	P

Note: Level = Reading + Factor

Margin = Level – Limit



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 1	: EUT: 1366*768+ HDMI: 1920*1200	Temperature	: 24 °C
Test Date	: 2012/10/11	Humidity	: 58 %

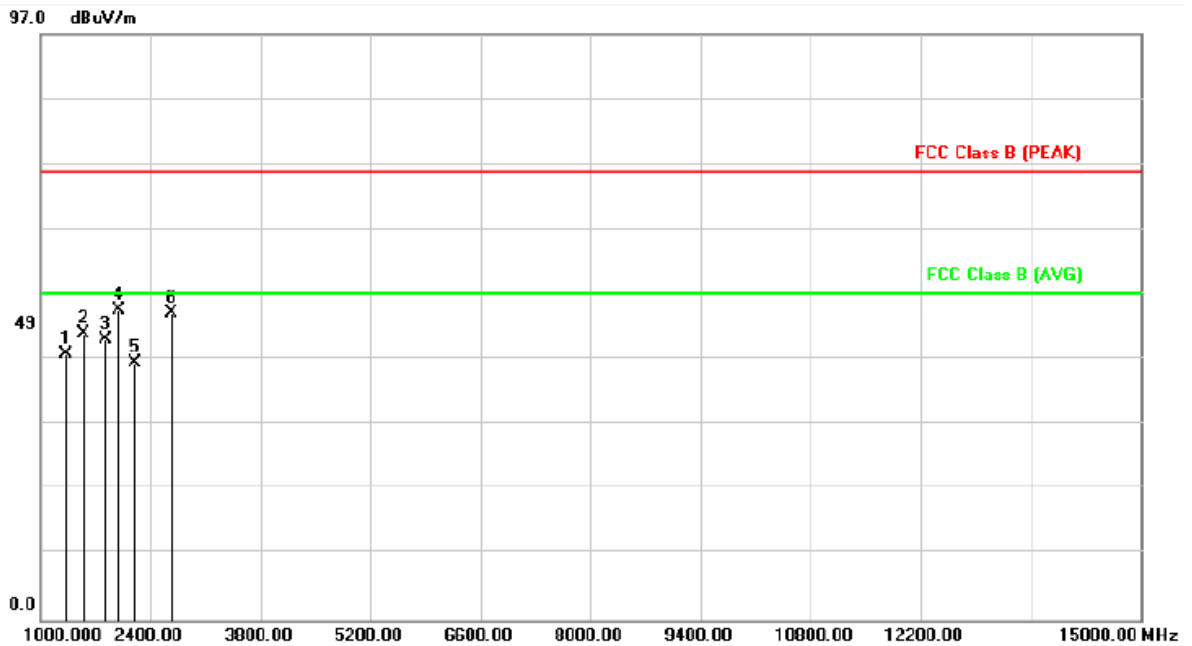

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F
1	1322.000	-17.78	61.86	44.08	74.00	-29.92	peak	100	0	P
2	1546.000	-16.82	64.31	47.49	74.00	-26.51	peak	100	0	P
3	1826.000	-15.51	62.01	46.50	74.00	-27.50	peak	100	0	P
4	1994.000	-14.73	65.96	51.23	74.00	-22.77	peak	100	0	P
5	2204.000	-14.13	56.69	42.56	74.00	-31.44	peak	100	0	P
6	2666.000	-12.40	63.23	50.83	74.00	-23.17	peak	100	0	P

Note: Level = Reading + Factor

Margin = Level – Limit

Test engineer: Smith




#### 4.7. Test Photographs (30MHz ~ 1GHz)

Front View




Rear View

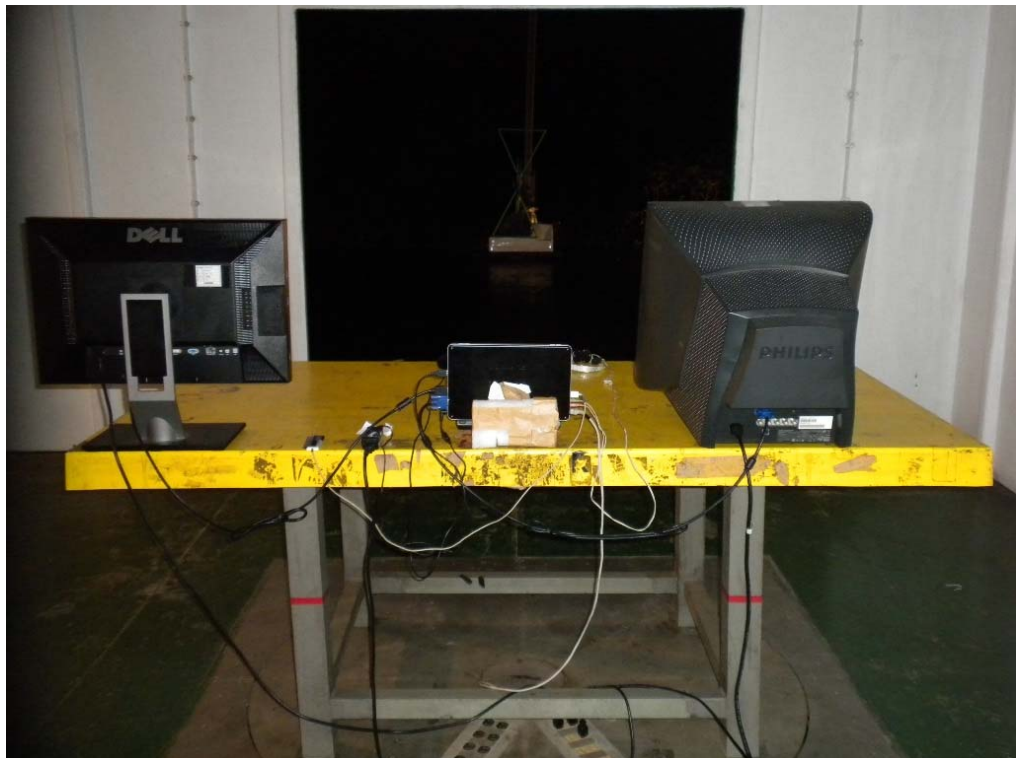




#### 4.8. Test Photographs (1GHz ~ 15GHz)

Front View

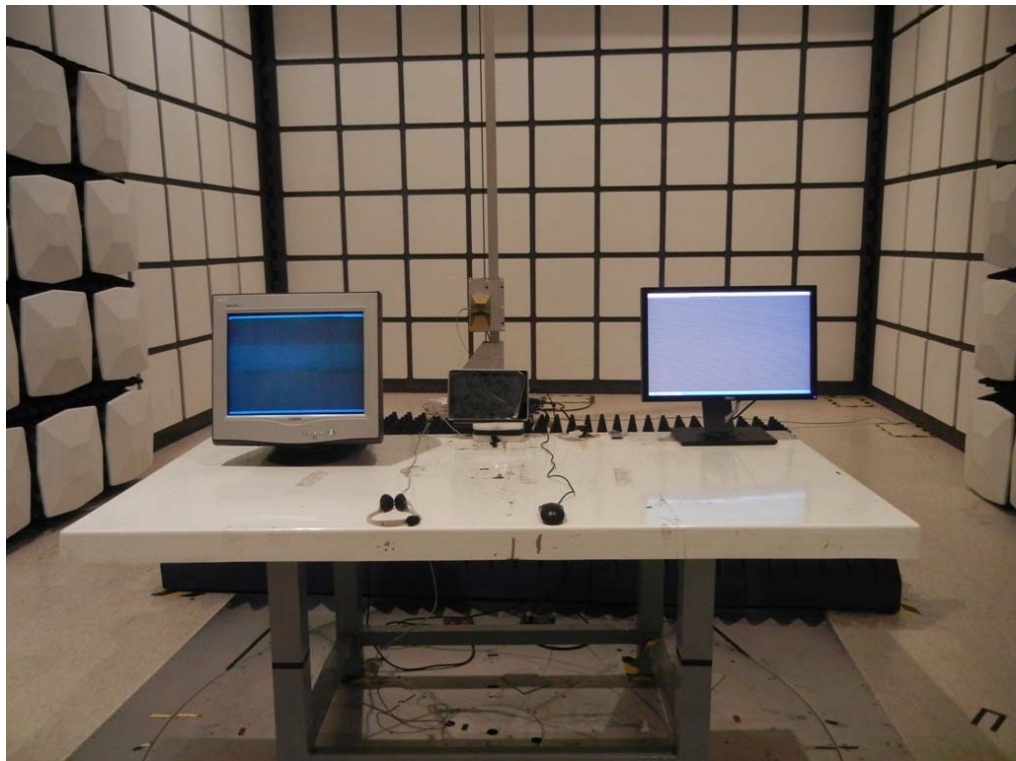

Rear View

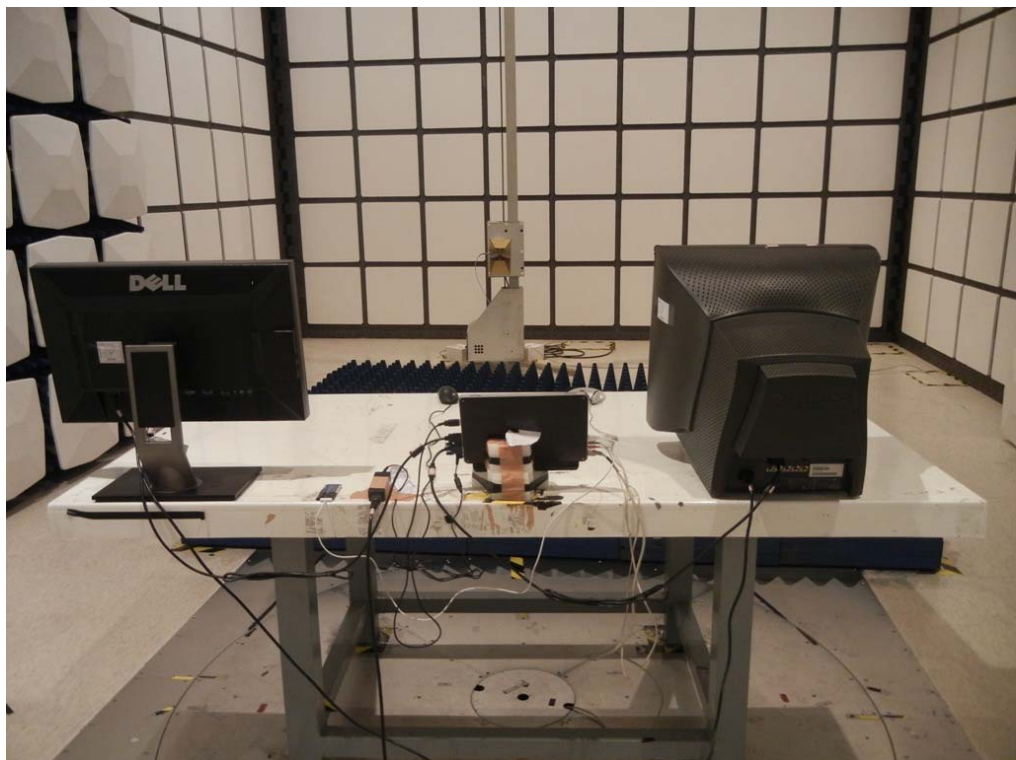



Appendix A. Photographs of EUT









Li-ion Rechargeable Polymer Battery Pack  
 7.4V 4000mAh, 29.6Wh  
 Model name: GND-D20  
**WARNING**  
 Potential for fire or burning. Do not  
 disassemble, puncture, crush, heat, or burn.



P/N: EK.21102.001  
 Assembled in China

TIS 2217-2548  
 2INP744/125  
 Chin-Hu H.A.C. Co., Ltd.



권지인 종류 Lithium Polymer  
 모델명 GND-D20  
 제품정격 7.4V, 4000mAh, 29.6Wh  
 제조자명 Darfon Electronic (Suzhou) Co., Ltd.  
 수입자명 (주)컴포인트 (COMPOINT CORP)  
 제조국명 중국 (China)  
 제품보증기간 1년



Output Connector  
 - CID -  
 +

신고번호  
 B054R029-1003







