

DATE: 26 October 2010

I.T.L. (PRODUCT TESTING) LTD.

FCC Radio Test Report

for


Risco Ltd.


Equipment under test:

Industrial Grade 3 Detector

WatchIN 325DT

Written by: 
D. Shidlow, Documentation

Approved by: For/ 
A. Sharabi, Test Engineer

Approved by: 
I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.

Measurement/Technical Report for Risco Ltd.

Industrial Grade 3 Detector

WatchIN 325DT

FCC ID: JE4CAV005

This report concerns:	Original Grant:	
	Class I Change:	
	Class II Change:	X
Equipment type:	Field Disturbance Sensor	

Limits used:
47CFR15 Section 15.245

Measurement procedure used is ANSI C63.4-2003.

Application for Certification
prepared by:
Ishaishou Raz
ITL (Product Testing) Ltd.
Kfar Bin Nun
D.N. Shimshon 99780
Israel
e-mail Sraz@itl.co.il

Applicant for this device:
(different from "prepared by")
Efi Goren
Risco ltd.
14 Hachoma st.
Rishon Le T'zion 75655
Israel
Tel: +972-3-963-7742
Fax: +972-3-961-6584-
e-mail: Efig@riscogroup.com

TABLE OF CONTENTS

1.	GENERAL INFORMATION -----	4
1.1	Administrative Information.....	4
1.2	List of Accreditations.....	5
1.3	Product Description.....	6
1.4	Test Methodology.....	6
1.5	Test Facility.....	6
1.6	Measurement Uncertainty.....	6
2.	SYSTEM TEST CONFIGURATION -----	7
2.1	Justification.....	7
2.2	EUT Exercise Software.....	7
2.3	Special Accessories.....	7
2.4	Equipment Modifications.....	7
2.5	Configuration of Tested System.....	7
3.	TEST SETUP PHOTOGRAPHS -----	8
4.	CONDUCTED EMISSION DATA -----	9
4.1	Test Specification.....	9
4.2	Test Procedure.....	9
4.3	Test Results.....	9
4.4	Test Instrumentation Used, Conducted Measurement.....	14
5.	FIELD STRENGTH OF FUNDAMENTAL -----	15
5.1	Test Specification.....	15
5.2	Test Procedure.....	15
5.3	Measured Data.....	15
5.4	Test Instrumentation Used, Field Strength of Fundamental.....	17
6.	RADIATED EMISSION, 9 KHZ – 30 MHZ -----	18
6.1	Test Specification.....	18
6.2	Test Procedure.....	18
6.3	Test Results.....	18
6.4	Test Instrumentation Used, Radiated Measurements.....	19
6.5	Field Strength Calculation.....	19
7.	SPURIOUS RADIATED EMISSION 30 – 40000 MHZ -----	20
7.1	Test Specification.....	20
7.2	Test Procedure.....	20
7.3	Test Results.....	21
7.4	Test Instrumentation Used, Radiated Measurements.....	23
8.	APPENDIX A - CORRECTION FACTORS -----	24
8.1	Correction factors for CABLE.....	24
8.2	Correction factors for CABLE.....	25
8.3	Correction factors for CABLE.....	26
8.4	Correction factors for LOG PERIODIC ANTENNA.....	27
8.5	Correction factors for LOG PERIODIC ANTENNA.....	28
8.6	Correction factors for BICONICAL ANTENNA.....	29
8.7	Correction factors for Double-Ridged Waveguide Horn.....	30
8.8	Correction factors for Horn Antenna.....	31
8.9	Correction factors for Horn Antenna.....	32
8.10	Correction factors for ACTIVE LOOP ANTENNA.....	33
8.11	Setup 2 nd Harmonic:.....	34
8.12	Setup 3rd Harmonic:.....	34

1. General Information

1.1 Administrative Information

Manufacturer:	Risco Ltd.
Manufacturer's Address:	14 Hachoma St. Rishon Le T'zion 75655 Israel Tel: +972-3-963-7777 Fax: +972-3-961-6584
Manufacturer's Representative:	Efi Goren
Equipment Under Test (E.U.T):	Industrial Grade 3 Detector
Equipment Model No.:	WatchIN 325DT
Equipment Serial No.:	Not Designated
Date of Receipt of E.U.T:	08.07.10
Start of Test:	08.07.10
End of Test:	09.07.10
Test Laboratory Location:	I.T.L (Product Testing) Ltd. Kfar Bin Nun, ISRAEL 99780
Test Specifications:	FCC Subpart C Section 15.245

1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025B-1.
6. TUV Product Services, England, ASLLAS No. 97201.
7. Nemko (Norway), Authorization No. ELA 207.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

1.3 Product Description

RISCO Group's Dual Technology Grade 3 Industrial detector, WatchIN, is a unique detector with signal processing based on two Passive Infrared (PIR) channels and two Microwave (MW) channels. The detector can operate as a regular relay detector connected to any control panel, or as a BUS accessory when connected to RISCO Group's ProSYS control panel via the RS485 BUS, thus having unique remote control and diagnostic capabilities.

1.4 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 Test Facility

The radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing September 3, 2009). I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

1.6 Measurement Uncertainty

Conducted Emission

The uncertainty for this test is ± 2 dB.

Radiated Emission

The Open Site complies with the ± 4 dB Normalized Site Attenuation requirements of ANSI C63.4-2003. In accordance with Paragraph 5.4.6.1 of this standard, this tolerance includes instrumentation calibration errors, measurement technique errors, and errors due to site anomalies.

2. System Test Configuration

2.1 *Justification*

A C2PC is being applied due to a change in the host unit. The following tests were performed: Conducted Emission From AC Mains, Field Strength of Fundamental, and Spurious Radiated Emission up to 40 GHz.

Testing was performed with the EUT in the vertical position as it is a wall/pole mounted.

2.2 *EUT Exercise Software*

Normal operation software was used to operate the RF radio continuously.

2.3 *Special Accessories*

No special accessories were needed to achieve compliance.

2.4 *Equipment Modifications*

No modifications were necessary in order o achieve compliance.

2.5 *Configuration of Tested System*

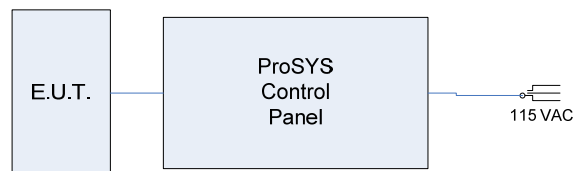


Figure 1. Conducted Emission Test Setup




Figure 2 Radiated Emission Test Setup

3. Test Setup Photographs



Figure 3 Conducted Emission Test



Figure 4 Radiated Emission Test

4. Conducted Emission Data

4.1 Test Specification

F.C.C., Part 15, Subpart C

4.2 Test Procedure

The E.U.T operation mode and test set-up are as described in Section 3.1. In order to minimize background noise interference, the conducted emission testing was performed inside a shielded room, with the E.U.T placed on an 0.8 meter high wooden table, 0.4 meter from the room's vertical wall.

The E.U.T was powered from 115 V AC / 60 Hz via a 50 Ohm / 50 μ Hn Line Impedance Stabilization Network (LISN) on the phase and neutral lines. The LISN's were grounded to the shielded room ground plane (floor), and were kept at least 0.8 meters from the nearest boundary of the E.U.T

The center of the E.U.T AC cable was folded back and forth, in order to form a bundle less than 0.40 meters and a total cable length of 1 meter.

The emission voltages at the LISN's outputs were measured using a computerized receiver, complying with CISPR 16 requirements. The specification limits are loaded to the receiver via a 3.5" floppy disk and are displayed on the receiver's spectrum display.

A frequency scan between 0.15 and 30 MHz was performed at 9 kHz I.F. band width, and using peak detection.

The spectral components having the highest level on each line were measured using a quasi-peak and average detector.

4.3 Test Results

JUDGEMENT: Passed by 12.7 dB

The margin between the emission levels and the specification limit is, in the worst case, 12.7 dB for the phase line at 15.98 MHz and 18.5 dB at 22.64 MHz for the neutral line.

The EUT met the F.C.C. Part 15, Subpart C specification requirements.

The details of the highest emissions are given in *Figure 5* to *Figure 8*.

TEST PERSONNEL:

Tester Signature: For/ 

Date: 25.11.10

Typed/Printed Name: A. Sharabi

Conducted Emission

E.U.T Description Industrial Grade 3 Detector
 Type WatchIN 325DT
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C
 Lead: Phase
 Detectors: Peak, Quasi-peak, Average

Signal Number	Frequency (MHz)	Peak (dBuV)	QP (dBuV)	QP Delta L 1 (dB)	Avg (dBuV)	Av Delta L 2 (dB)	Corr (dB)
1	0.156400	29.3	20.0	-45.7	-10.4	-66.1	0.0
2	0.162132	28.3	18.8	-46.6	-11.1	-66.6	0.0
3	7.990072	22.4	19.9	-40.1	19.1	-30.9	0.0
4	15.980949	42.1	38.5	-21.5	37.3	-12.7	0.0
5	21.335603	35.5	34.6	-25.4	33.5	-16.5	0.0
6	23.973482	26.5	22.3	-37.7	18.5	-31.5	0.0

Figure 5. Detectors: Peak, Quasi-peak, AVERAGE .

Note: QP Delta/Av Delta refer to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Conducted Emission

E.U.T Description Industrial Grade 3 Detector
 Type WatchIN 325DT
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C
 Lead: Phase
 Detectors: Peak, Quasi-peak, Average



ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR 15.91 MHz
 38.7B dB μ V

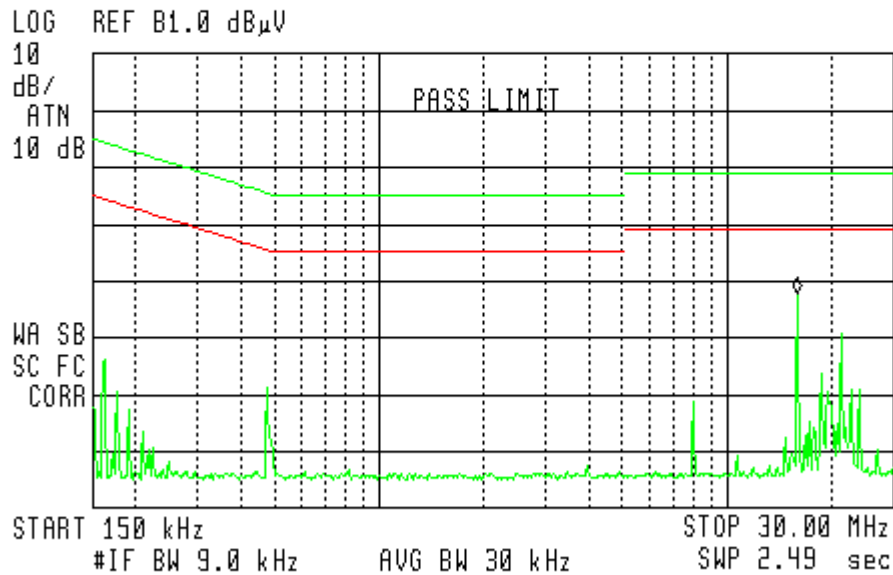


Figure 6. Detectors: Peak, Quasi-peak, Average

Conducted Emission

E.U.T Description Industrial Grade 3 Detector
 Type WatchIN 325DT
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C
 Lead: Neutral
 Detectors: Peak, Quasi-peak, Average

Signal Number	Frequency (MHz)	Peak (dBuV)	QP (dBuV)	QP Delta L 1 (dB)	Avg (dBuV)	Av Delta L 2 (dB)	Corr (dB)
1	0.156938	29.4	19.7	-45.9	-10.2	-65.9	0.0
2	0.198274	21.6	13.9	-49.8	-16.0	-69.8	0.0
3	15.981823	33.3	29.3	-30.7	28.1	-21.9	0.0
4	21.335719	32.0	31.4	-28.6	30.2	-19.8	0.0
5	22.640177	21.9	18.5	-41.5	17.0	-33.0	0.0
6	23.972693	26.3	21.6	-38.4	18.4	-31.6	0.0

Figure 7. Detectors: Peak, Quasi-peak, AVERAGE

Note: QP Delta/Av Delta refer to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Conducted Emission

E.U.T Description Industrial Grade 3 Detector
 Type WatchIN 325DT
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C
 Lead: Neutral
 Detectors: Peak, Quasi-peak, Average



ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR 21.23 MHz
 32.15 dB μ V

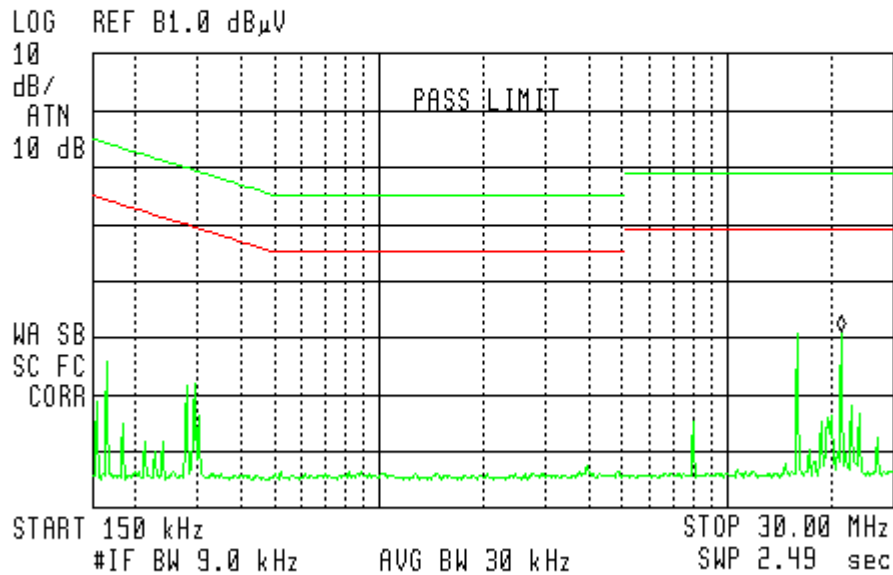


Figure 8 Conducted Emission: NEUTRAL
Detectors: Peak, Quasi-peak, Average

4.4 Test Instrumentation Used, Conducted Measurement

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
LISN	Fischer	FCC-LISN-2A	127	March 3, 2010	1 Year
LISN	Fischer	FCC-LISN-2A	128	March 3, 2010	1 Year
EMI Receiver	HP	85422E	3906A00276	November 10, 2009	1 Year
RF Filter Section	HP	85420E	3705A00248	November 10, 2009	1 Year
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

5. Field Strength of Fundamental

5.1 Test Specification

F.C.C., Part 15, Subpart C, Section 15.245(b)

5.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

The E.U.T. was placed on a non-conductive table, 0.8 meters above the O.A.T.S. ground plane.

The EMI receiver was set to the E.U.T. Fundamental Frequency (10.525 GHz) and Peak Detection.

The turntable and antenna mast were adjusted for maximum level reading on the EMI receiver.

The measurement was performed for vertical and horizontal polarizations of the test antenna.

5.3 Measured Data

JUDGEMENT: Passed by 44.7 dB

The EUT met the FCC Part 15, Subpart C, Section 15.245(b) specification requirements.

See details in *Figure 9*.

TEST PERSONNEL:

Tester Signature: For/ 

Date: 25.11.10

Typed/Printed Name: A. Sharabi

Field Strength of Fundamental

E.U.T Description Industrial Grade 3 Detector
 Type WatchIN 325DT
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.245(b)

Antenna Polarization: Horizontal/Vertical

Test Distance: 3 meters

Detector: Peak

Freq. (MHz)	Pol. V/H	Peak Reading (dB μ V/m)	Peak Spec. (dB μ V/m)	Peak Margin (dB)
10520.00	H	103.3	148.0	-44.7

Freq. (MHz)	Pol. V/H	Peak Reading (dB μ V/m)	Avg Factor (dB)	Avg. Result (dB μ V/m)	Avg. Spec. (dB μ V/m)	Avg. Margin (dB)
10520.00	H	103.3	-32.0	71.3	128.0	-56.7

Figure 9. Field Strength of Fundamental. Antenna Polarization: HORIZONTAL/VERTICAL. Detector: Peak

Notes:

1. Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.
2. "Peak Reading." (dB μ V/m) included the "Correction Factors".
3. "Correction Factors" (dB) = Test Antenna Correction Factor(dB) + Cable Loss.
4. "Average Result (dB μ V/m) = Peak Reading (dB μ V/m) + Average Factor (dB).

5.4 Test Instrumentation Used, Field Strength of Fundamental

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 10, 2009	1 year
RF Section	HP	85420E	3705A00248	November 10, 2009	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 24, 2010	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

6. Radiated Emission, 9 kHz – 30 MHz

6.1 Test Specification

9 kHz-30 MHz, FCC, Part 15, Subpart C, Section 209

6.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The frequency range 9 kHz-30 MHz was scanned.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30MHz, the loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter at a distance of 3 meters.

The E.U.T. was operated at the frequency of 10.525 GHz. This frequency was measured using a peak detector.

6.3 Test Results

JUDGEMENT: Passed

The EUT met the requirements of the F.C.C. Part 15, Subpart C, Section 209 specification.

No signals were detected in the frequency range of 9 kHz – 30 MHz.

TEST PERSONNEL:

Tester Signature: For/ 

Date: 25.11.10

Typed/Printed Name: A. Sharabi

6.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 10, 2009	1 year
RF Section	HP	85420E	3705A00248	November 10, 2009	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 19, 2009	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

6.5 Field Strength Calculation

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

FS: Field Strength [dB μ v/m]

RA: Receiver Amplitude [dB μ v]

AF: Receiving Antenna Correction Factor [dB/m]

CF: Cable Attenuation Factor [dB]

Example: FS = 30.7 dB μ V (RA) + 14.0 dB (AF) + 0.9 dB (CF) = 45.6 dB μ V

No external pre-amplifiers are used.

7. Spurious Radiated Emission 30 – 40000 MHz

7.1 Test Specification

30 MHz-40000 MHz, F.C.C., Part 15, Subpart C

7.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground..

The frequency range 30 MHz-1000 MHz was scanned, and the list of the highest emissions was verified and updated accordingly.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

In the frequency range 1-2.9 GHz, a computerized EMI receiver complying to CISPR 16 requirements was used.

In the frequency range 2.9-40.0 GHz, a spectrum analyzer including a low noise amplifier was used. During average measurements, the IF bandwidth was 1 MHz and the video bandwidth was 100Hz. During peak measurements, the IF bandwidth was 1 MHz and the video bandwidth was 3 MHz.

The test distance was 3 meters.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization. Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.) In the frequency range 30-1000 MHz, the readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.


7.3 **Test Results**

JUDGEMENT: Passed by 33.5 dB

The EUT met the requirements of the F.C.C. Part 15, Subpart C, specification.

TEST PERSONNEL:

Tester Signature: For/



Date: 25.11.10

Typed/Printed Name: A. Sharabi

Radiated Emission 30 – 40000 MHz

E.U.T Description Industrial Grade 3 Detector
 Type WatchIN 325DT
 Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz
 Test Distance: 3 meters Detector: Peak

Freq. (MHz)	Pol. V/H	Peak Reading (dB μ V/m)	Avg Factor (dB)	Avg Result (dB μ V/m)	Avg Spec. (dB μ V/m)	Avg. Margin (dB)
21050.00	H	71.0	-32.0	39.0	78.0	-39.0
31575.00	V	76.5	-32.0	44.5	78.0	-33.5

**Figure 10. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
 Detector: Peak**

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Reading” includes correction factor.

“Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

7.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 10, 2009	1 year
RF Section	HP	85420E	3705A00248	November 10, 2009	1 year
Antenna Bioconical	ARA	BCD 235/B	1041	August 3, 2009	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 24, 2010	1 year
Antenna Log Periodic	A.H. Systems	SAS-200/511	253	January 29, 2009	2 Years
Double Ridged Waveguide Horn Antenna	EMCO	3115	29845	March 16, 2010	2 Years
Horn Antenna	ARA	SWH-28	1008	December 23, 2008	2 Years
Horn Antenna	Narda	V637	0410	December 23, 2008	2 Years
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	January 13, 2010	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	January 13, 2010	1 Year
Low Noise Amplifier	MK Milliwave	MKT6-3000 4000-30-13P	A0399	January 14, 2010	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	March 14, 2010	1 Year
Spectrum Analyzer	HP	8564E	3442A00275	January 11, 2010	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

8. APPENDIX A - CORRECTION FACTORS

8.1 Correction factors for CABLE from EMI receiver to test antenna at 3 meter range.

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	7.3
20.0	0.6	1400.0	7.8
30.0	0.8	1600.0	8.4
40.0	0.9	1800.0	9.1
50.0	1.1	2000.0	9.9
60.0	1.2	2300.0	11.2
70.0	1.3	2600.0	12.2
80.0	1.4	2900.0	13.0
90.0	1.6		
100.0	1.7		
150.0	2.0		
200.0	2.3		
250.0	2.7		
300.0	3.1		
350.0	3.4		
400.0	3.7		
450.0	4.0		
500.0	4.3		
600.0	4.7		
700.0	5.3		
800.0	5.9		
900.0	6.3		
1000.0	6.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".

8.2 Correction factors for CABLE
from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

NOTES:

- 1. The cable type is RG-8.*
- 2. The overall length of the cable is 10 meters.*

8.3 Correction factors for CABLE
from spectrum analyzer
to test antenna above 2.9 GHz

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

NOTES:

1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.
2. The cable is used for measurements above 2.9 GHz.
3. The overall length of the cable is 10 meters.

8.4 Correction factors for LOG PERIODIC ANTENNA

**Type LPD 2010/A
at 3 and 10 meter ranges.**

Distance of 3 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.1
250.0	10.2
300.0	12.5
400.0	15.4
500.0	16.1
600.0	19.2
700.0	19.4
800.0	19.9
900.0	21.2
1000.0	23.5

Distance of 10 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.0
250.0	10.1
300.0	11.8
400.0	15.3
500.0	15.6
600.0	18.7
700.0	19.1
800.0	20.2
900.0	21.1
1000.0	23.2

NOTES:

1. Antenna serial number is 1038.
2. The above lists are located in file number 38M30.ANT for a 3 meter range,
and file number 38M100.ANT for a 10 meter range.
3. The files mentioned above are located on the disk marked "Radiated Emission
Test EMI Receiver".

8.5 Correction factors for

LOG PERIODIC ANTENNA

**Type SAS-200/511
at 3 meter range.**

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
1.0	24.9
1.5	27.8
2.0	29.9
2.5	31.2
3.0	32.8
3.5	33.6
4.0	34.3
4.5	35.2
5.0	36.2
5.5	36.7
6.0	37.2
6.5	38.1

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
7.0	38.6
7.5	39.2
8.0	39.9
8.5	40.4
9.0	40.8
9.5	41.1
10.0	41.7
10.5	42.4
11.0	42.5
11.5	43.1
12.0	43.4
12.5	44.4
13.0	44.6

NOTES:

1. Antenna serial number is 253.
2. The above lists are located in file number SAS3M0.ANT for a 3 meter range.
3. The files mentioned above are located on the disk marked "Antenna Factors".

**8.6 Correction factors for BICONICAL ANTENNA
Type BCD-235/B,
at 3 meter range**

FREQUENCY (MHz)	AFE (dB/m)
20.0	19.4
30.0	14.8
40.0	11.9
50.0	10.2
60.0	9.1
70.0	8.5
80.0	8.9
90.0	9.6
100.0	10.3
110.0	11.0
120.0	11.5
130.0	11.7
140.0	12.1
150.0	12.6
160.0	12.8
170.0	13.0
180.0	13.5
190.0	14.0
200.0	14.8
210.0	15.3
220.0	15.8
230.0	16.2
240.0	16.6
250.0	17.6
260.0	18.2
270.0	18.4
280.0	18.7
290.0	19.2
300.0	19.9
310	20.7
320	21.9
330	23.4
340	25.1
350	27.0

NOTES:

1. Antenna serial number is 1041.
2. The above list is located in file 19BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".

8.7 Correction factors for Double-Ridged Waveguide Horn

**Model: 3115, S/N 29845
at 3 meter range.**

FREQUENCY (GHz)	ANTENNA FACTOR (dB 1/m)	ANTENN A Gain (dBi)	FREQUENCY (GHz)	ANTENNA FACTOR (dB 1/m)	ANTENNA Gain (dBi)
1.0	24.8	5.4	10.0	38.8	11.4
1.5	26.1	7.6	10.5	38.9	11.8
2.0	28.6	7.7	11.0	39.0	12.1
2.5	29.8	8.4	11.5	39.6	11.8
3.0	31.4	8.4	12.0	39.8	12.0
3.5	32.4	8.7	12.5	39.6	12.5
4.0	33.7	8.6	13.0	40.0	12.5
4.5	33.4	9.9	13.5	39.8	13.0
5.0	34.5	9.7	14.0	40.2	13.0
5.5	35.1	9.9	14.5	40.6	12.9
6.0	35.4	10.4	15.0	41.3	12.4
6.5	35.6	10.8	15.5	39.5	14.6
7.0	36.2	10.9	16.0	38.8	15.5
7.5	37.3	10.4	16.5	40.0	14.6
8.0	37.7	10.6	17.0	41.4	13.4
8.5	38.3	10.5	17.5	44.8	10.3
9.0	38.5	10.8	18.0	47.2	8.1
9.5	38.7	11.1			

8.8 Correction factors for

**Horn Antenna
Model: SWH-28
at 1 meter range.**

FREQUENCY (GHz)	AFE (dB /m)	Gain (dB1)
18.0	40.3	16.1
19.0	40.3	16.3
20.0	40.3	16.1
21.0	40.3	16.3
22.0	40.4	16.8
23.0	40.5	16.4
24.0	40.5	16.6
25.0	40.5	16.7
26.0	40.6	16.4

8.9 Correction factors for

**Horn Antenna
Model: V637**

FREQUENCY (GHz)	AFE (dB /m)	Gain (dB1)
26.0	43.6	14.9
27.0	43.7	15.1
28.0	43.8	15.3
29.0	43.9	15.5
30.0	43.9	15.8
31.0	44.0	16.0
32.0	44.1	16.2
33.0	44.1	16.4
34.0	44.1	16.7
35.0	44.2	16.9
36.0	44.2	17.1
37.0	44.2	17.4
38.0	44.2	17.6
39.0	44.2	17.8
40.0	44.2	18.0

8.10 Correction factors for ACTIVE LOOP ANTENNA

Model 6502

S/N 9506-2950

FREQUENCY (MHz)	Magnetic Antenna Factor (dB)	Electric Antenna Factor (dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2

8.11 Setup 2nd Harmonic:

Setup:	Antenna	Cable	LNA	Distance	S.Analyzer
18-26	SWH28	104 E	28-B	3 m	8564E

Frequency(GHz)	C.L	AF	Gain Amp.	Amp. correction
18	10.8	32.3	43.9	-0.8
20	11.3	32.5	42.8	1
22.5	12.1	33.1	42.5	2.7
25	12.5	34.4	42.9	4
26	13.3	34	42.5	4.8

8.12 Setup 3rd Harmonic:

Setup:	Antenna	Cable	LNA	Distance	S.Analyzer
30-40	narda V637	A1674	MK(1344)	1 m	8564E

Frequency(GHz)	C.L	AF	Gain Amp.	Amp. correction
30	11.2	43.7	29.1	25.8
32	11.9	43.5	29.4	26
34	12	43.7	29.3	26.4
36	12.3	43.8	30.2	25.9
38	12.4	44	30	26.4
40	12.8	44.3	29.1	28