

Hermon Laboratories Ltd.
Harakevet Industrial Zone, Binyamina 30500,
Israel
Tel. +972-4-6288001
Fax. +972-4-6288277
E-mail: mail@hermonlabs.com

TEST REPORT

ACCORDING TO: FCC CFR 47 PART 15 subpart C, section 15.225

FOR:

Risco Ltd.

Touch Screen Keypad

Model: ProSYS KPP

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.



Table of contents

| | | |
|-----|---|----|
| 1 | Applicant information | 3 |
| 2 | Equipment under test attributes | 3 |
| 3 | Manufacturer information | 3 |
| 4 | Test details | 3 |
| 5 | Tests summary | 4 |
| 6 | EUT description | 5 |
| 6.1 | General information | 5 |
| 6.2 | Ports and lines | 5 |
| 6.3 | Support and test equipment | 5 |
| 6.4 | Changes made in the EUT | 5 |
| 6.5 | Test configuration | 5 |
| 6.6 | Transmitter characteristics | 6 |
| 7 | Transmitter tests according to 47CFR part 15 subpart C requirements | 7 |
| 7.1 | In band radiated emissions | 7 |
| 7.2 | Out of band radiated emissions | 14 |
| 7.3 | Frequency stability test | 20 |
| 7.4 | Conducted emissions | 22 |
| 7.5 | Occupied bandwidth test | 25 |
| 7.6 | Antenna requirements | 29 |
| 8 | APPENDIX A Test equipment and ancillaries used for tests | 30 |
| 9 | APPENDIX B Measurement uncertainties | 31 |
| 10 | APPENDIX C Test laboratory description | 32 |
| 11 | APPENDIX D Specification references | 32 |
| 12 | APPENDIX E Test equipment correction factors | 33 |
| 13 | APPENDIX F Abbreviations and acronyms | 41 |



HERMON LABORATORIES

1 Applicant information

Client name: Risco Ltd.
Address: 14 Hahoma Street, Rishon LeZion 75655, Israel
Telephone: +972 3963 7742
Fax: +972 3961 6584
E-mail: efig@riscogroup.com
Contact name: Mr. Efi Goren

2 Equipment under test attributes

Product name: Touch Screen Keypad
Product type: Transceiver operating at 13.56 MHz
Model(s): ProSYS KPP
Serial number: RP128KPP100A
Hardware version: 9
Software release: 15
Receipt date: 8/10/2009

3 Manufacturer information

Manufacturer name: Risco Ltd.
Address: 14 Hahoma Street, Rishon LeZion 75655, Israel
Telephone: +972 3963 7742
Fax: +972 3961 6584
E-Mail: efig@riscogroup.com
Contact name: Mr. Efi Goren

4 Test details

Project ID: 19882
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 8/10/2009
Test completed: 2/23/2010
Test specification(s): FCC Part 15, subpart C, §15.225



5 Tests summary

| Test | Status |
|---|--------|
| Transmitter characteristics | |
| FCC Part 15, Sections 15.225(a) (b) (c), In band radiated emissions | Pass |
| FCC Part 15, Sections 15.225(d), Out of band radiated emissions | Pass |
| FCC Part 15, Section 15.225(e), Frequency stability | Pass |
| FCC Part 15, Section 15.207(a), Conducted emission | Pass |
| FCC Part 15, Section 15.215(c), Occupied bandwidth | Pass |
| FCC Part 15, Section 15.203, Antenna requirements | Pass |

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

| | Name and Title | Date | Signature |
|---------------------|--|-------------------|-----------|
| Tested by: | Mr. S. Samokha, test engineer | February 23, 2010 | |
| Reviewed by: | Mrs. M. Cherniavsky, certification engineer | February 24, 2010 | |
| Approved by: | Mr. M. Nikishin, EMC and radio group manager | February 26, 2010 | |



6 EUT description

6.1 General information

The EUT is a flat screen wired keypad with proximity that has a 13.56 MHz transceiver. The EUT is powered from 12 VDC obtained from a Risco control panel. The control panel is powered from AC mains.

6.2 Ports and lines

| Port type | Port description | Connected from | Connected to | Qty. | Cable type | Cable length | Indoor / outdoor |
|-----------|------------------|----------------|---------------|------|------------|--------------|------------------|
| Power | DC power (+12V) | EUT | Control panel | 1 | Unshielded | 3 m* | Indoor |
| Power | DC power (COM) | EUT | Control panel | 1 | Unshielded | 3 m* | Indoor |
| Signal | RS-485 | EUT | Control panel | 2 | Unshielded | 3 m* | Indoor |

* May be up to 30 m long.


6.3 Support and test equipment

| Description | Manufacturer | Model number | Serial number |
|---------------|--------------|--------------|---------------|
| Control panel | Risco | Prosys 128 | NA |

6.4 Changes made in the EUT

No changes were implemented.

6.5 Test configuration

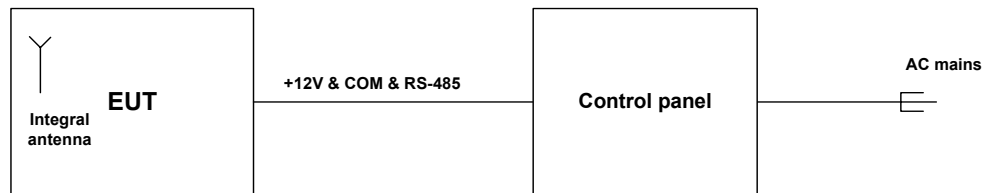



HERMON LABORATORIES

6.6 Transmitter characteristics

| | | | | |
|---|--|---|--------------------------------|-----|
| Type of equipment | | | | |
| V | Stand-alone (Equipment with or without its own control provisions) | | | |
| | Combined equipment (Equipment where the radio part is fully integrated within another type of equipment) | | | |
| | Plug-in card (Equipment intended for a variety of host systems) | | | |
| Intended use | | Condition of use | | |
| | fixed | Always at a distance more than 2 m from all people | | |
| V | mobile | Always at a distance more than 20 cm from all people | | |
| | portable | May operate at a distance closer than 20 cm to human body | | |
| Assigned frequency range | | 13.110-14.010 MHz | | |
| Operating frequency | | 13.56 MHz | | |
| Maximum rated output power | | At transmitter 50 Ω RF output connector | dBm | |
| | | Effective radiated power (for equipment with no RF connector) | -27.9 dBm | |
| Is transmitter output power variable? | | V | No | |
| | | | continuous variable | |
| | | | stepped variable with stepsize | dB |
| | | Yes | minimum RF power | dBm |
| | | maximum RF power | dBm | |
| Antenna connection | | | | |
| unique coupling | standard connector | V | integral | |
| | | | V with temporary RF connector | |
| | | | without temporary RF connector | |
| Antenna/s technical characteristics | | | | |
| Type | Manufacturer | Model number | Gain | |
| Printed | Risco | NA | 0 dBi | |
| Type of modulation | | ASK | | |
| Modulating test signal | | ID code | | |
| Transmitter power source | | | | |
| | Battery | Nominal rated voltage | Battery type | |
| V | DC | 12 VDC via AC/DC adapter | | |
| | AC mains | Nominal rated voltage | Frequency | |
| Common power source for transmitter and receiver | | yes | | |



| | | | |
|-----------------------------|-------------------------------|---|-----------------------------|
| Test specification: | | Sections 15.225(a) (b) (c), In band radiated emissions | |
| Test procedure: | | ANSI C63.4, Sections 5.3 and 13.1.4 | |
| Test mode: | Compliance | Verdict: | PASS |
| Date & Time: | 8/23/2009 11:39:36 AM | | |
| Temperature: 24.2 °C | Air Pressure: 1009 hPa | Relative Humidity: 39 % | Power Supply: 12 VDC |
| Remarks: | | | |

7 Transmitter tests according to 47CFR part 15 subpart C requirements

7.1 In band radiated emissions

7.1.1 General

This test was performed to measure field strength of fundamental emission and modulation products from the EUT within the assigned band. Specification test limits are given in Table 7.1.1.

Table 7.1.1 Radiated emission limits

| Frequency, MHz | Field strength at 30 m distance* | | Field strength at 3 m distance* | |
|------------------------|----------------------------------|----------------------------|---------------------------------|---------------------------------|
| | $\mu\text{V/m}$ | $\text{dB}(\mu\text{V/m})$ | $\mu\text{V/m}$ | $\text{dB}(\mu\text{V/m})^{**}$ |
| 13.110 – 13.410 | 106 | 40.5 | 10600 | 80.5 |
| 13.410 – 13.553 | 334 | 50.5 | 33400 | 90.5 |
| 13.553 – 13.567 | 15848 | 84.0 | 1584800 | 124.0 |
| 13.567 – 13.710 | 334 | 50.5 | 33400 | 90.5 |
| 13.710 – 14.010 | 106 | 40.5 | 10600 | 80.5 |

*- The limit is provided in quasi peak values.

** - The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log(S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

7.1.2 Test procedure

7.1.2.1 The EUT was set up as shown in Figure 7.1.1 energized and the performance check was conducted.


7.1.2.2 The specified frequency range was investigated with loop antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° , the measuring antenna was rotated around its vertical axis and the measuring antenna polarization was switched from vertical to horizontal.

7.1.2.3 The worst test results (the lowest margins) were recorded in Table 7.1.2 and shown in the associated plots.



| | | | |
|---|-------------------------------|--------------------------------|-----------------------------|
| Test specification: Sections 15.225(a) (b) (c), In band radiated emissions | | | |
| Test procedure: ANSI C63.4, Sections 5.3 and 13.1.4 | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date & Time: 8/23/2009 11:39:36 AM | | | |
| Temperature: 24.2 °C | Air Pressure: 1009 hPa | Relative Humidity: 39 % | Power Supply: 12 VDC |
| Remarks: | | | |

Figure 7.1.1 Setup for in band radiated emission measurements

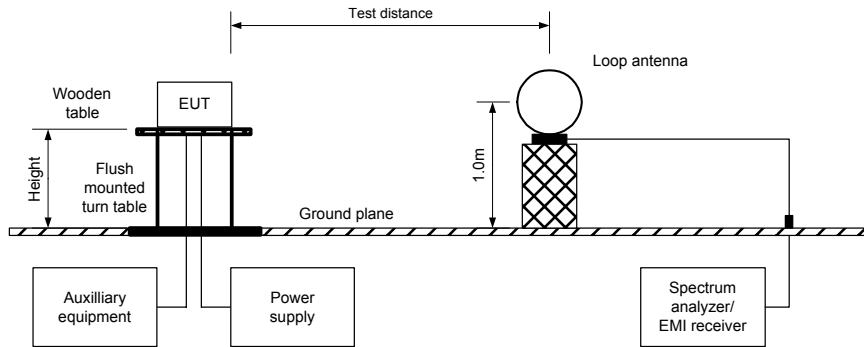



| | | | |
|-----------------------------|-------------------------------|---|-----------------------------|
| Test specification: | | Sections 15.225(a) (b) (c), In band radiated emissions | |
| Test procedure: | | ANSI C63.4, Sections 5.3 and 13.1.4 | |
| Test mode: | Compliance | Verdict: | PASS |
| Date & Time: | 8/23/2009 11:39:36 AM | | |
| Temperature: 24.2 °C | Air Pressure: 1009 hPa | Relative Humidity: 39 % | Power Supply: 12 VDC |
| Remarks: | | | |

Table 7.1.2 In band radiated emission test results

TEST DISTANCE: 3 m
 EUT POSITION: Typical (Vertical)
 MODULATION: ASK
 MODULATING SIGNAL: ID code
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 INVESTIGATED FREQUENCY RANGE: 13.110 – 14.010 MHz
 RESOLUTION BANDWIDTH: 9.0 kHz
 VIDEO BANDWIDTH: 30.0 kHz

| Carrier frequency, MHz | Peak emission, dB(µV/m) | Quasi-peak | | | Antenna polarization | Azimuth**, degrees | Verdict | |
|---------------------------|-------------------------|-----------------------------|-----------------|-------------|----------------------|--------------------|---------|--|
| | | Measured emission, dB(µV/m) | Limit, dB(µV/m) | Margin, dB* | | | | |
| U _{nom} = 12 VDC | | | | | | | | |
| 13.56 | 67.20 | NA | 124.0 | -56.80 | Vertical | 90 | Pass | |
| U _{max} = 16 VDC | | | | | | | | |
| 13.56 | 67.30 | NA | 124.0 | -56.70 | Vertical | 90 | | |
| U _{min} = 9 VDC | | | | | | | | |
| 13.56 | 66.70 | NA | 124.0 | -57.30 | Vertical | 90 | | |

*- Margin = Measured emission - specification limit.
 **- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

| | | | | | | | |
|---------|---------|---------|---------|---------|---------|---------|--|
| HL 0415 | HL 0446 | HL 0521 | HL 0812 | HL 1430 | HL 1553 | HL 2883 | |
|---------|---------|---------|---------|---------|---------|---------|--|

Full description is given in Appendix A.




HERMON LABORATORIES

| | | | |
|-----------------------------|-------------------------------|---|-----------------------------|
| Test specification: | | Sections 15.225(a) (b) (c), In band radiated emissions | |
| Test procedure: | | ANSI C63.4, Sections 5.3 and 13.1.4 | |
| Test mode: | Compliance | Verdict: | PASS |
| Date & Time: | 8/23/2009 11:39:36 AM | | |
| Temperature: 24.2 °C | Air Pressure: 1009 hPa | Relative Humidity: 39 % | Power Supply: 12 VDC |
| Remarks: | | | |


Plot 7.1.1 Fundamental emission test result

TEST SITE: Fully anechoic chamber
TEST DISTANCE: 3 m
DETECTOR: Peak hold
EUT POSITION: Typical (Vertical)
INPUT VOLTAGE: Unom

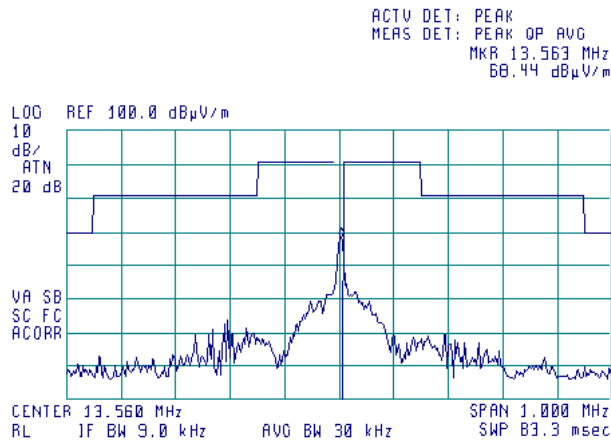

Plot 7.1.2 In band radiated emission test results

TEST SITE: Fully anechoic chamber
TEST DISTANCE: 3 m
DETECTOR: Peak hold
EUT POSITION: Typical (Vertical)
INPUT VOLTAGE: Umax

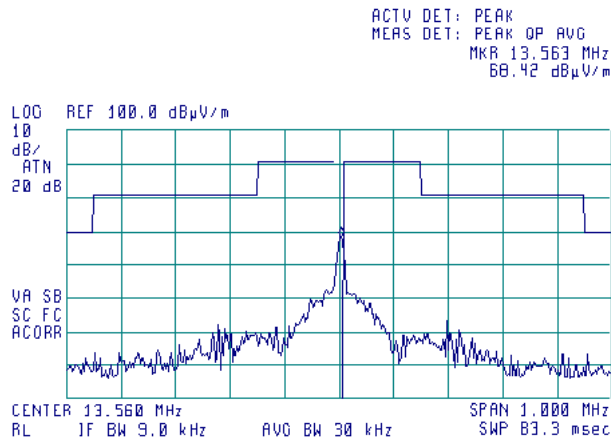



HERMON LABORATORIES


| | | | |
|-----------------------------|---|--------------------------------|-----------------------------|
| Test specification: | Sections 15.225(a) (b) (c), In band radiated emissions | | |
| Test procedure: | ANSI C63.4, Sections 5.3 and 13.1.4 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date & Time: | 8/23/2009 11:39:36 AM | | |
| Temperature: 24.2 °C | Air Pressure: 1009 hPa | Relative Humidity: 39 % | Power Supply: 12 VDC |
| Remarks: | | | |

Plot 7.1.3 In band radiated emission test results

TEST SITE: Fully anechoic chamber
TEST DISTANCE: 3 m
DETECTOR: Peak hold
EUT POSITION: Typical (Vertical)
INPUT VOLTAGE: Umin



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 13.563 MHz
68.07 dB μ V/m

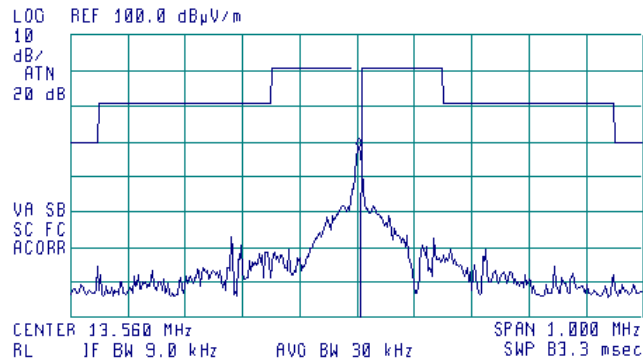



HERMON LABORATORIES


| | | | |
|---|-------------------------------|--------------------------------|-----------------------------|
| Test specification: Sections 15.225(a) (b) (c), In band radiated emissions | | | |
| Test procedure: ANSI C63.4, Sections 5.3 and 13.1.4 | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date & Time: 8/23/2009 11:39:36 AM | | | |
| Temperature: 24.2 °C | Air Pressure: 1009 hPa | Relative Humidity: 39 % | Power Supply: 12 VDC |
| Remarks: | | | |

Plot 7.1.4 Fundamental emission test result

TEST SITE: OATS
 TEST DISTANCE: 3 m
 DETECTOR: Peak hold
 EUT POSITION: Typical (Vertical)
 INPUT VOLTAGE: Unom



FREQ 13.56 MHz
 PEAK 67.2 dBµV/m
 QP 61.4 dBµV/m
 AVG 43.4 dBµV/m

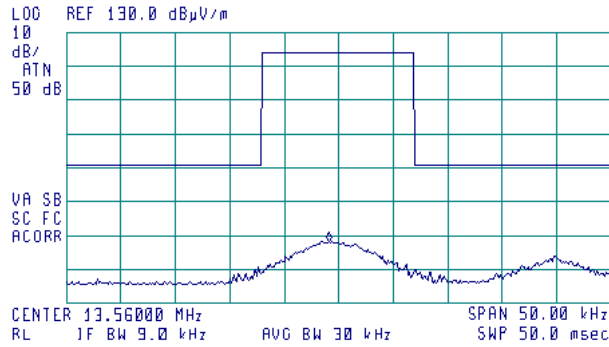


Plot 7.1.5 In band radiated emission test results

TEST SITE: OATS
 TEST DISTANCE: 3 m
 DETECTOR: Peak hold
 EUT POSITION: Typical (Vertical)
 INPUT VOLTAGE: Umax



FREQ 13.56 MHz
 PEAK 67.3 dBµV/m
 QP 61.3 dBµV/m
 AVG 43.2 dBµV/m

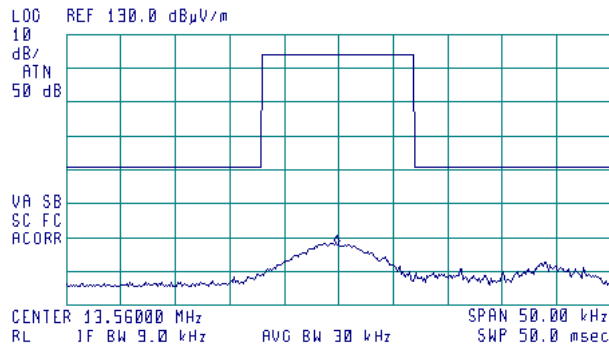



HERMON LABORATORIES


| | | | |
|-----------------------------|-------------------------------|---|-----------------------------|
| Test specification: | | Sections 15.225(a) (b) (c), In band radiated emissions | |
| Test procedure: | | ANSI C63.4, Sections 5.3 and 13.1.4 | |
| Test mode: | Compliance | Verdict: | PASS |
| Date & Time: | 8/23/2009 11:39:36 AM | | |
| Temperature: 24.2 °C | Air Pressure: 1009 hPa | Relative Humidity: 39 % | Power Supply: 12 VDC |
| Remarks: | | | |

Plot 7.1.6 In band radiated emission test results

TEST SITE: OATS
TEST DISTANCE: 3 m
DETECTOR: Peak hold
EUT POSITION: Typical (Vertical)
INPUT VOLTAGE: Umin



FREQ 13.56 MHz
PEAK 66.7 dBμV/m
QP 60.9 dBμV/m
AVG 43.0 dBμV/m

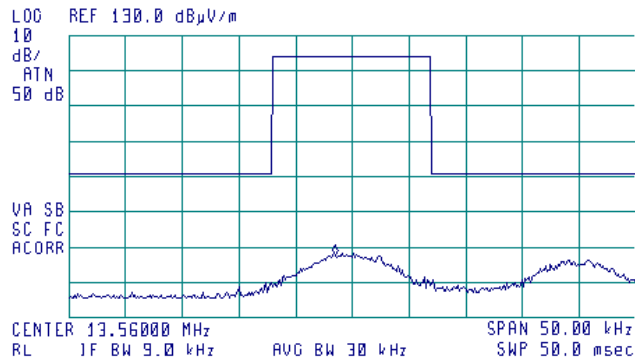



| | | | |
|-----------------------------|---|--------------------------------|-----------------------------|
| Test specification: | Sections 15.225(d), Out of band radiated emissions | | |
| Test procedure: | ANSI C63.4, Sections 5.3 and 13.1.4 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date & Time: | 8/23/2009 2:20:27 PM | | |
| Temperature: 24.5 °C | Air Pressure: 1007 hPa | Relative Humidity: 39 % | Power Supply: 12 VDC |
| Remarks: | | | |

7.2 Out of band radiated emissions

7.2.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Radiated emission limits

| Frequency, MHz | Field strength at 3 m within restricted bands, dB(μV/m)*** | | |
|----------------|--|-----------------|-----------------|
| | Peak | Quasi Peak | Average |
| 0.009 – 0.090 | 148.5 – 128.5 | NA | 128.5 – 108.5** |
| 0.090 – 0.110 | NA | 108.5 – 106.8** | NA |
| 0.110 – 0.490 | 126.8 – 113.8 | NA | 106.8 – 93.8** |
| 0.490 – 1.705 | NA | 73.8 – 63.0** | NA |
| 1.705 – 30.0* | | 69.5** | |
| 30 – 88 | | 40.0 | |
| 88 – 216 | | 43.5 | |
| 216 – 960 | | 46.0 | |
| 960 – 1000 | | 54.0 | |

*- The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

** - The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log(S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

*** - The limit decreases linearly with the logarithm of frequency.

7.2.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and the performance check was conducted.

7.2.2.2 The specified frequency range was investigated with loop antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna was rotated around its vertical axis and the measuring antenna polarization was switched from vertical to horizontal.

7.2.2.3 The worst test results (the lowest margins) were recorded in Table 7.2.2 and shown in the associated plots.

7.2.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.2.3.1 The EUT was set up as shown in Figure 7.2.2, energized and the performance check was conducted.

7.2.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.2.3.3 The worst test results (the lowest margins) were recorded in Table 7.2.2 and shown in the associated plots.



| | | | |
|---|-------------------------------|--------------------------------|-----------------------------|
| Test specification: Sections 15.225(d), Out of band radiated emissions | | | |
| Test procedure: ANSI C63.4, Sections 5.3 and 13.1.4 | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date & Time: 8/23/2009 2:20:27 PM | | | |
| Temperature: 24.5 °C | Air Pressure: 1007 hPa | Relative Humidity: 39 % | Power Supply: 12 VDC |
| Remarks: | | | |

Figure 7.2.1 Radiated emissions below 30 MHz test set up


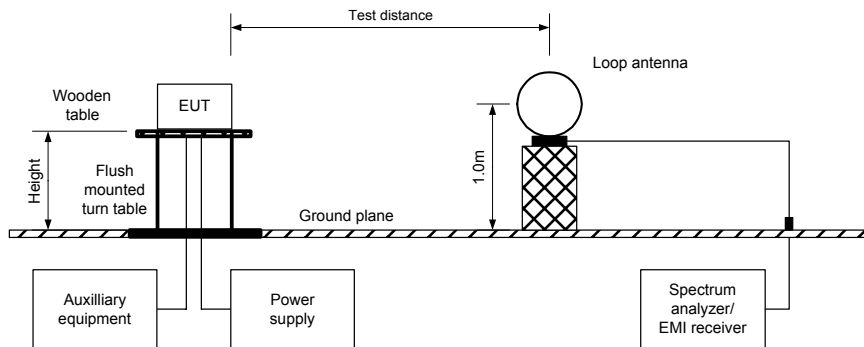


Figure 7.2.2 Radiated emissions above 30 MHz test set up



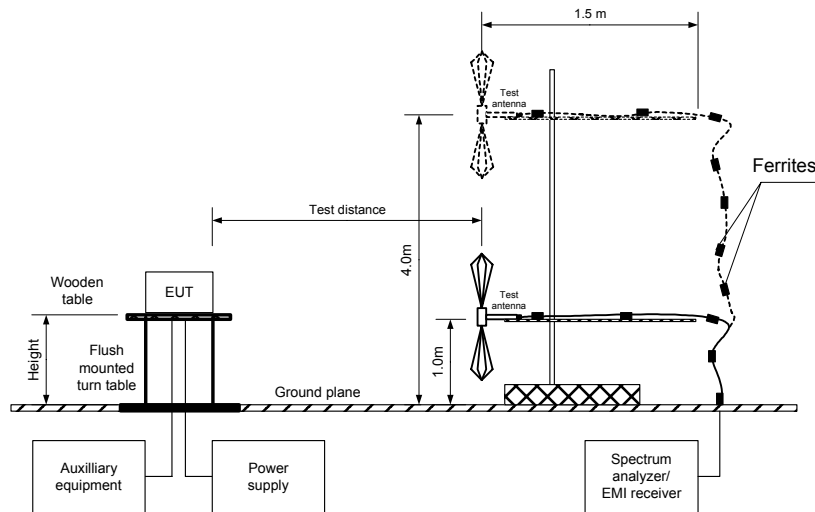

HERMON LABORATORIES

| | | | |
|-----------------------------|-------------------------------|---|-----------------------------|
| Test specification: | | Sections 15.225(d), Out of band radiated emissions | |
| Test procedure: | | ANSI C63.4, Sections 5.3 and 13.1.4 | |
| Test mode: | Compliance | Verdict: | PASS |
| Date & Time: | 8/23/2009 2:20:27 PM | | |
| Temperature: 24.5 °C | Air Pressure: 1007 hPa | Relative Humidity: 39 % | Power Supply: 12 VDC |
| Remarks: | | | |

Table 7.2.2 Out of band radiated emissions test results

| | |
|------------------------------------|-----------------------------------|
| TEST SITE: | OATS |
| TEST DISTANCE: | 3 m |
| EUT POSITION: | Typical (Vertical) |
| MODULATION: | ASK |
| MODULATING SIGNAL: | ID code |
| TRANSMITTER OUTPUT POWER SETTINGS: | Maximum |
| INVESTIGATED FREQUENCY RANGE: | 0.009 – 1000 MHz |
| RESOLUTION BANDWIDTH: | 1 kHz (9 kHz – 150 kHz) |
| | 9.0 kHz (150 kHz – 30 MHz) |
| | 120 kHz (30 MHz – 1000 MHz) |
| VIDEO BANDWIDTH: | ≥ Resolution bandwidth |
| TEST ANTENNA TYPE: | Active loop (9 kHz – 30 MHz) |
| | Biconical (30 MHz – 200 MHz) |
| | Log periodic (200 MHz – 1000 MHz) |
| | Biconilog (30 MHz – 1000 MHz) |

| Frequency, MHz | Peak emission, dB(μV/m) | Quasi-peak | | | Antenna polarization | Antenna height, m | Turn-table position**, degrees | Verdict |
|----------------|-------------------------|-----------------------------|-----------------|-------------|----------------------|-------------------|--------------------------------|---------|
| | | Measured emission, dB(μV/m) | Limit, dB(μV/m) | Margin, dB* | | | | |
| 81.350000 | 40.43 | 29.71 | 40.00 | -10.29 | Vertical | 1.0 | 65 | Pass |
| 120.378500 | 40.81 | 26.45 | 43.50 | -17.05 | Vertical | 1.0 | 242 | |
| 135.600875 | 46.84 | 40.82 | 43.50 | -2.68 | Vertical | 1.0 | 266 | |
| 149.167500 | 49.80 | 38.54 | 43.50 | -4.96 | Vertical | 1.0 | 90 | |
| 461.028000 | 38.13 | 30.97 | 46.00 | -15.03 | Horizontal | 1.0 | 175 | |
| 542.386000 | 37.27 | 28.57 | 46.00 | -17.43 | Vertical | 1.2 | 120 | |

*- Margin = Measured emission - specification limit.
**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

| | | | | | | | |
|---------|---------|---------|---------|---------|---------|---------|---------|
| HL 0034 | HL 0415 | HL 0446 | HL 0566 | HL 0812 | HL 1425 | HL 1430 | HL 1553 |
| HL 2697 | HL 2883 | | | | | | |


Full description is given in Appendix A.



| | | | |
|---|-------------------------------|--------------------------------|-----------------------------|
| Test specification: Sections 15.225(d), Out of band radiated emissions | | | |
| Test procedure: ANSI C63.4, Sections 5.3 and 13.1.4 | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date & Time: 8/23/2009 2:20:27 PM | | | |
| Temperature: 24.5 °C | Air Pressure: 1007 hPa | Relative Humidity: 39 % | Power Supply: 12 VDC |
| Remarks: | | | |


Plot 7.2.1 Radiated emission measurements from 9 to 150 kHz

TEST SITE: Anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 DETECTOR: Peak hold

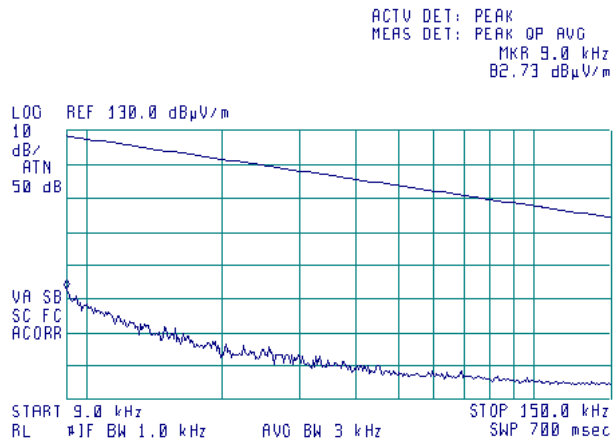

Plot 7.2.2 Radiated emission measurements from 9 to 150 kHz

TEST SITE: Anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 DETECTOR: Peak hold

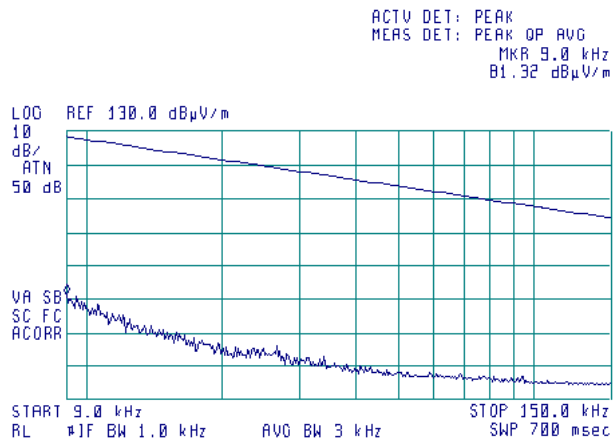




HERMON LABORATORIES

| | | | |
|---|-------------------------------|--------------------------------|-----------------------------|
| Test specification: Sections 15.225(d), Out of band radiated emissions | | | |
| Test procedure: ANSI C63.4, Sections 5.3 and 13.1.4 | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date & Time: 8/23/2009 2:20:27 PM | | | |
| Temperature: 24.5 °C | Air Pressure: 1007 hPa | Relative Humidity: 39 % | Power Supply: 12 VDC |
| Remarks: | | | |

Plot 7.2.3 Radiated emission measurements from 0.15 to 30 MHz


TEST SITE: Anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 DETECTOR: Peak hold

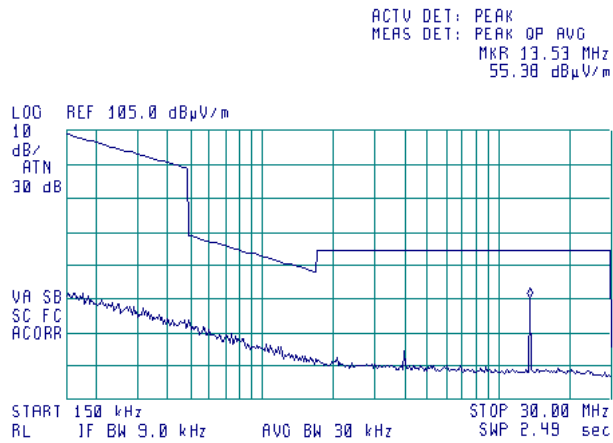

NOTE: 13.53MHz – fundamental frequency

Plot 7.2.4 Radiated emission measurements from 0.15 to 30 MHz

TEST SITE: Anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 DETECTOR: Peak hold

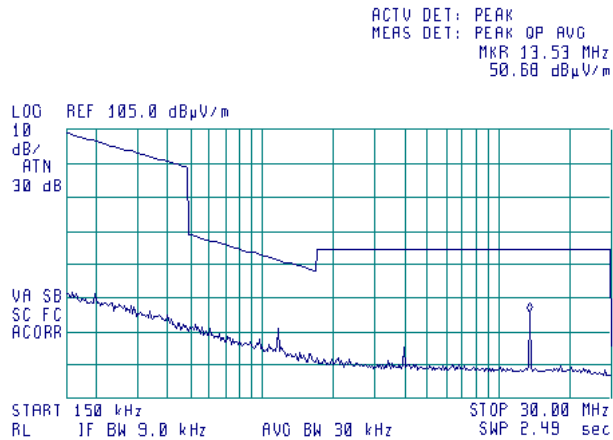

NOTE: 13.53MHz – fundamental frequency




HERMON LABORATORIES

| | | | |
|---|-------------------------------|--------------------------------|-----------------------------|
| Test specification: Sections 15.225(d), Out of band radiated emissions | | | |
| Test procedure: ANSI C63.4, Sections 5.3 and 13.1.4 | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date & Time: 8/23/2009 2:20:27 PM | | | |
| Temperature: 24.5 °C | Air Pressure: 1007 hPa | Relative Humidity: 39 % | Power Supply: 12 VDC |
| Remarks: | | | |


Plot 7.2.5 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 DETECTOR: Peak hold

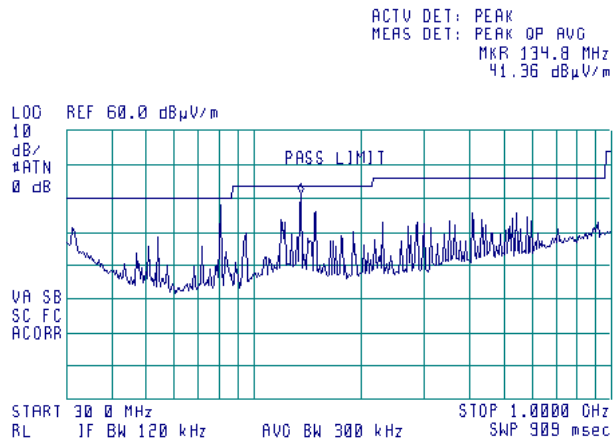

Plot 7.2.6 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 DETECTOR: Peak hold

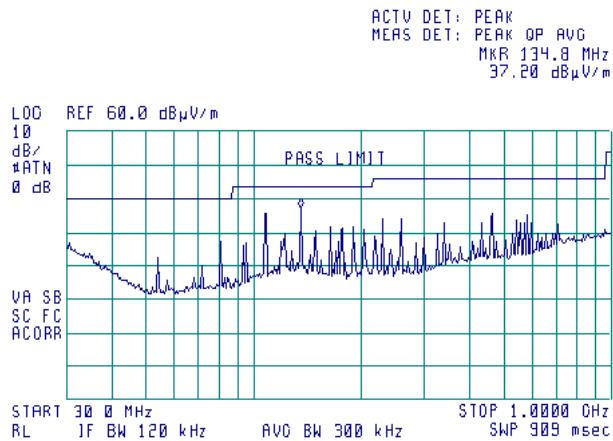



| | | | |
|-----------------------------|---|--------------------------------|-----------------------------|
| Test specification: | Section 15.225(e), Frequency stability | | |
| Test procedure: | ANSI C63.4, Section 13.1.6 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date & Time: | 8/23/2009 11:56:44 AM | | |
| Temperature: 25.2 °C | Air Pressure: 1008 hPa | Relative Humidity: 41 % | Power Supply: 12 VDC |
| Remarks: | | | |

7.3 Frequency stability test

7.3.1 General

This test was performed to measure frequency stability of transmitter RF carrier. Specification test limits are given in Table 7.3.1.


Table 7.3.1 Frequency stability limits

| Assigned frequency, MHz | Maximum allowed frequency displacement | |
|-------------------------|--|------|
| | % | Hz |
| 13.560 | ± 0.01 % | 1356 |

7.3.2 Test procedure

- 7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and its proper operation was checked.
- 7.3.2.2 The EUT power was turned off. Temperature within test chamber was set to the required one and a period of time sufficient to stabilize all of the oscillator circuit components was allowed.
- 7.3.2.3 The EUT was powered on and carrier frequency was measured at start up moment and then after 2, 5 and 10 minutes. The EUT was powered off.
- 7.3.2.4 The above procedure was repeated at the rest of the test temperatures and voltages as provided in Table 7.3.2.
- 7.3.2.5 Frequency displacement was calculated and compared with the limit as provided in Table 7.3.2.

Figure 7.3.1 Frequency stability test setup

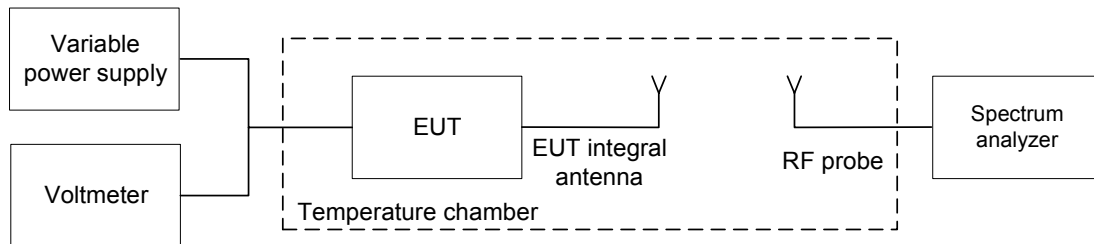



| | |
|---|-------------------------------|
| Test specification: Section 15.225(e), Frequency stability | |
| Test procedure: ANSI C63.4, Section 13.1.6 | |
| Test mode: Compliance | Verdict: PASS |
| Date & Time: 8/23/2009 11:56:44 AM | |
| Temperature: 25.2 °C | Air Pressure: 1008 hPa |
| Relative Humidity: 41 % | |
| Power Supply: 12 VDC | |
| Remarks: | |

Table 7.3.2 Frequency stability test results

OPERATING FREQUENCY: 13.560 MHz
 NOMINAL POWER VOLTAGE: 12 V
 TEMPERATURE STABILIZATION PERIOD: 20 min
 POWER DURING TEMPERATURE TRANSITION: Off
 SPECTRUM ANALYZER MODE: Peak hold
 RESOLUTION BANDWIDTH: 300 Hz
 VIDEO BANDWIDTH: 1000 Hz
 MODULATION: Modulated

| Temperature, °C | Voltage, V | Frequency, MHz | | | | Max frequency drift, H: | | Limit, Hz | Margin, Hz | Verdict |
|-----------------|--------------|----------------|---------------------|---------------------|----------------------|-------------------------|----------|-----------|------------|---------|
| | | Start up | 2 nd min | 5 th min | 10 th min | Positive | Negative | | | |
| -20 | nominal | 13.559797 | 13.559814 | 13.559792 | 13.559785 | 167 | 0 | 1356 | -1189 | Pass |
| 20 | nominal +15% | 13.559680 | 13.559662 | 13.559662 | 13.559672 | 33 | 0 | | -1323 | |
| 20 | nominal | 13.559634 | 13.559637 | 13.559645 | 13.559647* | 0 | -13 | | -1343 | |
| 20 | nominal -15% | 13.559585 | 13.559584 | 13.559615 | 13.559629 | 0 | -63 | | -1293 | |
| 50 | nominal | 13.559592 | 13.559567 | 13.559575 | 13.559634 | 0 | -80 | | -1276 | |

* - Reference frequency

Reference numbers of test equipment used

| | | | | | | | |
|---------|---------|---------|---------|---------|--|--|--|
| HL 0337 | HL 0493 | HL 1424 | HL 1524 | HL 2634 | | | |
|---------|---------|---------|---------|---------|--|--|--|

Full description is given in Appendix A.



| | | | |
|--|-------------------------------|--------------------------------|-----------------------------|
| Test specification: Section 15.207(a), Conducted emission | | | |
| Test procedure: ANSI C63.4, Section 13.1.3 | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date & Time: 8/23/2009 2:47:45 PM | | | |
| Temperature: 25.8 °C | Air Pressure: 1007 hPa | Relative Humidity: 41 % | Power Supply: 12 VDC |
| Remarks: | | | |

7.4 Conducted emissions

7.4.1 General

This test was performed to measure common mode conducted emissions at the power port. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Limits for conducted emissions

| Frequency, MHz | Class B limit, dB(μV) | |
|----------------|-----------------------|----------|
| | QP | AVRG |
| 0.15 - 0.5 | 66 - 56* | 56 - 46* |
| 0.5 - 5.0 | 56 | 46 |
| 5.0 - 30 | 60 | 50 |

* The limit decreases linearly with the logarithm of frequency.

7.4.2 Test procedure


7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized and the performance check was conducted.

7.4.2.2 The measurements were performed at power terminals with the LISN, connected to a spectrum analyzer in the frequency range referred to in Table 7.4.2. Unused coaxial connector of the LISN was terminated with 50 Ohm. Quasi-peak and average detectors were used throughout the testing.

7.4.2.3 The position of the device cables was varied to determine maximum emission level.

7.4.2.4 The worst test results (the lowest margins) were recorded in Table 7.4.2 and shown in the associated plots.

Figure 7.4.1 Setup for conducted emission measurements, table-top equipment

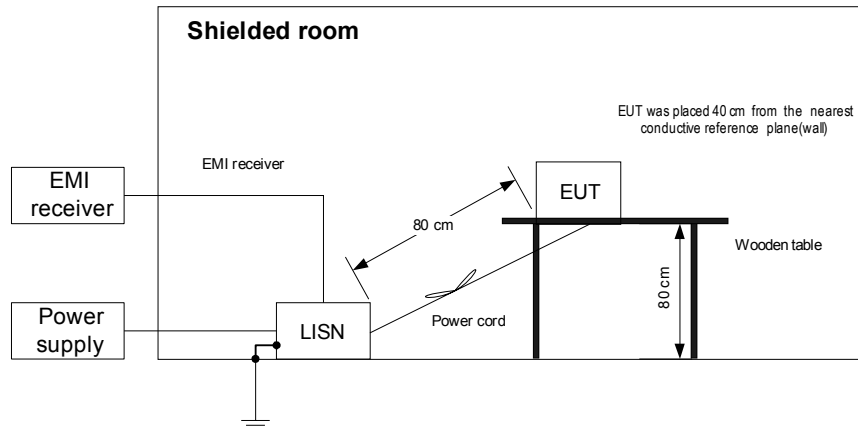



HERMON LABORATORIES

| | | | |
|-----------------------------|-------------------------------|--|-----------------------------|
| Test specification: | | Section 15.207(a), Conducted emission | |
| Test procedure: | | ANSI C63.4, Section 13.1.3 | |
| Test mode: | Compliance | Verdict: | PASS |
| Date & Time: | 8/23/2009 2:47:45 PM | | |
| Temperature: 25.8 °C | Air Pressure: 1007 hPa | Relative Humidity: 41 % | Power Supply: 12 VDC |
| Remarks: | | | |

Table 7.4.2 Conducted emission test results

LINE: AC mains
 EUT OPERATING MODE: Transmit
 EUT SET UP: TABLE-TOP
 TEST SITE: SHIELDED ROOM
 DETECTORS USED: PEAK / QUASI-PEAK / AVERAGE
 FREQUENCY RANGE: 150 kHz - 30 MHz
 RESOLUTION BANDWIDTH: 9 kHz

| Frequency, MHz | Peak emission, dB(µV) | Quasi-peak | | | Average | | | Line ID | Verdict |
|----------------|-----------------------|---------------------------|---------------|-------------|---------------------------|---------------|-------------|---------|---------|
| | | Measured emission, dB(µV) | Limit, dB(µV) | Margin, dB* | Measured emission, dB(µV) | Limit, dB(µV) | Margin, dB* | | |
| 2.406448 | 39.60 | 37.38 | 56.00 | -18.62 | 32.15 | 46.00 | -13.85 | L1 | Pass |
| 13.566461 | 54.60 | 43.89 | 60.00 | -16.11 | 26.20 | 50.00 | -23.80 | | |
| 21.334344 | 30.81 | 29.01 | 60.00 | -30.99 | 27.57 | 50.00 | -22.43 | | |
| 25.263789 | 27.88 | 24.10 | 60.00 | -35.90 | 17.97 | 50.00 | -32.03 | | |
| 2.406573 | 41.32 | 39.03 | 56.00 | -16.97 | 33.88 | 46.00 | -12.12 | L2 | Pass |
| 13.616664 | 42.85 | 32.30 | 60.00 | -27.70 | 3.97 | 50.00 | -46.03 | | |
| 25.672970 | 31.87 | 28.43 | 60.00 | -31.57 | 21.61 | 50.00 | -28.39 | | |
| 28.475865 | 36.21 | 32.99 | 60.00 | -27.01 | 26.29 | 50.00 | -23.71 | | |

*- Margin = Measured emission - specification limit.

Reference numbers of test equipment used

| | | | | | | | |
|---------|---------|---------|---------|---------|---------|--|--|
| HL 0495 | HL 0787 | HL 1430 | HL 1513 | HL 2888 | HL 3612 | | |
|---------|---------|---------|---------|---------|---------|--|--|

Full description is given in Appendix A.



HERMON LABORATORIES


| | | | |
|--|-------------------------------|--------------------------------|-----------------------------|
| Test specification: Section 15.207(a), Conducted emission | | | |
| Test procedure: ANSI C63.4, Section 13.1.3 | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date & Time: 8/23/2009 2:47:45 PM | | | |
| Temperature: 25.8 °C | Air Pressure: 1007 hPa | Relative Humidity: 41 % | Power Supply: 12 VDC |
| Remarks: | | | |

Plot 7.4.1 Conducted emission measurements

LINE: L1
EUT OPERATING MODE: Transmit
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 2.39 MHz
36.87 dBµV

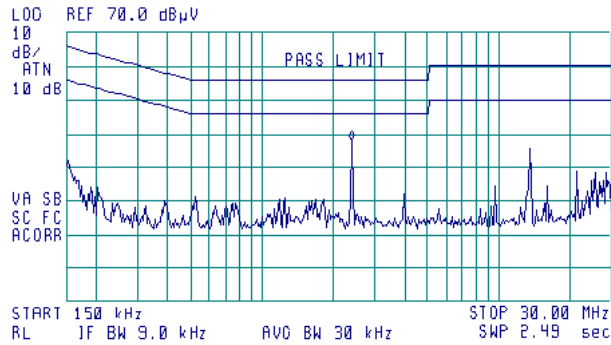


Plot 7.4.2 Conducted emission measurements

LINE: L2
EUT OPERATING MODE: Transmit
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 2.39 MHz
36.87 dBµV

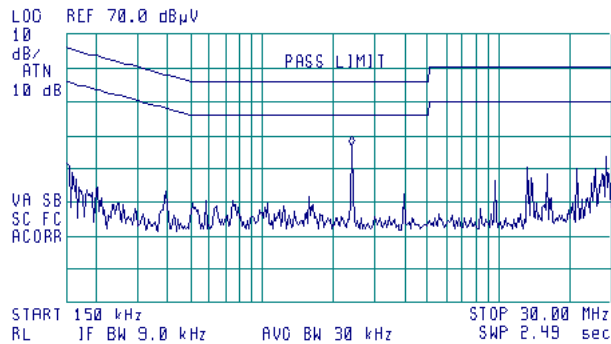



| | | | |
|--|-------------------------------|--------------------------------|------------------------------|
| Test specification: Section 15.215(c), Occupied bandwidth | | | |
| Test procedure: ANSI C63.4, Section 13.1.7 | | | |
| Test mode: Compliance | Verdict: PASS | | |
| Date & Time: 8/23/2009 12:02:58 PM | | | |
| Temperature: 25.2 °C | Air Pressure: 1008 hPa | Relative Humidity: 41 % | Power Supply: 120 VAC |
| Remarks: | | | |

7.5 Occupied bandwidth test

7.5.1 General

This test was performed to verify that the 20 dB bandwidth of the emissions was contained within the standard specified frequency band according to FCC §15.215 requirements. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Occupied bandwidth limits

| Assigned frequency, MHz | Modulation envelope reference points*, dBc |
|-------------------------|--|
| 13.110 – 13.410 | 20.0 |
| 13.410 – 13.553 | |
| 13.553 – 13.567 | |
| 13.567 – 13.710 | |
| 13.710 – 14.010 | |

*- Modulation envelope reference points provided in terms of attenuation below modulated carrier.

7.5.2 Test procedure

- 7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.
- 7.5.2.2 The spectrum analyzer sweep time and bandwidth were set to capture all major modulation sidebands of emission and sweep time was set sufficiently slow to ensure peak measurements. Spectrum analyzer was set in peak hold mode and time sufficient for trace stabilization was allowed.
- 7.5.2.3 The peak of emission was measured. The transmitter occupied bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.5.2 and associated plot.
- 7.5.2.4 Modulation bandwidth was calculated by adding of the negative frequency drift to the lower measured frequency and the positive frequency drift to the higher measured frequency. The obtained modulation bandwidth was verified to be within the allowed frequency range.

Figure 7.5.1 Occupied bandwidth test setup





| | | | |
|-----------------------------|-------------------------------|--|------------------------------|
| Test specification: | | Section 15.215(c), Occupied bandwidth | |
| Test procedure: | | ANSI C63.4, Section 13.1.7 | |
| Test mode: | Compliance | Verdict: | PASS |
| Date & Time: | 8/23/2009 12:02:58 PM | | |
| Temperature: 25.2 °C | Air Pressure: 1008 hPa | Relative Humidity: 41 % | Power Supply: 120 VAC |
| Remarks: | | | |

Table 7.5.2 Occupied bandwidth test results

ASSIGNED FREQUENCY BAND 13.11 – 14.01 MHz
 DETECTOR USED: Peak hold
 RESOLUTION BANDWIDTH: 3 kHz
 VIDEO BANDWIDTH: 10 kHz
 MODULATION ENVELOPE REFERENCE POINTS: 20 dBc
 MODULATION: ASK
 MODULATING SIGNAL: enable
 OCCUPIED BANDWIDTH 6.573 kHz

| Band edge | Cross point frequency, MHz | Frequency drift, kHz | | Modulation band edge, MHz | Assigned band edge, MHz | Verdict |
|-----------|----------------------------|----------------------|----------|---------------------------|-------------------------|---------|
| | | Negative | Positive | | | |
| Low | 13.556706 | 167 | NA | 13.556539 | 13.110 | Pass |
| High | 13.563226 | NA | 80 | 13.563306 | 13.410 | Pass |

Reference numbers of test equipment used

| | | | | | | | |
|---------|---------|---------|--|--|--|--|--|
| HL 0337 | HL 1524 | HL 3001 | | | | | |
|---------|---------|---------|--|--|--|--|--|


Full description is given in Appendix A.




HERMON LABORATORIES

| | | | |
|-----------------------------|--|--------------------------------|------------------------------|
| Test specification: | Section 15.215(c), Occupied bandwidth | | |
| Test procedure: | ANSI C63.4, Section 13.1.7 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date & Time: | 8/23/2009 12:02:58 PM | | |
| Temperature: 25.2 °C | Air Pressure: 1008 hPa | Relative Humidity: 41 % | Power Supply: 120 VAC |
| Remarks: | | | |

Plot 7.5.1 Occupied bandwidth test result

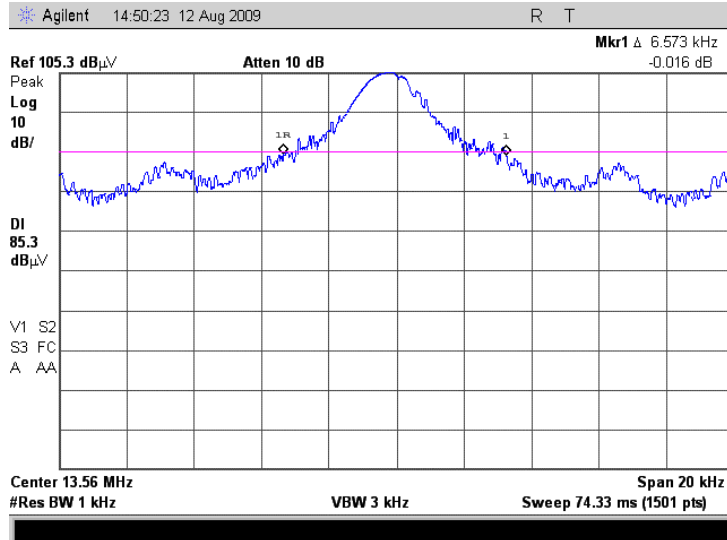

Plot 7.5.2 Occupied bandwidth test result in assigned frequency band

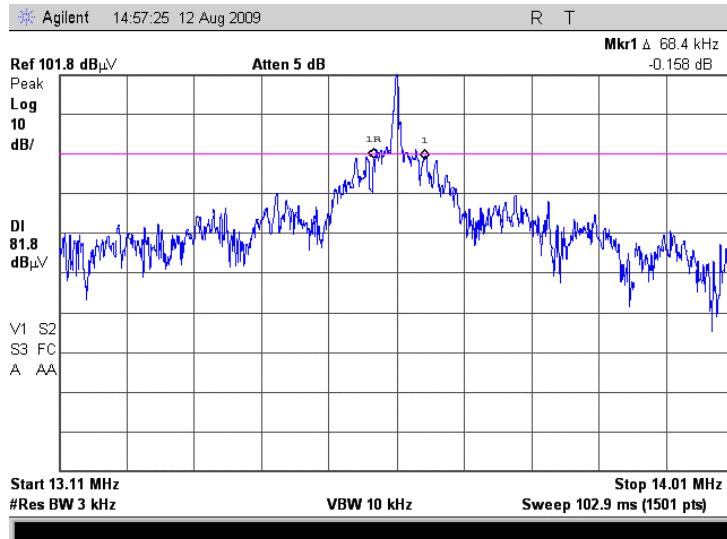





HERMON LABORATORIES

| | | | |
|-----------------------------|--|--------------------------------|------------------------------|
| Test specification: | Section 15.215(c), Occupied bandwidth | | |
| Test procedure: | ANSI C63.4, Section 13.1.7 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date & Time: | 8/23/2009 12:02:58 PM | | |
| Temperature: 25.2 °C | Air Pressure: 1008 hPa | Relative Humidity: 41 % | Power Supply: 120 VAC |
| Remarks: | | | |

Plot 7.5.3 Occupied bandwidth test result, low band edge

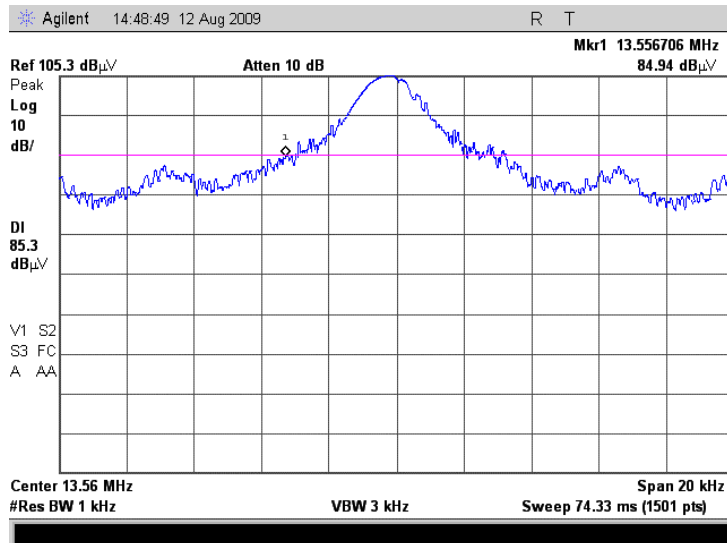

Plot 7.5.4 Occupied bandwidth test result, high band edge

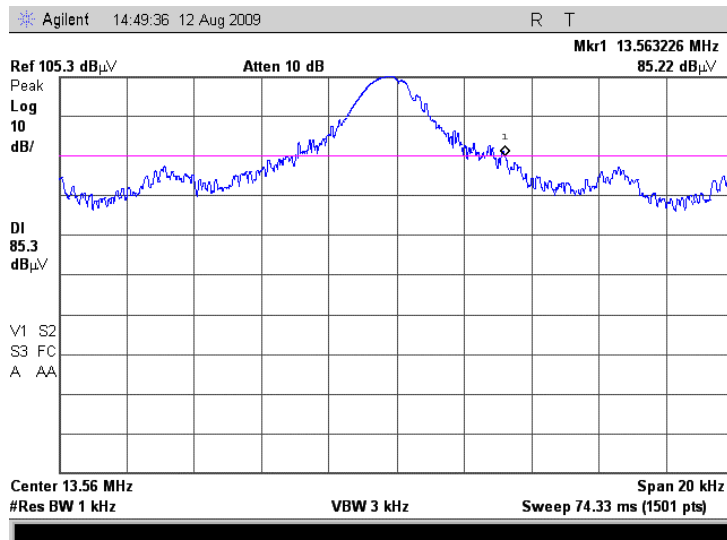



| | |
|--|-------------------------------|
| Test specification: FCC Section 15.203, Antenna requirement | |
| Test procedure: Visual inspection / supplier declaration | |
| Test mode: Compliance | Verdict: |
| Date & Time: 2/23/2010 2:08:52 PM | |
| Temperature: 21 °C | Air Pressure: 1010 hPa |
| Relative Humidity: 42 % | |
| Power Supply: 12 VDC | |
| Remarks: | |

7.6 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters. The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.6.1.

Table 7.6.1 Antenna requirements

| Requirement | Rationale | Verdict |
|--|-------------------|---------|
| The transmitter antenna is permanently attached | Visual inspection | Comply |
| The transmitter employs a unique antenna connector | NA | |
| The transmitter requires professional installation | NA | |

**8 APPENDIX A Test equipment and ancillaries used for tests**

| HL No | Description | Manufacturer | Model | Ser. No. | Last Cal. | Due Cal. |
|-------|---|--|-----------------------------|-----------------------------------|-----------|-----------|
| 0034 | Antenna, Log Periodic, 200 - 1000 MHz | Electro-Metrics | LPA 25/30 | 1988 | 23-Dec-09 | 23-Dec-10 |
| 0337 | Probe Set, Hand held, 5 probes | Electro-Metrics | EHFP-30 | 238 | 08-Jun-09 | 08-Jun-10 |
| 0415 | Cable, Coax, RF, RG-214 | Hermon Laboratories | CC-3 | 056 | 01-Dec-09 | 01-Dec-10 |
| 0446 | Antenna, Loop, Active, 10 kHz - 30 MHz | EMCO | 6502 | 2857 | 29-Jun-09 | 29-Jun-10 |
| 0493 | Temperature Chamber -45...175 deg C | Thermotron | S-1.2 Mini-Max | 14016 | 20-May-09 | 20-May-10 |
| 0495 | Autotransformer 0-255V, 10A | Variac | EMPL01 | 495 | 21-May-09 | 21-May-10 |
| 0521 | EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz | Hewlett Packard | 8546A | 3617A 00319, 3448A002 53 | 27-Aug-09 | 27-Aug-10 |
| 0566 | Antenna, Biconical, 20 - 200 MHz | Electro-Metrics | BIA 25/30 | 3566 | 09-Feb-10 | 09-Feb-11 |
| 0787 | Transient Limiter 9 kHz-200 MHz | Hewlett Packard | 11947A | 3107A018 77 | 18-Oct-09 | 18-Oct-10 |
| 0812 | Cable Coax, RG-214, 11.5 m, N-type connectors | Hermon Laboratories | C214-11 | 148 | 02-Dec-09 | 02-Dec-10 |
| 1424 | Spectrum Analyzer, 30 Hz- 40 GHz | Agilent Technologies | 8564EC | 3946A002 19 | 28-Aug-09 | 28-Aug-10 |
| 1425 | EMI Receiver, 9 kHz - 2.9 GHz, System: HL1426, HL1427 | Agilent Technologies | 8542E | 3710A002 22, 3705A002 04 | 28-Aug-09 | 28-Aug-10 |
| 1430 | EMI Receiver, 9 kHz - 2.9 GHz, System: HL1431, HL1432 | Agilent Technologies | 8542E | 3807A002 62,3705A0 0217 | 31-Aug-09 | 31-Aug-10 |
| 1513 | Cable RF, 8 m, BNC/BNC | Belden | M17/167 MIL-C-17 | 1513 | 01-Sep-09 | 01-Sep-10 |
| 1524 | Cable RF, 2 m | Telequis | Mil-C-17F- RG 058 C/U | 1524 | 01-Sep-09 | 01-Sep-10 |
| 1553 | Cable RF, 3.5 m, N/N-type | Alpha Wire | RG-214 | 1553 | 30-Dec-99 | 30-Dec-00 |
| 2634 | Power Supply, 0-36.0 VDC, 0-12.0 A | NEMIC-LAMBDA | UP36-12 | 2634 | 04-Aug-09 | 04-Aug-10 |
| 2697 | Antenna, 30 MHz - 3.0 GHz | Sunol Sciences. Corp. Pleasanton, California USA | JB3 | A022805 | 11-Jan-10 | 11-Jan-11 |
| 2883 | Cable, 18 GHz N-type, M-F, 3 m | Bird | TC-MNFN-3.0 | 211539 003 | 01-Dec-09 | 01-Dec-10 |
| 2888 | LISN Two-line V-Network 50 Ohm / 50 uH + 5 Ohm, 16A, MIL STD 461E, CISPR 16-1 | Rolf Heine | NNB-2/16Z | 02/10018 | 06-Jul-09 | 06-Jul-10 |
| 3001 | EMC Analyzer, 9 kHz to 3 GHz | Agilent Technologies | E7402A | US394401 80 | 31-Dec-09 | 31-Dec-10 |
| 3612 | Cable RF, 17.5 m, N type-N type | Teldor | RG-214/U | NA | 02-Dec-09 | 02-Dec-10 |

9 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

| Test description | Expanded uncertainty |
|--|--|
| Conducted emissions with LISN | 9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB |
| Radiated emissions at 3 m measuring distance Horizontal polarization Vertical polarization | Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB |
| Conducted emissions at RF antenna connector | 9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB |
| Occupied bandwidth | ± 8.0 % |

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

10 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS, IC 2186A-2 for anechoic chamber, IC 2186A-3 for full-anechoic chamber for RE measurements above 1 GHz), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-27 for full-anechoic chamber for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01).

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.


11 APPENDIX D Specification references

| | |
|---------------------|--|
| 47CFR part 15: 2009 | Radio Frequency Devices. |
| ANSI C63.2: 1996 | American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications. |
| ANSI C63.4: 2003 | American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz. |

12 APPENDIX E Test equipment correction factors

Correction factor
Line impedance stabilization network
Model NNB-2/16Z, Rolf Heine, HL 2888

| Frequency, kHz | Insertion loss, dB | | Measurement Uncertainty, dB |
|----------------|--------------------|------|-----------------------------|
| | L1 | N | |
| 10 | 0.48 | 0.79 | ±0.6 |
| 20 | 0.52 | 0.63 | |
| 30 | 0.31 | 0.35 | |
| 40 | 0.20 | 0.22 | |
| 50 | 0.16 | 0.17 | |
| 100 | 0.10 | 0.08 | |
| 300 | 0.08 | 0.06 | |
| 500 | 0.10 | 0.06 | |
| 600 | 0.09 | 0.07 | |
| 800 | 0.10 | 0.07 | |
| 1000 | 0.10 | 0.08 | |
| 2000 | 0.12 | 0.11 | |
| 3000 | 0.16 | 0.14 | |
| 4000 | 0.17 | 0.18 | |
| 6000 | 0.26 | 0.23 | |
| 10000 | 0.49 | 0.41 | |
| 14000 | 0.66 | 0.54 | |
| 16000 | 0.79 | 0.69 | |
| 18000 | 0.86 | 0.76 | |
| 20000 | 0.96 | 0.85 | |
| 25000 | 1.22 | 1.08 | |
| 28000 | 1.35 | 1.21 | |
| 30000 | 1.43 | 1.29 | |

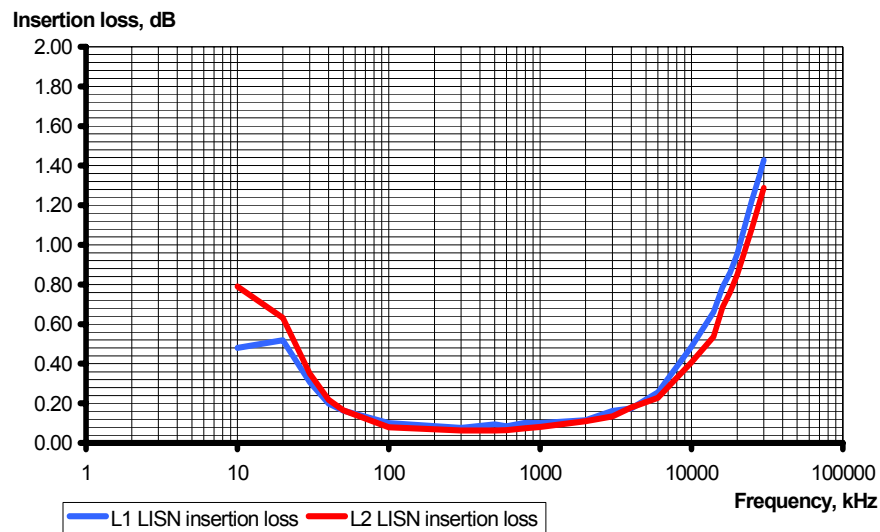

Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446

| Frequency, MHz | Magnetic antenna factor, dB | Electric antenna factor, dB |
|----------------|-----------------------------|-----------------------------|
| 0.009 | -32.8 | 18.7 |
| 0.010 | -33.8 | 17.7 |
| 0.020 | -38.3 | 13.2 |
| 0.050 | -41.1 | 10.4 |
| 0.075 | -41.3 | 10.2 |
| 0.100 | -41.6 | 9.9 |
| 0.150 | -41.7 | 9.8 |
| 0.250 | -41.6 | 9.9 |
| 0.500 | -41.8 | 9.8 |
| 0.750 | -41.9 | 9.7 |
| 1.000 | -41.4 | 10.1 |
| 2.000 | -41.5 | 10.0 |
| 3.000 | -41.4 | 10.2 |
| 4.000 | -41.4 | 10.1 |
| 5.000 | -41.5 | 10.1 |
| 10.000 | -41.9 | 9.6 |
| 15.000 | -41.9 | 9.6 |
| 20.000 | -42.2 | 9.3 |
| 25.000 | -42.8 | 8.7 |
| 30.000 | -44.0 | 7.5 |

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

**Antenna factor
Biconical antenna
Electro-Metrics, model BIA-25/30
Ser.No.3566, HL 0566**

| Frequency MHz | Antenna Factor dB(1/m) | Frequency MHz | Antenna Factor dB(1/m) |
|---------------|------------------------|---------------|------------------------|
| 30 | 14.7 | 120 | 16.8 |
| 35 | 12.9 | 125 | 15.5 |
| 40 | 12.6 | 130 | 15.5 |
| 45 | 12.8 | 135 | 15.1 |
| 50 | 12.6 | 140 | 14.8 |
| 55 | 11.8 | 145 | 15.1 |
| 60 | 11.7 | 150 | 16.9 |
| 65 | 10.4 | 155 | 17.2 |
| 70 | 9.2 | 160 | 17.3 |
| 75 | 9.1 | 165 | 17.8 |
| 80 | 9.1 | 170 | 18.3 |
| 85 | 9.5 | 175 | 19.0 |
| 90 | 11.2 | 180 | 19.5 |
| 95 | 12.6 | 185 | 20.0 |
| 100 | 13.7 | 190 | 20.4 |
| 105 | 14.2 | 195 | 20.5 |
| 110 | 15.3 | 200 | 20.6 |
| 115 | 17.1 | | |

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

**Antenna factor
Log periodic antenna
Electro-Metrics, model LPA-25/30
Ser.No.1988, HL 0034**

| Frequency MHz | Antenna Factor dB(1/m) | Frequency MHz | Antenna Factor dB(1/m) |
|---------------|------------------------|---------------|------------------------|
| 200 | 12.6 | 625 | 20.4 |
| 225 | 12.2 | 650 | 20.9 |
| 250 | 13.4 | 675 | 22.0 |
| 275 | 14.3 | 700 | 22.2 |
| 300 | 15.2 | 725 | 22.7 |
| 325 | 15.7 | 750 | 22.5 |
| 350 | 15.9 | 775 | 22.7 |
| 375 | 16.4 | 800 | 22.8 |
| 400 | 17.0 | 825 | 23.2 |
| 425 | 17.4 | 850 | 23.5 |
| 450 | 17.9 | 875 | 23.9 |
| 475 | 18.6 | 900 | 24.0 |
| 500 | 19.1 | 925 | 24.0 |
| 525 | 19.3 | 950 | 24.2 |
| 550 | 19.6 | 975 | 24.7 |
| 575 | 19.8 | 1000 | 25.1 |
| 600 | 20.0 | | |

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



Antenna calibration
Sunol Sciences Inc., model JB3, serial number A022805, HL 2697

| Frequency, MHz | ACF, dB | Gain, dBi | Num gain | Frequency, MHz | ACF, dB | Gain, dBi | Num gain | Frequency, MHz | ACF, dB | Gain, dBi | Num gain | Frequency, MHz | ACF, dB | Gain, dBi | Num gain | Frequency, MHz | ACF, dB | Gain, dBi | Num gain |
|----------------|---------|-----------|----------|----------------|---------|-----------|----------|----------------|---------|-----------|----------|----------------|---------|-----------|----------|----------------|---------|-----------|----------|
| 30 | 22.2 | -22.5 | 0.01 | 620 | 19.7 | 6.3 | 4.27 | 1215 | 24.9 | 7.0 | 5.05 | 1810 | 28.3 | 7.1 | 5.08 | 2405 | 30.9 | 6.9 | 4.93 |
| 35 | 18.5 | -17.4 | 0.02 | 625 | 19.7 | 6.5 | 4.42 | 1220 | 24.9 | 7.0 | 4.99 | 1815 | 28.5 | 6.9 | 4.91 | 2410 | 30.9 | 6.9 | 4.89 |
| 40 | 14.7 | -12.5 | 0.06 | 630 | 19.6 | 6.6 | 4.57 | 1225 | 25.1 | 6.9 | 4.91 | 1820 | 28.6 | 6.8 | 4.74 | 2415 | 31.0 | 6.9 | 4.85 |
| 45 | 11.3 | -8.1 | 0.16 | 635 | 19.7 | 6.5 | 4.48 | 1230 | 25.2 | 6.8 | 4.82 | 1825 | 28.7 | 6.8 | 4.76 | 2420 | 31.0 | 6.8 | 4.82 |
| 45 | 11.3 | -8.1 | 0.16 | 640 | 19.9 | 6.4 | 4.40 | 1235 | 25.1 | 7.0 | 4.96 | 1830 | 28.7 | 6.8 | 4.76 | 2425 | 31.1 | 6.8 | 4.81 |
| 50 | 8.9 | -4.7 | 0.34 | 645 | 19.9 | 6.5 | 4.45 | 1240 | 25.0 | 7.1 | 5.09 | 1835 | 28.7 | 6.7 | 4.72 | 2430 | 31.0 | 6.9 | 4.87 |
| 55 | 7.9 | -2.8 | 0.52 | 650 | 19.9 | 6.5 | 4.51 | 1245 | 25.0 | 7.1 | 5.12 | 1840 | 28.8 | 6.7 | 4.69 | 2435 | 31.0 | 6.9 | 4.88 |
| 60 | 7.8 | -2.1 | 0.62 | 655 | 19.9 | 6.6 | 4.60 | 1250 | 25.0 | 7.1 | 5.15 | 1845 | 28.6 | 6.9 | 4.90 | 2440 | 31.2 | 6.8 | 4.74 |
| 65 | 8.5 | 2.0 | 0.83 | 660 | 19.9 | 6.7 | 4.69 | 1255 | 25.0 | 7.2 | 5.25 | 1850 | 28.4 | 7.1 | 5.12 | 2445 | 31.1 | 6.9 | 4.91 |
| 70 | 9.0 | -1.9 | 0.64 | 665 | 19.9 | 6.7 | 4.70 | 1260 | 24.9 | 7.3 | 5.36 | 1855 | 28.5 | 7.0 | 5.07 | 2450 | 31.0 | 7.0 | 4.96 |
| 75 | 8.8 | -1.1 | 0.78 | 670 | 20.0 | 6.7 | 4.71 | 1265 | 25.0 | 7.3 | 5.31 | 1860 | 28.6 | 7.0 | 5.01 | 2455 | 31.0 | 7.0 | 5.01 |
| 80 | 8.4 | -0.2 | 0.97 | 675 | 20.1 | 6.7 | 4.71 | 1270 | 25.1 | 7.2 | 5.26 | 1865 | 28.5 | 7.1 | 5.17 | 2460 | 30.9 | 7.2 | 5.19 |
| 85 | 8.0 | 0.8 | 1.20 | 680 | 20.1 | 6.7 | 4.71 | 1275 | 25.3 | 7.0 | 5.05 | 1870 | 28.4 | 7.3 | 5.33 | 2465 | 31.1 | 6.9 | 4.95 |
| 90 | 8.2 | 1.1 | 1.29 | 685 | 20.1 | 6.8 | 4.79 | 1280 | 25.5 | 6.8 | 4.94 | 1875 | 28.4 | 7.2 | 5.28 | 2470 | 31.3 | 6.8 | 4.76 |
| 95 | 9.2 | 0.5 | 1.13 | 690 | 20.1 | 6.9 | 4.88 | 1285 | 25.4 | 7.0 | 4.97 | 1880 | 28.5 | 7.2 | 5.22 | 2475 | 31.4 | 6.7 | 4.69 |
| 100 | 10.6 | -0.4 | 0.92 | 695 | 20.2 | 6.8 | 4.82 | 1290 | 25.3 | 7.1 | 5.10 | 1885 | 28.5 | 7.2 | 5.22 | 2480 | 31.3 | 6.8 | 4.79 |
| 110 | 12.6 | -1.6 | 0.70 | 705 | 20.4 | 6.8 | 4.75 | 1300 | 25.2 | 7.3 | 5.33 | 1895 | 28.6 | 7.2 | 5.24 | 2490 | 31.1 | 7.0 | 4.99 |
| 120 | 13.9 | -2.1 | 0.62 | 715 | 20.5 | 6.8 | 4.80 | 1310 | 25.5 | 7.1 | 5.09 | 1905 | 28.5 | 7.3 | 5.36 | 2500 | 30.9 | 7.2 | 5.27 |
| 125 | 14.2 | -2.0 | 0.63 | 720 | 20.5 | 6.9 | 4.85 | 1315 | 25.6 | 7.2 | 5.23 | 1910 | 28.5 | 7.4 | 5.45 | 2505 | 31.1 | 7.1 | 5.15 |
| 130 | 14.2 | -1.7 | 0.68 | 725 | 20.6 | 6.8 | 4.81 | 1320 | 25.3 | 7.3 | 5.36 | 1915 | 28.5 | 7.3 | 5.38 | 2510 | 31.0 | 7.2 | 5.22 |
| 140 | 13.4 | -0.3 | 0.94 | 735 | 20.9 | 6.7 | 4.65 | 1330 | 25.6 | 7.0 | 5.06 | 1925 | 28.6 | 7.3 | 5.35 | 2520 | 31.2 | 7.0 | 5.05 |
| 150 | 12.9 | 0.8 | 1.21 | 745 | 21.0 | 6.6 | 4.59 | 1340 | 25.7 | 7.1 | 5.09 | 1935 | 28.5 | 7.4 | 5.54 | 2530 | 31.0 | 7.3 | 5.37 |
| 160 | 12.7 | 1.6 | 1.44 | 755 | 21.0 | 6.8 | 4.74 | 1350 | 25.7 | 7.1 | 5.09 | 1945 | 28.5 | 7.5 | 5.59 | 2540 | 31.2 | 7.1 | 5.08 |
| 165 | 12.0 | 2.0 | 1.59 | 760 | 21.0 | 6.8 | 4.73 | 1355 | 25.8 | 7.2 | 5.05 | 1950 | 28.5 | 7.5 | 5.48 | 2545 | 31.0 | 7.3 | 4.43 |
| 170 | 12.2 | 2.6 | 1.83 | 765 | 21.1 | 6.8 | 4.73 | 1360 | 25.9 | 6.9 | 4.95 | 1955 | 28.6 | 7.5 | 5.57 | 2550 | 31.0 | 7.3 | 5.39 |
| 175 | 11.8 | 3.3 | 2.13 | 770 | 21.3 | 6.7 | 4.64 | 1365 | 26.0 | 6.9 | 4.95 | 1960 | 28.6 | 7.5 | 5.65 | 2555 | 31.1 | 7.2 | 5.30 |
| 180 | 11.6 | 3.7 | 2.36 | 775 | 21.3 | 6.7 | 4.68 | 1370 | 26.0 | 7.0 | 4.96 | 1965 | 28.7 | 7.4 | 5.47 | 2560 | 31.0 | 7.4 | 5.47 |
| 185 | 11.5 | 4.0 | 2.54 | 780 | 21.3 | 6.7 | 4.72 | 1375 | 26.0 | 7.0 | 5.01 | 1970 | 28.9 | 7.2 | 5.29 | 2565 | 30.8 | 7.6 | 5.70 |
| 190 | 11.2 | 4.2 | 2.81 | 785 | 21.2 | 6.8 | 4.77 | 1380 | 26.1 | 7.0 | 5.03 | 1975 | 28.9 | 7.2 | 5.22 | 2570 | 31.0 | 7.3 | 5.32 |
| 200 | 13.1 | 3.2 | 2.07 | 795 | 21.4 | 6.8 | 4.79 | 1390 | 26.1 | 6.9 | 4.92 | 1985 | 29.1 | 7.1 | 5.11 | 2580 | 31.6 | 6.9 | 4.87 |
| 205 | 12.0 | 4.4 | 2.76 | 800 | 21.5 | 6.8 | 4.77 | 1395 | 26.2 | 6.9 | 4.94 | 1990 | 29.1 | 7.0 | 5.06 | 2585 | 31.6 | 6.8 | 4.79 |
| 210 | 11.0 | 5.6 | 3.66 | 805 | 21.6 | 6.7 | 4.71 | 1400 | 26.2 | 7.0 | 4.96 | 1995 | 29.1 | 7.1 | 5.09 | 2590 | 31.6 | 6.9 | 4.88 |
| 215 | 11.3 | 5.6 | 3.69 | 810 | 21.7 | 6.7 | 4.65 | 1405 | 26.1 | 7.0 | 4.92 | 2000 | 29.1 | 7.1 | 5.11 | 2595 | 31.5 | 7.0 | 4.97 |
| 220 | 11.6 | 5.5 | 3.52 | 815 | 21.7 | 6.7 | 4.72 | 1410 | 26.1 | 7.1 | 5.09 | 2005 | 29.5 | 7.1 | 5.16 | 2600 | 31.6 | 6.9 | 4.86 |
| 225 | 11.7 | 5.5 | 3.55 | 820 | 21.7 | 6.8 | 4.80 | 1415 | 26.2 | 7.0 | 5.02 | 2010 | 29.1 | 7.1 | 5.15 | 2605 | 31.3 | 7.2 | 5.30 |
| 230 | 11.9 | 5.5 | 3.57 | 825 | 21.7 | 6.8 | 4.82 | 1420 | 26.3 | 7.0 | 4.96 | 2015 | 29.2 | 7.1 | 5.13 | 2610 | 31.4 | 7.1 | 5.15 |
| 235 | 12.1 | 5.5 | 3.56 | 830 | 21.7 | 6.9 | 4.85 | 1425 | 26.2 | 7.1 | 5.10 | 2020 | 29.2 | 7.1 | 5.18 | 2615 | 31.7 | 6.9 | 4.88 |
| 240 | 12.3 | 5.5 | 3.54 | 835 | 21.8 | 6.8 | 4.82 | 1430 | 26.1 | 7.2 | 5.25 | 2025 | 29.3 | 7.1 | 5.08 | 2620 | 31.8 | 7.0 | 4.97 |
| 245 | 12.3 | 5.7 | 3.71 | 840 | 21.9 | 6.8 | 4.80 | 1435 | 26.2 | 7.2 | 5.24 | 2030 | 29.3 | 7.0 | 5.05 | 2625 | 31.4 | 7.1 | 5.17 |
| 250 | 12.3 | 5.9 | 3.88 | 845 | 21.9 | 6.8 | 4.83 | 1440 | 26.1 | 7.2 | 5.24 | 2035 | 29.3 | 7.1 | 5.07 | 2630 | 31.6 | 7.0 | 5.00 |
| 255 | 12.5 | 5.9 | 3.85 | 850 | 21.9 | 6.8 | 4.86 | 1445 | 26.1 | 7.1 | 5.11 | 2040 | 29.3 | 7.1 | 5.13 | 2635 | 31.6 | 6.8 | 4.82 |
| 260 | 12.7 | 5.8 | 3.83 | 855 | 22.0 | 6.8 | 4.80 | 1450 | 26.5 | 7.0 | 4.98 | 2045 | 29.2 | 7.2 | 5.23 | 2640 | 31.7 | 7.0 | 4.98 |
| 265 | 13.2 | 5.5 | 3.54 | 860 | 22.1 | 6.8 | 4.74 | 1455 | 26.4 | 7.1 | 5.07 | 2050 | 29.2 | 7.2 | 5.27 | 2645 | 31.7 | 6.9 | 4.93 |
| 270 | 13.7 | 5.2 | 3.27 | 865 | 22.0 | 6.9 | 4.92 | 1460 | 26.4 | 7.1 | 5.17 | 2055 | 29.3 | 7.2 | 5.21 | 2650 | 31.8 | 6.9 | 4.85 |
| 275 | 13.7 | 5.3 | 3.39 | 870 | 21.9 | 7.1 | 5.11 | 1465 | 26.4 | 7.2 | 5.19 | 2060 | 29.5 | 7.0 | 5.02 | 2655 | 31.8 | 6.9 | 4.85 |
| 280 | 13.7 | 5.4 | 3.50 | 875 | 22.0 | 7.1 | 5.08 | 1470 | 26.4 | 7.2 | 5.22 | 2065 | 29.4 | 7.1 | 5.08 | 2660 | 31.7 | 7.0 | 5.02 |
| 285 | 13.6 | 5.6 | 3.61 | 880 | 22.0 | 7.0 | 5.05 | 1475 | 26.4 | 7.1 | 5.17 | 2070 | 29.4 | 7.1 | 5.10 | 2665 | 31.6 | 6.7 | 4.71 |
| 290 | 13.7 | 5.7 | 3.72 | 885 | 22.1 | 7.0 | 5.06 | 1480 | 26.5 | 7.1 | 5.12 | 2075 | 29.5 | 7.0 | 5.01 | 2670 | 32.0 | 6.7 | 4.67 |
| 295 | 13.8 | 5.8 | 3.77 | 890 | 22.1 | 7.0 | 5.06 | 1485 | 26.5 | 7.1 | 5.14 | 2080 | 29.8 | 6.8 | 4.76 | 2675 | 31.9 | 6.8 | 4.81 |
| 300 | 13.9 | 5.8 | 3.81 | 895 | 22.2 | 7.1 | 5.09 | 1490 | 26.5 | 7.1 | 5.17 | 2085 | 29.7 | 6.9 | 4.89 | 2680 | 31.7 | 7.0 | 5.04 |
| 305 | 14.0 | 5.9 | 3.85 | 900 | 22.2 | 7.1 | 5.12 | 1495 | 26.5 | 7.2 | 5.24 | 2090 | 29.7 | 6.9 | 4.86 | 2685 | 31.9 | 6.8 | 4.83 |
| 310 | 14.1 | 5.9 | 3.88 | 905 | 22.3 | 7.1 | 5.09 | 1500 | 26.5 | 7.2 | 5.31 | 2095 | 29.8 | 6.8 | 4.78 | 2690 | 32.1 | 6.7 | 4.72 |
| 315 | 14.3 | 5.9 | 3.89 | 910 | 22.3 | 7.0 | 5.05 | 1505 | 26.5 | 7.2 | 5.27 | 2100 | 29.9 | 6.8 | 4.75 | 2695 | 32.1 | 6.7 | 4.71 |
| 320 | 14.4 | 5.9 | 3.90 | 915 | 22.4 | 7.0 | 4.99 | 1510 | 26.6 | 7.2 | 5.23 | 2105 | 29.8 | 6.8 | 4.81 | 2700 | 32.0 | 6.8 | 4.81 |
| 325 | 14.5 | 5.9 | 3.92 | 920 | 22.6 | 6.9 | 4.92 | 1515 | 26.6 | 7.2 | 5.20 | 2110 | 29.9 | 6.8 | 4.76 | 2705 | 32.0 | 6.8 | 4.80 |
| 330 | 14.6 | 5.9 | 3.93 | 925 | 22.7 | 6.9 | 4.85 | 1520 | 26.5 | 7.3 | 5.38 | 2115 | 29.9 | 6.8 | 4.76 | 2710 | 32.1 | 6.8 | 4.79 |
| 335 | 14.7 | 6.0 | 4.02 | 930 | 22.8 | 6.8 | 4.77 | 1525 | 26.6 | 7.3 | 5.37 | 2120 | 29.9 | 6.8 | 4.84 | 2715 | 32.1 | 6.7 | 4.71 |
| 340 | 14.7 | 6.2 | 4.12 | 935 | 22.8 | 6.8 | 4.83 | 1530 | 26.6 | 7.3 | 5.38 | 2125 | 29.9 | 6.9 | 4.89 | 2720 | 32.4 | 6.5 | 4.47 |
| 345 | 14.8 | 6.1 | 4.06 | 940 | 22.9 | 6.8 | 4.89 | 1535 | 26.6 | 7.4 | 5.44 | 2130 | 29.9 | 6.8 | 4.90 | 2725 | 32.2 | 6.7 | 4.83 |
| 350 | 15.0 | 6.0 | 3.99 | 945 | 22.8 | 6.9 | 4.87 | 1540 | 26.5 | 7.4 | 5.53 | 2135 | 29.8 | 6.9 | 4.94 | 2730 | 31.9 | 7.0 | 5.05 |
| 355 | 15.3 | 5.9 | 3.88 | 950 | 22.9 | 6.9 | 4.85 | 1545 | 26.5 | 7.5 | 5.58 | 2140 | 29.8 | 7.1 | 5.08 | 2735 | 31.6 | 7.4 | 5.44 |
| 360 | 15.6 | 5.8 | 3.78 | 955 | 23.0 | 6.8 | 4.81 | 1550 | 26.5 | 7.5 | 5.63 | 2145 | 29.9 | 6.9 | 4.92 | 2740 | 31.6 | 7.1 | 5.46 |
| 365 | 15.5 | 5.9 | 3.89 | 960 | 23.1 | 6.8 | 4.77 | 1555 | 26.7 | 7.3 | 5.39 | 2150 | 29.9 | 7.0 | 4.98 | 2745 | 31.9 | 7.0 | 5.06 |
| 370 | 15.5 | 6.0 | 4.01 | 965 | 23.1 | 6.7 | 4.73 | 1560 | 26.9 | 7.1 | 5.16 | 2155 | 29.8 | 7.1 | 5.05 | 2750 | 32.0 | 6.9 | 4.94 |
| 375 | 15.6 | 6.1 | 4.03 | 970 | 23.2 | 6.7 | 4.69 | 1565 | 26.9 | 7.2 | 5.23 | 2160 | 29.8 | 7.1 | 5.09 | 2755 | 32.0 | 7.0 | 4.98 |
| 380 | 15.7 | 6.1 | 4.05 | 975 | 23.2 | 6.8 | 4.82 | 1570 | 26.9 | 7.2 | 5.30 | 2165 | 29.9 | 7.0 | 5.00 | 2760 | 32.0 | 7.0 | 5.06 |
| 385 | 15.7 | 6.2 | 4.15 | 980 | 23.5 | 6.6 | 4.54 | 1575 | 27.0 | 7.2 | 5.23 | 2170 | 29.9 | 7.1 | 5.07 | 2765 | 32.2 | 6.8 | 4.80 |
| 390 | 15.7 | 6.3 | 4.25 | 985 | 23.5 | 6.6 | 4 | | | | | | | | | | | | |



Cable loss
Cable Coaxial, RG-58/RG-214, s/n 056, HL 0415
+ Cable Coaxial, RG-214, 11.5m, s/n 148, HL 0812

| No. | Frequency, MHz | Cable loss, dB | Measured uncertainty, dB |
|-----|----------------|----------------|--------------------------|
| 1 | 20 | 0.73 | ±0.12 |
| 2 | 30 | 0.91 | |
| 3 | 50 | 1.2 | |
| 4 | 80 | 1.56 | |
| 5 | 100 | 1.76 | |
| 6 | 200 | 2.59 | |
| 7 | 300 | 3.26 | |
| 8 | 400 | 3.93 | |
| 9 | 500 | 4.42 | |
| 10 | 600 | 4.92 | |
| 11 | 700 | 5.36 | |
| 12 | 800 | 5.88 | |
| 13 | 900 | 6.41 | |
| 14 | 1000 | 6.71 | |
| 15 | 1500 | 8.63 | |
| 16 | 2000 | 10.39 | |

Cable loss
RF cable 3.5 m, Alpha Wire, model RG-214, S/N 149, HL 1553

| No. | Frequency, MHz | Cable loss, dB | Measurement uncertainty, dB |
|-----|----------------|----------------|-----------------------------|
| 1 | 1 | 0.01 | ±0.05 |
| 2 | 10 | 0.07 | |
| 3 | 30 | 0.12 | |
| 4 | 50 | 0.22 | |
| 5 | 100 | 0.26 | |
| 6 | 200 | 0.40 | |
| 7 | 300 | 0.52 | |
| 8 | 400 | 0.60 | |
| 9 | 500 | 0.70 | |
| 10 | 600 | 0.77 | |
| 11 | 700 | 0.84 | |
| 12 | 800 | 1.00 | |
| 13 | 900 | 1.00 | |
| 14 | 1000 | 1.05 | |
| 15 | 2000 | 1.70 | |

Cable loss
Cable coaxial, Bird, 18 GHz, N-type, M-F, model TC-MNFN-3.0, S/N 211539 003
HL 2883

| Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB |
|----------------|----------------|----------------|----------------|----------------|----------------|
| 10 | 0.06 | 5750 | 1.70 | 12000 | 2.46 |
| 30 | 0.12 | 6000 | 1.75 | 12250 | 2.48 |
| 100 | 0.21 | 6250 | 1.80 | 12500 | 2.52 |
| 250 | 0.34 | 6500 | 1.81 | 12750 | 2.50 |
| 500 | 0.47 | 6750 | 1.86 | 13000 | 2.54 |
| 750 | 0.59 | 7000 | 1.86 | 13250 | 2.48 |
| 1000 | 0.67 | 7250 | 1.92 | 13500 | 2.63 |
| 1250 | 0.76 | 7500 | 1.96 | 13750 | 2.65 |
| 1500 | 0.84 | 7750 | 1.98 | 14000 | 2.72 |
| 1750 | 0.92 | 8000 | 2.02 | 14250 | 2.67 |
| 2000 | 0.98 | 8250 | 2.03 | 14500 | 2.70 |
| 2250 | 1.05 | 8500 | 2.05 | 14750 | 2.72 |
| 2500 | 1.12 | 8750 | 2.11 | 15000 | 2.79 |
| 2750 | 1.17 | 9000 | 2.17 | 15250 | 2.80 |
| 3000 | 1.22 | 9250 | 2.17 | 15500 | 2.83 |
| 3250 | 1.27 | 9500 | 2.20 | 15750 | 2.75 |
| 3500 | 1.33 | 9750 | 2.19 | 16000 | 2.82 |
| 3750 | 1.38 | 10000 | 2.22 | 16250 | 2.85 |
| 4000 | 1.42 | 10250 | 2.25 | 16500 | 2.90 |
| 4250 | 1.46 | 10500 | 2.30 | 16750 | 2.89 |
| 4500 | 1.51 | 10750 | 2.28 | 17000 | 2.88 |
| 4750 | 1.54 | 11000 | 2.32 | 17250 | 2.85 |
| 5000 | 1.59 | 11250 | 2.34 | 17500 | 2.96 |
| 5250 | 1.62 | 11500 | 2.39 | 17750 | 3.04 |
| 5500 | 1.65 | 11750 | 2.42 | 18000 | 3.04 |

Cable loss
Cable coaxial, RG-214/U, N type-N type, 6.5 m
Suhner Switzerland, HL 3616

| Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB |
|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| 10 | 0.13 | 1750 | 2.66 | 3550 | 4.44 | 5350 | 6.08 |
| 30 | 0.25 | 1800 | 2.72 | 3600 | 4.46 | 5400 | 6.12 |
| 50 | 0.32 | 1850 | 2.78 | 3650 | 4.59 | 5450 | 6.17 |
| 100 | 0.48 | 1900 | 2.81 | 3700 | 4.60 | 5500 | 6.25 |
| 150 | 0.60 | 1950 | 2.86 | 3750 | 4.72 | 5550 | 6.31 |
| 200 | 0.71 | 2000 | 2.94 | 3800 | 4.72 | 5600 | 6.35 |
| 250 | 0.81 | 2050 | 2.97 | 3850 | 4.86 | 5650 | 6.41 |
| 300 | 0.91 | 2100 | 3.01 | 3900 | 4.85 | 5700 | 6.50 |
| 350 | 1.00 | 2150 | 3.06 | 3950 | 4.99 | 5750 | 6.52 |
| 400 | 1.07 | 2200 | 3.11 | 4000 | 4.90 | 5800 | 6.57 |
| 450 | 1.14 | 2250 | 3.16 | 4050 | 5.04 | 5850 | 6.61 |
| 500 | 1.23 | 2300 | 3.21 | 4100 | 5.01 | 5900 | 6.71 |
| 550 | 1.30 | 2350 | 3.26 | 4150 | 5.10 | 5950 | 6.70 |
| 600 | 1.37 | 2400 | 3.31 | 4200 | 5.08 | 6000 | 6.75 |
| 650 | 1.44 | 2450 | 3.35 | 4250 | 5.18 | 6050 | 6.74 |
| 700 | 1.50 | 2500 | 3.39 | 4300 | 5.14 | 6100 | 6.84 |
| 750 | 1.58 | 2550 | 3.46 | 4350 | 5.22 | 6150 | 6.87 |
| 800 | 1.64 | 2600 | 3.48 | 4400 | 5.21 | 6200 | 6.93 |
| 850 | 1.69 | 2650 | 3.55 | 4450 | 5.29 | 6250 | 6.96 |
| 900 | 1.77 | 2700 | 3.59 | 4500 | 5.31 | 6300 | 7.02 |
| 950 | 1.79 | 2750 | 3.66 | 4550 | 5.39 | 6350 | 7.04 |
| 1000 | 1.87 | 2800 | 3.68 | 4600 | 5.41 | 6400 | 7.10 |
| 1050 | 1.92 | 2850 | 3.75 | 4650 | 5.49 | 6450 | 7.11 |
| 1100 | 1.98 | 2900 | 3.79 | 4700 | 5.52 | 6500 | 7.19 |
| 1150 | 2.05 | 2950 | 3.86 | 4750 | 5.60 | | |
| 1200 | 2.09 | 3000 | 3.89 | 4800 | 5.64 | | |
| 1250 | 2.15 | 3050 | 3.94 | 4850 | 5.73 | | |
| 1300 | 2.21 | 3100 | 3.98 | 4900 | 5.70 | | |
| 1350 | 2.27 | 3150 | 4.03 | 4950 | 5.73 | | |
| 1400 | 2.33 | 3200 | 4.06 | 5000 | 5.75 | | |
| 1450 | 2.38 | 3250 | 4.12 | 5050 | 5.83 | | |
| 1500 | 2.44 | 3300 | 4.14 | 5100 | 5.82 | | |
| 1550 | 2.48 | 3350 | 4.22 | 5150 | 5.91 | | |
| 1600 | 2.52 | 3400 | 4.24 | 5200 | 5.92 | | |
| 1650 | 2.56 | 3450 | 4.31 | 5250 | 5.98 | | |
| 1700 | 2.62 | 3500 | 4.35 | 5300 | 6.01 | | |

13 APPENDIX F Abbreviations and acronyms

| | |
|----------------|---|
| A | ampere |
| AC | alternating current |
| AM | amplitude modulation |
| AVRG | average (detector) |
| BB | broad band |
| cm | centimeter |
| dB | decibel |
| dBm | decibel referred to one milliwatt |
| dB(μ V) | decibel referred to one microvolt |
| dB(μ V/m) | decibel referred to one microvolt per meter |
| dB(μ A) | decibel referred to one microampere |
| DC | direct current |
| EIRP | equivalent isotropically radiated power |
| ERP | effective radiated power |
| EUT | equipment under test |
| F | frequency |
| GHz | gigahertz |
| GND | ground |
| H | height |
| HL | Hermon laboratories |
| Hz | hertz |
| k | kilo |
| kHz | kilohertz |
| LO | local oscillator |
| m | meter |
| MHz | megahertz |
| min | minute |
| mm | millimeter |
| ms | millisecond |
| μ s | microsecond |
| NA | not applicable |
| NB | narrow band |
| OATS | open area test site |
| Ω | Ohm |
| PCB | printed circuit board |
| PM | pulse modulation |
| ppm | part per million (10^{-6}) |
| QP | quasi-peak |
| RE | radiated emission |
| RF | radio frequency |
| rms | root mean square |
| Rx | receive |
| s | second |
| T | temperature |
| Tx | transmit |
| V | volt |
| VA | volt-ampere |
| WB | wideband |

END OF DOCUMENT