

Emoonim Industrial Services


产品规格书

SPECIFICATION FOR SAMPLE

STYLE 品名	UL1007 24AWG	PRAT NO. 料号	
ITEM 项 目		STANDARD 规 格	REMARK 备注
CONDUCTOR 导体	AWG 线规	24AWG	
	MATERIAL 材质	TS	Tinned copper stranded
	CONSTRUCTION 结构 (mm)	11/0.16±0.005	
	STRAND LAY LENGTH 绞距 (mm)	MAX: <18	
INSULATION 绝缘	MATERIAL 材质	PVC	45P
	OVERALL DIAMETER 线径 (mm)	1.4±0.1	
	NO. OF CONDUCTORS 导体数	1C	
	COLOUR 颜色	WHITE	
	AVG. THICK 平均厚度	0.41mm	
	MIN. THICK 最小厚度	0.38mm	
ELECTRIC FUNCTION 电气特性	RATED VOLTAGE 额定电压	300V	
	RATED TEMP 额定温度	80℃	
	COND. RESISTANCE 导体电阻	MAX: 88.9Ω /KM 20℃	
	INSU. RESISTANCE 绝缘电阻	MIN: 2.5 MΩ .KFT 20℃	
MARKING 印字	E333364 兄 AWM STYLE 1007 24AWG 80℃ 300V VW-1 c兄 AWM I A 80℃ 300V FT1 -LF- YUEWEI		
REMARK 备注	ALL MATERIALS ARE FIT FOR RoHS REQUIREMENTS 以上材料符合RoHS低毒环保指令。 包装方式: 610M/R PE膜缠绕		
CONDITION OF STORAGE 保存条件	TEMPERATURE: 25 ±5℃ HUMIDITY: 60-70% STORAGE PERIOD: ONE YEAR 温度: 25±5℃ 湿度: 60-70% 保存周期为一年		
CONSTRUCTION FIGURE 截面图 (单位:MM)		CUSTOMER 客户	
 <p>绝缘: PVC</p> <p>1.4±0.1</p> <p>24AWG(11/0.16TS±0.005)</p>		DOCUMENT NO. 编号	YW-20230523001
		EDITION 版次	A0
		DATE 日期	2023.05.03
		DRAWN 制作	钟菲
		CHECKED 审核	王飞
CUSTOMER BY 客户确认		APPROVED 专用章 核准	

RoHS

Antenna Model: UL1007
 Antenna Type: Wire Antenna
 Antenna Gain: -3dBi

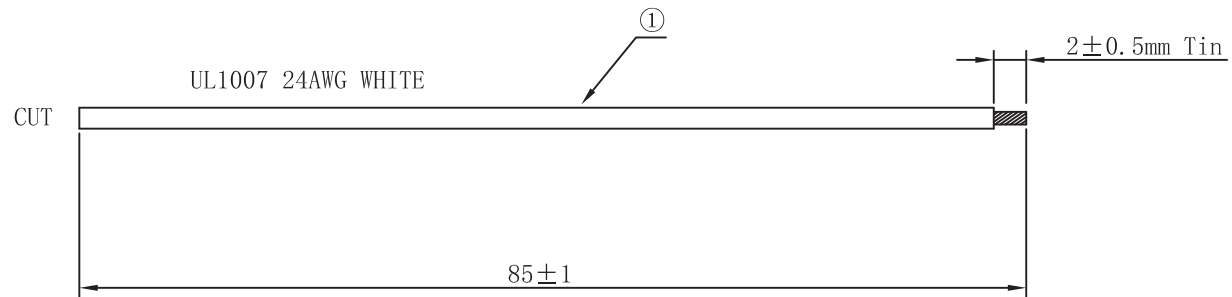

Wire specifications:
 Tinned Copper Stranded: 11/0.16 Tinned copper stranded
 PVC insulation: 45P PVC
 OD: 1.4 ± 0.1mm
 Rated Temperature: 80° C
 Voltage Rating: 300 Volts
 UL Flame test: VW-1
 Standard UL1007 Subject UL758, UL1581

Packing : Bundles of 100pcs

2			
1	CABLE	UL1007 24AWG TC WHITE OD1.4mm	85mm
NO	NAME	SPEC	Q'TY

BILL OF MATERIAL

BY	DATE	REV	CHANGE	DESCRIPTION	REVISED	DATE	TITLE	UNIT
DRAWN:shenyong	2023/5/18						1WR3027	mm
DESIGNER							DWG NO	
CHECKED								
APPROVED								

Emoonim Industrial Services