



ELECTROMAGNETIC EMISSIONS TEST REPORT

ACCORDING TO FCC PART 15, SUBPART C, §15.231

FOR
ROKONET ELECTRONICS Ltd.

EQUIPMENT UNDER TEST
**TRANSMITTER RW-T42/43
(NOVA 42/43)**

Prepared by: *Cherniavsky*
Mrs. M. Cherniavsky, certif. engineer
Hermon Labs

Approved by: *Usoskin*
Mr. A. Usoskin, QA manager
Hermon Labs

Approved by: *Usoskin*
Dr. E. Usoskin, C.E.O.
Hermon Labs

Approved by: *M. Szhafir*
Mr. M. Szhafir, marketing manager
technical support
ROKONET Electronics Ltd.

Hermon Laboratories Ltd.
P.O.Box 23
Binyamina 30550, Israel
Tel.+972-6628-8001
Fax.+972-6628-8277
Email:hermon@Netvision.net.il





***This test report must not be reproduced
in any form except in full, with the approval
of Hermon Laboratories Ltd.***



Description of equipment under test

Test items	Transmitter, FCC ID:JE4WT4X
Manufacturer	ROKONET Electronics Ltd.
Trade Mark	NOVA 42/NOVA 43
Type (Model)	RW T42/43

Applicant information

Applicant's representative	Mr. Semion Resman, project manager
Responsible person	Mr. Marcos Szhafir, marketing manager
	technical support
Company	ROKONET Electronics Ltd.
Address	14 Hachorna St.
P.O. Box	NA
Postal code	75655
City	Rishon Lezion
Country	Israel
Telephone number	011 972 3961 6555
Telefax number	011 972 3961 6584

Test performance

Project Number	13218
Location of the test	Hermon Laboratories, Binyamina, Israel
Test started	December 16, 1998
Test completed	December 24, 1998
Purpose of test	The EUT certification in accordance with CFR 47, part 2, §2.1033
Test specification(s)	FCC part 15 subpart C §15.231, §15.209 subpart B, §15.109

Through this report a point is used as the decimal separator and the thousands are counted with a comma.
This report is in conformity with EN 45001 and ISO GUIDE 25.
The test results relate only to the items tested.



Table of Contents

1 GENERAL INFORMATION.....5

1.1 ABBREVIATIONS AND ACRONYMS5

1.2 SPECIFICATION REFERENCES6

1.3 EUT DESCRIPTION6

1.4 STATEMENT OF MANUFACTURER7

2 TEST FACILITY DESCRIPTION.....8

2.1 GENERAL.....8

2.2 EQUIPMENT CALIBRATION.....8

 2.2.1 *Uncertainty in Hermon Labs Measurements.*8

2.3 LABORATORY PERSONNEL9

2.4 STATEMENT OF QUALIFICATION9

3 RADIATED EMISSION MEASUREMENTS10

3.1 FIELD STRENGTH OF EMISSIONS ACCORDING TO § 15.231 (B)10

 3.1.1 *Specified limits at 3 m distance*10

 3.1.2 *Test procedure and results.*.....10

Table Abbreviations:12

3.2 BANDWIDTH OF EMISSION ACCORDING TO § 15.231 (C)19

 3.2.1 *Specified limits.*.....19

 3.2.2 *Test procedure and results.*.....19

3.3 PERIODIC OPERATION REQUIREMENT §15.231(A)(1)21

3.4 UNINTENTIONAL RADIATED EMISSIONS TEST ACCORDING TO §15.109, §15.209.....22

 3.4.1 *Definition of the test*22

 3.4.2 *The test set-up configuration*22

4 SUMMARY AND SIGNATURES25

APPENDIX A - TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS.....26

APPENDIX B-TEST EQUIPMENT CORRECTION FACTORS.....27

APPENDIX C- A2LA ACCREDITATION.....30



1 General Information

1.1 Abbreviations and Acronyms

The following abbreviations and acronyms are applicable to this test report:

AVRG	average (detector)
BW	bandwidth
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
DC	direct current
EMC	Electromagnetic Compatibility
EUT	Equipment Under Test
GHz	gigahertz
H	height
HL	Hermon Laboratories
HP	Hewlett Packard
Hz	hertz
IF	intermediate frequency
kHz	kilohertz
L	length
m	meter
mm	millimeter
MHz	megahertz
msec	millisecond
NA	Not Applicable
NARTE	National Association of Radio and Telecommunications Engineers, Inc.
QP	quasi-peak (detector)
RBW	resolution bandwidth
RF	Radio Frequency
RE	radiated emission
V	volt
W	watt



1.2 Specification References

CFR 47 part 15: October 1997	Radio Frequency Devices.
ANSI C63.2:06/1987	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications.
ANSI C63.4:1992	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

1.3 EUT Description

The EUT is a portable, short range three channel transmitter operating at 318 MHz. The same schematic is used for two transmitter models: RW T42 and RW T43. The RW T42 is used as a three channel general purpose transmitter, the RW T43 is used as the transmitter to arm and disarm a security system or as a two-button panic alarm. The transmitter can be mounted on a key chain, clipped to a belt or pocket or worn as pendent on a nylon cord. All the transmitter modes of operation were tested. The EUT is powered by 3 V internal battery.



1.4 Statement of Manufacturer

I, Marcos Szhafir, marketing manager of ROKONET Electronics Ltd., declare that the transmitter RW-T42/43, FCC ID:JE4WT4X was tested on December 16, 18 and 24, 1998 by Hermon Laboratories and which this test report applies to, is identical of the equipment that will be marketed.

The term identical means identical within the variations that can be expected to arise as a result of quantity production technique.

Marcos Szhafir, marketing manager
technical support
ROKONET Electronics Ltd.

Signature: M. Szhafir

Date: Febr. 24, 1999



2 Test Facility Description

2.1 General

Tests were performed at Hermon Laboratories, which is a fully independent, private EMC, Safety and Telecommunication testing facility. Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), listed by Industry Canada for radiated measurements (file numbers IC 2186-1 for OATS and IC 2186-2 for anechoic chamber), recognized by VDE (Germany) for witness test, certified by VCCI (Japan), assessed by NMI Certin B.V. (Netherlands) for a number of EMC, Telecommunications and Safety standards, recognized by TUV Sudwest (Germany) for Safety testing, and Accredited by AMTAC (UK) for safety of Medical Devices. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO GUIDE 25/EN 45001 for EMC, Telecommunications and Product Safety Information Technology Equipment (Certificate No. 839.01).

Address: PO Box 23, Binyamina 30550, Israel.
Telephone: +972-6-628-8001
Fax: +972-6-628-8277

Person for contact: Mr. Alex Usoskin, testing and QA manager.

2.2 Equipment Calibration

The test equipment has been calibrated according to its recommended procedures and is within the manufacturer's published limit of error. The standards and instruments used in the calibration system conform to the present requirements of MIL-STD-45662A. The laboratory standards are calibrated by the third party (traceable to NIST, USA) on a regular basis according to equipment manufacturer requirements.

2.2.1 Uncertainty in Hermon Labs Measurements.

Radiated Emissions (95% Confidence)	<p>Biconical Antenna:</p> <p>3m measuring distance : + 2.032 dB Combined standard uncertainty + 4.06 dB Expanded uncertainty - 1.99 dB Combined standard uncertainty - 3.98 dB Expanded uncertainty</p> <p>10m measuring distance : + 1.99 dB Combined standard uncertainty + 3.98 dB Expanded uncertainty - 2.04 dB Combined standard uncertainty - 4.08 dB Expanded uncertainty</p> <p>Log periodic Antenna:</p> <p>3m measuring distance : + 2.37 dB Combined standard uncertainty + 4.74 dB Expanded uncertainty - 1.63 dB Combined standard uncertainty - 3.26 dB Expanded uncertainty</p> <p>10 m measuring distance : + 3.06 dB Expanded uncertainty + 1.53 dB Combined standard uncertainty - 3.00 dB Expanded uncertainty - 1.50 dB Combined standard uncertainty</p>
--	--



2.3 Laboratory Personnel

The four people of Hermon Laboratories that have participated in measurements and documentation preparation are: Dr. Edward Usoskin - C.E.O., Mr. Michael Nikishin, test engineer, Mr. Michael Feldman - test technician, and Mrs. Marina Cherniavsky - certification engineer.

Dr. E. Usoskin is an EMC specialist and M. Cherniavsky is a telecommunication engineer certified by the National Association of Radio and Telecommunications Engineers (NARTE, USA.).


The Hermon Laboratories' personnel that participated in this project have more than 100 years combined experience time in EMC measurements and electronic products design.

2.4 Statement of Qualification

The test measurement data supplied in this test measurement report having been received by me, is hereby duly certified. The following is a statement of my qualifications:

I am a technician, have obtained 30 years experience in electronics and measurements. I have been with Hermon Laboratories since 1995.


Name: Mr. Michael Feldman
Position: test technician

Signature: 
Date: February 3, 1999

The test measurement data supplied in this test measurement report having been received by me, is hereby duly certified. The following is a statement of my qualifications:

I am an engineer, graduated from university in 1996 with an MScEE degree, have obtained 2 years experience in EMC measurements and have been with Hermon Laboratories since 1998.


Name: Mr. Michael Nikishin
Position: test engineer

Signature: 
Date: February 3, 1999

I hereby certify that this test measurement report was prepared by me and is hereby duly certified. The following is a statement of my qualifications.

I am an engineer, graduated from University in 1971, with an MScEE degree, have obtained 26years experience in electronic products design and development and have been with Hermon Laboratories since 1991. Also, I am a Telecommunication Class II engineer certified by the National Association of Radio and Telecommunications Engineers, Inc. (USA.), the certificate no. is E2-03410.

Name: Mrs. Marina Cherniavsky
Position: certif. engineer

Signature: 
Date: February 3, 1999


I hereby certify that this test measurement report was prepared under my direction and that to the best of my knowledge and belief, the facts set in the report and accompanying technical data are true and correct.

The following is a statement of my qualifications.

I have a Ph.D. degree in electronics, have obtained more than 42 years of experience in EMC measurements and electronic product design and have been with Hermon Laboratories since 1986.

Also, I am an EMC engineer certified by the National Association of Radio and Telecommunications Engineers, Inc. (USA). The certificate no. is EMC-000623-NE, Senior Member.

Name: Dr. Edward Usoskin
Position: C.E.O.

Signature: 
Date: February 3, 1999



3 Radiated Emission Measurements

3.1 Field Strength of Emissions according to § 15.231 (b)

3.1.1 Specified limits at 3 m distance

Fundamental Frequency MHz	Field Strength of Fundamental dB (µV/m)	Field Strength of Spurious Emissions dB (µV/m)
260 - 470	71.5 to 82*	51.5 to 62*
above 470	82	62

* - Linear interpolations

3.1.2 Test procedure and results

The test was performed in the Hermon Labs open field test site (OFTS) at 1 and 3 meters test distance, i.e. the distance between measuring antenna and EUT boundary. Limit for 1 meter test distance was calculated using an inverse linear-distance extrapolation factor.

The EUT was placed on the wooden turntable, as shown in Figure 3.1 and Photographs 3.1, 3.2. The EUT was operated in continuous transmitting mode and measured in three orthogonal axes during the testing. All the transmitter modes of operation were tested. The frequency range from 30 MHz up to 10th harmonic was investigated.

Log periodic and Double Ridged Guide antennas were used. To find maximum radiation the turntable was rotated 360°, measuring antenna height was changed from 1 to 4 m, and the antennas polarization was changed from vertical to horizontal.

The peak detector (resolution bandwidth 120 kHz) was used at frequencies below 1 GHz. Above 1 GHz the peak detector with resolution bandwidth (IF BW) = 1 MHz and video bandwidth (AVR BW) = 1 MHz was used.

The test results were recorded into Tables 3.1, 3.2. The pulse train duration measurements for average factor calculation are shown in Plots 3.1.1 to 3.1.3.

Average factor is equal to $20 \log (66/100 \times 0.5) = -9.6 \text{ dB}$, where the pulse train duration within 0.1 sec is 0.066 sec and whole transmission time is 0.033 sec, taking into consideration the 0.5 duty cycle.

Reference numbers of test equipment used

HL 0025	HL 0034	HL 0038	HL 0041	HL 0181	HL 0275	HL 0287
HL 0412	HL 0507	HL 0521	HL 0812	HL 0813		

Full description is given in Appendix A.



Table 3.1

**Radiated emission measurements - test results
(Field strength of fundamental frequency and spurious)**

TEST SPECIFICATION: FCC part 15 subpart C § 15.231
COMPANY: ROKONET Electronics Ltd.
EUT: Transmitter RW-T42/43
DATE: December 16, 1998
RELATIVE HUMIDITY: 46%
AMBIENT TEMPERATURE: 23°C

MEASUREMENTS PERFORMED AT 3 METRES DISTANCE

Frequency MHz	Measured Result dB (µV)	Correction Factor dB (1/m)	Average Factor dB	Radiated Emissions dB (µV/m)	Specified Limit dB (µV/m)	Spec. Margin dB	Pass/ Fail
318.043	61.18	19.0	-9.6	70.58	75.8	5.22	Pass
636.059	25.94	25.6	-9.6	41.94	55.8	13.86	Pass
954.096	25.94	30.7	-9.6	46.34	55.8	9.46	Pass

Notes to Table:

Peak detector was used.
Resolution bandwidth = 120 kHz.
The test results listed in Table 3.1 were obtained during measurements with log periodic antenna in horizontal polarization.
Radiated emission dB(µV/m) = measured result {dB(µV)} + correction factor {dB(1/m)}+ average factor (dB).
Correction factor = antenna factor + cable loss (for antenna factor and cable loss refer to Appendix B).
Average Factor = 20 log (33/100) = -9.6, where 33 msec is transmitting time of each 100 msec (refer to Plots 3.1.1 - 3.1.3).
Specified limit is in accordance with § 15.231(b)

Table Abbreviations:

Spec. Margin = Specification Margins = dB below (negative if above) specification limit.

Test performed by:
Mr. Michael Nikishin, test engineer



Hermon Labs

**Table 3.2****Radiated emission measurements - test results
(Field strength of spurious emissions)**

TEST SPECIFICATION: FCC part 15 subpart C § 15.231
 COMPANY: ROKONET Electronics Ltd.
 EUT: Transmitter RW-T42/43
 DATE: December 24, 1998
 RELATIVE HUMIDITY: 46%
 AMBIENT TEMPERATURE: 23°C

MEASUREMENTS PERFORMED AT 1 METRES DISTANCE

Frequency MHz	Measured Result dB (µV)	Antenna Factor dB (1/m)	Cable Loss dB	Average Factor dB	Radiated Emissions dB (µV/m)	Calculated Limit dB (µV/m)	Spec. Margin dB	Pass/ Fail
1272.4	25.0	26.0	2.3	-9.6	43.7	65.3	21.6	Pass
1590.4	28.0	28.2	2.5	-9.6	49.1	63.5	14.4	Pass
1908.6	35.0	29.9	2.8	-9.6	58.1	65.3	7.2	Pass
2226.7	25.0	31.0	3.2	-9.6	49.6	63.5	13.9	Pass
2544.8	22.5	31.6	3.5	-9.6	48.0	65.3	17.3	Pass

Notes to Table:

Peak detector was used.

Resolution bandwidth (IF BW) = 1 MHz and video bandwidth (AVR BW) = 1 MHz

The test results listed in Table 3.2 were obtained during measurements with the double ridged guide antenna in vertical polarization.

Radiated emission dB(µV/m) = measured result {dB(µV)} + antenna factor {dB(1/m)} + cable loss (dB)+ average factor (dB).

Average Factor = $20 \log (33/100) = -9.6$, where 33 msec is transmitting time of each 100 msec (refer to Plots 3.1.1 - 3.1.3).

Limit is calculated in accordance with §15.231(b) and §§15.209(a), 15.205.

Table Abbreviations:

Spec. Margin = Specification Margins = dB below (negative if above) specification limit.

Test performed by:


Mr. Michael Feldman, test technician

Hermon Labs




Plot 3.1.1
Average factor measurement
Pulse train duration = 66 msec

stopped

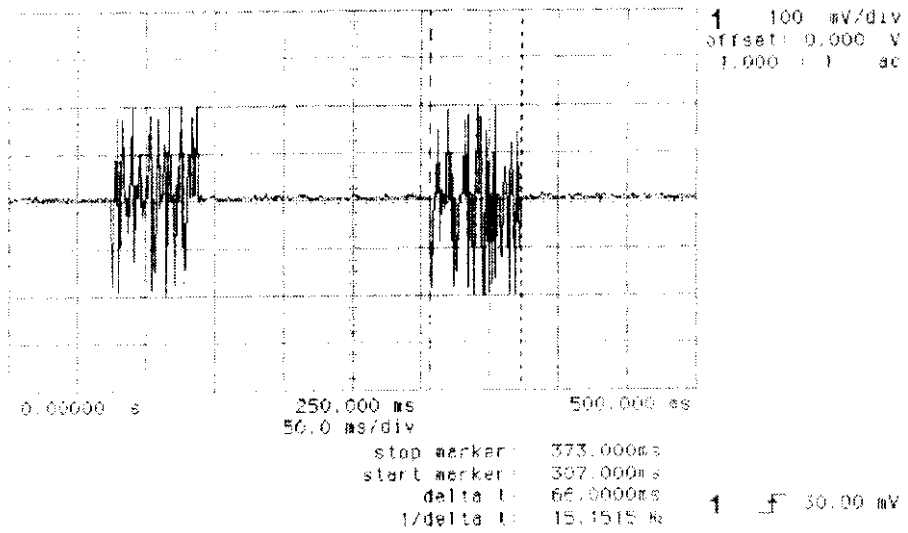



Plot 3.1.2 Duty cycle measurement

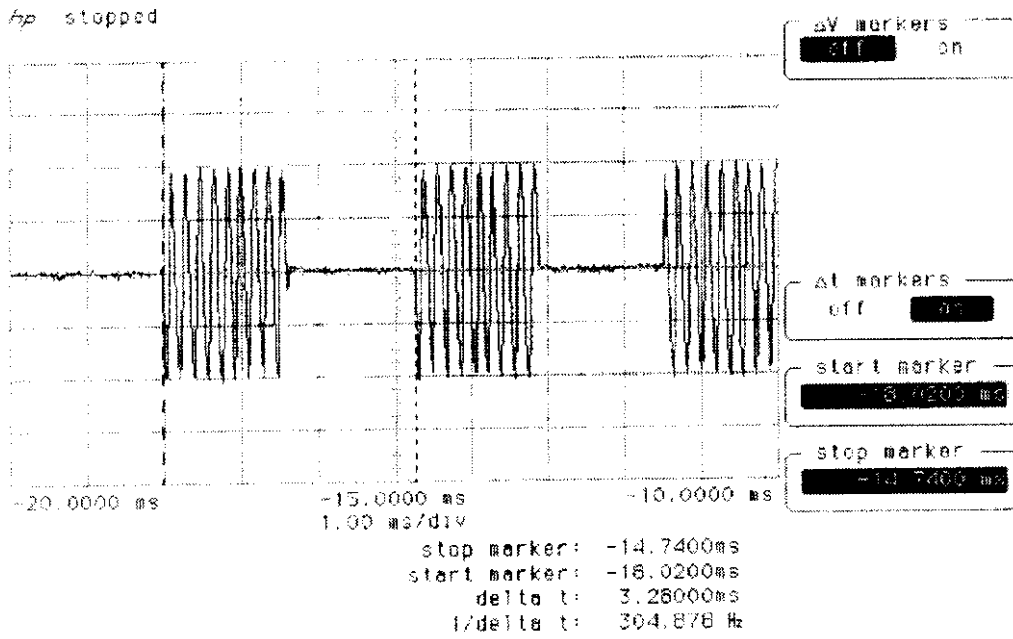



Plot 3.1.3
Duty cycle measurement
Duty cycle = 0.5


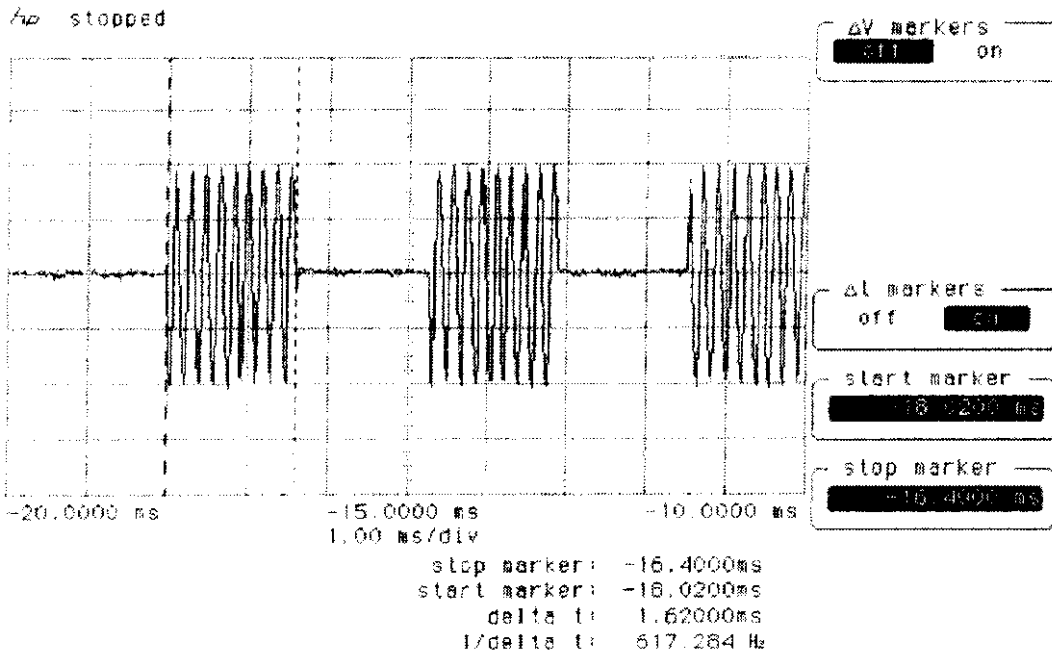




Figure 3.1
Radiated emission test setup



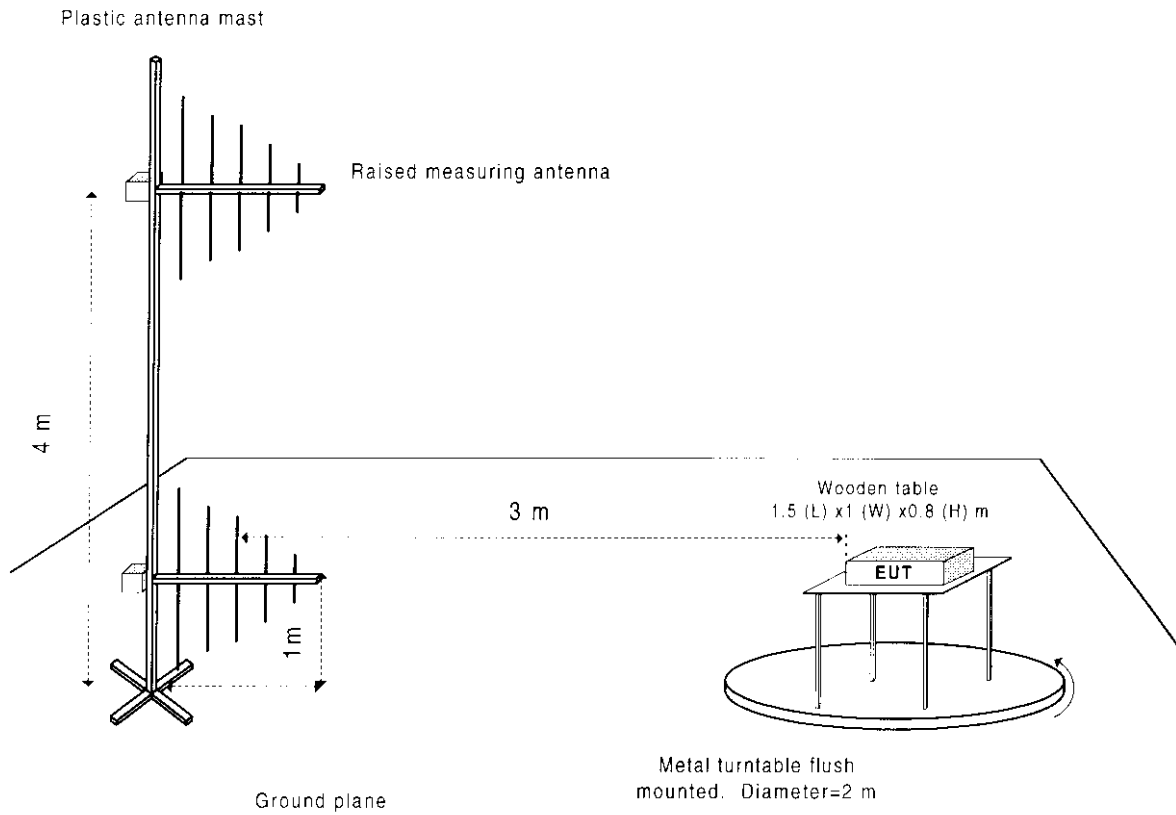

3.2 Bandwidth of Emission according to § 15.231 (c)

3.2.1 Specified limits

The bandwidth of the emissions shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz.

3.2.2 Test procedure and results

The maximum allowed occupied bandwidth was calculated as 0.0025 of the center frequency:

$$0.0025 \times 318 \text{ MHz} = 0.795 \text{ MHz}$$

The spectrum trace data around transmitter fundamental frequency was obtained with the Spectrum Analyzer in "Max Hold" mode. The bandwidth value was determined between two points 20 dB down from the modulated carrier. The occupied bandwidth of 0.560 MHz was measured which is narrower than required 0.795 MHz.

The test results are shown in Plot 3.2.1.


Reference numbers of test equipment used

HL 0034	HL 0038	HL 0275	HL 0287	HL 0507	HL 0812	HL 0813
---------	---------	---------	---------	---------	---------	---------

Full description is given in Appendix A.



Plot 3.2.1
Emission bandwidth measurement results
Occupied bandwidth = 0.560 MHz

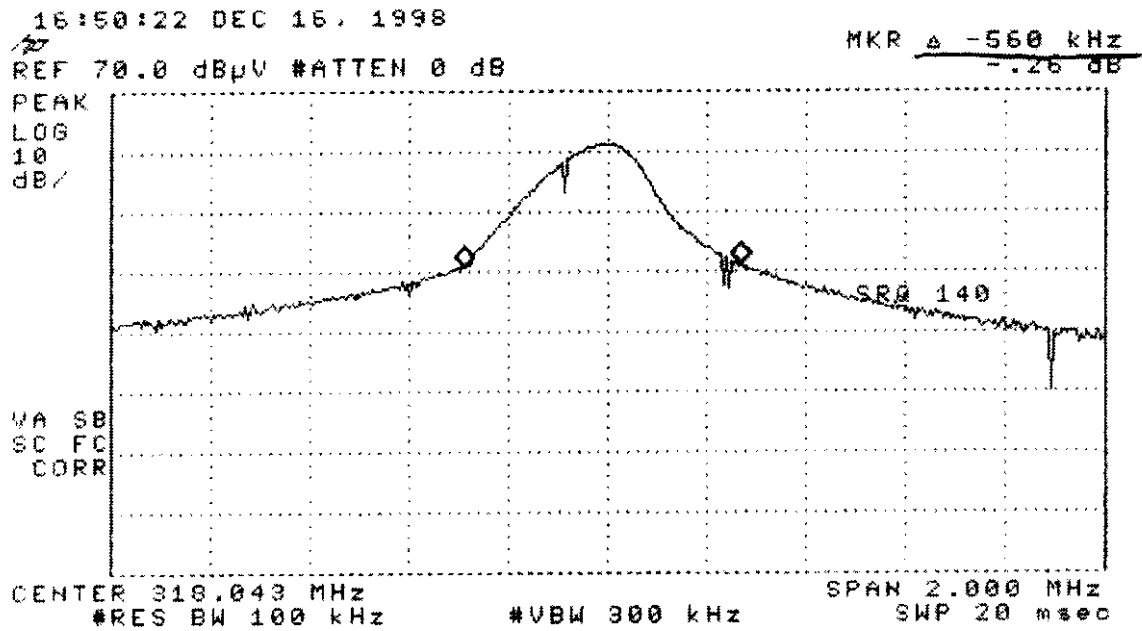



3.3 Periodic Operation Requirement §15.231(a)(1)

(1) The operation of the transmitter is as follows:

When a button is pressed, there is a delay of about 1sec, then transmission for 1.2sec. If the button is still pressed, the T42/T43 will send a write pulse (1.5 sec), and then, if the button is still pressed, a normal transmission (1.2 sec).

Total transmission time: $1.2 + 1.5 + 1.2 \text{ sec} = \text{approx. } 4 \text{ sec.}$

The software of the controller will stop transmission in any case after 5 seconds **maximum**.

(2) The transmitter will not transmit automatically, except for the supervised version. For the supervised version, the supervision code will be sent every 65 minutes, and the transmission time is about 1.2 sec.



3.4 Unintentional Radiated emissions test according to §15.109, §15.209

3.4.1 Definition of the test

This test was performed to measure radiated emissions from the incorporated digital device of the EUT and also to verify the EUT full compliance with §15.109, §15.209.

3.4.2 The test set-up configuration

The radiated emissions measurements of the EUT incorporated digital device were performed in the anechoic chamber at 3 meters measuring distance in the frequency range from 30 MHz to 2 GHz. The EUT was placed on the wooden table as shown in Figure 3.1. The biconilog antenna was used. To find maximum radiation the turntable was rotated 360°, the measuring antenna height changed from 1 to 4 m, and the antennas polarization was changed from vertical to horizontal.

The measurements from 30 MHz to 1 GHz were performed with the EMI receiver settings: RBW=120 kHz, quasi-peak detector.

The results of measurements are shown in Plots 3.4.1, 3.4.2. All the found emissions were at least 15 dB below limit.

The receiver radiated emissions measurements from 1 GHz up to 2 GHz were performed with the spectrum analyzer settings: RBW = VBW = 1 MHz, peak detector.

Reference numbers of test equipment used


HL 0041	HL 0275	HL 0465	HL 0521	HL 0593	HL 0604	HL 0815
HL 0816						

Full description is given in Appendix A.



Plot 3.4.1


Test Specification: §15.109, §15.209
Radiated emissions of digital incorporated device

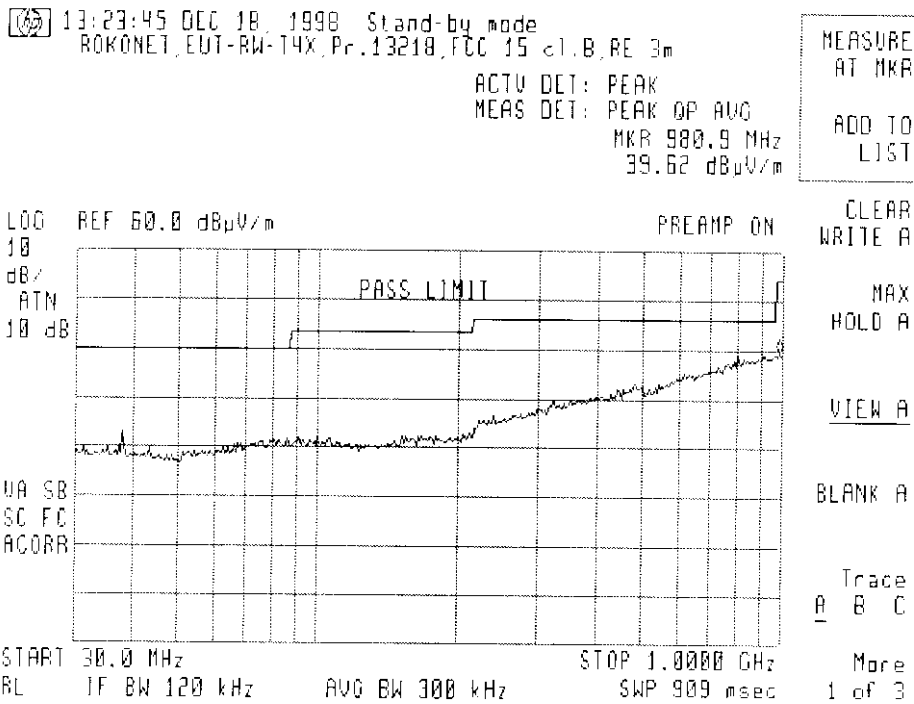



Plot 3.4.2

Test Specification: §15.109, §15.209
Radiated emissions of digital incorporated device

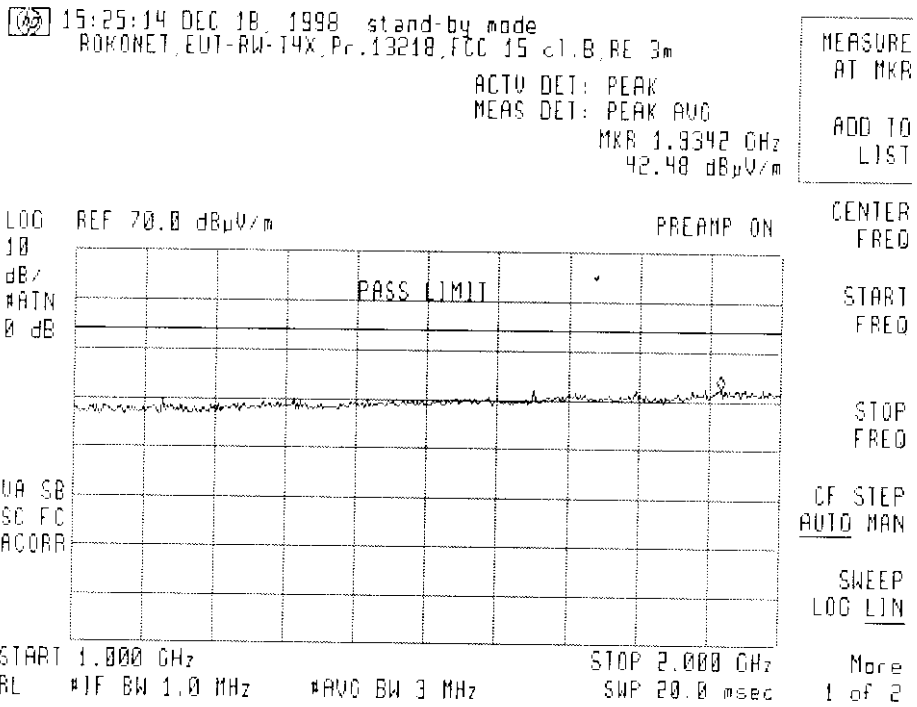



4 Summary and Signatures

The transmitter RW-T42/43, FCC ID:JE4WT4X was found to be in compliance with the requirements of FCC part 15 subpart C §§ 15.231, 15.209 and subpart B §15.109.

Test performed by:

Mr. Michael Nikishin, test engineer

Mr. Michael Feldman, test technician

Approved by:

Dr. Edward Usoskin, C.E.O.

Responsible person from ROKONET Electronics Ltd.

Mr. Marcos Szhafir, marketing manager

**APPENDIX A - Test equipment and ancillaries used for tests**

HL Serial No.	Serial No.	Description	Manufacturer	Model No.	Due Calibr.
0025	5837	Spectrum Analyzer, 10 kHz-23 GHz	Anritsu	MS-710C	8/99
0032	3577	Biconical Antenna, 20-200 MHz	Electro-Metrics	BIA-25/30	4/99
0034	1988	Log Periodic Antenna, 200 - 1000 MHz	Electro-Metrics	LPA 25/30	4/99
0038	028	Antenna Mast, 1-4 m	Hermon Labs	AM-1	2/99 Check
0041	2811	Double Ridged Guide Antenna, 1-18 GHz	Electro-Metrics	RGA 50/60	8/99
0181	3950	Oscilloscope, Digitizing, 100 MHz	Hewlett Packard	54501A	11/99
0275	040	Table non-metallic, 1.5 x 1.0 x 0.8 m	Hermon Labs	WT-1	3/99 Check
0287	042	Turntable, Motorized Diameter, 2m	Hermon Labs	TMD-2	4/99
0412	8769	Coax Cable, Microwave, DC-18 GHz, N-N, 3 m	Go Electronics	3601Q01118.2	9/00
0465	023	Anechoic Chamber 9 (L) x 6.5 (W) x 5.5 (H) m	Hermon Labs	AC-1	10/99
0507	0162	Spectrum Analyzer, 9 kHz - 1.8 GHz	Hewlett Packard	8591A	4/99
0521	0319	Spectrum Analyzer with RF filter section (EMI Receiver 9 kHz - 6.5 GHz)	Hewlett Packard	8546A	7/99
0593	101	Antenna Mast, 1-4 m/ 1-6 m, pneumatic	Hermon Labs	AM-F1	4/99 Check
0594	102	Turntable for Anechoic Chamber, flush mounted, d=1.2 m, pneumatic	Hermon Labs	WDC1	11/99
0604	1011	Antenna Log-Periodic/T Bow-Tie, 26 - 2000 MHz	EMCO	3141	12/99
0812	148	Cable, coax, RG-214, 11.5 m, N-type connectors	Hermon Labs	C214-11	8/99
0813	149	Cable, coax, RG-214, 12 m, N-type connectors	Hermon Labs	C214-12	8/99
0815	151	Cable, coax, RG-214, 7.3 m, N-type connectors, inside anechoic chamber	Hermon Labs	C214-7	8/99
0816	152	Cable, coax, RG-214, 8 m, N-type connectors, outside anechoic chamber	Hermon Labs	C214-8	8/99



APPENDIX B-Test Equipment Correction Factors

Antenna Factor at 3m calibration
Log Periodic Antenna Electro-Metrics Model LPA-25/30
Ser.No.1988

Frequency MHz	Antenna Factor dB(1/m)	Frequency MHz	Antenna Factor dB(1/m)
200	12.6	625	20.4
225	12.2	650	20.9
250	13.4	675	22.0
275	14.3	700	22.2
300	15.2	725	22.7
325	15.7	750	22.5
350	15.9	775	22.7
375	16.4	800	22.8
400	17.0	825	23.2
425	17.4	850	23.5
450	17.9	875	23.9
475	18.6	900	24.0
500	19.1	925	24.0
525	19.3	950	24.2
550	19.6	975	24.7
575	19.8	1000	25.1
600	20.0		

Antenna factor is to be added to receiver meter reading in dB(μ V) to convert to field intensity in dB(μ V/meter)



**Antenna Factor at 3m calibration
Biconilog Antenna EMCO Model 3141
Ser.No.1011**

Frequency, MHz	Antenna Factor, dB(1/m)	Frequency, MHz	Antenna Factor, dB(1/m)
26	7.8	940	24.0
28	7.8	960	24.1
30	7.8	980	24.5
40	7.2	1000	24.9
60	7.1	1020	25.0
70	8.5	1040	25.2
80	9.4	1060	25.4
90	9.8	1080	25.6
100	9.7	1100	25.7
110	9.3	1120	26.0
120	8.8	1140	26.4
130	8.7	1160	27.0
140	9.2	1180	27.0
150	9.8	1200	26.7
160	10.2	1220	26.5
170	10.4	1240	26.5
180	10.4	1260	26.5
190	10.3	1280	26.6
200	10.6	1300	27.0
220	11.6	1320	27.8
240	12.4	1340	28.3
260	12.8	1360	28.2
280	13.7	1380	27.9
300	14.7	1400	27.9
320	15.2	1420	27.9
340	15.4	1440	27.8
360	16.1	1460	27.8
380	16.4	1480	28.0
400	16.6	1500	28.5
420	16.7	1520	28.9
440	17.0	1540	29.6
460	17.7	1560	29.8
480	18.1	1580	29.6
500	18.5	1600	29.5
520	19.1	1620	29.3
540	19.5	1640	29.2
560	19.8	1660	29.4
580	20.6	1680	29.6
600	21.3	1700	29.8
620	21.5	1720	30.3
640	21.2	1740	30.8
660	21.4	1760	31.1
680	21.9	1780	31.0
700	22.2	1800	30.9
720	22.2	1820	30.7
740	22.1	1840	30.6
760	22.3	1860	30.6
780	22.6	1880	30.6
800	22.7	1900	30.6
820	22.9	1920	30.7
840	23.1	1940	30.9
860	23.4	1960	31.2
880	23.8	1980	31.6
900	24.1	2000	32.0
920	24.1		

Antenna factor is to be added to receiver meter reading in dB(μ V) to convert to field intensity in dB(μ V/meter).



Antenna Factor
Double Ridged Guide Antenna
Electro-Metrics, Model RGA-50/60
Ser.No.2811

Frequency, MHz	Antenna Factor, dB(1/m)
1000	24.3
1500	25.4
2000	28.4
2500	29.2
3000	30.5
3500	31.6
4000	33.7
4500	32.2
5000	34.5
5500	34.5
6000	34.6
6500	35.3
7000	35.5
7500	35.9
8000	36.6
8500	37.3
9000	37.7
9500	37.7
10,000	38.2
10,500	38.5
11,000	39.0
11,500	40.1
12,000	40.2
12,500	39.3
13,000	39.9
13,500	40.6
14,000	41.1
14,500	40.5
15,000	39.9
15,500	37.8
16,000	39.1
16,500	41.1
17,000	41.7
17,500	45.1
18,000	44.3

Antenna factor dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/meter)



APPENDIX C- A2LA Accreditation



**THE AMERICAN
ASSOCIATION
FOR LABORATORY
ACCREDITATION**

ACCREDITED LABORATORY

A2LA has accredited

HERMON LABORATORIES
Binyamina, ISRAEL

for technical competence in the field of

Electrical (EMC) Testing

The accreditation covers the specific tests and types of tests listed on the agreed scope of accreditation. This laboratory meets the requirements of ISO/IEC Guide 25-1990 "General Requirements for the Competence of Calibration and Testing Laboratories" (equivalent to relevant requirements of the ISO 9000 series of standards and EN 45001) and any additional program requirements in the identified field of testing.

Presented this 27th day of February, 1997.



President
For the Accreditation Council
Certificate Number 839.01
Valid to March 31, 1999

For tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical (EMC) Scope of Accreditation



American Association for Laboratory Accreditation
SCOPE OF ACCREDITATION TO ISO/IEC GUIDE 25:1990 (EN 45001)

HERMON LABORATORIES

P.O. Box 23
Binyamina 30550, Israel
Edward Usoskin Phone: 972 6 6288 001

ELECTRICAL (EMC)

Valid to: March 31, 1999
Certificate Number: 0839.01

In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following tests:

Electromagnetic Compatibility
Radiated Emissions Tests
Conducted Emissions Tests

Product Safety Testing

Heat Resistance
Impulse
Clearance & Creepage Distance
Temperature Rise
High Current Arching Ignition
Bonding Resistance
Longitudinal Balance
Environmental Stresses, Surges
DTMF & Pulse Dialing
On Hook, Off Hook DC/AC Impedances
In-Band, Out of Band Signals

Telecommunications Testing
Return Losses
Hazardous Voltages
Hearing Aids
Billing Protection

On the following equipment:
Information Technology Equipment (ITE); Industrial, Scientific and Medical
Equipment (ISM); Telecommunications Equipment; Electrical Appliances; Portable
Tools; Motors; Transformers; and Similar Electrical Apparatus

Using the following test methods/specifications/standards:

FCC Part 15 using ANSI C63.4 - 1992
ANSI/UL 1950 - 1994
AS 3260
AS/NZS 1044, AS/NZS 2064, AS/NZS 3548
CISPR 11 - 1990, CISPR 14, CISPR 22 - 1993
EN 55011 - 1991, EN 55014 - 1987, EN 55022 - 1994, EN 60950 - 1993
IEC 950 - 1996
Israel Ministry of Communications Specification No. 023/96
TS 001, TS 002, TS 004
US Code of Federal Regulation (CFR) 47 Parts 15, 18, and 68

Revised 06/25/97

Edward Usoskin

656 Quince Orchard Road, #620 • Gaithersburg, MD 20878-1409 • Phone: 301 670 1377 • FAX: 869 1495



HERMON LABORATORIES

Test Report: ROKFCC.13218
Date: February, 1999
FCC ID: JE4WT4X

Photograph 3.1.1
Radiated emission measurements setup






HERMON LABORATORIES

Test Report: ROKFCC.13218
Date: February, 1999
FCC ID: JE4WT4X

Photograph 3.1.2
Radiated emission measurements setup

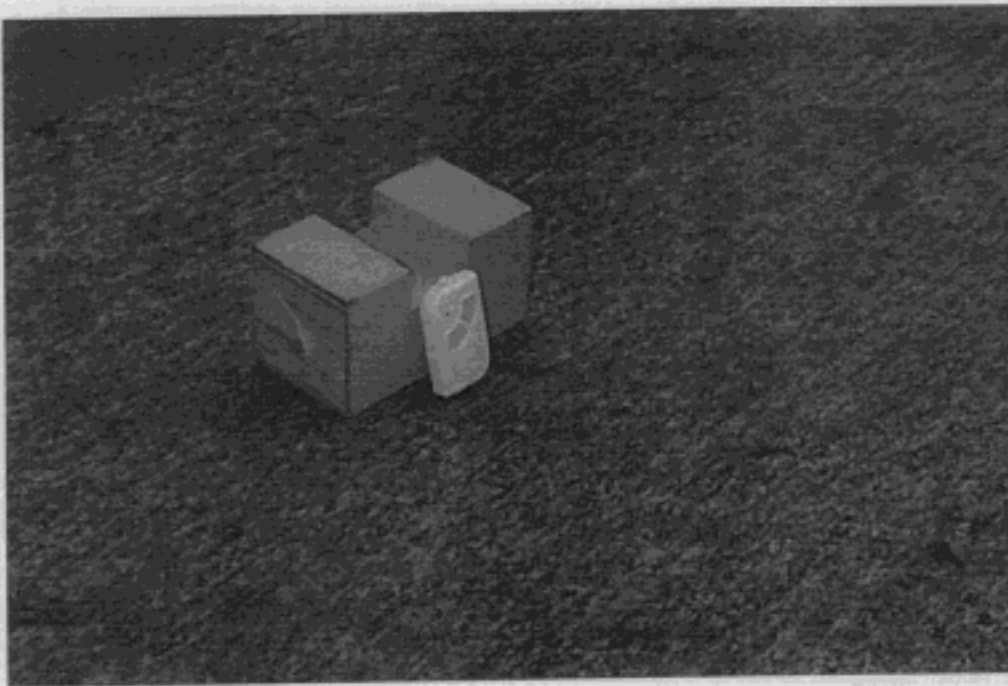

Handwritten signature or initials.