

# ***FCC Part 74 Subpart H***

## ***EMI TEST REPORT***

*of*

E.U.T. : Wireless Handheld Transmitter  
Microphone

FCC ID. : JEBUF-9H

Model No. : UF-9H

Working Frequency : 520.05~607.9MHz; 614.1~697.9MHz

*for*

APPLICANT : Mascot Electric Co., Ltd.

ADDRESS : No. 85 Chang Hsing First Street, Tai-tzu Village,  
Jen-Te Hsian, Tainan Hsien, Taiwan, R.O.C.

Test Performed by

ELECTRONICS TESTING CENTER (ETC) , TAIWAN

NO. 34. LIN 5, DINGFU VIL., LINKOU DIST.,

NEW TAIPEI CITY, TAIWAN, 24442, R.O.C.

TEL : (02)26023052 FAX : (02)26010910

[http:// www.etc.org.tw](http://www.etc.org.tw) ; e-mail:emc@etc.org.tw

Report Number : 14-04-RBF-056-04

## **TEST REPORT CERTIFICATION**

Applicant : Mascot Electric Co., Ltd.  
No. 85 Chang Hsing First Street, Tai-tzu Village, Jen-Te Hsian,  
Tainan Hsien, Taiwan, R.O.C.

Manufacturer : Mascot Electric Co., Ltd.  
No. 85 Chang Hsing First Street, Tai-tzu Village, Jen-Te Hsian,  
Tainan Hsien, Taiwan, R.O.C.

Description of EUT :

a) Type of EUT : Wireless Handheld Transmitter Microphone

b) Trade Name : MASCOT

c) Model No. : UF-9H

d) FCC ID : JEBUF-9H


e) Working Frequency : 520.05~607.9MHz; 614.1~697.9MHz


f) Power Supply : DC 1.5V Battery\*2

Regulation Applied: FCC Rules and Regulations Part 74 Subpart H

I HEREBY CERTIFY THAT; The data shown in this report were made in accordance with the procedures given in ANSI C63.4 and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

Issued Date : Jun. 18, 2014

Test Engineer :   
( Vincent Chang, Engineer )

Approve & Authorized Signer :   
S. S. Liou, Section Manager  
EMC Dept. II of ELECTRONICS  
TESTING CENTER, TAIWAN

# Table of Contents

Page

<b>1. GENERAL INFORMATION .....</b>	<b>1</b>
1.1 PRODUCT DESCRIPTION.....	1
1.2 TEST METHODOLOGY.....	1
1.3 TEST FACILITY .....	1
<b>2. REQUIREMENTS OF PROVISIONS .....</b>	<b>2</b>
2.1 DEFINITION .....	2
2.2 FREQUENCIES AVAILABLE .....	2
2.3 REQUIREMENTS FOR RADIO EQUIPMENT ON CERTIFICATION .....	2
2.4 LABELING REQUIREMENT.....	3
<b>3. OUTPUT POWER MEASUREMENT .....</b>	<b>4</b>
3.1 PROVISION APPLICABLE.....	4
3.2 MEASUREMENT PROCEDURE.....	4
3.3 TEST DATA.....	6
3.4 RESULT CALCULATION.....	7
3.5 TEST EQUIPMENT .....	7
<b>4. MODULATION CHARACTERISTICS .....</b>	<b>8</b>
4.1 PROVISIONS APPLICABLE .....	8
4.2 MEASUREMENT METHOD.....	8
4.3 MEASUREMENT INSTRUMENT.....	9
4.4 MEASUREMENT RESULT.....	9
<b>5. OCCUPIED BANDWIDTH OF EMISSION .....</b>	<b>11</b>
5.1 PROVISIONS APPLICABLE .....	11
5.2 MEASUREMENT METHOD.....	11
5.3 OCCUPIED BANDWIDTH TEST EQUIPMENT .....	11
5.4 BANDWIDTH MEASURED .....	12
<b>6. FIELD STRENGTH OF EMISSION.....</b>	<b>18</b>
6.1 PROVISIONS APPLICABLE .....	18
6.2 MEASUREMENT PROCEDURE.....	18
6.3 MEASURING INSTRUMENT.....	19
6.4 MEASURING DATA .....	20
6.5 OTHER EMISSION .....	28
6.6 RADIATED MEASUREMENT PHOTOS.....	31
<b>7. FREQUENCY STABILITY MEASUREMENT.....</b>	<b>32</b>
7.1 PROVISIONS APPLICABLE .....	32
7.2 MEASUREMENT PROCEDURE.....	32
7.3 MEASUREMENT INSTRUMENT.....	33
7.4 MEASUREMENT DATA.....	34
<b>8 CONDUCTED EMISSION MEASUREMENT .....</b>	<b>36</b>
8.1 STANDARD APPLICABLE.....	36

## 1. GENERAL INFORMATION

### 1.1 Product Description

- a) Type of EUT : Wireless Handheld Transmitter Microphone
- b) Trade Name : MASCOT
- c) Model No. : UF-9H
- d) FCC ID : JEBUF-9H
- e) Working Frequency : 520.05~607.9MHz; 614.1~697.9MHz
- f) Power Supply : DC 1.5V Battery\*2
- g) Emission Designator : 94K2F3E  
2M+2DK=2x(0.2kHz)+2x(46.9kHz)x1=94.2kHz
- h) Wireless Module : 2.4GHz RF Module CC2500 (FCC ID:JEBCC-2500)  
was installed inside.

### 1.2 Test Methodology

Both conducted and radiated testing were performed according to the procedures in chapter 13 of ANSI C63.4 (2003). Test also follow “TIA-603-C(2004)-Land Mobile FM or PM Communications Equipment Measurement and Performance Standards” and section 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, and 2.1055 of Part 2 of CFR 47.

### 1.3 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the roof top of Building at No.34, Lin 5, Dingfu Vil., Linkou Dist., New Taipei City, Taiwan 24442, R.O.C.

This site is FCC 2.948 listed and accepted in a letter dated Jan. 29, 2014.

Registration Number: 90589

## 2. REQUIREMENTS OF PROVISIONS

### 2.1 Definition

Intentional radiator:

A device that intentionally generates and emits radio frequency energy by radiation or induction.

### 2.2 Frequencies Available

According to sec. 74.802 of Part 74, the following frequencies are available for low power auxiliary station :

Frequencies (MHz)	
26.100-26.480	455.000-456.000
54.000-72.000	470.000-488.000
76.000-88.000	488.000-494.000
161.625-161.775	494.000-608.000
174.000-216.000	614.000-806.000
450.000-451.000	944.000-952.000

### 2.3 Requirements for Radio Equipment on Certification

#### (1) RF Output Power

For transmitters, the power output shall be measured at the RF output terminals.

#### (2) Modulation Characteristics

For Voice Modulated Communication Equipment, a curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted.

#### (3) Occupied Bandwidth

For radiotelephone transmitter, other than single sideband or independent sideband transmitter, when modulated by a 2.5kHz tone at an input level 16 dB greater than that necessary to produce 50 percent modulation.

#### (4) Spurious Emissions at Antenna Terminals

The radio frequency voltage or power generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminal when properly loaded with a suitable artificial antenna.

**(5) Field Strength of Spurious Emissions**

Measurements shall be made to detect spurious emission that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal condition of installation and operation.

**(6) Frequencies Tolerance**

- a) The frequency stability shall be measured with variation of ambient temperature.
- b) The frequency stability shall be measured with variation of primary supply voltage.

**2.4 Labeling Requirement**

Each equipment for which a type acceptance application is filed on or after May 1,1981, shall bear an identification plate or label pursuant to § 2.925 ( Identification of equipment ) and §2.926 ( FCC identifier ) .

### 3. OUTPUT POWER MEASUREMENT

#### 3.1 Provision Applicable


According to §74.861(e)(1)(ii), the output power shall not exceed 250 milliwatts.

#### 3.2 Measurement Procedure

1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively, adjusting the input voltage to produce the maximum power.
2. Adjust the analyzer for each frequency measured in chapter 6 on a 1 MHz frequency span and 1MHz resolution bandwidth.
3. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° , and record the highest value indicated on spectrum analyzer as reference value.
4. Repeat step 3 until all frequencies need to be measured were complete.
5. Repeat step 4 with search antenna in vertical polarized orientations.
6. Replace the EUT with a tuned dipole antenna (horn antenna for above 1 GHz) relative to each frequency in horizontally polarized orientation and as the same polarized orientation with search antenna. Connect the tuned dipole antenna to a standard signal generator (SG) via a low loss cable. Power on the SG and tune the right frequency in measuring as well as set SG at a appreciated output level. Rise and lower the search antenna to get the highest value on spectrum analyzer, and then hold this position. Adjust the SG output to get a identical value derived from step 3 on spectrum analyzer. Record this value for result calculated.
7. Repeat step 6 until all frequencies need to be measured were complete.
8. Repeat step 7 with both dipole antenna (horn antenna for above 1 GHz) and search antenna in vertical polarized orientations.




Figure 1 : Frequencies measured below 1 GHz configuration

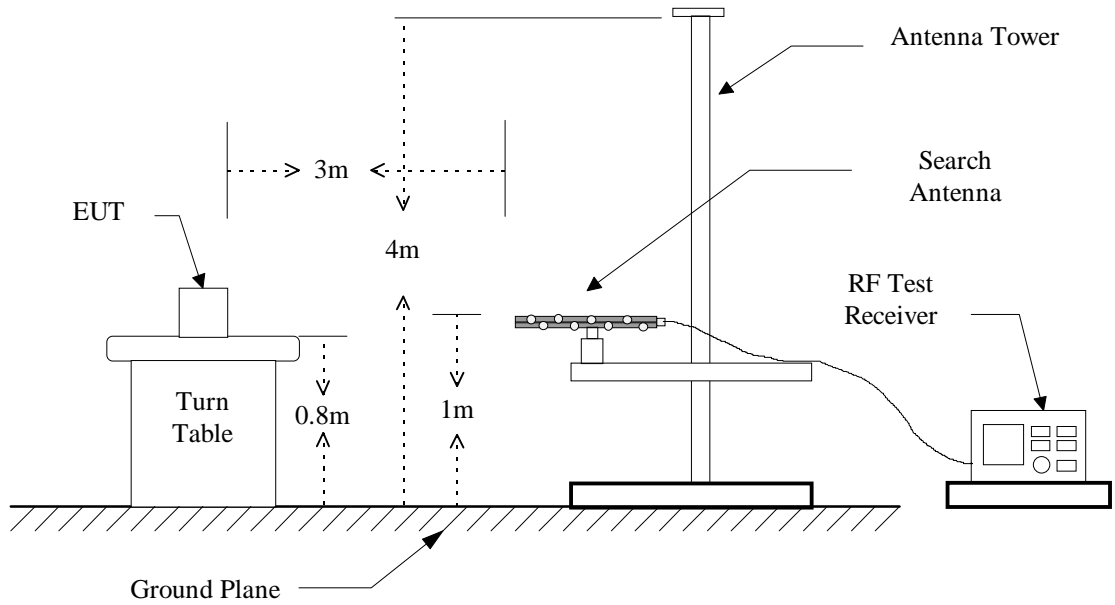

Note: For substitution method, replace the EUT with a tuned dipole antenna relative to each frequency and connect to a standard signal generator (SG) via a low loss cable.

Figure 2 : Frequencies measured above 1 GHz configuration

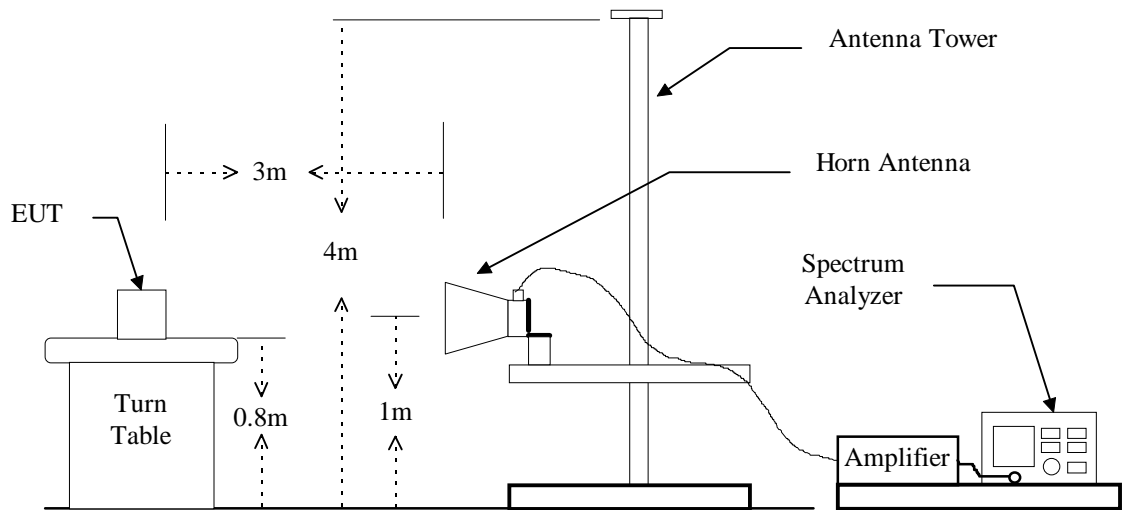

Note: For substitution method, replace the EUT with a horn antenna and connect to a standard signal generator (SG) via a low loss cable.

### 3.3 Test Data

Operated mode : TX  
Temperature : 25 °C

Test Date : May 27, 2014  
Humidity : 60 %

Frequency (MHz)	Meter Reading (dB $\mu$ V/m)	SG Reading (dBm)	Cable Loss (dB)	Antenna Gain	Result (dBm)	Output Power (mW)	Limit (mW)
520.050	83.1	10.3	2.0	----	8.3	6.761	250.0

Frequency (MHz)	Meter Reading (dB $\mu$ V/m)	SG Reading (dBm)	Cable Loss (dB)	Antenna Gain	Result (dBm)	Output Power (mW)	Limit (mW)
607.900	81.5	11.3	2.2	----	9.1	8.128	250.0

Frequency (MHz)	Meter Reading (dB $\mu$ V/m)	SG Reading (dBm)	Cable Loss (dB)	Antenna Gain	Result (dBm)	Output Power (mW)	Limit (mW)
614.100	81.3	10.9	2.3	----	8.6	7.244	250.0

Frequency (MHz)	Meter Reading (dB $\mu$ V/m)	SG Reading (dBm)	Cable Loss (dB)	Antenna Gain	Result (dBm)	Output Power (mW)	Limit (mW)
697.900	81.5	11.9	2.3	----	9.6	9.120	250.0

**Note: For measured frequency below 1GHz, a tuned dipole antenna is used.**

### 3.4 Result Calculation

Result calculation is as following :

Result = SG Reading + Cable Loss + Antenna Gain Corrected

Antenna Gain Corrected : is used for antenna other than dipole to convert radiated power to ERP.

$$\text{mW} = \log^{-1}\left[\frac{\text{Result(dBm)}}{10}\right]$$

### 3.5 Test Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
EMI Test Receiver	Rohde & Schwarz	ESL	2013/09/11	2014/09/10
Biconical Antenna	EMCO	3110	2013/10/25	2014/10/24
Log-periodic Antenna	EMCO	3146	2013/10/25	2014/10/24
Amplifier	HP	8447D	2013/08/08	2014/08/07
Signal generator	HP	83732B	2013/09/14	2014/09/13

## 4. MODULATION CHARACTERISTICS

### 4.1 Provisions Applicable

According to § 2.1047 (a), for Voice Modulated Communication Equipment, the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be measured.

### 4.2 Measurement Method


#### A) Modulation Limit

1. Position the EUT as shown in figure 3, adjust the audio input frequency to 100 Hz and the input level from 0V to maximum permitted input voltage with recording each carrier frequency deviation responding to respective input level.
2. Repeat step 1 with changing the input frequency for 200, 500, 1000, 3000, and 5000 Hz in sequence.

#### B) Frequency response of all circuits

1. Position the EUT as shown in figure 3.
2. Vary the modulating frequency from 100 Hz to 15000 Hz with constant input voltage (derived from 5.4(a) of this test report), and observe the change in output.

Figure 3 : Modulation characteristic measurement configuration

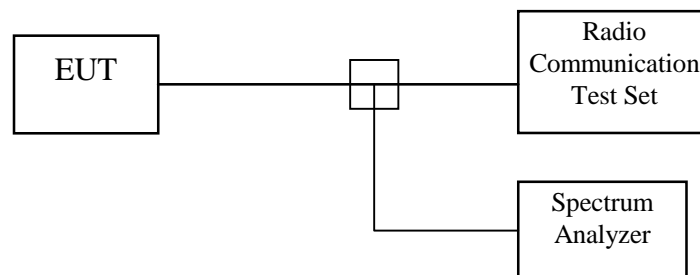

### 4.3 Measurement Instrument

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Communications Service Monitor	AEROFLEX	2945B	2014/05/13	2015/05/12
Spectrum Analyzer	Rohde & Schwarz	FSP40	2014/01/21	2015/01/20

### 4.4 Measurement Result


RF Frequency : 607.900MHz;

Test Date : May 27, 2014


Temperature : 25 °C

Humidity : 60 %


A). Frequency response

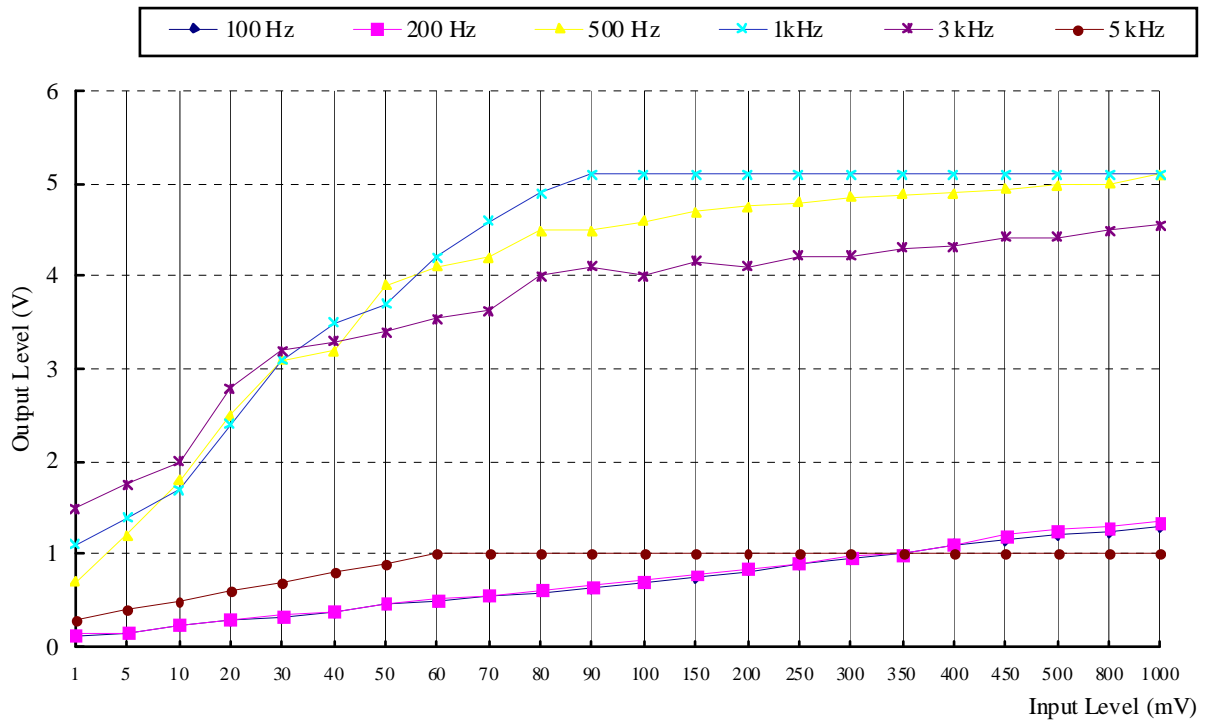

B). Modulation Limit

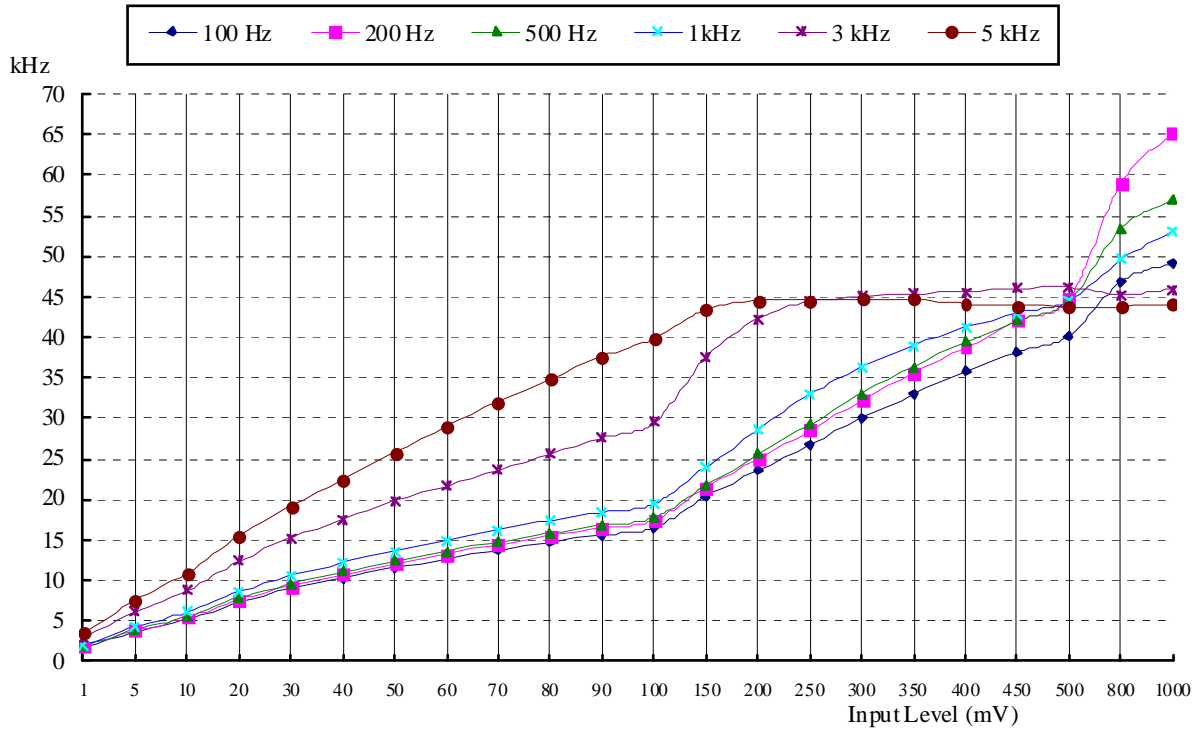

C). Frequency response of all circuits

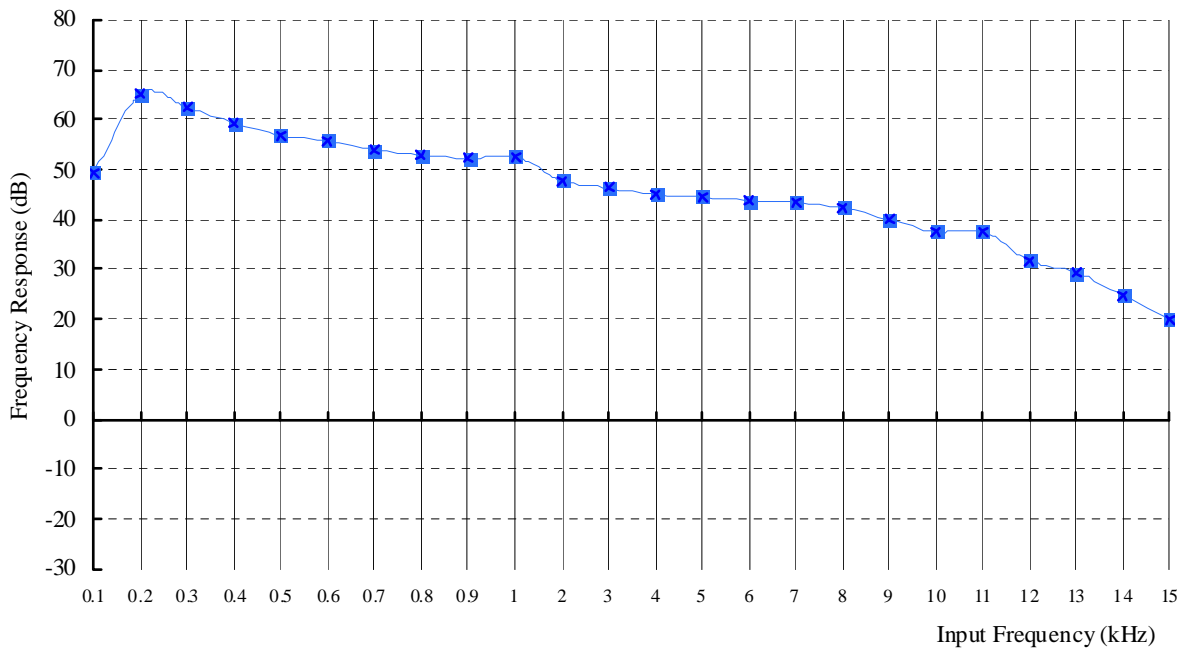

## 5. OCCUPIED BANDWIDTH OF EMISSION

### 5.1 Provisions Applicable


According to §2.1049 (c)(1), For radiotelephone transmitter, other than single sideband or independent sideband transmitter, when modulated by a 2.5kHz tone at an input level 16 dB greater than that necessary to produce 50 percent modulation.

According to §74.861( e)(5), the frequency emission bandwidth shall not exceed 200 kHz.

### 5.2 Measurement Method

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4, and Install new batteries in the EUT. Turn on the EUT and set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Apply a 2.5 kHz modulation signal to EUT and measure the frequencies of the modulated signal from the EUT where it is the specified number of dB below the reference level set in step 2. This is the occupied bandwidth specified.

Figure 4 : Occupied bandwidth measurement configuration

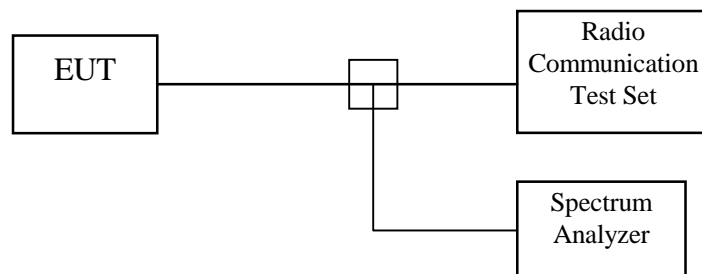

### 5.3 Occupied Bandwidth Test Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Communications Service Monitor	AEROFLEX	2945B	2014/05/13	2015/05/12
Spectrum Analyzer	Rohde & Schwarz	FSP40	2014/01/201	2015/01/20

## 5.4 Bandwidth Measured

### 5.4.1 Input Level Derived


**RF Frequency : 607.900MHz;**

Test Date : May 27, 2014

Temperature : 25 °C

Humidity : 60 %

Input Audio Frequency : 2.5 kHz, Sine Wave

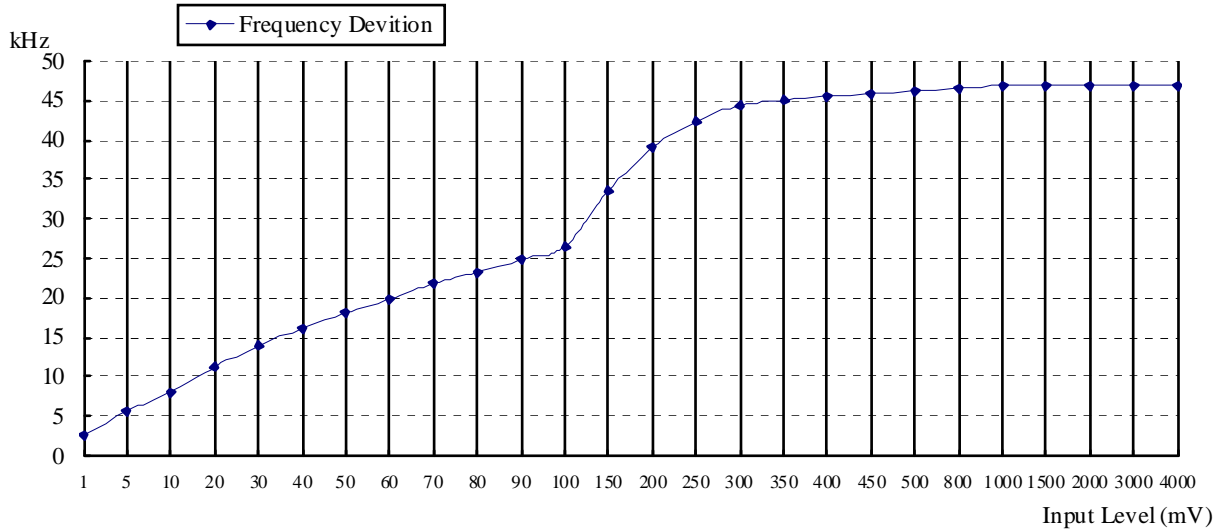

The Level input to produce 50% modulation is 70 mV, therefore the magnitude 16 dB greater than it is 441.7 mV.



**5.4.2 Occupied Bandwidth Plotted**Test Date : May 27, 2014Temperature : 25 °CHumidity : 60 %

<b>RF Frequency (MHz)</b>	<b>26 dB Bandwidth (kHz)</b>
520.050	97.5
607.900	97.0
614.100	97.5
697.900	97.0




\*RBW 3 kHz      Delta 1 [T1 ]  
VBW 10 kHz      0.30 dB  
SWT 30 ms      97.50000000 kHz

Ref -10 dBm

Att 20 dB


1 PK  
VIEW

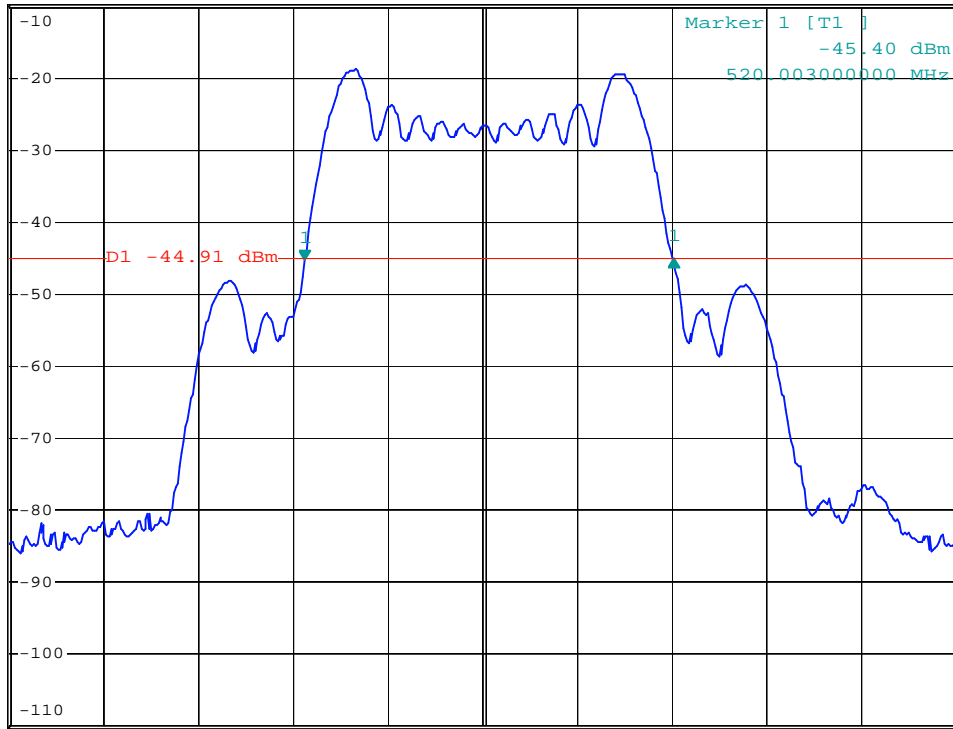

Center 520.05 MHz

25 kHz/

Span 250 kHz

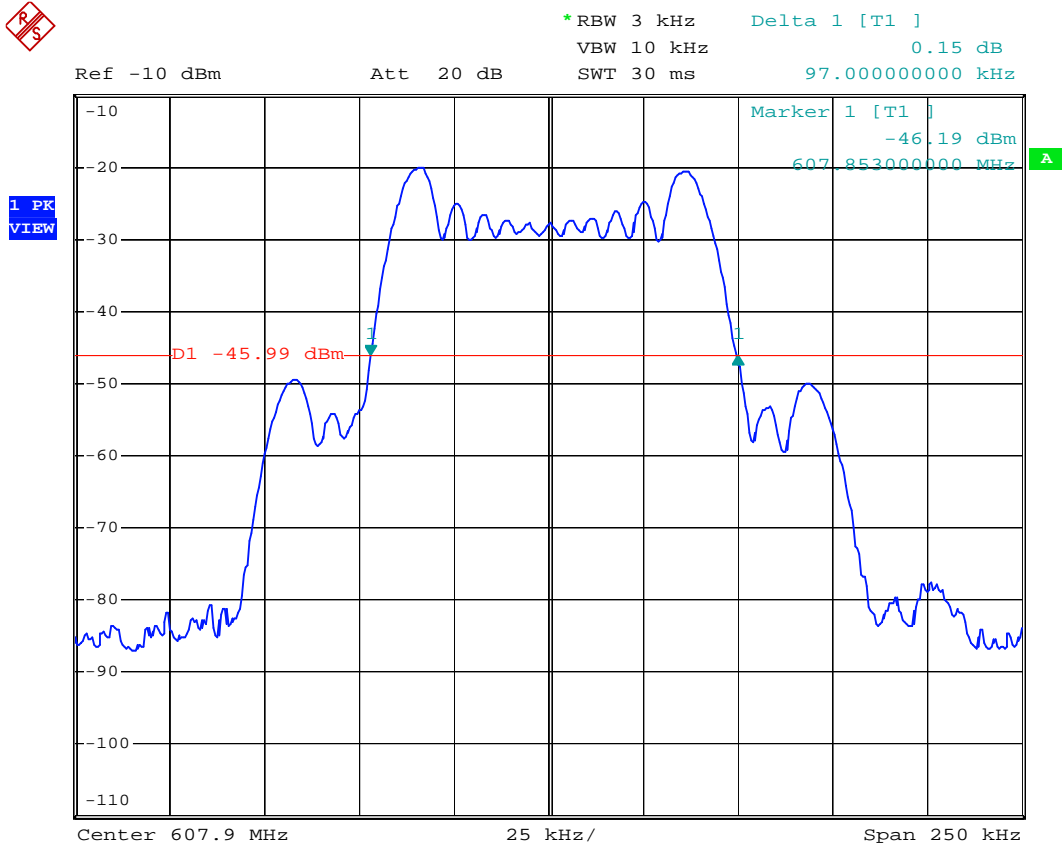




\*RBW 3 kHz      Delta 1 [T1 ]  
VBW 10 kHz      -1.45 dB  
SWT 30 ms      97.50000000 kHz

Ref -10 dBm

Att 20 dB

1 PK  
VIEW

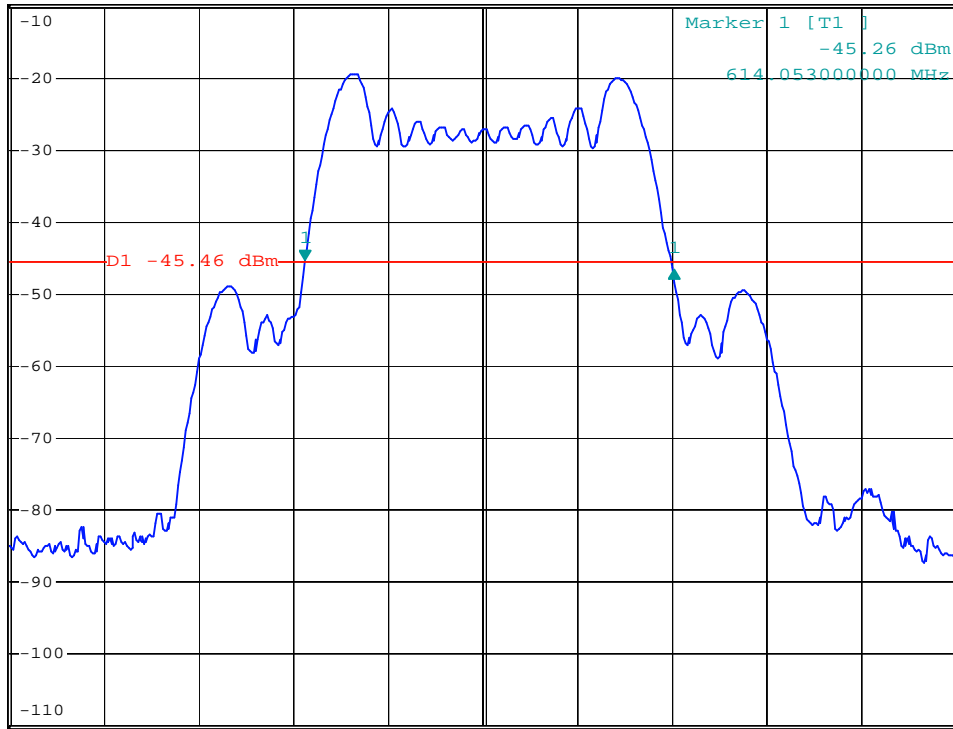




\*RBW 3 kHz      Delta 1 [T1 ]  
VBW 10 kHz      -0.09 dB  
SWT 30 ms      97.00000000 kHz

Ref -10 dBm

Att 20 dB

1 PK  
VIEW

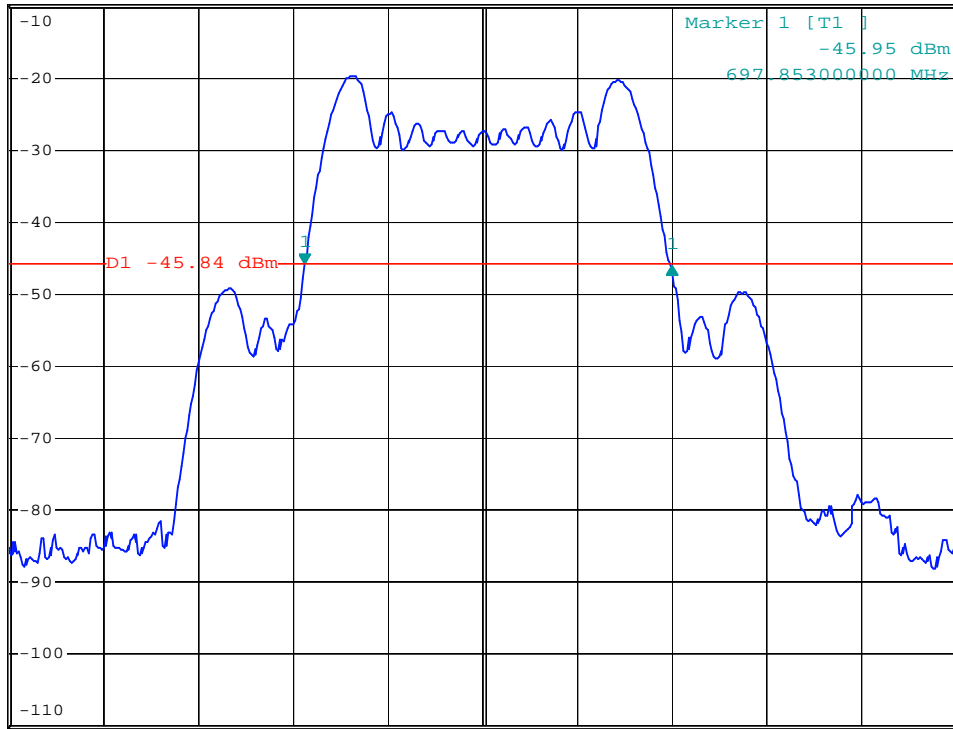

## 6. FIELD STRENGTH OF EMISSION

### 6.1 Provisions Applicable

According to §2.1053, measurements shall be made to detect spurious emission that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal condition of installation and operation. Information submitted shall include the relative radiated power of spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from a halfwave dipole antenna.

According to §74.861(e)(6), the mean power of emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

- (i) on any frequency removed from the operating frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: at least 25 dB.
- (ii) on any frequency removed from the operating frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: at least 35 dB.
- (iii) on any frequency removed from the operating frequency by more than 250 percent of the authorized bandwidth shall be attenuated below the unmodulated carrier by at least 43 plus 10 Log(output power in watts) dB.

### 6.2 Measurement Procedure

1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively, adjusting the input voltage to produce the maximum power as measured in chapter 3.
2. Adjust the analyzer for each frequency measured in chapter 6 on a 1 MHz frequency span and 1MHz resolution bandwidth.
3. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° , and record the highest value indicated on spectrum analyzer as reference value.
4. Repeat step 3 until all frequencies need to be measured were complete.
5. Repeat step 4 with search antenna in vertical polarized orientations.
6. Replace the EUT with a tuned dipole antenna (horn antenna for above 1 GHz) relative to each frequency in horizontally polarized orientation and as the same polarized orientation with search antenna. Connect the tuned dipole antenna to a standard signal generator (SG) via a low loss cable. Power on the SG and tune the right frequency in measuring as well as set SG at a appreciated output level. Rise and lower the search antenna to get the highest value on spectrum analyzer, and then hold this position. Adjust the SG output to get a identical value derived from step 3 on spectrum analyzer. Record this value for result calculated.

7. Repeat step 6 until all frequencies need to be measured were complete.
8. Repeat step 7 with both dipole antenna (horn antenna for above 1 GHz) and search antenna in vertical polarized orientations.

### 6.3 Measuring Instrument

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2014/01/21	2015/01/20
Double Ridged Antenna	EMCO	3115	2013/08/02	2014/08/01
Double Ridged Antenna	EMCO	3115	2013/08/02	2014/08/01
Log-periodic Antenna	EMCO	3146	2013/10/25	2014/10/24
Biconical Antenna	EMCO	3110	2013/10/25	2014/10/24
Amplifier	HP	8449B	2014/01/15	2015/01/14
Amplifier	HP	8447D	2013/08/08	2014/08/07
Signal generator	HP	83732B	2013/09/14	2014/09/13

Measuring instrument setup in frequency band measured is as following :

Frequency Band (MHz)	Instrument	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	Spectrum Analyzer	Peak	100 kHz	100 kHz
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz

## 6.4 Measuring Data

### 6.4.1. Emission Test Data

#### a. Tx Frequency: 520.050MHz

Operated mode : TX  
Temperature : 25°C

Test Date : May 27, 2014  
Humidity : 60%

Unmodulated carrier output power is 8.3 dBm , or 6.761 mW (ERP).

The limit of spurious or harmonics is calculated as following :

$$8.3 - [43 + 10 \log(\text{carrier output power in W})], \text{ or } -13 \text{ dBm}$$

Frequency (MHz)	Meter Reading (dBuV)		SG Reading (dBm)		Antenna Gain	Antenna Gain Corr'	Cable Loss (dB)	Result (dBm)		Limit (dBm)	Margin (dB)
	H	V	H	V				H	V		
1040.100	57.5	58.9	-54.9	-53.5	5.9	-2.0	2.1	-53.1	-51.7	-13.0	-38.7
1560.150	---	---	---	---	7.8	-2.0	2.6	---	---	-13.0	---
2080.200	---	---	---	---	7.8	-2.0	3.1	---	---	-13.0	---
2600.250	---	---	---	---	9.2	-2.0	3.4	---	---	-13.0	---
3120.300	---	---	---	---	9.0	-2.0	3.8	---	---	-13.0	---
3640.350	---	---	---	---	9.3	-2.0	4.1	---	---	-13.0	---
4160.400	---	---	---	---	9.3	-2.0	4.4	---	---	-13.0	---
4680.450	---	---	---	---	9.9	-2.0	4.7	---	---	-13.0	---
5200.500	---	---	---	---	9.8	-2.0	5.0	---	---	-13.0	---

Note :

1. Remark “---“ means that the emission level is too weak to be detected.
2. For measured frequency below 1GHz, a tuned dipole antenna is used.
3. Result calculation is as following :

$$\text{Result} = \text{SG Reading} - \text{Cable Loss} + \text{Antenna Gain} + \text{Antenna Gain Corrected}$$

Antenna Gain Corrected : is used for antenna other than dipole to convert radiated power to ERP.



**b. Tx Frequency: 607.900 MHz**

Operated mode : TX  
Temperature : 25°C

Test Date : May 27, 2014  
Humidity : 60%

Unmodulated carrier output power is 9.1 dBm , or 8.128 mW (ERP).

The limit of spurious or harmonics is calculated as following :

$$9.1 - [43 + 10 \log(\text{carrier output power in W})], \text{ or } -13 \text{ dBm}$$

Frequency (MHz)	Meter Reading (dBUV)		SG Reading (dBm)		Antenna Gain	Antenna Gain Corr'	Cable Loss (dB)	Result (dBm)		Limit (dBm)	Margin (dB)
	H	V	H	V				H	V		
1215.800	57.4	58.7	-54.3	-52.9	6.6	-2.0	2.3	-52.0	-50.6	-13.0	-37.6
1823.700	---	---	---	---	7.6	-2.0	2.8	---	---	-13.0	---
2431.600	---	---	---	---	9.0	-2.0	3.3	---	---	-13.0	---
3039.500	---	---	---	---	8.9	-2.0	3.7	---	---	-13.0	---
3647.400	---	---	---	---	9.3	-2.0	4.1	---	---	-13.0	---
4255.300	---	---	---	---	9.5	-2.0	4.4	---	---	-13.0	---
4863.200	---	---	---	---	9.7	-2.0	4.8	---	---	-13.0	---
5471.100	---	---	---	---	10.0	-2.0	5.1	---	---	-13.0	---
6079.000	---	---	---	---	10.8	-2.0	5.3	---	---	-13.0	---

Note :

1. Remark “---“ means that the emission level is too weak to be detected.
2. For measured frequency below 1GHz, a tuned dipole antenna is used.
3. Result calculation is as following :

$$\text{Result} = \text{SG Reading} - \text{Cable Loss} + \text{Antenna Gain} + \text{Antenna Gain Corrected}$$

Antenna Gain Corrected : is used for antenna other than dipole to convert radiated power to ERP.

**c. Tx Frequency: 614.100 MHz**

Operated mode : TX  
 Temperature : 25°C

Test Date : May 27, 2014  
 Humidity : 60%

Unmodulated carrier output power is 8.6 dBm , or 7.244 mW (ERP).

The limit of spurious or harmonics is calculated as following :

$$8.6 - [43 + 10 \log(\text{carrier output power in W})], \text{ or } -13 \text{ dBm}$$

Frequency (MHz)	Meter Reading (dBuV)		SG Reading (dBm)		Antenna Gain	Antenna Gain Corr'	Cable Loss (dB)	Result (dBm)		Limit (dBm)	Margin (dB)
	H	V	H	V				H	V		
1228.200	57.1	58.2	-54.5	-53.4	6.6	-2.0	2.3	-52.2	-51.1	-13.0	-38.1
1842.300	---	---	---	---	7.6	-2.0	2.9	---	---	-13.0	---
2456.400	---	---	---	---	9.1	-2.0	3.3	---	---	-13.0	---
3070.500	---	---	---	---	9.0	-2.0	3.8	---	---	-13.0	---
3684.600	---	---	---	---	9.2	-2.0	4.1	---	---	-13.0	---
4298.700	---	---	---	---	9.6	-2.0	4.5	---	---	-13.0	---
4912.800	---	---	---	---	9.7	-2.0	4.8	---	---	-13.0	---
5526.900	---	---	---	---	10.0	-2.0	5.1	---	---	-13.0	---
6141.000	---	---	---	---	10.8	-2.0	5.4	---	---	-13.0	---

Note :

1. Remark “---“ means that the emission level is too weak to be detected.
2. For measured frequency below 1GHz, a tuned dipole antenna is used.
3. Result calculation is as following :

$$\text{Result} = \text{SG Reading} - \text{Cable Loss} + \text{Antenna Gain} + \text{Antenna Gain Corrected}$$

Antenna Gain Corrected : is used for antenna other than dipole to convert radiated power to ERP.

**d. Tx Frequency: 697.900 MHz**

Operated mode : TX  
 Temperature : 25°C

Test Date : May 27, 2014  
 Humidity : 60%

Unmodulated carrier output power is 9.6 dBm , or 9.120 mW (ERP).

The limit of spurious or harmonics is calculated as following :

$$9.6 - [43 + 10 \log(\text{carrier output power in W})], \text{ or } -13 \text{ dBm}$$

Frequency (MHz)	Meter Reading (dBuV)		SG Reading (dBm)		Antenna Gain	Antenna Gain Corr'	Cable Loss (dB)	Result (dBm)		Limit (dBm)	Margin (dB)
	H	V	H	V				H	V		
1395.800	57.2	58.6	-53.7	-52.2	7.3	-2.0	2.5	-50.9	-49.4	-13.0	-36.4
2093.700	---	---	---	---	7.8	-2.0	3.1	---	---	-13.0	---
2791.600	---	---	---	---	9.1	-2.0	3.6	---	---	-13.0	---
3489.500	---	---	---	---	9.4	-2.0	4.0	---	---	-13.0	---
4187.400	---	---	---	---	9.3	-2.0	4.4	---	---	-13.0	---
4885.300	---	---	---	---	9.7	-2.0	4.8	---	---	-13.0	---
5583.200	---	---	---	---	10.1	-2.0	5.1	---	---	-13.0	---
6281.100	---	---	---	---	10.9	-2.0	5.4	---	---	-13.0	---
6979.000	---	---	---	---	10.5	-2.0	5.8	---	---	-13.0	---


Note :


1. Remark “---“ means that the emission level is too weak to be detected.
2. For measured frequency below 1GHz, a tuned dipole antenna is used.
3. Result calculation is as following :


$$\text{Result} = \text{SG Reading} - \text{Cable Loss} + \text{Antenna Gain} + \text{Antenna Gain Corrected}$$

Antenna Gain Corrected : is used for antenna other than dipole to convert radiated power to ERP.

### 6.4.2 Emission mask plots

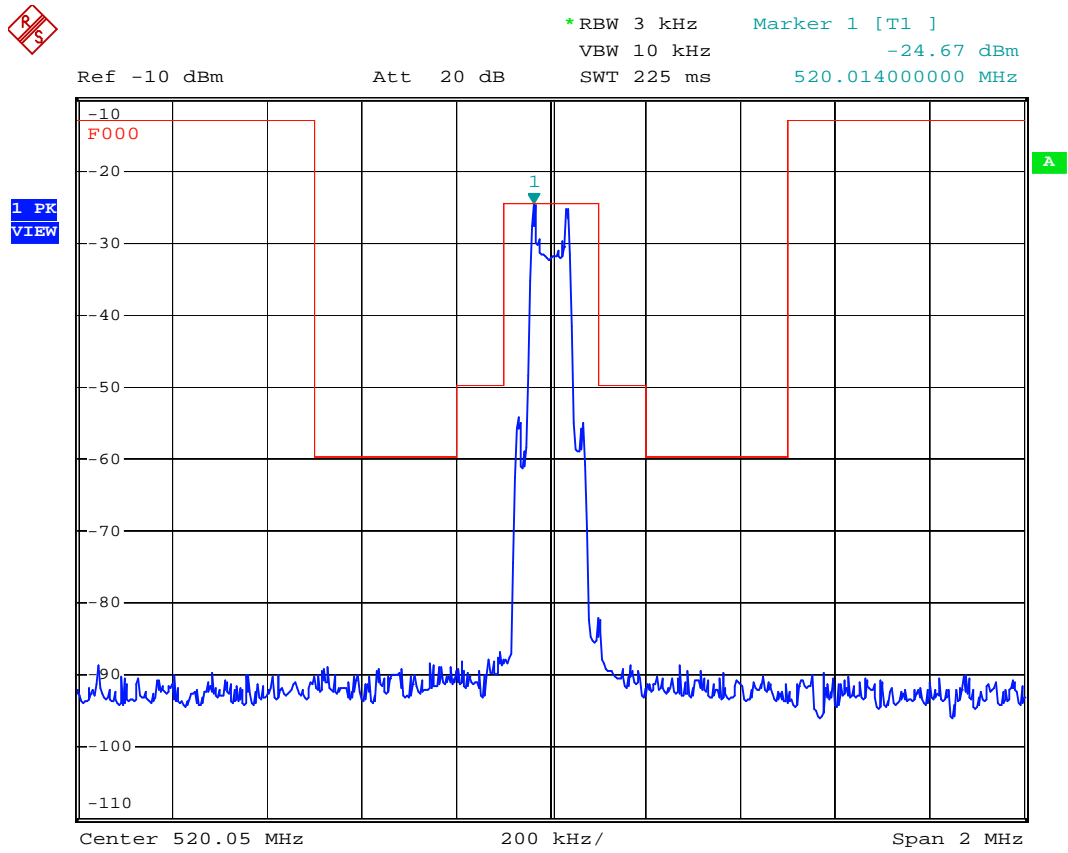


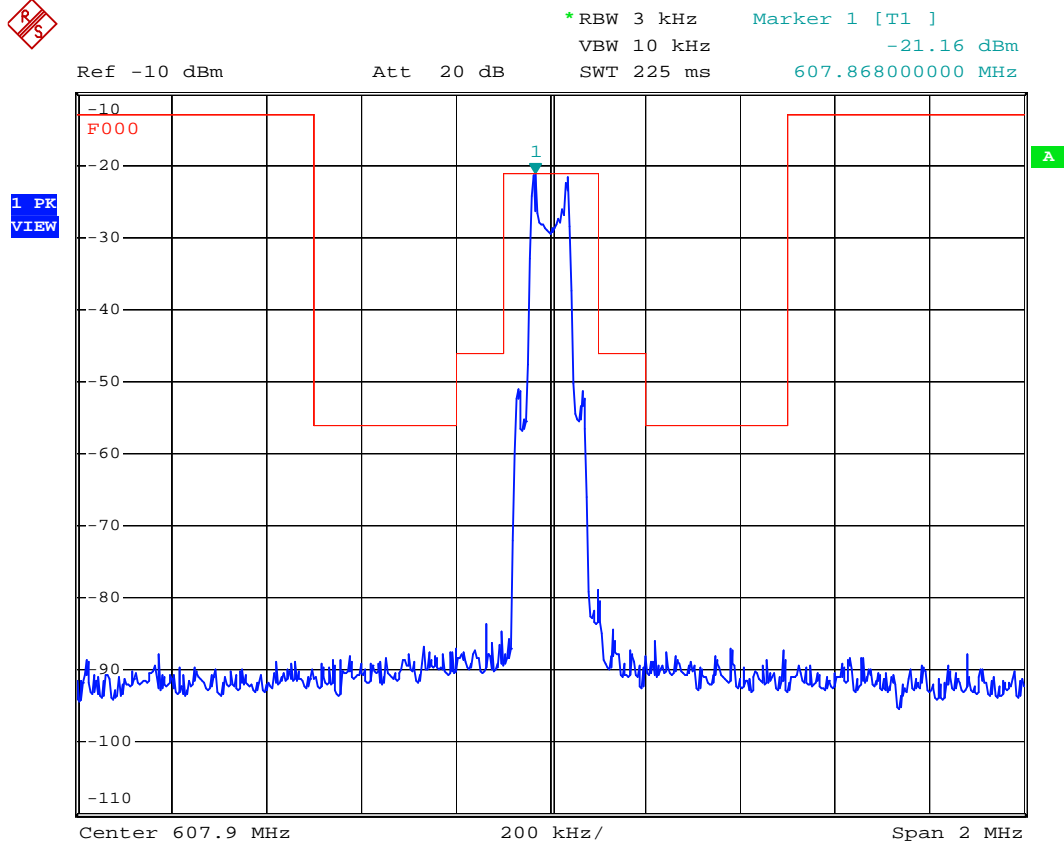

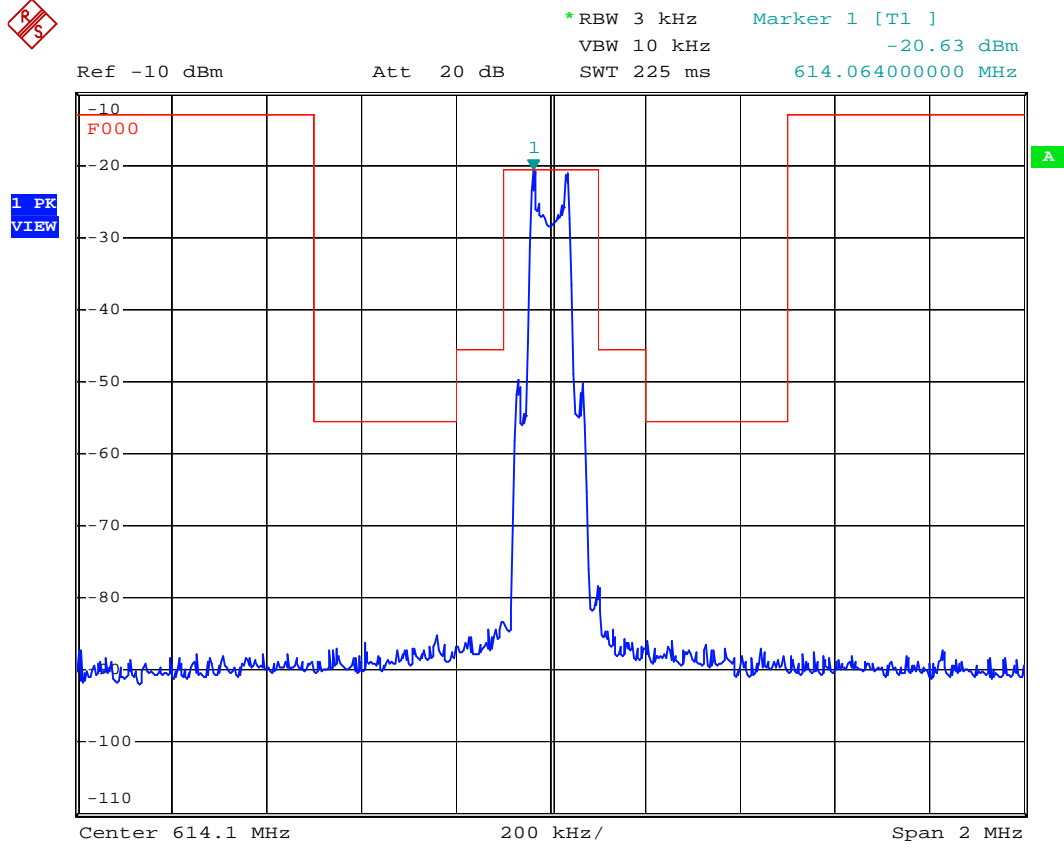



Ref -10 dBm      Att 20 dB      \*RBW 3 kHz      Marker 1 [T1 ]  
VBW 10 kHz      -22.04 dBm  
SWT 225 ms      697.864000000 MHz

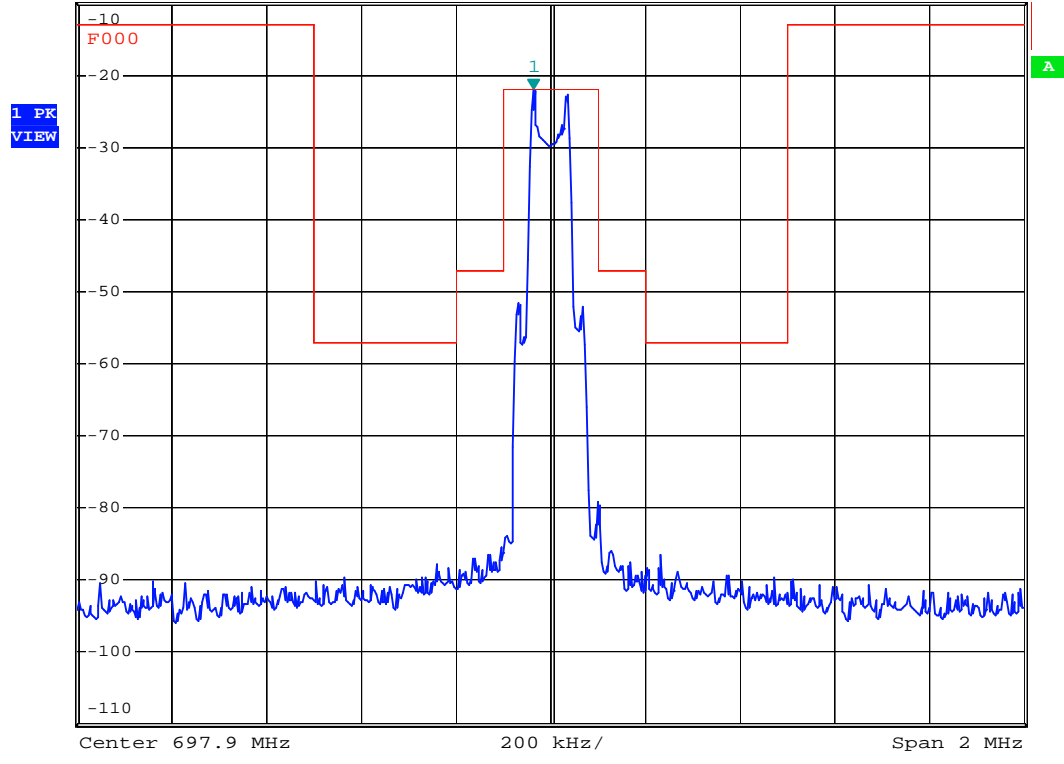


### 6.5 Other Emission

a) Emission frequencies below 1 GHz

Test Date : May 27, 2014

Temperature : 25°C

Humidity : 60 %

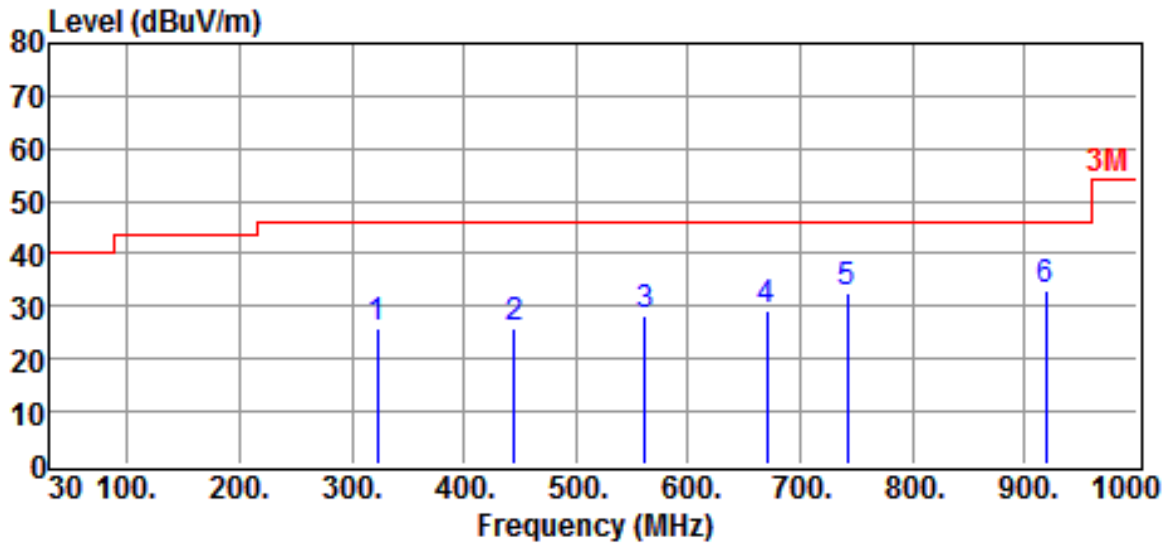


Site	:OPEN SITE	Date	:2014-05-27
EUT	:UHF Wireless Microphone	Ant. Pol.	:HORIZONTAL
Model	:UF-9H	Detector	:
Power Rating	:DC 1.5V *2	Engineer	:VC
Limit	:3M	Temp.	:25 °C
Memo	:TX MODE	Humi.	:60 %

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
322.9400	8.4	17.6	26.0	46.0	-20.0	Peak
445.1600	5.6	20.2	25.8	46.0	-20.2	Peak
561.5600	5.9	22.4	28.3	46.0	-17.7	Peak
670.2000	5.1	24.4	29.5	46.0	-16.5	Peak
741.9800	6.7	25.6	32.3	46.0	-13.7	Peak
918.5200	4.7	28.3	33.0	46.0	-13.0	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit - Result



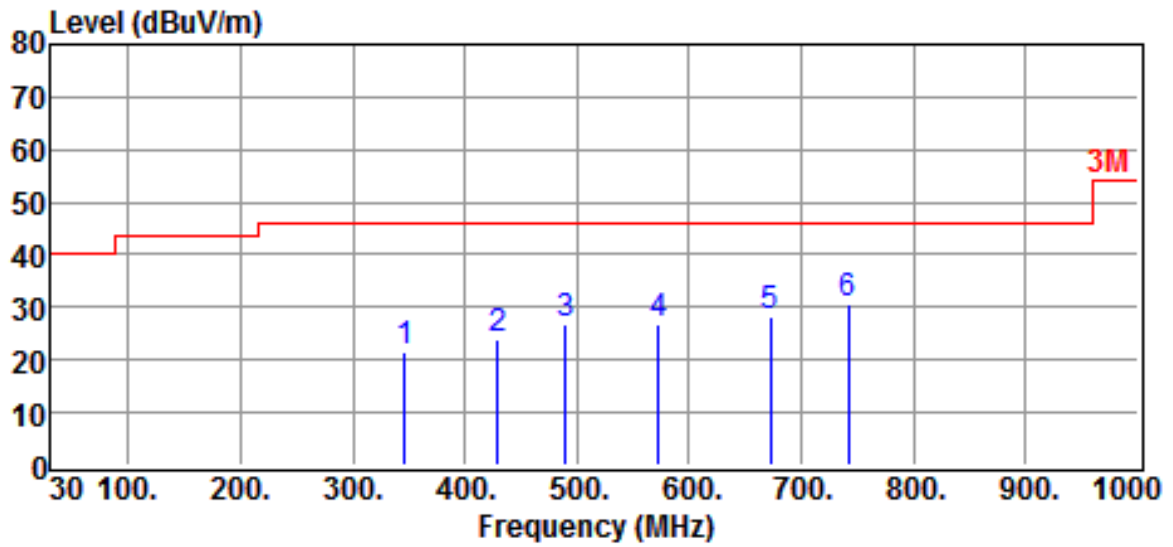

Site	:OPEN SITE	Date	:2014-05-27
EUT	:UHF Wireless Microphone	Ant. Pol.	:VERTICAL
Model	:UF-9H	Detector	:
Power Rating	:DC 1.5V *2	Engineer	:VC
Limit	:3M	Temp.	:25 °C
Memo	:TX MODE	Humi.	:60 %

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
346.2200	3.7	17.8	21.5	46.0	-24.5	Peak
429.6400	4.0	19.9	23.9	46.0	-22.1	Peak
489.7800	5.3	21.3	26.6	46.0	-19.4	Peak
573.2000	4.4	22.6	27.0	46.0	-19.0	Peak
672.1400	4.1	24.4	28.5	46.0	-17.5	Peak
741.9800	4.8	25.6	30.4	46.0	-15.6	Peak

- Note :
1. Result = Reading + Corrected Factor
  2. Corrected Factor = Antenna Factor + Cable Loss
  3. The margin value=Limit - Result

b) Emission frequencies above 1 GHz

Radiated emission frequencies above 1 GHz to 25 GHz were too low to be measured with a pre-amplifier of 35 dB.

## 6.6 Radiated Measurement Photos



## 7. FREQUENCY STABILITY MEASUREMENT

### 7.1 Provisions Applicable

According to §2.1055 (a)(1), the frequency stability shall be measured with variation of ambient temperature from  $-30^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  centigrade, and according to §2.1055 (d)(2), the frequency stability shall be measured with variation of primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

According to §74.861(e)(4), the frequency tolerance of the transmitter shall be 0.005 percent.

### 7.2 Measurement Procedure

#### A) Frequency stability versus environmental temperature


1. Setup the configuration per figure 5 for frequencies measured at ambient temperature if it is within  $15^{\circ}\text{C}$  to  $25^{\circ}\text{C}$ . Otherwise, an environmental chamber set for a temperature of  $20^{\circ}\text{C}$  shall be used.
2. Turn on EUT and set SA center frequency to the right frequency needs to be measured. Then set SA RBW to 30 kHz, VBW to 100kHz and frequency span to 500 kHz. Record this frequency to be a reference.
3. Set the temperature of chamber to  $50^{\circ}\text{C}$ . Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
4. Repeat step 2 with a  $10^{\circ}\text{C}$  decreased per stage until the lowest temperature  $-30^{\circ}\text{C}$  is measured, record all measurement frequencies.

#### B) Frequency stability versus input voltage

1. Setup the configuration per figure 7 for frequencies measured at ambient temperature if it is within  $15^{\circ}\text{C}$  to  $25^{\circ}\text{C}$ . Otherwise, an environmental chamber set for a temperature of  $20^{\circ}\text{C}$  shall be used. Install new batteries in the EUT.

2. Set SA center frequency to the right frequency needs to be measured. Then set SA RBW to 30 kHz, VBW to 100kHz and frequency span to 500 kHz. Record this frequency to be a reference.
  
3. For non hand carried, battery operated device, supply the EUT primary voltage with 85 and 115 percent of the nominal value and record the frequency.

Figure 5 : Frequency stability measurement configuration

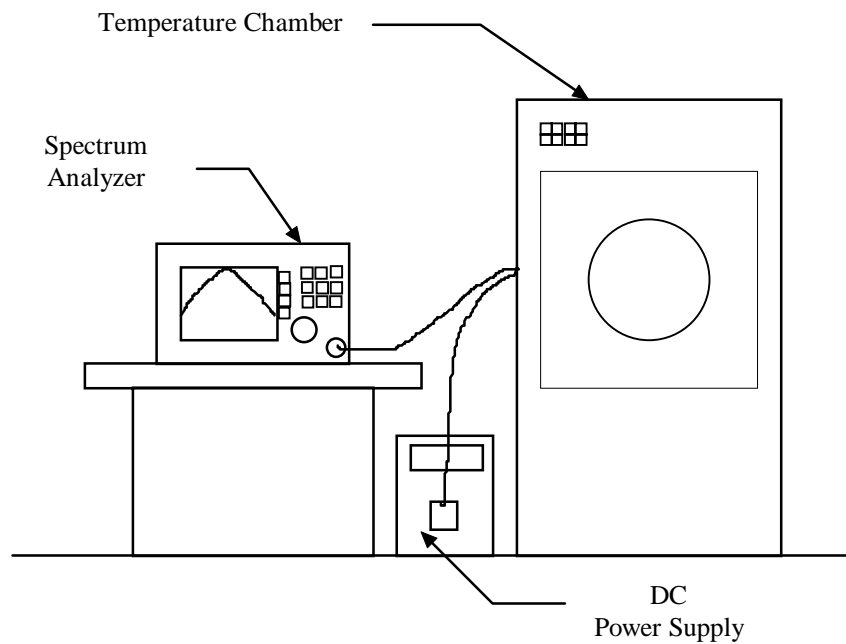

### 7.3 Measurement Instrument

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2014/01/21	2015/01/20
Temperature Chamber	MALLIER	MCT-2X-M	2014/05/03	2015/05/02

**7.4 Measurement Data**Test Date : May 27, 2014Temperature : 25 °CHumidity : 60 %**A. Tx Frequency 520.050MHz****A1. Frequency stability versus environment temperature**

Reference Frequency :520.050 MHz		Limit : 0.005%					
Environment Temperature (°C)	Power Supplied (Vdc)	Frequency measured with time elapsed					
		2 minute		5 minute		10 minute	
		(MHz)	(%)	(MHz)	(%)	(MHz)	(%)
50	3.0	520.0661	0.00310	520.0660	0.00307	520.0658	0.00304
40		520.0642	0.00272	520.0615	0.00221	520.0613	0.00217
30		520.0575	0.00144	520.0568	0.00131	520.0563	0.00121
20		520.0537	0.00072	520.0524	0.00045	520.0507	0.00014
10		520.0494	-0.00011	520.0487	-0.00025	520.0476	-0.00046
0		520.0456	-0.00086	520.0458	-0.00082	520.0442	-0.00112
-10		520.0429	-0.00137	520.0423	-0.00148	520.0414	-0.00166
-20		520.0377	-0.00236	520.0373	-0.00244	520.0355	-0.00278
-30		520.0341	-0.00305	520.0336	-0.00315	520.0332	-0.00323

**A2. Frequency stability versus supplied voltage (85% - 115%)**

Reference Frequency : 520.050 MHz		Limit : 0.005%					
Environment Temperature (°C)	Power Supplied (Vdc)	Frequency measured with time elapsed					
		2 minute		5 minute		10 minute	
		(MHz)	(%)	(MHz)	(%)	(MHz)	(%)
25	2.55	520.0603	0.00198	520.0591	0.00175	520.0585	0.00163
25	3.45	520.0597	0.00187	520.0588	0.00169	520.0579	0.00152

Test Date : May 27, 2014Temperature : 25 °CHumidity : 60 %**B. Tx Frequency 697.900MHz****B1. Frequency stability versus environment temperature**

Reference Frequency : 697.900MHz		Limit : 0.005%					
Environment Temperature (°C)	Power Supplied (Vdc)	Frequency measured with time elapsed					
		2 minute		5 minute		10 minute	
		(MHz)	(%)	(MHz)	(%)	(MHz)	(%)
50	3.0	697.9257	0.00368	697.9255	0.00365	697.9232	0.00332
40		697.9185	0.00265	697.9177	0.00254	697.9175	0.00251
30		697.9058	0.00084	697.9048	0.00069	697.9044	0.00063
20		697.9015	0.00022	697.9000	0.00000	697.9002	0.00003
10		697.8961	-0.00056	697.8955	-0.00064	697.8946	-0.00077
0		697.8906	-0.00135	697.8876	-0.00177	697.8874	-0.00181
-10		697.8841	-0.00228	697.8830	-0.00244	697.8831	-0.00242
-20		697.8825	-0.00251	697.8805	-0.00279	697.8793	-0.00297
-30		697.8768	-0.00332	697.8748	-0.00361	697.8747	-0.00362

**B2. Frequency stability versus supplied voltage (85% - 115%)**

Reference Frequency : 697.900MHz		Limit : 0.005%					
Environment Temperature (°C)	Power Supplied (Vdc)	Frequency measured with time elapsed					
		2 minute		5 minute		10 minute	
		(MHz)	(%)	(MHz)	(%)	(MHz)	(%)
25	2.55	697.9057	0.00082	697.9041	0.00059	697.9029	0.00041
25	3.45	697.9056	0.00081	697.9036	0.00052	697.9030	0.00043

## **8 CONDUCTED EMISSION MEASUREMENT**

### **8.1 Standard Applicable**

This EUT is excused from investigation of conducted emission, for it is powered by DC battery only. According to §15.207 (d), measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.