

47 CFR PART 15 SUBPART C TEST REPORT

for

Handheld Microphone

Model No.: UF-9R

FCC ID: JEBUF-9R1

of

Applicant: MASCOT ELECTRIC CO., LTD

**Address: No.85, Changxing 1st St., Rende Dist., Tainan City 71741,
Taiwan (R.O.C.)**

Tested and Prepared

by

Worldwide Testing Services (Taiwan) Co., Ltd.

FCC Registration No.: TW1477, TW1072

Industry Canada filed test laboratory Reg. No.: 20037, 5107A



Report No.: W6M22203-21663-C-1

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: wts@wts-lab.com




TABLE OF CONTENTS

1	GENERAL INFORMATION	2
1.1	NOTES.....	2
1.2	TESTING LABORATORY	3
1.2.1	Location	3
1.2.2	Details of accreditation status	3
1.3	DETAILS OF APPROVAL HOLDER.....	3
1.4	APPLICATION DETAILS	4
1.5	GENERAL INFORMATION OF TEST ITEM.....	4
1.6	TEST STANDARDS.....	4
2	TECHNICAL TEST	5
2.1	SUMMARY OF TEST RESULTS	5
2.2	TEST ENVIRONMENT	5
2.3	TEST EQUIPMENT LIST	6
2.4	GENERAL TEST PROCEDURE	9
3	TEST RESULTS (ENCLOSURE)	10
4	RF POWER OUTPUT, FCC15.236 (D)	11
4.1	TEST PROCEDURE.....	11
4.2	TEST RESULTS	12
5	OCCUPIED BANDWIDTH, FCC15.236 (F) //EMISSION MASK, FCC15.236 (G)	26
5.1	TEST PROCEDURE	26
5.2	TEST RESULTS.....	26
6	RADIATED SPURIOUS EMISSION , FCC 15.236(G)	35
6.1	TEST PROCEDURE.....	35
6.2	TEST RESULTS	35
7	FREQUENCY STABILITY, FCC 15.236(F)(3)	36
7.1	TEST PROCEDURE.....	36
7.2	TEST RESULTS	36
8	LINE CONDUCTED EMISSION , FCC 15.207	40
8.1	TEST PROCEDURE.....	40
8.2	TEST RESULTS	40



Registration number: W6M22203-21663-C-1

FCC ID: JEBUF-9R1

1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.


Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems. The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.


Laboratory disclaimer-

1. The test results of this test report relate exclusively to the item tested as specified in 1.5.
2. The test report may only be reproduced or published in full.
3. Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.
4. Antenna gain is provided by applicant and laboratory issue relevant data and results.

Tester:

April 13, 2023	Sora Kuo	
_____	_____	_____
Date	WTS-Lab.	Name
		Signature

Technical responsibility for area of testing:

April 13, 2023	Kevin Wang	
_____	_____	_____
Date	WTS	Name
		Signature



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22203-21663-C-1

FCC ID: JEBUF-9R1

1.2 Testing laboratory

1.2.1 Location

10m OATS

No.5-1, Lishui, Shuang Sing Village, Wanli Dist.,
New Taipei City 207, Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist.,
Taipei City 114, Taiwan (R.O.C.)

Tel: 886-2-6613-0228

Worldwide Testing Services (Taiwan) Co., Ltd.

6F., No. 58, Ln. 188, Ruiguang Rd., Neihu Dist.,
Taipei City 114, Taiwan (R.O.C.)

Tel: 886-2-6606-8877

1.2.2 Details of accreditation status

Accredited testing laboratory

FCC filed test laboratory Reg. No.: TW1477, TW1072

Industry Canada filed test laboratory Reg. No.: 20037, 5107A

Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :

Name: ./.

Accredited number: ./.

Street: ./.

Town: ./.

Country: ./.


1.3 Details of approval holder

Name: MASCOT ELECTRIC CO., LTD

Street: No.85, Changxing 1st St., Rende Dist.,

Town: Tainan City 71741,

Country: Taiwan (R.O.C.)



Registration number: W6M22203-21663-C-1

FCC ID: JEBUF-9R1

1.4 Application details

Date of receipt of test sample: May 20, 2022

Date of test: from May 23, 2022 to April 11, 2023

1.5 General information of Test item

Type of test item: Handheld Microphone

Model number: UF-9R

Brand name: MASCOT

Multi-listing model number: UF-62B

Sample no.: #01

Technical data

Frequency band : 510-608 MHz / 614-616 MHz / 657-663 MHz

Frequency (ch A): 510.125 MHz

Frequency (ch B): 559.025 MHz

Frequency (ch C): 607.875 MHz

Frequency (ch D): 614.125 MHz

Frequency (ch E): 615.875 MHz

Frequency (ch F): 657.125 MHz

Frequency (ch G): 662.875 MHz

Antenna type: PCB antenna

Antenna gain: 1.60 dBi

Power supply: Battery 3Vd.c. (AA*2)

Operation modes: Simplex

Manufacturer: (if applicable)

Name: ./.

Street: ./.

Town: ./.

Country: ./.

1.6 Test standards

Technical standard: 47 CFR PART 15 SUBPART C § 15.236 (2021-10)

Special statement

The product have main model: UF-9R and multi-listing model: UF-62B, the only difference is appearance.



Registration number: W6M22203-21663-C-1

FCC ID: JEBUF-9R1

2 Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

or

The deviations were ascertained in the course of the tests performed.

2.2 Test environment


Relative humidity content: 20 ... 75 %

Air pressure: 86-103 KPa

Power supply: Battery 3Vd.c. (AA*2)

Test item Name	Uncertainty
Estimation Result of Uncertainty of Conducted Emission (Line Conducted Emission)	Expanded Uncertainty : AMN : 0.94 dB Voltage probe : 0.96 dB Include Pulse Limiter : 1.52 dB
Estimation Result of Uncertainty of Bandwidth Measurement (Occupied Bandwidth, Emission Mask)	Expanded Uncertainty : 0.45 kHz
Estimation Result of Uncertainty of Frequency Drift Measurement (Frequency Stability, Modulation)	Expanded Uncertainty : 6.11 Hz
Estimation Result of Uncertainty of EIRP Measurement (RF Power Output, Radiated Spurious Emission)	Expanded Uncertainty : 30-200MHz : 3.49 dB 200-1000MHz : 3.49 dB 1-18GHz : 4.81 dB 18-40GHz : 3.94 dB

The decision rule is: Measurement uncertainty is not included in the calculation of test results.




Registration number: W6M22203-21663-C-1

FCC ID: JEBUF-9R1

2.3 Test Equipment List

No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2022/6/22	2023/6/21
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function Test	
ETSTW-CE 004	ZWEILEITER-V-NETZNACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2022/10/24	2023/10/23
ETSTW-CE 006	IMPULSBEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	2022/10/24	2023/10/23
ETSTW-CE 008	HF-EICHELITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Function Test	
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2022/8/3	2023/8/2
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2022/11/9	2023/11/8
ETSTW-CE 028	MXE EMI Receiver	N9038A	MY53220110	Agilent	2022/7/29	2023/7/28
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2022/6/21	2023/6/20
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2022/10/17	2023/10/16
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Function Test	
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Function Test	
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2022/8/18	2023/8/17
ETSTW-RE 019	MICROWAVE HORN ANTENNA	22240-25	121074	FM	2022/6/13	2023/6/12
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	ETS-Lindgren	2022/6/22	2023/6/21
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	ETS-Lindgren	2022/5/23	2023/5/22
ETSTW-RE 042	Biconical Antenna	HK116	100172	R&S	2023/3/2	2024/3/1
ETSTW-RE 043	Log-Periodic Dipole Antenna	HL223	100166	R&S	2022/6/28	2023/6/27
ETSTW-RE 044	Log-Periodic Antenna	HL050	100094	R&S	2022/8/1	2023/7/31
ETSTW-RE 045	ESA-E SERIES SPECTRUM ANALYZER	E4404B	MY45111242	Agilent	Pre-test Use	
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2023/2/17	2024/2/16
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2023/2/17	2024/2/16
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2023/2/17	2024/2/16
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2023/3/22	2024/3/21
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2023/2/17	2024/2/16
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2023/2/20	2024/2/19
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Function Test	
ETSTW-RE 069	Double-Ridged Guide Horn Antenna	3117	00069377	ETS-Lindgren	Function Test	
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	HP	2022/11/5	2023/11/4
ETSTW-RE 088	SOLID STATE AMPLIFIER	KMA180265A01	99057	KMIC	2022/9/16	2023/9/15
ETSTW-RE 091	Match Pad	MDCS1500	None	WOKEN	2022/6/9	2023/6/8
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2023/2/17	2024/2/16
ETSTW-RE 112	AC POWER SOURCE	TFC-1005	T-0A023536	T-Power	Function test	



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22203-21663-C-1
 FCC ID: JEBUF-9R1

ETSTW-RE 115	2.4GHz Notch Filter	N0124411	473874	MICROWAVE CIRCUITS	2023/1/4	2024/1/3
ETSTW-RE 120	RF Player	MP9200	MP9210-111022	ADIVIC	2022/11/8	2023/11/7
ETSTW-RE 122	SIGNAL GENERATOR	SMF100A	102149	R&S	2022/6/20	2023/6/19
ETSTW-RE 125	5GHz Notch filter	5NSL11-5200/E221.3-O/O	1	K&L Microwave	2022/8/5	2023/8/4
ETSTW-RE 126	5GHz Notch filter	5NSL12-5800/E221.3-O/O	1	K&L Microwave	2022/8/5	2023/8/4
ETSTW-RE 127	RF Switch Box	RFS-01	None	WTS	2023/2/17	2024/2/16
ETSTW-RE 128	5.3GHz Notch filter	N0153001	SN487233	Microwave Circuits	2022/8/5	2023/8/4
ETSTW-RE 129	5.5GHz Notch filter	N0555984	SN487234	Microwave Circuits	2022/8/5	2023/8/4
ETSTW-RE 130	Handheld RF Spectrum Analyzer	N9340A	CN0147000204	Agilent	Pre-test Use	
ETSTW-RE 142	Amplifier	8447D	2805A03378	Agilent	2023/2/20	2024/2/19
ETSTW-RE 146	Preamplifier	JPA-10M1G	15090004	JPT	2022/5/27	2023/5/26
ETSTW-RE 152	Bi-log Hybrid Antenna	MCTD 2786B	BLB20J04029	ETC	2023/1/31	2024/1/30
ETSTW-RE 153	Signal Analyzer	FSV40	101929	R&S	2022/10/3	2023/10/2
ETSTW-RE 159	Bi-log Hybrid Antenna (30M~1000 MHz)	MCTD 2786B	BLB21N04035	ETC	2022/12/22	2023/12/21
ETSTW-RE 177	Bi-log Hybrid Antenna with 6dB Attenuator	VULB 9168&EMCI-N-6-06	01380&AT-06007	SCHWARZBECK&EMC	2022/9/1	2023/8/31
ETSTW-RF 002	Electromagnetic field probe	LF-30	K-0007	STT	2022/7/14	2023/7/13
ETSTW-EMI 011	USB Compact Modulator	SFC-U	101689	R&S	2022/6/10	2023/6/9
ETSTW-GSM 002	Universal Radio Communication Tester	CMU 200	109439	R&S	2023/3/22	2024/3/21
ETSTW-GSM 003	Radio Communication Analyzer	MT8820C	6201342073	Anritsu	2022/5/9	2023/5/8
ETSTW-GSM 004	Wideband Radio Communication Tester	CMW500	128092	R&S	2022/10/24	2023/10/23
ETSTW-GSM 019	Band Reject Filter	WRCTF824/849-822/851-40/12+9SS	3	WI	2023/1/4	2024/1/3
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748-1743/1752-32/5SS	1	WI	2023/1/4	2024/1/3
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880.5-1875.5/1884.5-32/5SS	3	WI	2023/1/4	2024/1/3
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1-904.25-50/8SS	1	WI	2023/1/4	2024/1/3
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2022/9/2	2023/9/1
ETSTW-GSM 024	Radio Communication Analyzer	MT8821C	None	Anritsu	2022/5/3	2023/5/2
ETSTW-GSM 025	Band Reject Filter	BRM19835	001	Micro-Tronics	2022/8/5	2023/8/4
ETSTW-Cable 016	BNC Cable	Switch Box	B Cable 1	Schwarz beck	2023/2/4	2024/2/3
ETSTW-Cable 017	BNC Cable	X Cable	B Cable 2	Schwarz beck	2023/2/4	2024/2/3
ETSTW-Cable 018	BNC Cable	Y Cable	B Cable 3	Schwarz beck	2023/2/4	2024/2/3
ETSTW-Cable 019	BNC Cable	Z Cable	B Cable 4	Schwarz beck	2023/2/4	2024/2/3
ETSTW-Cable 020	N TYPE Cable	OATS Cable 1	N30N30-L335-15M	JYE BAO CO.,LTD.	2022/6/29	2023/6/28
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2022/5/6	2023/5/5
ETSTW-Cable 028	Microwave Cable	FA147A0015M2020	30064-2	UTIFLEX	2022/9/16	2023/9/15
ETSTW-Cable 029	Microwave Cable	FA147A0015M2020	30064-3	UTIFLEX	2022/9/16	2023/9/15
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S_Cable 9)	279067	HUBER+SUHNER	2023/02/17	2024/2/16




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22203-21663-C-1

FCC ID: JEBUF-9R1

ETSTW-Cable 058	Microwave Cable	SUCOFLEX 104	none	HUBER+SUHNER	2022/5/27	2023/5/26
ETSTW-Cable 064	Microwave Cable	SUCOFLEX 104	MY28891	HUBER+SUHNER	2023/2/20	2024/2/19
ETSTW-Cable 071	N TYPE CABLE	EMCCFD400-NM-NM-25000	170239	EMCI	2022/5/27	2023/5/26
ETSTW-Cable 072	SMA type cable (8m)	SUCOFLEX 104	805800/4	HUBER+SUHNER	2023/2/20	2024/2/19
ETSTW-Cable 074	SMA type cable (2m)	SUCOFLEX 104	802563/4	HUBER+SUHNER	2023/2/20	2024/2/19
ETSTW-Cable 076	SMA type cable (1m)	N/A	812652/4	HUBER+SUHNER	2023/2/20	2024/2/19
WTSTW-SW 002	EMI TEST SOFTWARE	EZ EMC	None	Farad	Version ETS-03A1 Version EMEC-3A1+	
WTSTW-SW 006	EMI TEST SOFTWARE	e3	None	AUDIX	Version 9.161014	
WTSTW-SW 008	Signal studio	Agilent	None	AUDIX	Version 2.0.0.1	
ETSTW-TH 002	Thermohygrometer	608-H1	45204317	Testo	2022/9/16	2023/9/15
ETSTW-TH 003	Wireless weather station	GAIA	N/A	TFA	2022/10/28	2023/10/27



Registration number: W6M22203-21663-C-1

FCC ID: JEBUF-9R1

2.4 General Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.10-2013 6.2 using a 50 μ H LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

RADIATION INTERFERENCE: The test procedure used was according to ANSI STANDARD C63.10-2013 6.3 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100 kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The ambient temperature of the UUT was 23°C with a humidity of 40 %.

The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

Measurements were made by at the registered open field test site located at The Registration Number:

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

ANSI STANDARD C63.10-2013 B.2.7: Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.



Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M22203-21663-C-1

FCC ID: JEBUF-9R1

3 Test results (enclosure)

Test case	Para. Number	Required	Test passed	Test failed
RF Power Output	15.236(d)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Occupied Bandwidth	15.236(f)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Emission Mask	15.236(g) ETSI EN 300 422-1 V2.1.2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Radiated Spurious Emission	15.236(g)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Line Conducted Emissions	15.207	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Frequency Stability vs. Temperature Frequency Stability vs. Voltage	15.236(f)(3)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

The following is intentionally left blank.



Registration number: W6M22203-21663-C-1

FCC ID: JEBUF-9R1

4 RF Power Output, FCC15.236 (d)

4.1 Test procedure

§ 2.1046 Measurements required: RF power output.

(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

(b) For single sideband, independent sideband, and single channel, controlled carrier radiotelephone transmitters the procedure specified in paragraph (a) of this section shall be employed and, in addition, the transmitter shall be modulated during the test as follows. In all tests, the input level of the modulating signal shall be such as to develop rated peak envelope power or carrier power, as appropriate, for the transmitter.

(1) Single sideband transmitters in the A3A or A3J emission modes - by two tones at frequencies of 400 Hz and 1800 Hz (for 3.0 kHz authorized bandwidth), or 500 Hz and 2100 Hz (3.5 kHz authorized bandwidth), or 500 Hz and 2400 Hz (for 4.0 kHz authorized bandwidth), applied simultaneously, the input levels of the tones so adjusted that the two principal frequency components of the radio frequency signal produced are equal in magnitude.

(2) Single sideband transmitters in the A3H emission mode - by one tone at a frequency of 1500 Hz (for 3.0 kHz authorized bandwidth), or 1700 Hz (for 3.5 kHz authorized bandwidth), or 1900 Hz (for 4.0 kHz authorized bandwidth), the level of which is adjusted to produce a radio frequency signal component equal in magnitude to the magnitude of the carrier in this mode.

(3) As an alternative to paragraphs (b) (1) and (2) of this section other tones besides those specified may be used as modulating frequencies, upon a sufficient showing of need. However, any tones so chosen must not be harmonically related, the third and fifth order intermodulation products which occur must fall within the -25 dB step of the emission bandwidth limitation curve, the seventh and ninth order intermodulation product must fall within the 35 dB step of the referenced curve and the eleventh and all higher order products must fall beyond the -35 dB step of the referenced curve.

(4) Independent sideband transmitters having two channels by 1700 Hz tones applied simultaneously in both channels, the input levels of the tones so adjusted that the two principal frequency components of the radio frequency signal produced are equal in magnitude.

(5) Independent sideband transmitters having more than two channels by an appropriate signal or signals applied to all channels simultaneously. The input signal or signals shall simulate the input signals specified by the manufacturer for normal operation.


(6) Single-channel controlled-carrier transmitters in the A3 emission mode - by a 2500 Hz tone.

(c) For measurements conducted pursuant to paragraphs (a) and (b) of this section, all calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. Under the test conditions specified, no components of the emission spectrum shall exceed the limits specified in the applicable rule parts as necessary for meeting occupied bandwidth or emission limitations.



Registration number: W6M22203-21663-C-1
 FCC ID: JEBUF-9R1

4.2 Test Results

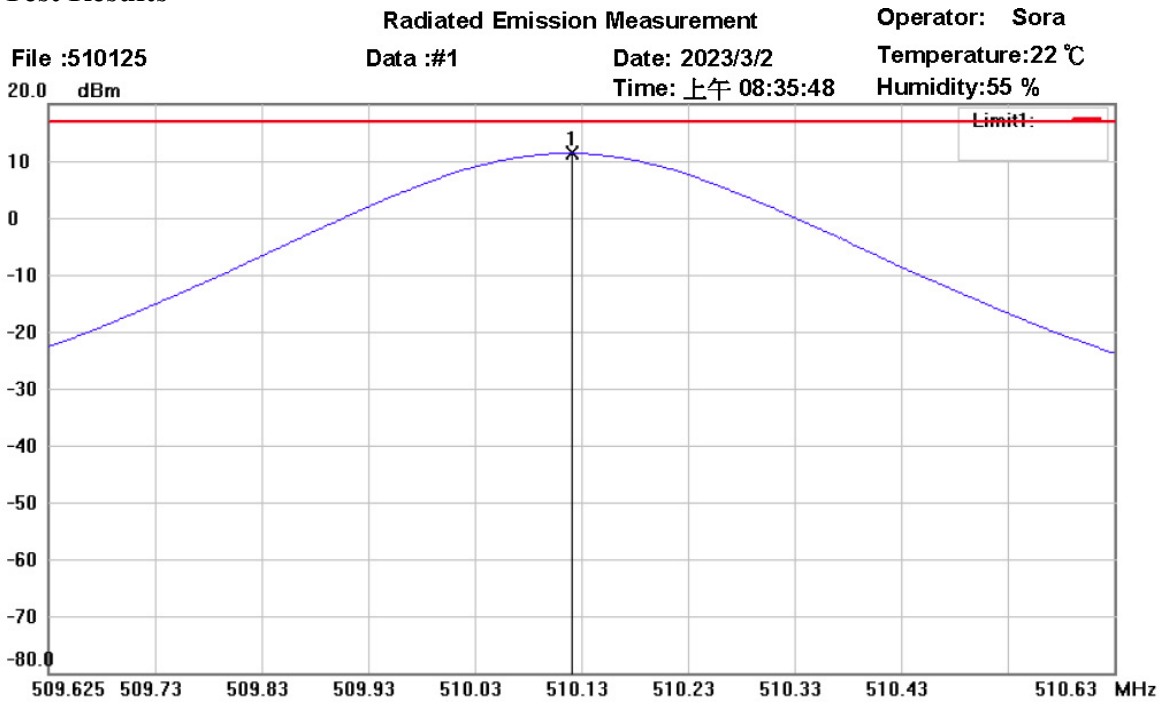

Site : Chamber
 Condition : FCC 15.236 POWER Polarization: *Horizontal*
 EUT : W6M22203-21663 Power : 3 Vd.c.
 M/N: Distance: 3m
 Test Mode : Tx 510.125MHz
 Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	510.1160	-17.98	peak	29.29	11.31	17.00	150	55	-5.69	



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22203-21663-C-1
 FCC ID: JEBUF-9R1

Radiated Emission Measurement

Operator: Sora

File :510125
 20.0 dBm


Data :#2

Date: 2023/3/5

Temperature:22 °C

Time: 上午 08:06:25

Humidity:55 %

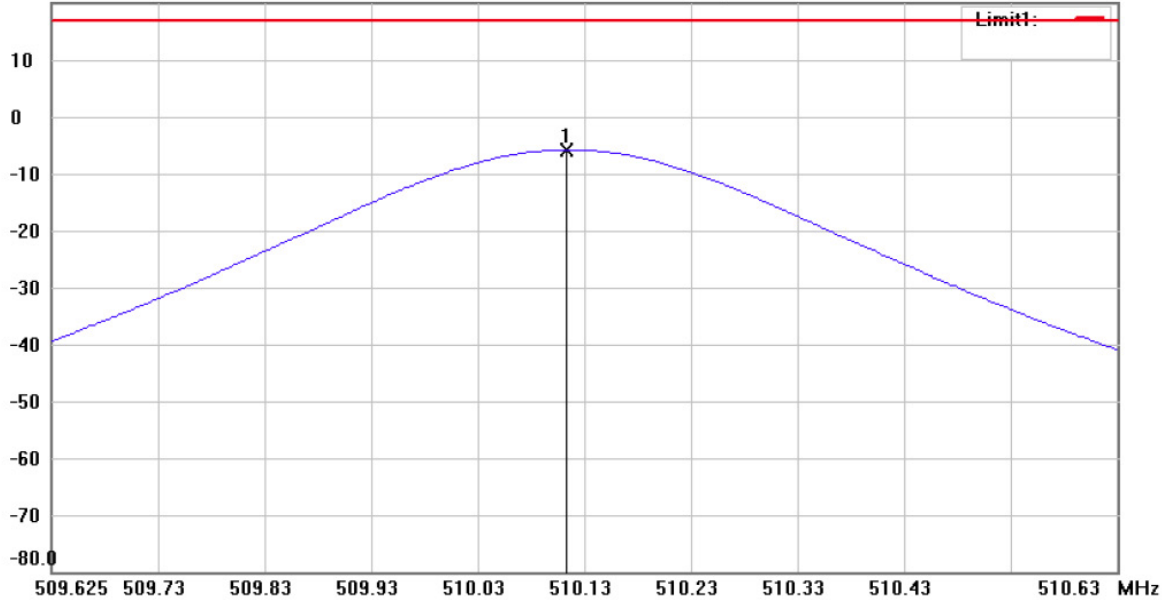

Site : Chamber

Condition : FCC 15.236 POWER

Polarization: *Vertical*

EUT : W6M22203-21663

Power : 3 Vd.c.


M/N:

Distance: 3m

Test Mode : Tx 510.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	510.1080	-35.37	peak	29.57	-5.80	17.00	150	340	-22.80	



Registration number: W6M22203-21663-C-1
 FCC ID: JEBUF-9R1

Radiated Emission Measurement

Operator: Sora

File :559025

Data :#1


Date: 2023/3/5

Temperature:22 °C

20.0 dBm

Time: 上午 08:42:50

Humidity:55 %

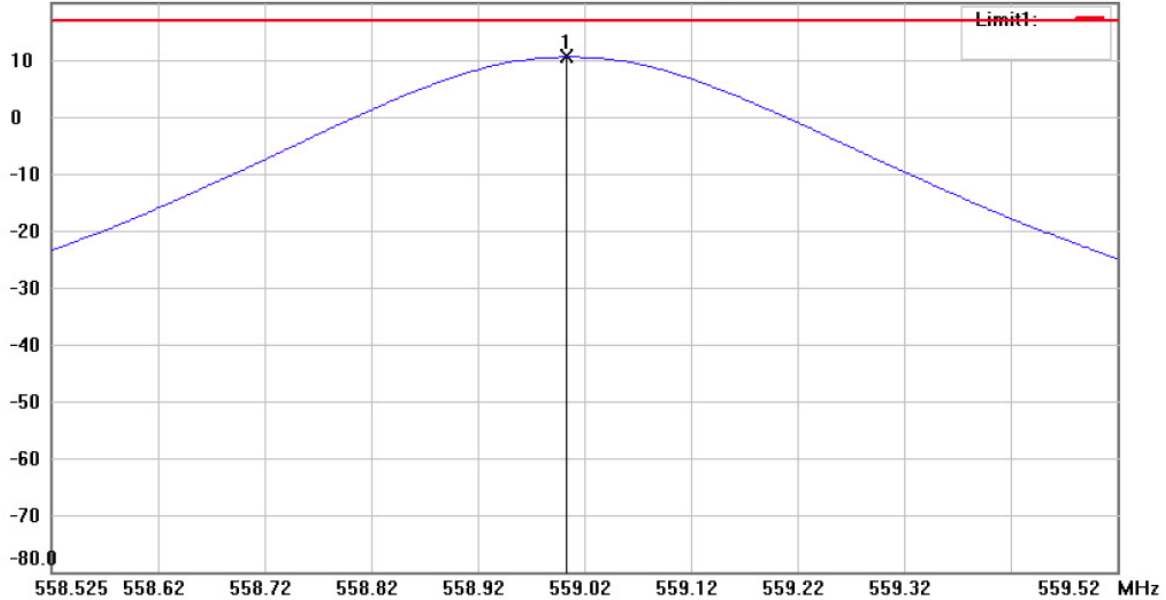

Site : Chamber

Condition : FCC 15.236 POWER

Polarization: *Horizontal*

EUT : W6M22203-21663

Power : 3 Vd.c.


M/N:

Distance: 3m

Test Mode : Tx 559.025MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	559.0080	-19.33	peak	29.93	10.60	17.00	150	15	-6.40	



Registration number: W6M22203-21663-C-1
 FCC ID: JEBUF-9R1

Radiated Emission Measurement

Operator: Sora

File :559025

Data :#2


Date: 2023/3/5

Temperature:22 °C

20.0 dBm

Time: 上午 08:45:00

Humidity:55 %

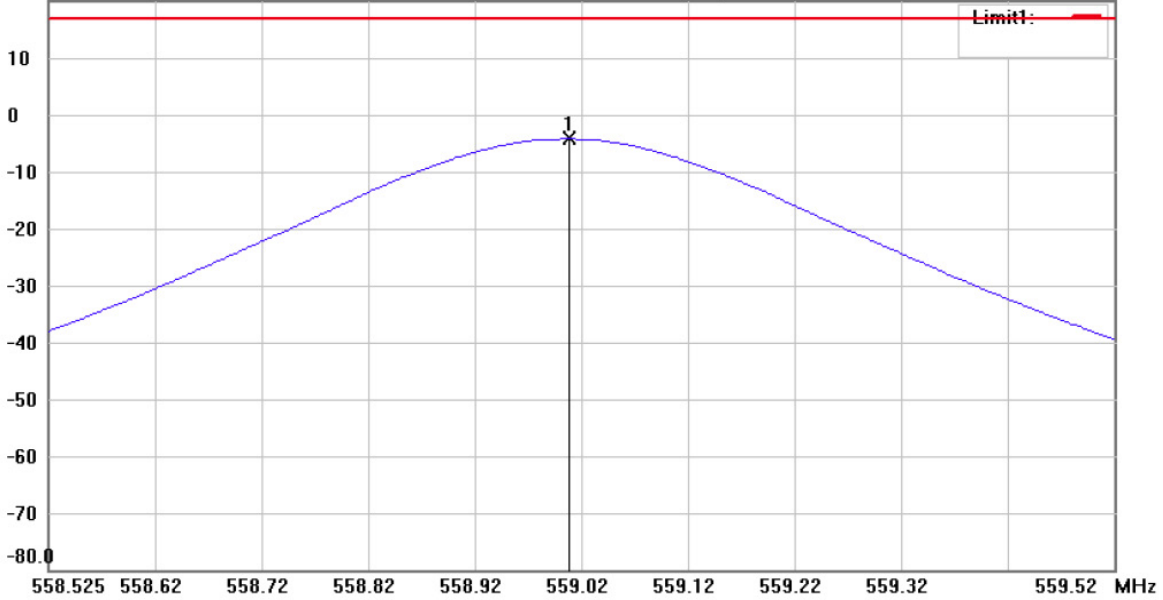

Site : Chamber

Condition : FCC 15.236 POWER

Polarization: *Vertical*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 559.025MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	559.0140	-33.89	peak	29.66	-4.23	17.00	150	350	-21.23	



Registration number: W6M22203-21663-C-1
 FCC ID: JEBUF-9R1


Radiated Emission Measurement

Operator: Sora
 Temperature: 22 °C
 Humidity: 55 %

File :607875
 20.0 dBm

Data :#1

Date: 2023/3/5
 Time: 上午 08:51:18

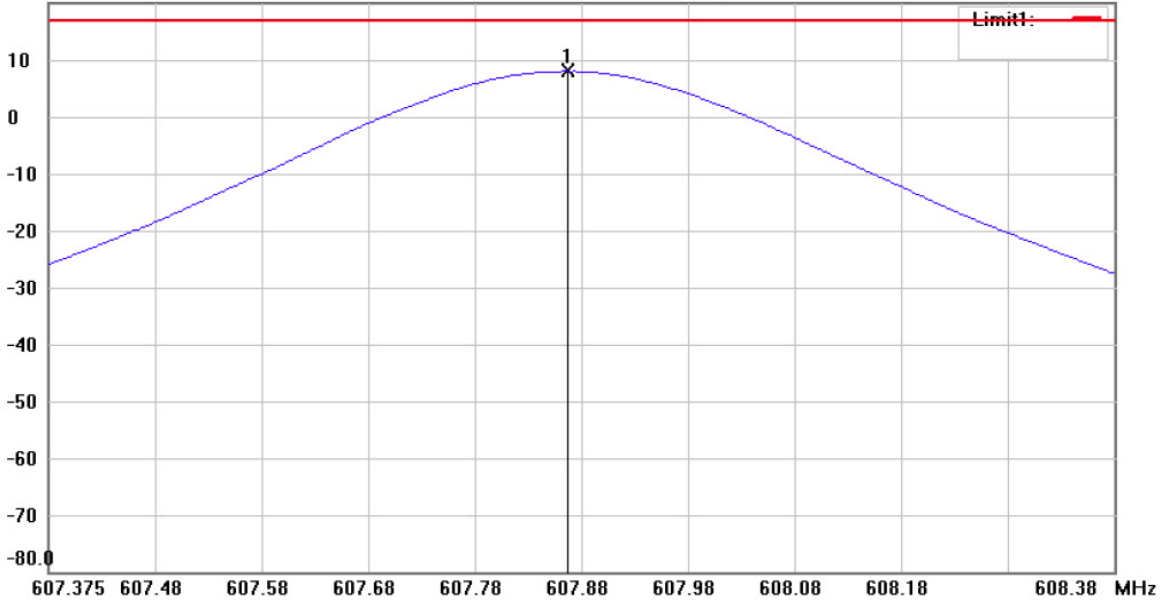

Site : Chamber

Condition : FCC 15.236 POWER

EUT : W6M22203-21663

M/N:

Test Mode : Tx 607.875MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	607.8620	-22.84	peak	30.85	8.01	17.00	150	220	-8.99	



Registration number: W6M22203-21663-C-1
 FCC ID: JEBUF-9R1

Radiated Emission Measurement

Operator: Sora

File :607875


Data :#2

Date: 2023/3/5

Temperature:22 °C

Time: 上午 09:04:52

Humidity:55 %

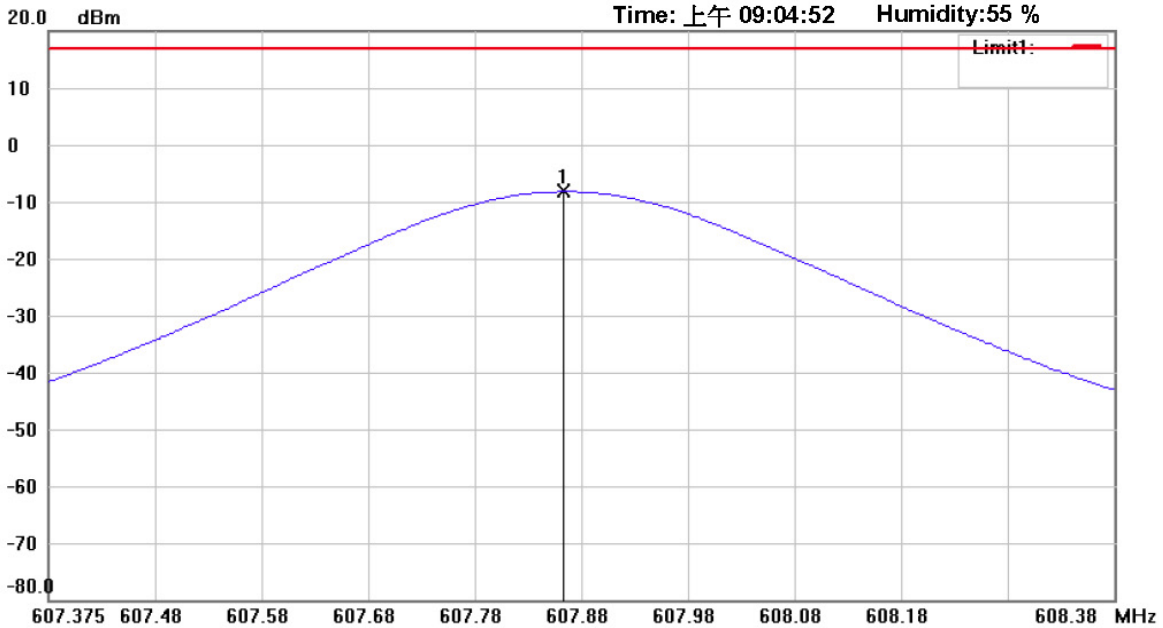

Site : Chamber

Condition : FCC 15.236 POWER

Polarization: *Vertical*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 607.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	607.8580	-37.93	peak	29.71	-8.22	17.00	150	75	-25.22	



Registration number: W6M22203-21663-C-1
 FCC ID: JEBUF-9R1

Radiated Emission Measurement

Operator: Sora

File :614125
 20.0 dBm


Data :#1

Date: 2023/3/5

Temperature:22 °C

Time: 上午 08:56:31

Humidity:55 %

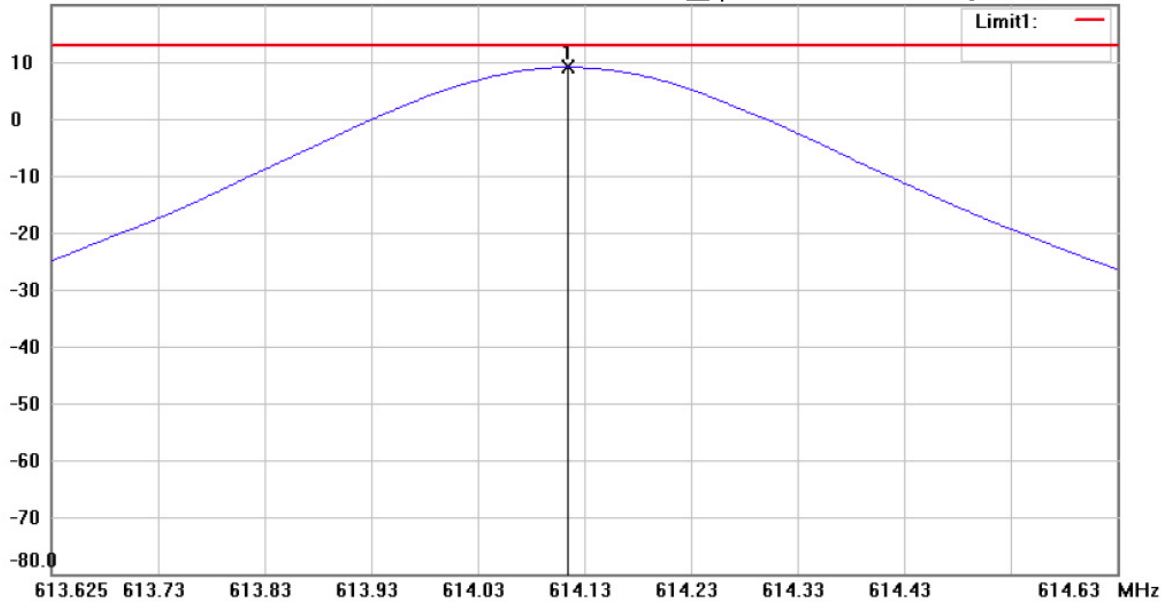

Site : Chamber

Condition : FCC 15.236 POWER

Polarization: *Horizontal*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 614.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	614.1100	-22.10	peak	31.17	9.07	13.00	150	200	-3.93	



Registration number: W6M22203-21663-C-1
 FCC ID: JEBUF-9R1

Radiated Emission Measurement

Operator: Sora

File :614125

Data :#2


Date: 2023/3/5

Temperature:22 °C

20.0 dBm

Time: 上午 08:58:53

Humidity:55 %

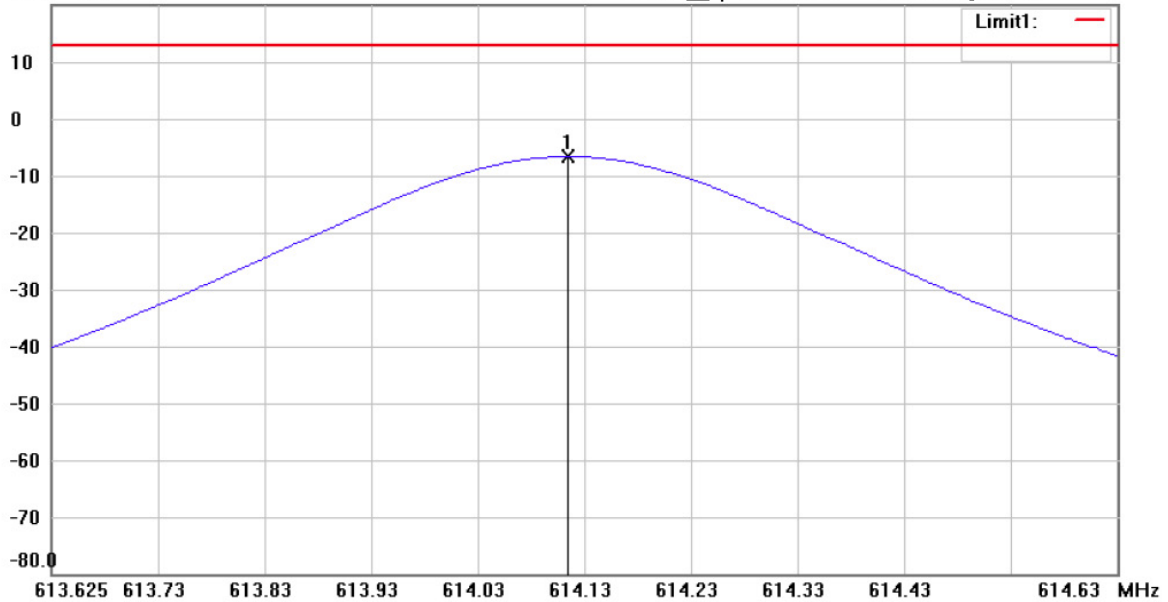

Site : Chamber

Condition : FCC 15.236 POWER

Polarization: *Vertical*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 614.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	614.1100	-36.32	peak	29.70	-6.62	13.00	150	350	-19.62	



Registration number: W6M22203-21663-C-1
 FCC ID: JEBUF-9R1

Radiated Emission Measurement

Operator: Sora

File :615875
 20.0 dBm


Data :#1

Date: 2023/3/5

Temperature:22 °C

Time: 上午 08:53:40

Humidity:55 %

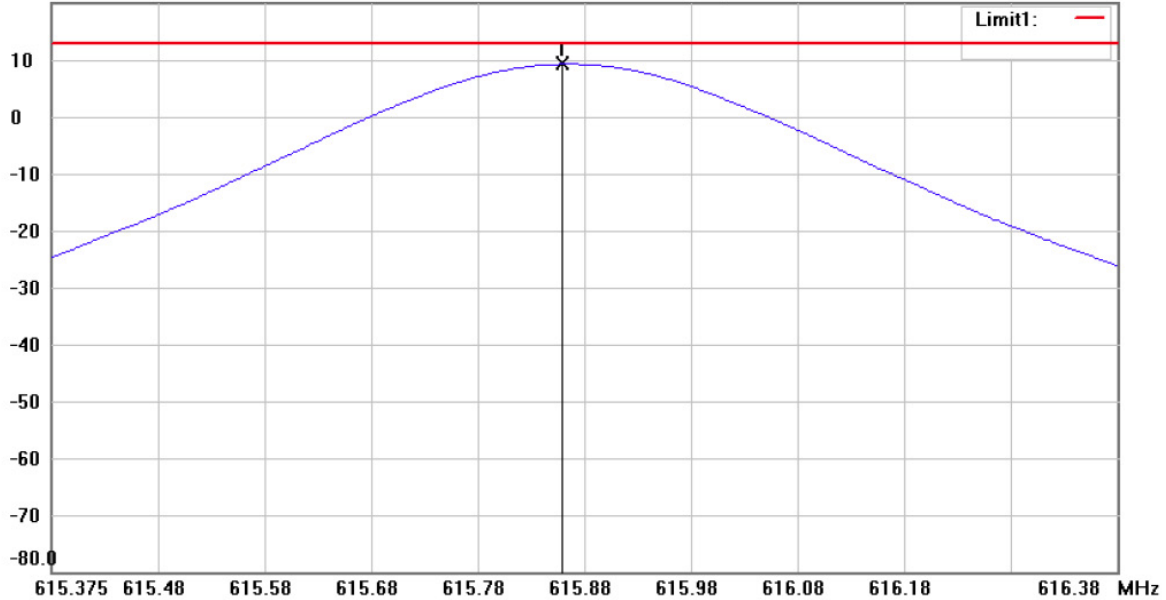

Site : Chamber

Condition : FCC 15.236 POWER

Polarization: *Horizontal*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 615.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	615.8540	-21.97	peak	31.26	9.29	13.00	150	195	-3.71	



Registration number: W6M22203-21663-C-1
 FCC ID: JEBUF-9R1

Radiated Emission Measurement

Operator: Sora

File :615875


Data :#2

Date: 2023/3/5

Temperature:22 °C

Time: 上午 09:01:56

Humidity:55 %

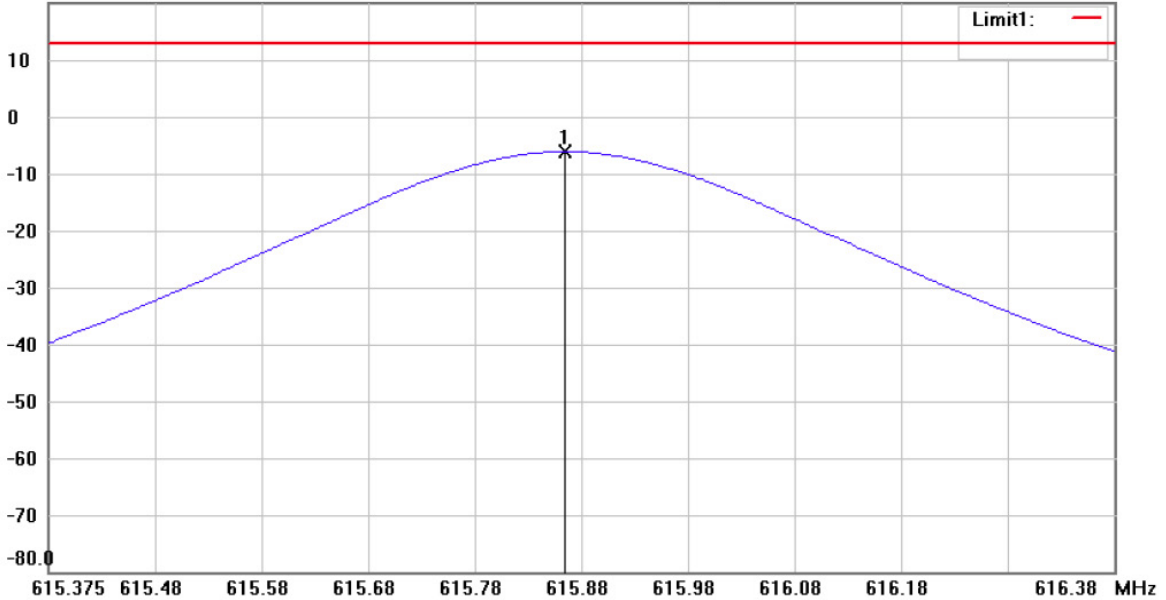

Site : Chamber

Condition : FCC 15.236 POWER

EUT : W6M22203-21663

M/N:

Test Mode : Tx 615.875MHz


Note :

Polarization: *Vertical*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	615.8600	-35.87	peak	29.70	-6.17	13.00	150	25	-19.17	



Registration number: W6M22203-21663-C-1
 FCC ID: JEBUF-9R1

Radiated Emission Measurement

Operator: Sora

File :657125
 20.0 dBm


Data :#1

Date: 2023/3/5

Temperature:22 °C

Time: 上午 09:16:40

Humidity:55 %

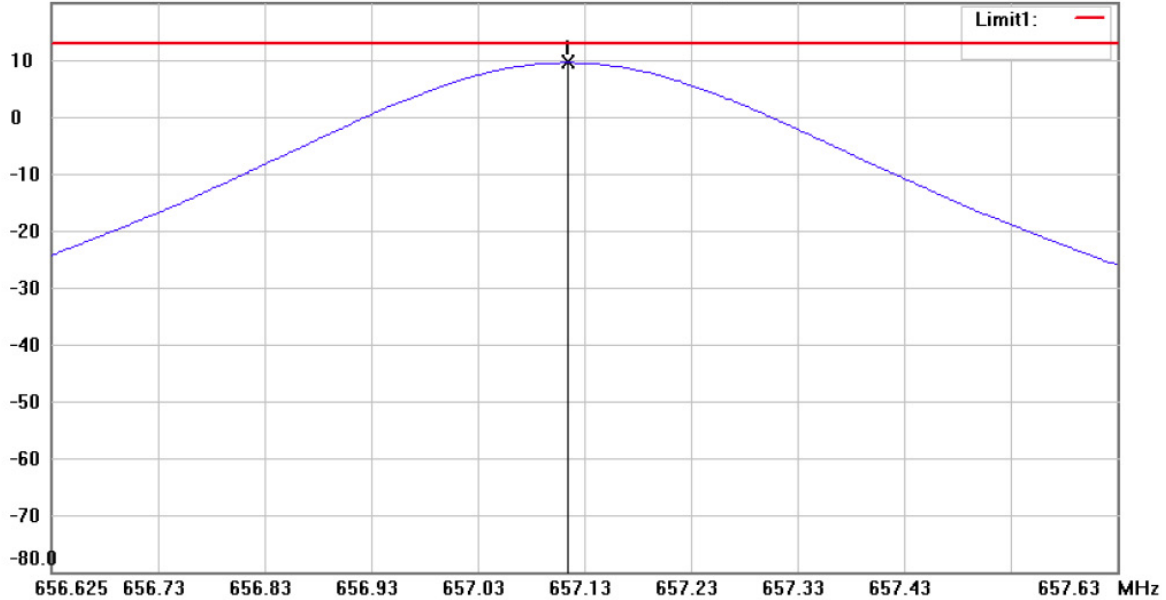

Site : Chamber

Condition : FCC 15.236 POWER

Polarization: *Horizontal*

EUT : W6M22203-21663

Power : 3 Vd.c.


M/N:

Distance: 3m

Test Mode : Tx 657.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	657.1100	-23.46	peak	32.98	9.52	13.00	150	205	-3.48	



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22203-21663-C-1
 FCC ID: JEBUF-9R1

Radiated Emission Measurement

Operator: Sora

File :657125
 20.0 dBm


Data :#2

Date: 2023/3/5

Temperature:22 °C

Time: 上午 09:19:02

Humidity:55 %

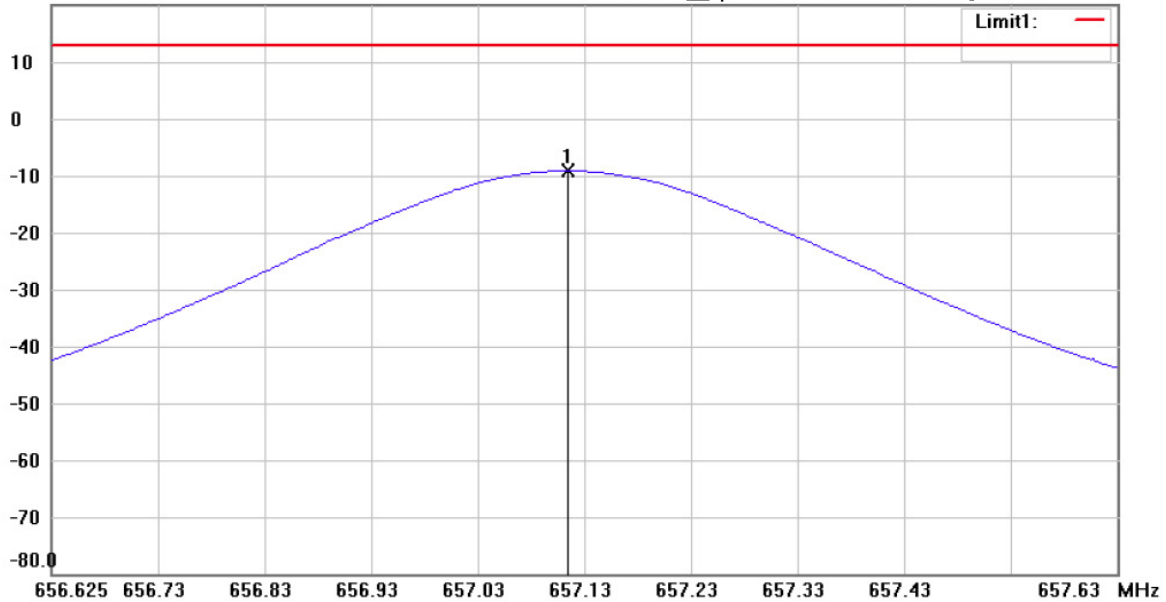

Site : Chamber

Condition : FCC 15.236 POWER

Polarization: *Vertical*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 657.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	657.1100	-39.11	peak	29.95	-9.16	13.00	150	45	-22.16	



Registration number: W6M22203-21663-C-1
 FCC ID: JEBUF-9R1


Radiated Emission Measurement

Operator: Sora
 Temperature: 22 °C
 Humidity: 55 %

File :662875
 20.0 dBm

Data :#1

Date: 2023/3/5
 Time: 上午 09:11:27

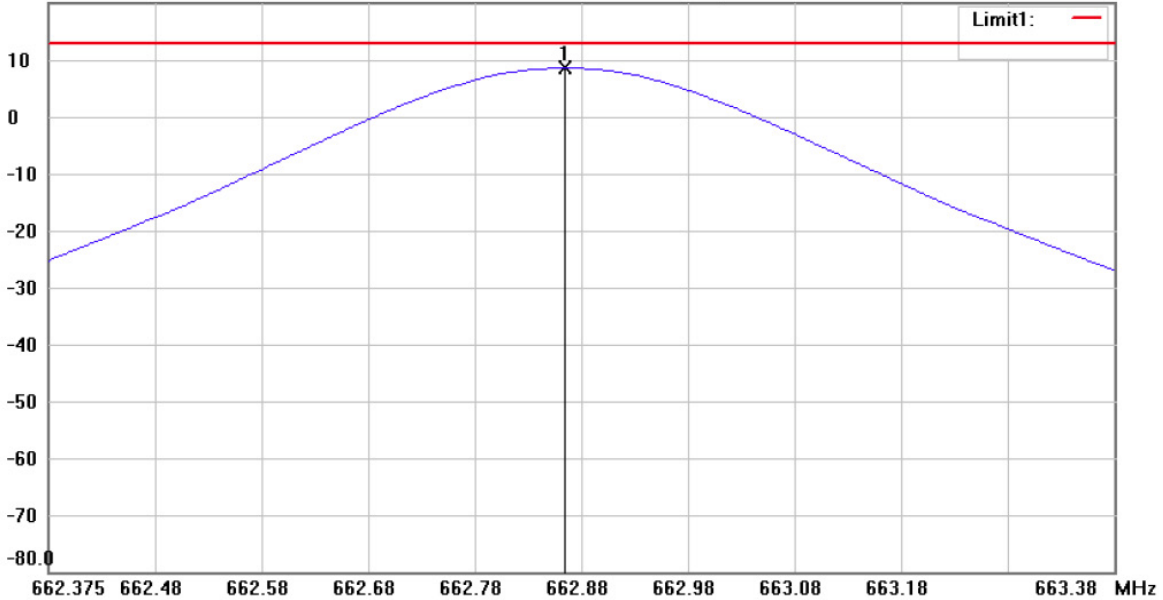

Site : Chamber

Condition : FCC 15.236 POWER

EUT : W6M22203-21663

M/N:

Test Mode : Tx 662.875MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	662.8600	-24.38	peak	32.99	8.61	13.00	150	220	-4.39	



Registration number: W6M22203-21663-C-1
 FCC ID: JEBUF-9R1

Radiated Emission Measurement

Operator: Sora

File :662875


Data :#2

Date: 2023/3/5

Temperature:22 °C

Time: 上午 09:22:10

Humidity:55 %

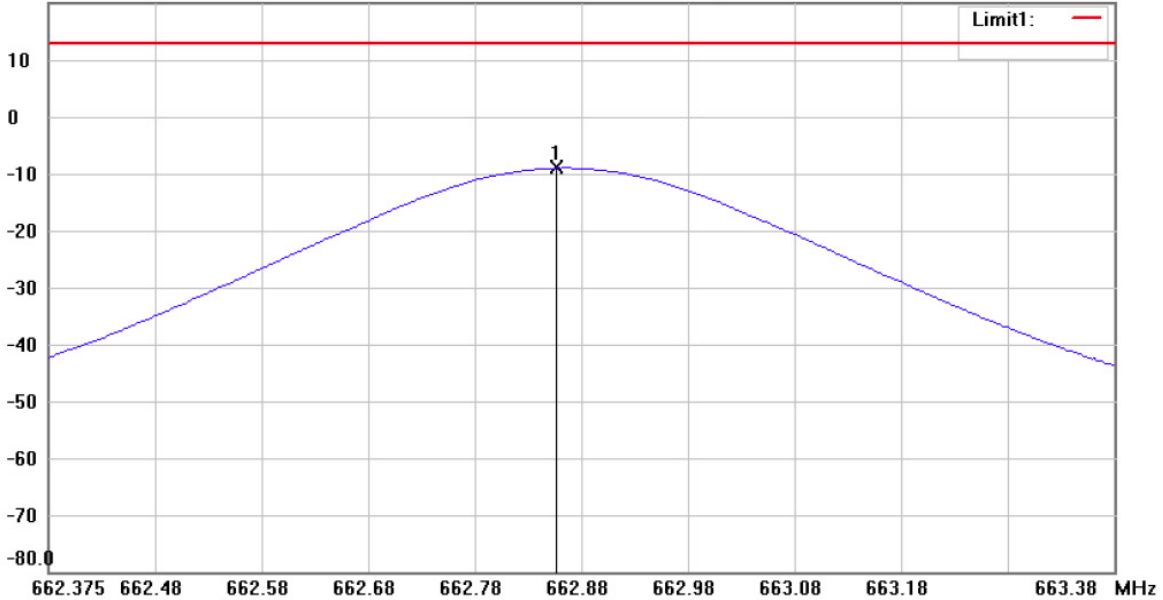

Site : Chamber

Condition : FCC 15.236 POWER

Polarization: *Vertical*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 662.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	662.8520	-39.20	peak	30.21	-8.99	13.00	150	55	-21.99	

Test equipment used: ETSTW-RE 004, ETSTW-RE 122, ETSTW-RE 042, ETSTW-RE 043

Limit According to FCC PART 15.236(d): The output power limit: 50 mW (17 dBm)



Registration number: W6M22203-21663-C-1

FCC ID: JEBUF-9R1

5 Occupied Bandwidth, FCC15.236 (f) / Emission Mask, FCC15.236 (g)

5.1 Test Procedure

Occupied Bandwidth

- (f) The operating frequency within a permissible band of operation as defined in paragraph (c) must comply with the following requirements.
- (1) The frequency selection shall be offset from the upper or lower band limits by 25 kHz or an integral multiple thereof.
 - (2) One or more adjacent 25 kHz segments within the assignable frequencies may be combined to form a channel whose maximum bandwidth shall not exceed 200 kHz. The operating bandwidth shall not exceed 200 kHz.
 - (3) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.005\%$ of the operating frequency over a temperature variation of - 20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. Battery (1) In the bands allocated and assigned for broadcast television and in the 600 MHz service band: 50 mW EIRP
 - (2) In the 600 MHz guard bands including the duplex gap: 20 mW EIRP (e) Operation is limited to locations separated from licensed services by the following distances. (1) Four kilometers outside the following protected service contours of co-channel TV stations. operated equipment shall be tested using a new battery.

5.2 Test results


Occupied Bandwidth

Test date: March 06, 2023

Temperature: 20.6 °C

Humidity: 58.2 %

Tester: Sora

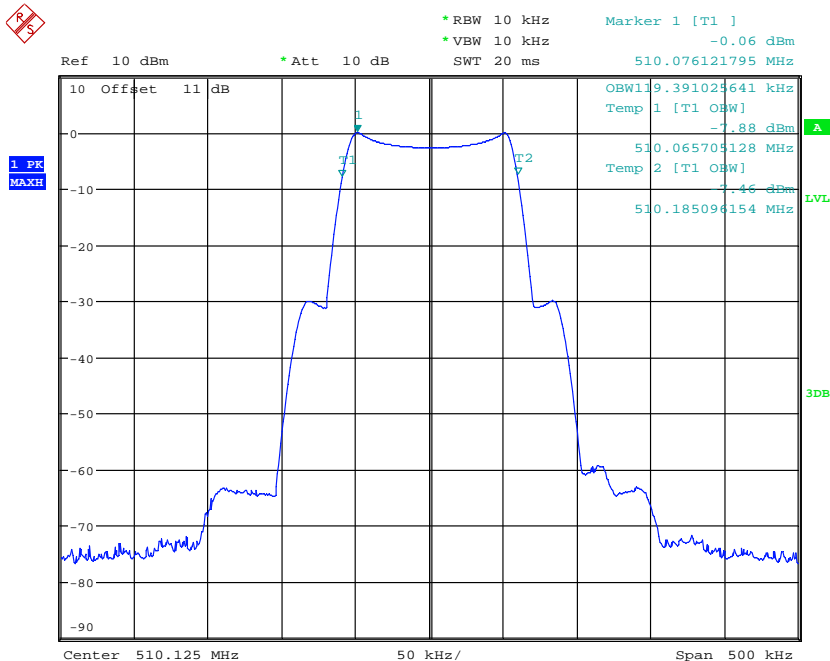


OCCUPIED BANDWIDTH 510.125MHz

Date: 6.MAR.2023 15:30:12




Registration number: W6M22203-21663-C-1
 FCC ID: JEBUF-9R1

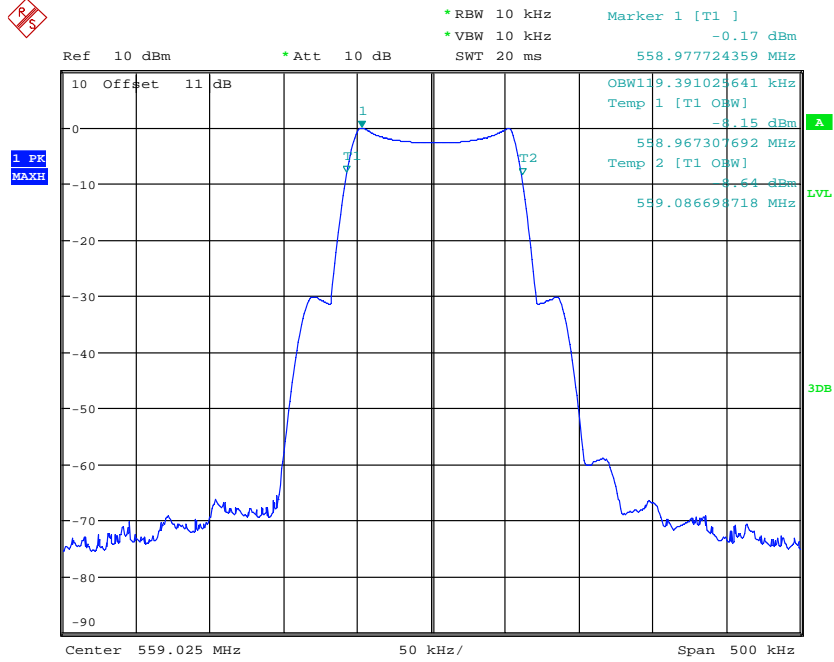

OCCUPIED BANDWIDTH 559.025MHz

Date: 6.MAR.2023 15:03:29

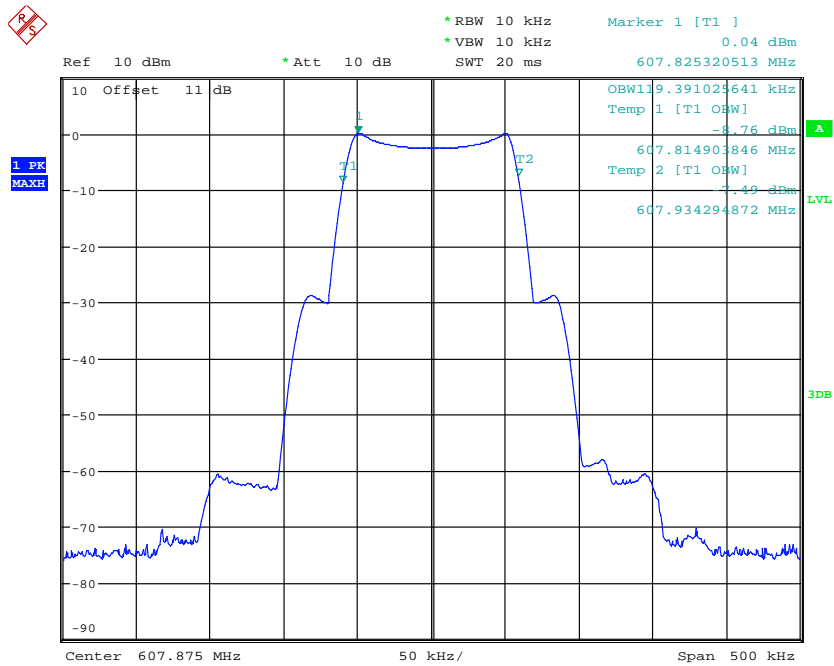


OCCUPIED BANDWIDTH 607.875MHz

Date: 6.MAR.2023 14:57:44




Registration number: W6M22203-21663-C-1
 FCC ID: JEBUF-9R1

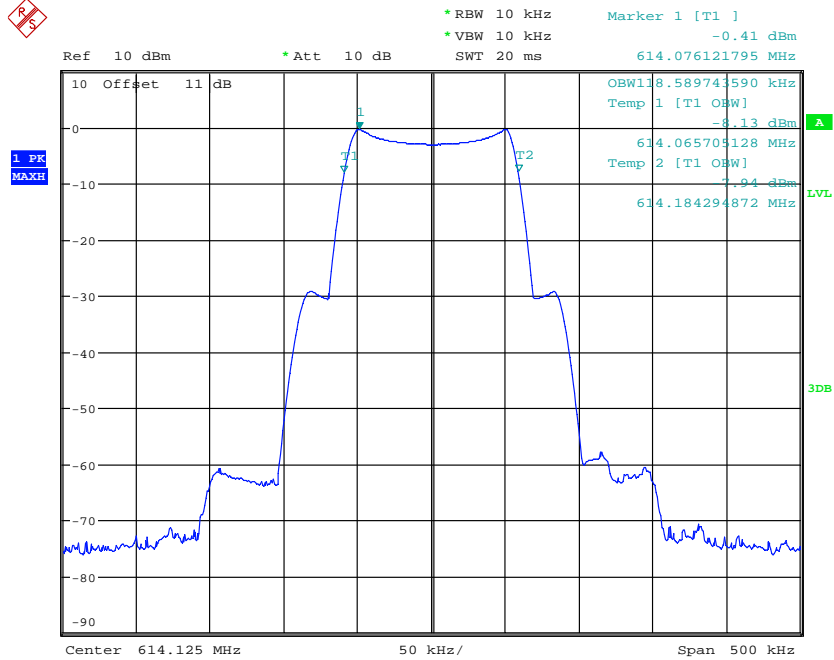

OCCUPIED BANDWIDTH 614.125MHz

Date: 6.MAR.2023 14:49:11

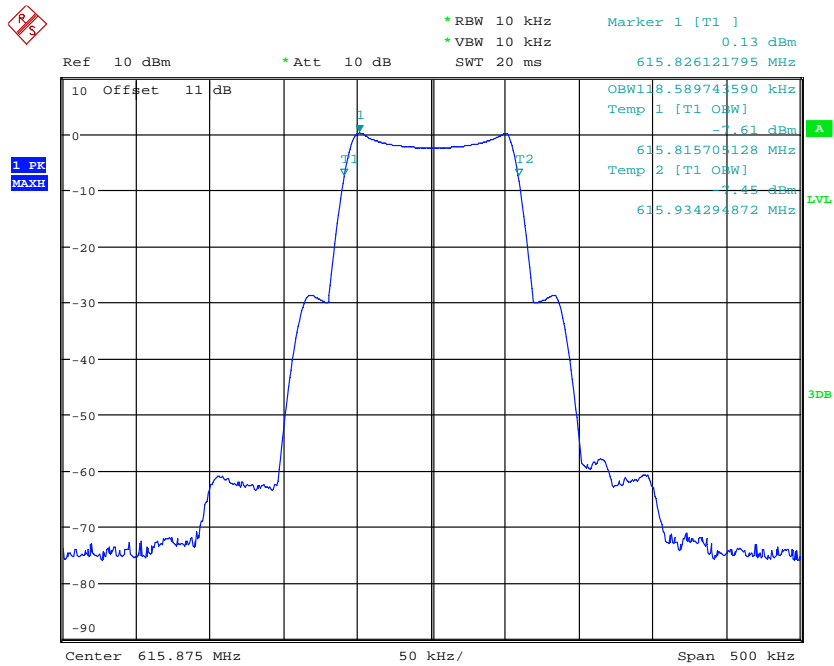


OCCUPIED BANDWIDTH 615.875MHz

Date: 6.MAR.2023 14:53:15




Registration number: W6M22203-21663-C-1
 FCC ID: JEBUF-9R1

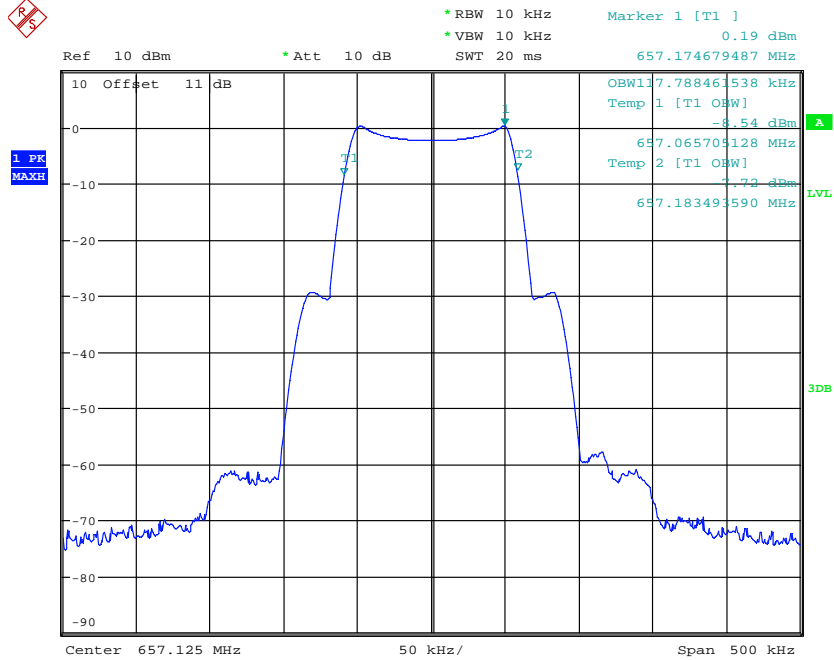

OCCUPIED BANDWIDTH 657.125MHz

Date: 6.MAR.2023 15:13:54

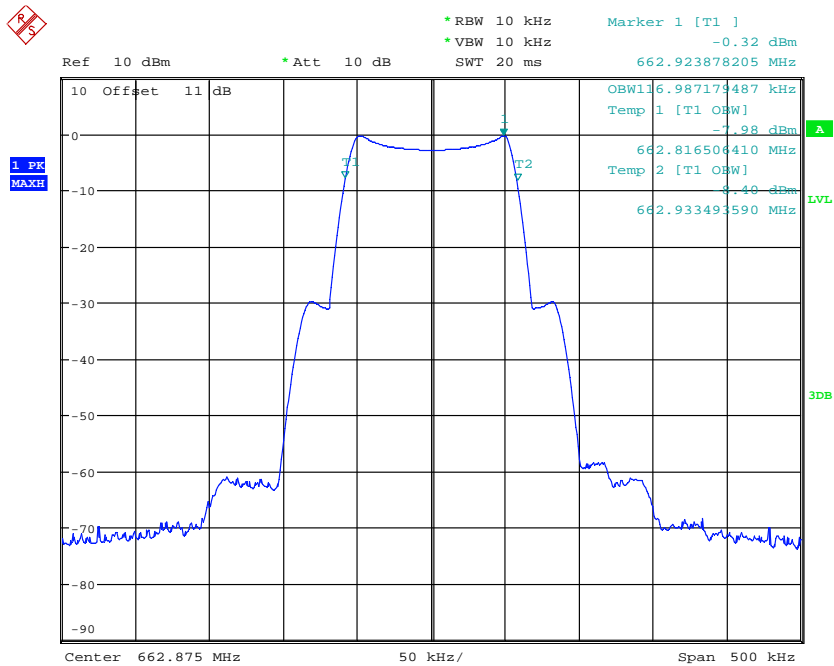


OCCUPIED BANDWIDTH 662.875MHz

Date: 6.MAR.2023 15:18:08

Limit

The operating bandwidth shall not exceed 200 kHz.

Test equipment used: ETSTW-RE 055 , ETSTW-RE 072, ETSTW-RE 050




Registration number: W6M22203-21663-C-1

FCC ID: JEBUF-9R1


Emission Mask

(g) Emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in Section 8.3 of ETSI EN 300 422-1 V2.1.2 (2017-01) (incorporated by reference, see § 15.38). Emissions outside this band shall comply with the limit specified at the edges of the ETSI mask.

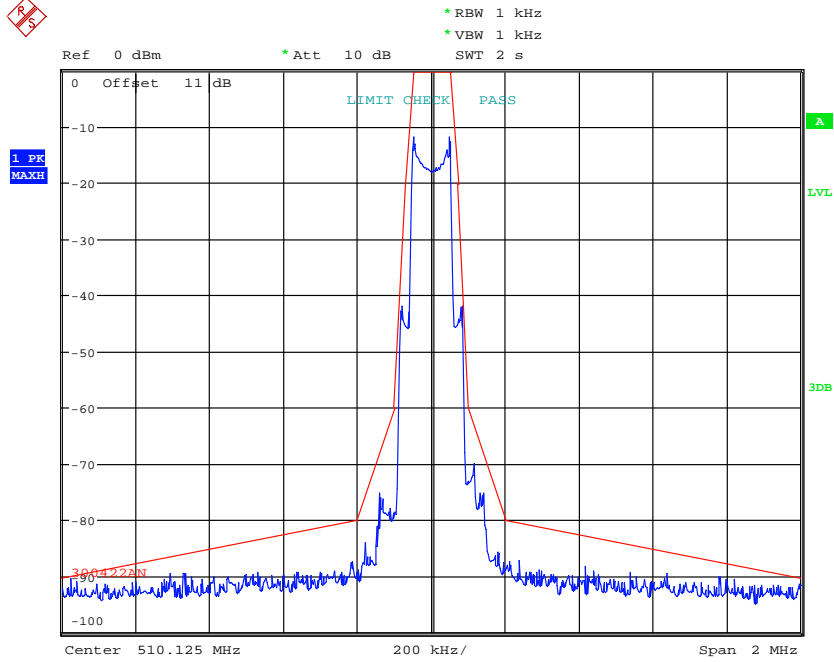


NECESSARY BANDWIDTH 510.125MHz

Date: 6.MAR.2023 15:31:29




Registration number: W6M22203-21663-C-1
FCC ID: JEBUF-9R1

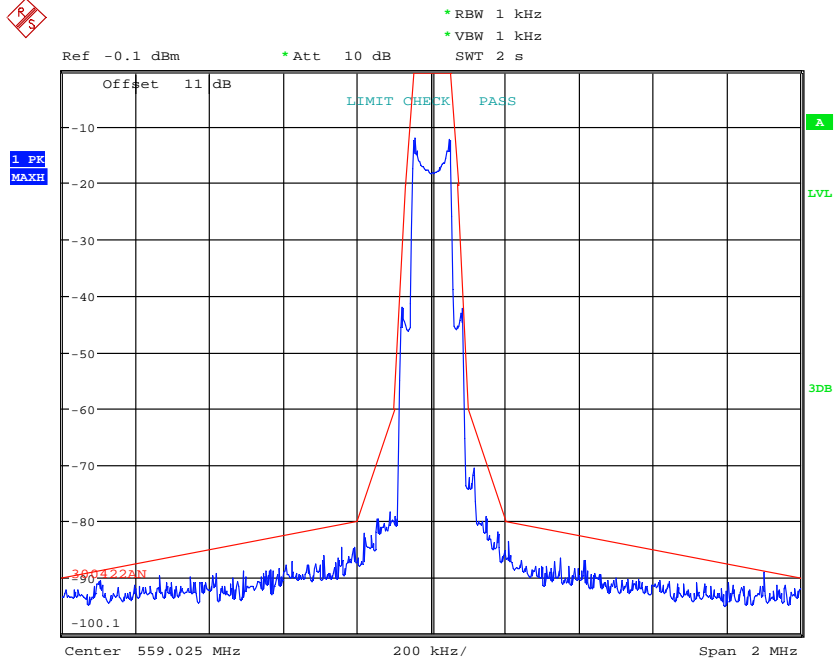

NECESSARY BANDWIDTH 559.025MHz

Date: 6.MAR.2023 15:04:22

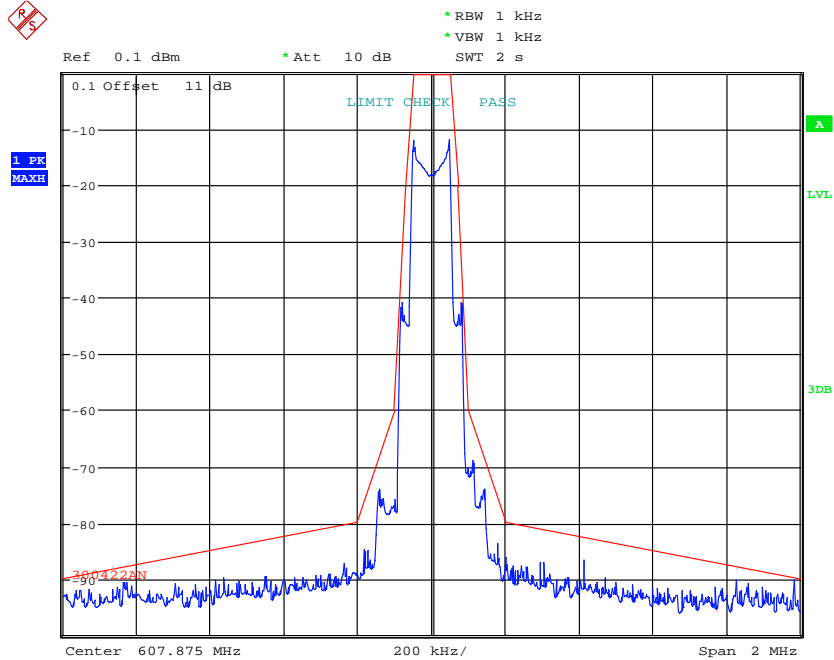


NECESSARY BANDWIDTH 607.875MHz

Date: 6.MAR.2023 14:59:06




Registration number: W6M22203-21663-C-1
FCC ID: JEBUF-9R1

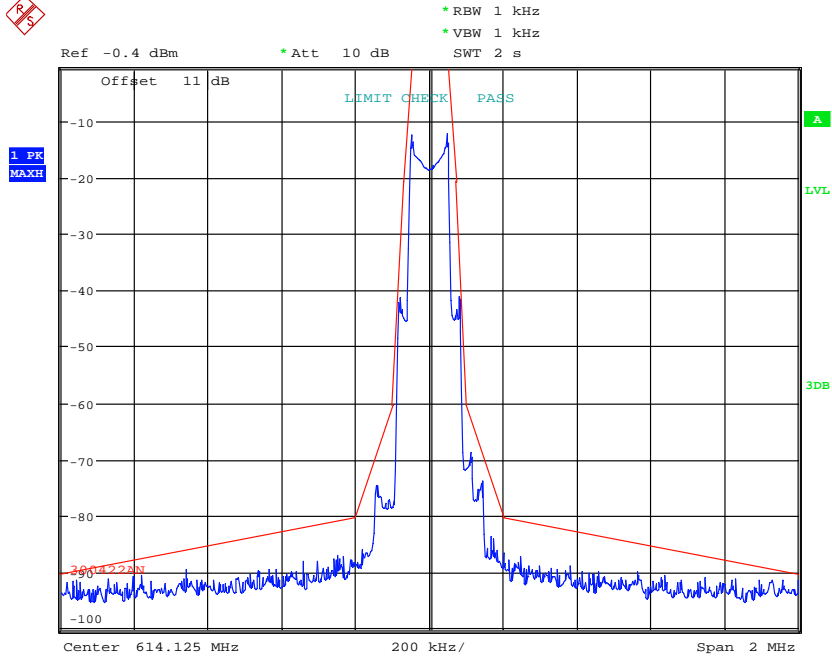

NECESSARY BANDWIDTH 614.125MHz

Date: 6.MAR.2023 14:51:16

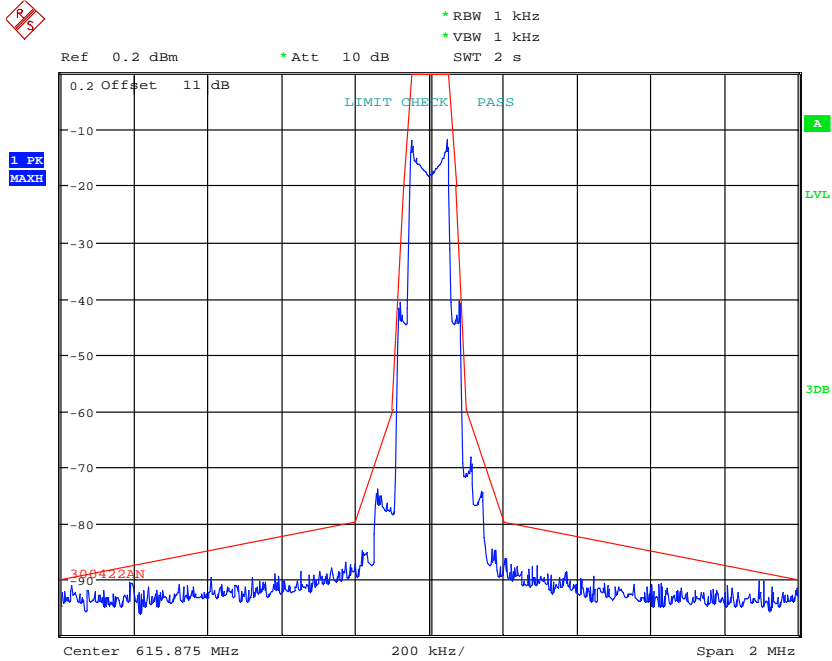


NECESSARY BANDWIDTH 615.875MHz

Date: 6.MAR.2023 14:54:24




Registration number: W6M22203-21663-C-1
FCC ID: JEBUF-9R1

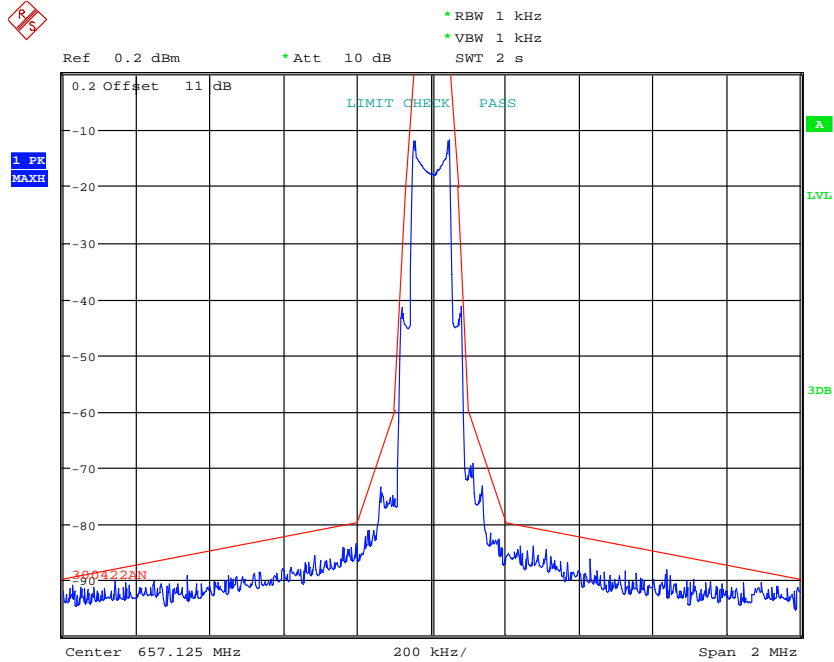

NECESSARY BANDWIDTH 657.125MHz

Date: 6.MAR.2023 15:15:11

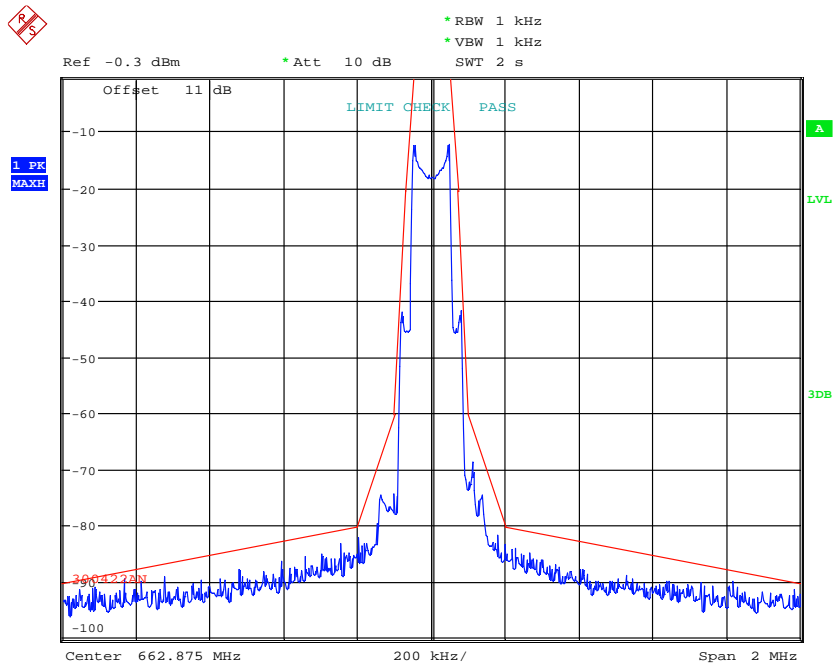

NECESSARY BANDWIDTH 662.875MHz

Date: 6.MAR.2023 15:18:55

Test equipment used: ETSTW-RE 055 , ETSTW-RE 072

Registration number: W6M22203-21663-C-1
 FCC ID: JEBUF-9R1
 LIMIT acc. Subclause 8.3.1.2

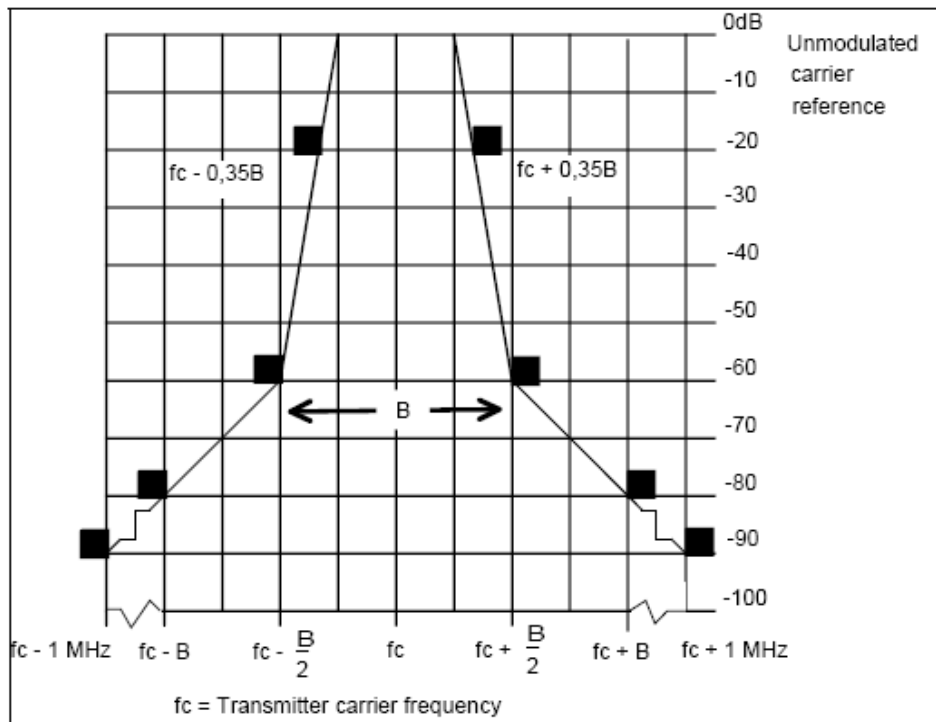


Figure 1: Spectrum mask for analogue systems in all bands

LIMIT acc. Subclause 8.3.2.2

The transmitter output spectrum shall be within the mask defined in figure 2. This mask may also be used for both analogue and digital Assistive Listening Devices.

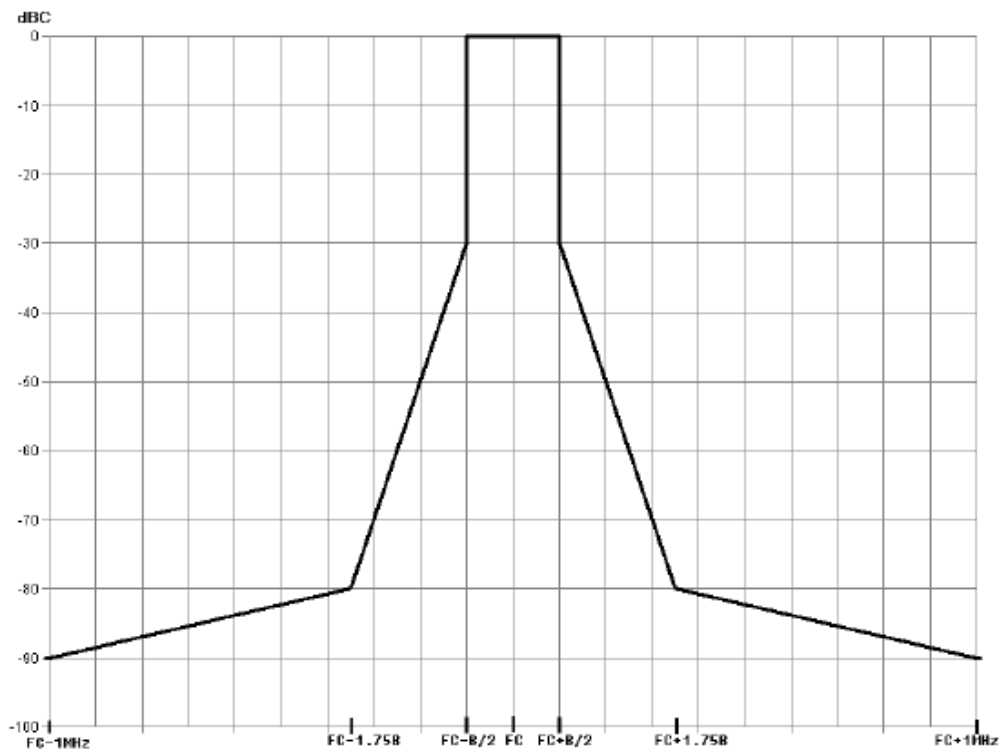


Figure 2: Spectrum mask for digital systems below 1 GHz



Registration number: W6M22203-21663-C-1

FCC ID: JEBUF-9R1

6 Radiated Spurious Emission , FCC 15.236(g)

6.1 Test procedure

(g) Emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in Section 8.3 of ETSI EN 300 422-1 V2.1.2 (2017-01) (incorporated by reference, see § 15.38). Emissions outside this band shall comply with the limit specified at the edges of the ETSI mask.

6.2 Test results

The measurements of the spurious emission at the upper , center and lower channel.
The measurement diagrams show that all significant spurs are well below the limit line.

Summary table with radiated data of the test plots for Carrier Test Frequency

Model: UF-9R Date: --
 Mode: -- Temperature: -- °C Engineer: --
 Polarization: Horizontal Humidity: -- %

Frequency (MHz)	Reading (dBm) Peak	Factor (dB) Corr.	Result (dBm)	Limit (dBm)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--

Polarization: Vertical

Frequency (MHz)	Reading (dBm) Peak	Factor (dB) Corr.	Result (dBm)	Limit (dBm)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--

Note:

1. Correction Factor = Antenna Gain + Cable Loss + Amplifier Gain
2. The formula of measured value as: Test Result = Reading + Correction Factor
3. All not in the table noted test results are more than 20 dB below the relevant limits.
4. After evaluated, the test result in this report adopt the worst case to measure, please see attached diagrams in appendix.

Test equipment used: ETSTW-RE 004, ETSTW-RE 122, ETSTW-RE 030, ETSTW-RE 042,
 ETSTW-RE 043, ETSTW-RE 044



Registration number: W6M22203-21663-C-1

FCC ID: JEBUF-9R1

7 Frequency Stability, FCC 15.236(f)(3)

7.1 Test procedure

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.005\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. Battery operated equipment shall be tested using a new battery.

7.2 Test results

Test date: March 06, 2023

Temperature: 20.6 °C

Humidity: 58.2 %

Tester: Sora

510.125MHz			
Test Volt	Carrier Freq.(MHz)	Result(ppm)	limit(ppm)
Vmin = 2.55Vd.c.	510.125769	1.507926	50
Vnom = 3Vd.c.	510.125737	1.445095	50
Vmax = 3.45Vd.c.	510.125737	1.445095	50

510.125MHz			
Test Temp	Carrier Freq.(MHz)	Result(ppm)	limit(ppm)
-20	510.128397	6.660007	50
-10	510.127901	5.686138	50
0	510.126923	3.769815	50
10	510.126186	2.324718	50
20	510.125737	1.445095	50
30	510.126516	2.971872	50
40	510.125641	1.256606	50
50	510.125048	0.094246	50



Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M22203-21663-C-1
 FCC ID: JEBUF-9R1

559.025MHz			
Test Volt	Carrier Freq.(MHz)	Result(ppm)	limit(ppm)
Vmin = 2.55Vd.c.	559.025913	1.634027	50
Vnom = 3Vd.c.	559.025938	1.677027	50
Vmax = 3.45Vd.c.	559.025913	1.634027	50

559.025MHz			
Test Temp	Carrier Freq.(MHz)	Result(ppm)	limit(ppm)
-20	559.029875	8.720540	50
-10	559.028822	6.837109	50
0	559.027236	3.999410	50
10	559.026418	2.537040	50
20	559.025938	1.677027	50
30	559.028558	6.364102	50
40	559.026034	1.849030	50
50	559.024952	-0.086002	50

607.875MHz			
Test Volt	Carrier Freq.(MHz)	Result(ppm)	limit(ppm)
Vmin = 2.55Vd.c.	607.882772	12.786241	50
Vnom = 3Vd.c.	607.882692	12.654424	50
Vmax = 3.45Vd.c.	607.882692	12.654424	50

607.875MHz			
Test Temp	Carrier Freq.(MHz)	Result(ppm)	limit(ppm)
-20	607.885737	17.663465	50
-10	607.885737	17.663465	50
0	607.885657	17.531649	50
10	607.884295	15.290762	50
20	607.882692	12.654424	50
30	607.880128	8.436282	50
40	607.877003	3.295423	50
50	607.874760	-0.395451	50



Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M22203-21663-C-1
 FCC ID: JEBUF-9R1

614.125MHz			
Test Volt	Carrier Freq.(MHz)	Result(ppm)	limit(ppm)
Vmin = 2.55Vd.c.	614.131811	11.090408	50
Vnom = 3Vd.c.	614.131811	11.090408	50
Vmax = 3.45Vd.c.	614.131811	11.090408	50

614.125MHz			
Test Temp	Carrier Freq.(MHz)	Result(ppm)	limit(ppm)
-20	614.135978	17.875130	50
-10	614.135817	17.614180	50
0	614.135817	17.614180	50
10	614.134615	15.657049	50
20	614.131811	11.090408	50
30	614.129407	7.176147	50
40	614.127163	3.522837	50
50	614.124279	-1.174279	50

615.875MHz			
Test Volt	Carrier Freq.(MHz)	Result(ppm)	limit(ppm)
Vmin = 2.55Vd.c.	615.882933	12.880360	50
Vnom = 3Vd.c.	615.882853	12.750256	50
Vmax = 3.45Vd.c.	615.882865	12.770865	50

615.875MHz			
Test Temp	Carrier Freq.(MHz)	Result(ppm)	limit(ppm)
-20	615.887179	19.775907	50
-10	615.887019	19.515699	50
0	615.886378	18.474861	50
10	615.884615	15.612559	50
20	615.882853	12.750256	50
30	615.880449	8.847117	50
40	615.876042	1.691361	50
50	615.875000	0.000000	50



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22203-21663-C-1
 FCC ID: JEBUF-9R1

657.125MHz			
Test Volt	Carrier Freq.(MHz)	Result(ppm)	limit(ppm)
Vmin = 2.55Vd.c.	657.129247	6.462690	50
Vnom = 3Vd.c.	657.129087	6.218814	50
Vmax = 3.45Vd.c.	657.129087	6.218814	50

657.125MHz			
Test Temp	Carrier Freq.(MHz)	Result(ppm)	limit(ppm)
-20	657.131490	9.876941	50
-10	657.131490	9.876941	50
0	657.131410	9.755002	50
10	657.130449	8.291753	50
20	657.129087	6.218814	50
30	657.127484	3.780063	50
40	657.124840	-0.243874	50
50	657.123558	-2.194876	50

662.875MHz			
Test Volt	Carrier Freq.(MHz)	Result(ppm)	limit(ppm)
Vmin = 2.55Vd.c.	662.880128	7.736308	50
Vnom = 3Vd.c.	662.880048	7.615428	50
Vmax = 3.45Vd.c.	662.880048	7.615428	50

662.875MHz			
Test Temp	Carrier Freq.(MHz)	Result(ppm)	limit(ppm)
-20	662.881571	9.912145	50
-10	662.881571	9.912145	50
0	662.881490	9.791265	50
10	662.881250	9.428625	50
20	662.880048	7.615428	50
30	662.877804	4.230793	50
40	662.876122	1.692318	50
50	662.874760	-0.362640	50

Limit According to FCC 15.236(f)(3)
The frequency tolerance of the transmitter shall be 0.005 percent.

Test equipment used: ETSTW-RE 055, ETSTW-CE 009



Registration number: W6M22203-21663-C-1

FCC ID: JEBUF-9R1

8 Line Conducted Emission , FCC 15.207

8.1 Test procedure

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

8.2 Test Results

Model: UF-9R Date: --
 Mode: -- Temperature: -- °C Engineer: --
 Polarization: N Humidity: -- %

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result (dBuV)		Limit (dBuV)		Margin (dB)
	QP	Ave.		QP	Ave.	QP	Ave.	
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--


Polarization: L1

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result (dBuV)		Limit (dBuV)		Margin (dB)
	QP	Ave.		QP	Ave.	QP	Ave.	
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Note:

1. The formula of measured value as: **Test Result = Reading + Correction Factor**
2. **The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss**
3. **Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average**
4. **All not in the table noted test results are more than 20 dB below the relevant limits.**
5. **Up Line: QP Limit Line, Down Line: Ave Limit Line.**
6. **This test is not required because the EUT uses battery.**

Test equipment used: ETSTW-CE 001, ETSTW-CE 016, ETSTW-RE 045



Registration number: W6M22203-21663-C-1
FCC ID: JEBUF-9R1

Appendix

Measurement diagrams

Radiation Spurious Emission



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
 Tel:+886-2-6606-8877
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sora

File :1

Data :#1


Date: 2023/3/6

Temperature:22 °C

-20.0 dBm

Time: 上午 08:05:39

Humidity:55 %

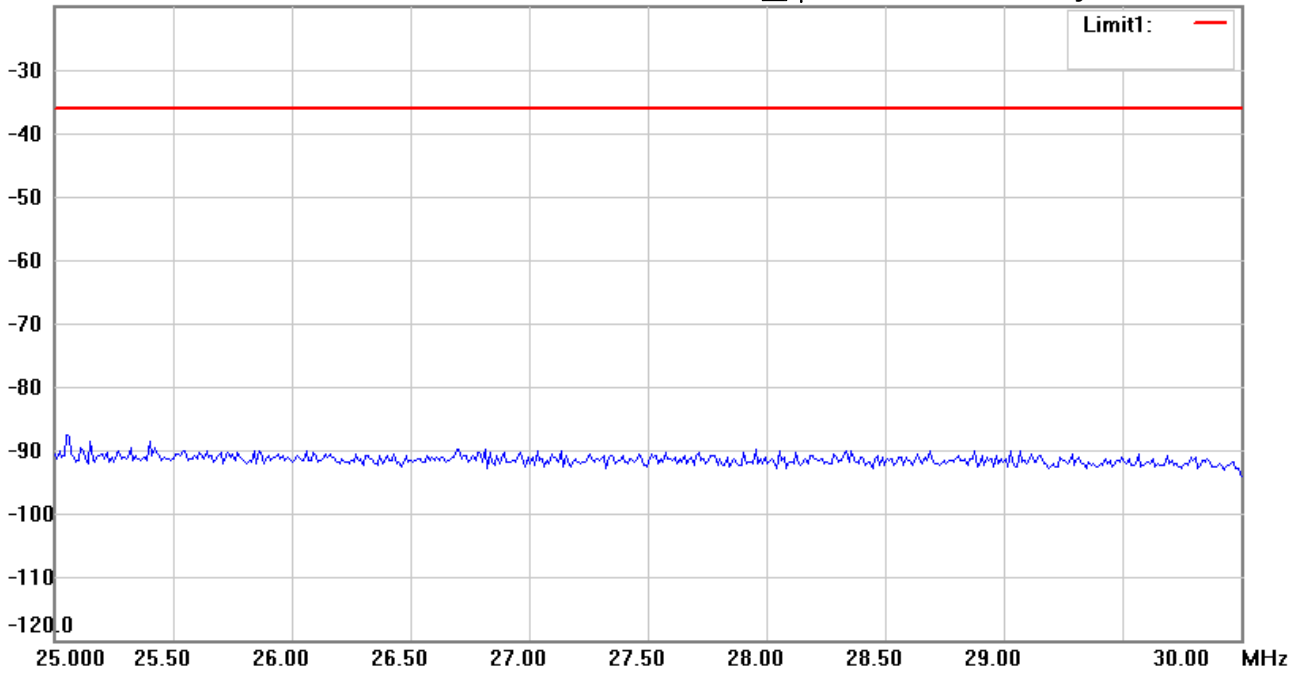

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Horizontal*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 510.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
 Tel:+886-2-6606-8877
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sora

File :1

Data :#3


Date: 2023/3/6

Temperature:22 °C

-20.0 dBm

Time: 上午 08:16:47

Humidity:55 %

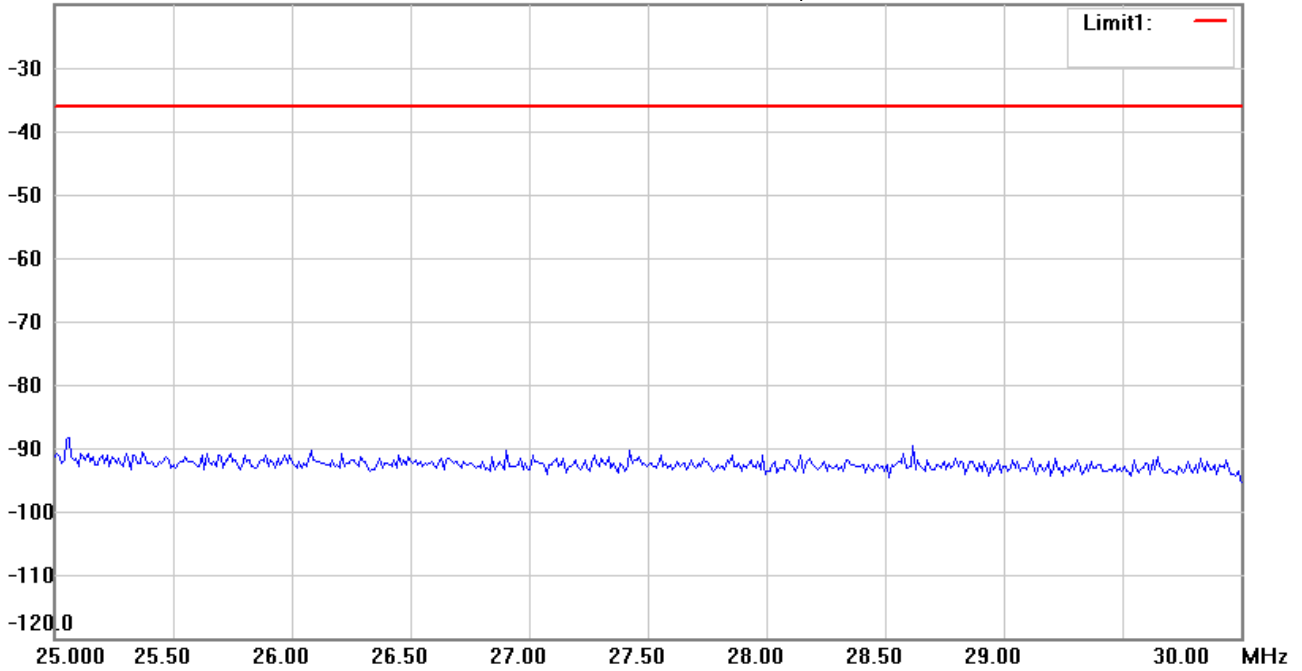

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Vertical*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 510.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Sora

File :1

Data :#2


Date: 2023/3/6

Temperature:22 °C

-20.0 dBm

Time: 上午 08:06:20

Humidity:55 %

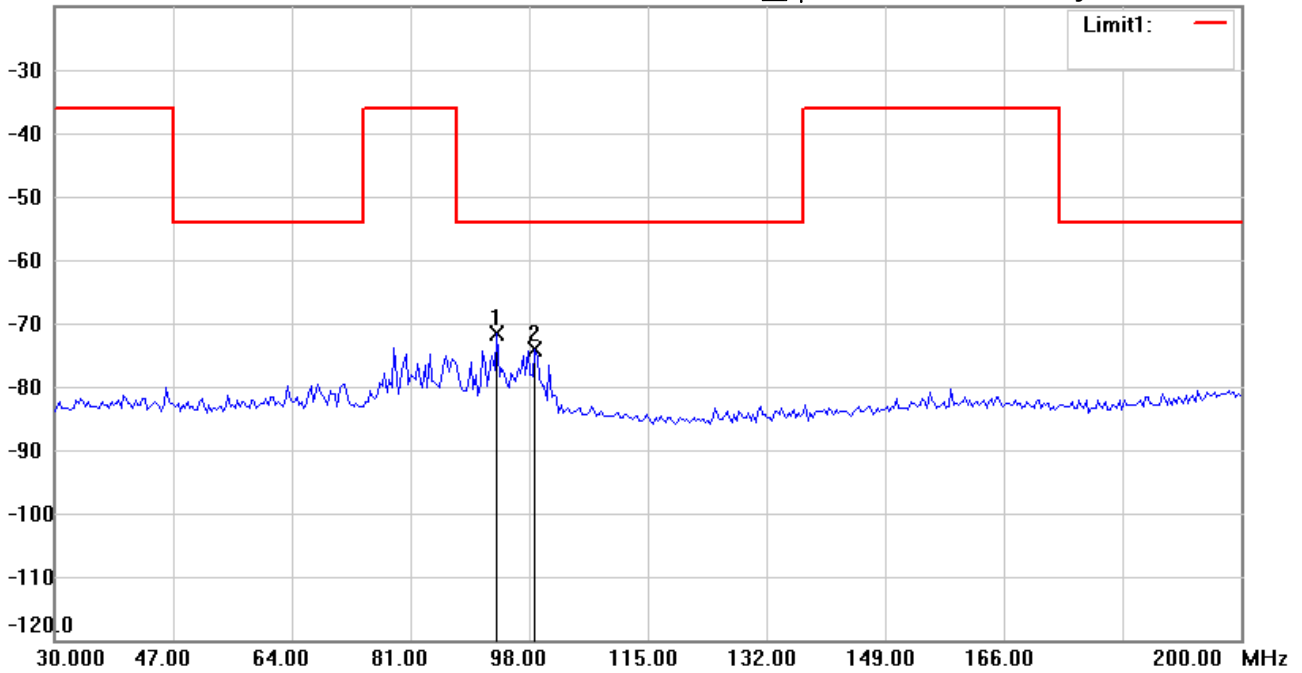

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Horizontal*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 510.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	93.3667	-93.15	peak	21.42	-71.73	-54.00	150	135	-17.73	
	98.8176	-94.76	peak	20.70	-74.06	-54.00	150	110	-20.06	



Radiated Emission Measurement

Operator: Sora

File :1

Data :#4


Date: 2023/3/6

Temperature:22 °C

-20.0 dBm

Time: 上午 08:17:26

Humidity:55 %

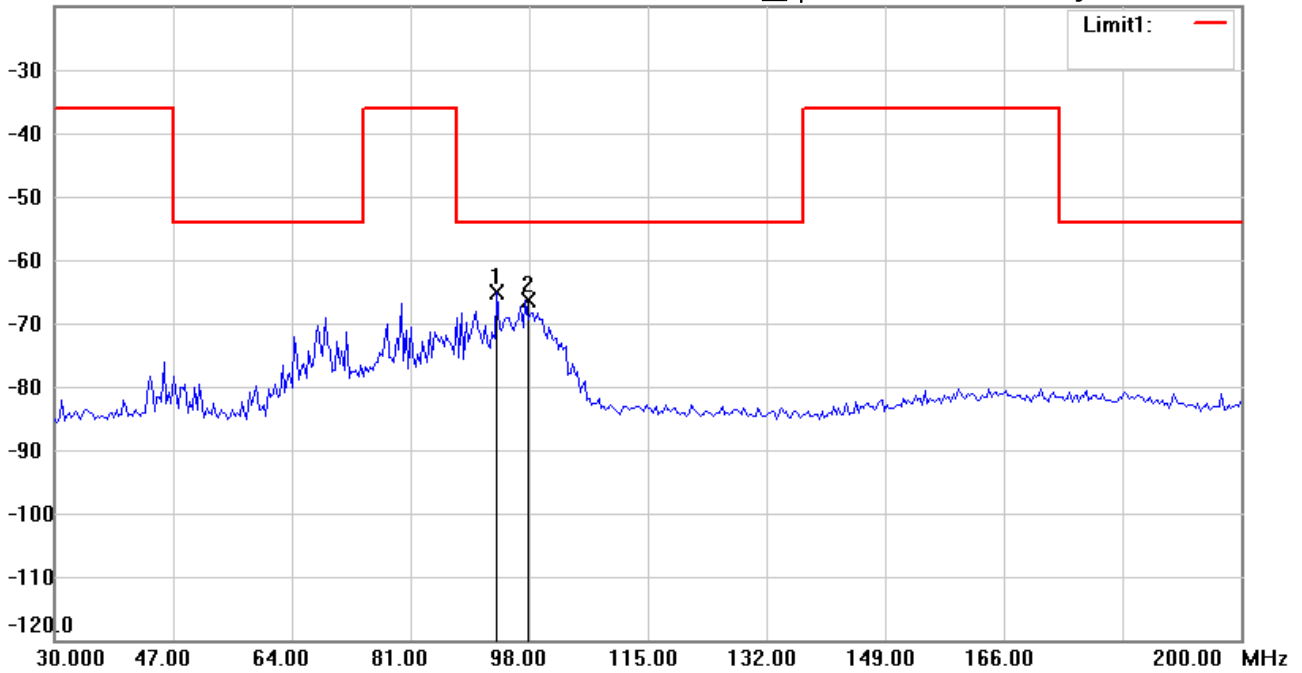

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: **Vertical**

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 510.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	93.3667	-86.33	peak	21.18	-65.15	-54.00	150	315	-11.15	
	97.4550	-88.36	peak	21.90	-66.46	-54.00	150	295	-12.46	



Radiated Emission Measurement

Operator: Sora

File :2

Data :#1


Date: 2023/2/28

Temperature:22 °C

-20.0 dBm

Time: 下午 03:55:56

Humidity:55 %

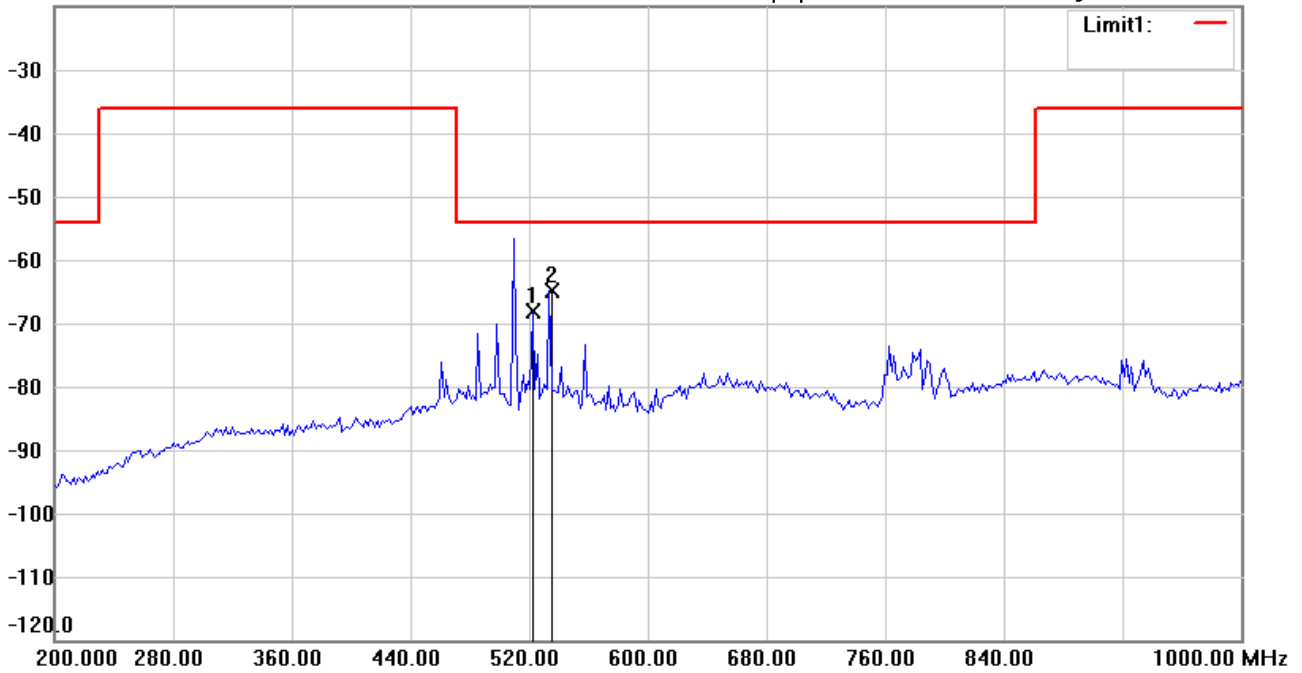

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Horizontal*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 510.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	522.2445	-60.49	peak	-7.53	-68.02	-54.00	150	95	-14.02	
*	533.4670	-57.65	peak	-7.33	-64.98	-54.00	150	150	-10.98	



Radiated Emission Measurement

Operator: Sora

File :2

Data :#2


Date: 2023/2/28

Temperature:22 °C

-20.0 dBm

Time: 下午 03:57:52

Humidity:55 %

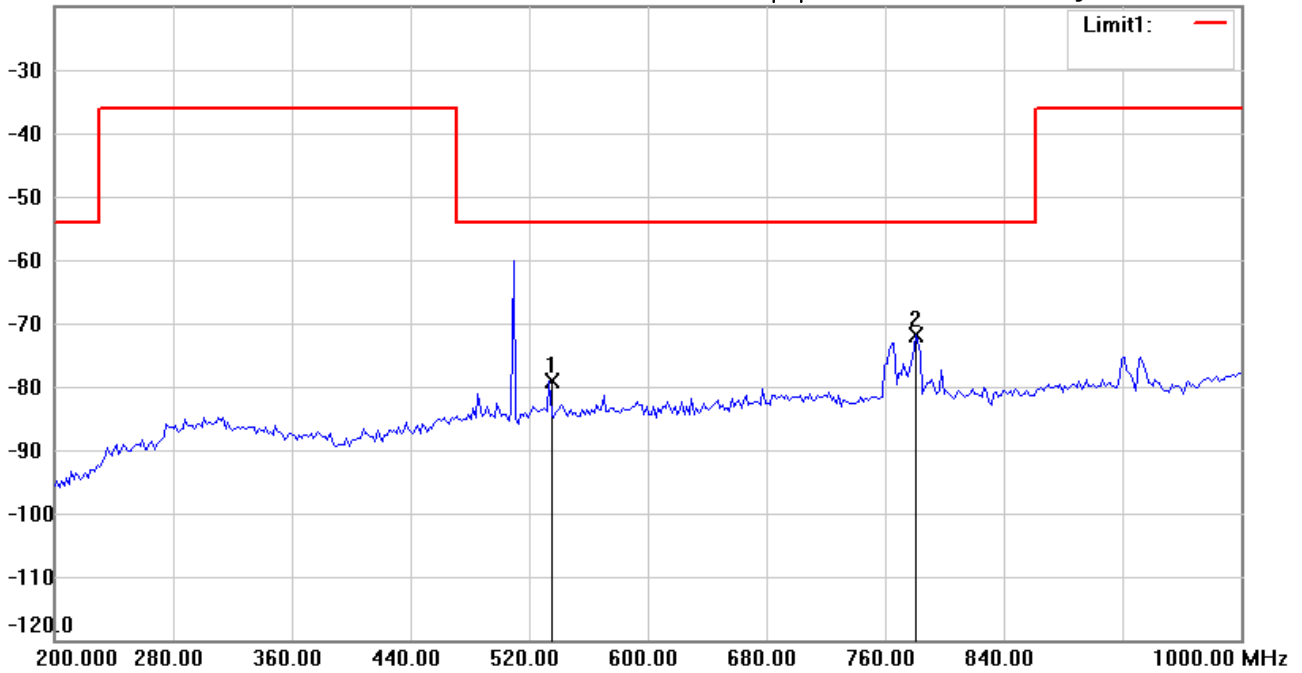

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Vertical*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 510.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	533.4670	-72.36	peak	-6.86	-79.22	-54.00	150	315	-25.22	
*	780.3607	-68.01	peak	-3.90	-71.91	-54.00	150	270	-17.91	



Radiated Emission Measurement

Operator: Sora

File :3

Data :#1


Date: 2023/2/28

Temperature:22 °C

-20.0 dBm

Time: 上午 11:39:40

Humidity:55 %

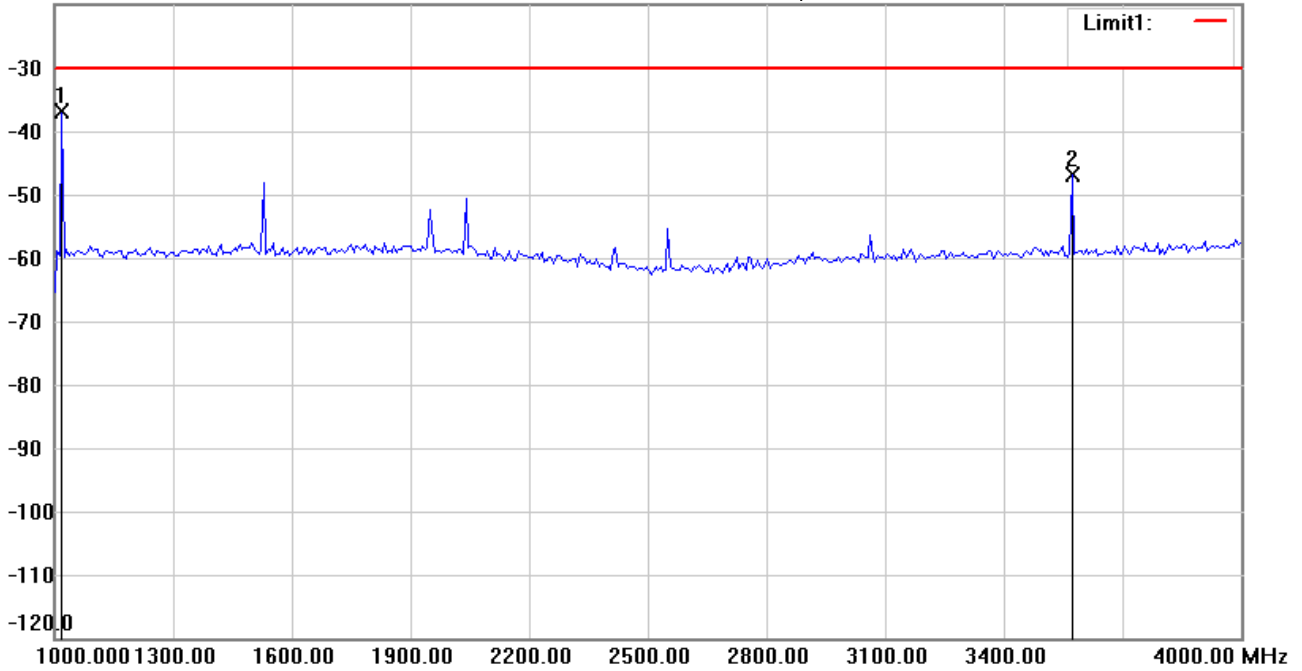

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Horizontal*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 510.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1018.036	-40.58	peak	3.67	-36.91	-30.00	150	165	-6.91	
	3573.146	-51.26	peak	4.33	-46.93	-30.00	150	100	-16.93	



Radiated Emission Measurement

Operator: Sora

File :3

Data :#2


Date: 2023/2/28

Temperature:22 °C

-20.0 dBm

Time: 上午 11:44:02

Humidity:55 %

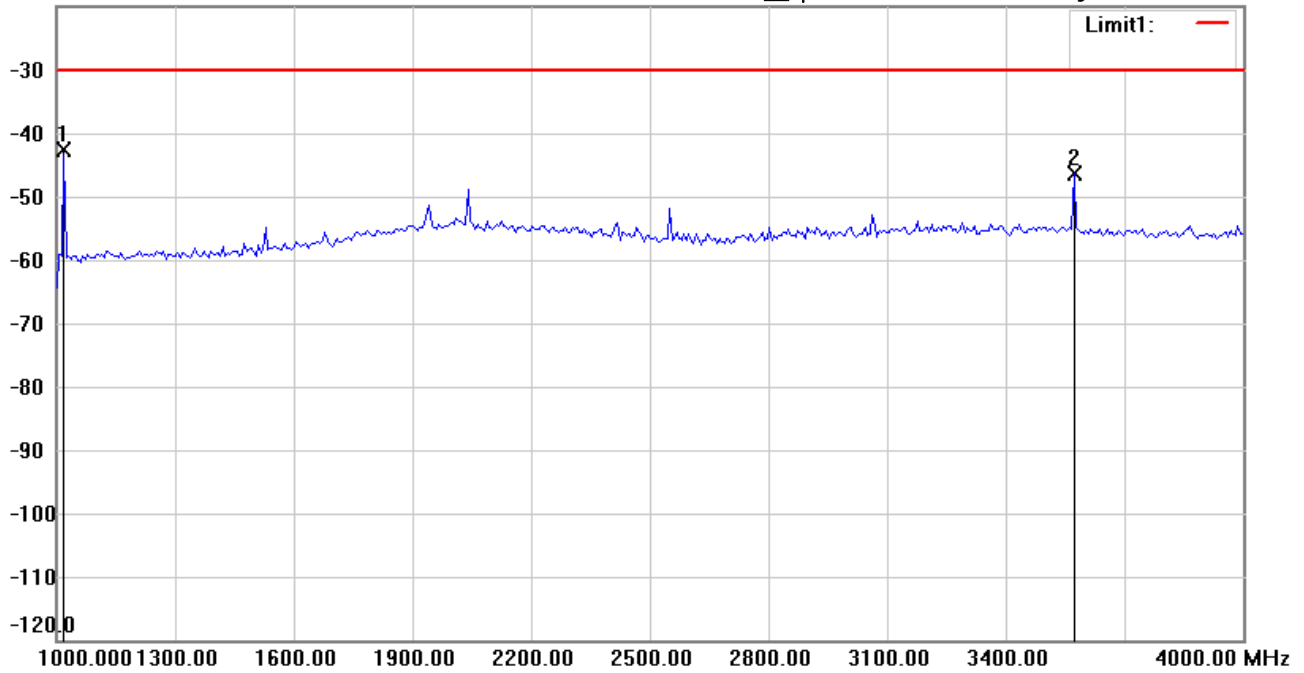

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: **Vertical**

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 510.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1018.036	-46.01	peak	3.45	-42.56	-30.00	150	205	-12.56	
	3573.146	-54.51	peak	8.20	-46.31	-30.00	150	355	-16.31	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
 Tel:+886-2-6606-8877
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sora

File :1

Data :#1


Date: 2023/2/28

Temperature:24 °C

-20.0 dBm

Time: 下午 04:44:30

Humidity:60 %

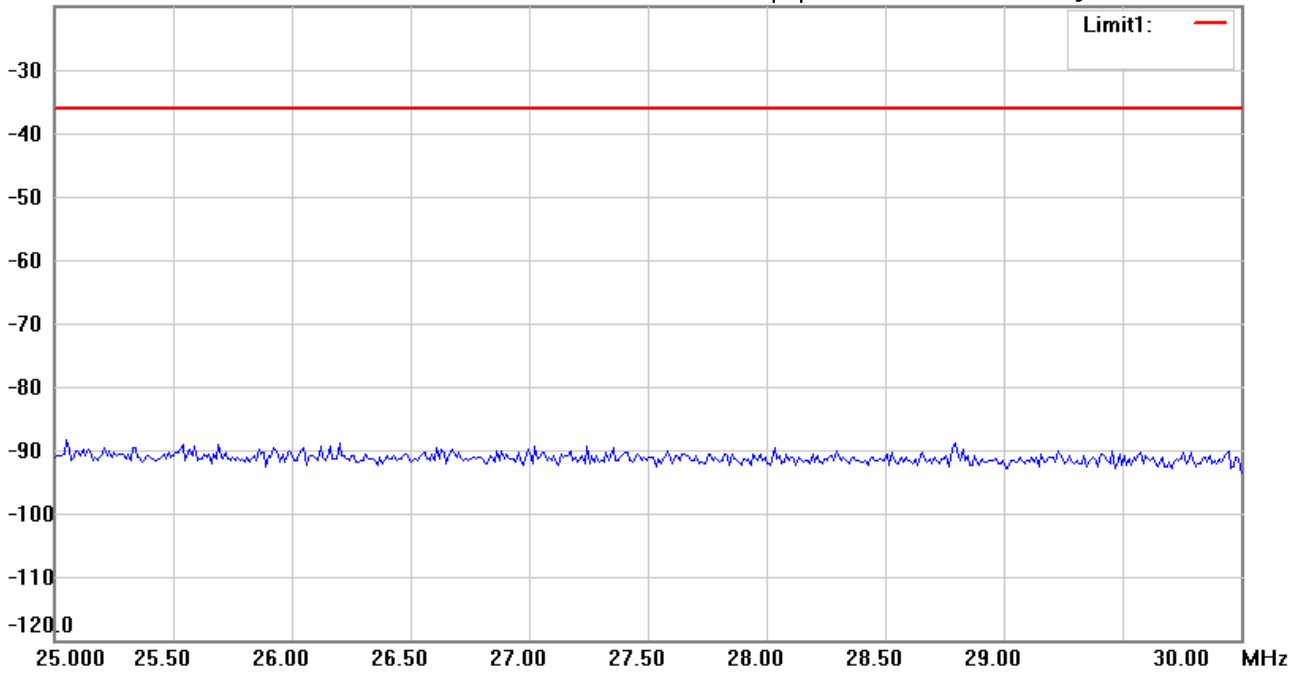

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Horizontal*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 559.025MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
 Tel:+886-2-6606-8877
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sora

File :1

Data :#3


Date: 2023/2/28

Temperature:24 °C

-20.0 dBm

Time: 下午 05:13:38

Humidity:60 %

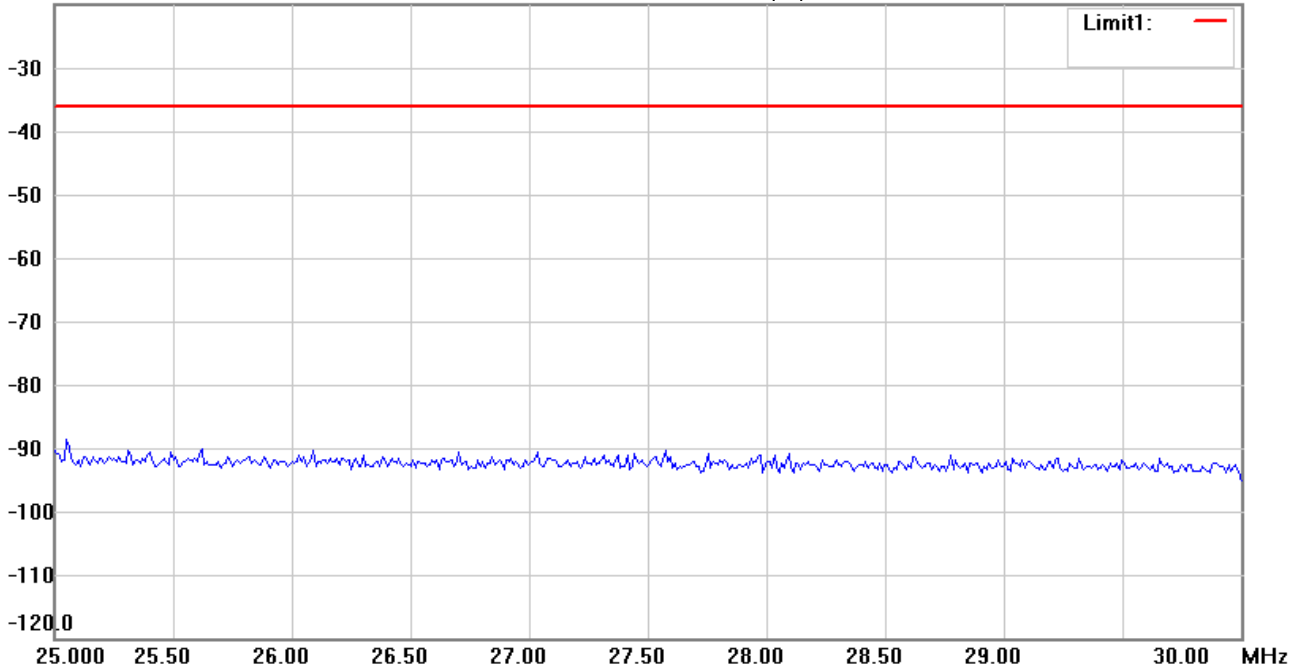

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Vertical*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 559.025MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Sora

File :1

Data :#2


Date: 2023/2/28

Temperature:24 °C

-20.0 dBm

Time: 下午 04:45:08

Humidity:60 %

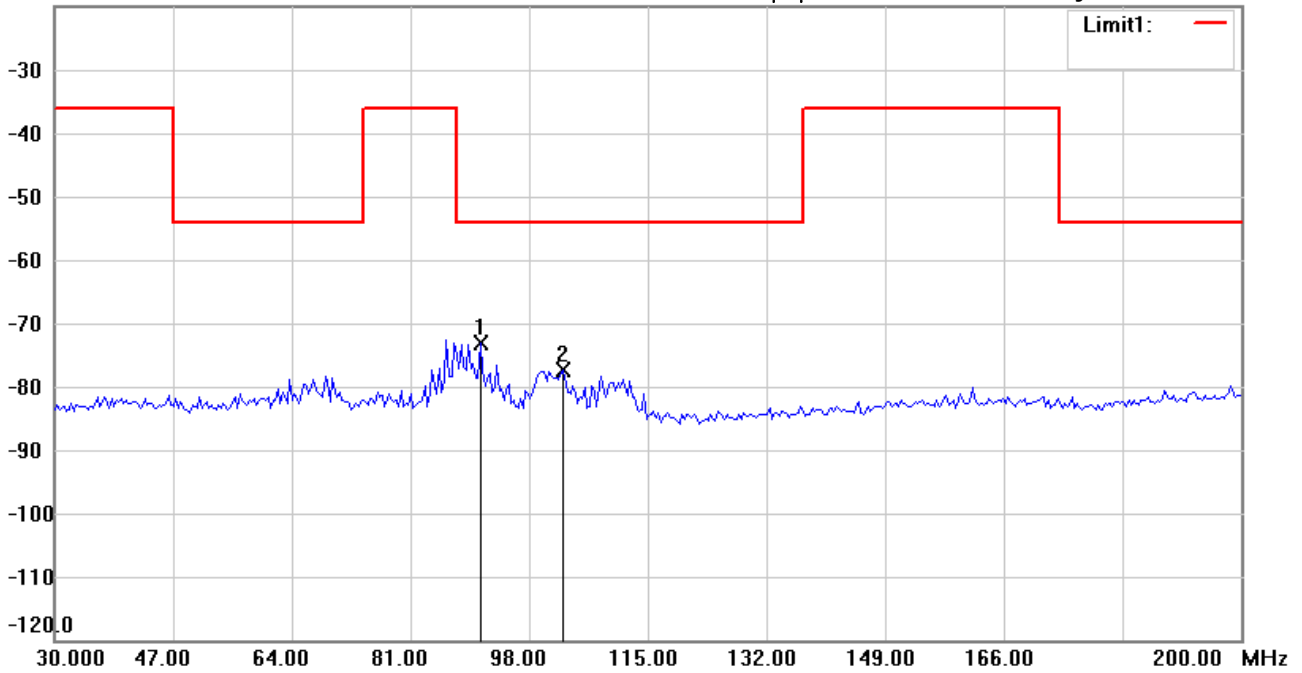

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Horizontal*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 559.025MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	90.9820	-94.78	peak	21.73	-73.05	-54.00	150	55	-19.05	
	102.9058	-97.68	peak	20.40	-77.28	-54.00	150	105	-23.28	



Radiated Emission Measurement

Operator: Sora

File :1

Data :#4


Date: 2023/2/28

Temperature:24 °C

-20.0 dBm

Time: 下午 05:14:16

Humidity:60 %

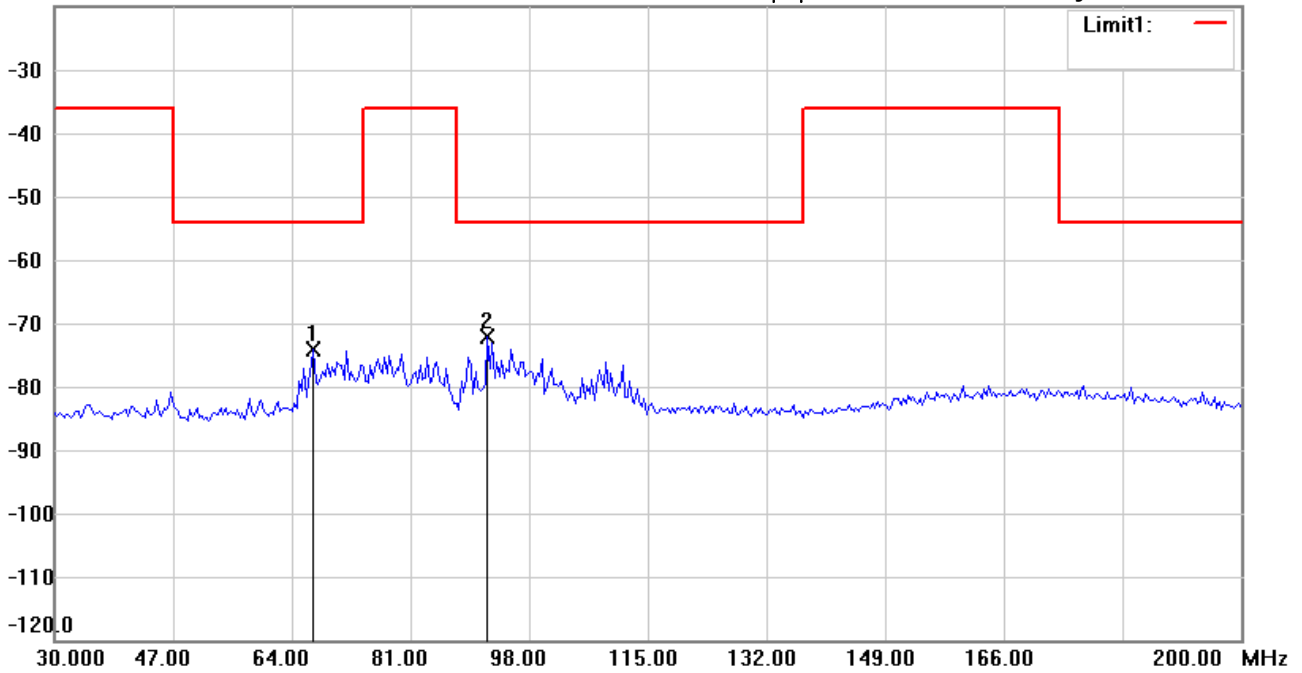

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Vertical*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 559.025MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	67.1343	-95.43	peak	21.28	-74.15	-54.00	150	285	-20.15	
*	92.0040	-93.06	peak	20.93	-72.13	-54.00	150	315	-18.13	



Radiated Emission Measurement

Operator: Sora

File :2

Data :#1


Date: 2023/2/28

Temperature:24 °C

-20.0 dBm

Time: 下午 05:23:40

Humidity:60 %

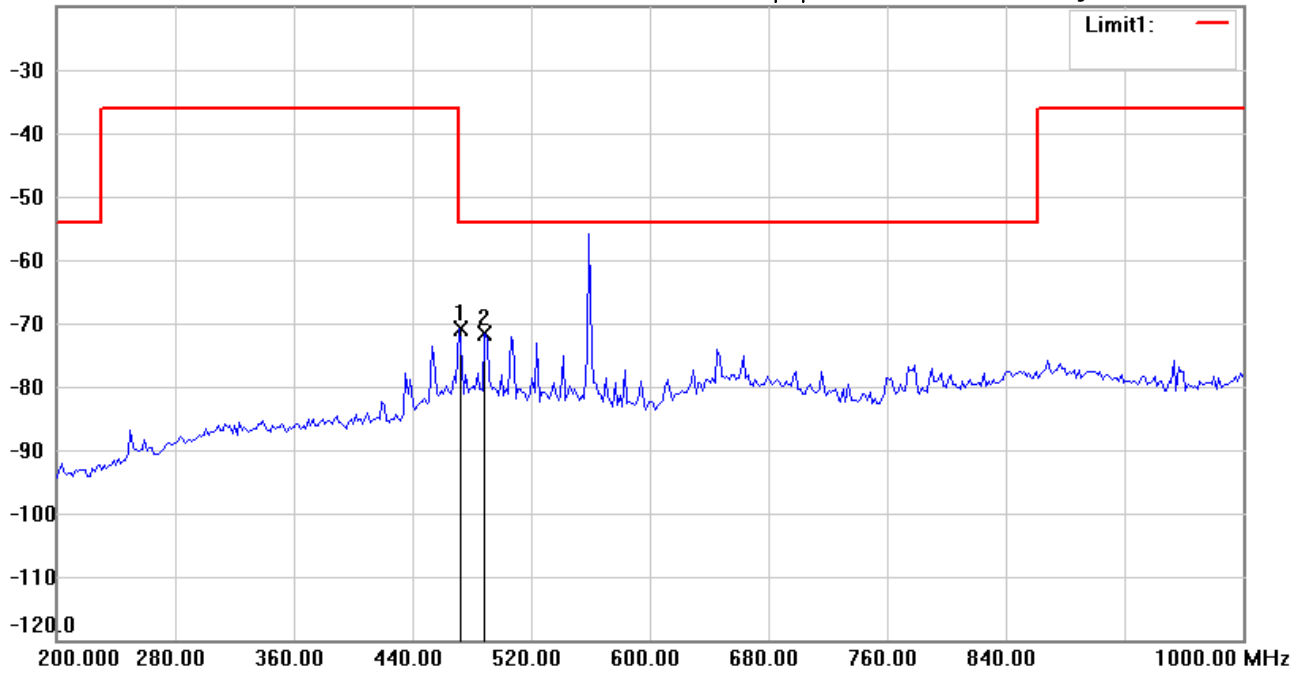

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Horizontal*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 559.025MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	470.9420	-62.44	peak	-8.43	-70.87	-54.00	150	135	-16.87	
	488.5772	-63.46	peak	-8.13	-71.59	-54.00	150	115	-17.59	



Radiated Emission Measurement

Operator: Sora

File :2

Data :#2


Date: 2023/2/28

Temperature:24 °C

-20.0 dBm

Time: 下午 05:25:59

Humidity:60 %

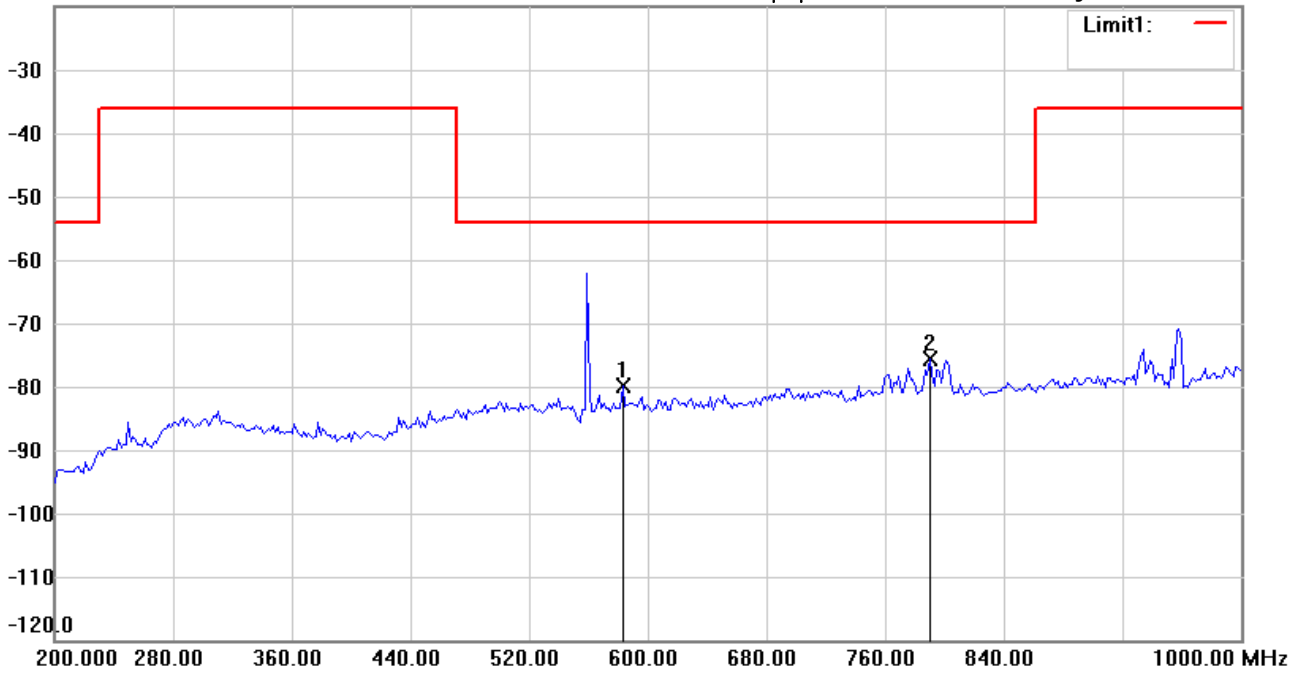

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Vertical*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 559.025MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	583.1663	-73.52	peak	-6.37	-79.89	-54.00	150	225	-25.89	
*	789.9800	-71.77	peak	-3.76	-75.53	-54.00	150	305	-21.53	



Radiated Emission Measurement

Operator: Sora

File :3

Data :#1


Date: 2023/2/28

Temperature:24 °C

-20.0 dBm

Time: 下午 04:21:25

Humidity:60 %

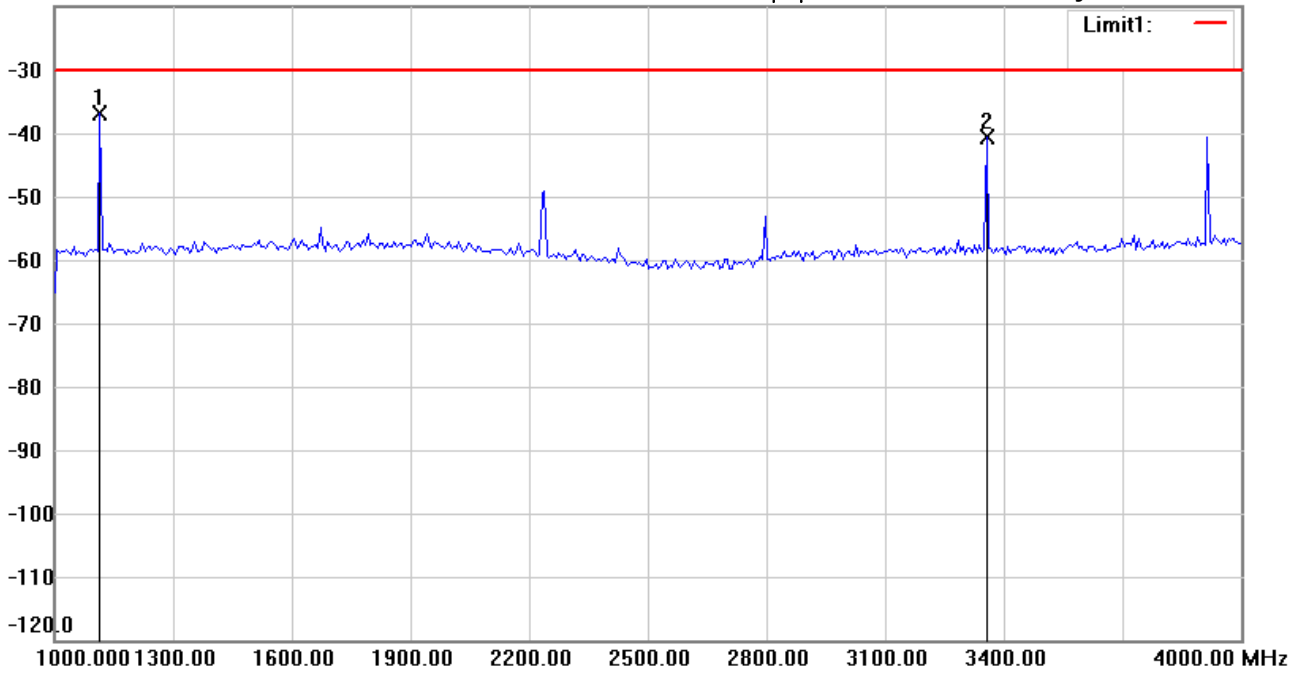

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Horizontal*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 559.025MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1114.228	-40.52	peak	3.64	-36.88	-30.00	150	95	-6.88	
	3356.713	-44.51	peak	3.79	-40.72	-30.00	150	55	-10.72	



Radiated Emission Measurement

Operator: Sora

File :3

Data :#2


Date: 2023/2/28

Temperature:24 °C

-20.0 dBm

Time: 下午 04:23:22

Humidity:60 %

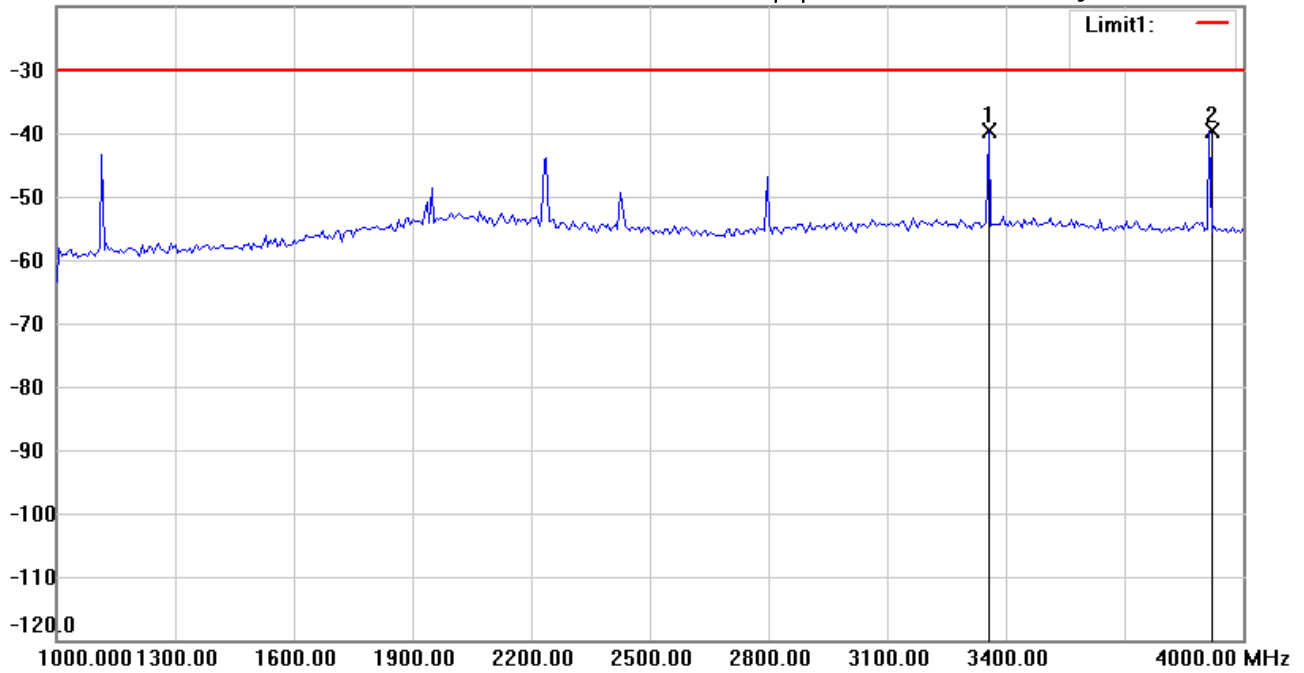

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: **Vertical**

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 559.025MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	3356.713	-47.76	peak	8.06	-39.70	-30.00	150	305	-9.70	
	3915.832	-47.51	peak	7.79	-39.72	-30.00	150	260	-9.72	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
 Tel:+886-2-6606-8877
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sora

File :1

Data :#1


Date: 2023/3/6

Temperature:22 °C

-20.0 dBm

Time: 上午 08:40:15

Humidity:55 %

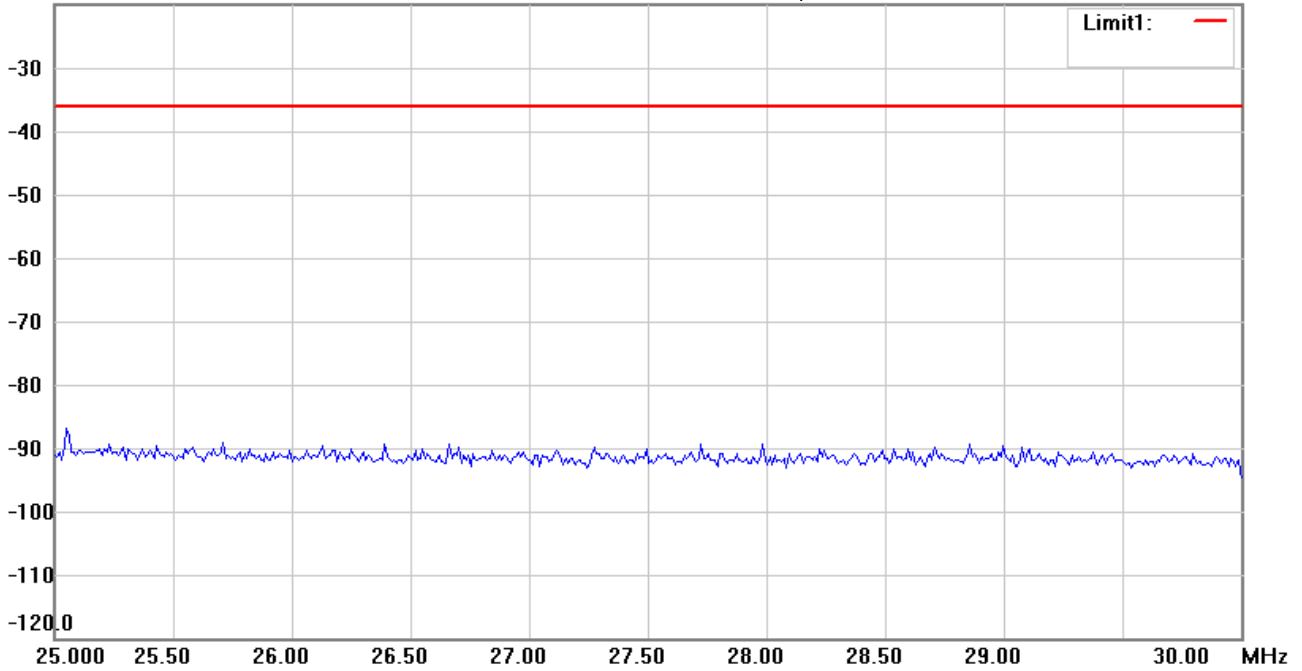

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Horizontal*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 607.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
 Tel:+886-2-6606-8877
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sora

File :1

Data :#3


Date: 2023/3/6

Temperature:22 °C

-20.0 dBm

Time: 上午 08:51:07

Humidity:55 %

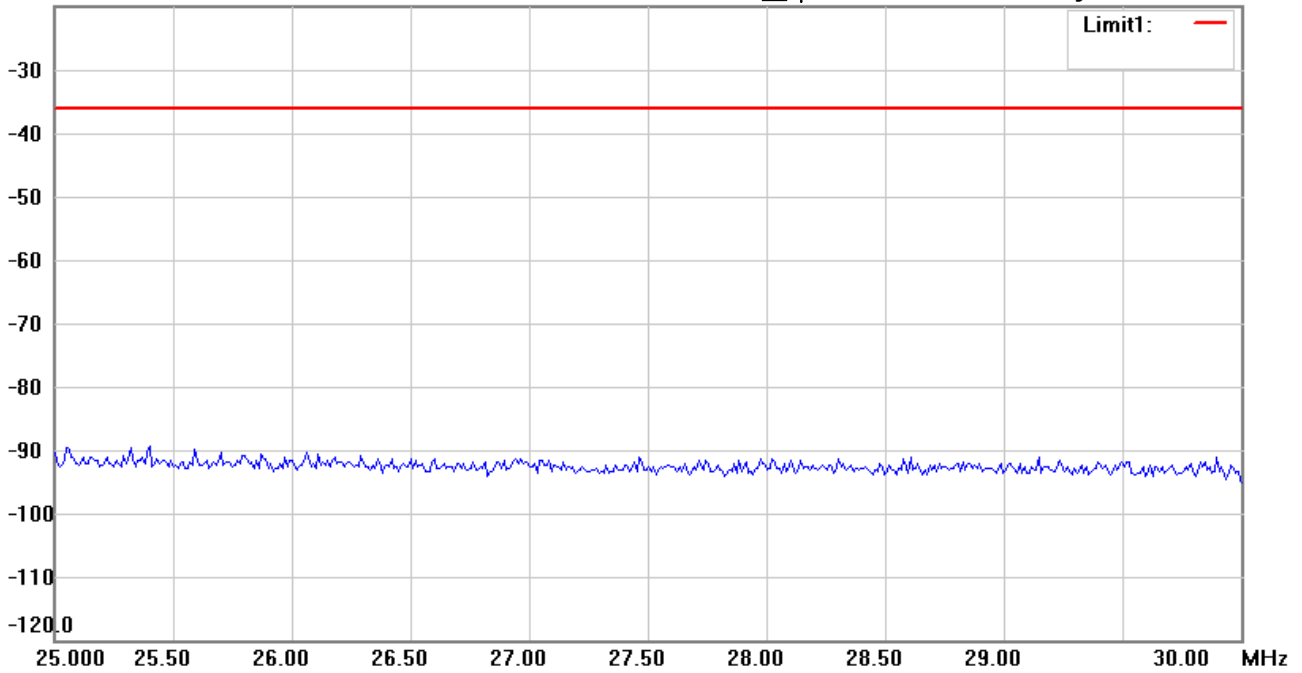

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Vertical*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 607.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
 Tel:+886-2-6606-8877
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sora

File :1

Data :#2


Date: 2023/3/6

Temperature:22 °C

-20.0 dBm

Time: 上午 08:40:55

Humidity:55 %

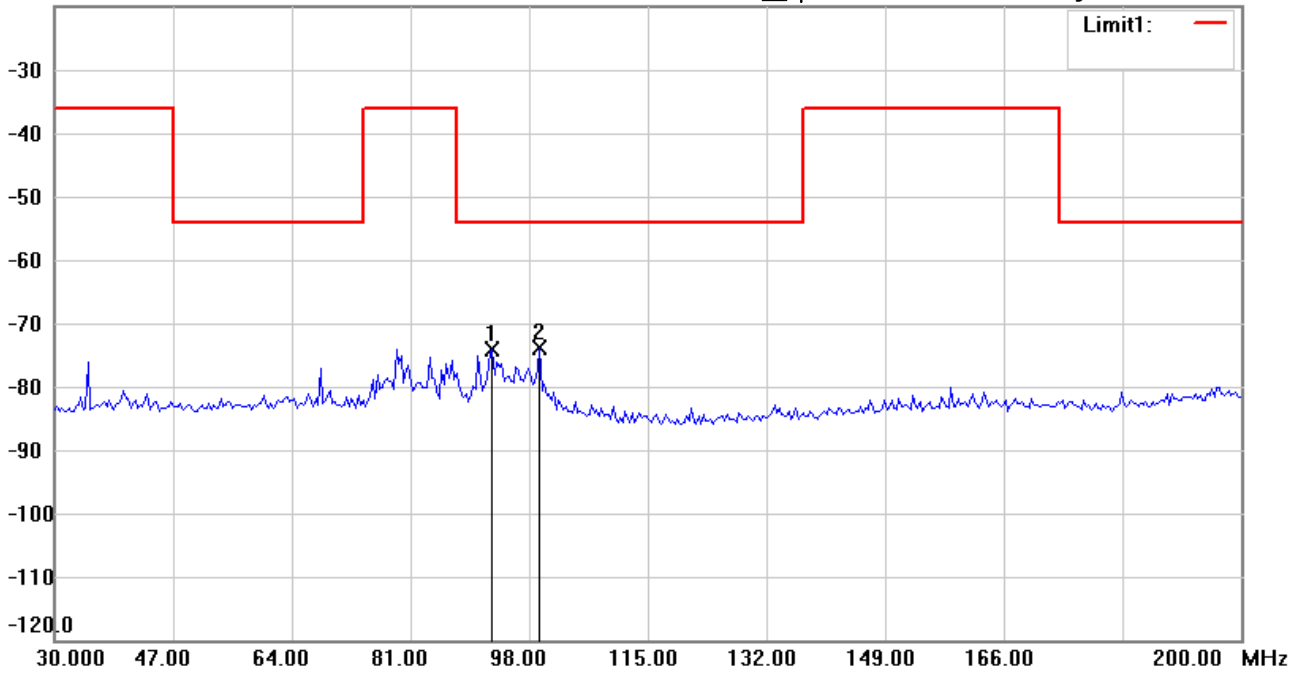

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Horizontal*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 607.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	92.6854	-95.67	peak	21.51	-74.16	-54.00	150	150	-20.16	
*	99.4990	-94.58	peak	20.62	-73.96	-54.00	150	110	-19.96	

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Sora

File :1

Data :#4


Date: 2023/3/6

Temperature:22 °C

-20.0 dBm

Time: 上午 08:51:47

Humidity:55 %

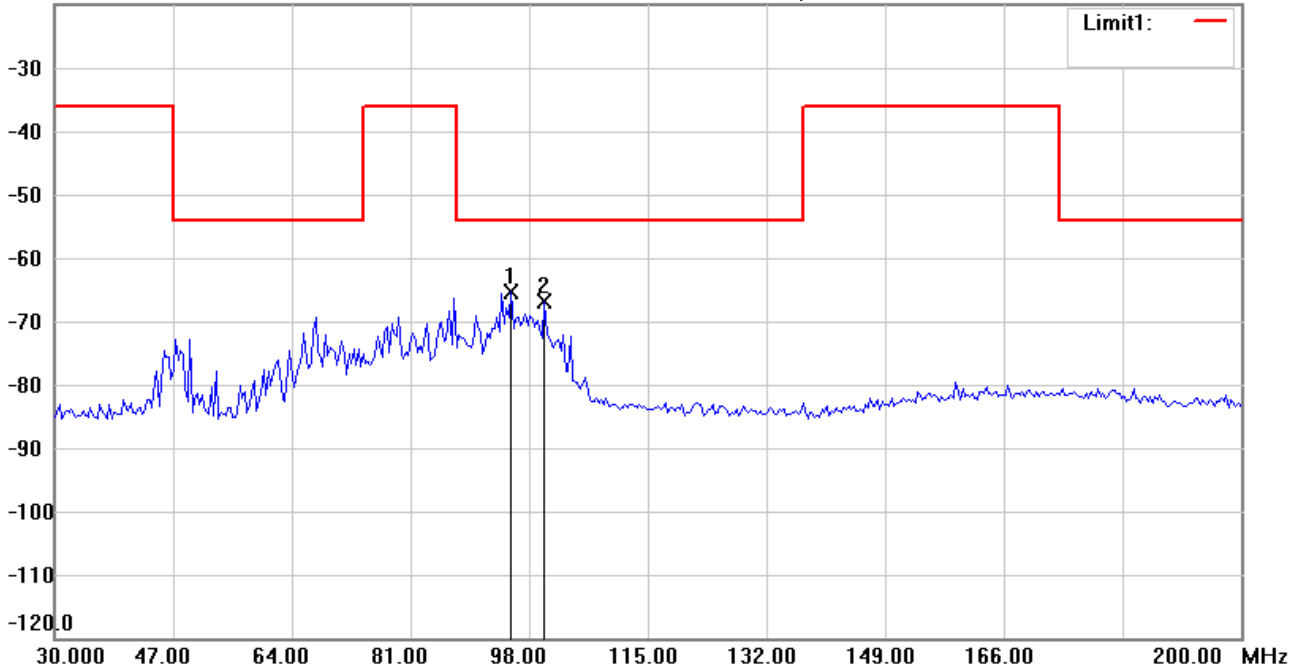

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: **Vertical**

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 607.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	95.4108	-86.92	peak	21.54	-65.38	-54.00	150	315	-11.38	
	100.1804	-89.13	peak	22.34	-66.79	-54.00	150	260	-12.79	



Radiated Emission Measurement

Operator: Sora

File :2

Data :#1


Date: 2023/2/28

Temperature:22 °C

-20.0 dBm

Time: 下午 03:51:16

Humidity:55 %

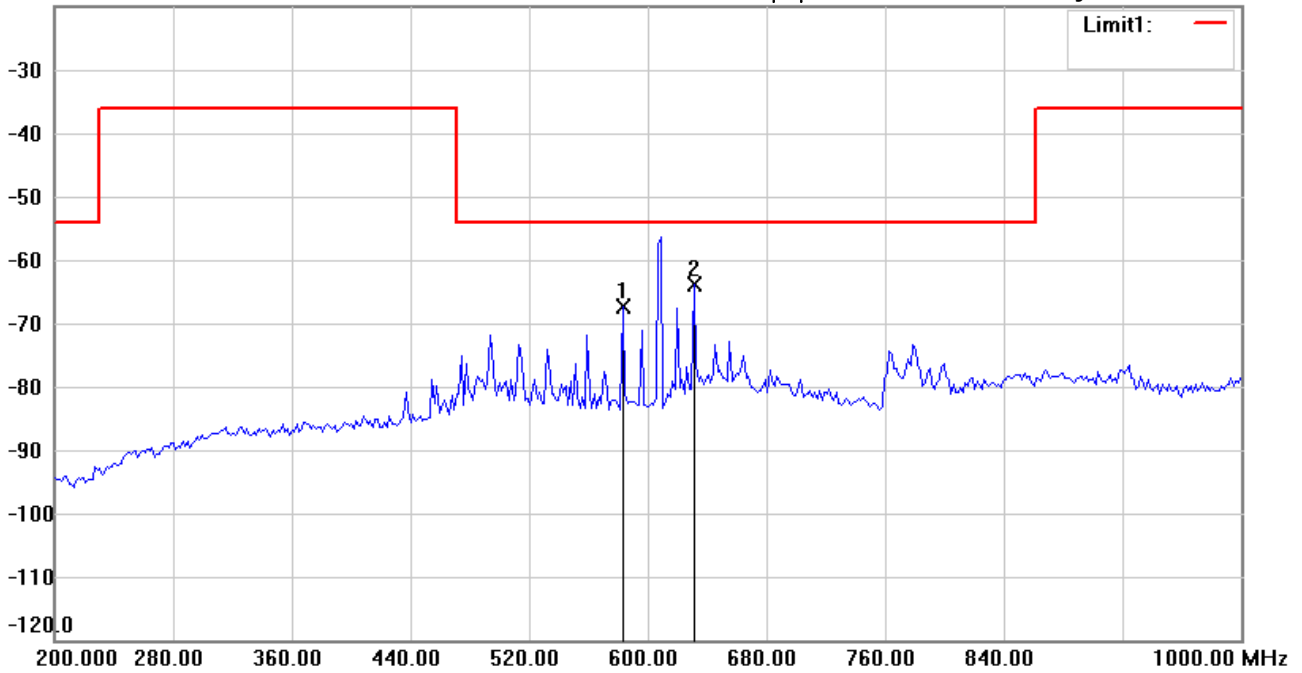

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Horizontal*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 607.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	583.1663	-60.80	peak	-6.45	-67.25	-54.00	150	135	-13.25	
*	631.2625	-60.58	peak	-3.20	-63.78	-54.00	150	115	-9.78	



Radiated Emission Measurement

Operator: Sora

File :2

Data :#2


Date: 2023/2/28

Temperature:22 °C

-20.0 dBm

Time: 下午 03:52:55

Humidity:55 %

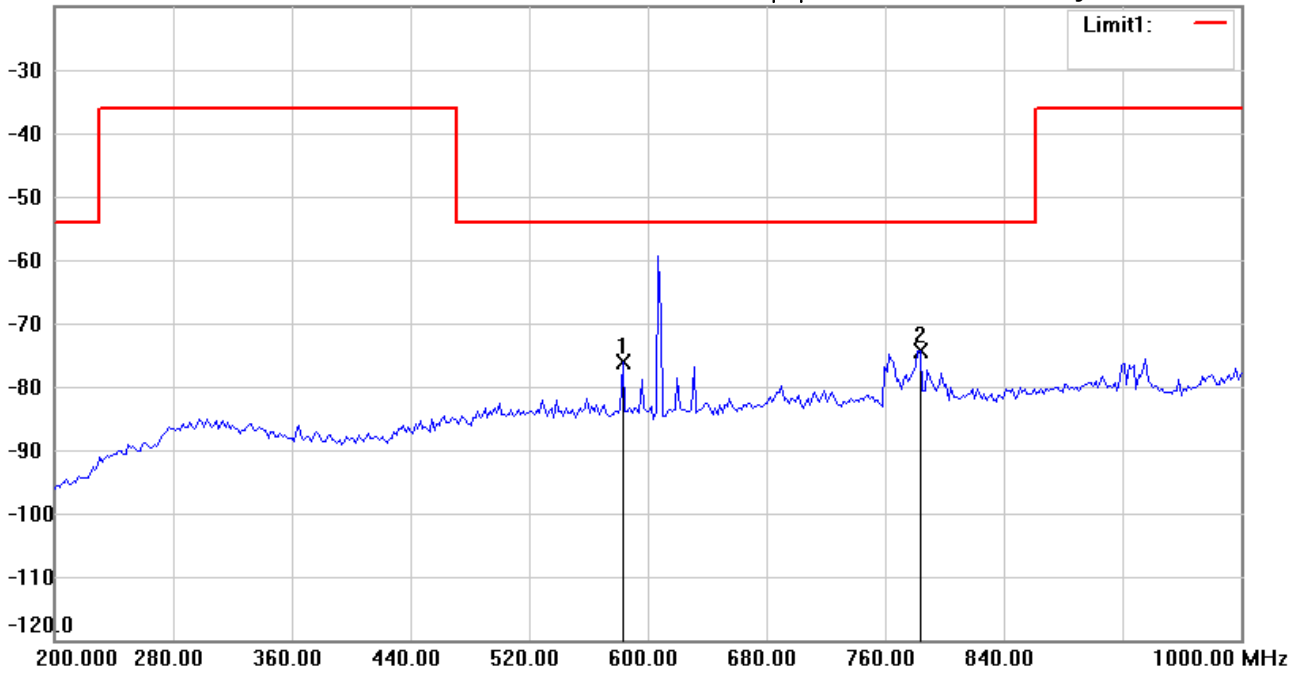

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: **Vertical**

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 607.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	583.1663	-69.80	peak	-6.37	-76.17	-54.00	150	315	-22.17	
*	781.9640	-70.39	peak	-3.88	-74.27	-54.00	150	255	-20.27	



Radiated Emission Measurement

Operator: Sora

File :3

Data :#1


Date: 2023/2/28

Temperature:22 °C

-20.0 dBm

Time: 上午 09:51:29

Humidity:55 %

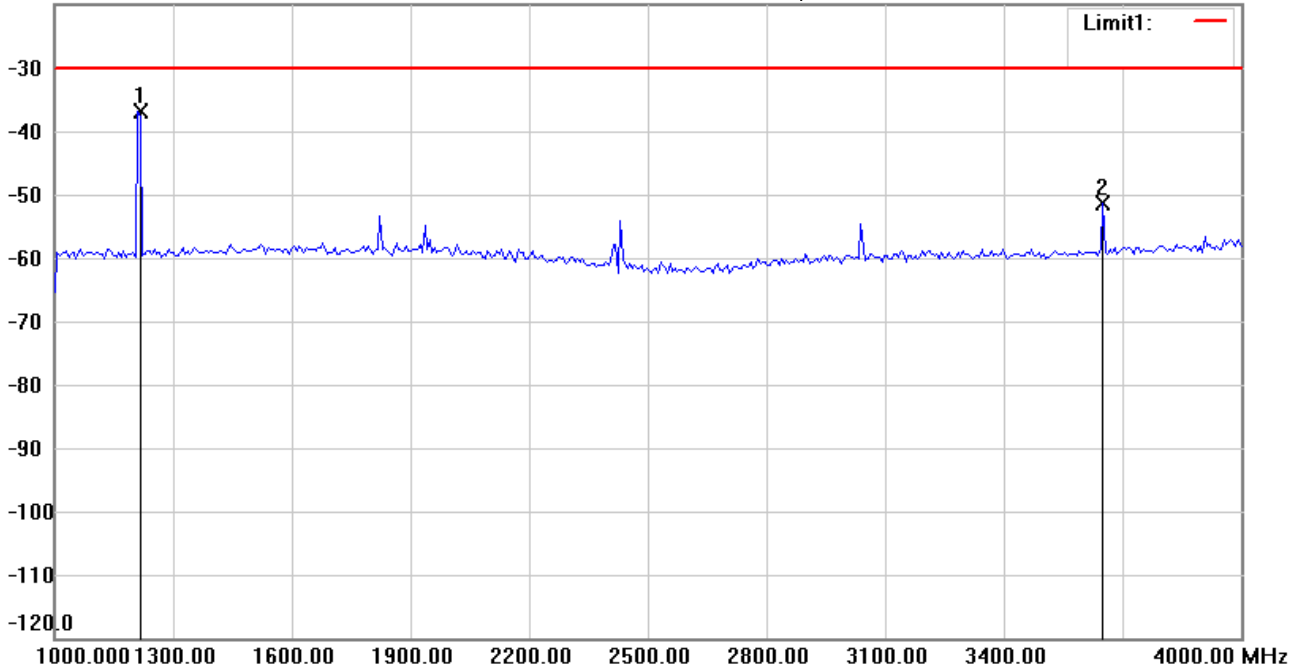

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Horizontal*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 607.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1210.421	-40.37	peak	3.62	-36.75	-30.00	150	145	-6.75	
	3651.302	-55.96	peak	4.64	-51.32	-30.00	150	105	-21.32	



Radiated Emission Measurement

Operator: Sora

File :3

Data :#2


Date: 2023/2/28

Temperature:22 °C

-20.0 dBm

Time: 上午 09:54:10

Humidity:55 %

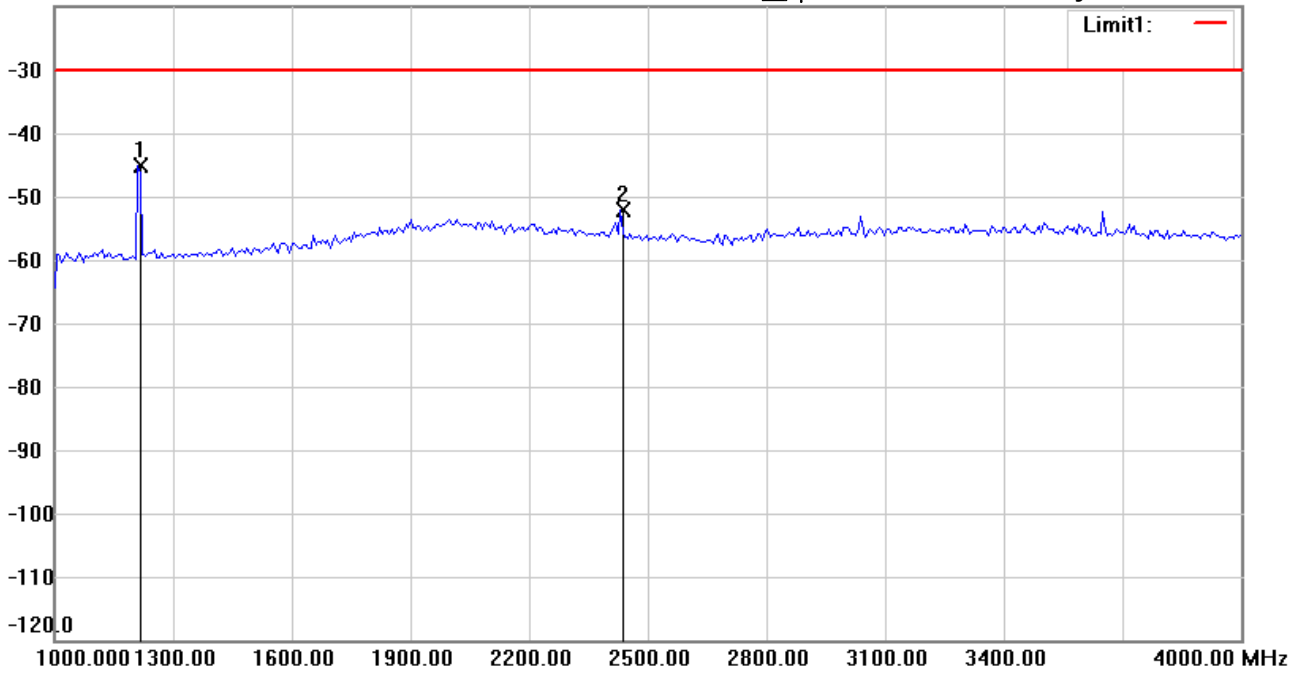

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: **Vertical**

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 607.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1210.421	-48.66	peak	3.47	-45.19	-30.00	150	245	-15.19	
	2430.862	-58.50	peak	6.45	-52.05	-30.00	150	300	-22.05	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
 Tel:+886-2-6606-8877
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sora

File :1

Data :#1


Date: 2023/3/6

Temperature:22 °C

-20.0 dBm

Time: 上午 08:42:25

Humidity:55 %

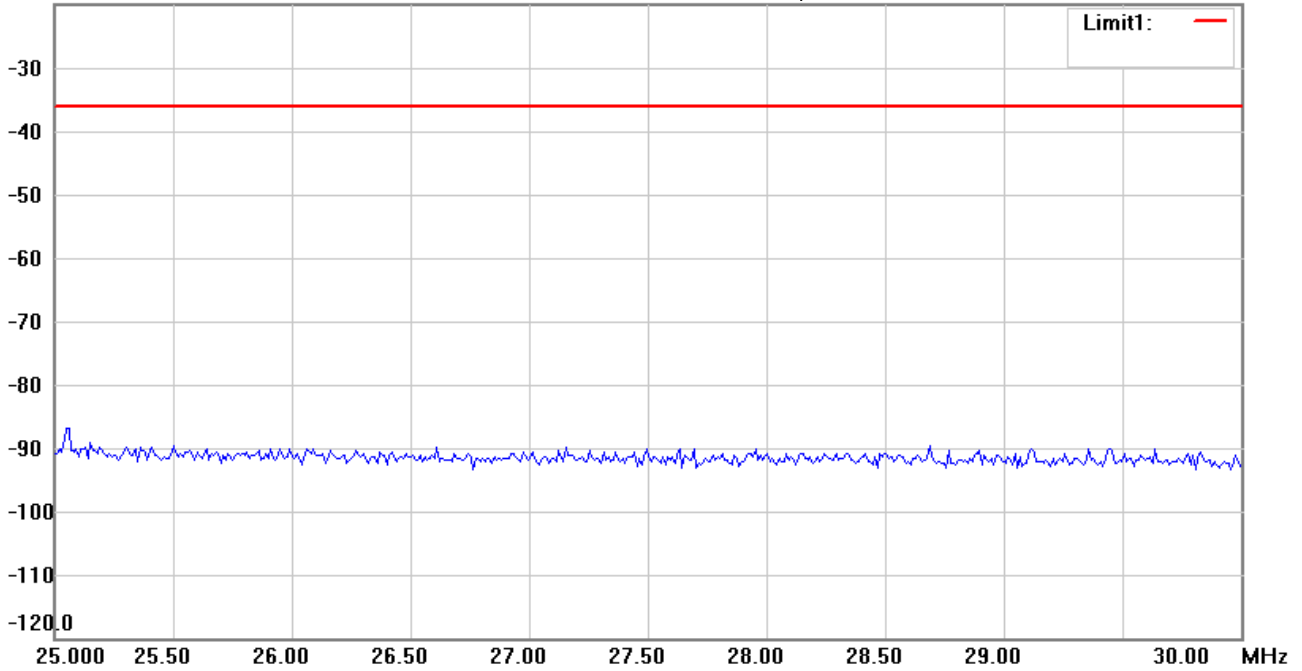

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Horizontal*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 614.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
 Tel:+886-2-6606-8877
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sora

File :1

Data :#3


Date: 2023/3/6

Temperature:22 °C

-20.0 dBm

Time: 上午 08:49:10

Humidity:55 %

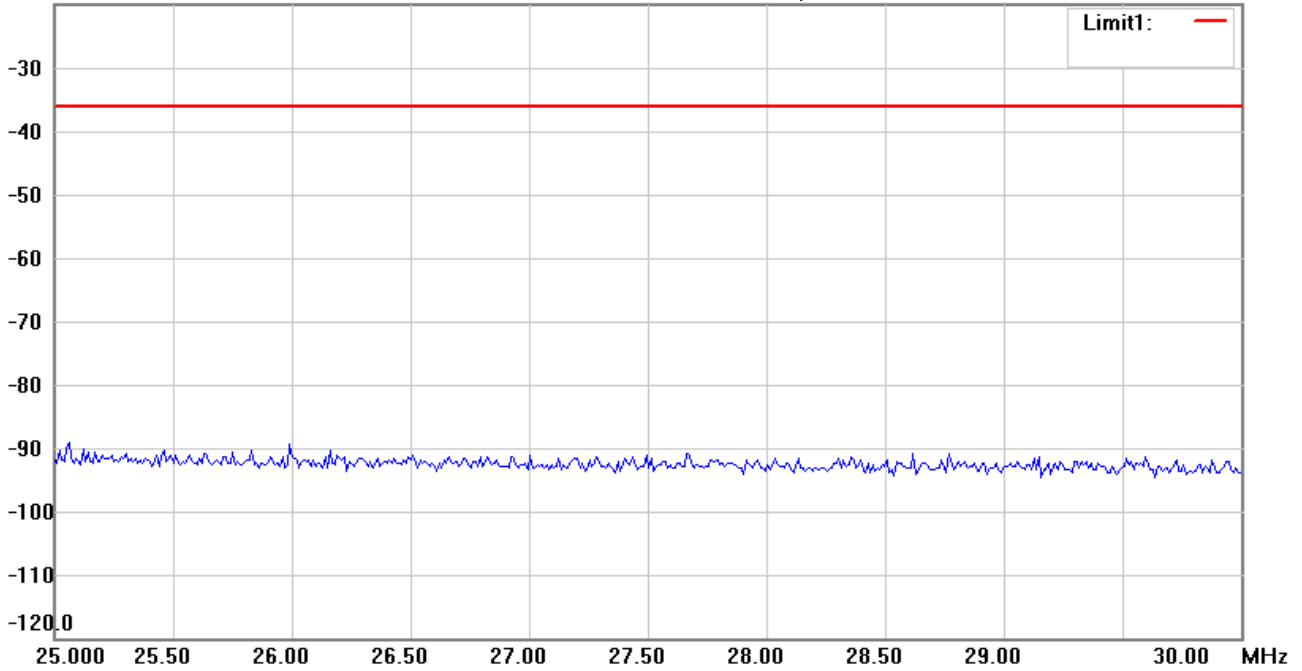

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Vertical*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 614.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Sora

File :1

Data :#2


Date: 2023/3/6

Temperature:22 °C

-20.0 dBm

Time: 上午 08:43:05

Humidity:55 %

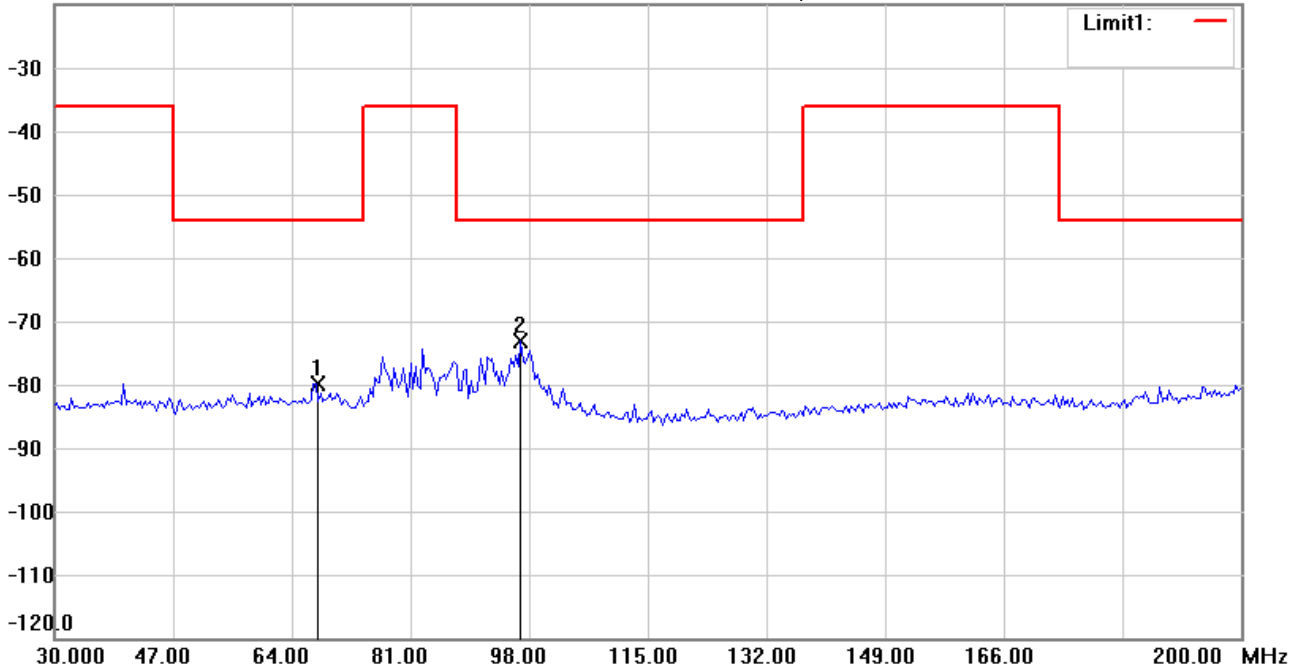

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Horizontal*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 614.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	67.4750	-101.93	peak	22.17	-79.76	-54.00	150	215	-25.76	
*	96.7735	-94.17	peak	20.97	-73.20	-54.00	150	135	-19.20	



Radiated Emission Measurement

Operator: Sora

File :1

Data :#4


Date: 2023/3/6

Temperature:22 °C

-20.0 dBm

Time: 上午 08:49:49

Humidity:55 %

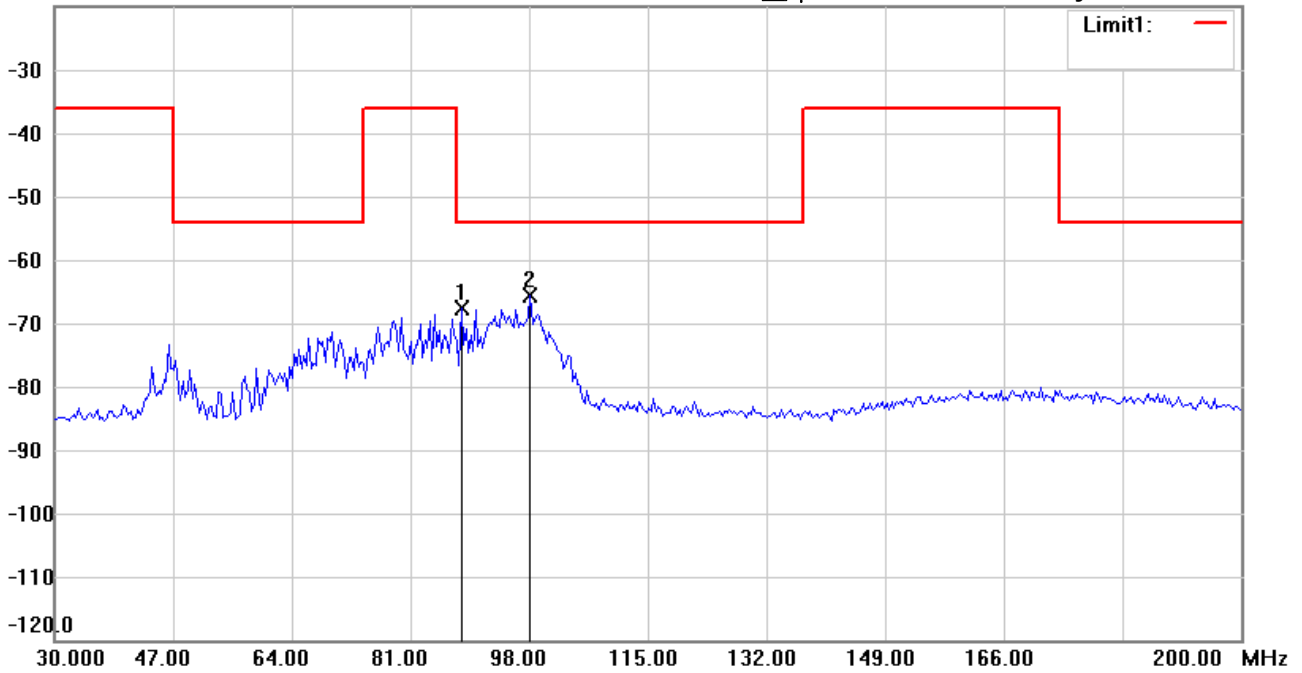

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Vertical*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 614.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	88.2565	-88.22	peak	20.66	-67.56	-54.00	150	65	-13.56	
*	98.1363	-87.65	peak	22.02	-65.63	-54.00	150	95	-11.63	



Radiated Emission Measurement

Operator: Sora

File :2

Data :#1


Date: 2023/2/28

Temperature:22 °C

-20.0 dBm

Time: 下午 03:46:40

Humidity:55 %

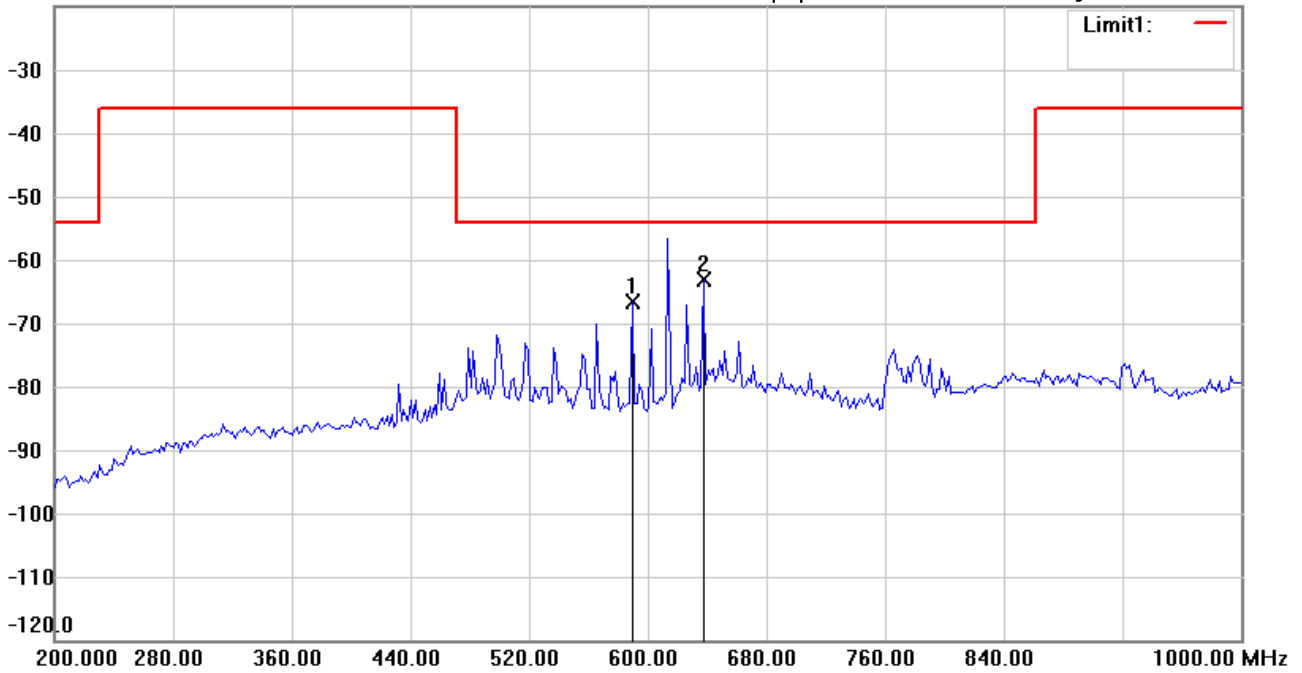

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Horizontal*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 614.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	589.5792	-60.21	peak	-6.34	-66.55	-54.00	150	155	-12.55	
*	637.6754	-60.49	peak	-2.59	-63.08	-54.00	150	100	-9.08	



Radiated Emission Measurement

Operator: Sora

File :2

Data :#2


Date: 2023/2/28

Temperature:22 °C

-20.0 dBm

Time: 下午 03:48:21

Humidity:55 %

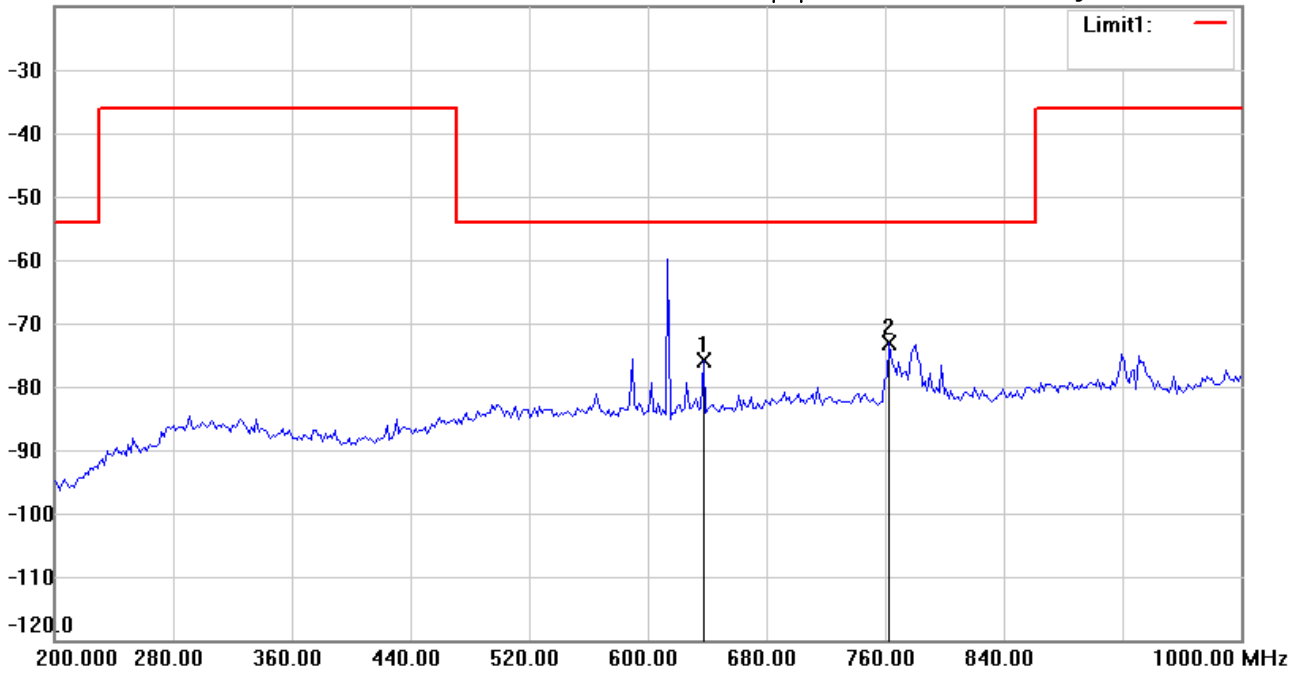

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: **Vertical**

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 614.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	637.6754	-70.42	peak	-5.57	-75.99	-54.00	150	310	-21.99	
*	762.7255	-69.06	peak	-4.15	-73.21	-54.00	150	265	-19.21	



Radiated Emission Measurement

Operator: Sora

File :3

Data :#1


Date: 2023/2/28

Temperature:22 °C

-20.0 dBm

Time: 上午 09:35:11

Humidity:55 %

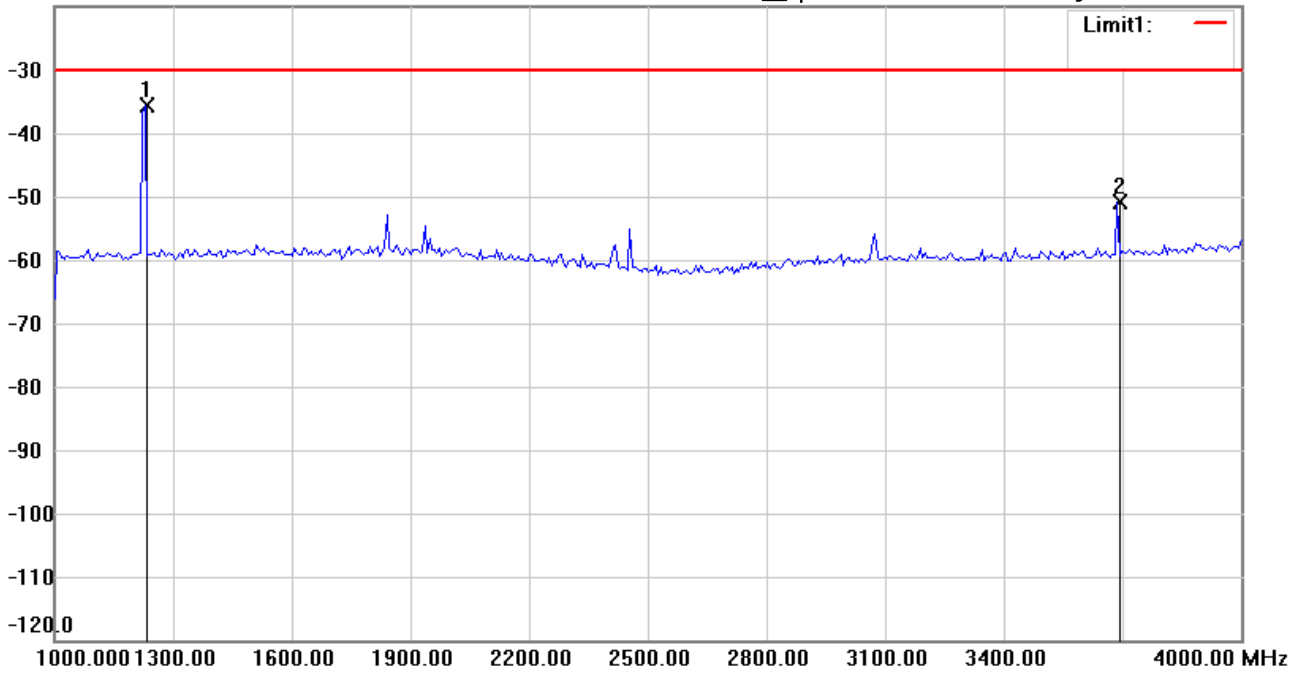

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Horizontal*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 614.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1228.457	-39.36	peak	3.62	-35.74	-30.00	150	135	-5.74	
	3687.375	-55.73	peak	4.78	-50.95	-30.00	150	280	-20.95	



Radiated Emission Measurement

Operator: Sora

File :3

Data :#2


Date: 2023/2/28

Temperature:22 °C

-20.0 dBm

Time: 上午 09:38:06

Humidity:55 %

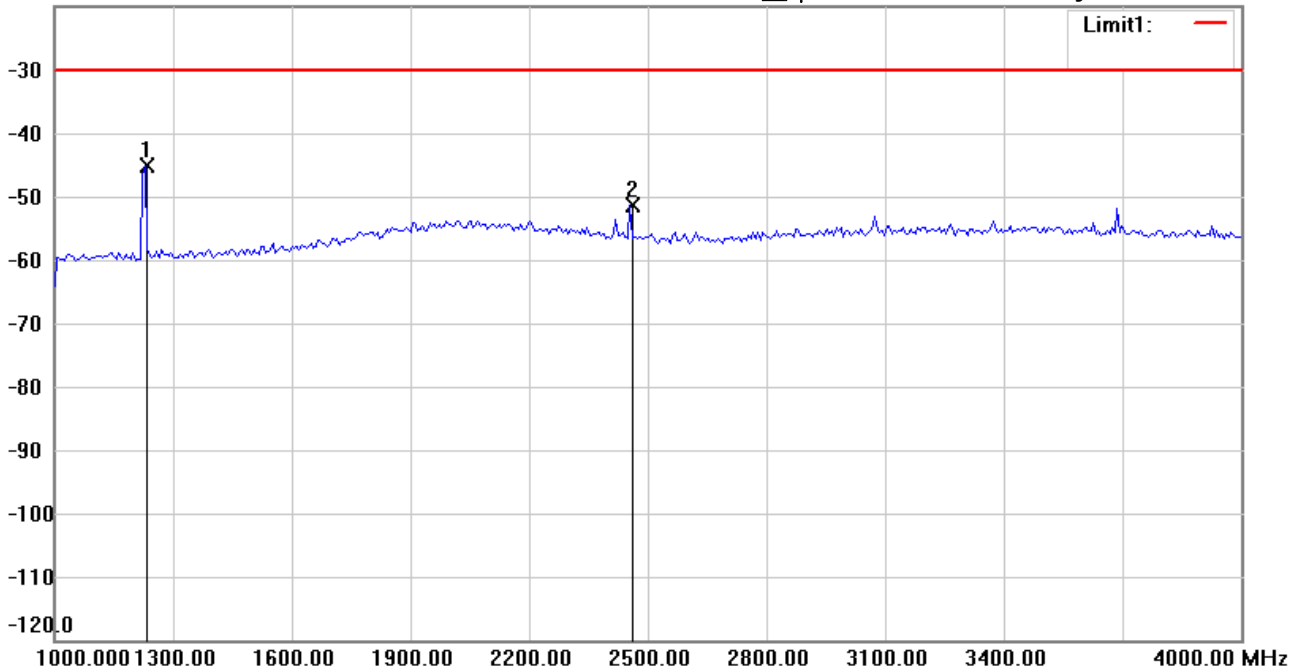

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: **Vertical**

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 614.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1228.457	-48.55	peak	3.47	-45.08	-30.00	150	85	-15.08	
	2454.910	-57.68	peak	6.35	-51.33	-30.00	150	205	-21.33	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
 Tel:+886-2-6606-8877
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sora

File :1

Data :#1


Date: 2023/3/6

Temperature:22 °C

-20.0 dBm

Time: 上午 08:44:32

Humidity:55 %

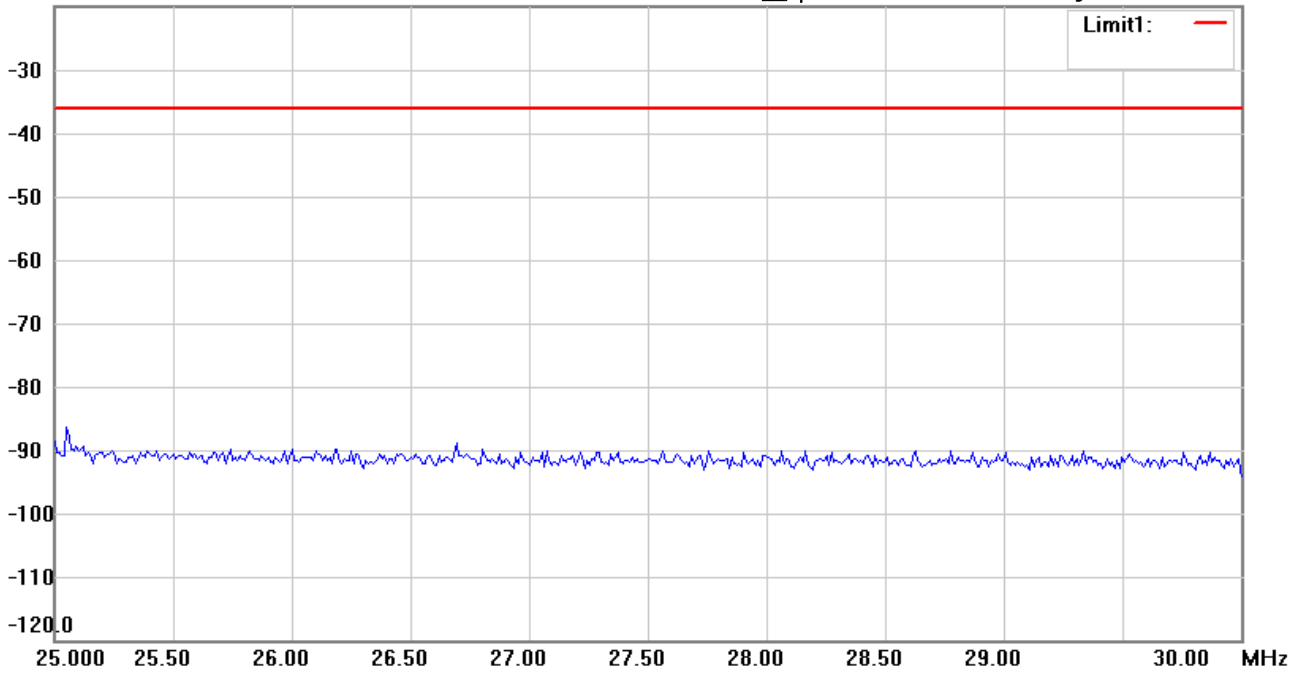

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Horizontal*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 615.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
 Tel:+886-2-6606-8877
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sora

File :1

Data :#3


Date: 2023/3/6

Temperature:22 °C

-20.0 dBm

Time: 上午 08:47:04

Humidity:55 %

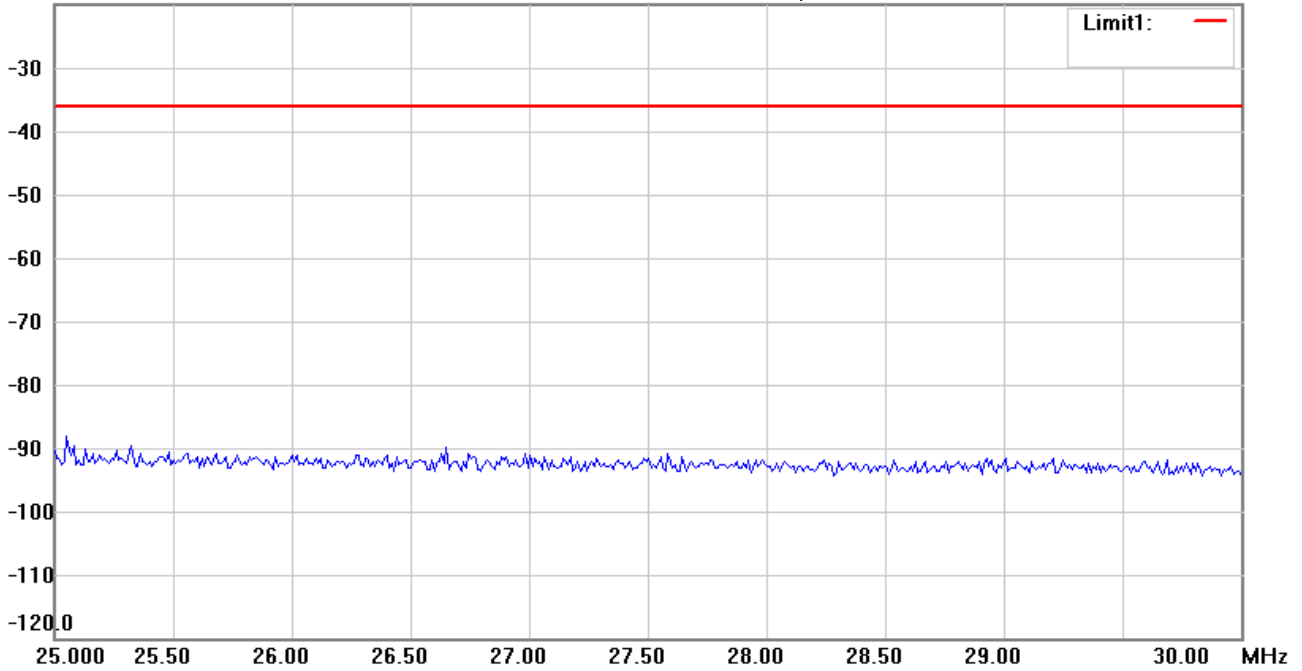

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Vertical*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 615.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
 Tel:+886-2-6606-8877
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sora

File :1

Data :#2


Date: 2023/3/6

Temperature:22 °C

-20.0 dBm

Time: 上午 08:45:11

Humidity:55 %

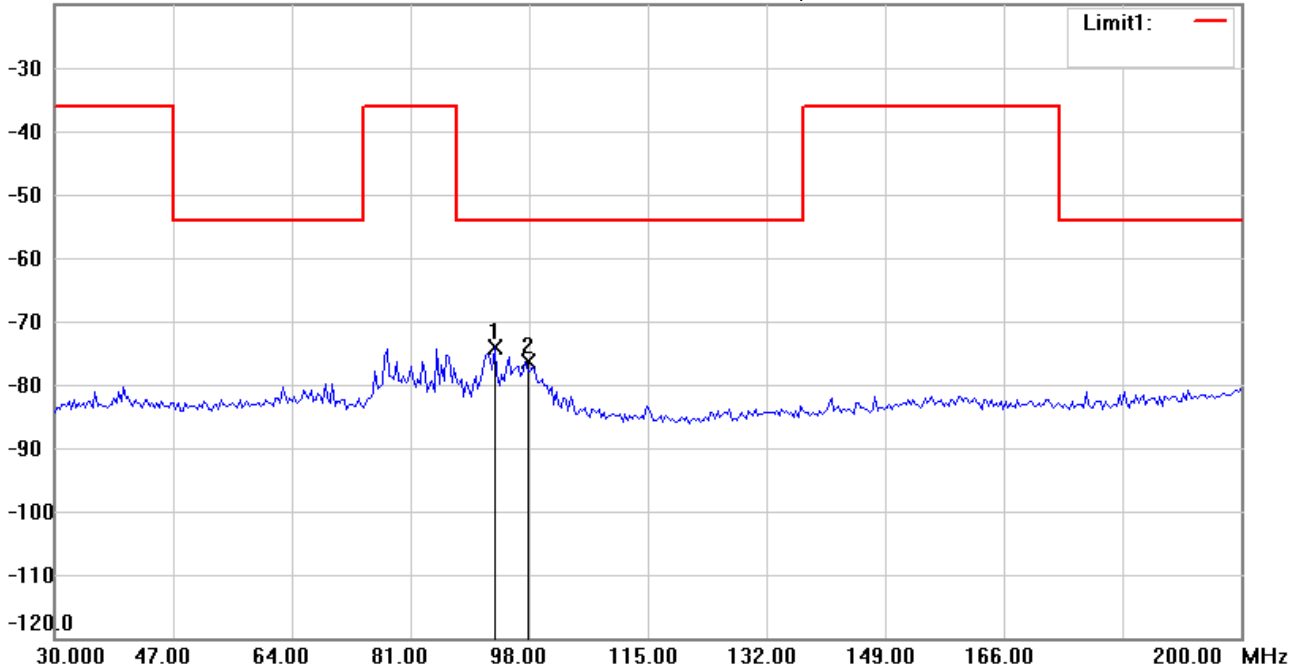

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Horizontal*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 615.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	93.0261	-95.70	peak	21.46	-74.24	-54.00	150	155	-20.24	
	97.4550	-97.17	peak	20.88	-76.29	-54.00	150	95	-22.29	

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Sora

File :1

Data :#4


Date: 2023/3/6

Temperature:22 °C

-20.0 dBm

Time: 上午 08:47:44

Humidity:55 %

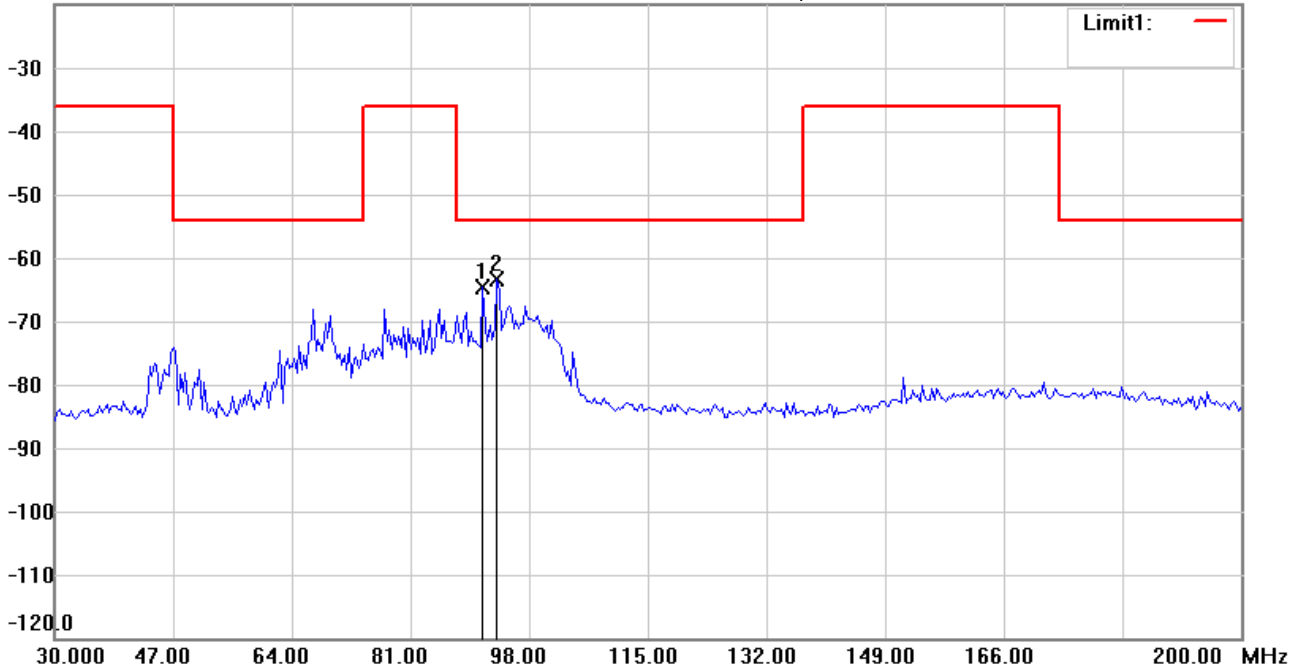

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Vertical*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 615.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	91.3226	-85.49	peak	20.81	-64.68	-54.00	150	75	-10.68	
*	93.3667	-84.58	peak	21.18	-63.40	-54.00	150	55	-9.40	



Radiated Emission Measurement

Operator: Sora

File :2

Data :#1


Date: 2023/2/28

Temperature:22 °C

-20.0 dBm

Time: 下午 03:41:43

Humidity:55 %

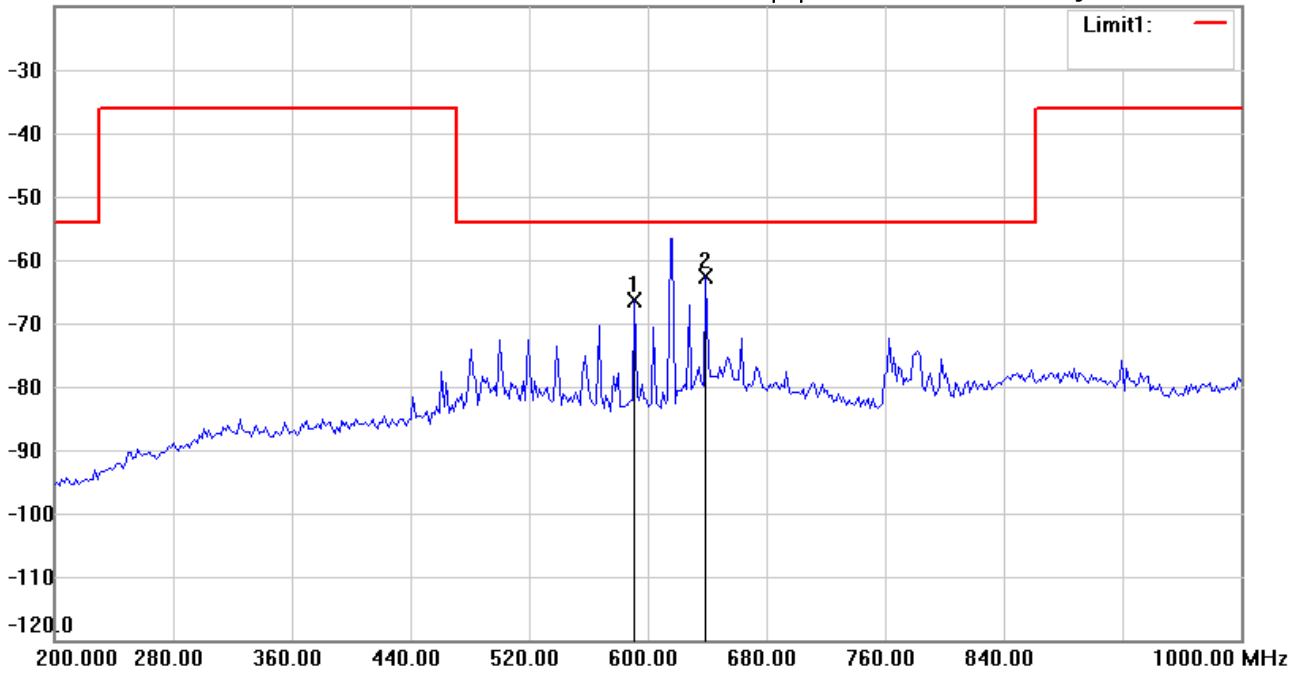

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Horizontal*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 615.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	591.1824	-60.08	peak	-6.31	-66.39	-54.00	150	155	-12.39	
*	639.2786	-60.12	peak	-2.44	-62.56	-54.00	150	85	-8.56	



Radiated Emission Measurement

Operator: Sora

File :2

Data :#2


Date: 2023/2/28

Temperature:22 °C

-20.0 dBm

Time: 下午 03:43:43

Humidity:55 %

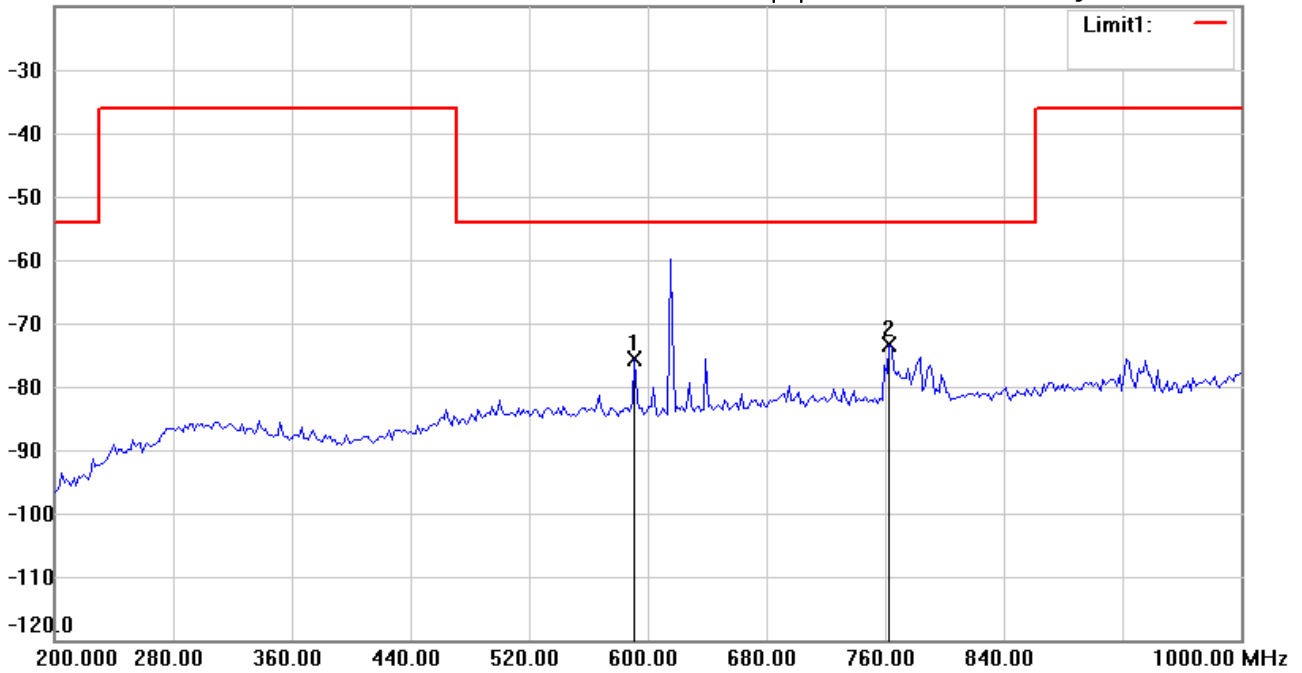

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: **Vertical**

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 615.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	591.1824	-69.37	peak	-6.30	-75.67	-54.00	150	355	-21.67	
*	762.7255	-69.27	peak	-4.15	-73.42	-54.00	150	250	-19.42	



Radiated Emission Measurement

Operator: Sora

File :3

Data :#1


Date: 2023/2/28

Temperature:22 °C

-20.0 dBm

Time: 上午 09:42:36

Humidity:55 %

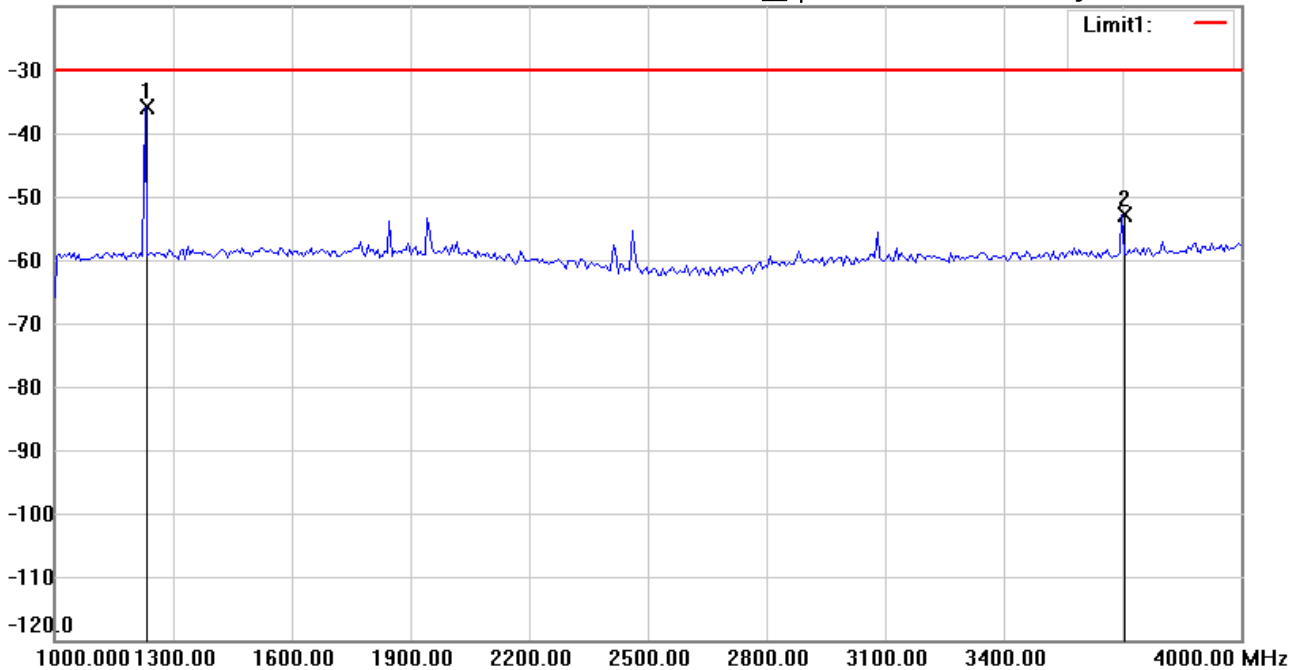

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Horizontal*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 615.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1228.457	-39.60	peak	3.62	-35.98	-30.00	150	115	-5.98	
	3699.399	-57.63	peak	4.82	-52.81	-30.00	150	180	-22.81	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
 Tel:+886-2-6606-8877
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sora

File :3

Data :#2


Date: 2023/2/28

Temperature:22 °C

-20.0 dBm

Time: 上午 09:44:38

Humidity:55 %

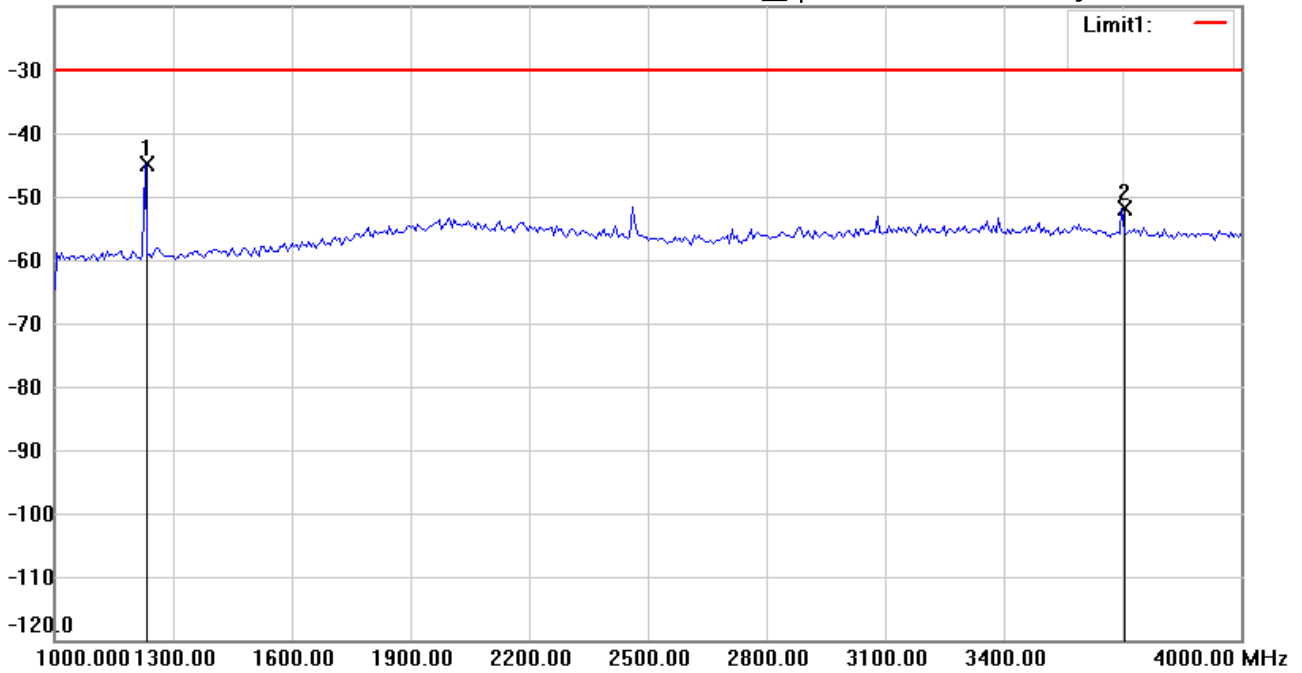

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: **Vertical**

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 615.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1228.457	-48.29	peak	3.47	-44.82	-30.00	150	320	-14.82	
	3699.399	-59.96	peak	8.05	-51.91	-30.00	150	275	-21.91	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
 Tel:+886-2-6606-8877
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sora

File :1

Data :#1


Date: 2023/3/6

Temperature:22 °C

-20.0 dBm

Time: 上午 08:54:13

Humidity:55 %

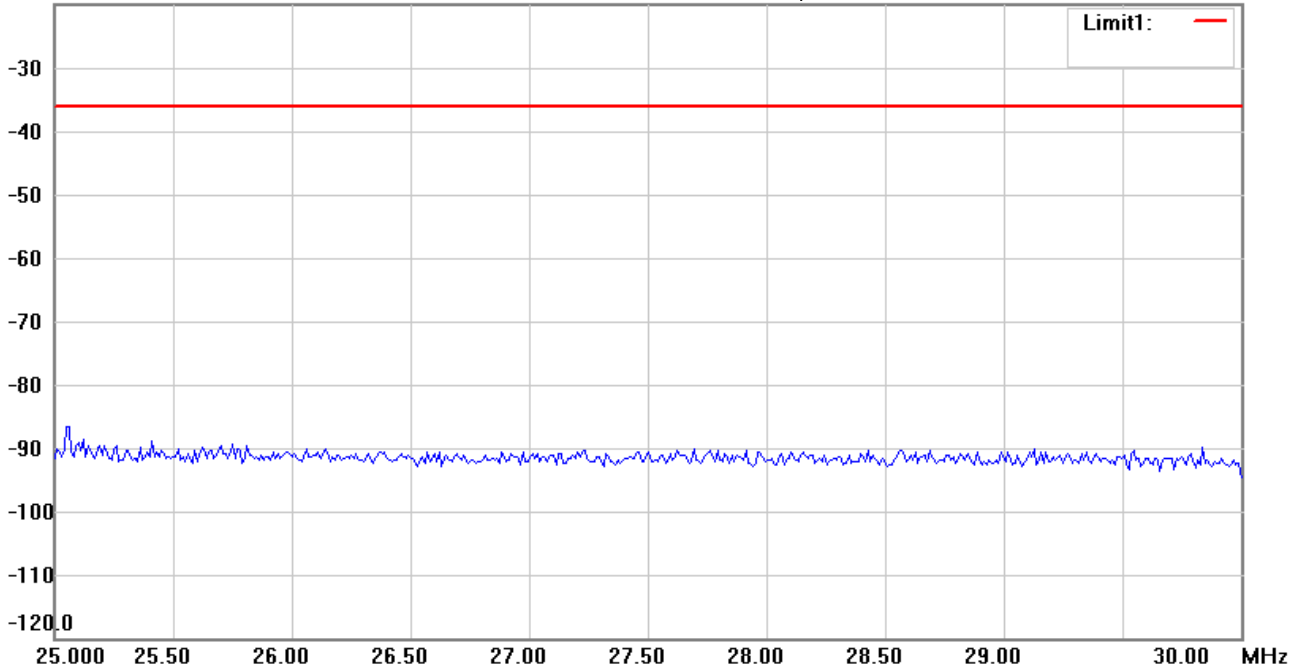

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Horizontal*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 657.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
 Tel:+886-2-6606-8877
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sora

File :1

Data :#3


Date: 2023/3/6

Temperature:22 °C

-20.0 dBm

Time: 上午 09:01:46

Humidity:55 %

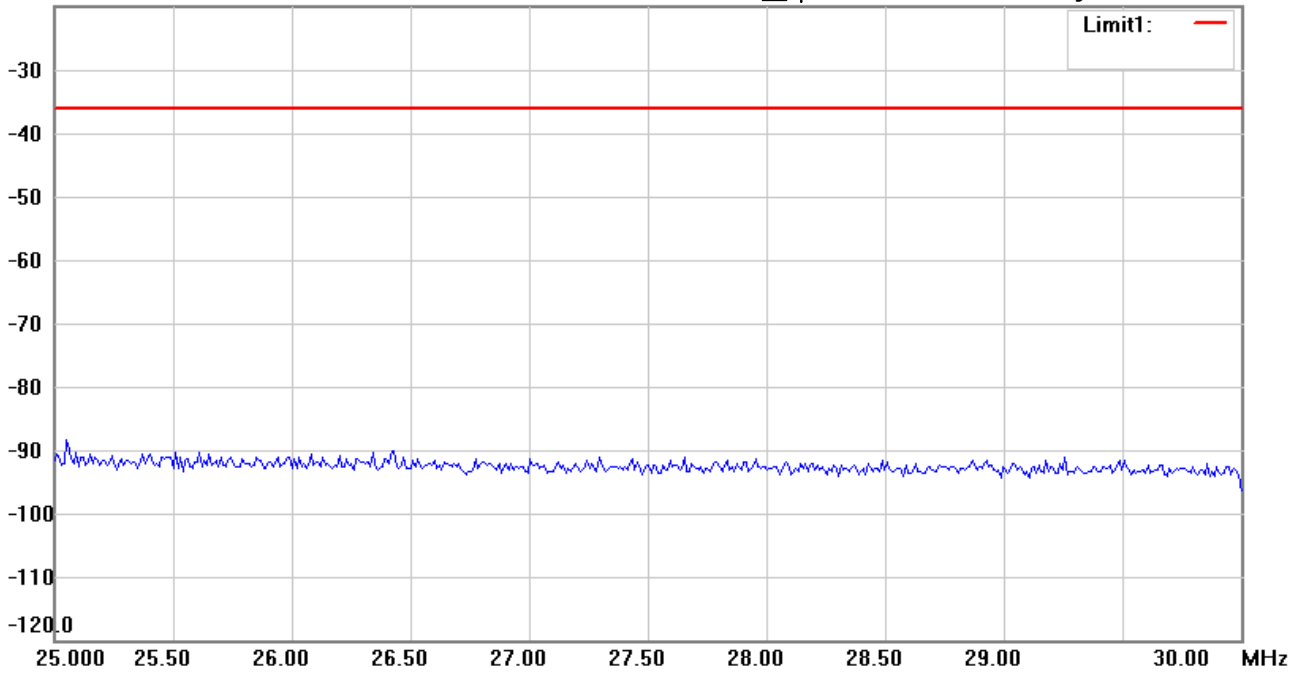

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Vertical*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 657.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Sora

File :1

Data :#2


Date: 2023/3/6

Temperature:22 °C

-20.0 dBm

Time: 上午 08:54:52

Humidity:55 %

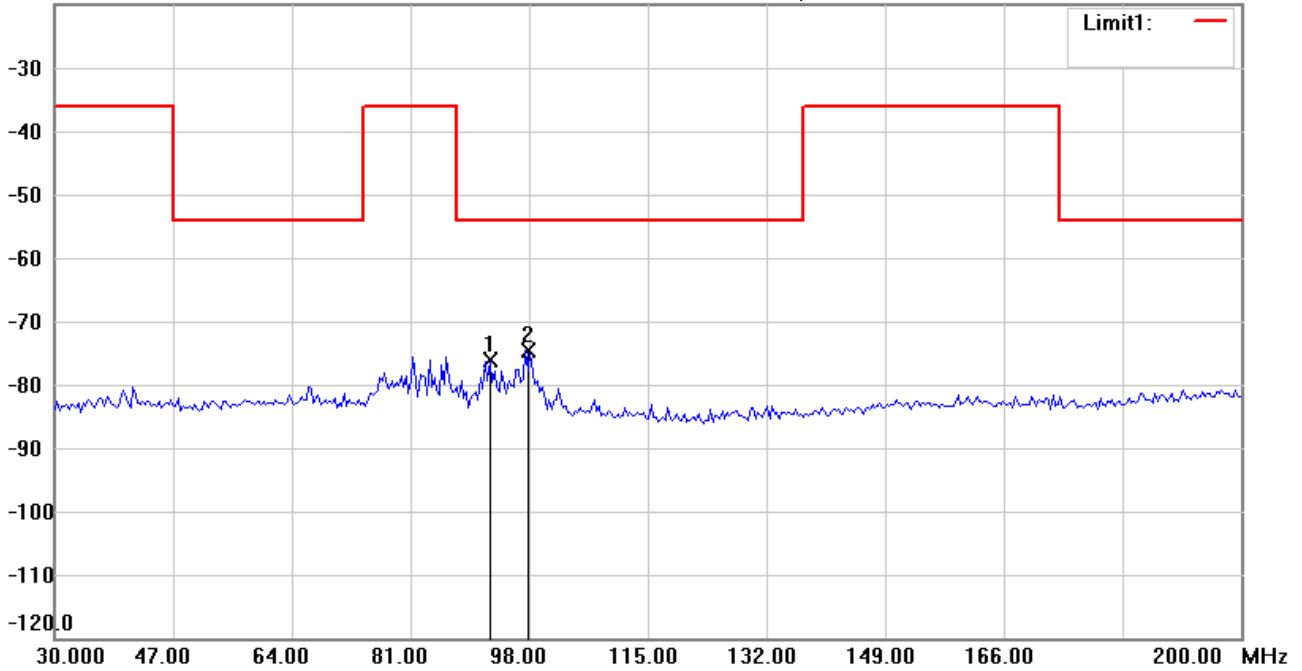

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Horizontal*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 657.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	92.3447	-97.71	peak	21.55	-76.16	-54.00	150	105	-22.16	
*	97.4550	-95.62	peak	20.88	-74.74	-54.00	150	175	-20.74	



Radiated Emission Measurement

Operator: Sora

File :1

Data :#4


Date: 2023/3/6

Temperature:22 °C

-20.0 dBm

Time: 上午 09:02:25

Humidity:55 %

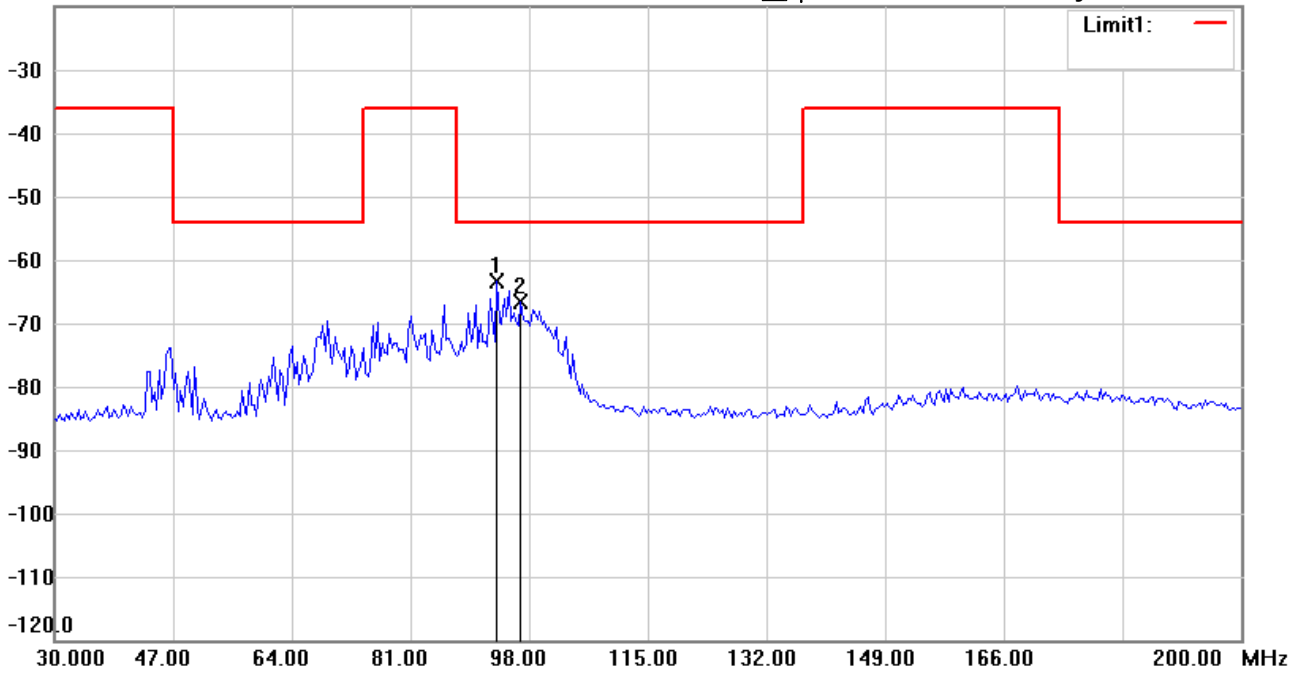

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Vertical*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 657.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	93.3667	-84.50	peak	21.18	-63.32	-54.00	150	315	-9.32	
	96.7735	-88.30	peak	21.78	-66.52	-54.00	150	280	-12.52	



Radiated Emission Measurement

Operator: Sora

File :2

Data :#1


Date: 2023/2/28

Temperature:22 °C

-20.0 dBm

Time: 下午 03:36:27

Humidity:55 %

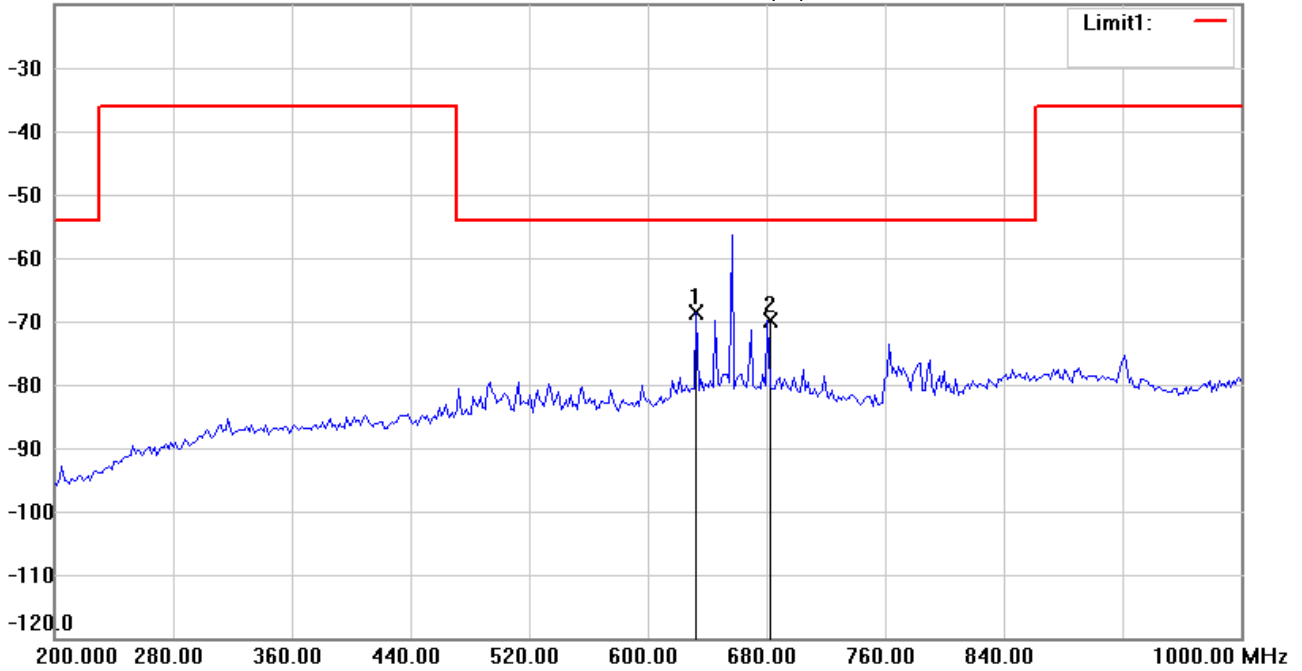

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Horizontal*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 657.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	632.8657	-65.64	peak	-3.05	-68.69	-54.00	150	205	-14.69	
	680.9620	-67.48	peak	-2.28	-69.76	-54.00	150	135	-15.76	



Radiated Emission Measurement

Operator: Sora

File :2

Data :#2


Date: 2023/2/28

Temperature:22 °C

-20.0 dBm

Time: 下午 03:37:57

Humidity:55 %

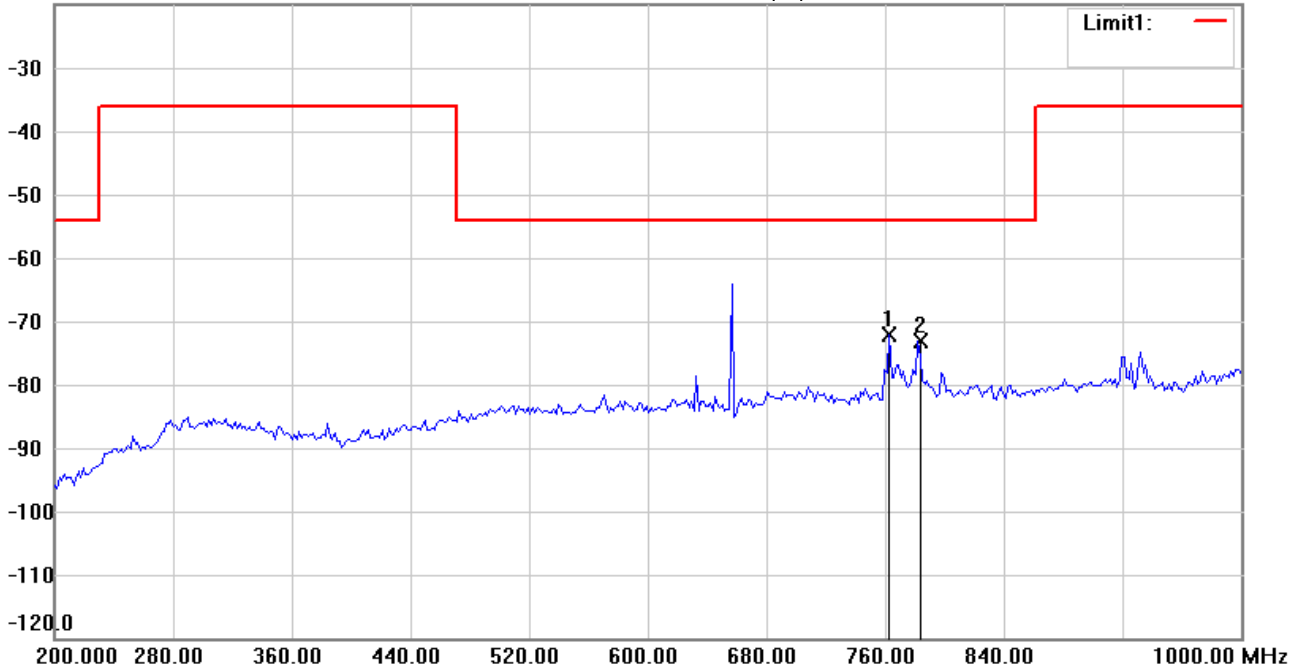

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: **Vertical**

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 657.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	762.7255	-67.90	peak	-4.15	-72.05	-54.00	150	325	-18.05	
	781.9640	-69.24	peak	-3.88	-73.12	-54.00	150	295	-19.12	



Radiated Emission Measurement

Operator: Sora

File :3

Data :#1


Date: 2023/2/28

Temperature:22 °C

-20.0 dBm

Time: 上午 09:19:08

Humidity:55 %

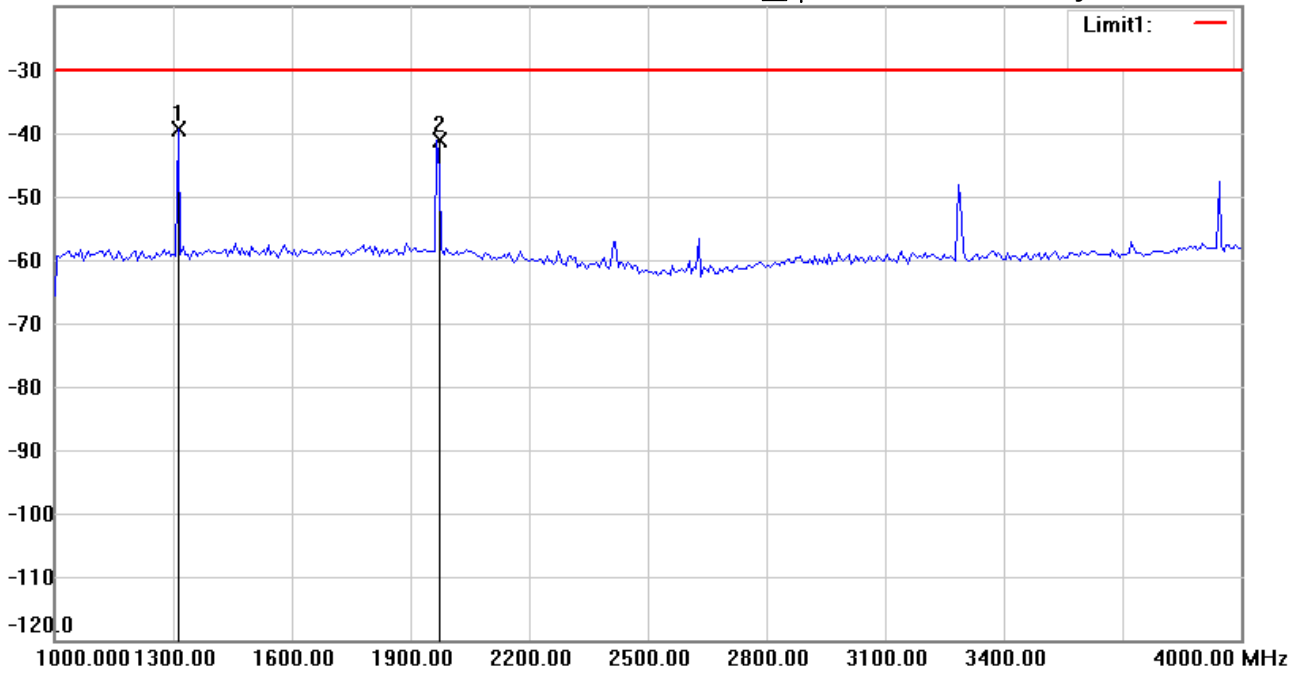

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Horizontal*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 657.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1312.625	-43.06	peak	3.59	-39.47	-30.00	150	245	-9.47	
	1967.936	-44.90	peak	3.80	-41.10	-30.00	150	120	-11.10	



Radiated Emission Measurement

Operator: Sora

File :3

Data :#2


Date: 2023/2/28

Temperature:22 °C

-20.0 dBm

Time: 上午 09:23:04

Humidity:55 %

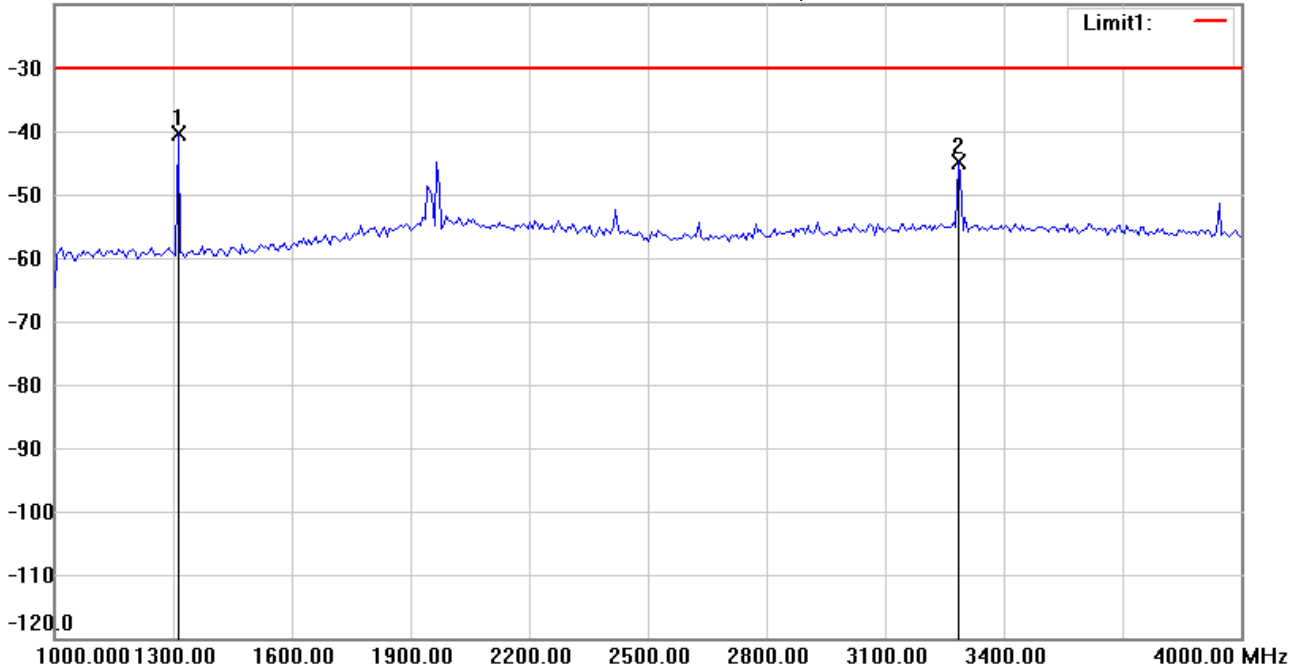

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: **Vertical**

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 657.125MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1312.625	-43.90	peak	3.48	-40.42	-30.00	150	125	-10.42	
	3284.569	-52.93	peak	7.94	-44.99	-30.00	150	320	-14.99	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
 Tel:+886-2-6606-8877
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sora

File :1

Data :#1


Date: 2023/3/6

Temperature:22 °C

-20.0 dBm

Time: 上午 08:56:43

Humidity:55 %

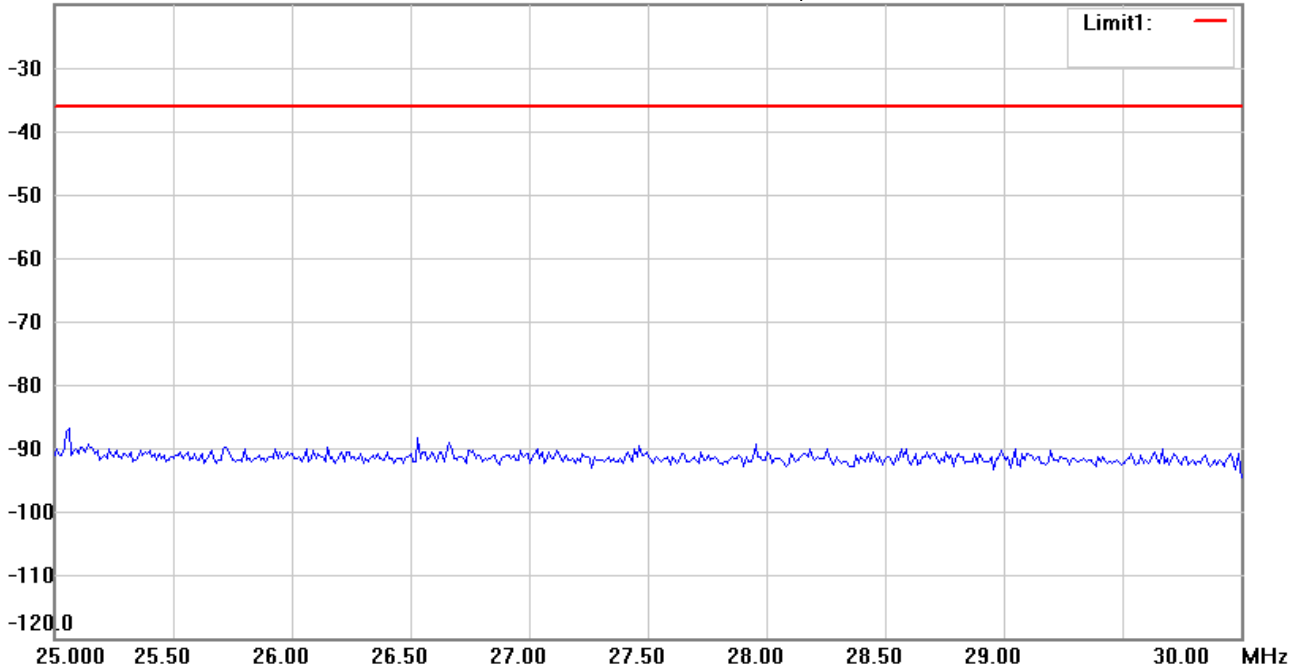

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Horizontal*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 662.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
 Tel:+886-2-6606-8877
 Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sora

File :1

Data :#3


Date: 2023/3/6

Temperature:22 °C

-20.0 dBm

Time: 上午 08:58:55

Humidity:55 %

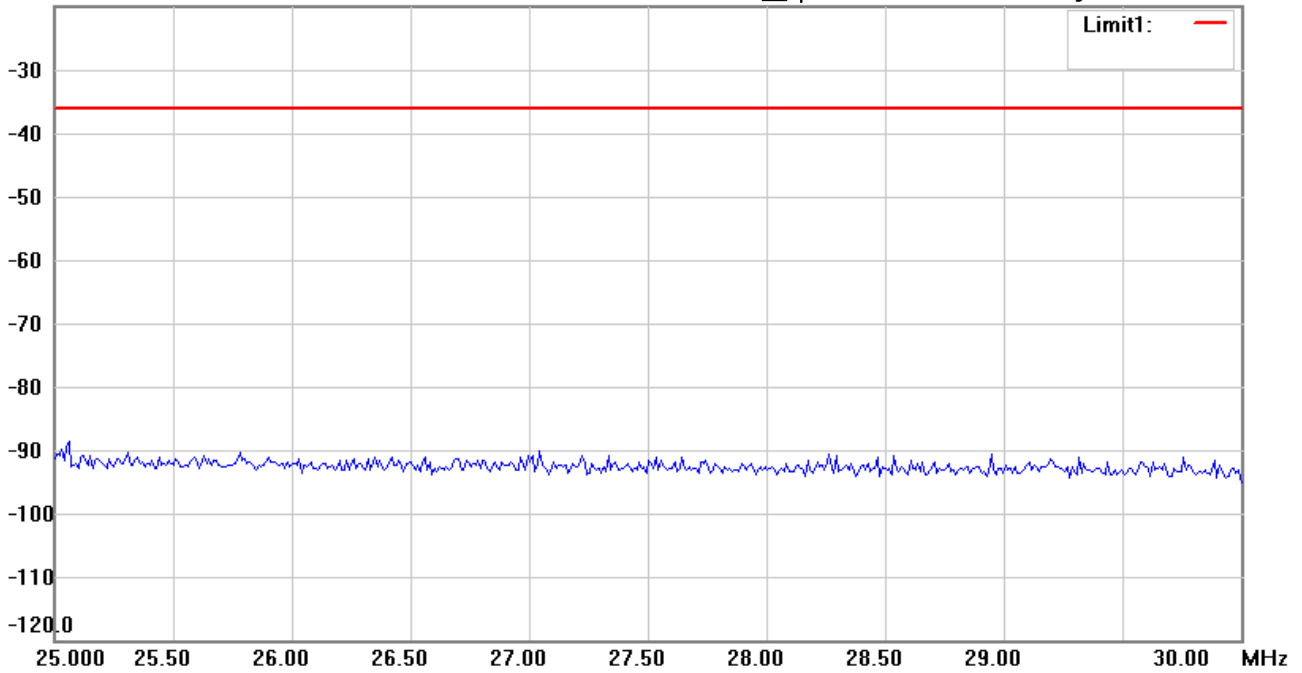

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Vertical*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 662.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	---------------	----------	-------------------	--------------	-------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Sora

File :1

Data :#2


Date: 2023/3/6

Temperature:22 °C

-20.0 dBm

Time: 上午 08:57:23

Humidity:55 %

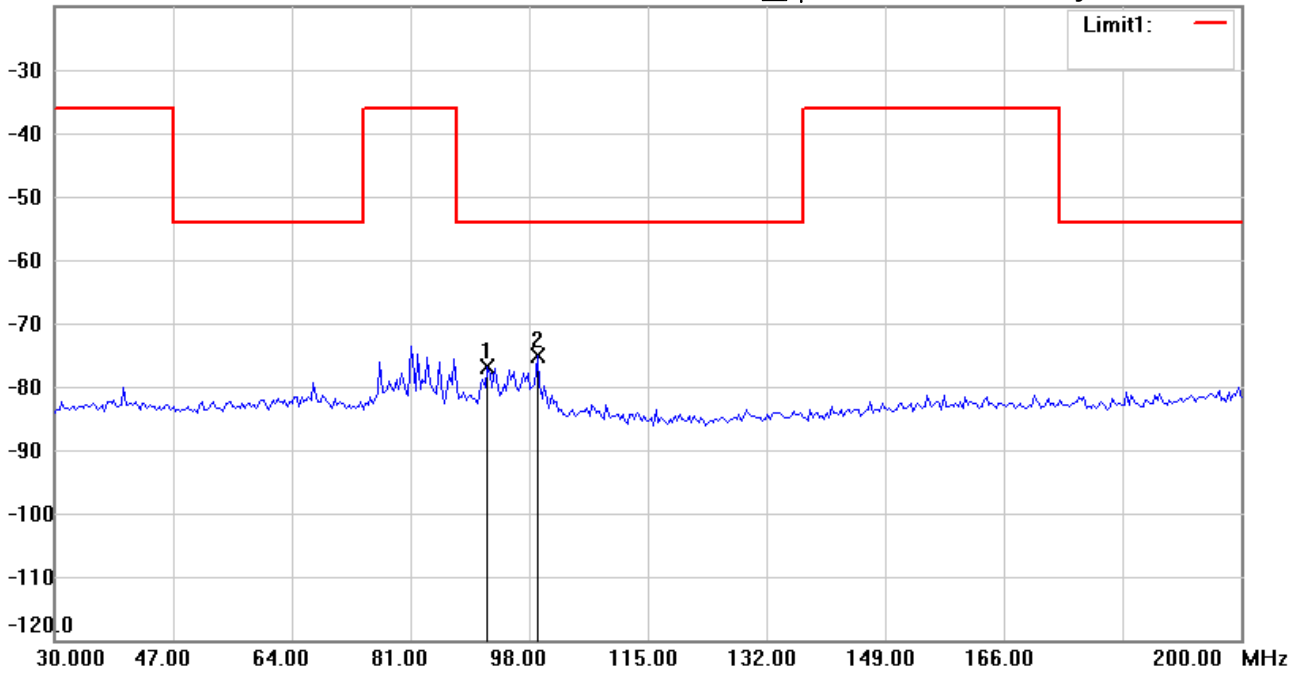

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Horizontal*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 662.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	92.0040	-98.38	peak	21.60	-76.78	-54.00	150	115	-22.78	
*	99.1583	-95.66	peak	20.66	-75.00	-54.00	150	165	-21.00	



Radiated Emission Measurement

Operator: Sora

File :1

Data :#4


Date: 2023/3/6

Temperature:22 °C

-20.0 dBm

Time: 上午 08:59:35

Humidity:55 %

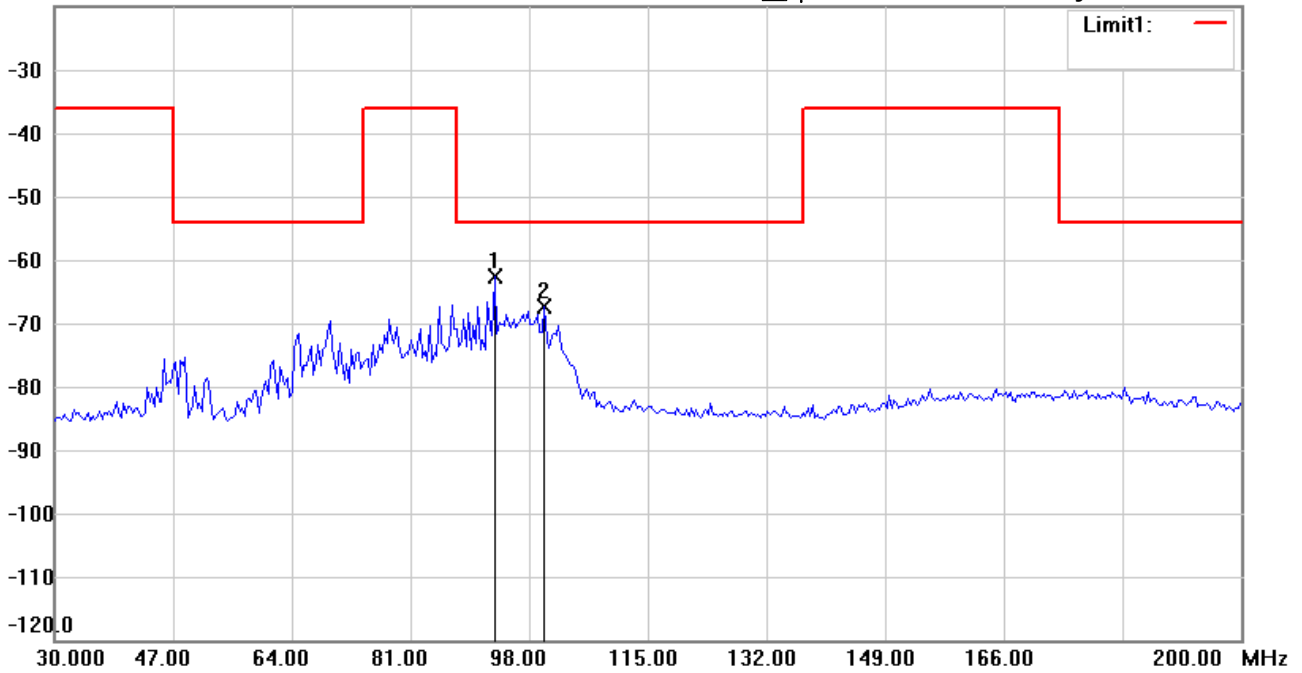

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Vertical*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 662.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	93.0261	-83.81	peak	21.12	-62.69	-54.00	150	245	-8.69	
	100.1804	-89.76	peak	22.34	-67.42	-54.00	150	305	-13.42	



Radiated Emission Measurement

Operator: Sora

File :2

Data :#1


Date: 2023/2/28

Temperature:22 °C

-20.0 dBm

Time: 下午 03:23:08

Humidity:55 %

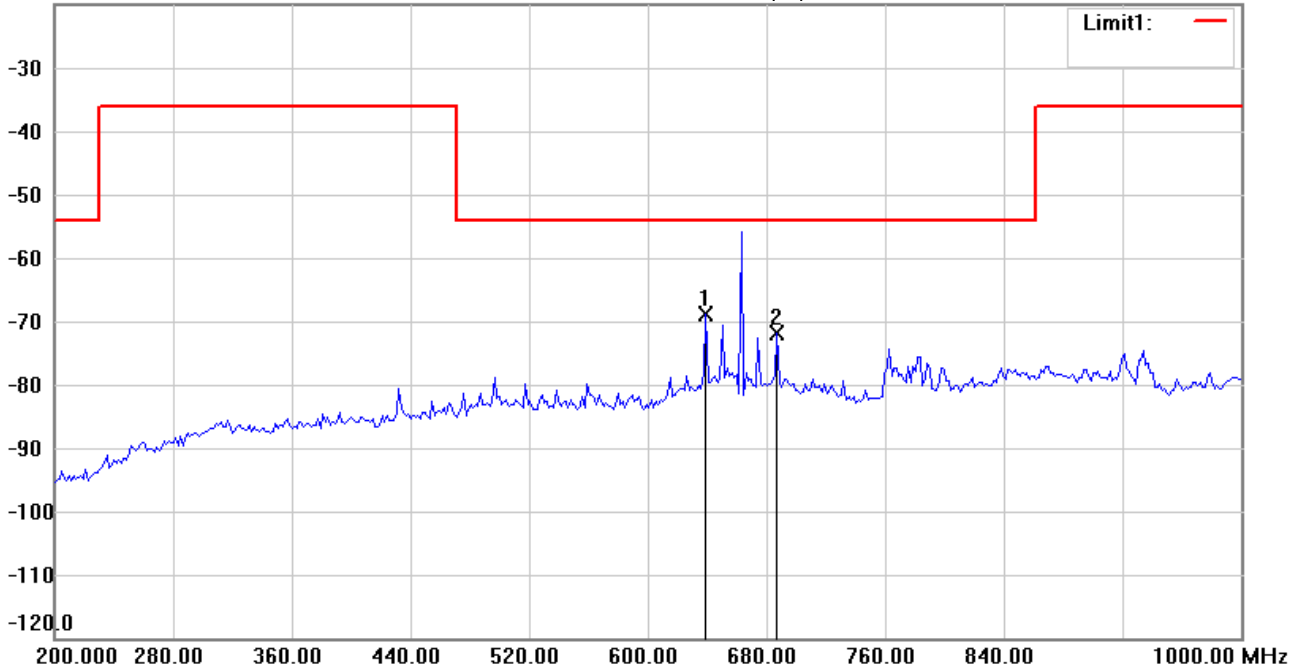

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Horizontal*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 662.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	639.2786	-66.40	peak	-2.44	-68.84	-54.00	150	145	-14.84	
	687.3747	-69.50	peak	-2.45	-71.95	-54.00	150	120	-17.95	



Radiated Emission Measurement

Operator: Sora

File :2

Data :#2


Date: 2023/2/28

Temperature:22 °C

-20.0 dBm

Time: 下午 03:25:15

Humidity:55 %

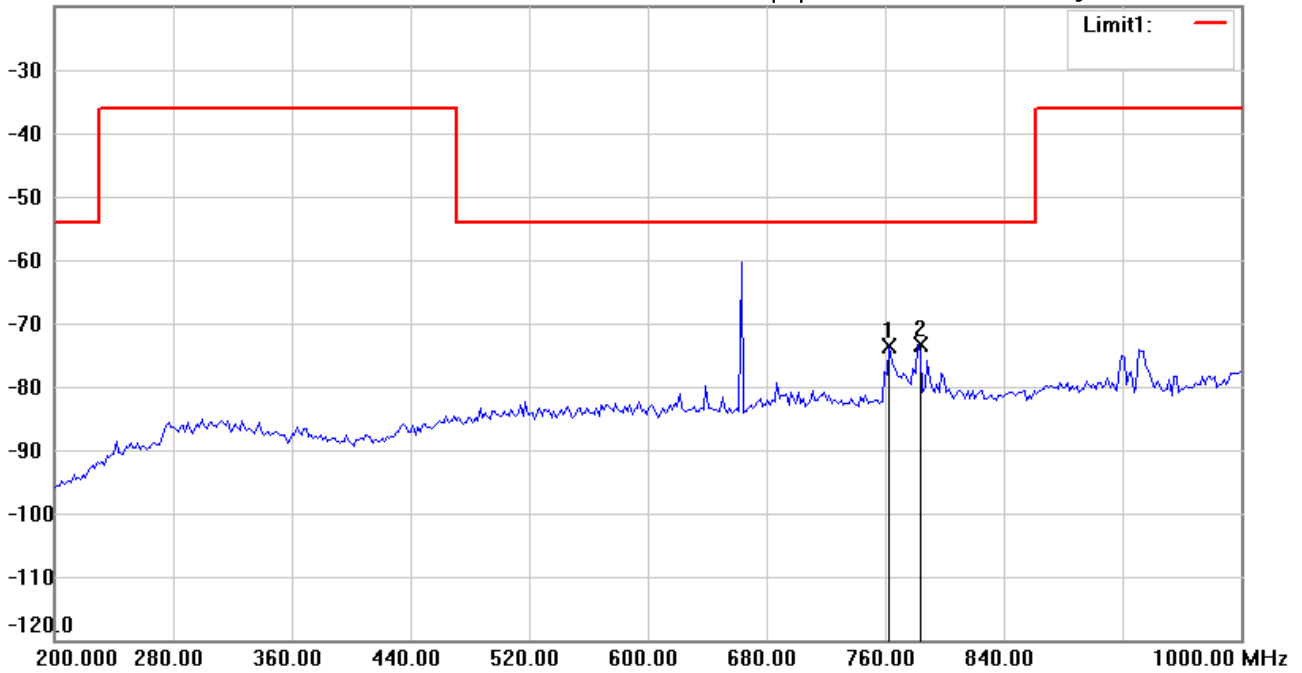

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: **Vertical**

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 662.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	762.7255	-69.54	peak	-4.15	-73.69	-54.00	150	240	-19.69	
*	781.9640	-69.60	peak	-3.88	-73.48	-54.00	150	270	-19.48	



Radiated Emission Measurement

Operator: Sora

File :3

Data :#1


Date: 2023/2/28

Temperature:22 °C

-20.0 dBm

Time: 上午 09:26:53

Humidity:55 %

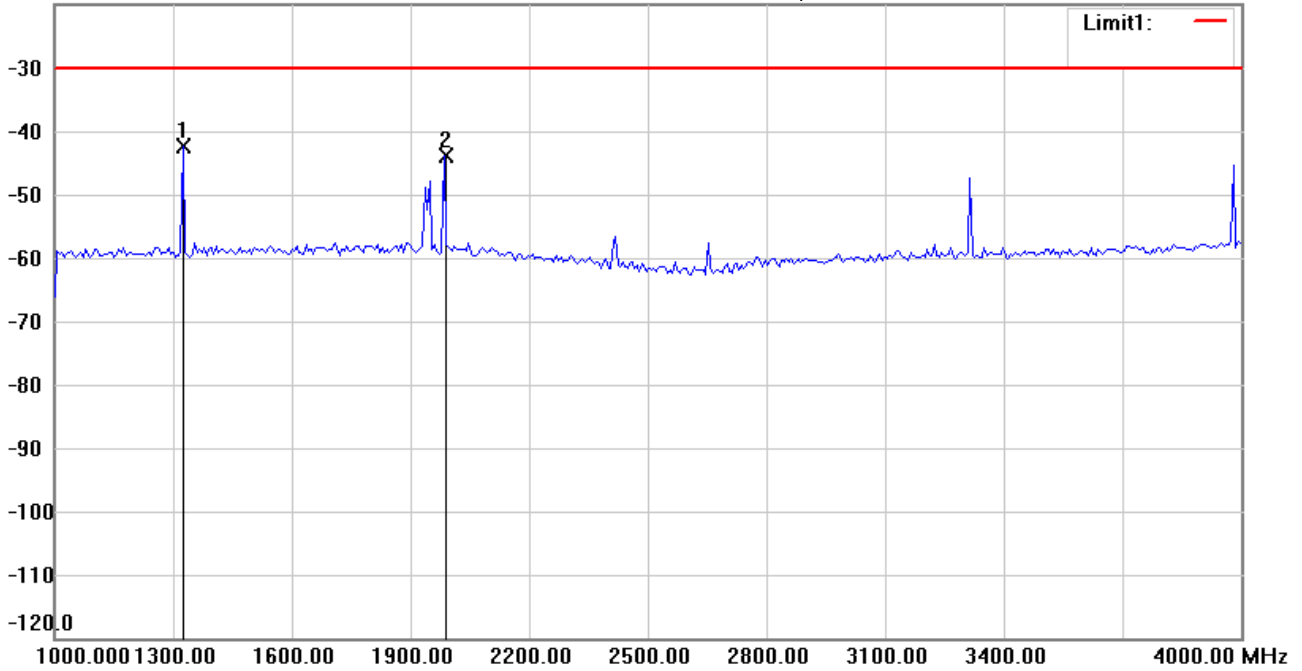

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: *Horizontal*

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 662.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1324.649	-45.97	peak	3.59	-42.38	-30.00	150	135	-12.38	
	1985.972	-47.71	peak	3.81	-43.90	-30.00	150	195	-13.90	



Radiated Emission Measurement

Operator: Sora

File :3

Data :#2


Date: 2023/2/28

Temperature:22 °C

-20.0 dBm

Time: 上午 09:29:46

Humidity:55 %

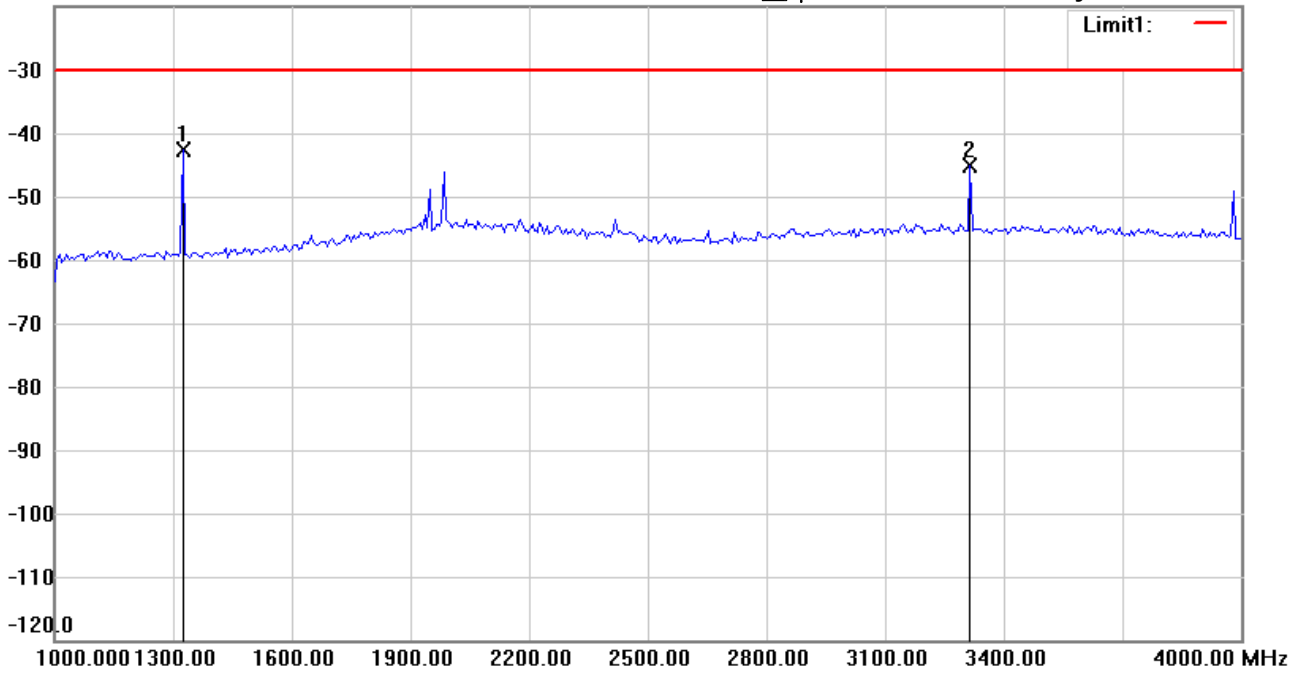

Site : Chamber

Condition : ETSI EN300_422-TX_Spurious_OP

Polarization: **Vertical**

EUT : W6M22203-21663

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : Tx 662.875MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1324.649	-46.15	peak	3.48	-42.67	-30.00	150	285	-12.67	
	3314.629	-53.19	peak	7.99	-45.20	-30.00	150	90	-15.20	