


FCC Test Report

Equipment : 7777-01YY
Brand Name : Orderman
Model No. : 7777-01YY
Marketing Name : NCR Orderman7 MSR,NCR Orderman7 SC
FCC ID : JEH-7777-01YY
Standard : 47 CFR FCC Part 15.247
Operating Band : 2400 MHz – 2483.5 MHz
Equipment Class : DTS
Applicant : NCR Corporation
Address : 2651 Satellite Blvd. Duluth, GA 30096 USA
Manufacturer : Universal Global Scientific Industrial Co., Ltd.
Address : 141, Lane 351, Sec.1, Taiping Road,
Tsaotuen, Nantou 54261, Taiwan

The product sample received on Nov. 5, 2014 and completely tested on Dec. 1, 2014. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Vic Hsiao / Supervisor





Table of Contents

- 1 GENERAL DESCRIPTION5**
- 1.1 Information.....5
- 1.2 Accessories and Support Equipment7
- 1.3 Testing Applied Standards7
- 1.4 Testing Location Information7
- 1.5 Measurement Uncertainty8
- 2 TEST CONFIGURATION OF EUT9**
- 2.1 The Worst Case Modulation Configuration9
- 2.2 The Worst Case Measurement Configuration.....10
- 2.3 Test Setup Diagram11
- 3 TRANSMITTER TEST RESULT14**
- 3.1 AC Power-line Conducted Emissions14
- 3.2 6dB Bandwidth17
- 3.3 RF Output Power.....19
- 3.4 Power Spectral Density22
- 3.5 Transmitter Radiated Bandedge Emissions24
- 3.6 Transmitter Radiated Unwanted Emissions27
- 4 TEST EQUIPMENT AND CALIBRATION DATA52**

APPENDIX A. TEST PHOTOS

APPENDIX B. PHOTOGRAPHS OF EUT



Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 0.4040020MHz 42.01 (Margin 15.76dB) - QP 37.02 (Margin 10.75dB) - AV	FCC 15.207	Complied
3.2	15.247(a)	6dB Bandwidth	6dB Bandwidth Unit [MHz] 20M:7.09	≥500kHz	Complied
3.3	15.247(b)	RF Output Power (Maximum Peak Conducted Output Power)	Power [dBm]:20.20	Power [dBm]:30	Complied
3.4	15.247(d)	Power Spectral Density	PSD [dBm/100kHz]: -6.09	PSD [dBm/3kHz]:8	Complied
3.5	15.247(c)	Transmitter Radiated Bandedge Emissions	Non-Restricted Bands: 2399.82MHz: 29.33dB Restricted Bands [dBuV/m at 3m]: 2389.96MHz 67.41 (Margin 6.59dB) - PK 48.67 (Margin 5.33dB) - AV	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied
3.6	15.247(c)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 3m]: 47.460MHz 30.89 (Margin 9.11dB) - QP	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied

1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information						
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	RF Output Power (dBm)	Co-location
2400-2483.5	b	2412-2462	1-11 [11]	1	20.20	Yes
2400-2483.5	g	2412-2462	1-11 [11]	1	19.21	Yes
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	1	18.13	Yes

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.
 Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
 Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
 Note 4: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (i.e., EUT has simultaneously co-transmitting that operating NFC+OSR+RFID+WiFi 2.4GHz)

1.1.2 Antenna Information

Antenna Category	
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	Temporary RF connector provided
<input checked="" type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.

Antenna General Information		
Ant. Cat.	Ant. Type	Gain (dBi)
Integral	PIFA	1.40



1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input checked="" type="checkbox"/> Production ; <input type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.:
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.:
<input type="checkbox"/>	Other:


1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
<input type="checkbox"/>	Operated normally mode for worst duty cycle
<input checked="" type="checkbox"/>	Operated test mode for worst duty cycle
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
<input checked="" type="checkbox"/> 100% - IEEE 802.11b	0
<input checked="" type="checkbox"/> 100%- IEEE 802.11g	0
<input checked="" type="checkbox"/> 100%- IEEE 802.11n (HT20)	0

1.1.5 EUT Operational Condition

Supply Voltage	<input type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC	- -
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input checked="" type="checkbox"/> External DC Service Station	<input checked="" type="checkbox"/> From Li-ion Battery

1.2 Accessories and Support Equipment

Accessories Information				
Li-ion Battery	Brand Name	NCR	Model Name	7777-0105-8801
	Power Rating	3.7V  3150mAh		
LCD Panel	Brand Name	LG Display	Model Name	LH500WX1-SD03
Camera	Brand Name	Ability	Model Name	BD56A555
WiFi Module	Brand Name	USI	Model Name	WM-BAN-BM-07_S
OSR Module	Brand Name	TI	Model Name	CC1125
RFID Module	Brand Name	Melexis	Model Name	MLX90109
NFC Module	Brand Name	NXP	Model Name	PN547

Reminder: Regarding to more detail and other information, please refer to user manual.

Support Equipment - AC Conduction and Radiated Emission				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Service Station (Provide by customer)	Orderman	7779-0201-8801	-
2	Debug Board (Provide by customer)	-	-	-
3	Adapter	Meanwell	GSM36U12-P5L	-

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2009
- ◆ FCC KDB 558074 D01 v03r02
- ◆ FCC KDB 662911 v02r01

1.4 Testing Location Information

Testing Location							
<input checked="" type="checkbox"/>	HWA YA	ADD	:	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.			
		TEL	:	886-3-327-3456	FAX	:	886-3-327-0973
Test Site Registration Number: FCC 636805							
Test Condition		Test Site No.		Test Engineer		Test Environment	
AC Conduction		CO04-HY		Zeus		22°C / 52%	
RF Conducted		TH01-HY		Ian		22.1°C / 61%	
Radiated Emission		03CH03-HY		Allen		24°C / 57%	

1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty		
Test Item		Uncertainty
AC power-line conducted emissions		±2.3 dB
Emission bandwidth, 6dB bandwidth		±1.4 %
RF output power, conducted		±0.6 dB
Power density, conducted		±0.8 dB
Unwanted emissions, conducted	9 – 150 kHz	±0.4 dB
	0.15 – 30 MHz	±0.4 dB
	30 – 1000 MHz	±0.5 dB
	1 – 18 GHz	±0.7 dB
	18 – 40 GHz	±0.8 dB
	40 – 200 GHz	N/A
All emissions, radiated	9 – 150 kHz	±2.5 dB
	0.15 – 30 MHz	±2.3 dB
	30 – 1000 MHz	±2.6 dB
	1 – 18 GHz	±3.6 dB
	18 – 40 GHz	±3.8 dB
	40 – 200 GHz	N/A
Temperature		±0.8 °C
Humidity		±3 %
DC and low frequency voltages		±3 %
Time		±1.4 %
Duty Cycle		±1.4 %

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing			
Modulation Mode	Transmit Chains (N _{TX})	Data Rate / MCS	Worst Data Rate / MCS
11b	1	1-11 Mbps	1 Mbps
11g	1	6-54 Mbps	6 Mbps
HT20	1	MCS 0-7	MCS 0

Note 1: IEEE Std. 802.11n modulation consists of HT20 (HT: High Throughput). Then EUT support HT20. Worst modulation mode of Guard Interval (GI) is 800ns.




Note 2: Modulation modes consist below configuration:
 11b: IEEE 802.11b, 11g: IEEE 802.11g, HT20: IEEE 802.11n

Note 3: RF output power specifies that Maximum Peak Conducted Output Power.

2.2 The Worst Case Measurement Configuration


The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
	1. EUT with Service Station Charge Mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	RF Output Power, Power Spectral Density, 6 dB Bandwidth
Test Condition	Conducted measurement at transmit chains
Modulation Mode	11b, 11g, HT20


The Worst Case Mode for Following Conformance Tests			
Tests Item		Transmitter Radiated Bandedge Emissions Transmitter Radiated Unwanted Emissions	
Test Condition		Radiated measurement	
User Position		<input type="checkbox"/> EUT will be placed in fixed position.	
X Plane	Y Plane	Z Plane	<input type="checkbox"/> EUT will be placed in mobile position and operating multiple positions.
			<input checked="" type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed three orthogonal planes. The worst planes is Y.
Operating Mode (Blow 1GHz)		Operating Mode Description	
		1. EUT with Service Station Charge Mode	
		2. EUT with AC power via Debug Board Transmitter	
Operating Mode (Above 1GHz)		2. EUT with AC power via Debug Board Transmitter	
Modulation Mode		11b, 11g, HT20	

Note: The RF Function will be off when the EUT charge with Service Station.


2.3 Test Setup Diagram

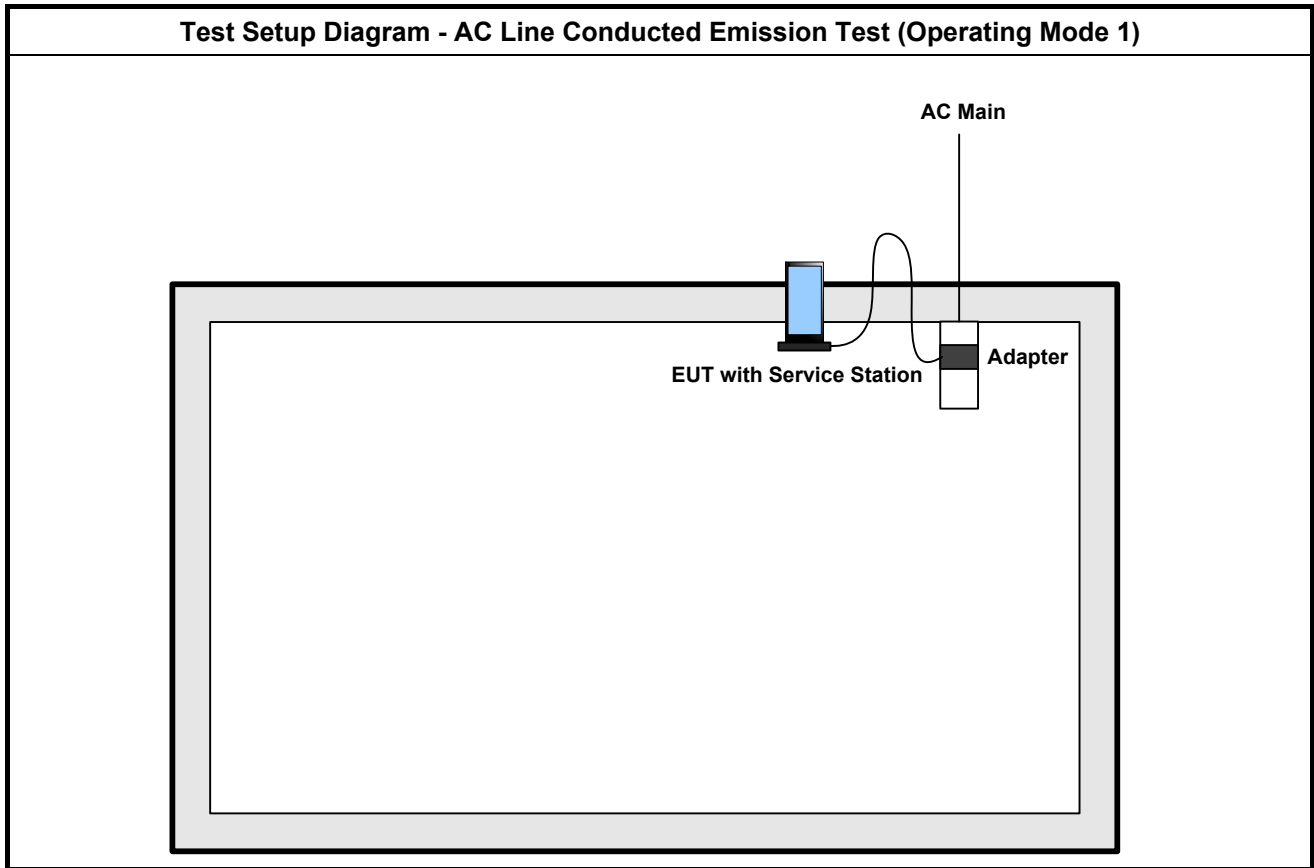


Test Setup Diagram - Radiated Test Below 1GHz (Operating Mode 1)

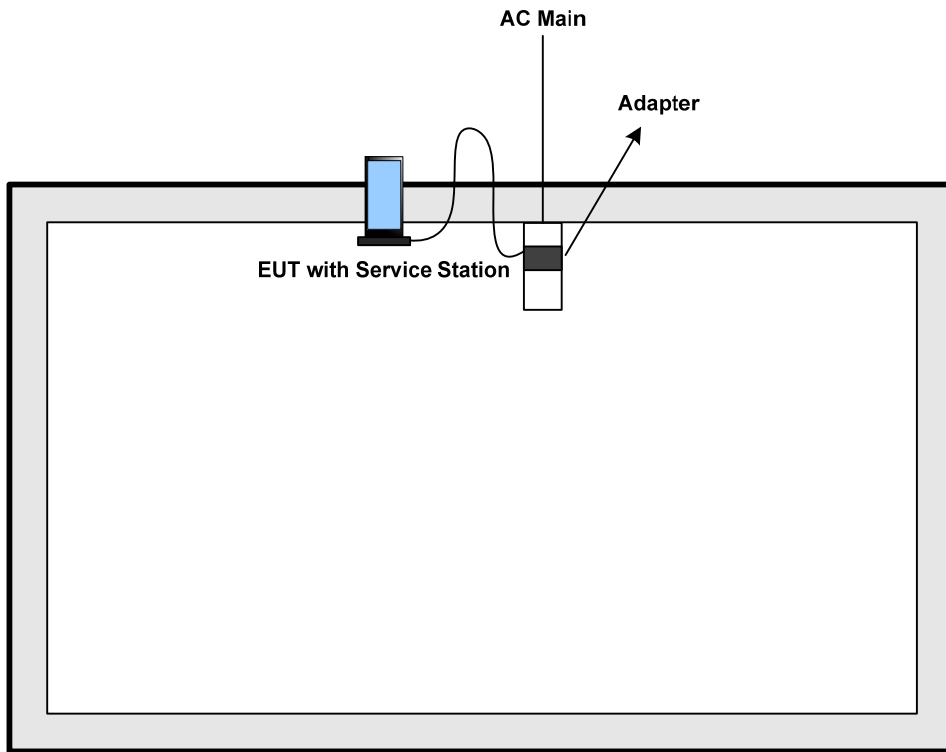

Test Setup Diagram - Radiated Test Below 1GHz (Operating Mode 2)

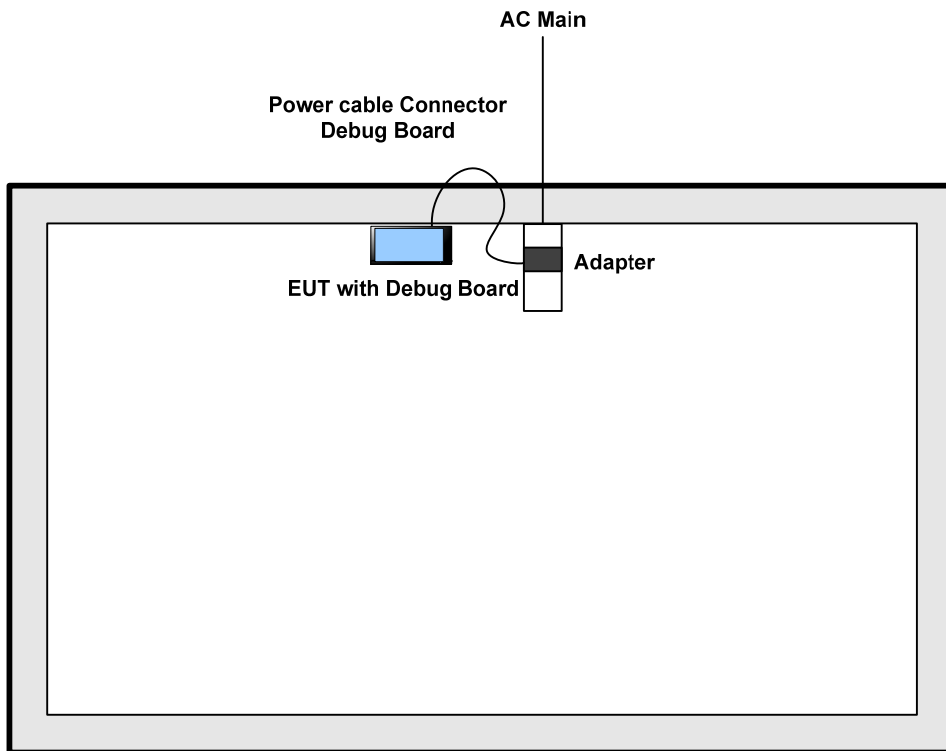

Test Setup Diagram - Radiated Test Above 1GHz (Operating Mode 2)

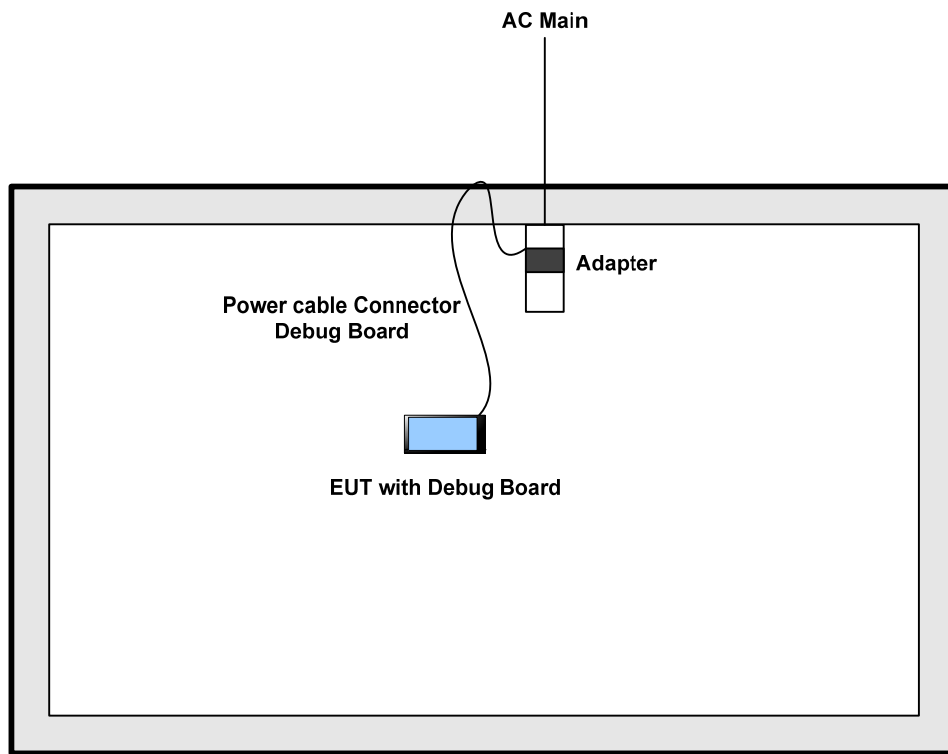

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

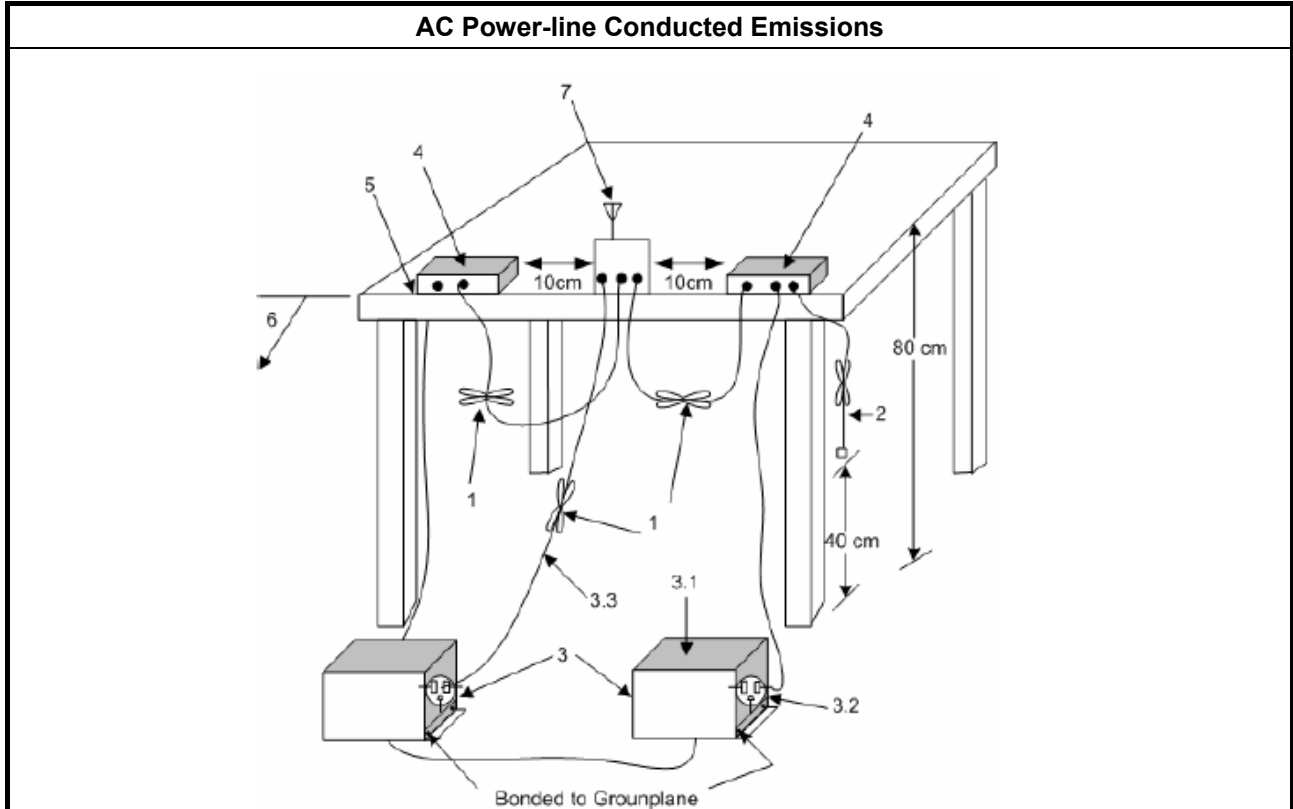


3.1.5 Test Result of AC Power-line Conducted Emissions

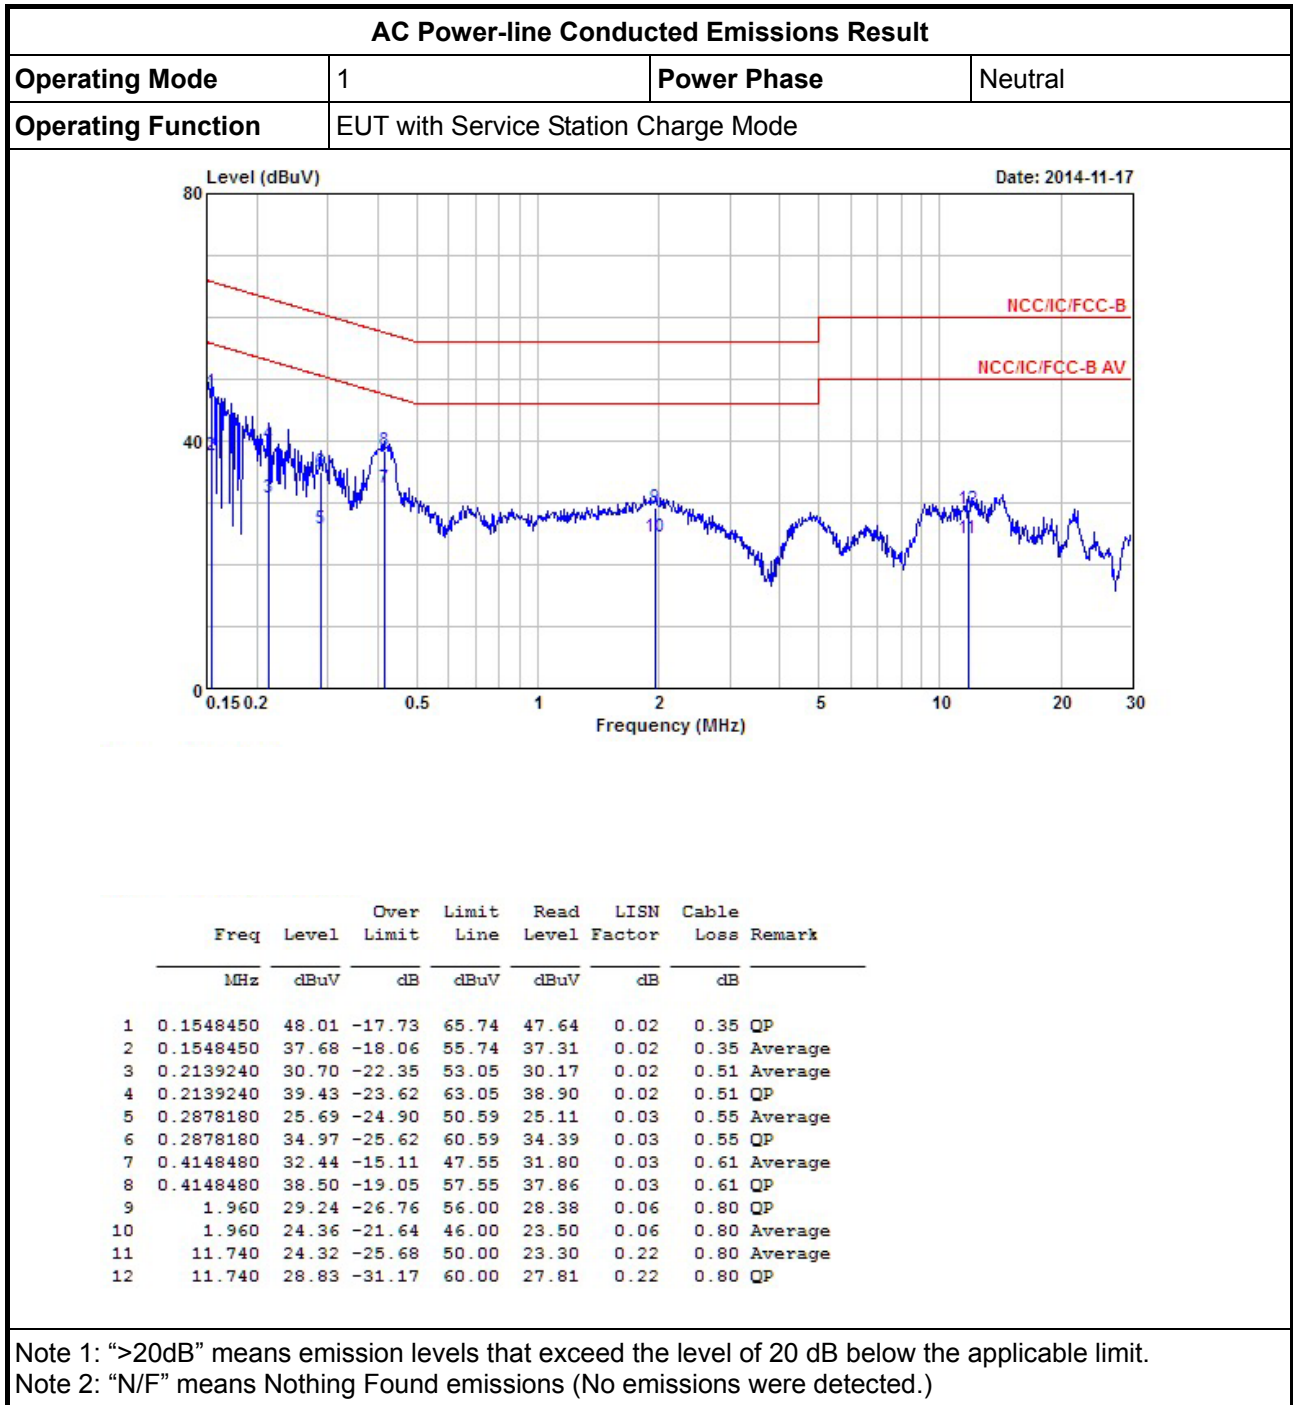



AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	EUT with Service Station Charge Mode		

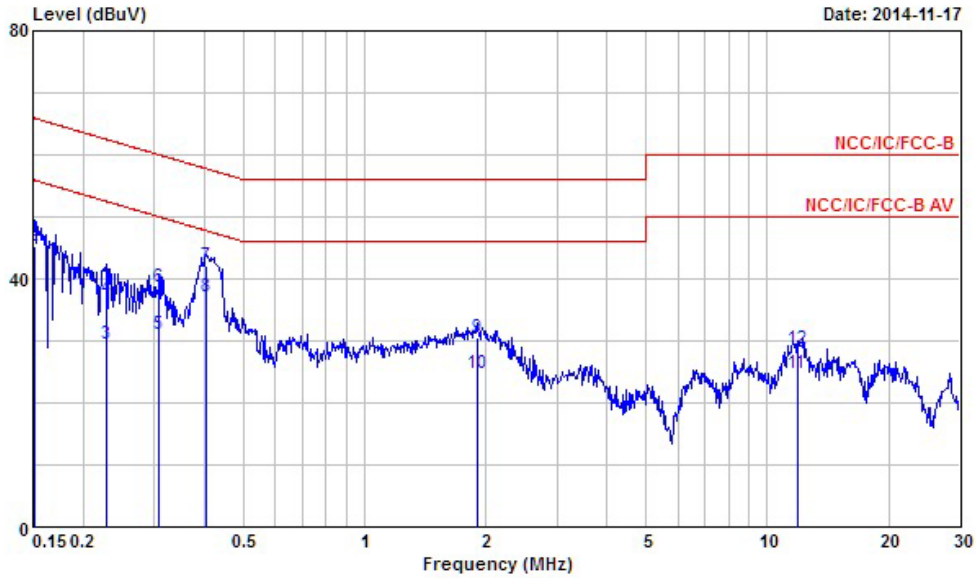

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.1515980	34.40	-21.51	55.91	34.03	0.03	0.34	Average
2	0.1515980	45.23	-20.68	65.91	44.86	0.03	0.34	QP
3	0.2279670	29.58	-22.94	52.52	29.03	0.03	0.52	Average
4	0.2279670	36.95	-25.57	62.52	36.40	0.03	0.52	QP
5	0.3083410	30.93	-19.09	50.02	30.34	0.03	0.56	Average
6	0.3083410	38.55	-21.47	60.02	37.96	0.03	0.56	QP
7	0.4040020	42.01	-15.76	57.77	41.38	0.03	0.60	QP
8	0.4040020	37.02	-10.75	47.77	36.39	0.03	0.60	Average
9	1.900	30.65	-25.35	56.00	29.78	0.07	0.80	QP
10	1.900	24.61	-21.39	46.00	23.74	0.07	0.80	Average
11	11.870	24.65	-25.35	50.00	23.63	0.22	0.80	Average
12	11.870	28.81	-31.19	60.00	27.79	0.22	0.80	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

3.2 6dB Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit	
Systems using digital modulation techniques:	
<input checked="" type="checkbox"/>	6 dB bandwidth \geq 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074 D01 v03r02, clause 8.1 Option 1 for 6 dB bandwidth measurement.
<input type="checkbox"/>	Refer as FCC KDB 558074 D01 v03r02, clause 8.2 Option 2 for 6 dB bandwidth measurement.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input type="checkbox"/>	The EUT supports multiple transmit chains using options given below:
<input type="checkbox"/>	Option 1: Multiple transmit chains measurements need to be performed on one of the active transmit chains (antenna outputs). All measurement had be performed on transmit chains 1.
<input type="checkbox"/>	Option 2: Multiple transmit chains measurements need to be performed on each transmit chains individually (antenna outputs). All measurement had be performed on all transmit chains.

3.2.4 Test Setup

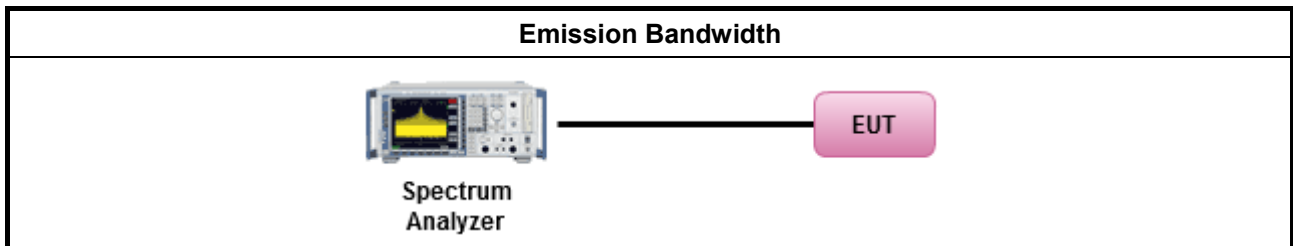




3.2.5 Test Result of Emission Bandwidth

Emission Bandwidth Result				
Condition			Emission Bandwidth (MHz)	
Modulation Mode	N _{TX}	Freq. (MHz)	99% Bandwidth	6dB Bandwidth
11b	1	2412	12.60	7.89
11b	1	2437	12.50	7.09
11b	1	2462	12.54	7.57
11g	1	2412	16.73	16.59
11g	1	2437	16.68	16.59
11g	1	2462	16.62	16.59
HT20	1	2412	17.76	17.59
HT20	1	2437	17.75	17.80
HT20	1	2462	17.76	17.77
Limit			N/A	≥500 kHz
Result			Complied	

Note 1: N_{TX} = Number of Transmit Chains

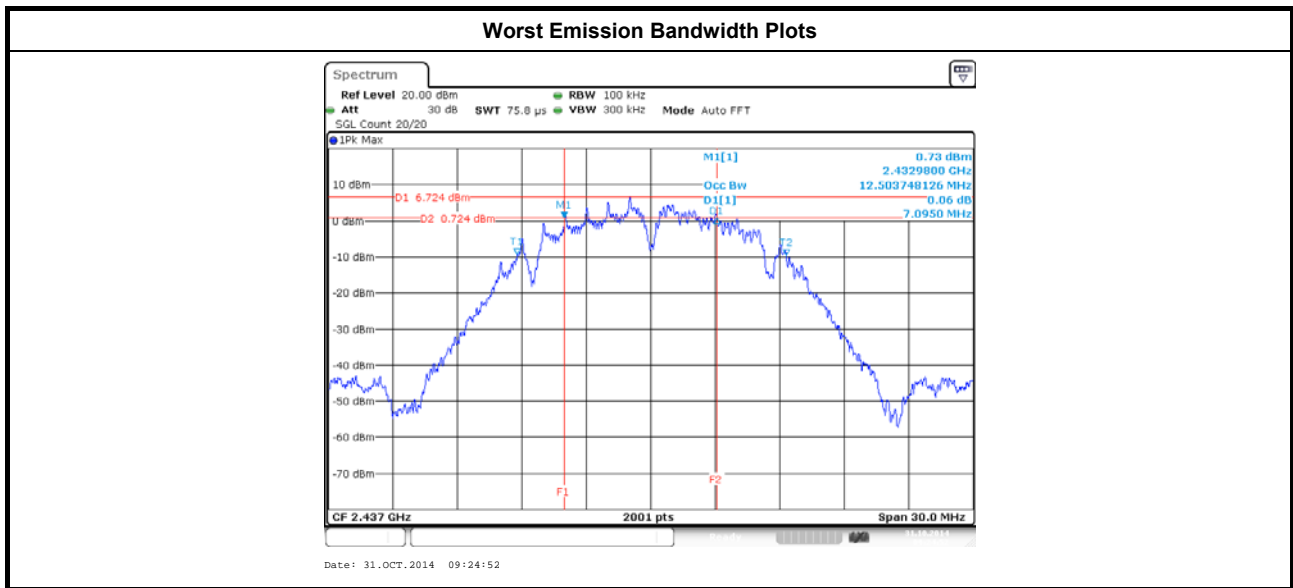

3.3 RF Output Power

3.3.1 RF Output Power Limit

RF Output Power Limit	
Maximum Peak Conducted Output Power or Maximum Conducted Output Power Limit	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band:	
<input checked="" type="checkbox"/>	If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
<input checked="" type="checkbox"/>	Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
<input type="checkbox"/>	Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
<input type="checkbox"/>	Smart antenna system (SAS):
<input type="checkbox"/>	Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
<input type="checkbox"/>	Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
<input type="checkbox"/>	Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
e.i.r.p. Power Limit:	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band	
<input checked="" type="checkbox"/>	Point-to-multipoint systems (P2M): $P_{eirp} \leq 36$ dBm (4 W)
<input type="checkbox"/>	Point-to-point systems (P2P): $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX}])$ dBm
<input type="checkbox"/>	Smart antenna system (SAS)
<input type="checkbox"/>	Single beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
<input type="checkbox"/>	Overlap beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
<input type="checkbox"/>	Aggregate power on all beams: $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX} + 8])$ dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi. P_{eirp} = e.i.r.p. Power in dBm.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Maximum Peak Conducted Output Power
<input type="checkbox"/>	Refer as FCC KDB 558074 D01 v03r02, clause 9.1.1 (RBW ≥ EBW method).
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074 D01 v03r02, clause 9.1.2 (peak power meter for VBW ≥ DTS BW).
<input checked="" type="checkbox"/>	Maximum Conducted Output Power
	[duty cycle ≥ 98% or external video / power trigger]
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074 D01 v03r02, clause 9.2.2.2 Method AVGSA-1 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 558074 D01 v03r02, clause 9.2.2.3 Method AVGSA-1 Alt. (slow sweep speed)
	duty cycle < 98% and average over on/off periods with duty factor
<input type="checkbox"/>	Refer as FCC KDB 558074 D01 v03r02, clause 9.2.2.4 Method AVGSA-2 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 558074 D01 v03r02, clause 9.2.2.5 Method AVGSA-2 Alt. (slow sweep speed)
	RF power meter and average over on/off periods with duty factor or gated trigger
<input type="checkbox"/>	Refer as FCC KDB 558074 D01 v03r02, clause 9.2.3 Method AVGPM (using an RF average power meter).
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input type="checkbox"/>	The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
<input type="checkbox"/>	If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$

3.3.4 Test Setup

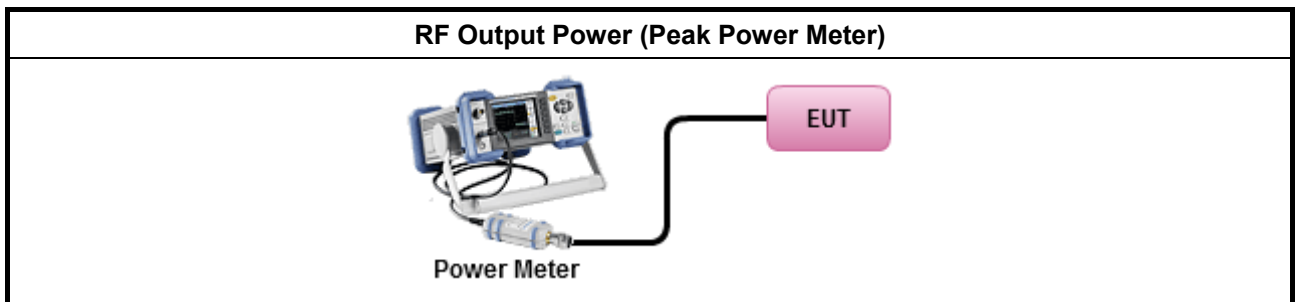



3.3.5 Test Result of Maximum Peak Conducted Output Power

Maximum Peak Conducted Output Power Result							
Condition			RF Output Power (dBm)				
Modulation Mode	N _{TX}	Freq. (MHz)	RF Output Power	Power Limit	Antenna Gain (dBi)	EIRP Power	EIRP Limit
11b	1	2412	20.11	30.00	1.40	21.51	36.00
11b	1	2437	20.04	30.00	1.40	21.44	36.00
11b	1	2462	20.20	30.00	1.40	21.60	36.00
11g	1	2412	19.20	30.00	1.40	20.60	36.00
11g	1	2437	19.04	30.00	1.40	20.44	36.00
11g	1	2462	19.21	30.00	1.40	20.61	36.00
HT20	1	2412	17.93	30.00	1.40	19.33	36.00
HT20	1	2437	18.13	30.00	1.40	19.53	36.00
HT20	1	2462	18.12	30.00	1.40	19.52	36.00
Result			Complied				

3.3.6 Test Result of Maximum Conducted Output Power

Maximum Conducted Output Power							
Condition			RF Output Power (dBm)				
Modulation Mode	N _{TX}	Freq. (MHz)	RF Output Power	Power Limit	Antenna Gain (dBi)	EIRP Power	EIRP Limit
11b	1	2412	17.11	30.00	1.40	18.51	36.00
11b	1	2437	17.18	30.00	1.40	18.58	36.00
11b	1	2462	17.23	30.00	1.40	18.63	36.00
11g	1	2412	14.16	30.00	1.40	15.56	36.00
11g	1	2437	13.84	30.00	1.40	15.24	36.00
11g	1	2462	13.82	30.00	1.40	15.22	36.00
HT20	1	2412	12.81	30.00	1.40	14.21	36.00
HT20	1	2437	12.98	30.00	1.40	14.38	36.00
HT20	1	2462	12.98	30.00	1.40	14.38	36.00
Result			Complied				

3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
<input checked="" type="checkbox"/> Power Spectral Density (PSD) \leq 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures


Test Method
<input checked="" type="checkbox"/> Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).
<input checked="" type="checkbox"/> Refer as FCC KDB 558074 D01 v03r02, clause 10.2 Method PKPSD (RBW=3-100kHz;detector=peak). [duty cycle \geq 98% or external video / power trigger]
<input checked="" type="checkbox"/> Refer as FCC KDB 558074 D01 v03r02, clause 10.3 Method AVGPSD-1 (spectral trace averaging).
<input type="checkbox"/> Refer as FCC KDB 558074 D01 v03r02, clause 10.4 Method AVGPSD-1 Alt. (slow sweep speed) duty cycle < 98% and average over on/off periods with duty factor
<input type="checkbox"/> Refer as FCC KDB 558074 D01 v03r02, clause 10.5 Method AVGPSD-2 (spectral trace averaging).
<input type="checkbox"/> Refer as FCC KDB 558074 D01 v03r02, clause 10.6 Method AVGPSD-2 Alt. (slow sweep speed)
<input checked="" type="checkbox"/> For conducted measurement.
<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input type="checkbox"/> The EUT supports multiple transmit chains using options given below:
<input type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the N _{TX} output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
<input type="checkbox"/> Option 2: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.

3.4.4 Test Setup

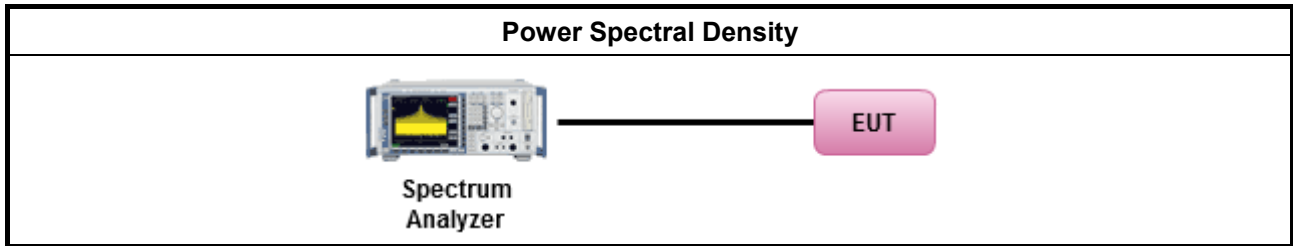


3.4.5 Test Result of Power Spectral Density

Power Spectral Density Result				
Condition			Power Spectral Density	
Modulation Mode	N _{TX}	Freq. (MHz)	Sum Chain (dBm/100kHz)	PSD Limit (dBm/3kHz)
11b	1	2412	-9.89	8.00
11b	1	2437	-8.80	8.00
11b	1	2462	-6.09	8.00
11g	1	2412	-15.73	8.00
11g	1	2437	-15.36	8.00
11g	1	2462	-16.65	8.00
HT20	1	2412	-16.38	8.00
HT20	1	2437	-17.42	8.00
HT20	1	2462	-17.97	8.00
Result			Complied	

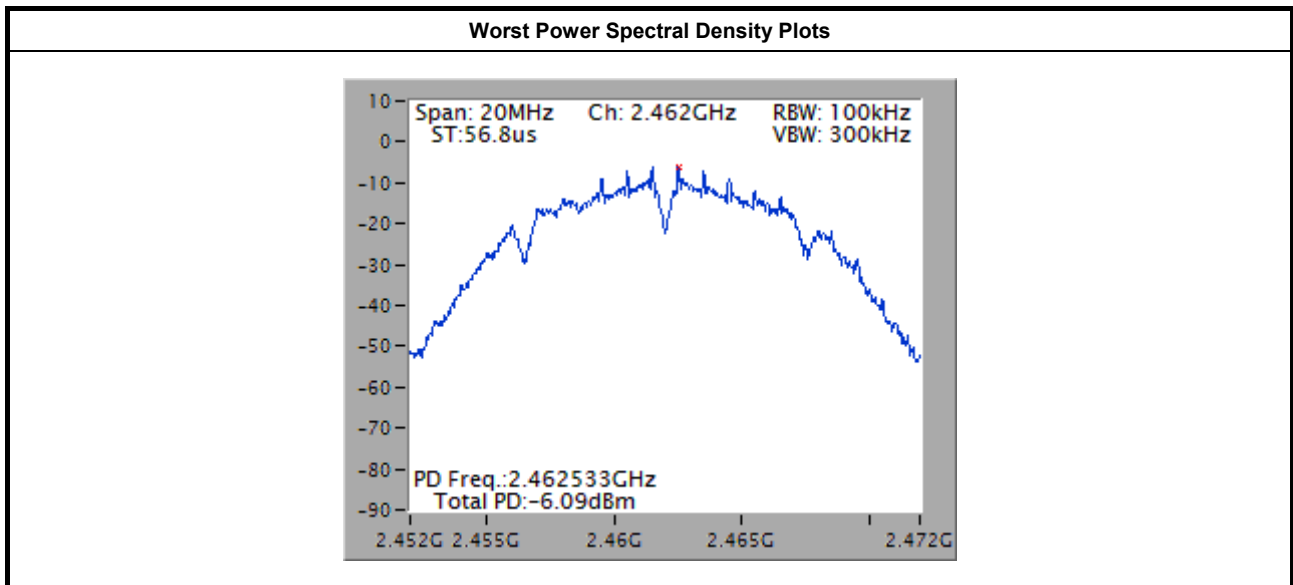

3.5 Transmitter Radiated Bandedge Emissions

3.5.1 Transmitter Radiated Bandedge Emissions Limit

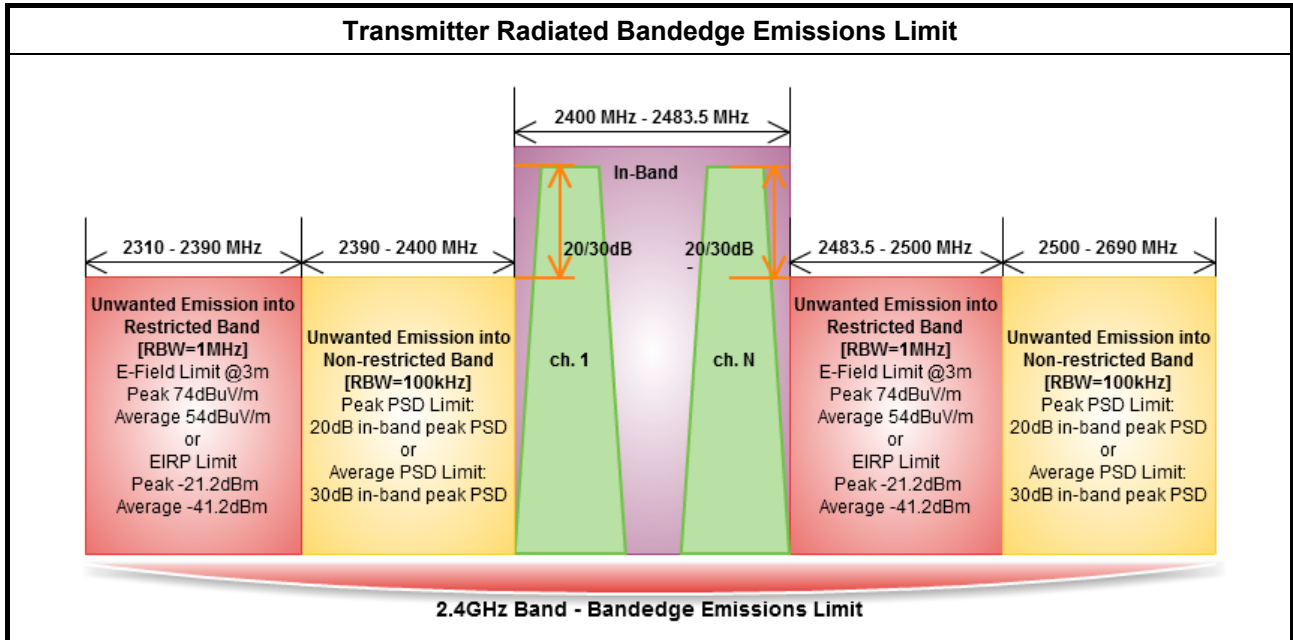


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074 D01 v03r02, clause 11 for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074 D01 v03r02, clause 12 for unwanted emissions into restricted bands.
<input type="checkbox"/>	Refer as FCC KDB 558074 D01 v03r02, clause 12.2.5.1 Option 1 (trace averaging for duty cycle $\geq 98\%$)
<input type="checkbox"/>	Refer as FCC KDB 558074 D01 v03r02, clause 12.2.5.2 Option 2 (trace averaging + duty factor).
<input type="checkbox"/>	Refer as FCC KDB 558074 D01 v03r02, clause 12.2.5.3 Option 3 (Reduced VBW $\geq 1/T$).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074 D01 v03r02, clause 11.3 and 12.2.4 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For the transmitter bandedge emissions shall be measured using following options below:
<input type="checkbox"/>	Refer as FCC KDB 558074 D01 v03r02, clause 13.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.
<input checked="" type="checkbox"/>	For radiated measurement, refer as FCC KDB 558074 D01 v03r02, clause 12.2.7 and ANSI C63.10, clause 6.6. Test distance is 3m.

3.5.4 Test Setup

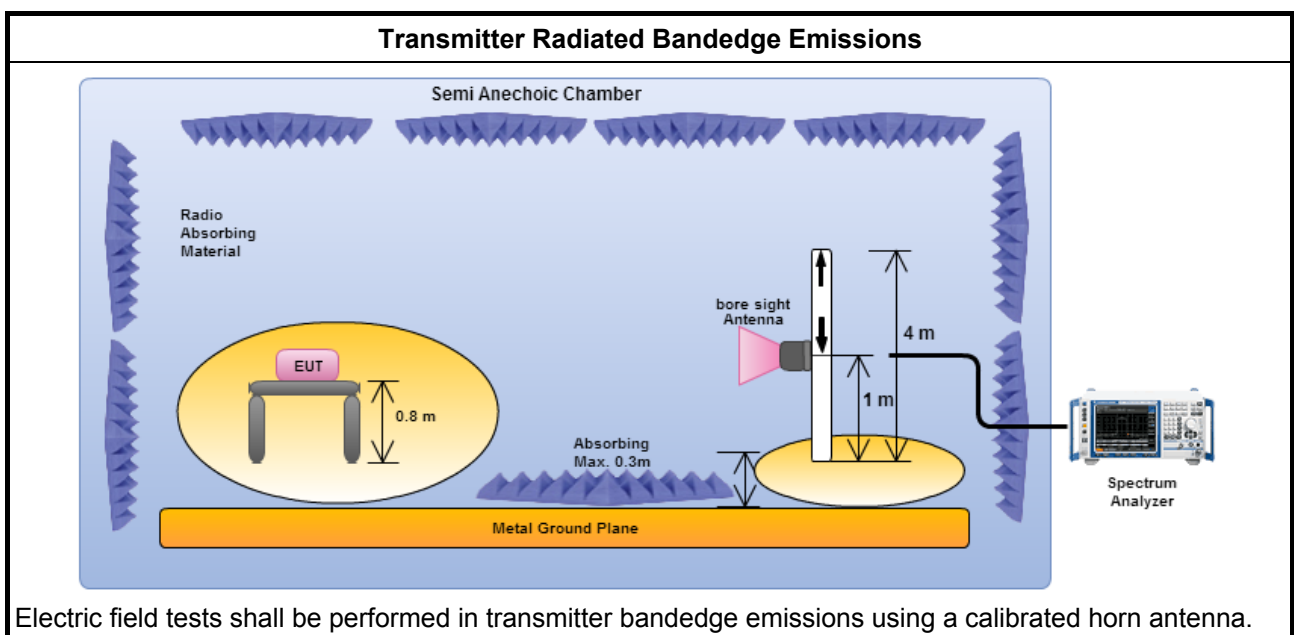

3.5.5 Test Result of Transmitter Radiated Bandedge Emissions

Transmitter Radiated Bandedge Emissions (Non-restricted Band)								
Modulation	N _{TX}	Test Freq. (MHz)	In-band PSD [i] (dBuV/m)	Freq. (MHz)	Out-band PSD [o] (dBuV/m)	[i] – [o] (dB)	Limit (dB)	Pol.
11b	1	2412	102.90	2397.13	60.45	42.45	20	H
11b	1	2462	101.27	2539.60	60.99	40.28	20	H
11g	1	2412	95.81	2399.82	66.48	29.33	20	H
11g	1	2462	94.74	2543.60	61.10	33.64	20	H
HT20	1	2412	95.84	2399.48	65.52	30.32	20	H
HT20	1	2462	93.80	2538.00	61.17	32.63	20	H

Note 1: Measurement worst emissions of receive antenna polarization.
 Note 2: RBW was set to be 100kHz and VBW was 300kHz.

Transmitter Radiated Bandedge Emissions (Restricted Band)										
Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
11b	1	2412	3	2385.93	57.18	74	2388.84	45.10	54	H
11b	1	2462	3	2486.20	57.38	74	2484.60	44.90	54	H
11g	1	2412	3	2389.96	68.23	74	2389.96	48.61	54	H
11g	1	2462	3	2483.50	68.00	74	2483.50	47.61	54	H
HT20	1	2412	3	2389.52	67.41	74	2389.96	48.67	54	H
HT20	1	2462	3	2483.60	69.06	74	2483.50	46.84	54	H

Note 1: Measurement worst emissions of receive antenna polarization.

3.6 Transmitter Radiated Unwanted Emissions

3.6.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.



3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074 D01 v03r02, clause 11 for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074 D01 v03r02, clause 12 for unwanted emissions into restricted bands.
<input type="checkbox"/>	Refer as FCC KDB 558074 D01 v03r02, clause 12.2.5.1 Option 1 (trace averaging for duty cycle \geq 98%)
<input type="checkbox"/>	Refer as FCC KDB 558074 D01 v03r02, clause 12.2.5.2 Option 2 (trace averaging + duty factor).
<input type="checkbox"/>	Refer as FCC KDB 558074 D01 v03r02, clause 12.2.5.3 Option 3 (Reduced VBW \geq 1/T).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW \geq 1/T, where T is pulse time.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074 D01 v03r02, clause 11.3 and 12.2.4 measurement procedure peak limit.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074 D01 v03r02, clause 12.2.3 measurement procedure Quasi-Peak limit.
<input checked="" type="checkbox"/>	For radiated measurement, refer as FCC KDB 558074 D01 v03r02, clause 12.2.7.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1 GHz and test distance is 3m.
<input checked="" type="checkbox"/>	The any unwanted emissions level shall not exceed the fundamental emission level.
<input checked="" type="checkbox"/>	All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.6.4 Test Setup

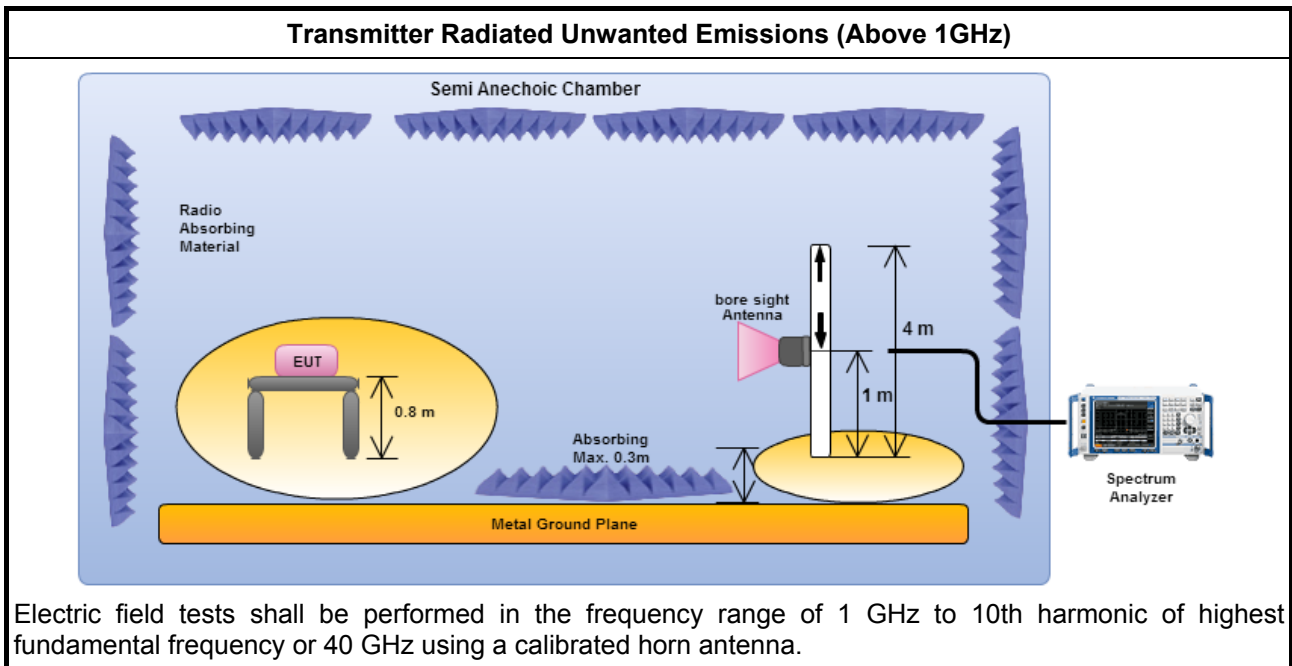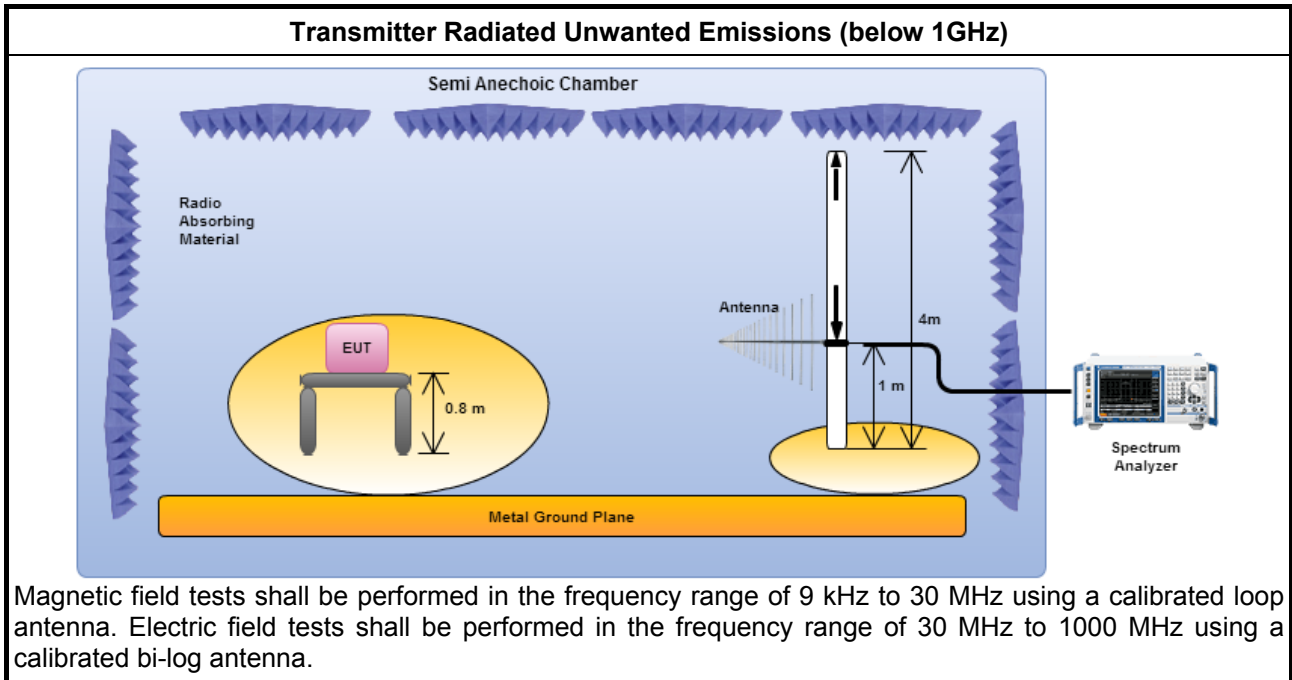


3.6.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.




3.6.6 Transmitter Radiated Unwanted Emissions - (Below 1GHz WORST-CASE DATA)

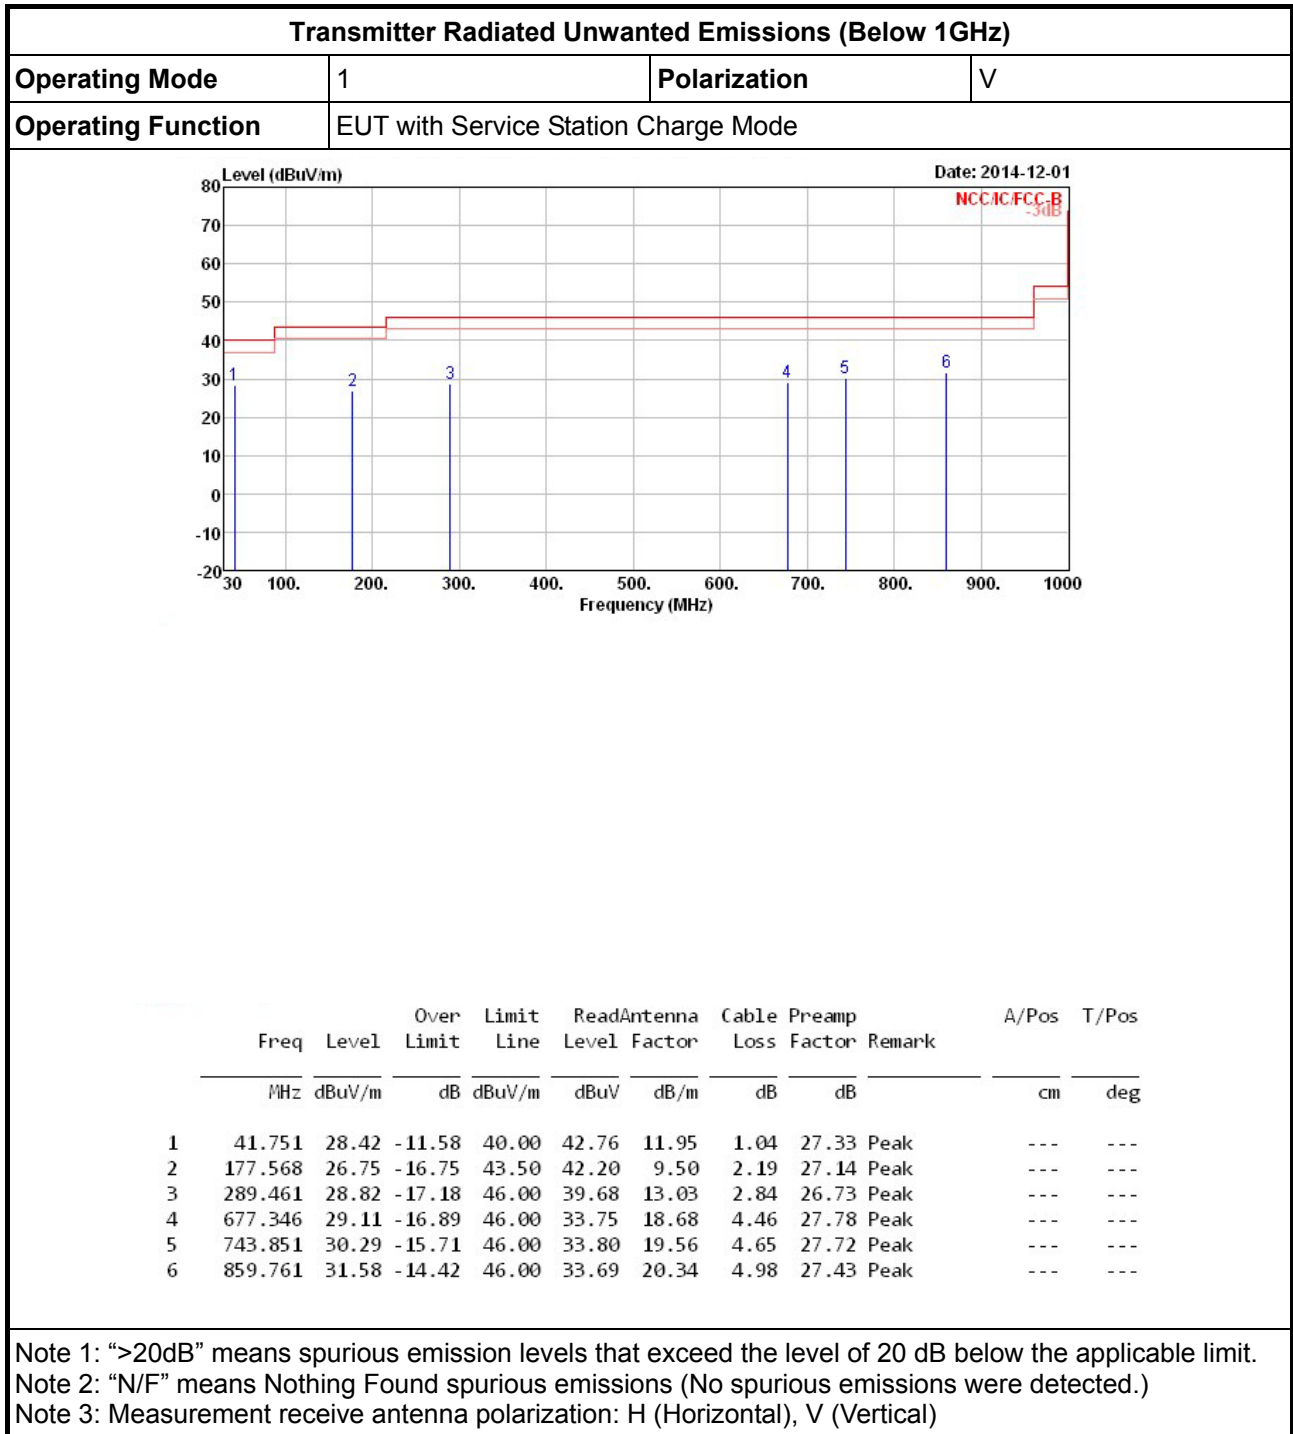




Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	1	Polarization	H
Operating Function	EUT with Service Station Charge Mode		

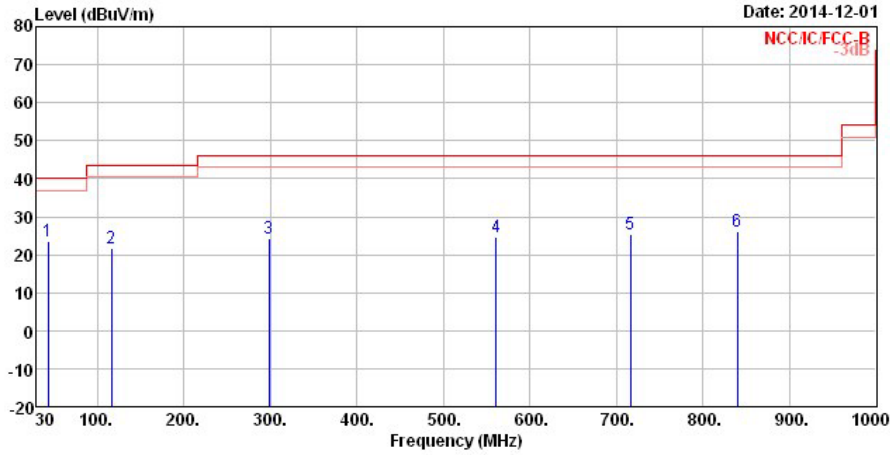

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	43.421	23.62	-16.38	40.00	39.08	10.82	1.06	27.34	Peak	---	---
2	116.253	21.69	-21.81	43.50	34.97	12.15	1.75	27.18	Peak	---	---
3	298.150	24.26	-21.74	46.00	34.87	13.19	2.89	26.69	Peak	---	---
4	561.238	24.75	-21.25	46.00	30.31	18.31	3.97	27.84	Peak	---	---
5	715.853	25.37	-20.63	46.00	29.44	19.10	4.59	27.76	Peak	---	---
6	839.457	26.12	-19.88	46.00	28.49	20.19	4.93	27.49	Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

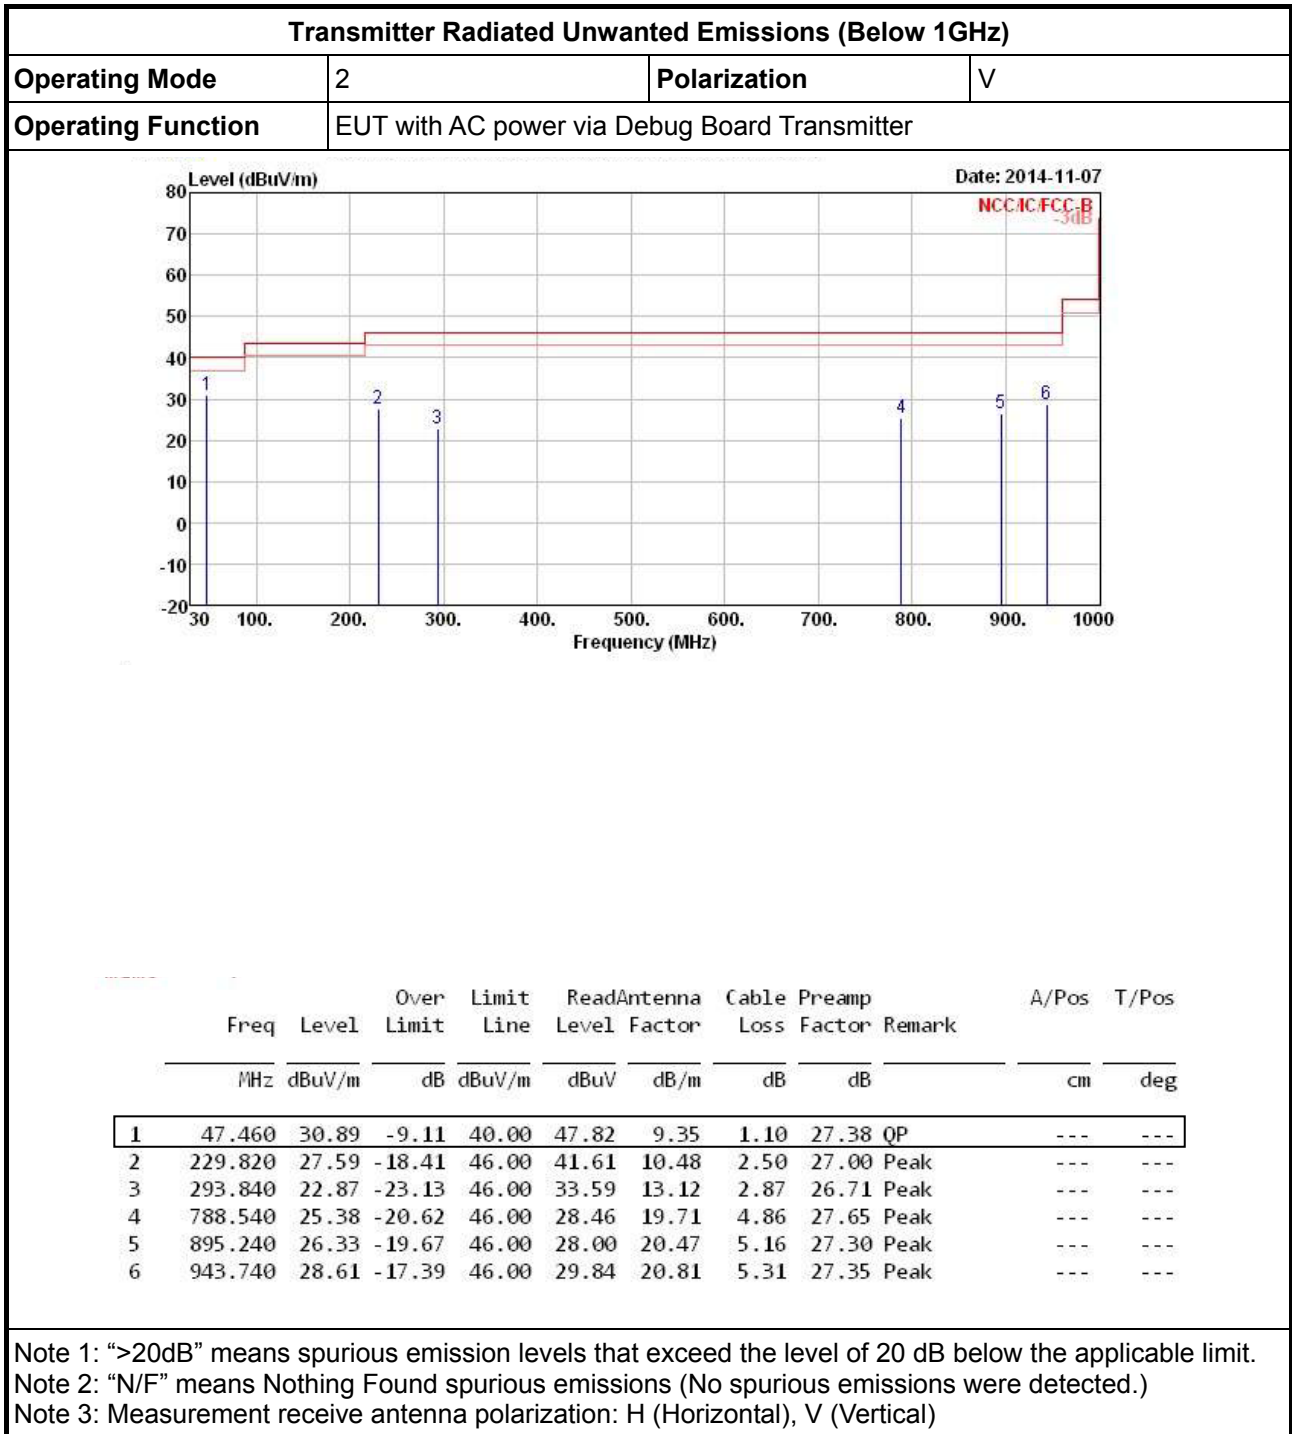



Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	2	Polarization	H
Operating Function	EUT with AC power via Debug Board Transmitter		

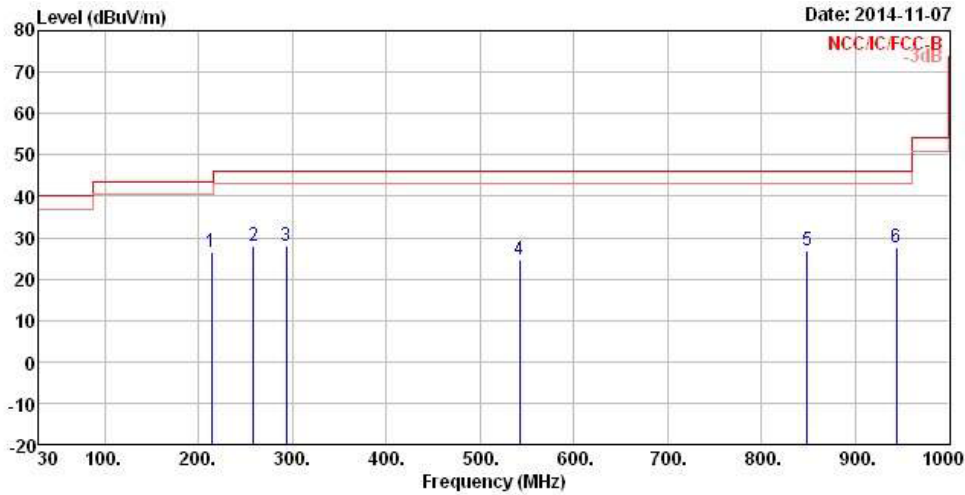


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	214.300	26.50	-17.00	43.50	41.66	9.50	2.41	27.07	Peak	---	---
2	258.920	28.08	-17.92	46.00	38.57	13.72	2.66	26.87	Peak	---	---
3	293.840	27.80	-18.20	46.00	38.52	13.12	2.87	26.71	Peak	---	---
4	542.160	24.50	-21.50	46.00	29.90	18.58	3.90	27.88	Peak	---	---
5	848.680	26.73	-19.27	46.00	28.99	20.27	4.93	27.46	Peak	---	---
6	943.740	27.73	-18.27	46.00	28.96	20.81	5.31	27.35	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)




3.6.7 Transmitter Radiated Unwanted Emissions - (Above 1GHz WORST-CASE DATA)

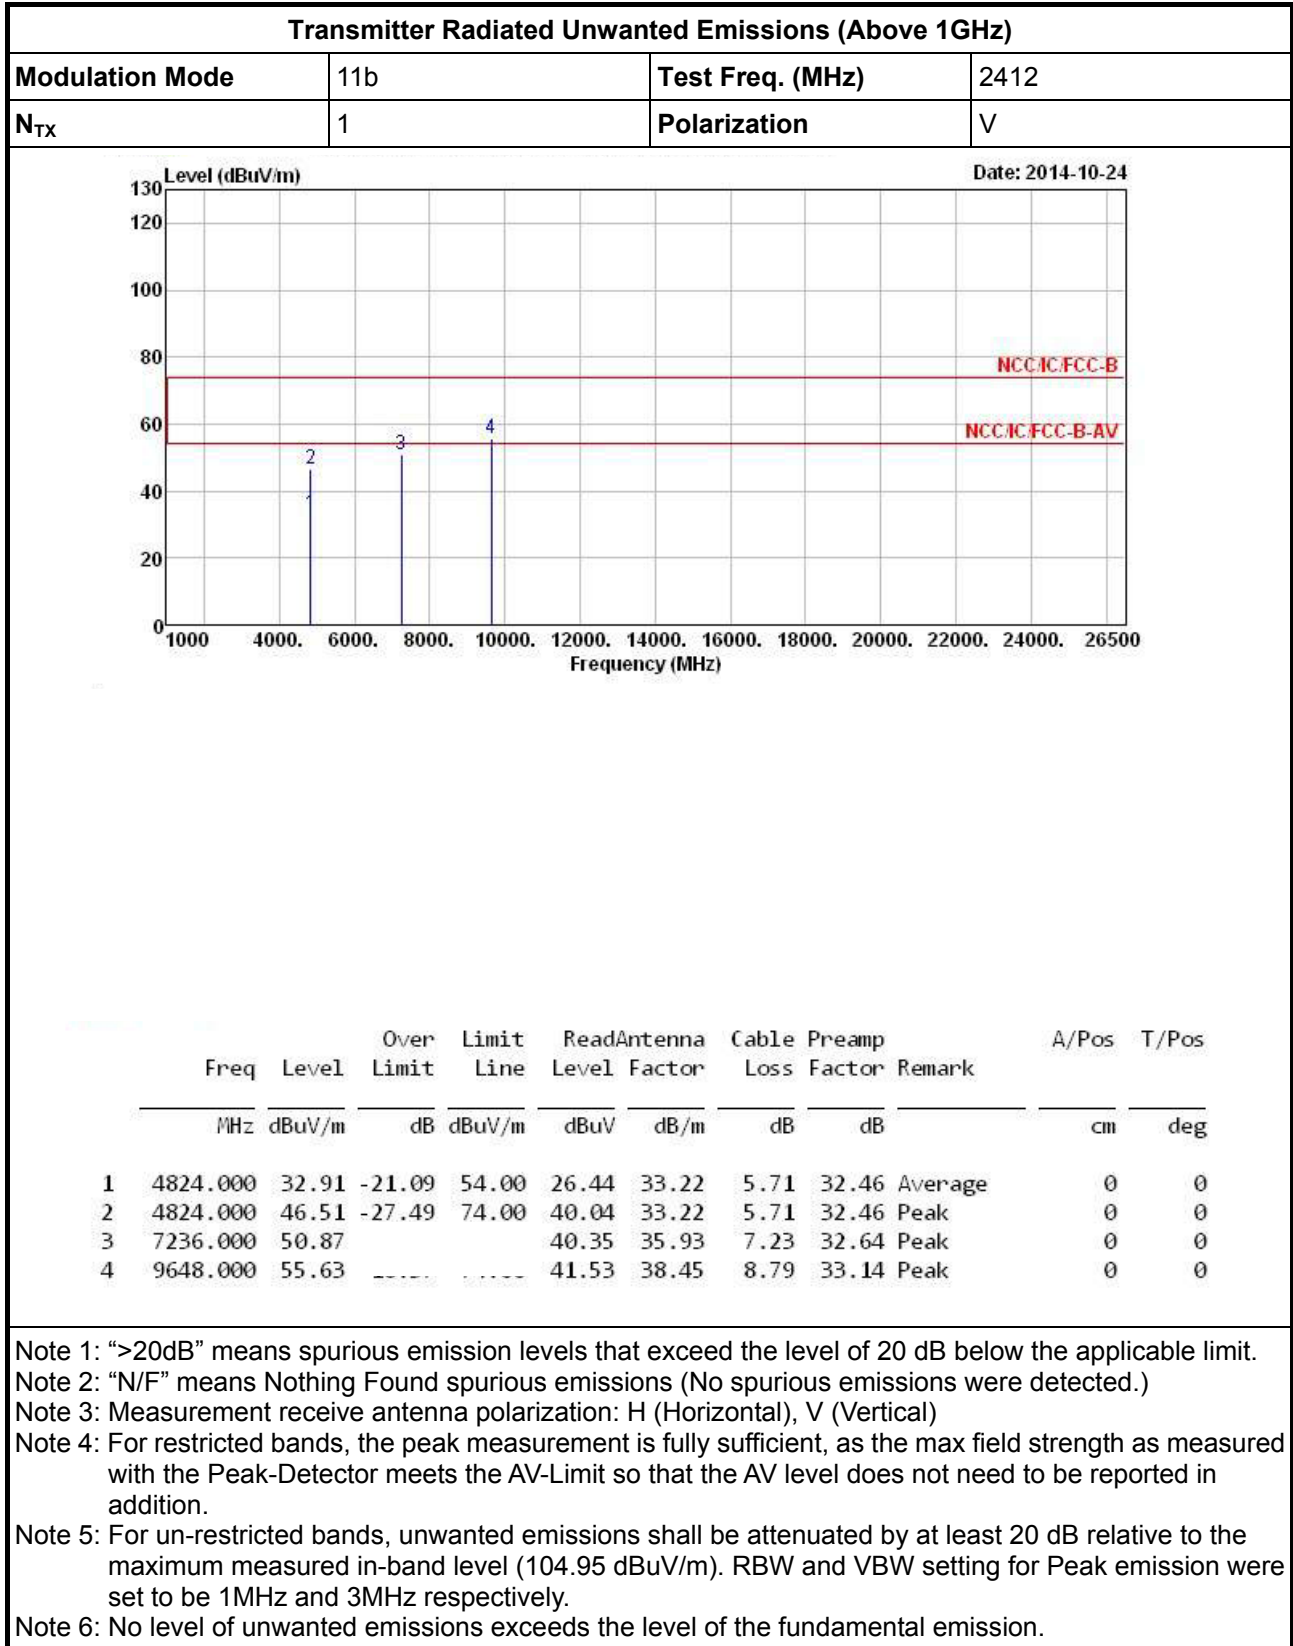



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11b	Test Freq. (MHz)	2412
N _{TX}	1	Polarization	H

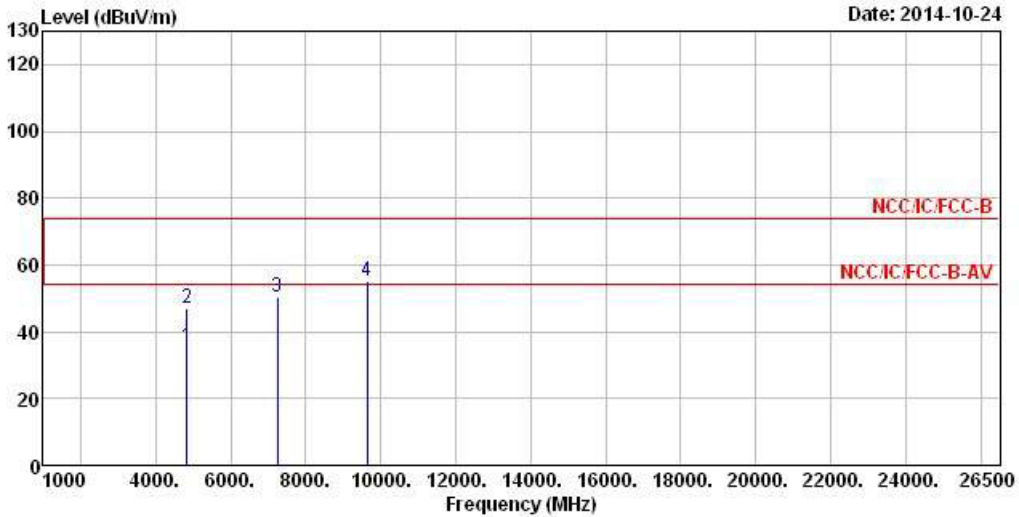


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4824.000	35.42	-18.58	54.00	28.95	33.22	5.71	32.46	Average	0	0
2	4824.000	46.96	-27.04	74.00	40.49	33.22	5.71	32.46	Peak	0	0
3	7236.000	50.56			40.04	35.93	7.23	32.64	Peak	0	0
4	9648.000	55.36			41.26	38.45	8.79	33.14	Peak	0	0

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (104.95 dBuV/m). RBW and VBW setting for Peak emission were set to be 1MHz and 3MHz respectively.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11b	Test Freq. (MHz)	2437
N_{TX}	1	Polarization	V

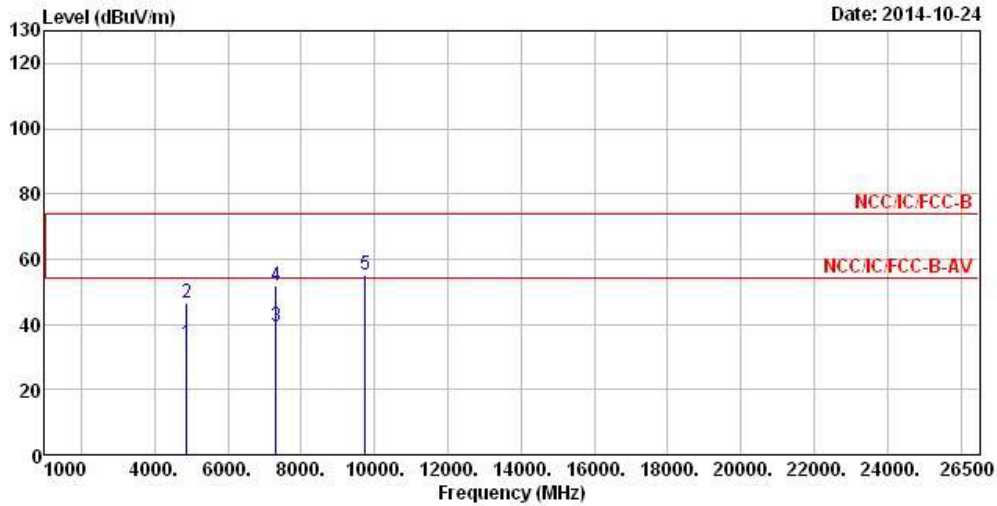

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4874.000	34.30	-19.70	54.00	27.72	33.31	5.72	32.45	Average	0	0
2	4874.000	46.71	-27.29	74.00	40.13	33.31	5.72	32.45	Peak	0	0
3	7311.000	39.43	-14.57	54.00	28.71	36.11	7.28	32.67	Average	0	0
4	7311.000	51.76	-22.24	74.00	41.04	36.11	7.28	32.67	Peak	0	0
5	9748.000	55.17			40.93	38.61	8.77	33.14	Peak	0	0

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (104.63 dBuV/m). RBW and VBW setting for Peak emission were set to be 1MHz and 3MHz respectively.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.




Transmitter Radiated Unwanted Emissions (Above 1GHz)											
Modulation Mode		11b			Test Freq. (MHz)			2437			
N _{TX}		1			Polarization			H			
<p style="text-align: right;">Date: 2014-10-24</p>											
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark	A/Pos	T/Pos	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	4874.000	33.95	-20.05	54.00	27.37	33.31	5.72	32.45 Average	0	0	
2	4874.000	47.56	-26.44	74.00	40.98	33.31	5.72	32.45 Peak	0	0	
3	7311.000	38.66	-15.34	54.00	27.94	36.11	7.28	32.67 Average	0	0	
4	7311.000	51.30	-22.70	74.00	40.58	36.11	7.28	32.67 Peak	0	0	
5	9748.000	55.26			41.02	38.61	8.77	33.14 Peak	0	0	
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical) Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition. Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (104.63 dBuV/m). RBW and VBW setting for Peak emission were set to be 1MHz and 3MHz respectively. Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.</p>											



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11b	Test Freq. (MHz)	2462
N _{TX}	1	Polarization	V

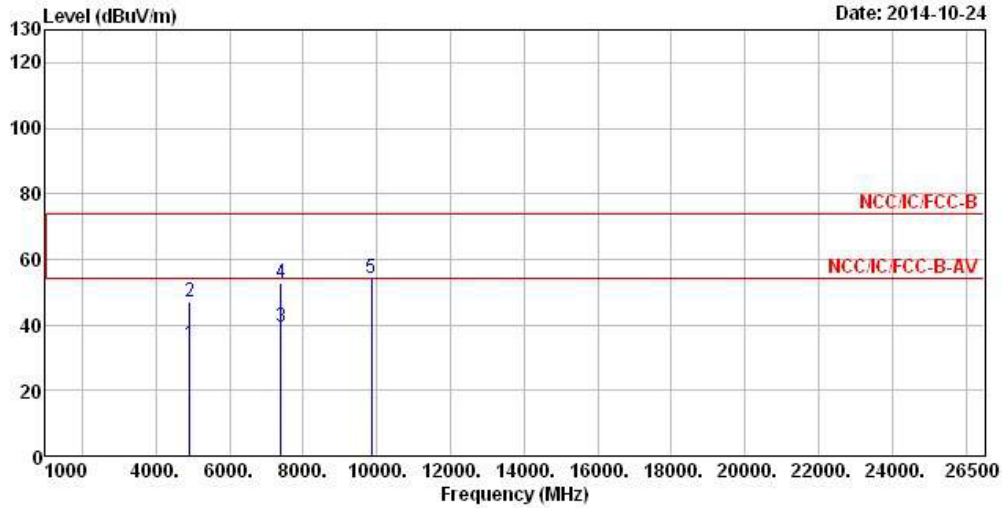

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4924.000	34.24	-19.76	54.00	27.55	33.39	5.74	32.44	Average	0	0
2	4924.000	47.09	-26.91	74.00	40.40	33.39	5.74	32.44	Peak	0	0
3	7386.000	39.38	-14.62	54.00	28.41	36.33	7.34	32.70	Average	0	0
4	7386.000	52.61	-21.39	74.00	41.64	36.33	7.34	32.70	Peak	0	0
5	9848.000	54.35			39.99	38.75	8.74	33.13	Peak	0	0

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (103.13 dBuV/m). RBW and VBW setting for Peak emission were set to be 1MHz and 3MHz respectively.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.




Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																																																												
Modulation Mode	11b			Test Freq. (MHz)	2462																																																																																							
N _{TX}	1			Polarization	H																																																																																							
<div style="display: flex; justify-content: space-between;"> Level (dBuV/m) Date: 2014-10-24 </div>																																																																																												
<table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>ReadAntenna Level</th> <th>Cable Factor</th> <th>Preamp Loss</th> <th>Remark</th> <th>A/Pos</th> <th>T/Pos</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.000</td> <td>33.98</td> <td>-20.02</td> <td>54.00</td> <td>27.29</td> <td>33.39</td> <td>5.74</td> <td>32.44</td> <td>Average</td> <td>0</td> <td>0</td> </tr> <tr> <td>2</td> <td>4924.000</td> <td>47.06</td> <td>-26.94</td> <td>74.00</td> <td>40.37</td> <td>33.39</td> <td>5.74</td> <td>32.44</td> <td>Peak</td> <td>0</td> <td>0</td> </tr> <tr style="border: 2px solid black;"> <td>3</td> <td>7386.000</td> <td>39.81</td> <td>-14.19</td> <td>54.00</td> <td>28.84</td> <td>36.33</td> <td>7.34</td> <td>32.70</td> <td>Average</td> <td>0</td> <td>0</td> </tr> <tr> <td>4</td> <td>7386.000</td> <td>53.35</td> <td>-20.65</td> <td>74.00</td> <td>42.38</td> <td>36.33</td> <td>7.34</td> <td>32.70</td> <td>Peak</td> <td>0</td> <td>0</td> </tr> <tr> <td>5</td> <td>9848.000</td> <td>54.33</td> <td></td> <td></td> <td>39.97</td> <td>38.75</td> <td>8.74</td> <td>33.13</td> <td>Peak</td> <td>0</td> <td>0</td> </tr> </tbody> </table>												Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark	A/Pos	T/Pos		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	4924.000	33.98	-20.02	54.00	27.29	33.39	5.74	32.44	Average	0	0	2	4924.000	47.06	-26.94	74.00	40.37	33.39	5.74	32.44	Peak	0	0	3	7386.000	39.81	-14.19	54.00	28.84	36.33	7.34	32.70	Average	0	0	4	7386.000	53.35	-20.65	74.00	42.38	36.33	7.34	32.70	Peak	0	0	5	9848.000	54.33			39.97	38.75	8.74	33.13	Peak	0	0
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark	A/Pos	T/Pos																																																																																		
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	4924.000	33.98	-20.02	54.00	27.29	33.39	5.74	32.44	Average	0	0																																																																																	
2	4924.000	47.06	-26.94	74.00	40.37	33.39	5.74	32.44	Peak	0	0																																																																																	
3	7386.000	39.81	-14.19	54.00	28.84	36.33	7.34	32.70	Average	0	0																																																																																	
4	7386.000	53.35	-20.65	74.00	42.38	36.33	7.34	32.70	Peak	0	0																																																																																	
5	9848.000	54.33			39.97	38.75	8.74	33.13	Peak	0	0																																																																																	
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical) Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition. Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (103.13 dBuV/m). RBW and VBW setting for Peak emission were set to be 1MHz and 3MHz respectively. Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.</p>																																																																																												



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11g	Test Freq. (MHz)	2412
N _{TX}	1	Polarization	V

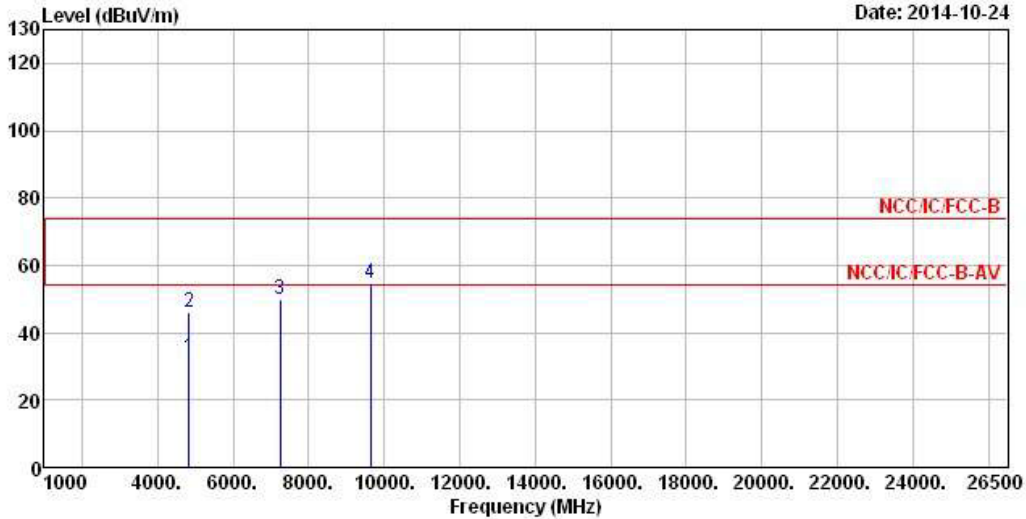


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4824.000	32.62	-21.38	54.00	26.15	33.22	5.71	32.46	Average	0	0
2	4824.000	46.18	-27.82	74.00	39.71	33.22	5.71	32.46	Peak	0	0
3	7236.000	49.94			39.42	35.93	7.23	32.64	Peak	0	0
4	9648.000	54.81			40.71	38.45	8.79	33.14	Peak	0	0

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (103.18 dBuV/m). RBW and VBW setting for Peak emission were set to be 1MHz and 3MHz respectively.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11g	Test Freq. (MHz)	2412
N _{TX}	1	Polarization	H

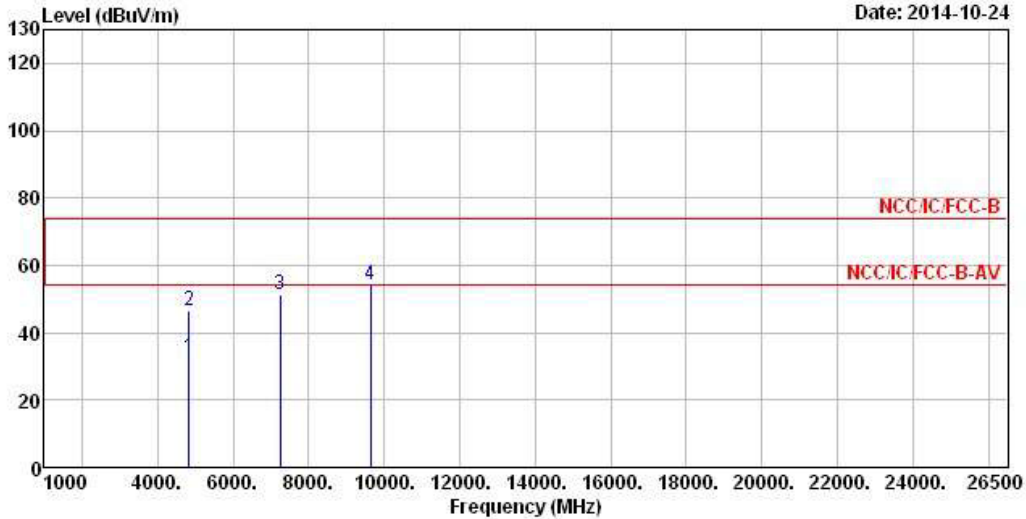


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4824.000	32.66	-21.34	54.00	26.19	33.22	5.71	32.46	Average	0	0
2	4824.000	46.65	-27.35	74.00	40.18	33.22	5.71	32.46	Peak	0	0
3	7236.000	51.21			40.69	35.93	7.23	32.64	Peak	0	0
4	9648.000	54.40			40.30	38.45	8.79	33.14	Peak	0	0

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (103.18 dBuV/m). RBW and VBW setting for Peak emission were set to be 1MHz and 3MHz respectively.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11g	Test Freq. (MHz)	2437
N _{TX}	1	Polarization	V

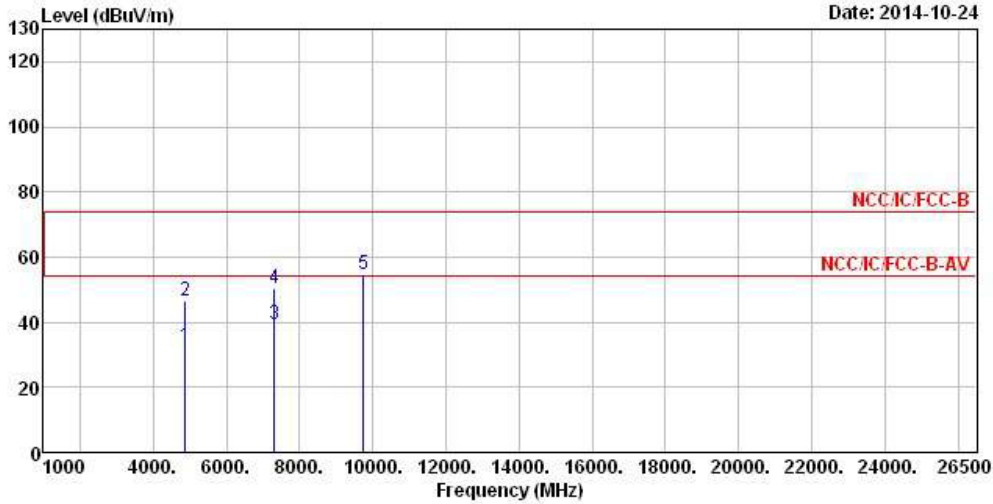

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4874.000	32.84	-21.16	54.00	26.26	33.31	5.72	32.45	Average	0	0
2	4874.000	46.68	-27.32	74.00	40.10	33.31	5.72	32.45	Peak	0	0
3	7311.000	39.14	-14.86	54.00	28.42	36.11	7.28	32.67	Average	0	0
4	7311.000	50.35	-23.65	74.00	39.63	36.11	7.28	32.67	Peak	0	0
5	9748.000	54.68			40.44	38.61	8.77	33.14	Peak	0	0

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (103.09 dBuV/m). RBW and VBW setting for Peak emission were set to be 1MHz and 3MHz respectively.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)											
Modulation Mode		11g			Test Freq. (MHz)			2437			
N _{TX}		1			Polarization			H			
<p style="text-align: right;">Date: 2014-10-24</p>											
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark	A/Pos	T/Pos	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	4874.000	32.75	-21.25	54.00	26.17	33.31	5.72	32.45 Average	0	0	
2	4874.000	46.52	-27.48	74.00	39.94	33.31	5.72	32.45 Peak	0	0	
3	7311.000	39.06	-14.94	54.00	28.34	36.11	7.28	32.67 Average	0	0	
4	7311.000	50.14	-23.86	74.00	39.42	36.11	7.28	32.67 Peak	0	0	
5	9748.000	55.07			40.83	38.61	8.77	33.14 Peak	0	0	
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical) Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition. Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (103.09 dBuV/m). RBW and VBW setting for Peak emission were set to be 1MHz and 3MHz respectively. Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.</p>											




Transmitter Radiated Unwanted Emissions (Above 1GHz)											
Modulation Mode	11g		Test Freq. (MHz)	2462							
N _{TX}	1		Polarization	V							
<div style="display: flex; justify-content: space-between;"> <div> <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> </div> <div> <p>Date: 2014-10-24</p> </div> </div>											
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4924.000	32.93	-21.07	54.00	26.24	33.39	5.74	32.44	Average	0	0
2	4924.000	48.06	-25.94	74.00	41.37	33.39	5.74	32.44	Peak	0	0
3	7386.000	37.14	-16.86	54.00	26.17	36.33	7.34	32.70	Average	0	0
4	7386.000	51.98	-22.02	74.00	41.01	36.33	7.34	32.70	Peak	0	0
5	9848.000	53.96			39.60	38.75	8.74	33.13	Peak	0	0
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical) Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition. Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (102.33 dBuV/m). RBW and VBW setting for Peak emission were set to be 1MHz and 3MHz respectively. Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.</p>											



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11g	Test Freq. (MHz)	2462
N _{TX}	1	Polarization	H

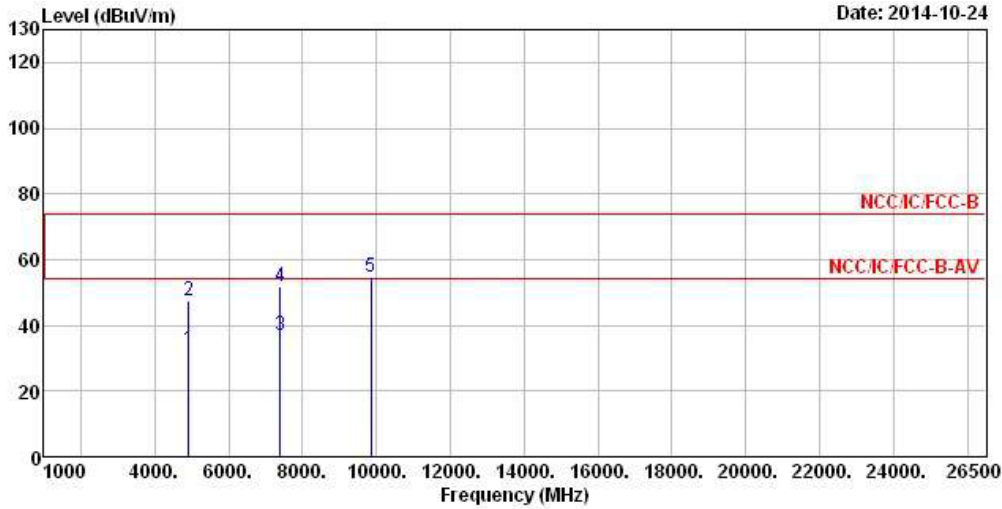


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4924.000	32.86	-21.14	54.00	26.17	33.39	5.74	32.44	Average	0	0
2	4924.000	47.40	-26.60	74.00	40.71	33.39	5.74	32.44	Peak	0	0
3	7386.000	37.13	-16.87	54.00	26.16	36.33	7.34	32.70	Average	0	0
4	7386.000	52.04	-21.96	74.00	41.07	36.33	7.34	32.70	Peak	0	0
5	9848.000	54.56			40.20	38.75	8.74	33.13	Peak	0	0

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (102.33 dBuV/m). RBW and VBW setting for Peak emission were set to be 1MHz and 3MHz respectively.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	2412
N _{TX}	1	Polarization	V

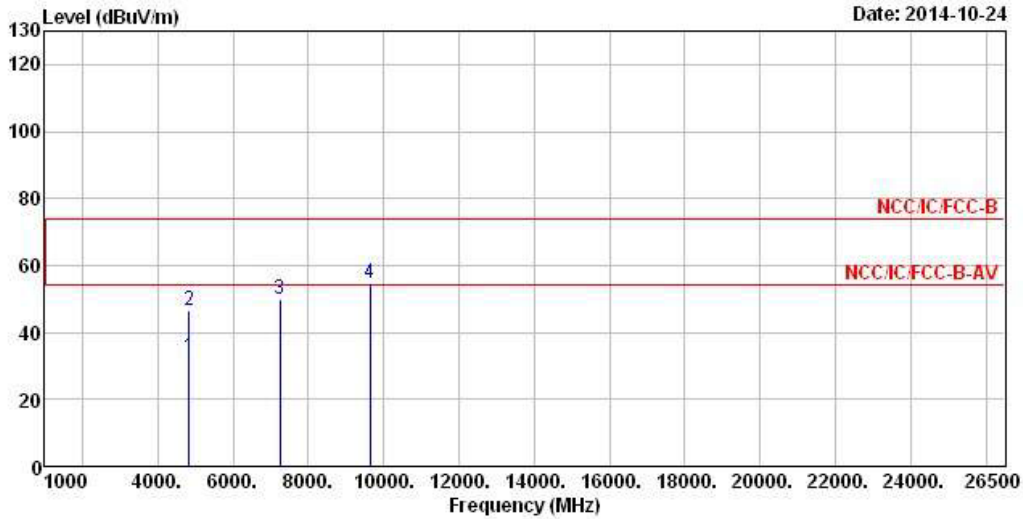


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4824.000	32.57	-21.43	54.00	26.10	33.22	5.71	32.46	Average	0	0
2	4824.000	46.37	-27.63	74.00	39.90	33.22	5.71	32.46	Peak	0	0
3	7236.000	49.72			39.20	35.93	7.23	32.64	Peak	0	0
4	9648.000	54.63			40.53	38.45	8.79	33.14	Peak	0	0

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (102.24 dBuV/m). RBW and VBW setting for Peak emission were set to be 1MHz and 3MHz respectively.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	2412
N _{TX}	1	Polarization	H

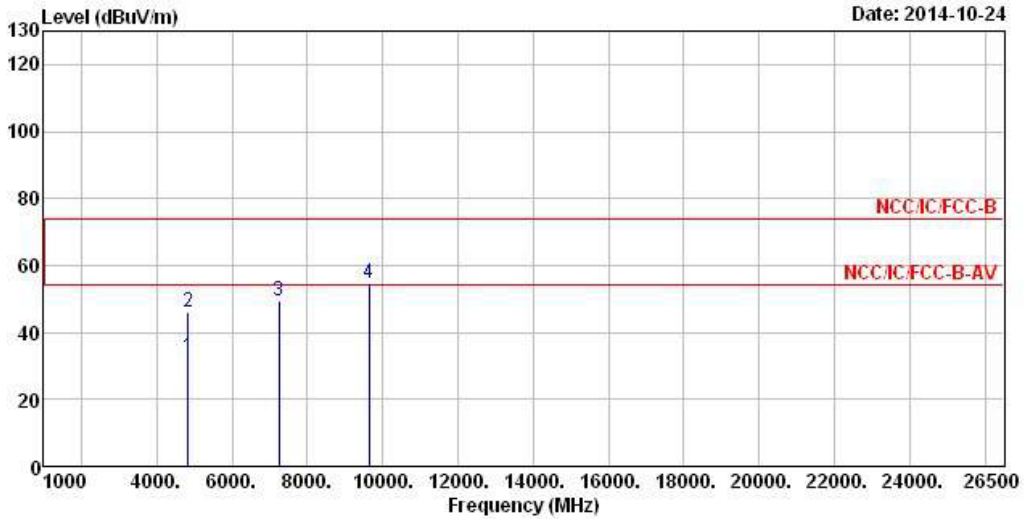



	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4824.000	32.67	-21.33	54.00	26.20	33.22	5.71	32.46	Average	0	0
2	4824.000	45.98	-28.02	74.00	39.51	33.22	5.71	32.46	Peak	0	0
3	7236.000	49.42			38.90	35.93	7.23	32.64	Peak	0	0
4	9648.000	54.71			40.61	38.45	8.79	33.14	Peak	0	0

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (102.24 dBuV/m). RBW and VBW setting for Peak emission were set to be 1MHz and 3MHz respectively.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)											
Modulation Mode	HT20		Test Freq. (MHz)	2437							
N _{TX}	1		Polarization	V							
										Date: 2014-10-24	
Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4874.000	32.57	-21.43	54.00	25.99	33.31	5.72	32.45	Average	0	0
2	4874.000	47.18	-26.82	74.00	40.60	33.31	5.72	32.45	Peak	0	0
3	7311.000	36.10	-17.90	54.00	25.38	36.11	7.28	32.67	Average	0	0
4	7311.000	50.34	-23.66	74.00	39.62	36.11	7.28	32.67	Peak	0	0
5	9748.000	54.60			40.36	38.61	8.77	33.14	Peak	0	0
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical) Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition. Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (102.58 dBuV/m). RBW and VBW setting for Peak emission were set to be 1MHz and 3MHz respectively. Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.</p>											

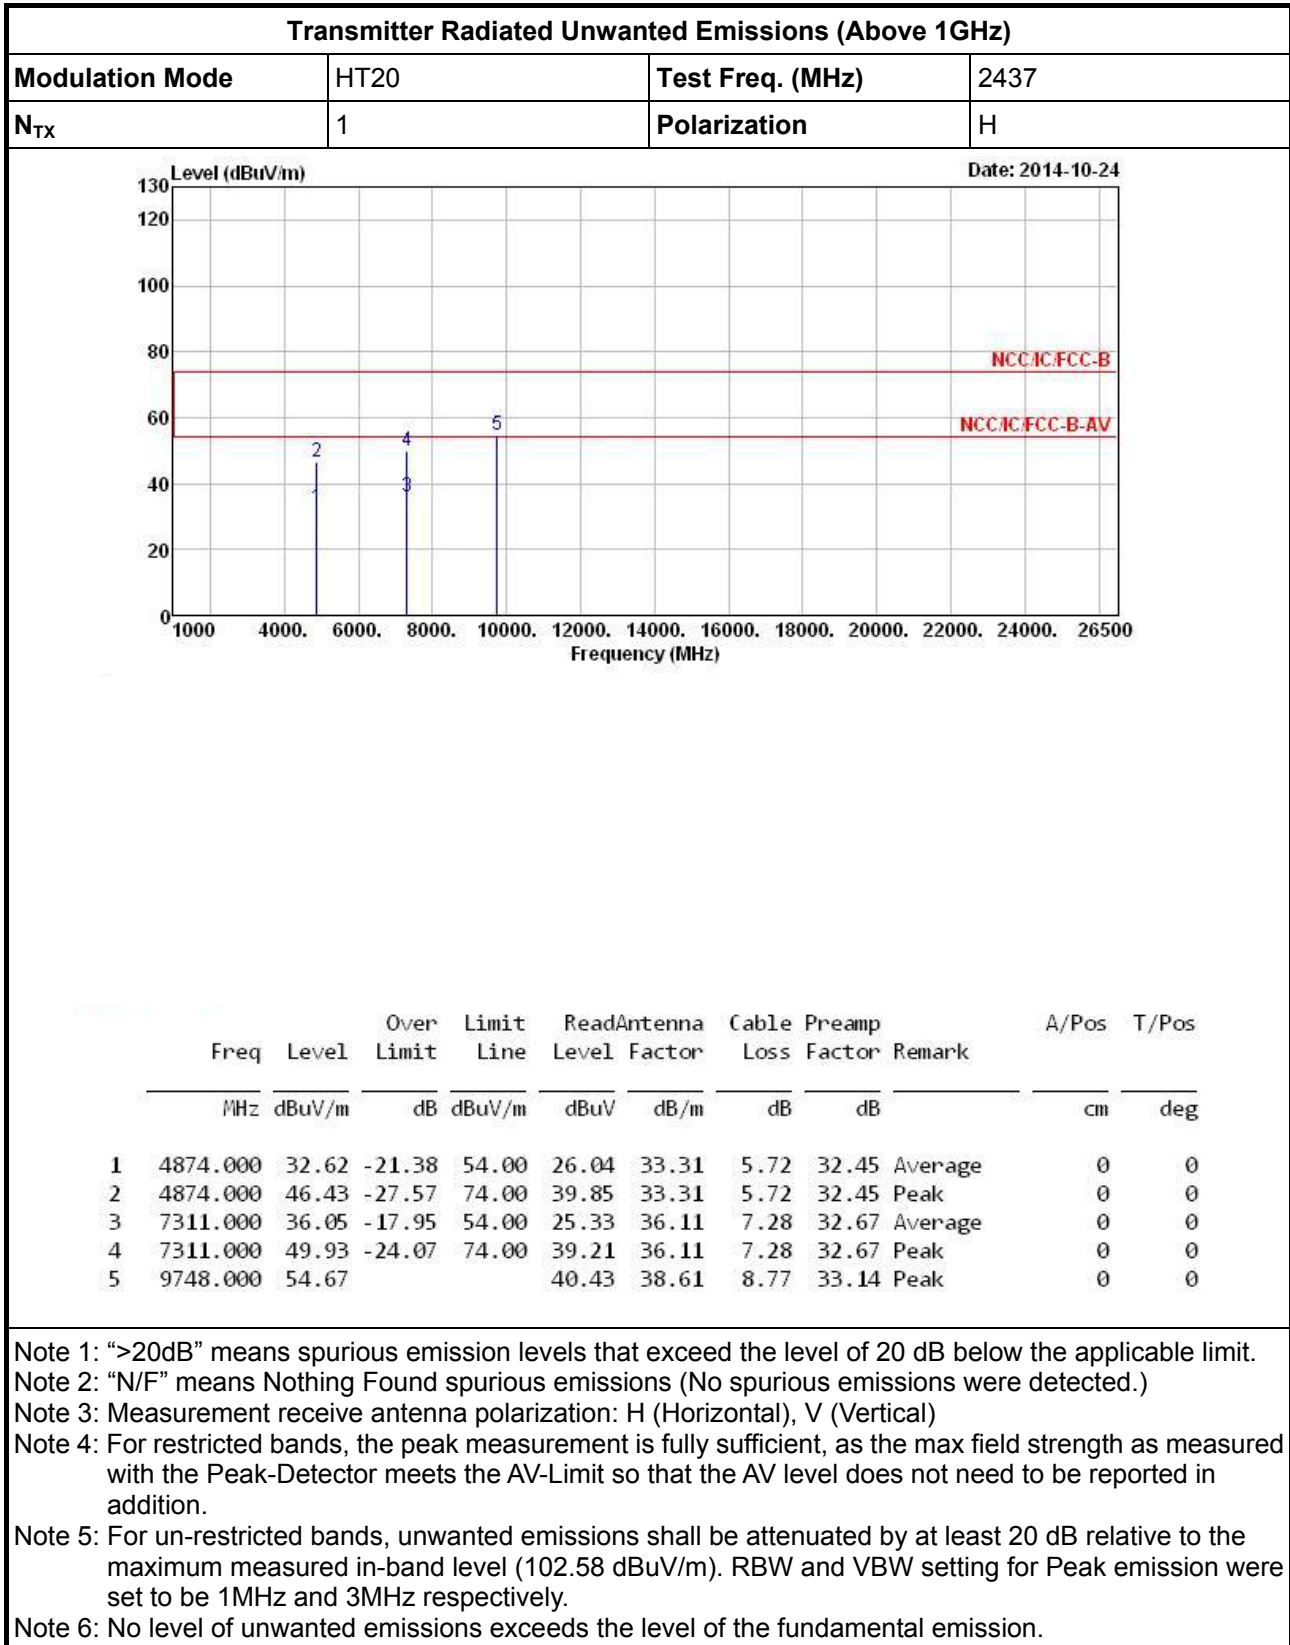


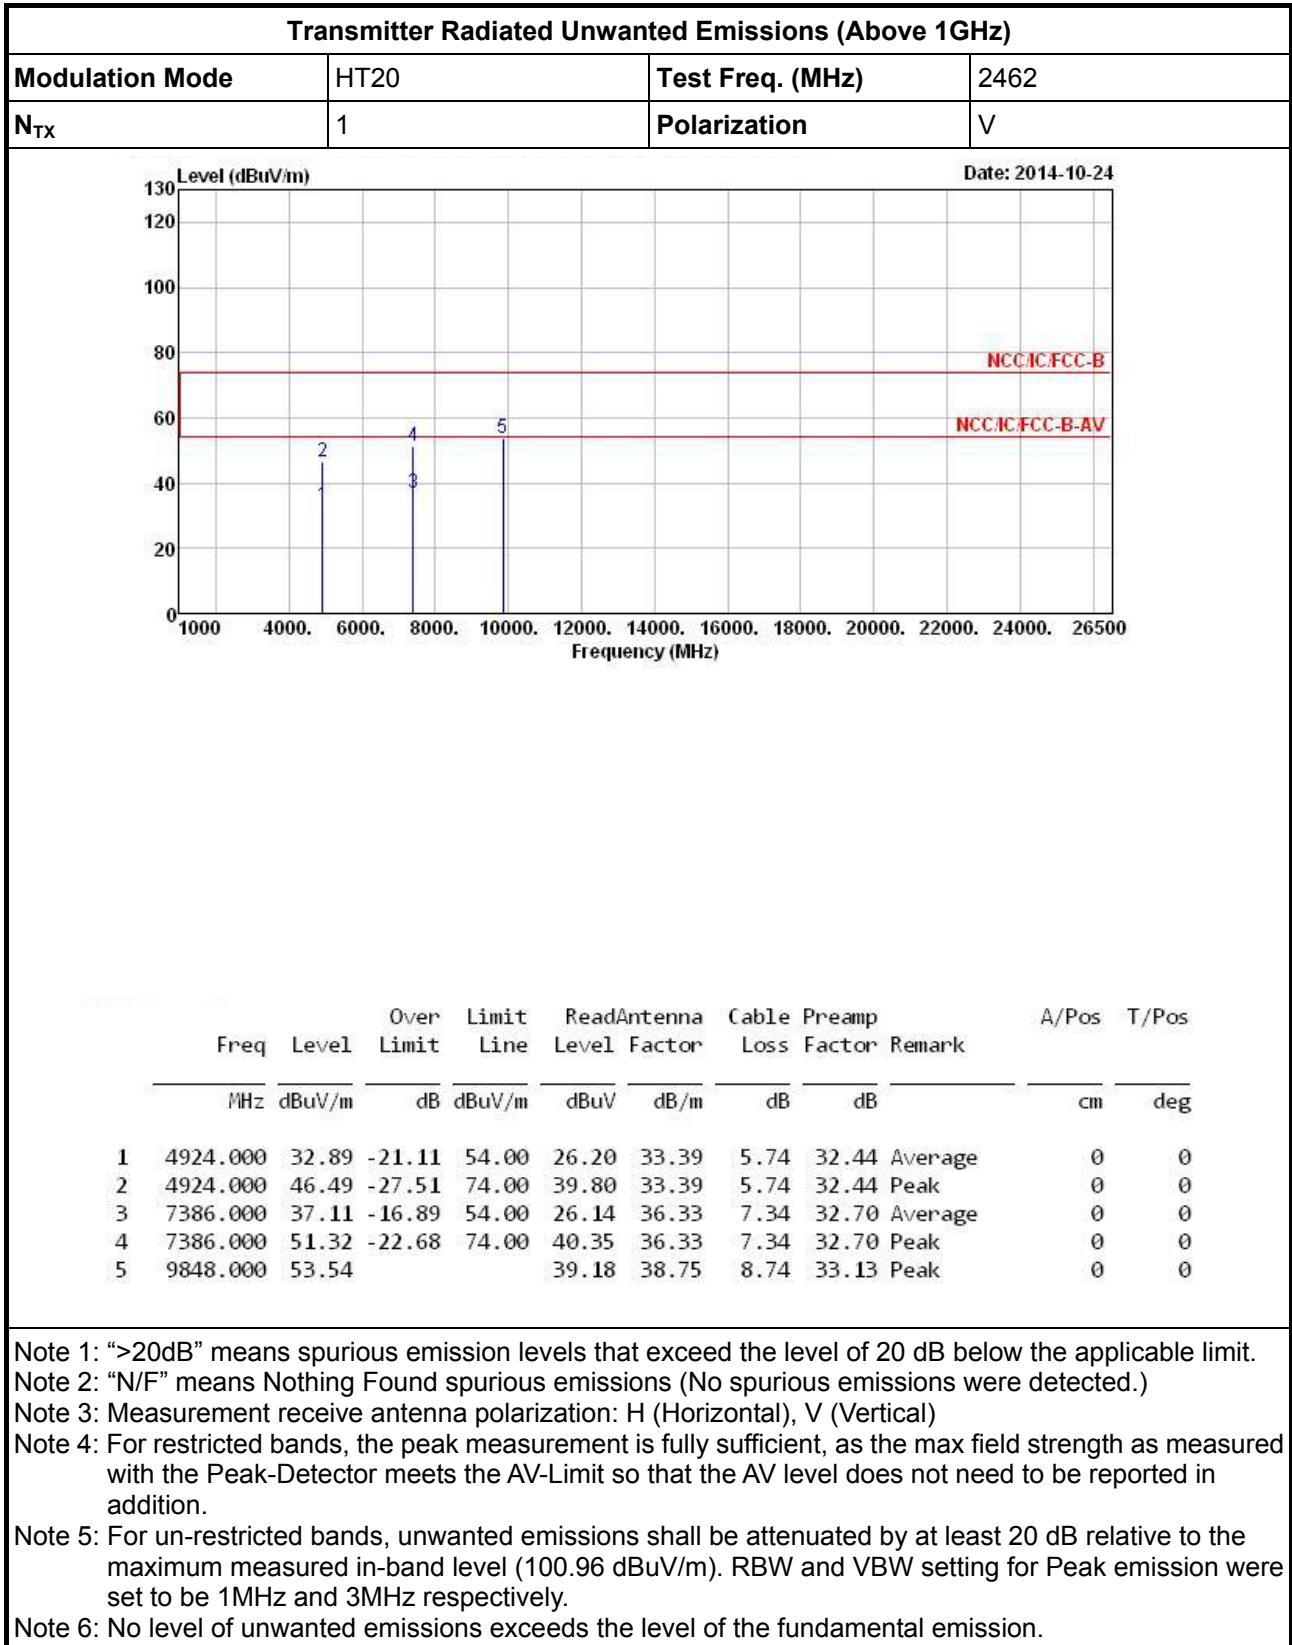



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	2462
N _{TX}	1	Polarization	H

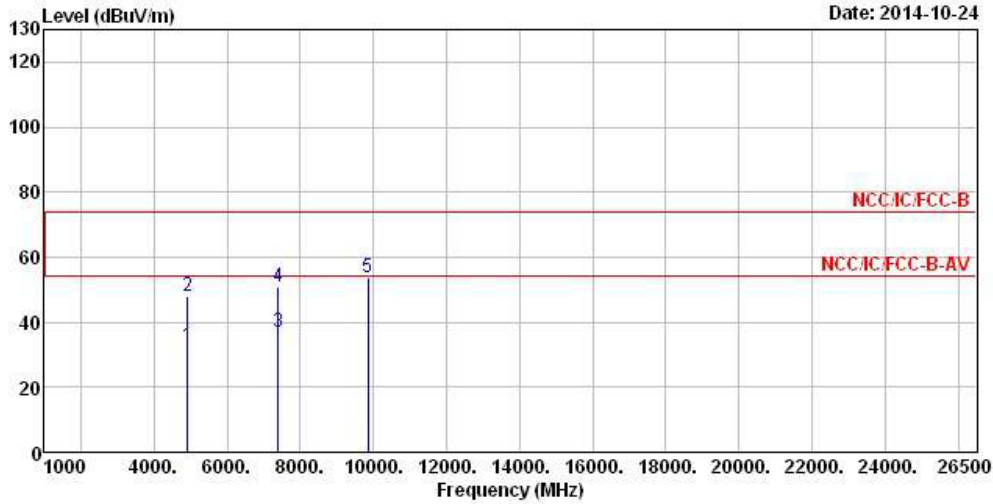

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4924.000	32.79	-21.21	54.00	26.10	33.39	5.74	32.44	Average	0	0
2	4924.000	47.77	-26.23	74.00	41.08	33.39	5.74	32.44	Peak	0	0
3	7386.000	37.03	-16.97	54.00	26.06	36.33	7.34	32.70	Average	0	0
4	7386.000	51.05	-22.95	74.00	40.08	36.33	7.34	32.70	Peak	0	0
5	9848.000	53.63			39.27	38.75	8.74	33.13	Peak	0	0

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (100.96 dBuV/m). RBW and VBW setting for Peak emission were set to be 1MHz and 3MHz respectively.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Apr. 14, 2014	AC Conduction
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 22, 2014	AC Conduction
RF Cable-CON	HUBER+SUHNER	RG213/U	07611832020001	9kHz ~ 30MHz	Oct. 31, 2014	AC Conduction
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	AC Conduction

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101013	9KHz~40GHz	Jan. 25, 2014	RF Conducted
AC Power Source	G.W	APS-9102	EL920581	AC 0V ~ 300V	Jul. 15, 2014	RF Conducted
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jul. 31, 2014	RF Conducted
Power Sensor	Anritsu	MA2411B	0917017	300MHz ~ 40GHz	Jan. 28, 2014	RF Conducted
Power Meter	Anritsu	ML2495A	0949003	300MHz ~ 40GHz	Jan. 28, 2014	RF Conducted
RF Cable-2m	HUBER+SUHNER	SUCOFLEX_104	SN 345675/4	30MHz ~ 26.5GHz	Dec. 02, 2013	RF Conducted

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	Nov. 30, 2013 Nov. 29, 2014 (Update)	Radiation
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	May 05, 2014	Radiation
Amplifier	Agilent	8449B	3008A02120	1GHz ~ 26.5GHz	Sep. 01, 2014	Radiation
Spectrum	R&S	FSP40	100004	9kHz ~ 40GHz	Mar. 27, 2014	Radiation
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30MHz ~ 1GHz	Sep. 20, 2014	Radiation
Horn Antenna	ETS · LINDGREN	3115	6741	1GHz ~ 18GHz	Jun. 11, 2014	Radiation
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz ~ 40GHz	Jan. 10, 2014	Radiation
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 16, 2013	Radiation
RF Cable-high	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz ~ 40GHz	Dec. 11, 2013	Radiation
Turn Table	EM Electronics	EM Electronics	060615	0 ~ 360 degree	N/A	Radiation
Antenna Mast	MF	MF-7802	MF780208179	1 ~ 4 m	N/A	Radiation

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	TESEQ	HLA 6120	31244	9kHz ~ 30MHz	Dec. 02, 2012	Radiation

Note: Calibration Interval of instruments listed above is two year.