

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com



Test Report

Product Name: MINI PCI

FCC ID: JFE-D2D00005

Applicant:

**PARKERVISION INC.
8493 BAYMEADOWS WAY
JACKSONVILLE FL 32256**

Date Receipt: NOVEMBER 16, 2004

Date Tested: DECEMBER 15, 2004

APPLICANT: PARKERVISION INC.

FCC ID: JFE-D2D00005

REPORT #: P\PARKERJFE\1889AUT4\1889AUT4TestReport.doc

COVER SHEET

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

TABLE OF CONTENTS

TEST REPORT CONTAINING:

PAGE 1.....	LETTER OF INTRODUCTION
PAGE 2-7.....	LIST OF TEST EQUIPMENT
PAGE 8.....	TEST PROCEDURES
PAGE 9.....	POWERLINE CONDUCTED INTERFERENCE
PAGE 10.....	POWERLINE CONDUCTED PLOTS
PAGE 11.....	6 dB BANDWIDTH AND POWER OUTPUT
PAGE 12.....	6 dB BANDWIDTH PLOT
PAGE 13.....	SPURIOUS EMISSIONS AT ANTENNA TERMINALS DATA
PAGE 14.....	METHOD OF MEASURING RF CONDUCTED
PAGE 15.....	RADIATION INTERFERENCE TEST DATA
PAGE 16.....	METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS
PAGE 17-19.....	RADIATED SPURIOUS EMISSIONS INTO ADJACENT RESTRICTED BANDS
PAGE 20.....	POWER SPECTRAL DENSITY
PAGE 21.....	RF EXPOSURE (MPE CALC.)

EXHIBITS INCLUDED:

REQUEST FOR CONFIDENTIALITY LETTER
BLOCK DIAGRAM
SCHEMATICS
USERS MANUAL
LABEL SAMPLE
LABEL LOCATION
EXTERNAL PHOTOGRAPHS
INTERNAL PHOTOGRAPHS
OPERATIONAL DESCRIPTION
TEST SET UP PHOTOGRAPHS

APPLICANT: PARKERVISION INC.

FCC ID: JFE-D2D00005

REPORT #: P\PARKERJFE\1889AUT4\1889AUT4TestReport.doc

TABLE OF CONTENTS

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

DECEMBER 15, 2004

Federal Communications Commission
Authorization and Evaluation Division
7435 Oakland Mills Road
Columbia, MD 21046

SUBJECT: PARKERVISION INC.


FCC ID: JFE-D2D00005

To Whom It May Concern:

The attached application is for limited modular approval of a direct sequence spread spectrum assembly, a mini pci card for installation into OEM laptop computers. The assembly consists of a mini PCI printed circuit board that directly interfaces into modern laptops that have integral antennas, consisting of 2 dipole antennas mounted in the display portion of the laptop. The RF connector is a "Hirose" model UFL connector that has been standardized by the laptop industry and is considered unique. The assembly was tested with a dipole (2 dBi antenna).

Should you have any questions or require any further information with regards to this, please feel free to contact me.

Sincerely,

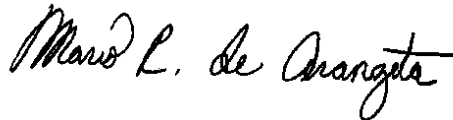

Mario R. de Aranzeta C.E.T.

MRD/sh
Encl.

APPLICANT: PARKERVISION INC.
FCC ID: JFE-D2D00005
REPORT #: P\PARKERJFE\1889AUT4\1889AUT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
 Newberry, Florida 32669
<http://www.timcoengr.com>
 888.472.2424 F 352.472.2030 email: sid@timcoengr.com

EMC Equipment List

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date or Status
3-Meter OATS	TEI	N/A	N/A	Listed 1/13/03	1/12/06
3/10-Meter OATS	TEI	N/A	N/A	Listed 3/27/04	3/26/07
Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 9/23/03	9/23/05
Tan Tower RF Preselector	HP	85685A	3221A01400	CAL 9/23/03	9/23/05
Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 9/23/03	9/23/05
Tan Tower Preamplifier	HP	8449B-H02	3008A00372	CAL 9/23/03	9/23/05
Blue Tower Spectrum Analyzer	HP	8568B	2928A04729 2848A18049	CAL 4/15/03	4/15/05
Blue Tower RF Preselector	HP	85685A	2620A00294	CAL 4/27/04	4/27/06
Blue Tower Quasi-Peak Adapter	HP	85650A	2811A01279	CAL 4/15/03	4/15/05
Silver Tower Spectrum Analyzer	HP	8566B Opt 462	3552A22064 3638A08608	CAL 3/22/04	3/22/06
Silver Tower RF Preselector	HP	85685A	2926A00983	CAL 3/22/04	3/22/06
Silver Tower Quasi-Peak Adapter	HP	85650A	3303A01844	CAL 3/22/04	3/22/06
Silver Tower Preamplifier	HP	8449B	3008A01075	CAL 3/22/04	3/22/06
Biconnical Antenna	Electro-Metrics	BIA-25	1171	CAL 4/26/01	4/26/03
Biconnical Antenna	Eaton	94455-1	1096	CAL 8/17/04	8/17/06
Biconnical Antenna	Eaton	94455-1	1057	CAL 3/18/03	3/18/05
BiconiLog Antenna	EMCO	3143	9409-1043	No Cal Required	
Log-Periodic Antenna	Electro-Metrics	LPA-25	1122	CAL 8/26/04	8/26/06
Log-Periodic Antenna	Electro-Metrics	LPA-30	409	CAL 3/4/03	3/4/05
Log-Periodic Antenna	Eaton	96005	1243	CAL 5/8/03	5/8/05

APPLICANT: PARKERVISION INC.

FCC ID: JFE-D2D00005

REPORT #: P\PARKERJFE\1889AUT4\1889AUT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
 Newberry, Florida 32669
<http://www.timcoengr.com>
 888.472.2424 F 352.472.2030 email: sid@timcoengr.com

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date or Status
Dipole Antenna Kit	Electro-Metrics	TDA-30/1-4	152	CAL 3/21/01	3/21/04
Dipole Antenna Kit	Electro-Metrics	TDA-30/1-4	153	CAL 9/26/02	9/26/05
Double-Ridged Horn Antenna	Electro-Metrics	RGA-180	2319	CAL 2/17/03	2/17/05
Horn Antenna *(at 3 meters)	Electro-Metrics	EM-6961	6246	CAL 3/31/03	3/31/05
Horn Antenna *(at 10 meters)	Electro-Metrics	EM-6961	6246	CAL 6/4/03	6/4/05
Passive Loop Antenna	EMC Test Systems	EMCO 6512	9706-1211	CHAR 7/10/01	7/10/03
Harmonic Mixer with Horn Antenna	Oleson Microwave Labs	M08HW/A	F30425-1	CHAR 4/25/03	4/25/05
Harmonic Mixer with Horn Antenna	Oleson Microwave Labs	M12HW/A	E30425-1	CHAR 4/25/03	4/25/05
LISN	Electro-Metrics	ANS-25/2	2604	CAL 8/27/04	8/27/06
LISN	Electro-Metrics	EM-7820	2682	CAL 3/12/03	3/12/05
Termaline Wattmeter	Bird Electronic Corporation	611	16405	CAL 7/16/04	7/16/06
Termaline Wattmeter	Bird Electronic Corporation	6104	1926	CAL 7/16/04	7/16/06
Oscilloscope	Tektronix	2230	300572	CAL 7/3/03	7/3/05
System One	Audio Precision	System One	SYS1-45868	CHAR 4/25/02	4/25/04
Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 1/22/02	1/22/04
AC Voltmeter	HP	400FL	2213A14499	CAL 7/19/04	7/19/06
AC Voltmeter	HP	400FL	2213A14261	CHAR 10/15/01	10/15/03
AC Voltmeter	HP	400FL	2213A14728	CHAR 10/15/01	10/15/03
Digital Multimeter	Fluke	77	35053830	CHAR 1/8/02	1/8/04
Digital Multimeter	Fluke	77	43850817	CHAR 1/8/02	1/8/04
Digital Multimeter	HP	E2377A	2927J05849	CHAR	1/8/04

APPLICANT: PARKERVISION INC.

FCC ID: JFE-D2D00005

REPORT #: P\PARKERJFE\1889AUT4\1889AUT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
 Newberry, Florida 32669
<http://www.timcoengr.com>
 888.472.2424 F 352.472.2030 email: sid@timcoengr.com

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date or Status
				1/8/02	
Multimeter	Fluke	FLUKE-77-3	79510405	CHAR 9/26/01	9/26/03
Peak Power Meter	HP	8900C	2131A00545	CAL 7/2/03	7/2/05
Power Sensor	Agilent Technologies	84811A	2551A02705	CAL 7/2/03	7/2/05
Power Meter	HP	432A	1141A07655	CAL 4/15/03	4/15/05
Power Sensor	HP	478A	72129	CAL 4/15/03	4/15/05
Power Meter And Sensor	Bird	4421-107 & 4022	0166 & 0218	CAL 4/16/03	4/16/05
Digital Thermometer	Fluke	2166A	42032	CAL 7/19/04	7/19/06
Thermometer	Traulsen	SK-128		CHAR 1/22/02	1/22/04
Thermometer	Extech	4028	14871-2	CAL 3/7/03	3/7/05
Hygro-Thermometer	Extech	445703	0602	CAL 10/4/02	10/4/04
Frequency Counter	HP	5352B	2632A00165	CAL 8/3/04	8/3/06
Frequency Counter	HP	5385A	2730A03025	CAL 3/7/03	3/7/05
Comm. Serv. Monitor	IFR	FM/AM 1200S	6593	CAL 5/12/02	5/12/04
Signal Generator	HP	8640B	2308A21464	CAL 8/26/04	8/26/06
Sweep Generator	Wiltron	6648	101009	CAL 4/15/03	4/15/05
Sweep Generator	Wiltron	6669M	007005	CAL 3/3/03	3/3/05
Modulation Analyzer	HP	8901A	3435A06868	CAL 9/5/01	9/5/03
Modulation Meter	Boonton	8220	10901AB	CAL 4/15/03	4/15/05
BandReject Filter	Lorch Microwave	5BR4-2400/60-N	Z1	CHAR 4/17/03	4/17/05
BandReject Filter	Lorch Microwave	6BR6-2442/300-N	Z1	CHAR 4/17/03	4/17/05

APPLICANT: PARKERVISION INC.

FCC ID: JFE-D2D00005

REPORT #: P\PARKERJFE\1889AUT4\1889AUT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
 Newberry, Florida 32669
<http://www.timcoengr.com>
 888.472.2424 F 352.472.2030 email: sid@timcoengr.com

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date or Status
BandReject Filter	Lorch Microwave	5BR4-10525/900-S	Z1	CHAR 4/12/03	4/12/05
Notch Filter	Lorch Microwave	5BRX-850/X100-N	AD-1	CHAR 4/17/03	4/17/05
High Pass Filter	Unk	3768(5)-400	041	CHAR 12/17/02	12/17/04
High Pass Filter	Microlab	HA-10N		CHAR 11/17/02	11/17/04
High Pass Filter	Microlab	HA-20N		CHAR 12/17/02	12/17/04
Audio Oscillator	HP	653A	832-00260	CHAR 12/1/02	12/1/04
Audio Generator	B&K Precision	3010	8739686	CHAR 12/1/02	12/1/04
Frequency Counter	HP	5382A	1620A03535	CHAR 3/2/01	Out of Service
Frequency Counter	HP	5385A	3242A07460	CAL 3/7/03	3/7/05
Amplifier	HP	11975A	2738A01969	No Cal Required	
Egg Timer	Unk			CHAR 2/1/02	2/1/04
Measuring Tape-20M	Kraftixx	0631-20		CHAR 2/1/02	2/1/04
Measuring Tape-7.5M	Kraftixx	7.5M PROFI		CHAR 2/1/02	2/1/04
Coaxial Cable #51	Insulated Wire Inc.	NPS 2251-2880	Timco #51	CHAR 1/23/02	1/23/04
Coaxial Cable #64	Semflex Inc.	60637	Timco #64	CHAR 1/24/02	1/24/04
Coaxial Cable #65	General Cable Co.	E9917 RG233/U	Timco #65	CHAR 1/23/02	1/23/04
Coaxial Cable #106	Unknown	Unknown	Timco #106	CHAR 1/23/02	1/23/04
Injection Probe	Fischer Custom Communications	F-120-9A	270	CAL 6/1/01	6/1/03
Power Line Coupling/Decoupling Network	Fischer Custom Communications	FCC-801-M2-16A	01048	CAL 8/29/01	8/29/03
Power Line Coupling/Decoupling Network	Fischer Custom Communications	FCC-801-M3-16A	01060	CAL 8/29/01	8/29/03
VHF/UHF Current	Fischer Custom	F-52	130	CAL	8/30/03

APPLICANT: PARKERVISION INC.

FCC ID: JFE-D2D00005

REPORT #: P\PARKERJFE\1889AUT4\1889AUT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
 Newberry, Florida 32669
<http://www.timcoengr.com>
 888.472.2424 F 352.472.2030 email: sid@timcoengr.com

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date or Status
Probe	Communications			8/30/01	
Passive Impedance Adapter	Fischer Custom Communications	FCC-801-150-50-CDN	01117 & 01118	CAL 8/29/01	8/29/03
Radiating Field Coil	Fischer Custom Communications	F-1000-4-8/9/10-L-1M	9859	CAL 10/15/98	10/15/00
EMC Immunity Test System	Keytek	CEMASTER	9810210	CAL 2/1/02	2/1/04
Compliance Test System - AC Power Source	California Instruments	1251RP	L05865	CAL 2/25/04	2/25/06
Compliance Test System - PACS-1 Module	California Instruments	PACS-1	X71484	CAL 2/25/04	2/25/06
Isotropic Field Probe	Amplifier Research	FP5000	22839		
Isotropic Field Probe	Amplifier Research	FP5000	300103		
Capacitor Clamp	Keytek	CM-CCL	9811359	No Cal Required	
Amplifier	Amplifier Research	10W1000B	23117	No Cal Required	
Field Monitor	Amplifier Research	FM5004	22288	No Cal Required	
Standard Gain Horn 1.0-2.4 GHz	Polarad	CA-L	235	No Cal Required	
Standard Gain Horn 2.14-4.34 GHz	Polarad	CA-S	203	No Cal Required	
Standard Gain Horn 3.95-5.85 GHz	Scientific-Atlanta Inc.	11A-3.9	8448CG	No Cal Required	
Standard Gain Horn 8.2-12.5 GHz	Systron Donner	DBG-520-20	Not Serialized	No Cal Required	
Standard Gain Horn 18.0-26.3 GHz	Systron Donner	DBE-520-20	Not Serialized	No Cal Required	
Standard Gain Horn 26.5-40.2 GHz	Systron Donner	DBD-520-20	Not Serialized	No Cal Required	
Standard Gain Horn 40.0-60.0 GHz	ATM	19-443-6R	Not Serialized	No Cal Required	
Standard Gain Horn 12.4-18.0 GHz	ATM	62-442-6	D262108-01	No Cal Required	
Standard Gain Horn 5.85-8.2 GHz	ATM	137-442-2	D261908-01	No Cal Required	

APPLICANT: PARKERVISION INC.

FCC ID: JFE-D2D00005

REPORT #: P\PARKERJFE\1889AUT4\1889AUT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date or Status
AC Voltmeter	HP	400F	0950A05433	CAL 8/13/03	8/13/05
RF Power Amplifier	Ophir RF	5150F	1041 'X1'	No Cal Required	
Electric Field Sensor	Amplifier Research	FP6001	302504		
Electric Field Sensor	Amplifier Research	FP6001	302510	CAL 6/1/04	6/1/06
Surge Generator	Com-Power Corporation	SG-168	25802	CAL 2/27/04	2/27/06
RF Power Amplifier	Ophir RF, Inc.	5150F	1041	CHAR 10/31/03	10/31/05
3-Meter Anechoic Chamber	Panashield	N/A	N/A	Listed 5/12/04	5/11/07
Digital Multimeter	Fluke	77III	79510408	CAL 7/19/04	7/19/06
Open-Frame Tower Spectrum Analyzer	HP	8566B/85662A	2627A03154/2648A14276	CAL 7/9/04	7/9/06
Open-Frame Tower RF Preselector	HP	85685A	3107A01282	CAL 7/9/04	7/9/06
Open-Frame Tower Quasi-Peak Adapter	HP	85650A	2046A00305	CAL 7/9/04	7/9/06
Signal Generator	HP	8648C	3847A04696	CAL 9/27/04	9/27/06

APPLICANT: PARKERVISION INC.

FCC ID: JFE-D2D00005

REPORT #: P\PARKERJFE\1889AUT4\1889AUT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

TEST PROCEDURE

GENERAL: This report shall NOT be reproduced except in full without the written approval of TIMCO ENGINEERING, INC.

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.4-1992 using a 50uH LISN. Both lines were observed with the UUT transmitting. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed. The ambient temperature of the UUT was 76°F with a humidity of 55%.

BANDWIDTH 6.0dB: The measurements were made with the spectrum analyzer's resolution bandwidth (RBW)=1 MHz and the video bandwidth (VBW) =3 MHz and the span set as shown on plot.

POWER OUTPUT: The RF power output was measured at the antenna feed point using a peak power meter.

ANTENNA CONDUCTED EMISSIONS: The RBW=100 kHz, VBW=300 kHz and the span set to 10 MHz and the spectrum was scanned from 30 MHz to the 10th Harmonic of the fundamental. Above 1.0GHz the resolution bandwidth was 1.0MHz and the VBW = 3.0MHz and the span to 50 MHz.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-1992 using a HEWLETT PACKARD spectrum analyzer with a pre-selector. The bandwidth (RBW) of the spectrum analyzer was 100 kHz up to 1 GHz and 1 MHz above 1 GHz with an appropriate sweep speed. The VBW above 1 GHz was = 3.0MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The ambient temperature of the UUT was 76°F with a humidity of 55%.

APPLICANT: PARKERVISION INC.

FCC ID: JFE-D2D00005

REPORT #: P\PARKERJFE\1889AUT4\1889AUT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

APPLICANT: PARKERVISION INC.
FCC ID: JFE-D2D00005
NAME OF TEST: POWER LINE CONDUCTED INTERFERENCE
RULES PART NO.: 15.107(a)

REQUIREMENTS:	QUASI-PEAK	AVERAGE
.15 - 0.5 MHz	66-56 dBuV	56-46 dBuV
0.5 - 5.0	56	46
5.0 - 30.	60	50

TEST PROCEDURE: ANSI STANDARD C63.4-1992. The spectrum was scanned from .15 to 30 MHz.

TEST DATA:


**THE PLOTS ON THE FOLLOWING PAGES REPRESENT THE EMISSIONS
TAKEN FOR THIS DEVICE.**

TEST RESULTS: Both lines were observed. The measurements indicate that the unit DOES appear to meet the FCC requirements for this class of equipment.


APPLICANT: PARKERVISION INC.
FCC ID: JFE-D2D00005
REPORT #: P\PARKERJFE\1889AUT4\1889AUT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com
Line 1 (peak)

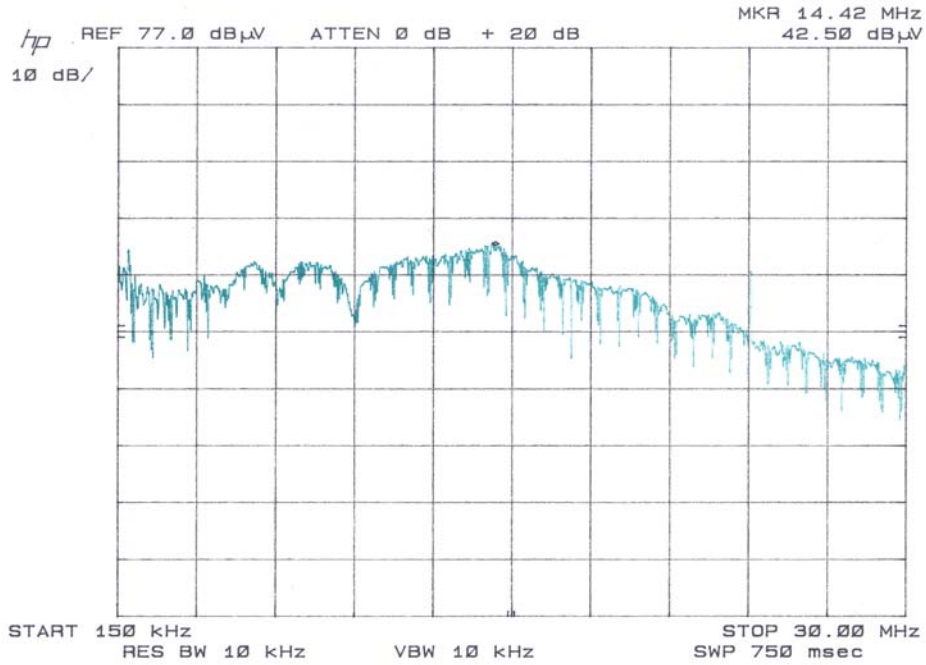

Line 2 (peak)

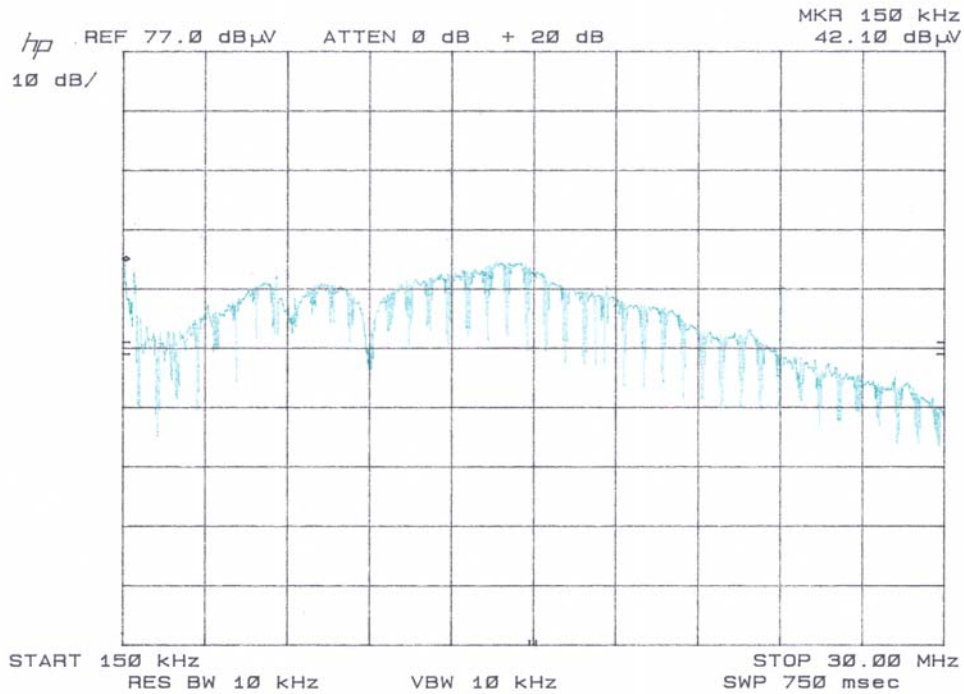

APPLICANT: PARKERVISION INC.

FCC ID: JFE-D2D00005

REPORT #: P\PARKERJFE\1889AUT4\1889AUT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

APPLICANT: PARKERVISION INC.

FCC ID: JFE-D2D00005

NAME OF TEST: 6.0dB BANDWIDTH

RULES PART NO.: 15.247(a)(2)

REQUIREMENTS: The 6.0dB bandwidth must be greater than 500 kHz.

MEASUREMENT


DATA: See the plot on the following page.

NAME OF TEST: POWER OUTPUT

RULES PART NO.: 15.247(b) 1.0 Watt or +30 dBm

MEASUREMENT:
+20.3 dBm at 2412 MHz
+20.2 dBm at 2437 MHz
+19.9 dBm at 2462 MHz

15.247(c) Method of Measuring RF Power output: The Peak power Sensor was connected in place of the antenna.

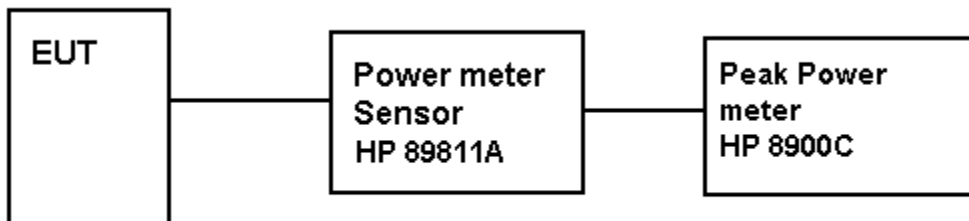

Three channels were measured and the worst case is presented above.


APPLICANT: PARKERVISION INC.

FCC ID: JFE-D2D00005

REPORT #: P\PARKERJFE\1889AUT4\1889AUT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

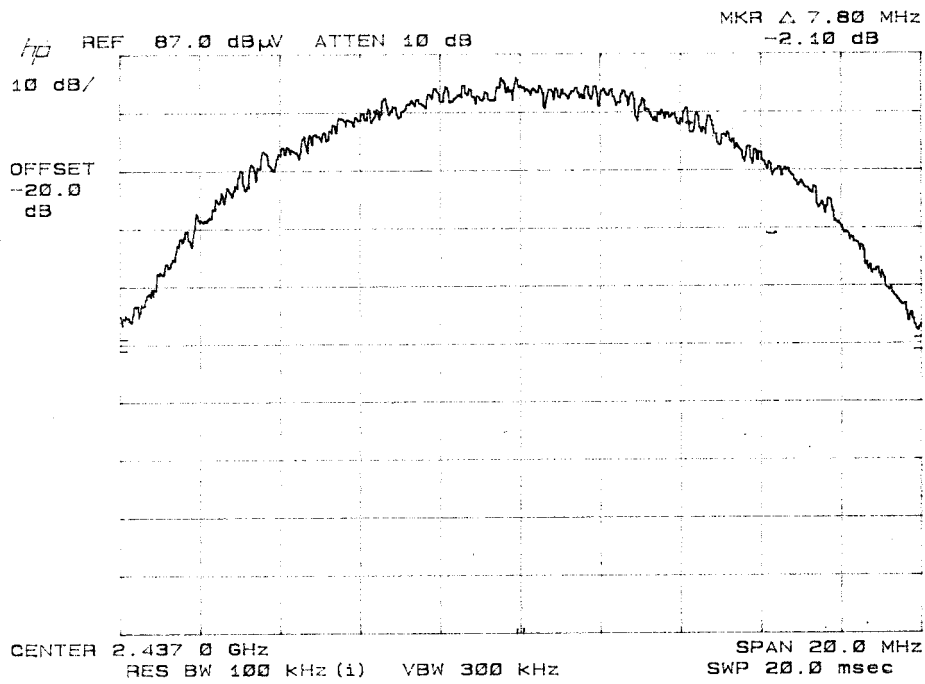

Three channels were measured and the worst case is presented above.

APPLICANT: PARKERVISION INC.

FCC ID: JFE-D2D00005

REPORT #: P\PARKERJFE\1889AUT4\1889AUT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

NAME OF TEST: SPURIOUS EMISSIONS AT ANTENNA TERMINALS

REQUIREMENTS: Emissions must be at least 20dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.

TEST DATA:

Frequency MHz	Emission level dBuV/m
2412	113.5
800	23
1608	21.5
2328	56.3
3216	23.3
2824	40.1
7236	25.3
8040	27
9648	28.6
14472	35.2
2437	112.1
800	23.1
2326	58.1
3249	21
6499	24.3
7311	36.9
8123	24.4
4874	31.9
9748	27.1
14622	32.4
2462	111.9
800	24.3
1641	22.4
3282	22
4924	33.8
7384	40.9
8205	23.9

NOTE: THE SPECTRUM WAS SCANNED TO THE TENTH HARMONIC.
All emissions were measured with a peak detector.

APPLICANT: PARKERVISION INC.


FCC ID: JFE-D2D00005

REPORT #: P\PARKERJFE\1889AUT4\1889AUT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

15.247(c) Method of Measuring RF Conducted Spurious Emissions

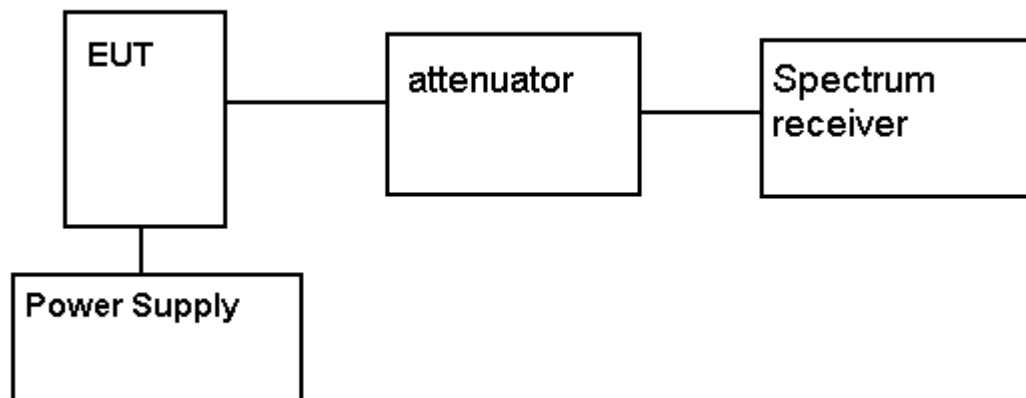

APPLICANT: PARKERVISION INC.

FCC ID: JFE-D2D00005

REPORT #: P\PARKERJFE\1889AUT4\1889AUT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
 Newberry, Florida 32669
 http://www.timcoengr.com
 888.472.2424 F 352.472.2030 email: sid@timcoengr.com

15.247(c), 15.205 & 15.209(b) Field_strength_of_spurious_emissions:

REQUIREMENTS:

FIELD STRENGTH of Fundamental: 902-928 MHz 2.4-2.4835 GHz	FIELD STRENGTH of Harmonics 127.37dBuV/m 54 dBuV/m @3m	S15.209 30 - 88 MHz 40 dBuV/m @3M 88 -216 MHz 43.5 216 -960 MHz 46 ABOVE 960 MHz 54dBuV/m
--	---	---

EMISSIONS RADIATED OUTSIDE OF THE SPECIFIED FREQUENCY BANDS, EXCEPT FOR HARMONICS, SHALL BE ATTENUATED BY AT LEAST 20 dB BELOW THE LEVEL OF THE FUNDAMENTAL OR TO THE GENERAL RADIATED EMISSION LIMITS IN 15.209, WHICHEVER IS THE LESSER ATTENUATION.

REQUIREMENTS: Emissions that fall in the restricted bands (15.205) must be less than 54dBuV/m otherwise the spurious and harmonics must be attenuated by at least 20dB.

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity	Coax Loss dB	Correction Factor dB	Field Strength dBuV/m	Margin dB
2,412.0	2,412.00	74.4	V	3.19	32.35	109.94	17.43
2,412.0	1,608.00	R 21.3	V	2.59	28.85	52.74	PK 1.26
2,412.0	3,216.00	16.8	V	3.79	33.24	53.83	36.11
2,412.0	4,824.00	R 14.2	V	4.91	34.36	53.47	AV 0.53
2,412.0	4,824.00	R 25.0	V	4.91	34.36	64.27	PK 9.27
2,412.0	7,231.00	2.5	V	5.74	36.18	44.42	45.52
2,412.0	9,648.00	15.7	V	6.79	37.58	60.07	29.87
2,437.0	2,437.00	76.7	V	3.21	32.42	112.33	15.04
2,437.0	1,624.60	R 21.2	V	2.60	28.95	52.75	AV 1.25
2,437.0	1,624.60	R 23.2	V	2.60	28.95	54.75	PK 19.25
2,437.0	4,874.00	R 6.5	V	4.94	34.40	45.84	AV 8.16
2,437.0	4,874.00	R 18.5	V	4.94	34.40	57.84	PK 16.16
2,437.0	7,311.00	R 3.3	V	5.79	36.27	45.36	AV 8.64
2,437.0	7,311.00	R 15.5	V	5.79	36.27	57.56	PK 16.44
2,437.0	9,748.00	11.9	V	6.82	37.70	56.42	35.91
2,447.0	3,262.60	R 14.0	V	3.84	33.25	51.09	AV 2.91
2,447.0	3,262.60	R 17.0	V	3.84	33.25	54.09	PK 19.91
2,462.0	2,462.00	69.8	V	3.22	32.49	105.51	21.86
2,462.0	1,641.00	24.6	V	2.61	29.05	56.26	29.25
2,462.0	3,283.00	17.0	V	3.85	33.26	54.11	31.40
2,462.0	4,924.00	R 13.0	V	4.96	34.44	52.40	PK 1.60

Notes: R= restricted band, P= peak emission, and A= Average emission

Harmonics were checked through the 10th harmonic

APPLICANT: PARKERVISION INC.


FCC ID: JFE-D2D00005

REPORT #: P\PARKERJFE\1889AUT4\1889AUT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

Method of Measuring Radiated Spurious Emissions

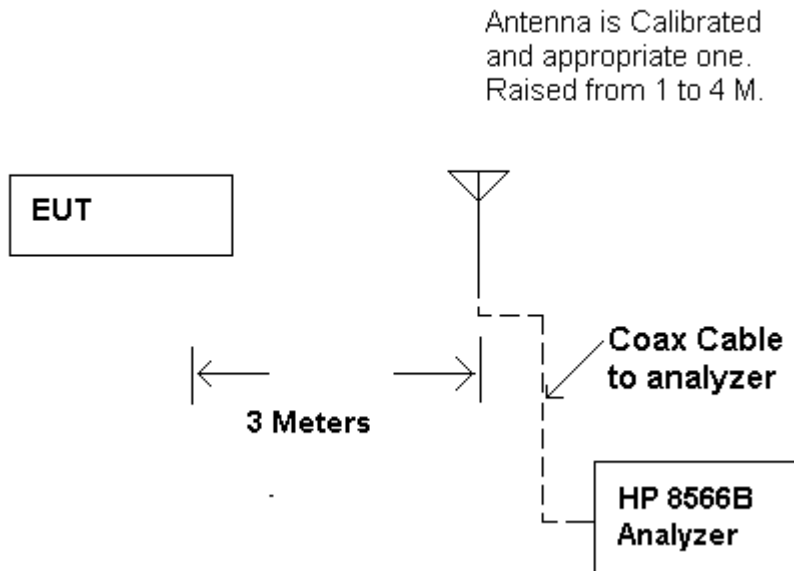

EUT placed 80cm above ground on a rotatable platform.

METHOD OF MEASUREMENT: The procedure used was ANSI STANDARD C63.4-2001 & the FCC/OET Guidance on Measurements for Direct Sequence Spread Spectrum Systems - Public Notice 54797 Dated July 12, 1995. Measurements were made at the open field test site of TIMCO ENGINEERING INC. located at 849 N.W. State Road 45, Newberry, FL 32669.

APPLICANT: PARKERVISION INC.

FCC ID: JFE-D2D00005

REPORT #: P\PARKERJFE\1889AUT4\1889AUT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

APPLICANT: PARKERVISION INC.

FCC ID: JFE-D2D00005


NAME OF TEST: RADIATED SPURIOUS EMISSIONS INTO ADJACENT RESTRICTED BAND

REQUIREMENTS: Emissions that fall in the restricted bands (15.205). These emissions must be less than or equal to 500 uV/m (54 dBuV/m).

TEST PROCEDURE: An in band field strength measurement of the fundamental Emission using the RBW and detector function required by C63.4-2000 and FCC Rules. The procedure was repeated with an average detector and a plot made. The calculated field strength in the adjacent restricted band is presented below.

18.30 dBuV from plot
10.00 dB attenuator
+32.28 dB ACF
+ 3.17 dB Coax loss

63.75 dBuV/m

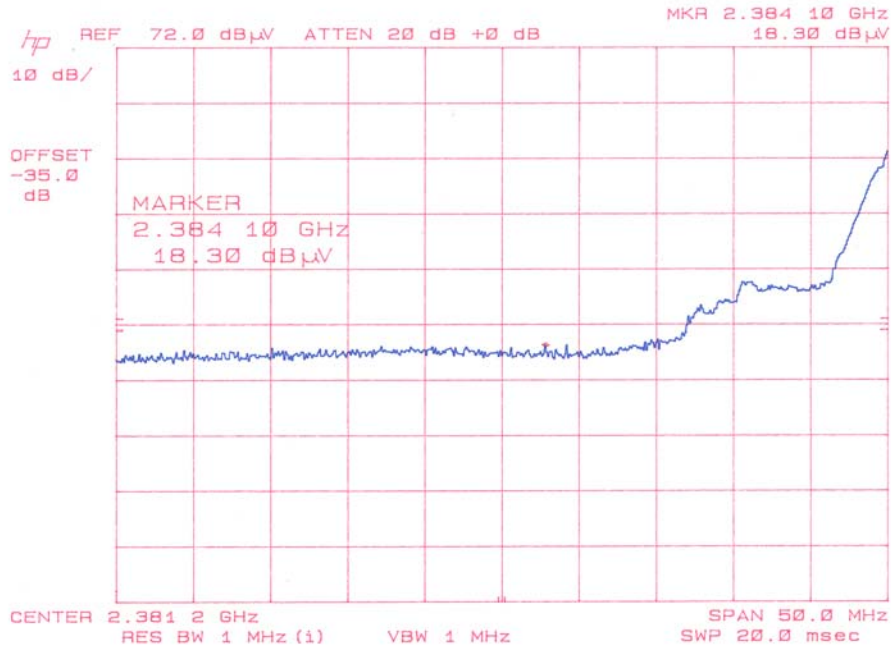

APPLICANT: PARKERVISION INC.

FCC ID: JFE-D2D00005


REPORT #: P\PARKERJFE\1889AUT4\1889AUT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

04.20 dBuV from plot
10.00 dB attenuator
+32.28 dB ACF
+ 3.17 dB Coax loss

49.65 dBuV/m

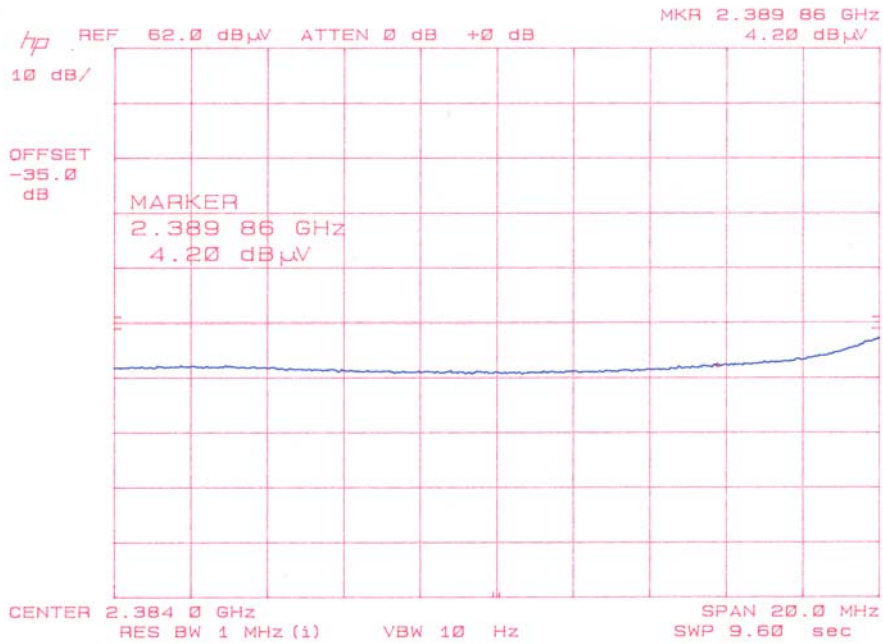

Average

APPLICANT: PARKERVISION INC.


FCC ID: JFE-D2D00005

REPORT #: P\PARKERJFE\1889AUT4\1889AUT4TestReport.doc

TIMCO ENGINEERING INC.


849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

13.20 dBuV from plot
10.00 dB attenuator
32.56 dB ACF
3.24 dB Coax loss
59.00 dBuV/m

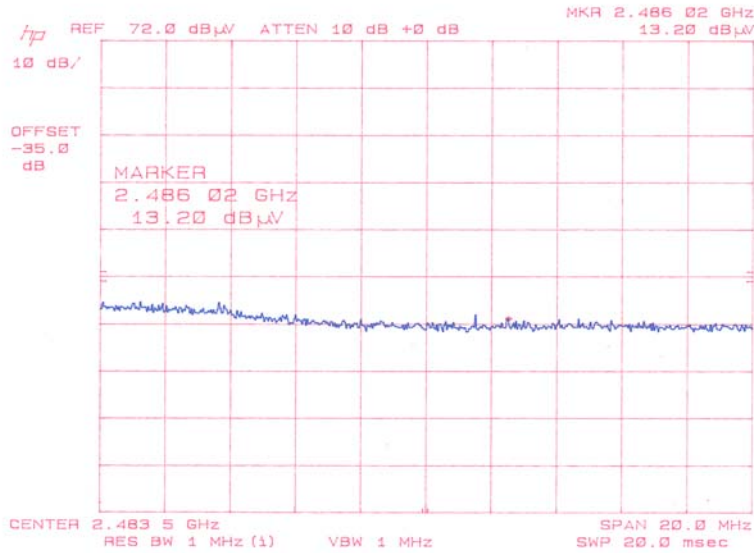

Peak

01.20 dBuV from plot
10.00 dB attenuator
32.56 dB ACF
3.24 dB Coax loss
47.00 dBuV/m

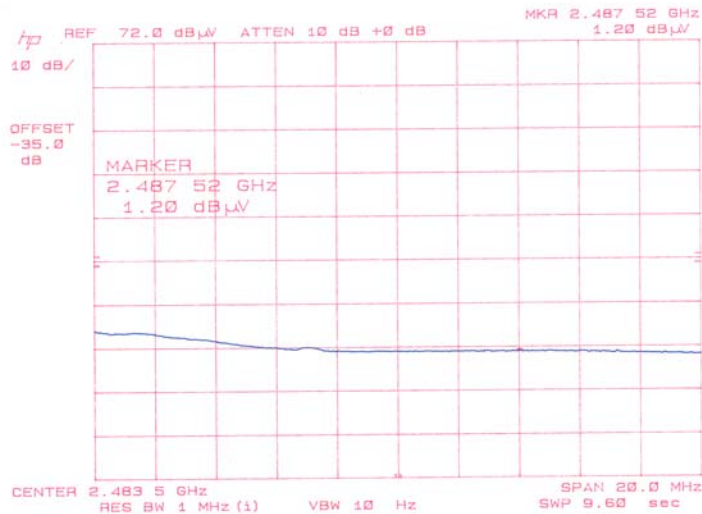

Average


APPLICANT: PARKERVISION INC.
FCC ID: JFE-D2D00005
REPORT #: P\PARKERJFE\1889AUT4\1889AUT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
http://www.timcoengr.com
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

APPLICANT: PARKERVISION INC.
FCC ID: JFE-D2D00005
NAME OF TEST: POWER SPECTRAL DENSITY
RULES PART NO.: 15.247(d)
REQUIREMENTS: The peak level measured must be no greater than +8.0dBm.
DATA: SEE THE FOLLOWING PLOT

-62.20 dBm from plot
+10.00 dB Attn.
+35.00 dB Correction Factor
-17.2 dBm

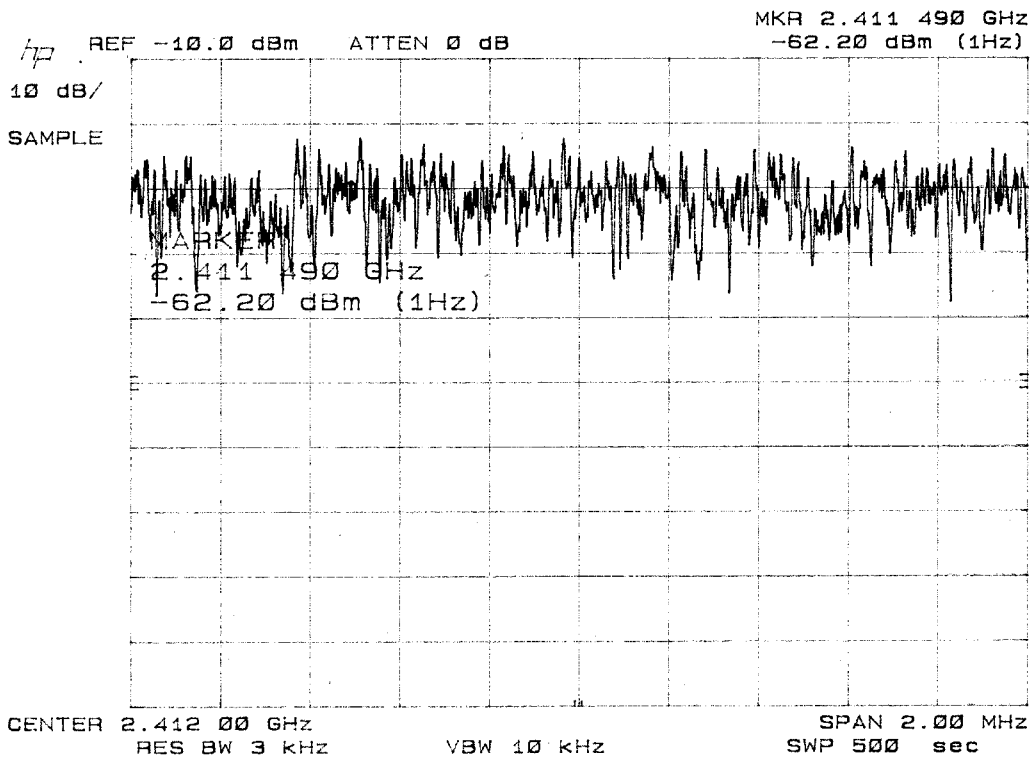

Three places in the band were measured and the worst case reported above.

APPLICANT: PARKERVISION INC.
FCC ID: JFE-D2D00005
REPORT #: P\PARKERJFE\1889AUT4\1889AUT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

MPE CALCULATION

For a device with:
output power :20.3 dBm
Antenna gain of: 2.15 dBi
For all frequencies above 1500 MHz(see OET 65): $S=1 \text{ mW/cm}^2$

$P_o := 107 \text{ mWatts}$ $f := 2440 \text{ frequency in MHz}$

$S := 1 \frac{\text{mW}}{\text{cm}^2}$ for all frequencies over 1500 MHz

$\text{dBd} := 0$

$G := \text{dBd} + 2.15$

$G_n := 10^{\frac{G}{10}}$

$G_n = 1.641$ Gain numeric

$R := \sqrt{\frac{(P_o \cdot G_n)}{4 \cdot \pi \cdot S}}$

$\text{Rinches} := \frac{R}{2.54}$

$R = 3.738$ distance in centimeters
required for compliance

$\text{Rinches} = 1.471$

APPLICANT: PARKERVISION INC.

FCC ID: JFE-D2D00005

REPORT #: P\PARKERJFE\1889AUT4\1889AUT4TestReport.doc