



FCC PART 15.247


MEASUREMENT AND TEST REPORT

For

InnoSys (KeySpan)

4118 Lakeside Drive
Richmond, CA 94806

FCC ID: JFVKYRF-LDK-1
Model: KYRF-LDK

This Report Concerns:	Equipment Type:
<input checked="" type="checkbox"/> Original Report (rev.1)	Dock for iPod
Test Engineer:	James Ma 
Report Number:	R0611022-247a
Report Date:	2006-11-27
Reviewed By:	Daniel Deng 
Prepared By: (12)	Bay Area Compliance Laboratories Corp. (BACL) 1274 Anvilwood Ave. Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732-9164

Note: This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government

TABLE OF CONTENTS

GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
EUT PHOTO	5
EUT MECHANICAL DESCRIPTION	5
OBJECTIVE	6
RELATED SUBMITTAL(S)/GRANT(S).....	6
TEST METHODOLOGY	6
MEASUREMENT UNCERTAINTY	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION.....	7
JUSTIFICATION	7
SPECIAL ACCESSORIES	7
EQUIPMENT MODIFICATIONS	7
POWER SUPPLY	7
INTERFACE PORTS AND CABLING.....	7
LOCAL SUPPORT EQUIPMENT.....	7
SUMMARY OF TEST RESULTS FOR FCC PART 15.....	8
§15.203 - ANTENNA REQUIREMENT.....	9
APPLICABLE STANDARD	9
ANTENNA CONNECTED CONSTRUCTION	9
§15.207 – CONDUCTED EMISSIONS	10
APPLICABLE STANDARD	10
TEST SETUP.....	10
TEST EQUIPMENT LIST AND DETAILS.....	10
TEST PROCEDURE	10
TEST SETUP DIAGRAM	11
SUMMARY OF TEST RESULTS	11
LINE 1 CONDUCTOR MODE	12
QP MEASUREMENTS	12
AVERAGE MEASUREMENTS	12
NEUTRAL LINE CONDUCTOR MODE.....	13
QP MEASUREMENTS	13
AVERAGE MEASUREMENTS	13
§15.205, §15.209 & §15.247 - RADIATED EMISSIONS	14
APPLICABLE STANDARD: FCC §15.205 RESTRICTED BANDS OF OPERATION	14
APPLICABLE STANDARD: FCC §15.209 RADIATED EMISSION LIMITS, GENERAL REQUIREMENTS.....	14
APPLICABLE STANDARD: FCC §15.247 RADIATED EMISSION LIMITS.....	15
TEST SETUP.....	15
TEST EQUIPMENT LIST AND DETAILS.....	16
ENVIRONMENTAL CONDITIONS	16
TEST PROCEDURE	16
CORRECTED AMPLITUDE & MARGIN CALCULATION	16
SUMMARY OF TEST RESULTS	17
RADIATED EMISSIONS TEST RESULT DATA: MEASURED AT 3 METER - WITH NOTCH FILTER	18
§15.247 (A) (1) - HOPPING CHANNEL SEPARATION	22
APPLICABLE STANDARD	22
MEASUREMENT PROCEDURE.....	22
TEST EQUIPMENT	22
TEST SETUP DIAGRAM	23
ENVIRONMENTAL CONDITIONS	23

MEASUREMENT RESULTS.....	23
§15.247 (A) (1) (I) – HOPPING CHANNEL BANDWIDTH	26
APPLICABLE STANDARD	26
MEASUREMENT PROCEDURE.....	26
TEST EQUIPMENT	26
TEST SETUP DIAGRAM	26
ENVIRONMENTAL CONDITIONS.....	26
MEASUREMENT RESULTS.....	27
MEASUREMENT RESULT	28
§15.247 (A) (1) (II) - NUMBER OF HOPPING FREQUENCIES USED	30
APPLICABLE STANDARD	30
MEASUREMENT PROCEDURE.....	30
TEST EQUIPMENT	30
TEST SETUP DIAGRAM	30
ENVIRONMENTAL CONDITIONS.....	31
MEASUREMENT RESULT: 77 CHANNELS	31
§15.247(A) (1) (I) - DWELL TIME	33
APPLICABLE STANDARD	33
MEASUREMENT PROCEDURE.....	33
TEST EQUIPMENT	33
TEST SETUP DIAGRAM	33
ENVIRONMENTAL CONDITIONS.....	33
MEASUREMENT RESULTS:.....	34
§15.247(B) (2) - MAXIMUM PEAK OUTPUT POWER	38
APPLICABLE STANDARD	38
MEASUREMENT PROCEDURE.....	38
TEST EQUIPMENT	38
TEST SETUP DIAGRAM	38
ENVIRONMENTAL CONDITIONS.....	38
MEASUREMENT RESULT	38
§15.247 (D) - 100 KHZ BANDWIDTH OF BAND EDGES	41
APPLICABLE STANDARD	41
MEASUREMENT PROCEDURE.....	41
TEST EQUIPMENT	41
TEST SETUP DIAGRAM	41
ENVIRONMENTAL CONDITIONS.....	41
§ 15.247 (E) (I) AND § 2.1091 - RF EXPOSURE.....	43
§2.1051 SPURIOUS EMISSIONS AT ANTENNA PORT	44
APPLICABLE STANDARD	44
MEASUREMENT PROCEDURE.....	44
TEST EQUIPMENT	44
TEST SETUP DIAGRAM	44
ENVIRONMENTAL CONDITIONS.....	44
MEASUREMENT RESULTS.....	45
EXHIBIT A – FCC PRODUCT LABELING AND WARNING STATEMENT	53
FCC ID LABEL.....	53
PROPOSED LABEL LOCATION ON EUT	53
CONDUCTED EMISSIONS – FRONT VIEW	54
CONDUCTED EMISSIONS – SIDE VIEW	54
RADIATED EMISSIONS – FRONT VIEW	55
RADIATED EMISSIONS – REAR VIEW.....	55
RX RADIATED EMISSIONS – FRONT VIEW	56
RX RADIATED EMISSIONS – REAR VIEW	56

EXHIBIT C - EUT PHOTOGRAPHS.....	57
EUT – EXTERIOR: TOP VIEW	57
EUT – EXTERIOR: BOTTOM VIEW.....	57
EUT – EXTERIOR: SIDE VIEW 1	58
EUT – EXTERIOR: SIDE VIEW 2	58
EUT – EXTERIOR: SIDE VIEW 3	59
EUT – EXTERIOR: PORT VIEW	59
EUT – INTERIOR: PCB: TOP SIDE VIEW.....	60
EUT – INTERIOR: PCB BOTTOM SIDE VIEW	60

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

This BACL measurement and test report has been complied on behalf of *InnoSys (KeySpan)* and their product, FCC ID: *JFVKYRF-LDK-1* or the “EUT” as referred to in this report. The EUT is an *iPod Dock* model: *KYRF-LDK* designed to function in conjunction with *InnoSys (KeySpan) Remote Control* model: *KYRF-RMLN* (FCC ID: *JFVKYRF-RMLN-1*). The EUT is designed to be compatible with the Apple iPod mp3 music player. The EUT receives commands (such as volume, track selection etc.) from the Remote Control and transmits these commands via the iPod info port to the docked iPod. Additionally the EUT has wired connectivity to common household audio/video equipment such as Televisions (S-Video/composite cable), Computers (USB), or speaker system (mini phono plug). The EUT also transmits status information from the iPod back the remote control which is then displayed on the remote LCD. which measures approximately 190mmL x 130mm W x 42.5mm H.

* *The test data gathered are from a production sample, S/N: KYRF LDKPDB rev.A5, provided by the manufacturer.*

EUT Photo



EUT (FCC ID: JFVKYRF-LDK-1

Additional photos in exhibit C

EUT Mechanical Description

The InnoSys (Keyspan) FCC ID: *JFVKYRF-LDK-1* an *iPod Dock* with wireless transceiver capabilities and audio/video connectivity with TV/Audio Speakers/PC devices. It operates on frequency range 2.402-2.479 GHz with a channel bandwidth of 1 MHz per channel. It utilizes Gaussian Frequency Shift Keying with spread-spectrum frequency hopping encoding. The EUT is powered by 5 VDC (4.4 V-5.25 V) via USB; 100 mA of which go to powering the EUT and the rest being utilized to charge the docked iPod device. The EUT measures approximately 107.95 mmL x 82.55 mmW x 19.05 mmH and weighs approximately 150 g.

Objective

This type approval report is prepared on behalf of *InnoSys (KeySpan)* in accordance with Part 2, Subpart J, Part 15, Subparts A, B, and C.

Related Submittal(s)/Grant(s)

BACL *InnoSys (KeySpan)* project R0611021 for Remote Control model: *KYRF-RMLN*.

Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.4-2003.

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the values range from ± 2.0 for Conducted Emissions tests and $+4.0$ dB for Radiated Emissions tests are the most accurate estimates pertaining to uncertainty of EMC measurements at BACL.

Detailed instrumentation measurement uncertainties can be found in BACL report QAP-018.

Test Facility

The semi-anechoic chambers used by BACL to collect radiated and conducted emissions measurement data is located in the building at it's facility in Sunnyvale, California, USA.

BACL's test sites have been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC registration number: 90464 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200167-0). The current scope of accreditations can be found at <http://ts.nist.gov/ts/htdocs/210/214/scopes/2001670.htm>

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to ANSI C63.4-2003.

The EUT was tested in the normal (native) operating mode to represent *worst-case* results during the final qualification test.

Special Accessories

As shown in following test block diagram, all interface cables used for compliance testing are shielded.

Equipment Modifications

No modifications were made to the EUT.

Power Supply

Manufacturer	Description	Model	Serial Number
NA	USB 2.0 Interface Cable	NA	NA

Interface Ports and Cabling

Cable Description	Length (M)	From	To
USB A to mini B	2	AC Power Adapter	EUT
Audio	1	EUT (audio line out)	Speakers
Video	1	EUT (video line out)	Television

Local Support Equipment

Manufacturer	Description	Model	Serial Number
Samsung	LCD Television	Sync Master 940MW	D019HCGL805457
Altec Lansing	Speakers	MX5020	NA
Apple	iPod Video	30 GB	JZ542PANSZ9
InnoSys (KeySpan)	Remote Control	KYRF-RMLN	001

SUMMARY OF TEST RESULTS FOR FCC PART 15

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.203	Antenna Requirements	Compliant
§ 15.205	Restricted Bands	Compliant
§15.207 (a)	Conducted Emissions	Compliant
§15.209	Radiated Emissions	Compliant
§15.247 (a) (1)	Hopping Channel Separation	Compliant
§15.247 (a) (1) (i)	Channel Bandwidth	Compliant
§15.247 (a) (1) (ii)	Dwell Time	Compliant
§15.247 (b) (2)	Maximum Peak Output Power	Compliant
§ 15.247 (d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§ 15.247 (e)(i) & §2.1091	RF Exposure	Compliant
§ 2.1051	Spurious Emissions at Antenna Port	Compliant

§15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Refer to statement below for compliance.

“The antenna for this device is an integral antenna that the end user cannot access. Furthermore the device is for indoor/outdoor use as detailed in the Users Manual and Operational Description”.

Antenna Connected Construction

The antenna for this device is an integral antenna that the end user cannot access. It is fully enclosed by the EUT chassis and removal/modification would result in irreparable damage to the device.

Compliant

N/A

§15.207 – CONDUCTED EMISSIONS

Applicable Standard

According to FCC §15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency Range (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

**Decreases with the logarithm of the frequency*

Test Setup

The measurement was performed at shield room, using the setup per ANSI C63.4 – 2003 measurement procedure. The specification used was FCC Class B limits.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The EUT was connected with LISN-1.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
Rohde & Schwarz	Artificial-Mains Network	ESH2-Z5	871884/039	2005-11-14
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2006-03-13


*** Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emissions test, the power cord of the EUT was connected to the mains outlet of the LISN-1.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the peak detection mode, quasi-peak and average. Quasi-Peak readings are distinguished with a “QP”. Average readings are distinguished with an “Ave”.

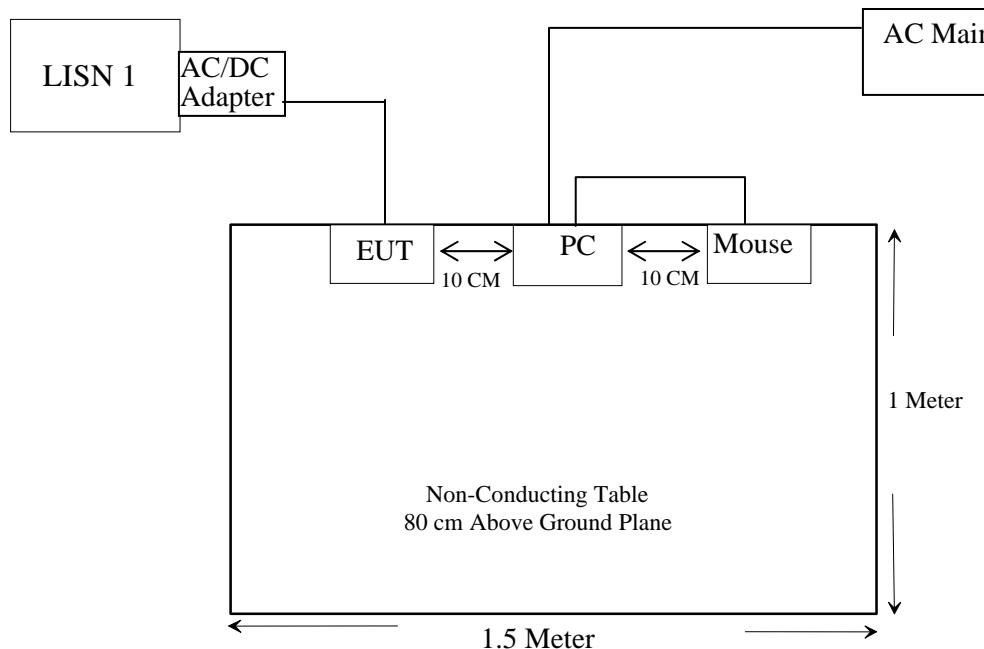Test Setup Diagram**Environmental Conditions**

Temperature:	24 ° C
Relative Humidity:	65 %
ATM Pressure:	1020 mbar

*The testing was performed by James Ma on 2006-11-13.

Summary of Test Results


According to the recorded data in following table, the EUT complied with the FCC standard's conducted emissions limits for Class B devices, with the *worst* margin reading of:

-4.1 dB at 0.174000 MHz in the Neutral Line Conductor mode

Please refer to the following plots and tables for complete test results

Conducted Emissions Test plot & data

Line 1 Conductor Mode

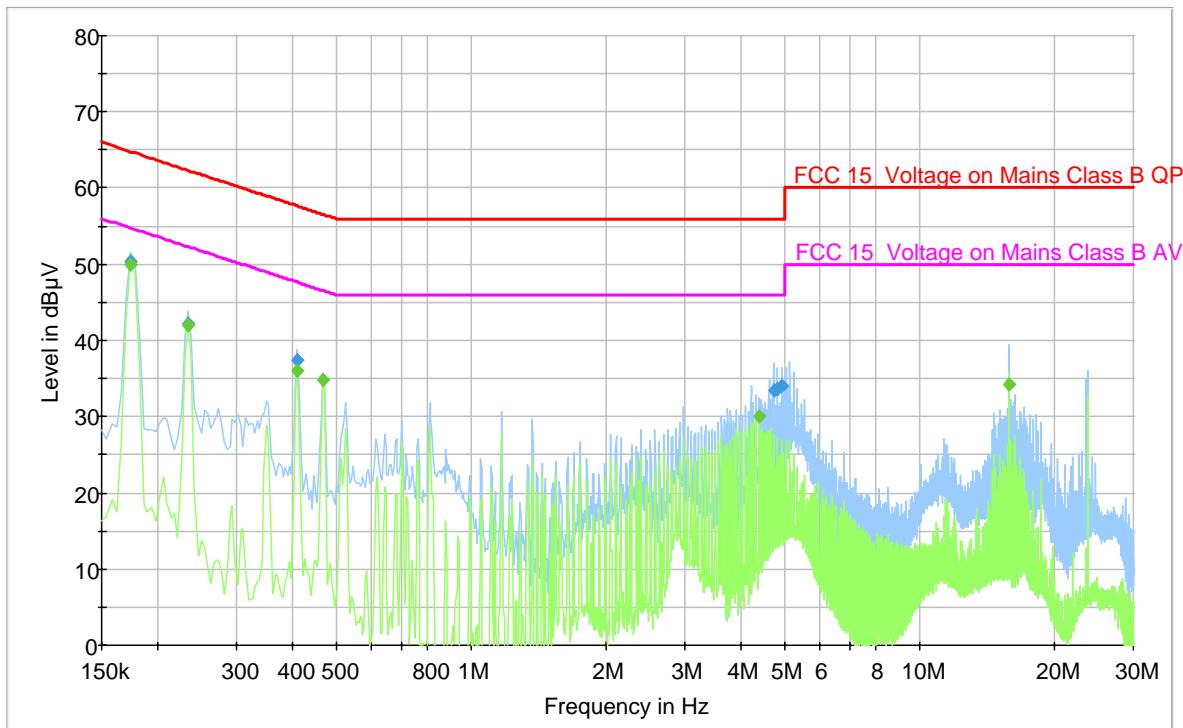


QP Measurements

Frequency (MHz)	Quasi-Peak (dB μ V)	Conductor	Corrected Reading (dB)	Limit (dB μ V)	Margin (dB)
0.174000	50.3	L1	0.1	64.8	-14.5
0.234000	42.2	L1	0.2	62.3	-20.1
0.410000	37.4	L1	0.4	57.6	-20.2
4.934000	34.1	L1	0.3	56.0	-21.9
4.834000	33.6	L1	0.3	56.0	-22.4
4.730000	33.4	L1	0.3	56.0	-22.6

Average Measurements

Frequency (MHz)	Average (dB μ V)	Conductor	Corrected Reading (dB)	Limit (dB μ V)	Margin (dB)
0.174000	49.9	L1	0.1	54.8	-4.8
0.234000	41.9	L1	0.2	52.3	-10.4
0.410000	36.1	L1	0.4	47.6	-11.6
0.466000	34.7	L1	0.3	46.6	-11.8
15.866000	34.2	L1	0.3	50.0	-15.8
4.386000	30.1	L1	0.3	46.0	-15.9

Neutral Line Conductor Mode

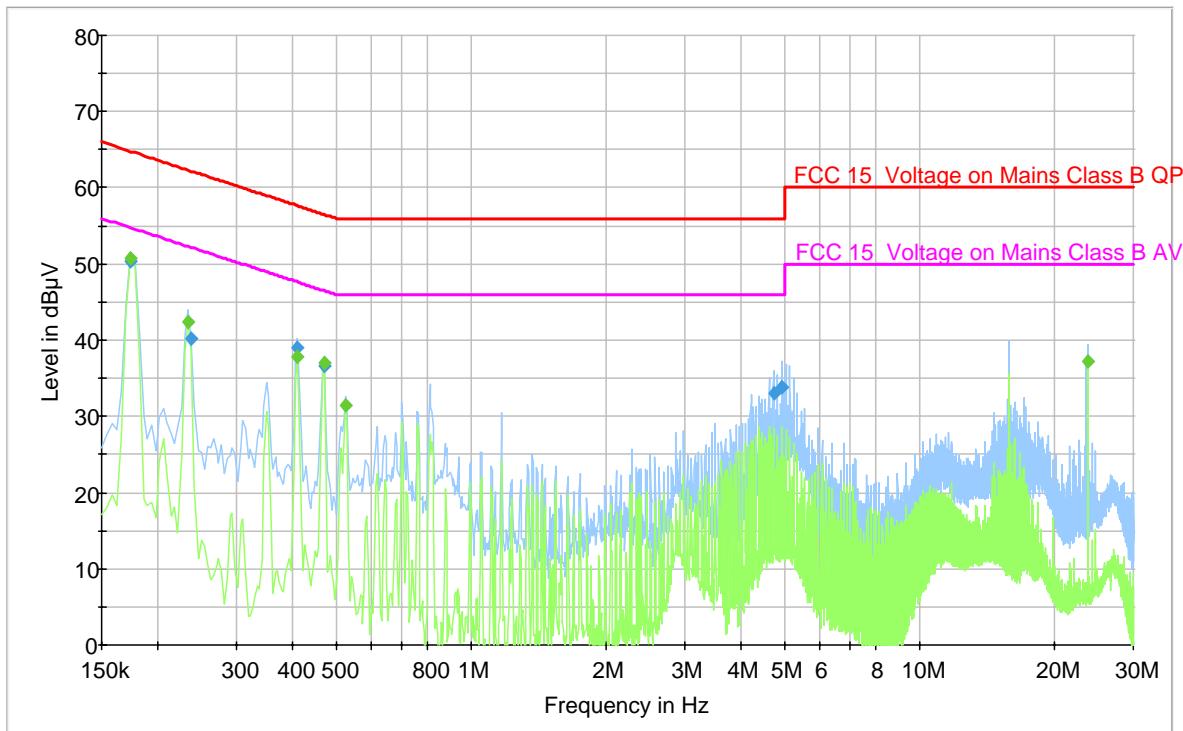

QP Measurements

Frequency (MHz)	Quasi-Peak (dB μ V)	Conductor (L/N)	Corrected Reading (dB)	Limit (dB μ V)	Margin (dB)
0.174000	50.3	N	0.1	64.8	-14.4
0.409000	39.0	N	0.4	57.7	-18.7
0.469000	36.7	N	0.3	56.5	-19.8
0.237000	40.3	N	0.2	62.2	-21.9
4.933000	33.8	N	0.3	56.0	-22.2
4.729000	33.0	N	0.3	56.0	-23.0

Average Measurements

Frequency (MHz)	Average (dB μ V)	Line (L/N)	Corrected Reading (dB)	Limit (dB μ V)	Margin (dB)
0.174000	50.7	N	0.1	54.8	-4.1
0.469000	37.1	N	0.3	46.5	-9.4
0.409000	37.8	N	0.4	47.7	-9.9
0.233000	42.4	N	0.2	52.3	-10.0
23.797000	37.3	N	0.4	50.0	-12.7
0.525000	31.4	N	0.3	46.0	-14.6

§15.205, §15.209 & §15.247 - RADIATED EMISSIONS

Applicable Standard: FCC §15.205 Restricted bands of operation

(a) Except as shown in 15.205 paragraphs (d), only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	MHz	MHz	GHz	GHz
0.090 – 0.110	8.291 – 8.294	16.69475 – 16.69525	156.7 – 156.9	1435 – 1626.5	3.332 – 3.339	10.6 – 12.7
0.495 – 0.505	8.362 – 8.366	25.5 – 25.67	162.0125 – 167.17	1645.5 – 1646.5	3.3458 – 3.358	13.25 – 13.4
2.1735 – 2.1905	8.37625 – 8.38675	37.5 – 38.25	167.72 – 173.2	1660 – 1710	3.600 – 4.400	14.47 – 14.5
4.125 – 4.128	8.41425 – 8.41475	73 – 74.6	240 – 285	1718.8 – 1722.2	4.5 – 5.15	15.35 – 16.2
4.17725 – 4.17775	12.29 – 12.293	74.8 – 75.2	322 – 335.4	2200 – 2300	5.35 – 5.46	17.7 – 21.4
4.20725 – 4.20775	12.51975 – 12.52025	108 – 121.94	399.9 – 410	2310 – 2390	7.25 – 7.75	22.01 – 23.12
6.215 – 6.218	12.57675 – 12.57725	123 – 138	608 – 614	2483.5 – 2500	8.025 – 8.5	23.6 – 24.0
6.26775 – 6.26825	13.36 – 13.41	149.9 – 150.05	960 – 1240	2690 – 2900	9.0 – 9.2	31.2 – 31.8
6.31175 – 6.31225	16.42 – 16.423	156.52475 – 156.52525	1300 – 1427	3260 – 3267	9.3 – 9.5	36.43 – 36.5
						Above 38.6

(b) Except as provided in 15.205 paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e), regardless of the field strength limits specified elsewhere in this Subpart, the provisions of this Section apply to emissions from any intentional radiator.

Compliant

N/A

Applicable Standard: FCC §15.209 Radiated emission limits, general requirements.

(a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

(b) In the emission table above, the tighter limit applies at the band edges.

Compliant

N/A


Applicable Standard: FCC §15.247 Radiated emission limits.

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Setup

The radiated emissions tests were performed in the 3-meter semi-anechoic chamber test site, using the setup in accordance with ANSI C63.4-2003. The specification used was the FCC 15 Subpart C limits.

Test Setup Diagram

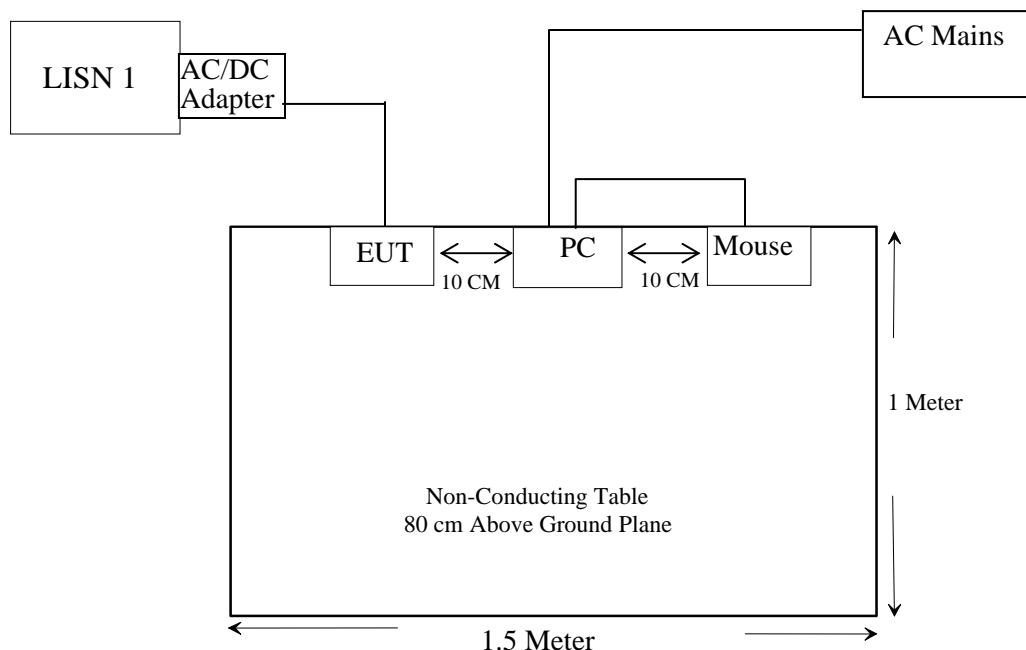

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Date
Sonoma	Amplifier, Pre	317	260408	2006-02-03
HP	Analyzer, Spectrum	8565EC	3946A00131	2006-01-11
HP	Pre, Amplifier (1 ~ 26.5 GHz)	8449B	3147A00400	2005-08-10
Sunol Sciences	Antenna	JB3	A020106-3/S006628	2006-03-14
A. R.A	Horn Antenna	DRG-118/A	1132	2005-08-17

* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Environmental Conditions

Temperature	24 ° C
Relative Humidity:	65 %
ATM Pressure:	1020 mbar

*The testing was performed by James Ma on 2006-11-13.

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations.

All data were recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limits), and are distinguished with a "QP" in the data table.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Cord. Amp.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Cord. Amp.} - \text{Limit}$$

Summary of Test Results

According to the data hereinafter, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247 standard's radiated emissions limits for class B devices, and had the worst margin of:

- 8.7 dB at 4803.9 MHz** in the **Vertical** polarization at **Low** Channel
- 9.0 dB at 4884.0 MHz** in the **Vertical** polarization at **Middle** Channel
- 8.6 dB at 4958.0 MHz** in the **Vertical** polarization at **High** Channel

Please refer to the following tables for full test results

Radiated Emissions Test Result Data: Measured at 3 meter - With Notch filter

Run # 1: Low CH = 2402.0 MHz

Frequency (MHz)	Reading (dBuV)	Azimuth Degrees	Height (m)	Polarization H / V	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Comments
2402.0000	115.6	235	1.0	V	28.7	1.5	37.4	108.4			Fund/Peak
2402.0000	110.8	200	1.0	H	28.7	1.5	37.4	103.6			Fund/Peak
2402.0000	82.8	187	1.0	V	28.7	1.5	37.4	75.6			Ave
2402.0000	84.2	200	1.0	H	28.7	1.5	37.4	76.9			Ave
4803.9000	45.7	255	1.4	V	32.5	1.9	34.8	45.3	54	-8.7	Ave
4803.9000	44.4	163	1.4	H	32.5	1.9	34.8	44.0	54	-10.0	Ave
4803.9000	62.5	163	1.4	H	32.5	1.9	34.8	62.1	74	-11.9	Peak
4803.9000	61.3	255	1.4	V	32.5	1.9	34.8	60.9	74	-13.1	Peak
7205.0000	31.0	163	1.3	H	36.7	4.2	34.9	37.0	56.9	-19.9	Ave
7205.0000	32.0	26	1.4	V	36.7	4.2	34.9	38.0	55.6	-17.6	Ave
7205.0000	45.3	163	1.3	H	36.7	4.2	34.9	51.3	83.6	-32.3	Peak
7205.0000	46.0	26	1.4	V	36.7	4.2	34.9	52.0	88.4	-36.4	Peak

Run # 2: Mid CH = 2442.0 MHz


Frequency (MHz)	Reading (dBuV)	Azimuth Degrees	Height (m)	Polarization H / V	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Comments
2442.0000	112.5	7	1.2	V	28.7	1.5	37.0	105.7			Fund/Peak
2442.0000	107.2	199	1.2	H	28.7	1.5	37.0	100.4			Fund/Peak
2442.0000	84.7	7	1.2	V	28.7	1.5	37.0	77.9			Ave
2442.0000	80.2	202	1.2	H	28.7	1.5	37.0	73.4			Ave
4884.0000	45.7	270	2.4	V	32.5	1.9	35.1	45.0	54	-9.0	Ave
7326.0000	37.2	198	1.2	V	36.7	4.2	35.1	43.0	54	-11.0	Ave
4884.0000	43.3	28	1.8	H	32.5	1.9	35.1	42.7	54	-11.3	Ave
7326.0000	36.5	23	1.7	H	36.7	4.2	35.1	42.3	54	-11.7	Ave
7326.0000	55.4	198	1.2	V	36.7	4.2	35.1	61.2	74	-12.8	Peak
7326.0000	55.3	23	1.7	H	36.7	4.2	35.1	61.1	74	-12.9	Peak
4884.0000	61.2	259	1.4	V	32.5	1.9	35.1	60.5	74	-13.5	Peak
4884.0000	59.0	162	2.0	H	32.5	1.9	35.1	58.3	74	-15.7	Peak

Run # 3: High CH = 2479.0 MHz


Frequency (MHz)	Reading (dBuV)	Azimuth Degrees	Height (m)	Polarization H / V	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Comments
2479.0000	112.9	292	1.5	V	28.7	1.5	37.2	105.9			Fund/Peak
2479.0000	109.3	255	1.3	H	28.7	1.5	37.2	102.2			Fund/Peak
2479.0000	88.5	180	1.3	V	28.7	1.5	37.2	81.4			Ave
2479.0000	88.4	180	1.2	H	28.7	1.5	37.2	81.4			Ave
4958.0000	45.8	143	1.6	V	32.5	1.9	34.8	45.4	54	-8.6	Ave
4958.0000	44.6	321	1.2	H	32.5	1.9	34.8	44.2	54	-9.8	Ave
7437.0000	33.1	211	1.5	H	36.7	4.2	34.7	39.3	54	-14.7	Ave
4958.0000	58.4	321	1.2	H	32.5	1.9	34.8	58.0	74	-16.0	Peak
4958.0000	57.7	143	1.6	V	32.5	1.9	34.8	57.3	74	-16.7	Peak
7437.0000	30.7	189	1.8	V	36.7	4.2	34.7	36.9	54	-17.1	Ave
7437.0000	45.2	211	1.5	H	36.7	4.2	34.7	51.4	74	-22.6	Peak
7437.0000	43.7	189	1.8	V	36.7	4.2	34.7	49.9	74	-24.1	Peak

Low Channel Band Edges on Restriction Band


Peak

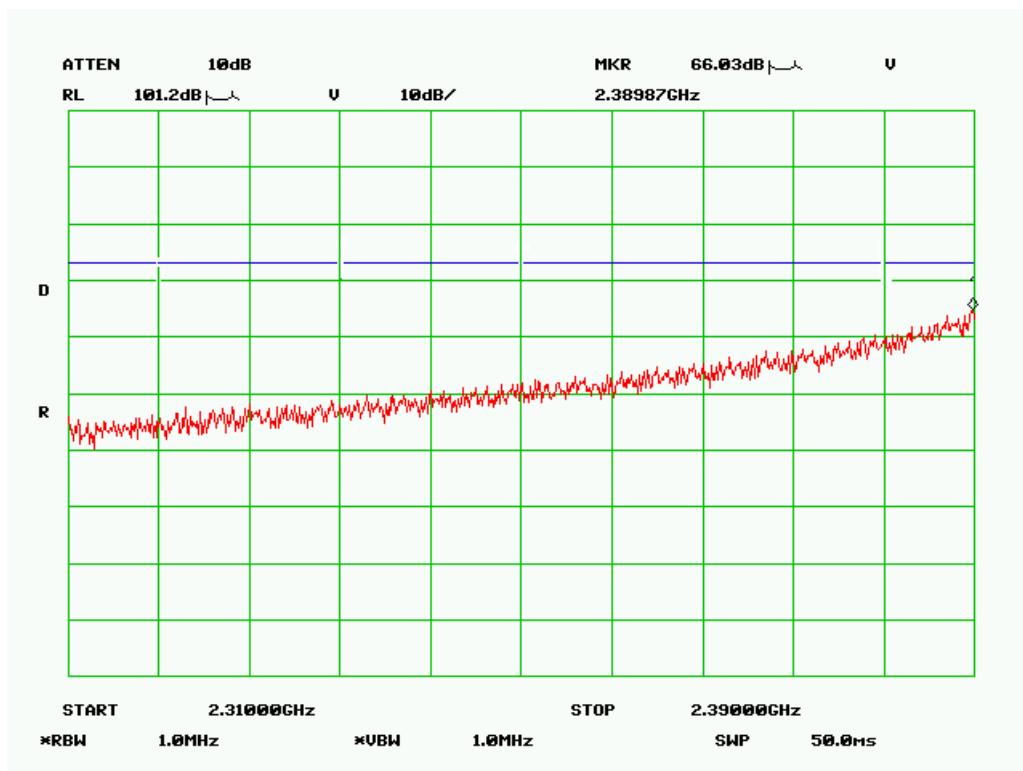


Average

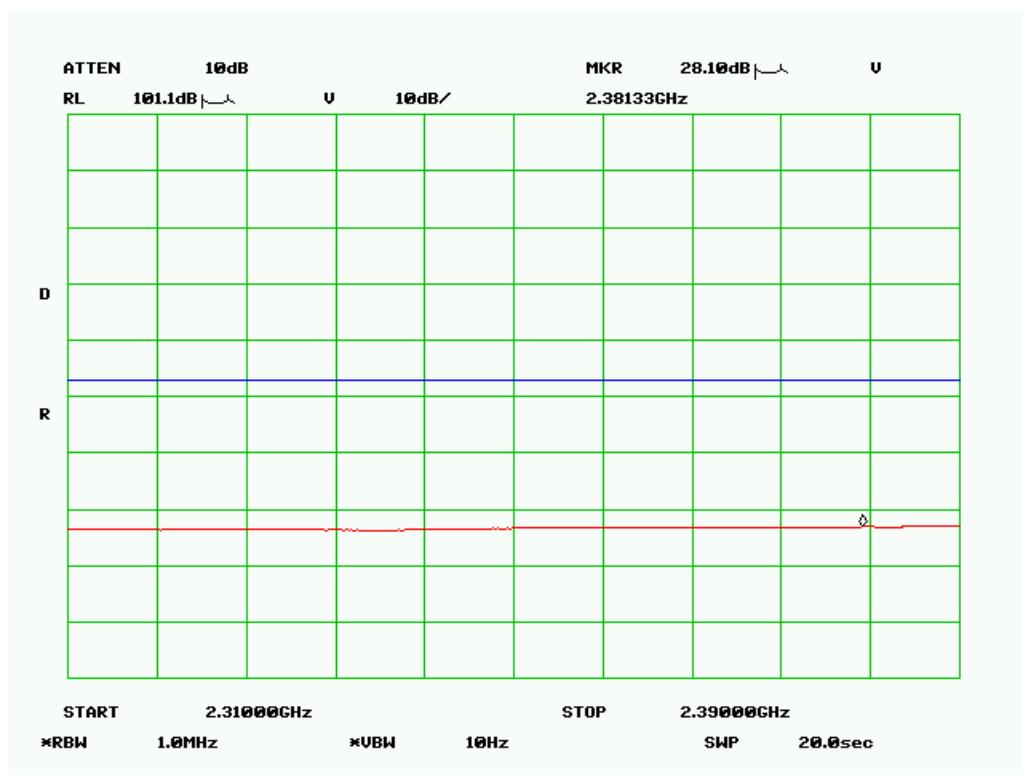**High Channel Band Edges on Restriction Band**

Peak

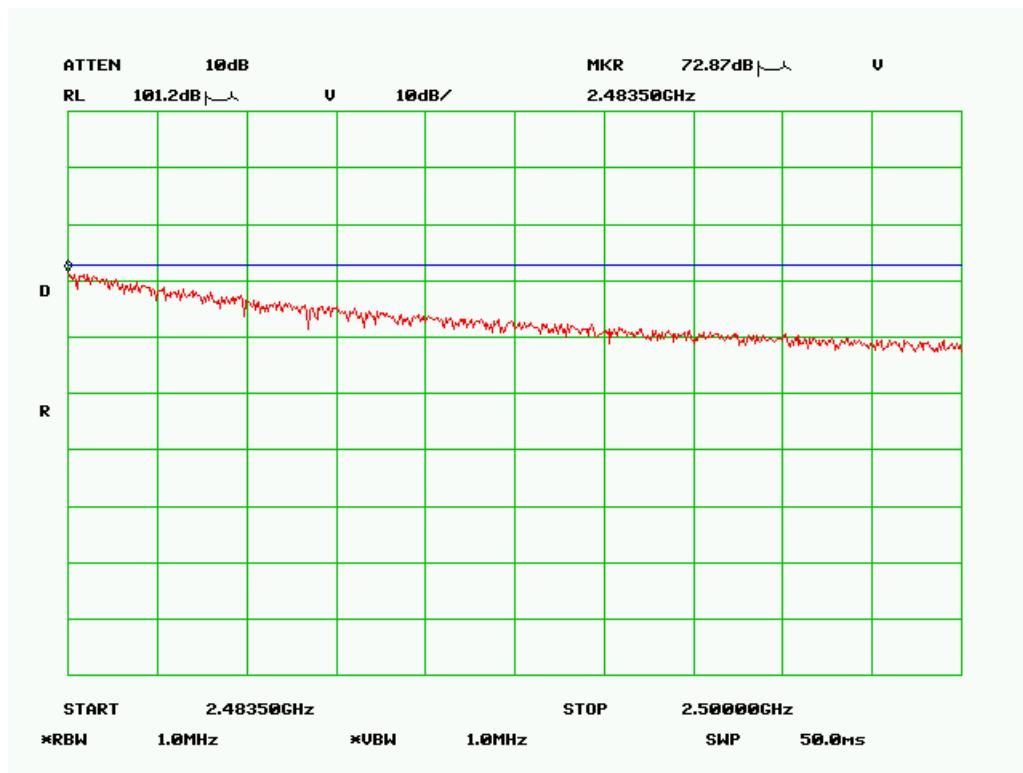

Average

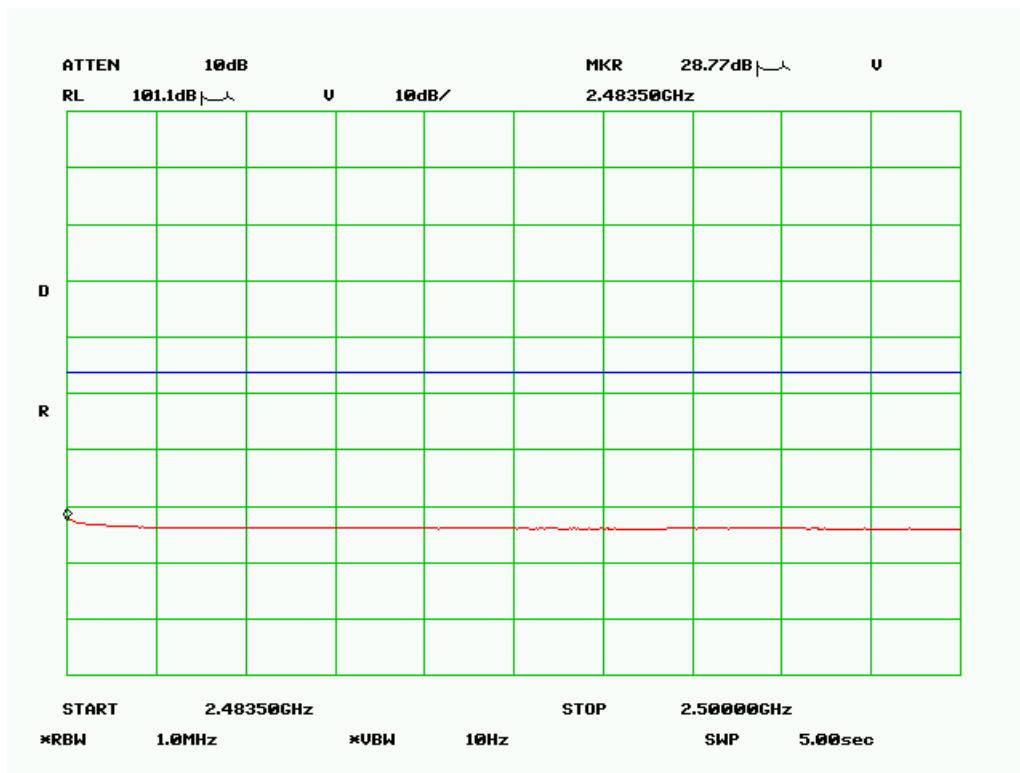

§15.247 (a) (1) - HOPPING CHANNEL SEPARATION

Applicable Standard

According to §15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


Measurement Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on a bench without connection to measurement instrument Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the Max-Hold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function, and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

Test Equipment

Manufacturer	Description	Model No.	Serial No.	Calibration Date
HP	Analyzer, Spectrum	8565EC	3946A00131	2006-01-11

* **Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Test Setup Diagram**Environmental Conditions**



Temperature:	24 °C
Relative Humidity:	65 %
ATM Pressure:	1020 mbar


*The testing was performed by James Ma on 2006-11-13.

Measurement Results

Channel	Frequency (MHz)	Channel Separation (KHz)	Limit >(KHz)
Low	2402.0	992	508
Mid	2442.0	975	508
High	2479.0	1028	519

Please refer to the following plots.

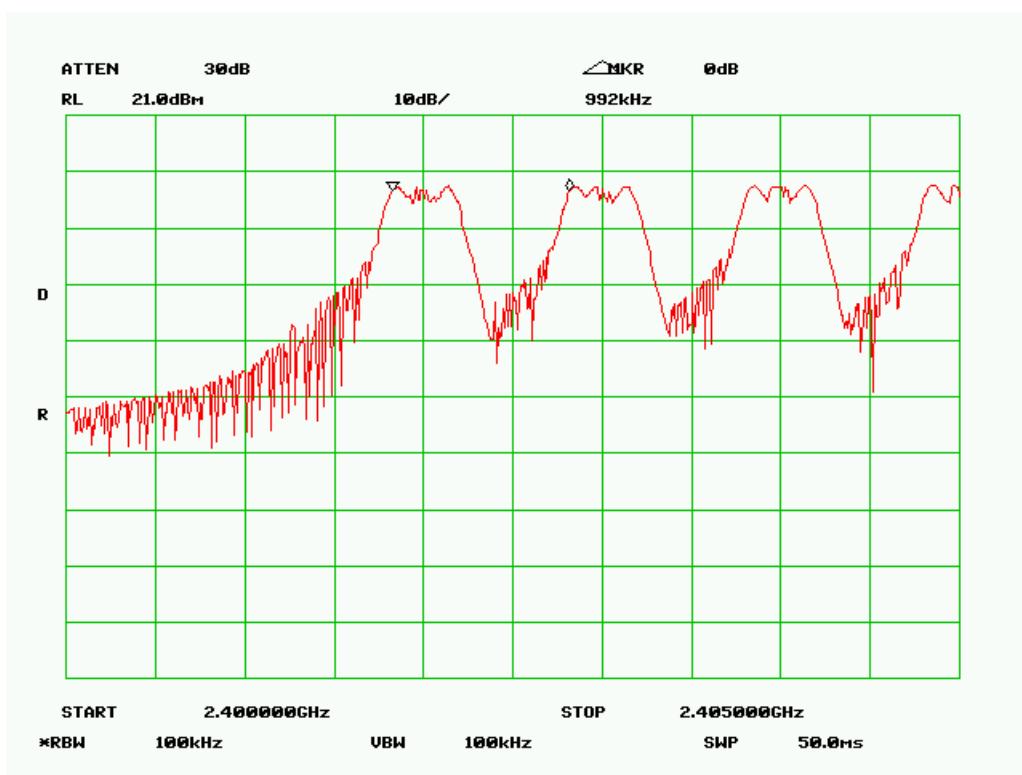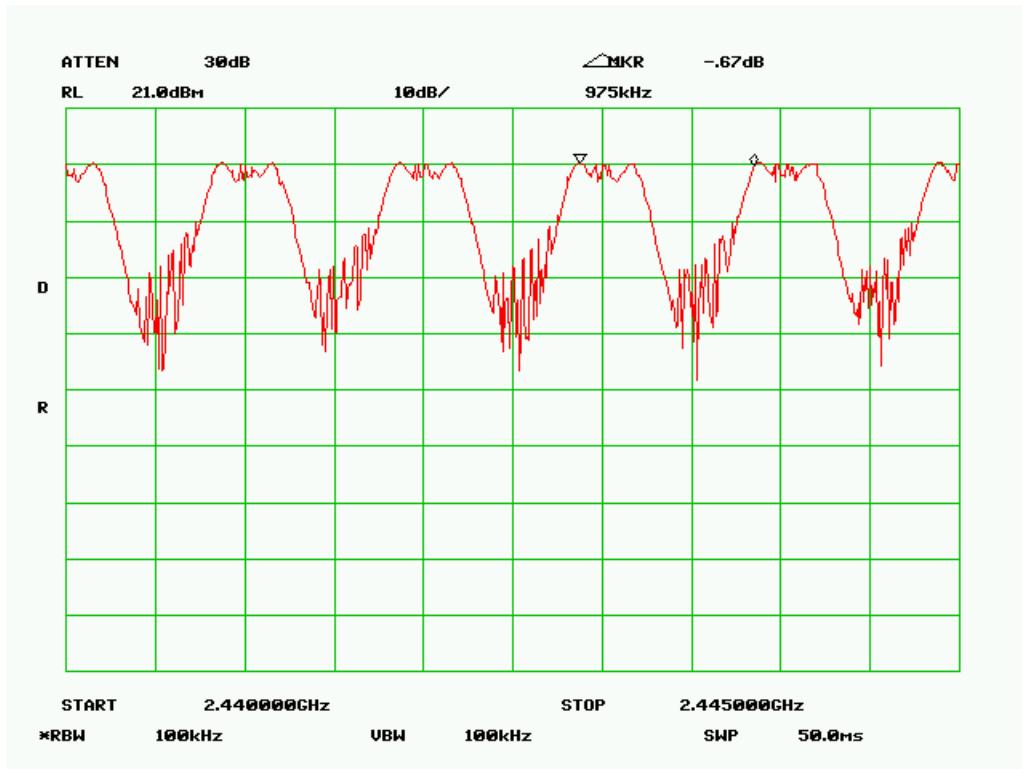Low Channel**Middle Channel**

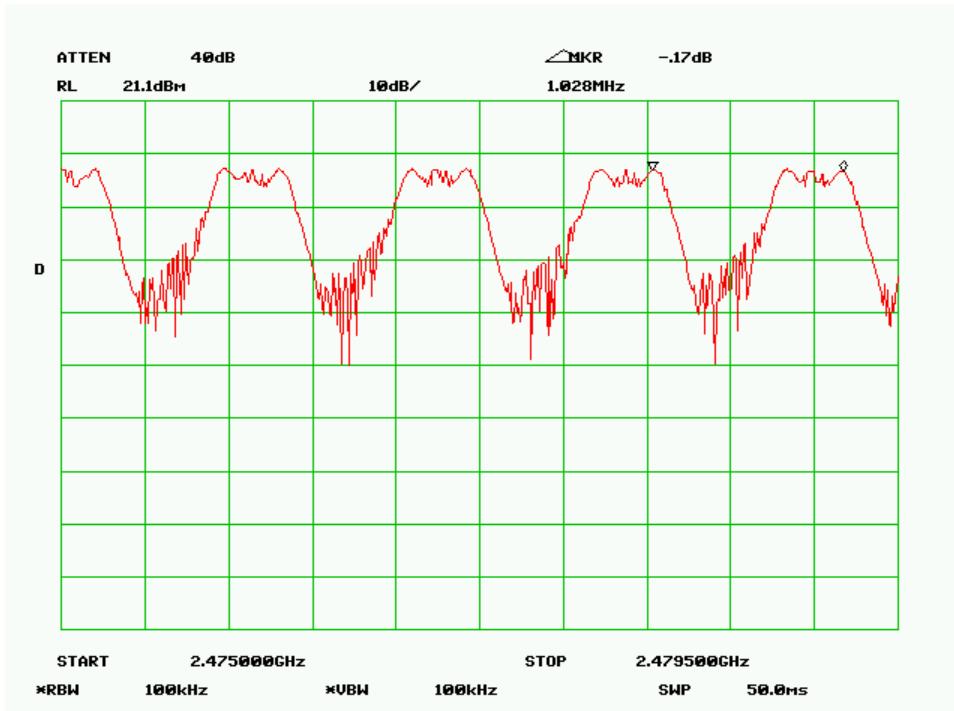High Channel

§15.247 (a) (1) (i) – HOPPING CHANNEL BANDWIDTH

Applicable Standard

According to §15.247 (a)(1)(i): For frequency hopping systems operating in the 902–928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

Measurement Procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emissions bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment

Manufacturer	Description	Model No.	Serial No.	Calibration Date
HP	Analyzer, Spectrum	8565EC	3946A00131	2006-01-11

* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Test Setup Diagram



Environmental Conditions



Temperature:	24 ° C
Relative Humidity:	65 %
ATM Pressure:	1020 mbar


*The testing was performed by James Ma on 2006-11-13.

Measurement Results

Channel	Frequency (MHz)	Channel Bandwidth (KHz)
Low	2402.0	508
Mid	2442.0	508
High	2479.0	519

Please refer to the following plots.

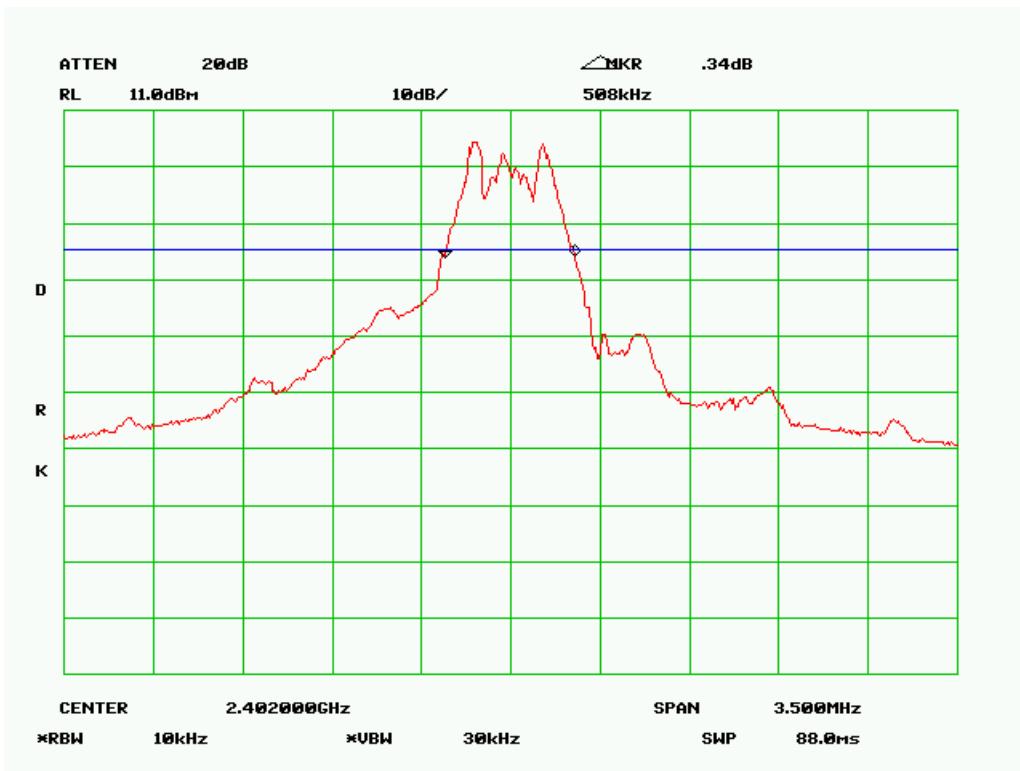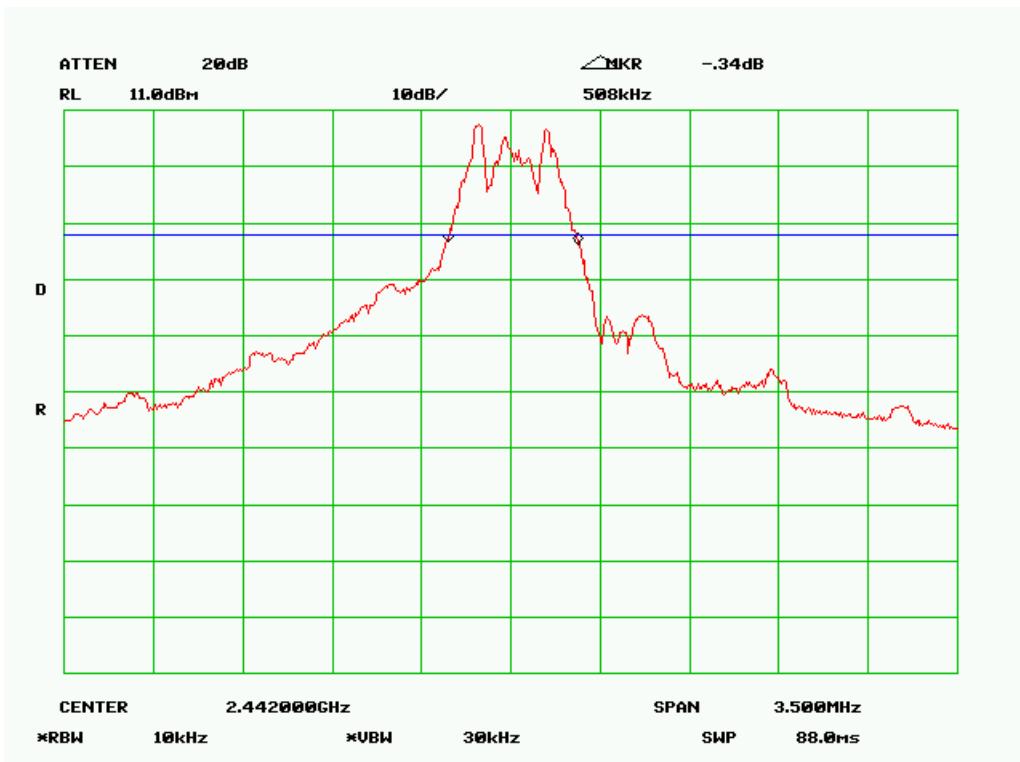Measurement Result**Low Channel****Middle Channel**

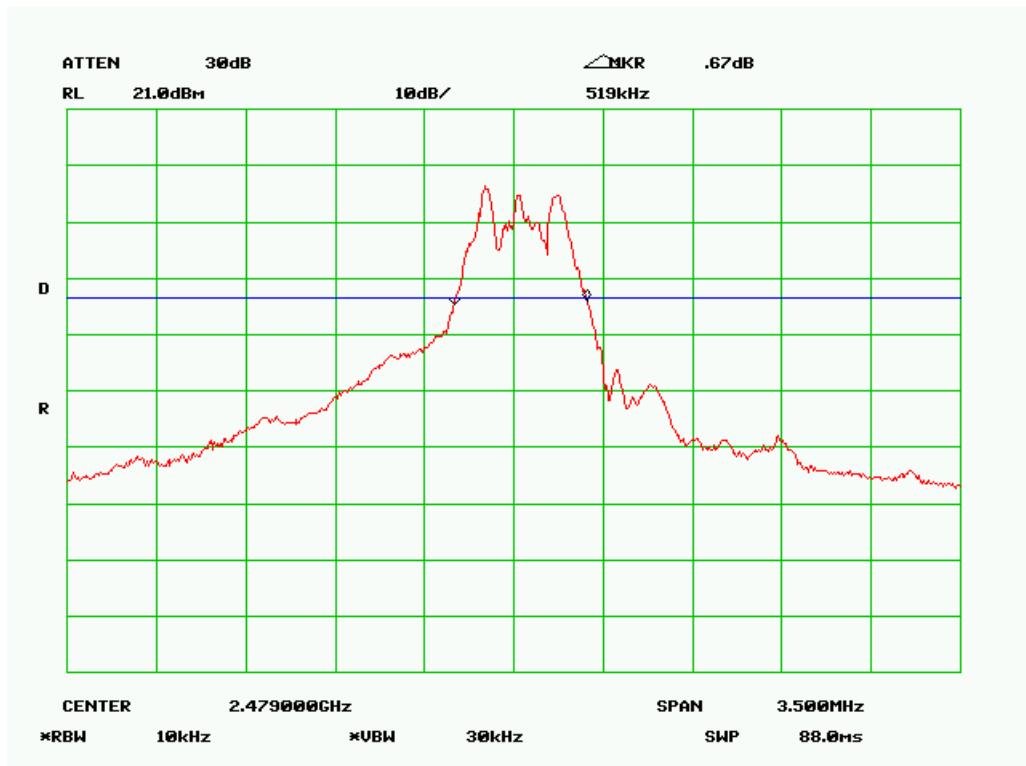High Channel

§15.247 (a) (1) (ii) - NUMBER OF HOPPING FREQUENCIES USED

Applicable Standard

According to §15.247(a)(1)(iii), For frequency hopping systems operating in the 902–928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.

Measurement Procedure


1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the bench without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the SA on Max-Hold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

Test Equipment

Manufacturer	Description	Model No.	Serial No.	Calibration Date
HP	Analyzer, Spectrum	8565EC	3946A00131	2006-01-11

* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Test Setup Diagram



Environmental Conditions

Temperature:	24 ° C
Relative Humidity:	65 %
ATM Pressure:	1020 mbar

*The testing was performed by James Ma on 2006-11-13.


Measurement Result: 77 channels

Please refer to the following plots:

First plot is 38 channels



Second plot is 39 channels

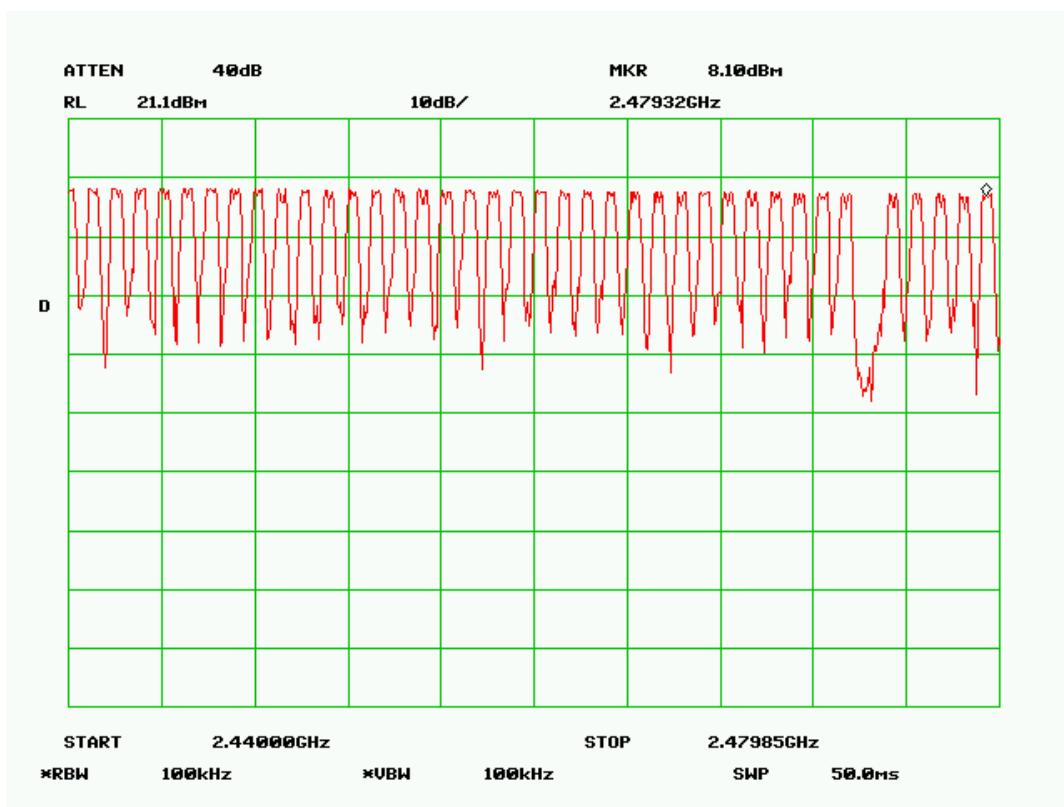

§15.247(a) (1) (i) - DWELL TIME

Applicable Standard

According to §15.247 (a)(1)(i), For frequency hopping systems operating in the 902–928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.

Measurement Procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.

Test Equipment

Manufacturer	Description	Model Number	Serial Number	Calibration Date
HP	Analyzer, Spectrum	8565EC	3946A00131	2006-01-11

* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Test Setup Diagram



Environmental Conditions



Temperature:	24 ° C
Relative Humidity:	65 %
ATM Pressure:	1020 mbar



*The testing was performed by James Ma on 2006-11-13.



Measurement Results:

Channel	Frequency (MHz)	Pulse Width (ms)	Occupied Time	Dwell Time (sec.)	Limit	Result
Low	2402.0	1.1500	44	0.0506	0.4	Pass
Mid	2442.0	1.1583	44	0.0510	0.4	Pass
High	2479.0	1.1583	61	0.0707	0.4	Pass

Please refer the following plots.

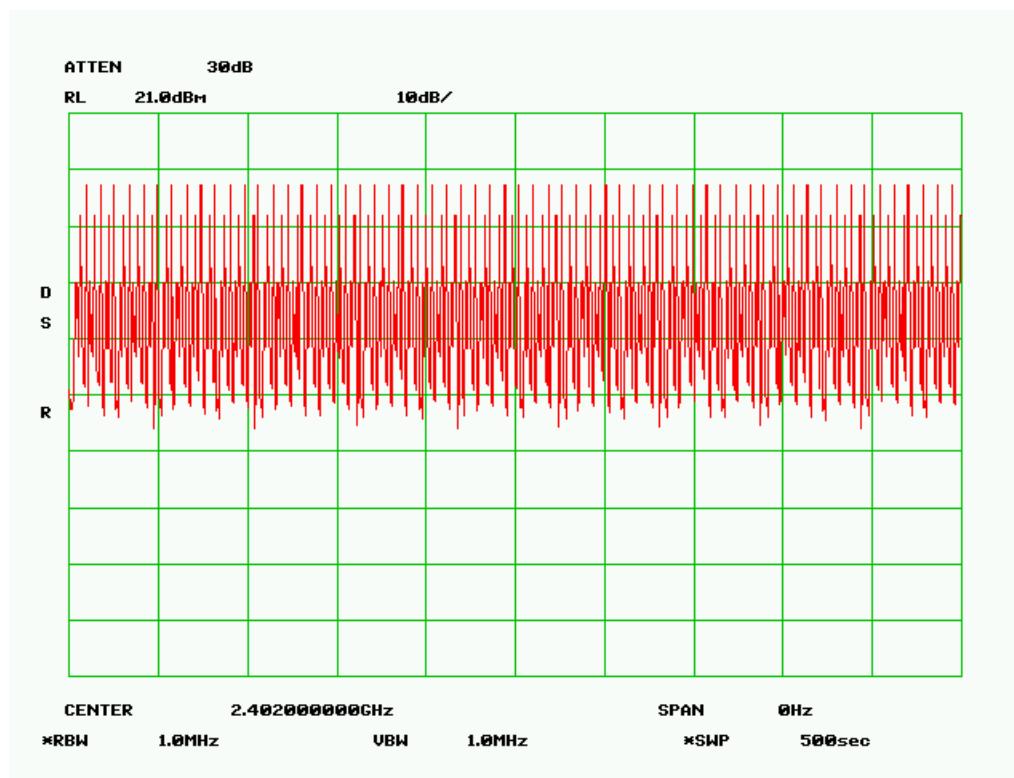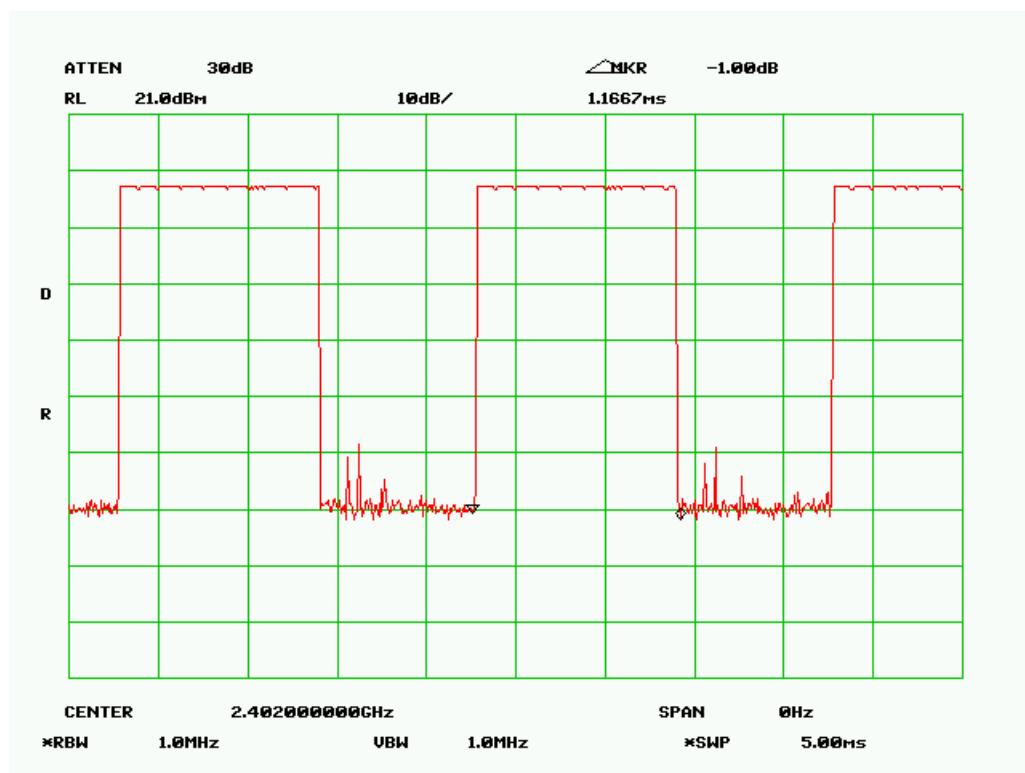Low Channel

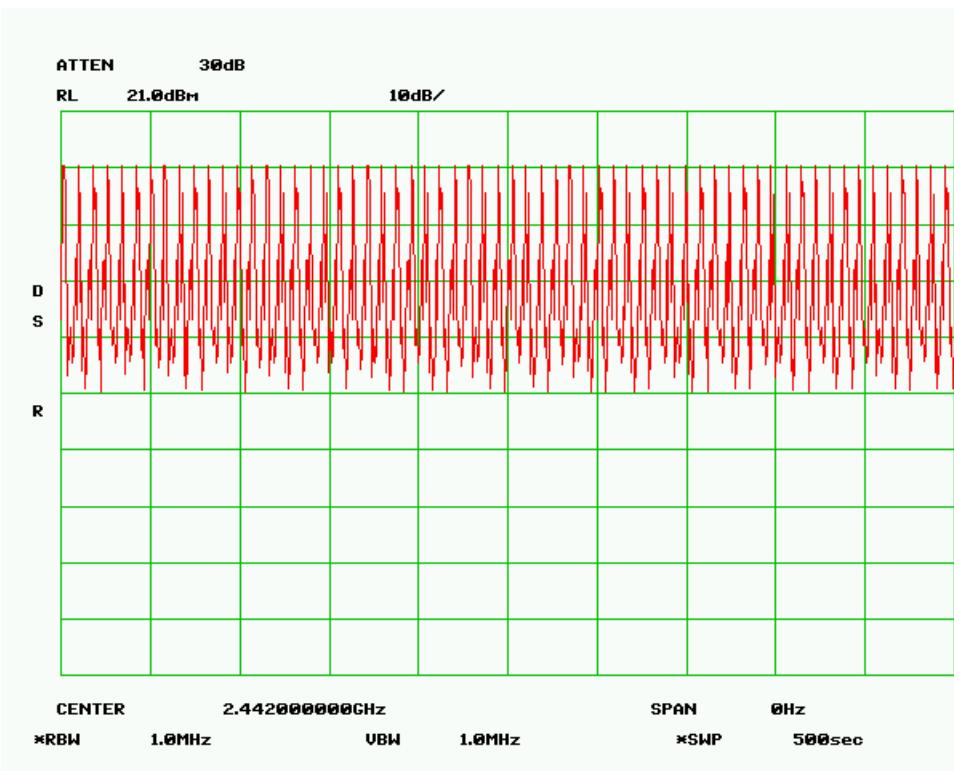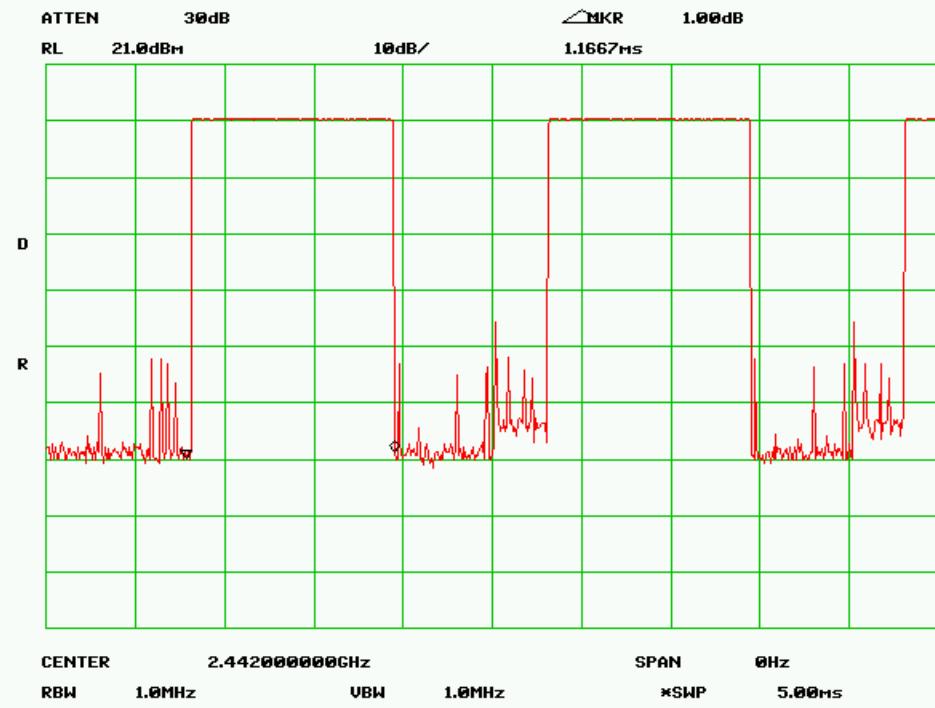Middle Channel

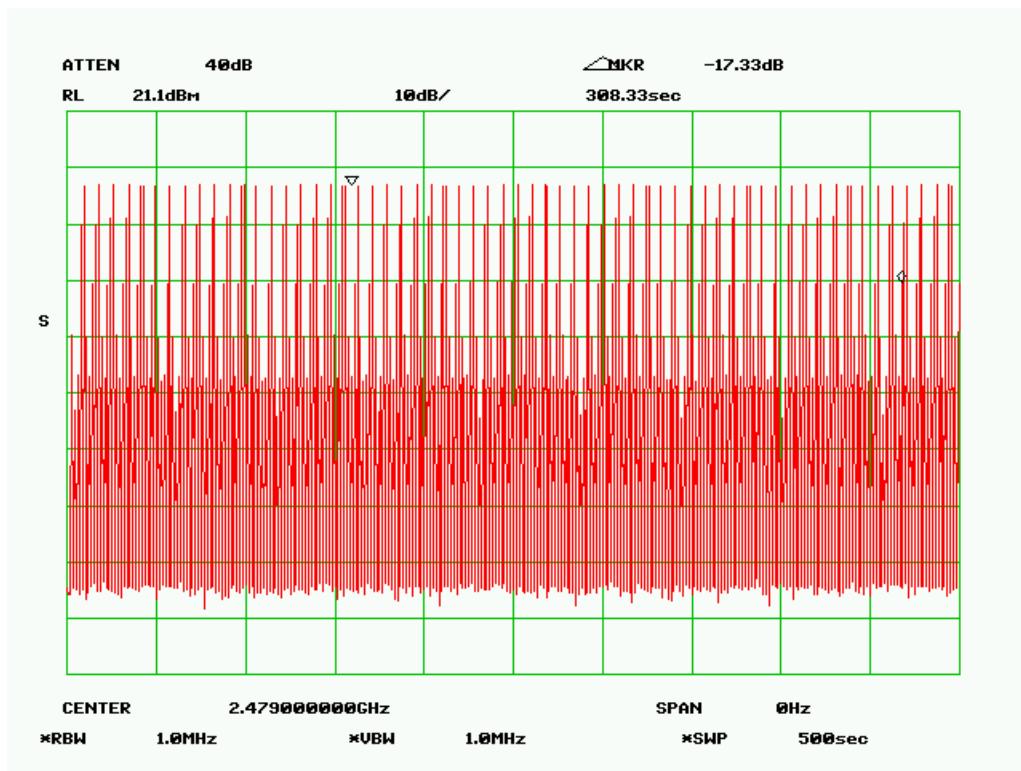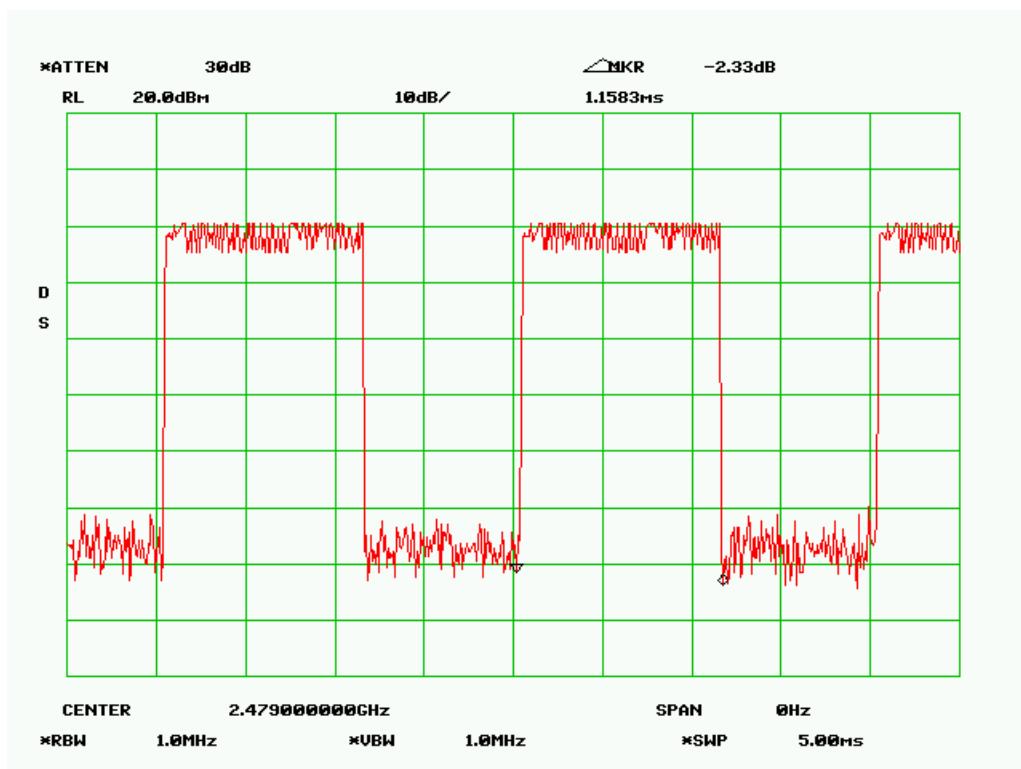High Channel

§15.247(B) (2) - MAXIMUM PEAK OUTPUT POWER

Applicable Standard

According to §15.247(b) (2), For frequency hopping systems operating in the 902–928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

Measurement Procedure


1. Place the EUT on the turntable and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Test Equipment

Manufacturer	Description	Model Number	Serial Number	Calibration Date
HP	Analyzer, Spectrum	8565EC	3946A00131	2006-01-11

* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Test Setup Diagram





Environmental Conditions


Temperature:	24 ° C
Relative Humidity:	65 %
ATM Pressure:	1020 mbar

*The testing was performed by James Ma on 2006-11-13.

Measurement Result

Channel	Frequency (MHz)	Max Peak Output Power		Limit (mw)	Result
		(dBm)	(mw)		
Low	2402.0	8.33	6.81	1000	pass
Mid	2442.0	11.33	13.58	1000	pass
High	2479.0	10.17	10.40	1000	pass

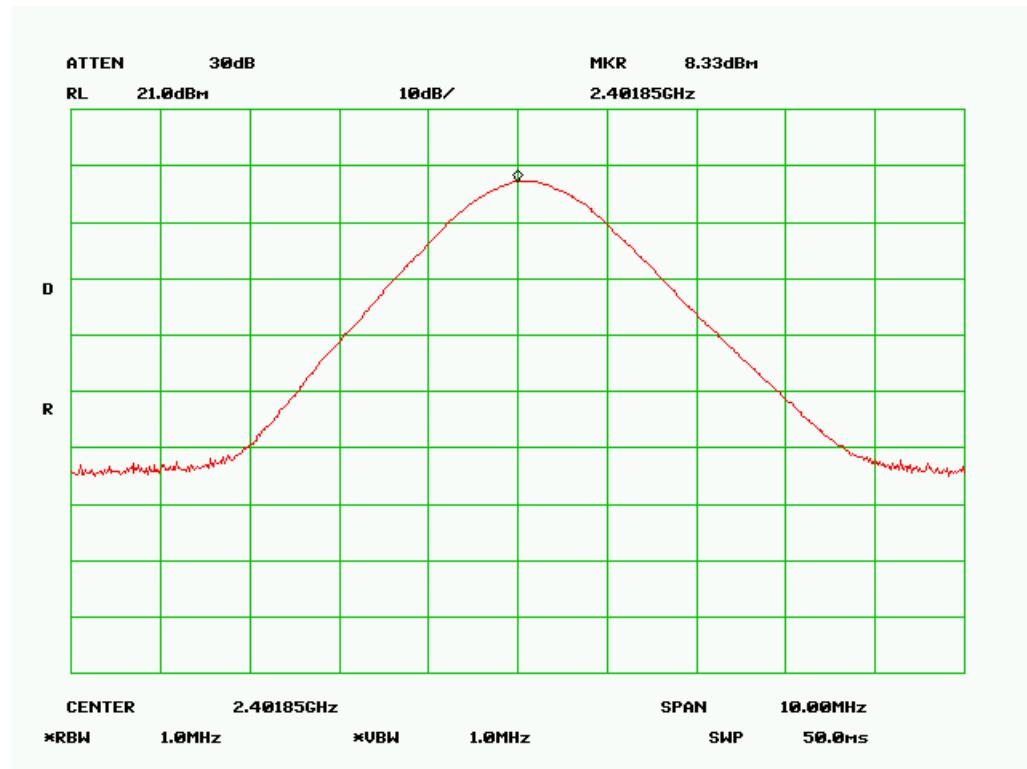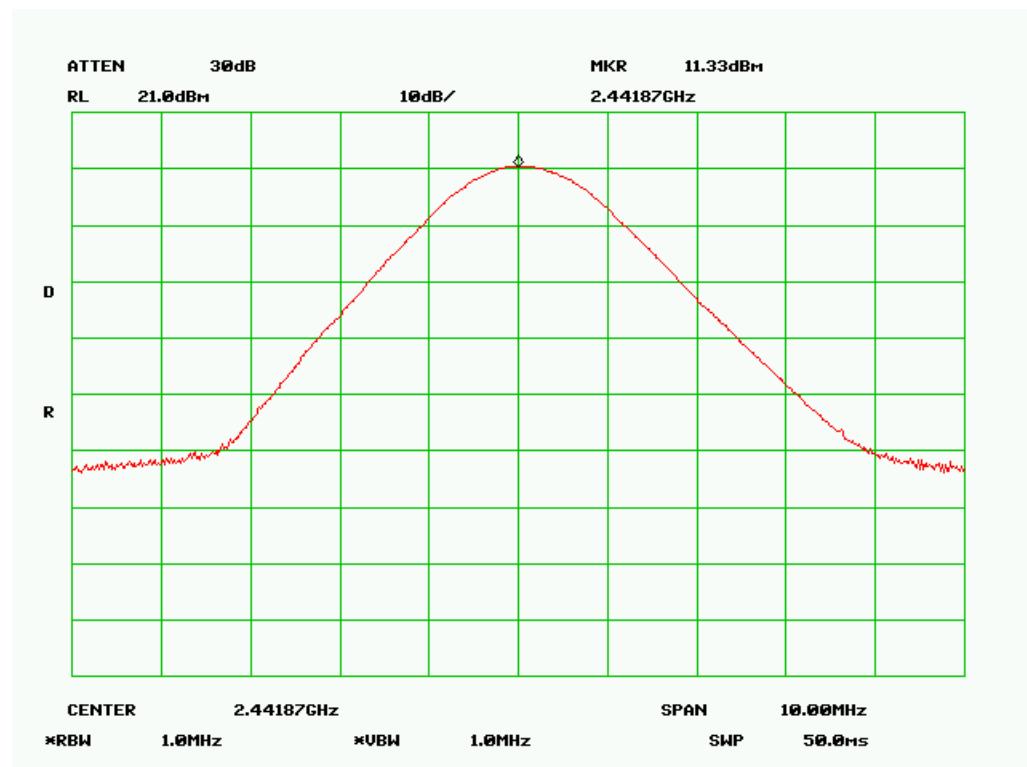Plots of Maximum Peak Output Power**Low Channel****Middle Channel**

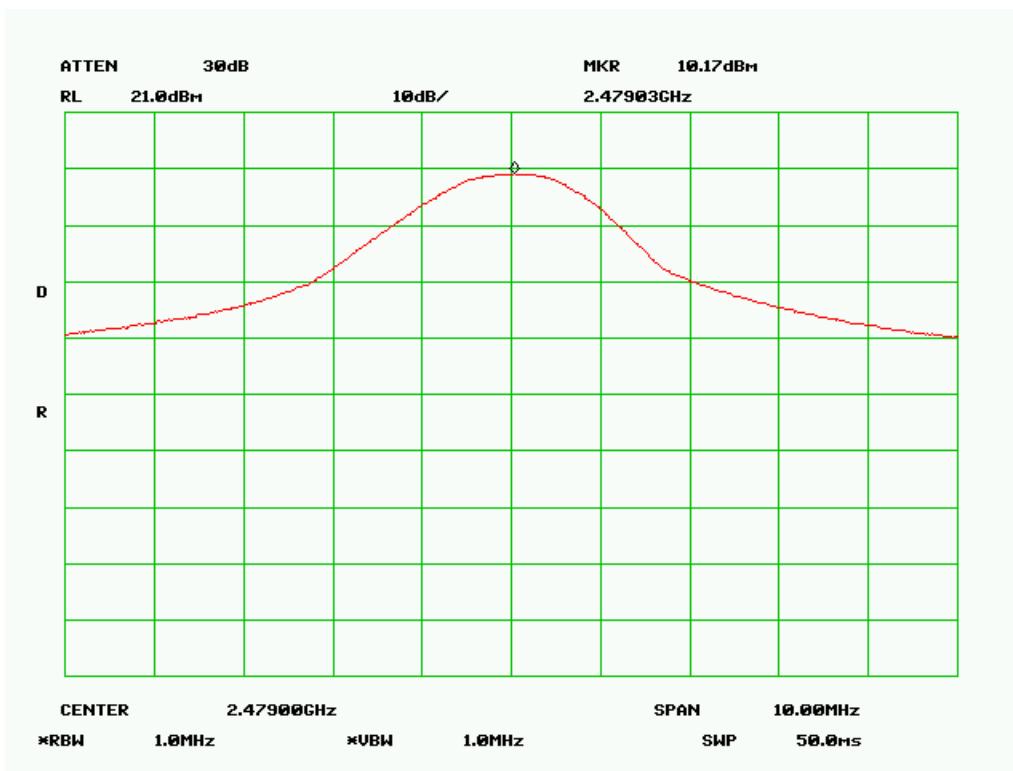High Channel

§15.247 (d) - 100 KHz BANDWIDTH OF BAND EDGES

Applicable Standard

According to §15.247(c), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required.

Measurement Procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment

Manufacturer	Description	Model No.	Serial No.	Calibration Date
Agilent	Analyzer, Spectrum	E4446A	US44300386	2006-03-06

* **Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Test Setup Diagram



Environmental Conditions



Temperature:	24 ° C
Relative Humidity:	65 %
ATM Pressure:	1020 mbar

*The testing was performed by James Ma on 2006-11-13

Please refer to the following plots for results.

Plots of 100 KHz Bandwidth of Band Edge

Hopping Mode:

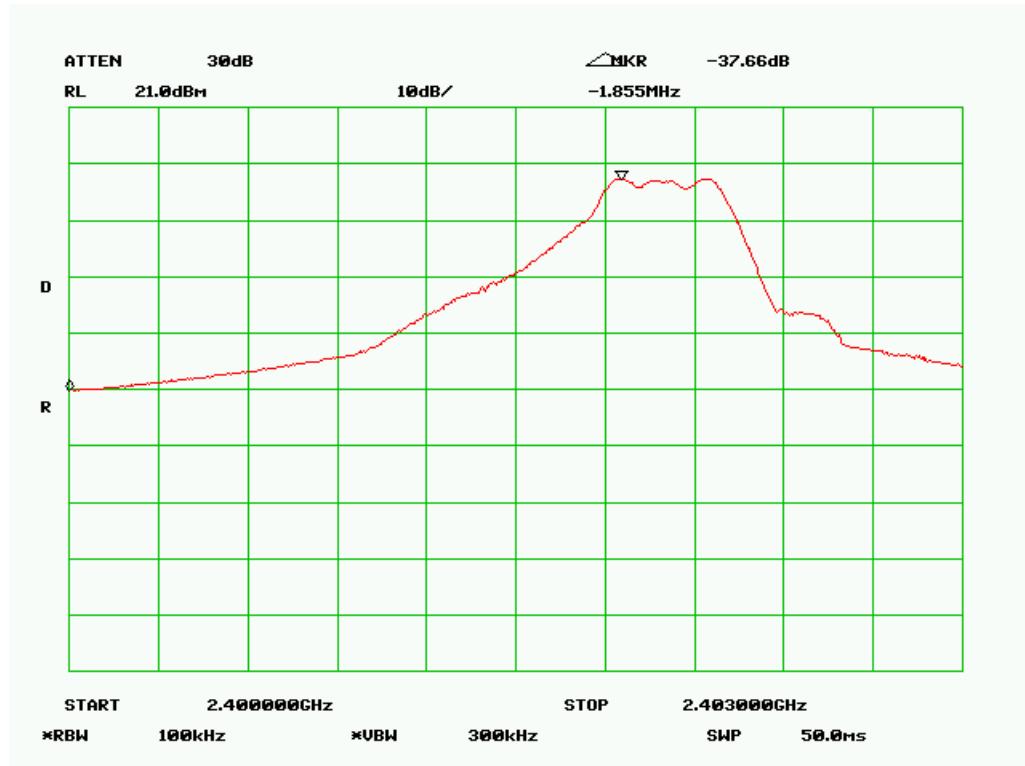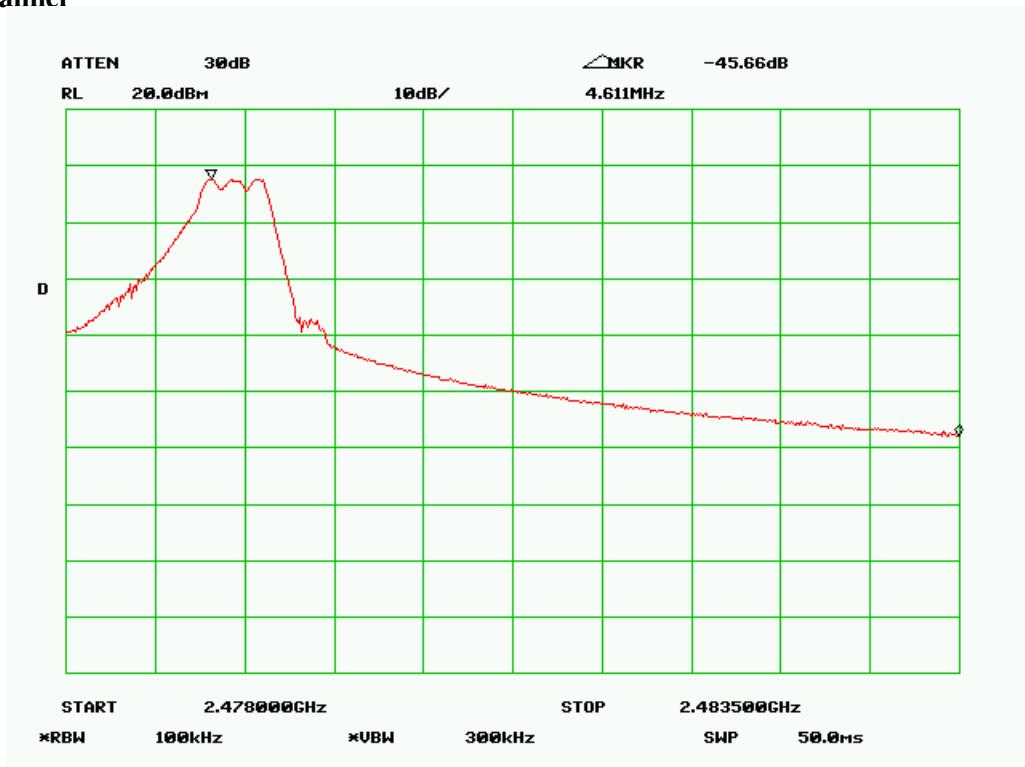Low Channel**High Channel**

§ 15.247 (e) (i) and § 2.1091 - RF EXPOSURE

According to §15.247(e)(i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

MPE Prediction

Predication of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

Maximum peak output power at antenna input terminal: 11.33 (dBm)

Maximum peak output power at antenna input terminal: 13.58 (mW)

Prediction distance: 20 (cm)

Predication frequency: 2442 (MHz)

Antenna Gain (typical): 5.0 (dBi)

Antenna gain: 3.16 (numeric)

Power density at predication frequency at 20 cm: 0.00854 (mW/cm²)

MPE limit for uncontrolled exposure at prediction frequency: 1.0 (mW/cm²)

Test Result

The EUT is a mobile device. The power density level at 20 cm is 0.00854 mW/cm², which is below the uncontrolled exposure limit of 1.0 mW/cm² at 2442 MHz.

§2.1051 SPURIOUS EMISSIONS AT ANTENNA PORT

Applicable Standard

According to §15.209 (f) and §15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in §15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in §15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit

Measurement Procedure


1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on a bench without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the SA on Max-Hold Mode, and then keep the EUT in transmitting mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

Test Equipment

Manufacturer	Description	Model No.	Serial No.	Calibration Date
Agilent	Analyzer, Spectrum	E4446A	US44300386	2006-03-06

* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Test Setup Diagram



Environmental Conditions



Temperature:	26 °C
Relative Humidity:	65 %
ATM Pressure:	1020 mbar



*The testing was performed by James Ma on 2006-11-13.


Please refer to the following plots.

Measurement Results


Low Channel

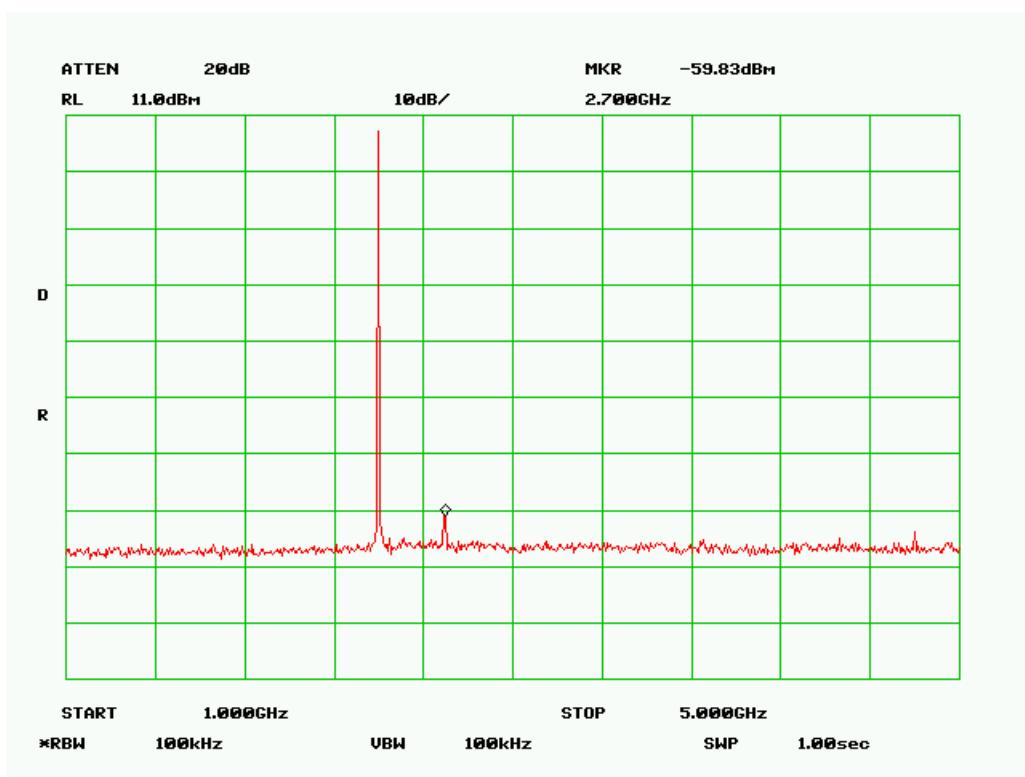
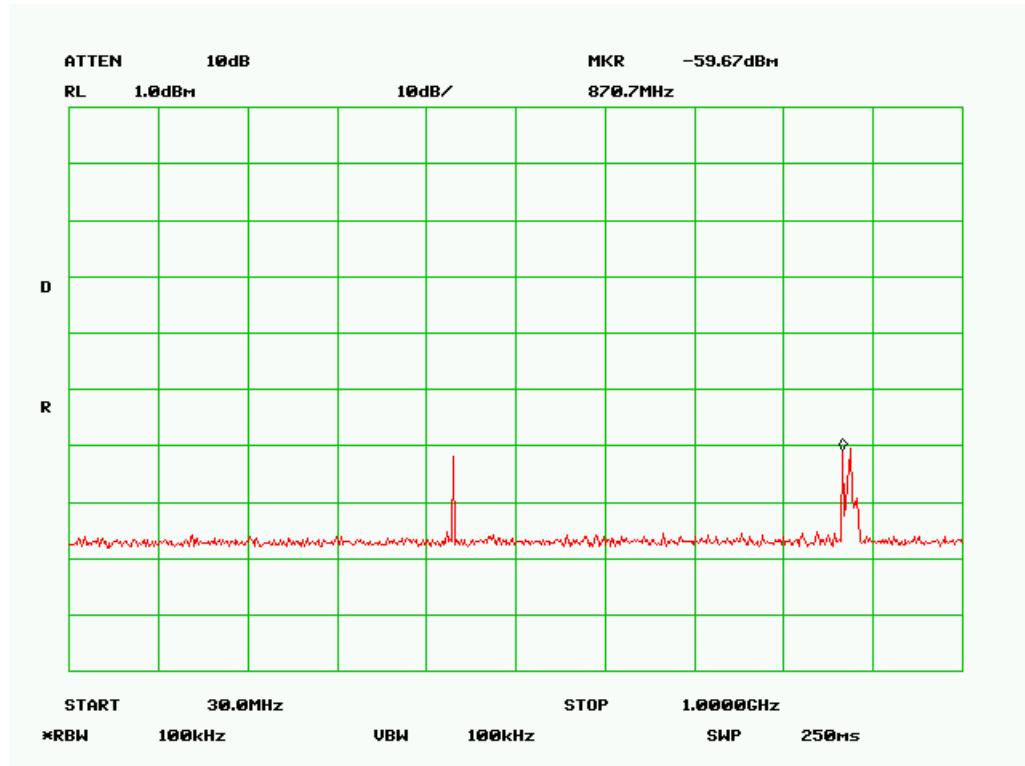


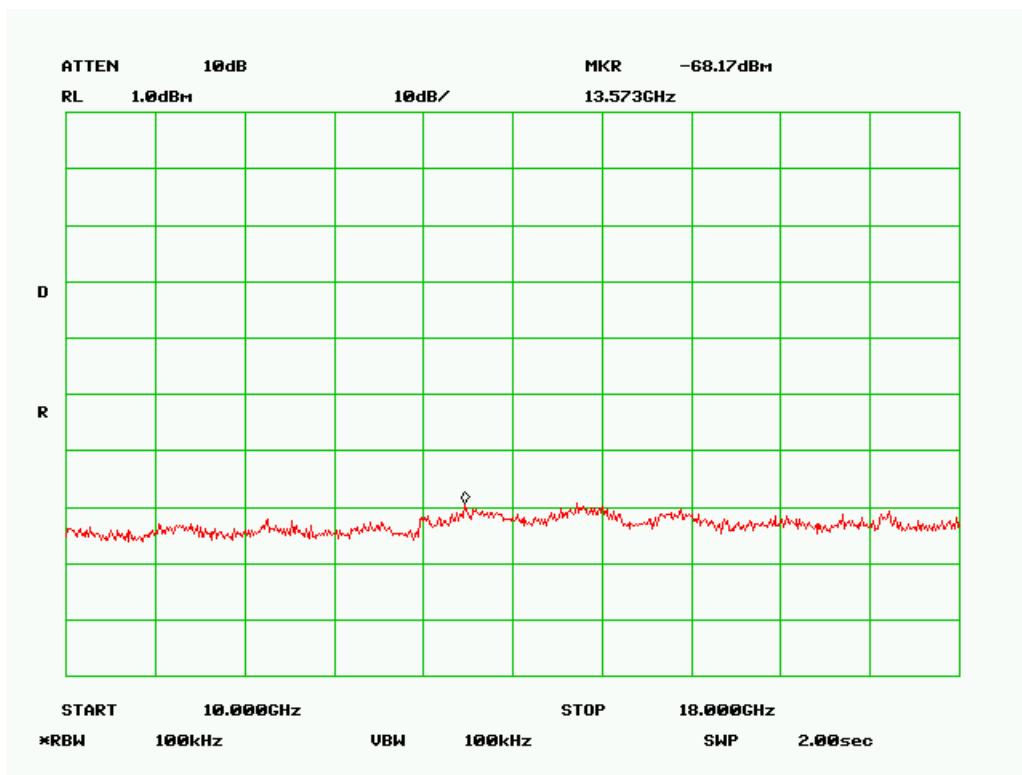
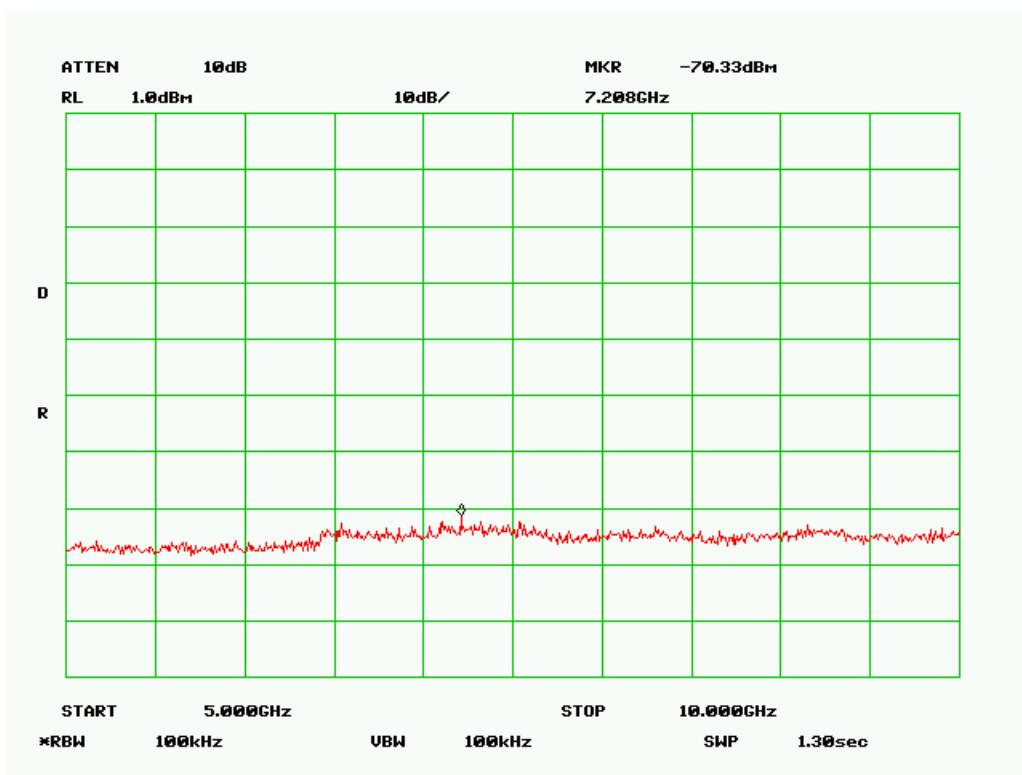


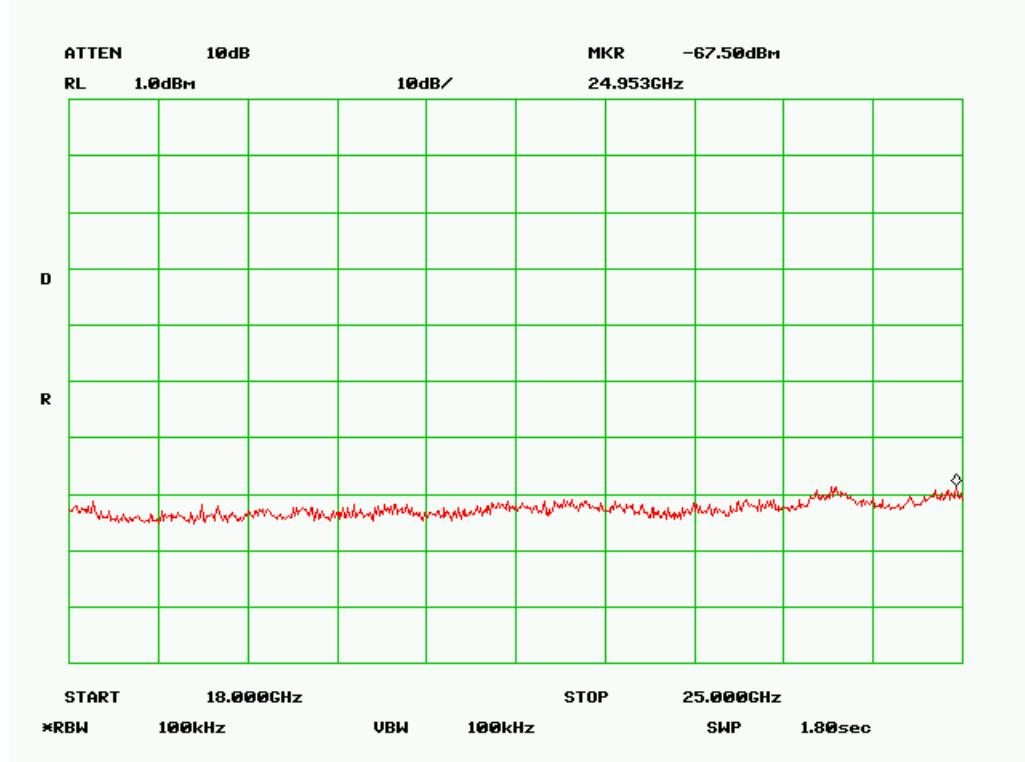

Middle Channel

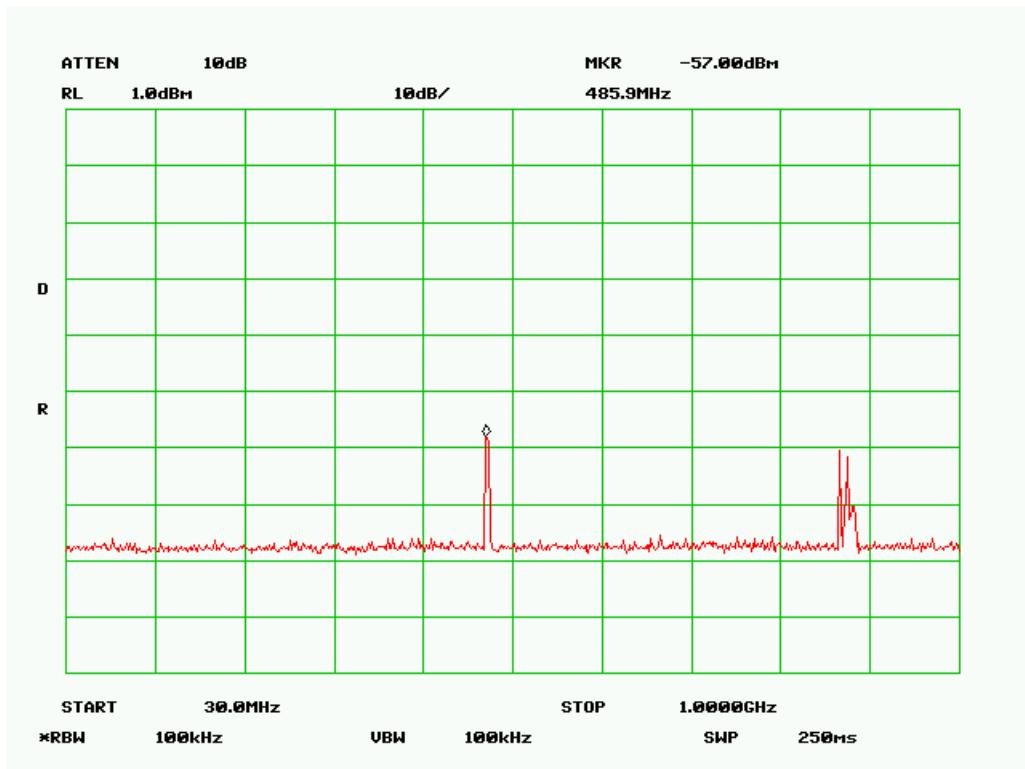

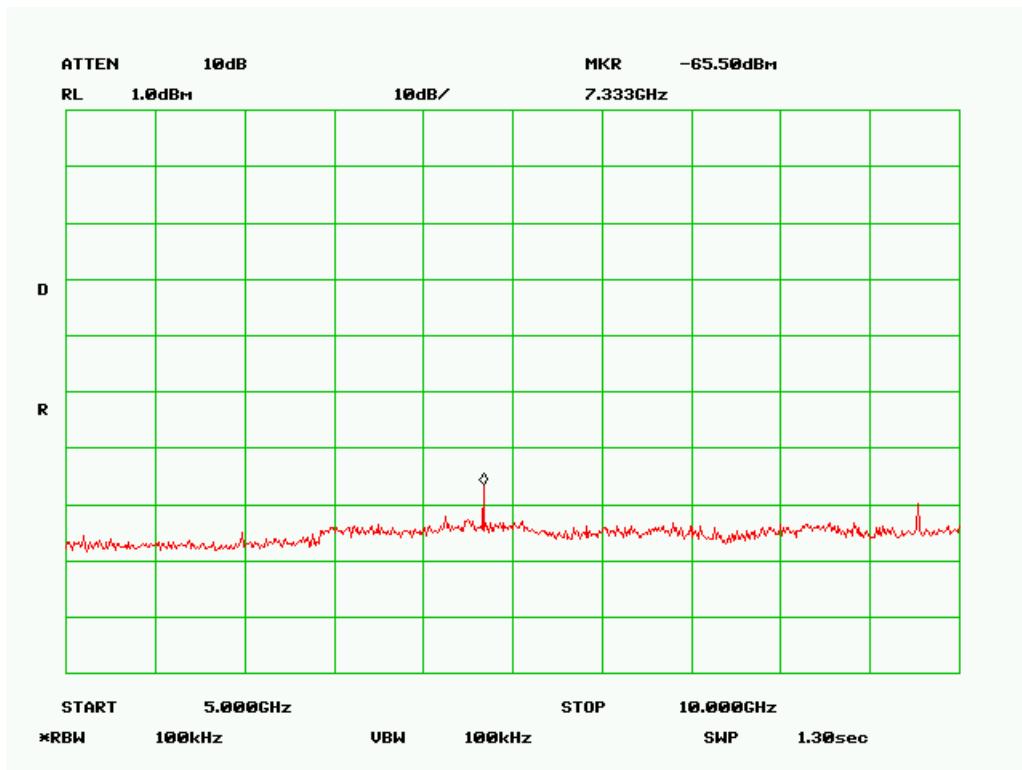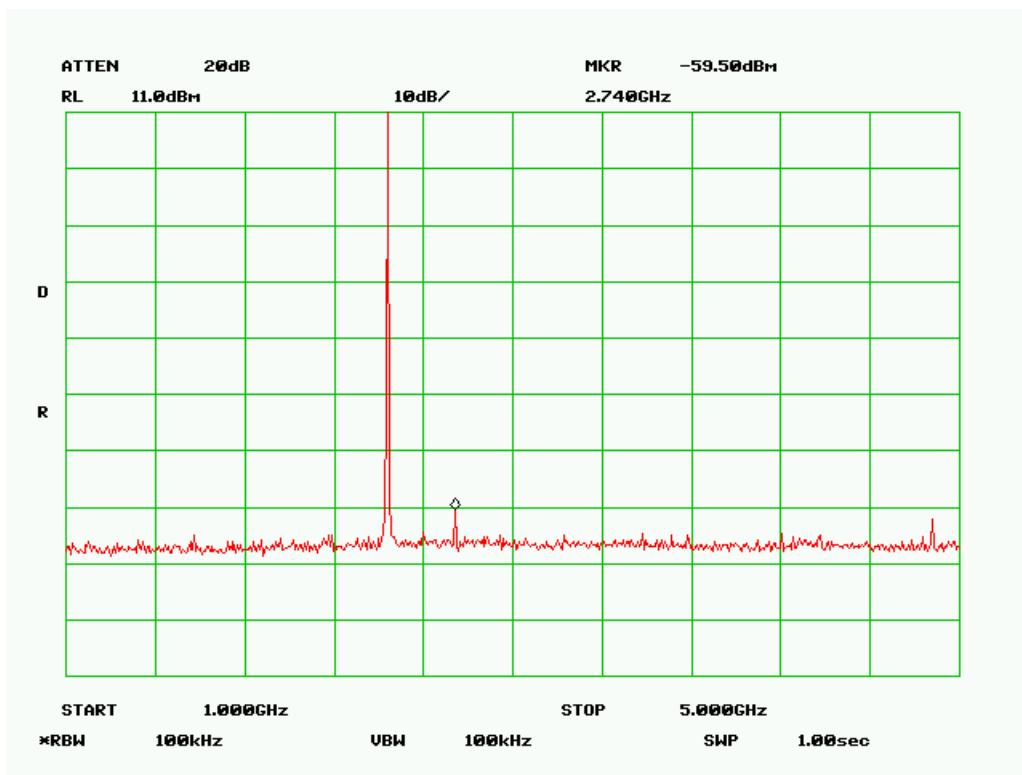

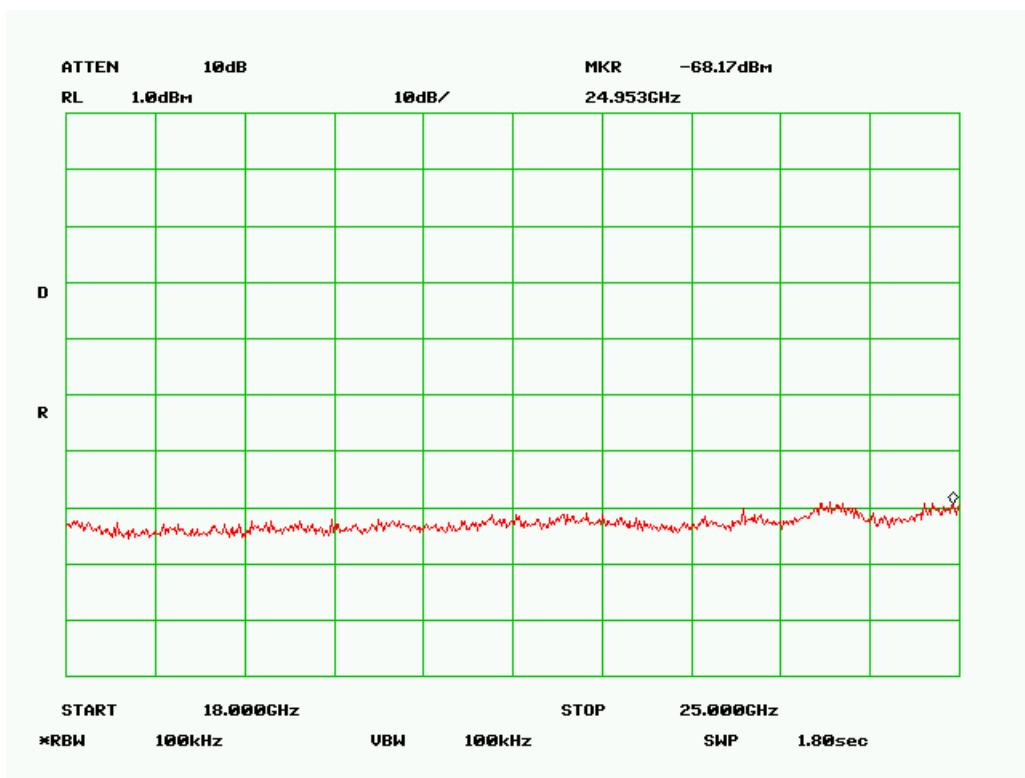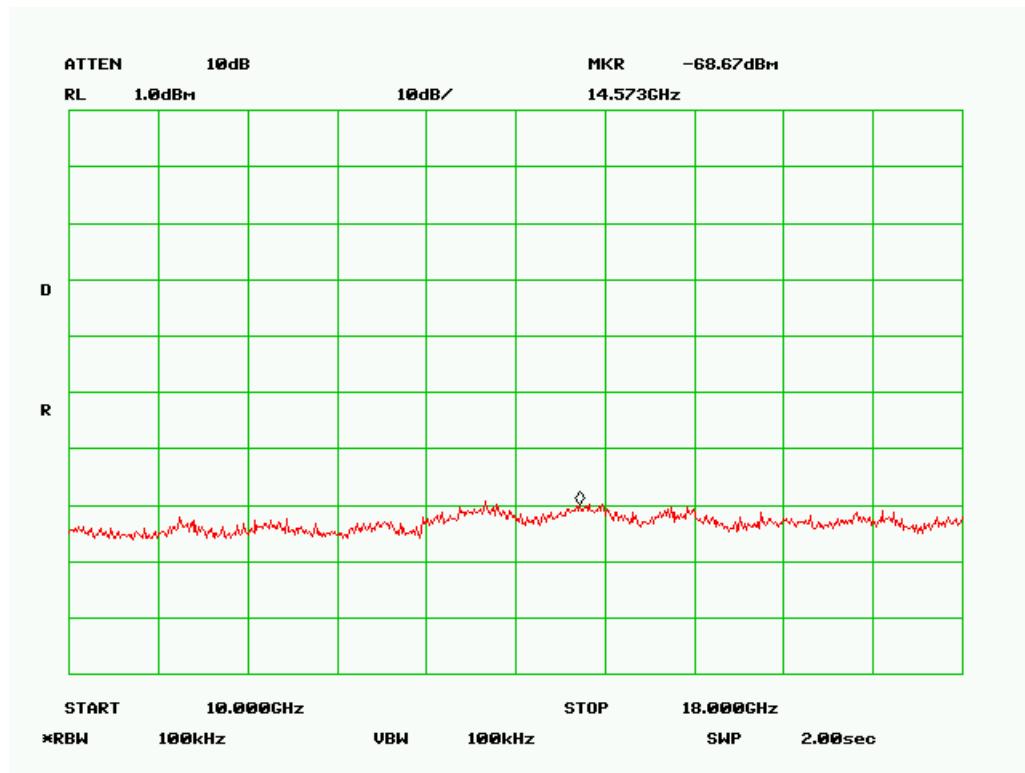

High Channel