



FCC PART 15.247

MEASUREMENT AND TEST REPORT

For

InnoSys (KeySpan)

4118 Lakeside Drive
Richmond, CA 94806

FCC ID: JFVKYRF-RMLN-1
Model: KYRF-RMLN-1

| | |
|---|---|
| This Report Concerns: <input checked="" type="checkbox"/> Original Report (Rev.1) | Equipment Type: Remote Control |
| Test Engineer: James Ma | <i>James Ma</i> |
| Report Number: | R0611021-247a |
| Report Date: | 2006-11-27 |
| Reviewed By: | Test Engineer: Daniel Deng <i>Daniel Deng</i> |
| Prepared By: (12) | Bay Area Compliance Laboratories Corp. (BACL) 1274 Anvilwood Ave. Sunnyvale, CA 94089 Tel: (408) 732-9162 Fax: (408) 732-9164 |

Note: This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government

TABLE OF CONTENTS

| | |
|--|-----------|
| GENERAL INFORMATION..... | 4 |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) | 4 |
| EUT PHOTO | 4 |
| EUT MECHANICAL DESCRIPTION | 4 |
| OBJECTIVE | 5 |
| RELATED SUBMITTAL(S)/GRANT(S)..... | 5 |
| TEST METHODOLOGY | 5 |
| MEASUREMENT UNCERTAINTY | 5 |
| TEST FACILITY | 5 |
| SYSTEM TEST CONFIGURATION..... | 6 |
| JUSTIFICATION | 6 |
| SPECIAL ACCESSORIES | 6 |
| EQUIPMENT MODIFICATIONS | 6 |
| POWER SUPPLY | 6 |
| LOCAL SUPPORT EQUIPMENT..... | 6 |
| SUMMARY OF TEST RESULTS FOR FCC PART 15..... | 7 |
| §15.203 - ANTENNA REQUIREMENT..... | 8 |
| APPLICABLE STANDARD | 8 |
| ANTENNA CONNECTED CONSTRUCTION | 8 |
| §15.207 – CONDUCTED EMISSIONS | 9 |
| APPLICABLE STANDARD | 9 |
| TEST RESULT: NA, THE EUT DOES NOT CONNECT TO THE PUBLIC UTILITY, AND FEATURES ONE USB MINI B RECEPTACLE FOR FIRMWARE UPDATES ONLY..... | 9 |
| §15.205, §15.209 & §15.247 - RADIATED EMISSIONS | 10 |
| APPLICABLE STANDARD: FCC §15.205 RESTRICTED BANDS OF OPERATION | 10 |
| APPLICABLE STANDARD: FCC §15.209 RADIATED EMISSION LIMITS, GENERAL REQUIREMENTS..... | 10 |
| APPLICABLE STANDARD: FCC §15.247 RADIATED EMISSION LIMITS..... | 11 |
| TEST SETUP..... | 11 |
| TEST EQUIPMENT LIST AND DETAILS..... | 11 |
| TEST SETUP DIAGRAM | 11 |
| ENVIRONMENTAL CONDITIONS | 12 |
| TEST PROCEDURE | 12 |
| CORRECTED AMPLITUDE & MARGIN CALCULATION | 12 |
| SUMMARY OF TEST RESULTS | 12 |
| RADIATED EMISSIONS TEST RESULT DATA: MEASURED AT 3 METER - WITH NOTCH FILTER | 13 |
| §15.247 (A) (1) - HOPPING CHANNEL SEPARATION | 17 |
| APPLICABLE STANDARD | 17 |
| MEASUREMENT PROCEDURE..... | 17 |
| TEST EQUIPMENT | 17 |
| TEST SETUP DIAGRAM | 18 |
| ENVIRONMENTAL CONDITIONS | 18 |
| MEASUREMENT RESULTS..... | 18 |
| §15.247 (A) (1) – HOPPING CHANNEL BANDWIDTH | 21 |
| STANDARD APPLICABLE | 21 |
| MEASUREMENT PROCEDURE..... | 21 |
| TEST EQUIPMENT | 21 |
| TEST SETUP DIAGRAM | 21 |
| ENVIRONMENTAL CONDITIONS | 21 |
| MEASUREMENT RESULTS..... | 22 |

| | |
|--|-----------|
| MEASUREMENT RESULT | 23 |
| §15.247 (A) (1) (III) - NUMBER OF HOPPING FREQUENCIES USED..... | 25 |
| STANDARD APPLICABLE | 25 |
| MEASUREMENT PROCEDURE..... | 25 |
| TEST EQUIPMENT | 25 |
| TEST SETUP DIAGRAM | 25 |
| ENVIRONMENTAL CONDITIONS | 26 |
| MEASUREMENT RESULT: 77 CHANNELS | 26 |
| §15.247(A) (1) (III) - DWELL TIME..... | 28 |
| APPLICABLE STANDARD | 28 |
| STANDARD APPLICABLE | 28 |
| MEASUREMENT PROCEDURE..... | 28 |
| TEST EQUIPMENT | 28 |
| TEST SETUP DIAGRAM | 28 |
| ENVIRONMENTAL CONDITIONS | 28 |
| MEASUREMENT RESULTS:..... | 28 |
| §15.247(B) (1) - MAXIMUM PEAK OUTPUT POWER..... | 32 |
| STANDARD APPLICABLE | 32 |
| MEASUREMENT PROCEDURE..... | 32 |
| TEST EQUIPMENT | 32 |
| TEST SETUP DIAGRAM | 32 |
| ENVIRONMENTAL CONDITIONS | 32 |
| MEASUREMENT RESULT | 32 |
| §15.247 (D) - 100 KHZ BANDWIDTH OF BAND EDGES..... | 35 |
| APPLICABLE STANDARD | 35 |
| MEASUREMENT PROCEDURE..... | 35 |
| TEST EQUIPMENT | 35 |
| TEST SETUP DIAGRAM | 35 |
| ENVIRONMENTAL CONDITIONS | 35 |
| §2.1051 SPURIOUS EMISSIONS AT ANTENNA PORT | 37 |
| APPLICABLE STANDARD | 37 |
| MEASUREMENT PROCEDURE..... | 37 |
| TEST EQUIPMENT | 37 |
| TEST SETUP DIAGRAM | 37 |
| ENVIRONMENTAL CONDITIONS | 37 |
| MEASUREMENT RESULTS..... | 38 |
| § 15.247 (E) (1) AND § 2.1091 - RF EXPOSURE..... | 46 |
| EXHIBIT A – FCC PRODUCT LABELING AND WARNING STATEMENT | 47 |
| FCC ID LABEL..... | 47 |
| PROPOSED LABEL LOCATION ON EUT | 47 |
| TEST SETUP PHOTOS – RADIATED EMISSIONS | 48 |
| RADIATED EMISSIONS – FRONT VIEW | 48 |
| RADIATED EMISSIONS – REAR VIEW..... | 48 |
| EXHIBIT C - EUT PHOTOGRAPHS..... | 49 |
| EUT – EXTERIOR: TOP VIEW | 49 |
| EUT – EXTERIOR: BOTTOM VIEW..... | 49 |
| EUT – EXTERIOR: BOTTOM VIEW (WITH BATTERY COMPARTMENT COVER REMOVED) | 50 |
| EUT – EXTERIOR: SIDE VIEW | 50 |
| EUT – INTERIOR: TOP COVER REMOVED, MAIN BOARD (KEY PAD/ LCD) VIEW | 51 |
| EUT – INTERIOR: PCB (KEY PAD/ LCD) VIEW | 51 |
| EUT – INTERIOR: PCB: BOTTOM SIDE VIEW | 52 |

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

This BACL measurement and test report has been complied on behalf of *InnoSys (KeySpan)* and their product, FCC ID: *JFVKYRF-RMLN-1* or the “EUT” as referred to in this report. The EUT is a *Remote Control* model: *KYRF-RMLN-1* designed to function in conjunction with *InnoSys (KeySpan) iPod Dock* model: *KYRF-LDK*. The EUT will be marketed and distributed with the *InnoSys (KeySpan) iPod Dock* model: *KYRF-LDK* with which it is proprietarily compatible. The EUT transmits commands (such as volume, track selection etc.) to the iPod Dock which transmits these commands via the iPod info port to the docked iPod. Additionally the EUT wirelessly receives status information from the iPod Dock about the docked iPod which is then displayed on the remote control’s LCD. It operates on frequency range 2.402-2.479 GHz with a channel bandwidth of 1 MHz per channel. It utilizes Gaussian Frequency Shift Keying with spread-spectrum frequency hopping encoding. The EUT is powered by two AA batteries. Power output is 10 dBm.

* The test data gathered are from a production sample, S/N: KYRF RMLN rev. B6 provided by the manufacturer.

EUT Photo



EUT (FCC ID: JFVKYRF-RMLN-1)

Additional photos in exhibit C

EUT Mechanical Description

The EUT measures approximately 137.16 mmL x 45.72 mmW x 30.48 mmH. and weighs approximately 150 g.

Objective

This type approval report is prepared on behalf of *InnoSys (KeySpan)* in accordance with Part 2, Subpart J, Part 15, Subparts A, B, and C.

Related Submittal(s)/Grant(s)

BACL *InnoSys (KeySpan)* project R0611022 for iPod Dock model: *KYRF-LDK*.

Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.4-2003.

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the values range from ± 2.0 dB for Conducted Emissions tests and $+4.0$ dB for Radiated Emissions tests are the most accurate estimates pertaining to uncertainty of EMC measurements at BACL.

Detailed instrumentation measurement uncertainties can be found in BACL report QAP-018.

Test Facility

The semi-anechoic chambers used by BACL to collect radiated and conducted emissions measurement data is located in the building at it's facility in Sunnyvale, California, USA.

BACL's test sites have been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC registration number: 90464 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200167-0). The current scope of accreditations can be found at <http://ts.nist.gov/ts/htdocs/210/214/scopes/2001670.htm>

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to ANSI C63.4-2003.

The EUT was tested in the normal (native) operating mode to represent *worst-case* results during the final qualification test.

Special Accessories

As shown in following test block diagram, all interface cables used for compliance testing are shielded.

Equipment Modifications

No modifications were made to the EUT.

Power Supply

| Manufacturer | Description | Model | Serial Number |
|--------------|------------------------------|-----------|---------------|
| Duracell | 2 x AA size alkaline battery | MN1500B8Z | NA |

Local Support Equipment

| Manufacturer | Description | Model | Serial Number |
|-------------------|----------------|-------------------|---------------------|
| Samsung | LCD Television | Sync Master 940MW | D019HCGL805457 |
| Altec Lansing | Speakers | MX5020 | NA |
| Apple | iPod Video | 30 GB | JZ542PANSZ9 |
| InnoSys (KeySpan) | iPod Dock | KYRF-LDK-1 | KYRF LDKPCB rev. A5 |

SUMMARY OF TEST RESULTS FOR FCC PART 15

| FCC RULES | DESCRIPTION OF TEST | RESULT |
|------------------------------|--|-----------|
| §15.203 | Antenna Requirements | Compliant |
| §15.207 (a) | Conducted Emissions | NA |
| § 15.205 | Restricted Bands | Compliant |
| §15.209 | Radiated Emissions | Compliant |
| §15.247 (a) (1) | Hopping Channel Separation | Compliant |
| §15.247 (a) (1) | Channel Bandwidth | Compliant |
| §15.247 (a) (1) (iii) | Number of Hopping Frequencies Used | Compliant |
| §15.247 (a) (1) (iii) | Dwell Time | Compliant |
| §15.247 (b) (1) | Maximum Peak Output Power | Compliant |
| § 15.247 (d) | 100 kHz Bandwidth of Frequency Band Edge | Compliant |
| § 2.1051 | Spurious Emissions at Antenna Port | Compliant |
| § 15.247 (e)(i) & §2.1091 | RF Exposure | Compliant |

§15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Refer to statement below for compliance.

“The antenna for this device is an integral antenna that the end user cannot access. Furthermore the device is for indoor/outdoor use as detailed in the Users Manual and Operational Description”.

Antenna Connected Construction

The antenna for this device is an integral antenna that the end user cannot access. It is fully enclosed by the EUT chassis and removal/modification would result in irreparable damage to the device.

Compliant

N/A

§15.207 – CONDUCTED EMISSIONS

Applicable Standard

According to FCC §15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

| Frequency of emission (MHz) | Conducted limit (dBuV) | |
|-----------------------------------|------------------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

**Decreases with the logarithm of the frequency*

Test Result: NA, the EUT does not connect to the public utility, and features one USB Mini B receptacle for firmware updates only.

§15.205, §15.209 & §15.247 - RADIATED EMISSIONS

Applicable Standard: FCC §15.205 Restricted bands of operation

(a) Except as shown in 15.205 paragraphs (d), only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | MHz | MHz | GHz | GHz |
|-------------------|---------------------|-----------------------|-------------------|-----------------|----------------|---------------|
| 0.090 – 0.110 | 8.291 – 8.294 | 16.69475 – 16.69525 | 156.7 – 156.9 | 1435 – 1626.5 | 3.332 – 3.339 | 10.6 – 12.7 |
| 0.495 – 0.505 | 8.362 – 8.366 | 25.5 – 25.67 | 162.0125 – 167.17 | 1645.5 – 1646.5 | 3.3458 – 3.358 | 13.25 – 13.4 |
| 2.1735 – 2.1905 | 8.37625 – 8.38675 | 37.5 – 38.25 | 167.72 – 173.2 | 1660 – 1710 | 3.600 – 4.400 | 14.47 – 14.5 |
| 4.125 – 4.128 | 8.41425 – 8.41475 | 73 – 74.6 | 240 – 285 | 1718.8 – 1722.2 | 4.5 – 5.15 | 15.35 – 16.2 |
| 4.17725 – 4.17775 | 12.29 – 12.293 | 74.8 – 75.2 | 322 – 335.4 | 2200 – 2300 | 5.35 – 5.46 | 17.7 – 21.4 |
| 4.20725 – 4.20775 | 12.51975 – 12.52025 | 108 – 121.94 | 399.9 – 410 | 2310 – 2390 | 7.25 – 7.75 | 22.01 – 23.12 |
| 6.215 – 6.218 | 12.57675 – 12.57725 | 123 – 138 | 608 – 614 | 2483.5 – 2500 | 8.025 – 8.5 | 23.6 – 24.0 |
| 6.26775 – 6.26825 | 13.36 – 13.41 | 149.9 – 150.05 | 960 – 1240 | 2690 – 2900 | 9.0 – 9.2 | 31.2 – 31.8 |
| 6.31175 – 6.31225 | 16.42 – 16.423 | 156.52475 – 156.52525 | 1300 – 1427 | 3260 – 3267 | 9.3 – 9.5 | 36.43 – 36.5 |
| | | | | | | Above 38.6 |

(b) Except as provided in 15.205 paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e), regardless of the field strength limits specified elsewhere in this Subpart, the provisions of this Section apply to emissions from any intentional radiator.

Compliant

N/A

Applicable Standard: FCC §15.209 Radiated emission limits, general requirements.

(a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|--------------------|--------------------------------------|-------------------------------------|
| 0.009 - 0.490 | 2400/F(kHz) | 300 |
| 0.490 - 1.705 | 24000/F(kHz) | 30 |
| 1.705 - 30.0 | 30 | 30 |
| 30 - 88 | 100 ** | 3 |
| 88 - 216 | 150 ** | 3 |
| 216 - 960 | 200 ** | 3 |
| Above 960 | 500 | 3 |

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

(b) In the emission table above, the tighter limit applies at the band edges.

Compliant

N/A

Applicable Standard: FCC §15.247 Radiated emission limits.

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


Test Setup

The radiated emissions tests were performed in the 3-meter open area test site, using the setup in accordance with ANSI C63.4-2003. The specification used was the FCC 15 Subpart C limits.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Cal. Date |
|----------------|-------------------------------|-----------|-------------------|------------|
| Sonoma | Amplifier, Pre | 317 | 260408 | 2006-02-03 |
| HP | Analyzer, Spectrum | 8565EC | 3946A00131 | 2006-01-11 |
| HP | Pre, Amplifier (1 ~ 26.5 GHz) | 8449B | 3147A00400 | 2006-08-21 |
| Sunol Sciences | Antenna | JB3 | A020106-3/S006628 | 2006-03-14 |
| A. R.A | Horn Antenna | DRG-118/A | 1132 | 2005-08-17 |

* **Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

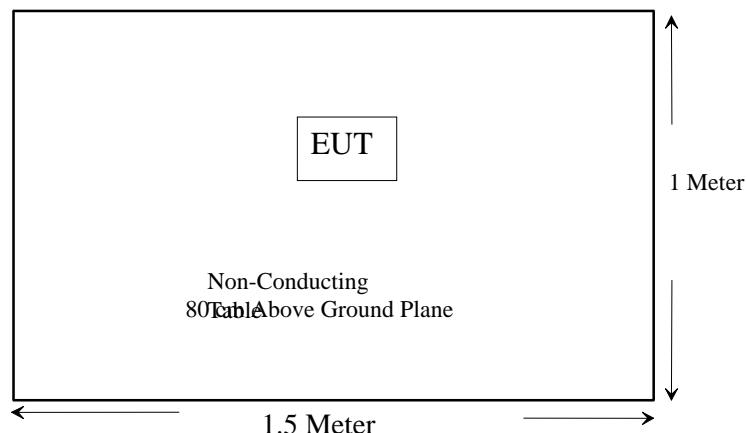Test Setup Diagram

Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 24 ° C |
| Relative Humidity: | 65 % |
| ATM Pressure: | 1020 mbar |

*The testing was performed by James Ma on 2006-11-13.

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations.

All data were recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limits), and are distinguished with a "QP" in the data table.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Cord. Amp.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Cord. Amp.} - \text{Limit}$$

Summary of Test Results

According to the data hereinafter, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247 standard's radiated emissions limits for class B devices, and had the worst margin of:

- 4.3 dB at 7205.0 MHz in the Vertical polarization at Low Channel**
- 3.7 dB at 4884.0 MHz in the Vertical polarization at Middle Channel**
- 4.2 dB at 4958.0 MHz in the Vertical polarization at High Channel**

Please refer to the following tables for full test results

Radiated Emissions Test Result Data: Measured at 3 meter - With Notch filter

Run # 1: Low CH = 2402.0 MHz

| Frequency (MHz) | Reading (dBuV) | Azimuth Degrees | Height (m) | Polarization H / V | Antenna Factor (dB/m) | Cable Loss (dB) | Amplifier Gain (dB) | Corrected Reading (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Comments |
|-----------------|----------------|-----------------|------------|--------------------|-----------------------|-----------------|---------------------|----------------------------|----------------|-------------|-----------|
| 2402 | 114.6 | 164 | 1.3 | V | 28.7 | 1.5 | 37.4 | 107.4 | | | Fund/Peak |
| 2402 | 114.9 | 123 | 1 | H | 28.7 | 1.5 | 37.4 | 107.7 | | | Fund/Peak |
| 2402 | 76.4 | 164 | 1.3 | V | 28.7 | 1.5 | 37.4 | 69.2 | | | Ave |
| 2402 | 76.6 | 123 | 1 | H | 28.7 | 1.5 | 37.4 | 69.4 | | | Ave |
| 7205 | 39.1 | 210 | 1 | V | 36.7 | 4.2 | 34.9 | 45.1 | 49.4 | -4.3 | Ave |
| 4803.9 | 49.4 | 47 | 1.6 | V | 32.5 | 1.9 | 34.8 | 49 | 54 | -5 | Ave |
| 7205 | 37.4 | 173 | 1.4 | H | 36.7 | 4.2 | 34.9 | 43.4 | 49.4 | -6 | Ave |
| 4803.9 | 48.1 | 132 | 1.5 | H | 32.5 | 1.9 | 34.8 | 47.7 | 54 | -6.3 | Ave |
| 4803.9 | 65.8 | 47 | 1.6 | V | 32.5 | 1.9 | 34.8 | 65.4 | 74 | -8.6 | Peak |
| 4803.9 | 64.3 | 132 | 1.5 | H | 32.5 | 1.9 | 34.8 | 63.9 | 74 | -10.1 | Peak |
| 7205 | 54.1 | 351 | 1.5 | V | 36.7 | 4.2 | 34.9 | 60.1 | 87.4 | -27.3 | Peak |
| 7205 | 53.2 | 173 | 1.5 | H | 36.7 | 4.2 | 34.9 | 59.2 | 87.7 | -28.5 | Peak |

Run # 2: Mid CH = 2442.0 MHz


| Frequency (MHz) | Reading (dBuV) | Azimuth Degrees | Height (m) | Polarization H / V | Antenna Factor (dB/m) | Cable Loss (dB) | Amplifier Gain (dB) | Corrected Reading (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Comments |
|-----------------|----------------|-----------------|------------|--------------------|-----------------------|-----------------|---------------------|----------------------------|----------------|-------------|----------|
| 2442 | 112 | 242 | 1 | V | 28.7 | 1.5 | 37 | 105.2 | | | 2442 |
| 2442 | 111.2 | 202 | 1.1 | H | 28.7 | 1.5 | 37 | 104.4 | | | 2442 |
| 2442 | 75 | 242 | 1 | V | 28.7 | 1.5 | 37 | 68.2 | | | 2442 |
| 2442 | 75 | 202 | 1.2 | H | 28.7 | 1.5 | 37 | 68.2 | | | 2442 |
| 4884 | 50.7 | 270 | 2.4 | V | 32.5 | 1.9 | 34.8 | 50.3 | 54 | -3.7 | 4884 |
| 4884 | 50.4 | 28 | 1.8 | H | 32.5 | 1.9 | 34.8 | 50 | 54 | -4 | 4884 |
| 4884 | 66.4 | 160 | 1.5 | V | 32.5 | 1.9 | 34.8 | 66 | 74 | -8 | 4884 |
| 7326 | 39.6 | 82 | 1.7 | H | 36.7 | 4.2 | 35.1 | 45.4 | 54 | -8.6 | 7326 |
| 4884 | 65.4 | 162 | 2 | H | 32.5 | 1.9 | 34.8 | 65 | 74 | -9 | 4884 |
| 7326 | 37.5 | 156 | 1.2 | V | 36.7 | 4.2 | 35.1 | 43.3 | 54 | -10.7 | 7326 |
| 7326 | 56.2 | 82 | 1.7 | H | 36.7 | 4.2 | 35.1 | 62 | 74 | -12 | 7326 |
| 7326 | 55.2 | 156 | 1.2 | V | 36.7 | 4.2 | 35.1 | 61 | 74 | -13 | 7326 |

Run # 3: High CH = 2479.0 MHz


| Frequency (MHz) | Reading (dBuV) | Azimuth Degrees | Height (m) | Polarization H / V | Antenna Factor (dB/m) | Cable Loss (dB) | Amplifier Gain (dB) | Corrected Reading (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Comments |
|-----------------|----------------|-----------------|------------|--------------------|-----------------------|-----------------|---------------------|----------------------------|----------------|-------------|-----------|
| 2479 | 111.9 | 291 | 1.7 | V | 28.7 | 1.5 | 37.2 | 104.8 | | | Fund/Peak |
| 2479 | 110 | 255 | 1.3 | H | 28.7 | 1.5 | 37.2 | 103 | | | Fund/Peak |
| 2479 | 75.4 | 180 | 1.3 | V | 28.7 | 1.5 | 37.2 | 68.3 | | | Ave |
| 2479 | 74.2 | 180 | 1.2 | H | 28.7 | 1.5 | 37.2 | 67.2 | | | Ave |
| 4958 | 50.2 | 235 | 1.5 | V | 32.5 | 1.9 | 34.8 | 49.8 | 54 | -4.2 | Ave |
| 4958 | 49.4 | 253 | 1.9 | H | 32.5 | 1.9 | 34.8 | 49 | 54 | -5 | Ave |
| 4958 | 66.2 | 165 | 1.6 | V | 32.5 | 1.9 | 34.8 | 65.8 | 74 | -8.2 | Peak |
| 7437 | 39.4 | 297 | 1 | V | 36.7 | 4.2 | 34.7 | 45.6 | 54 | -8.4 | Ave |
| 7437 | 59.2 | 194 | 1.8 | V | 36.7 | 4.2 | 34.7 | 65.4 | 74 | -8.6 | Peak |
| 7437 | 37.8 | 221 | 2 | H | 36.7 | 4.2 | 34.7 | 44 | 54 | -10 | Ave |
| 7437 | 57.3 | 202 | 1.5 | H | 36.7 | 4.2 | 34.7 | 63.5 | 74 | -10.5 | Peak |
| 4958 | 61.5 | 243 | 2 | H | 32.5 | 1.9 | 34.8 | 61.2 | 74 | -12.8 | Peak |

Low Channel Band Edges on Restriction Band

Peak

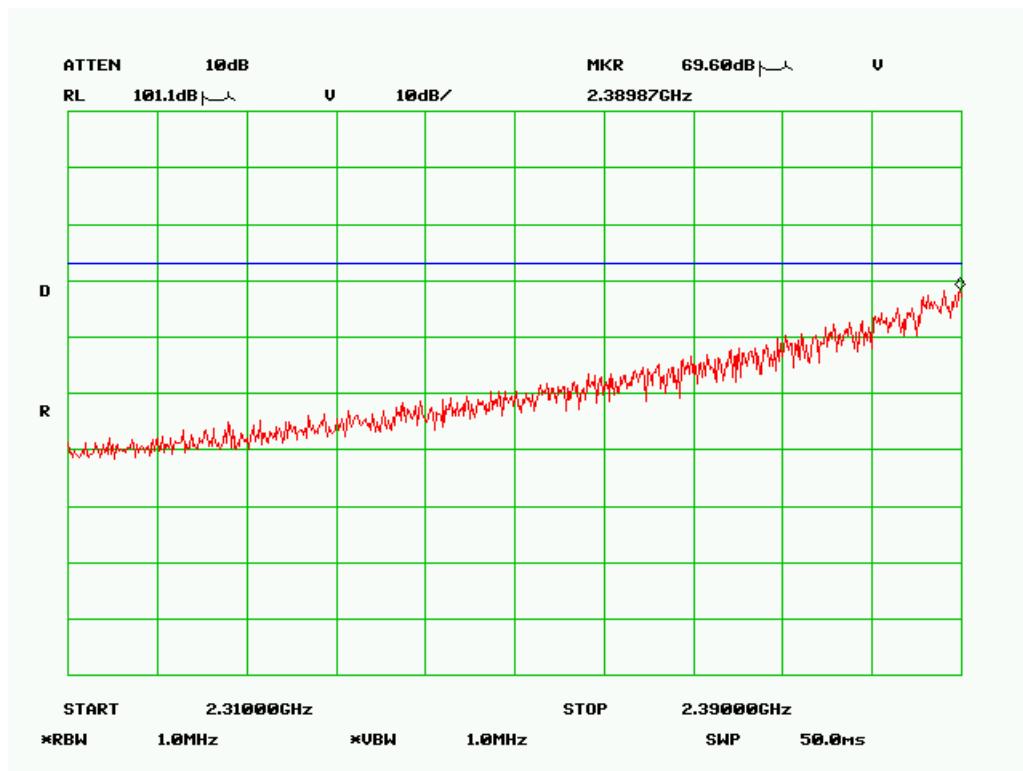


Average

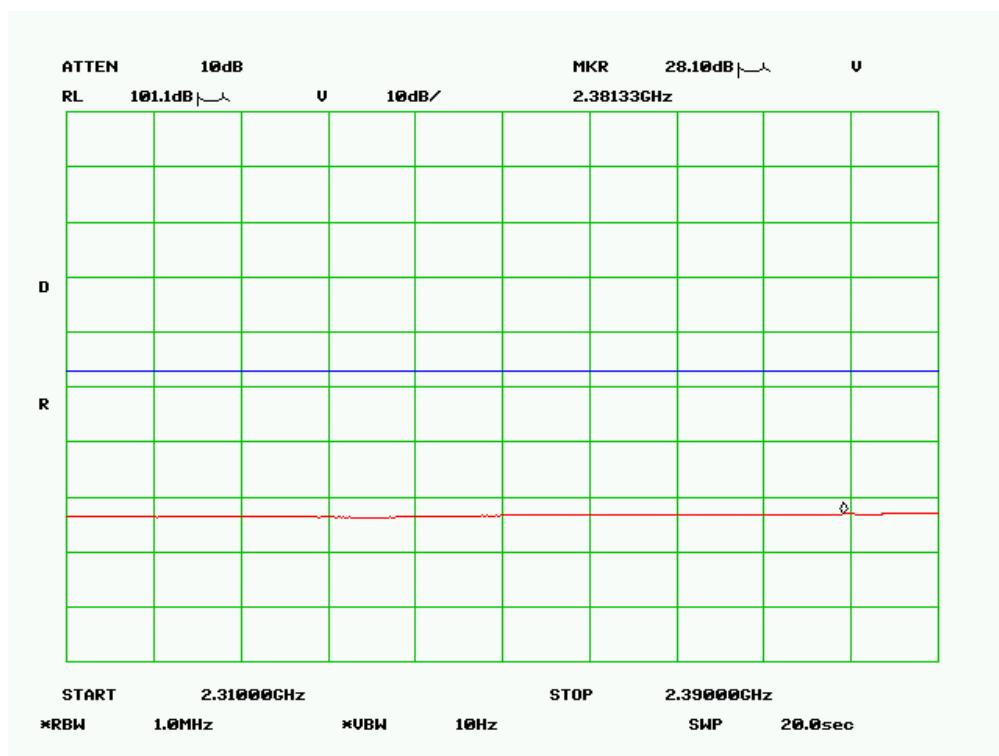


High Channel Band Edges on Restriction Band

Peak

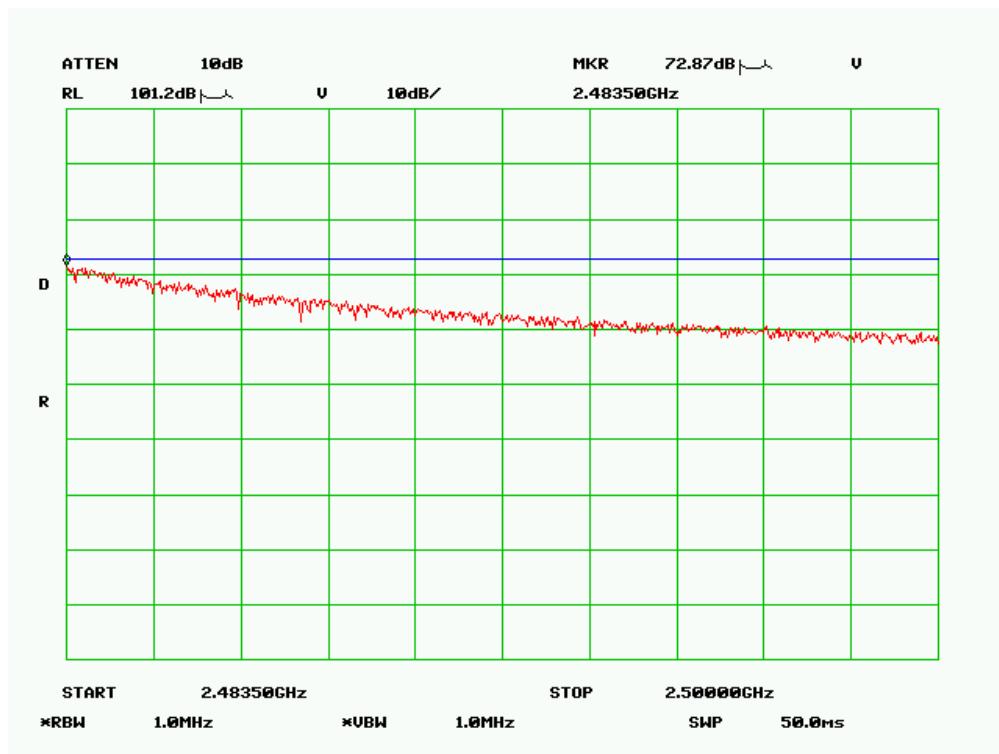

Average

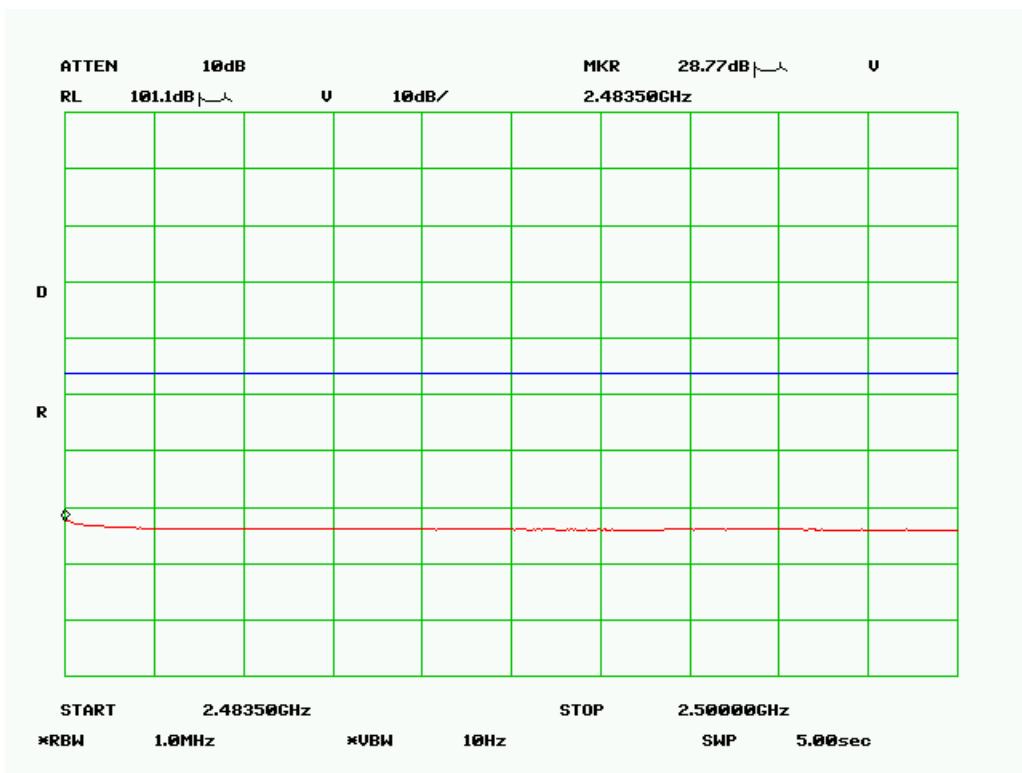

§15.247 (a) (1) - HOPPING CHANNEL SEPARATION

Applicable Standard

According to §15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


Measurement Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on a bench without connection to measurement instrument Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the Max-Hold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function, and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

Test Equipment

| Manufacturer | Description | Model No. | Serial No. | Calibration Date |
|--------------|--------------------|-----------|------------|------------------|
| HP | Analyzer, Spectrum | 8565EC | 3946A00131 | 2006-01-11 |

* **Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Test Setup Diagram**Environmental Conditions**



| | |
|--------------------|-----------|
| Temperature: | 24 °C |
| Relative Humidity: | 65 % |
| ATM Pressure: | 1020 mbar |


*The testing was performed by James Ma on 2006-11-13.

Measurement Results

| Channel | Frequency (MHz) | Channel Separation (KHz) | Limit >(KHz) |
|---------|-----------------|--------------------------|--------------|
| Low | 2402.0 | 983 | 513 |
| Mid | 2442.0 | 992 | 517 |
| High | 2479.0 | 1013 | 497 |

Please refer to the following plots.

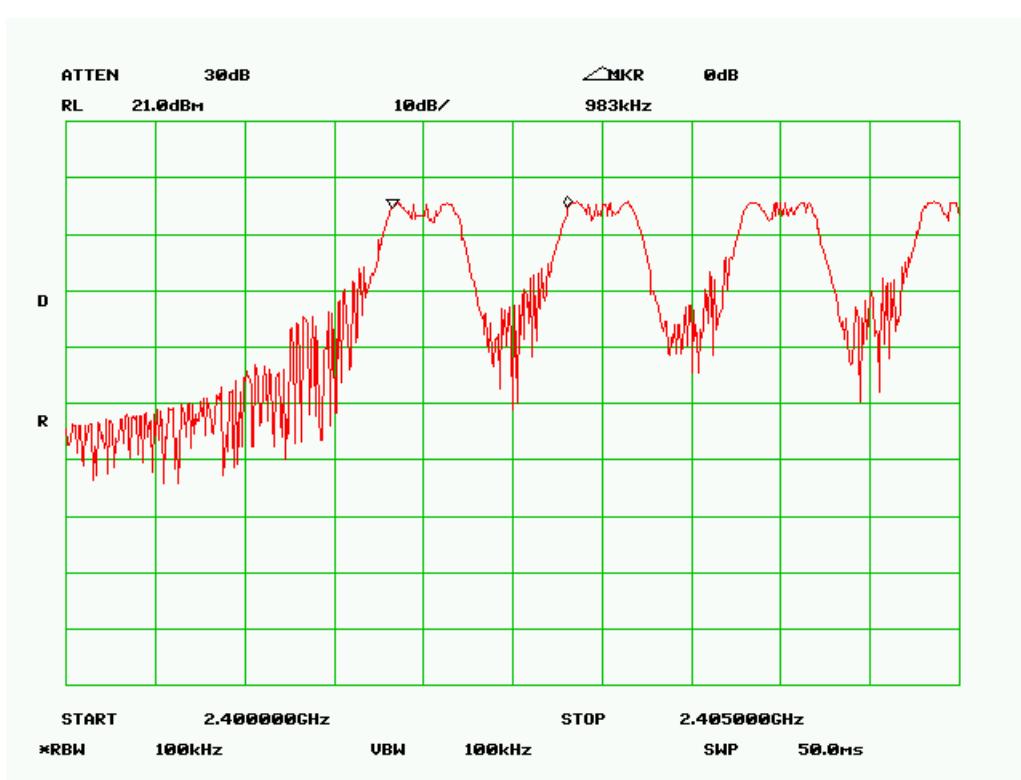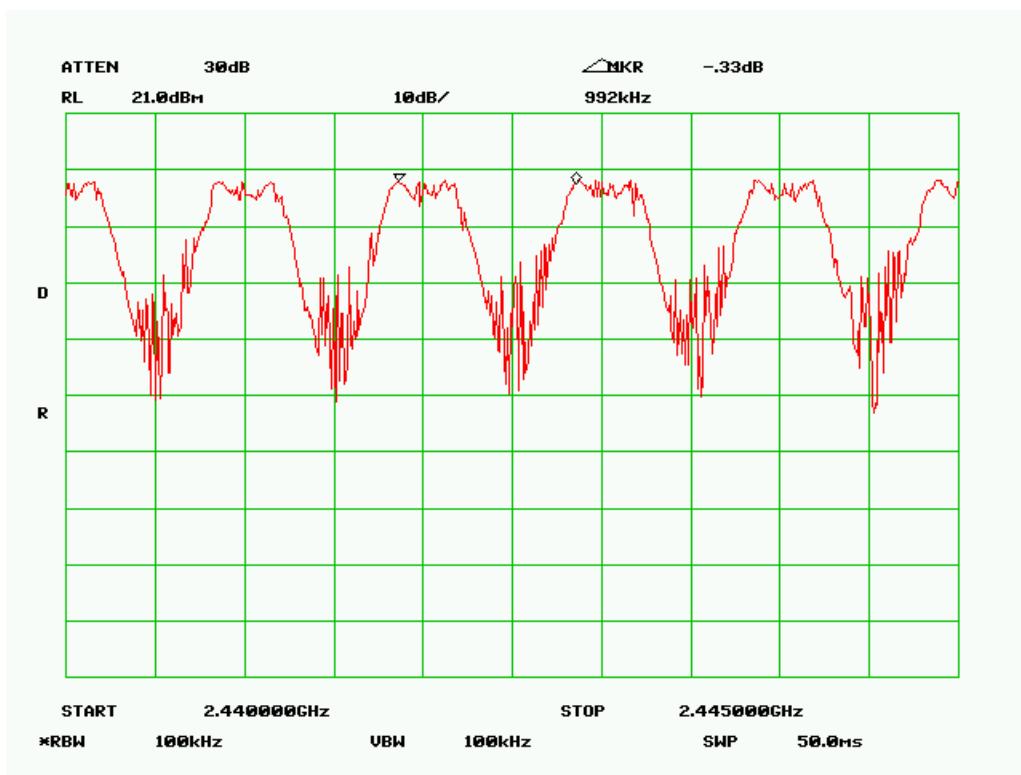Low Channel**Middle Channel**

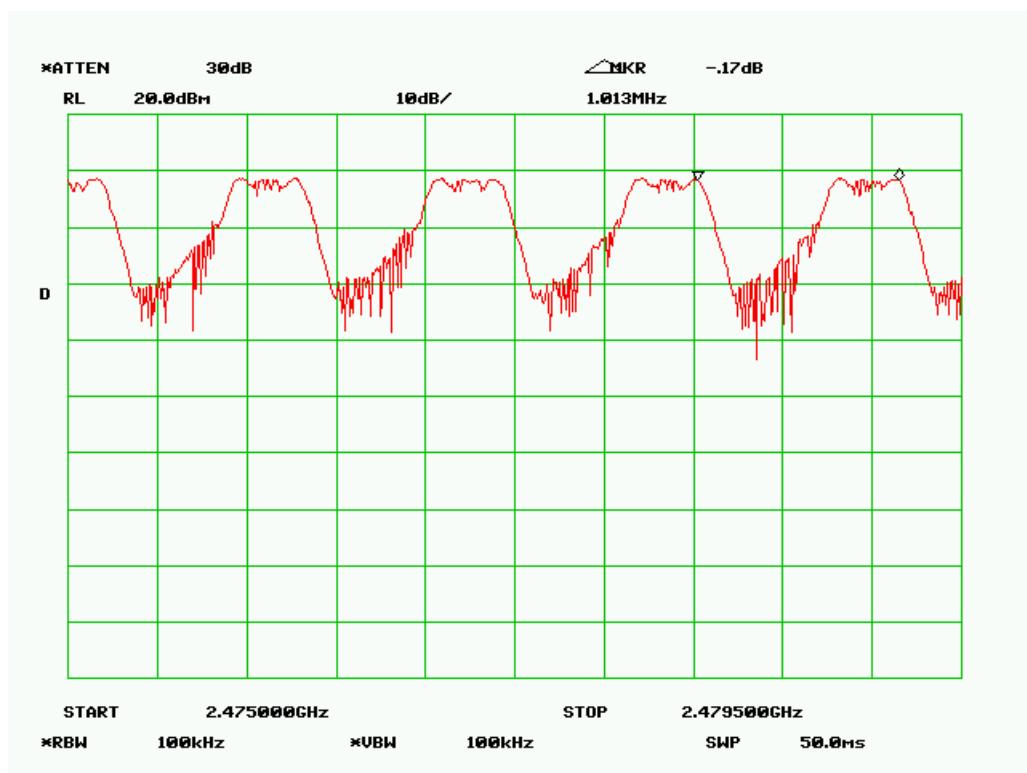High Channel

§15.247 (a) (1) – HOPPING CHANNEL BANDWIDTH

Standard Applicable

According to §15.247(a)(1), the maximum 20 dB bandwidth of the hopping channel shall be presented.

Measurement Procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emissions bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment

| Manufacturer | Description | Model Number | Serial Number | Calibration Date |
|--------------|--------------------|--------------|---------------|------------------|
| HP | Analyzer, Spectrum | 8565EC | 3946A00131 | 2006-01-11 |

* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Test Setup Diagram



Environmental Conditions



| | |
|--------------------|-----------|
| Temperature: | 24 ° C |
| Relative Humidity: | 65 % |
| ATM Pressure: | 1020 mbar |


*The testing was performed by James Ma on 2006-11-13.

Measurement Results

| Channel | Frequency (MHz) | Channel Bandwidth (KHz) |
|---------|-----------------|-------------------------|
| Low | 2402.0 | 513 |
| Mid | 2442.0 | 517 |
| High | 2479.0 | 497 |

Please refer to the following plots.

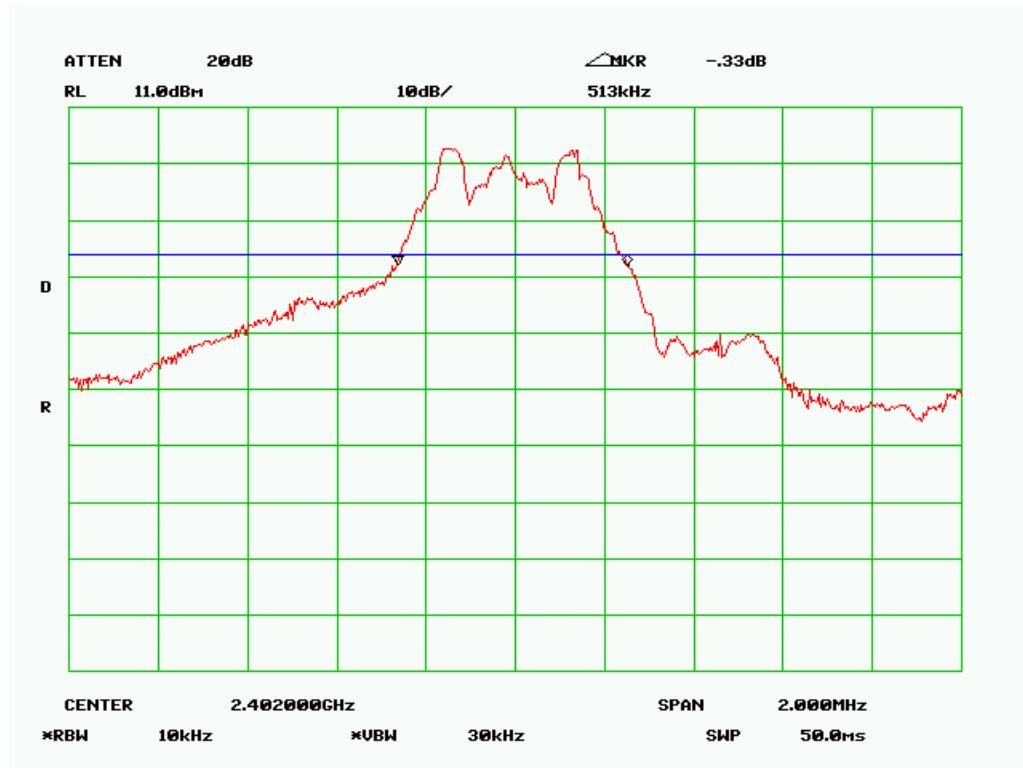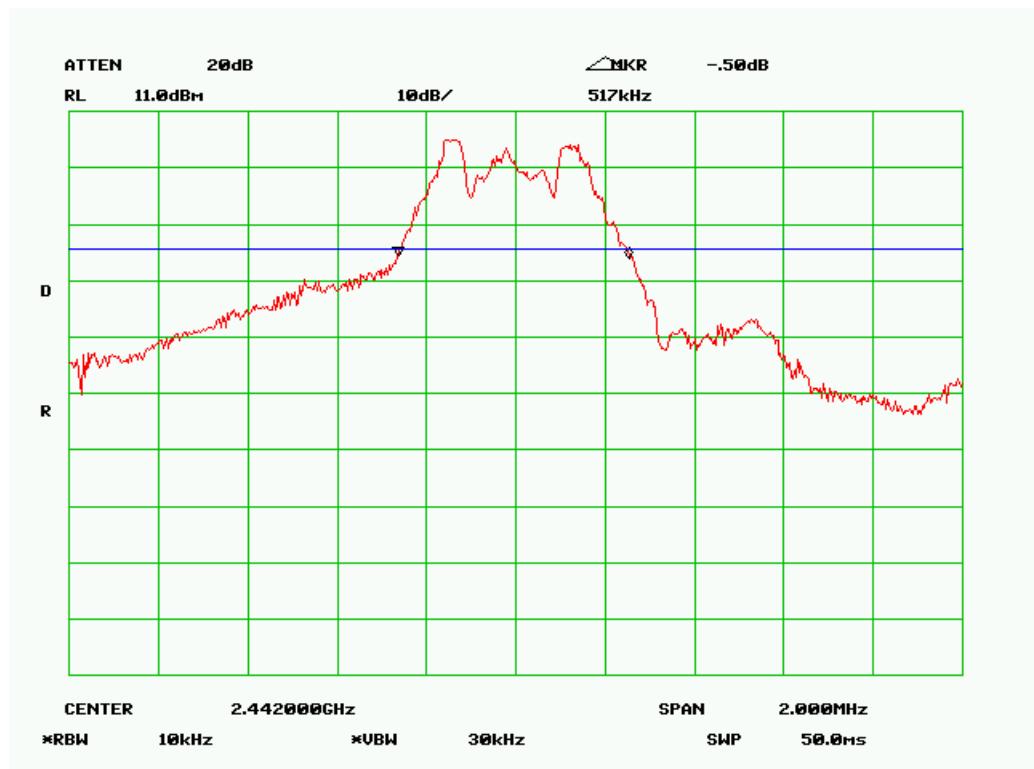Measurement Result**Low Channel****Middle Channel**

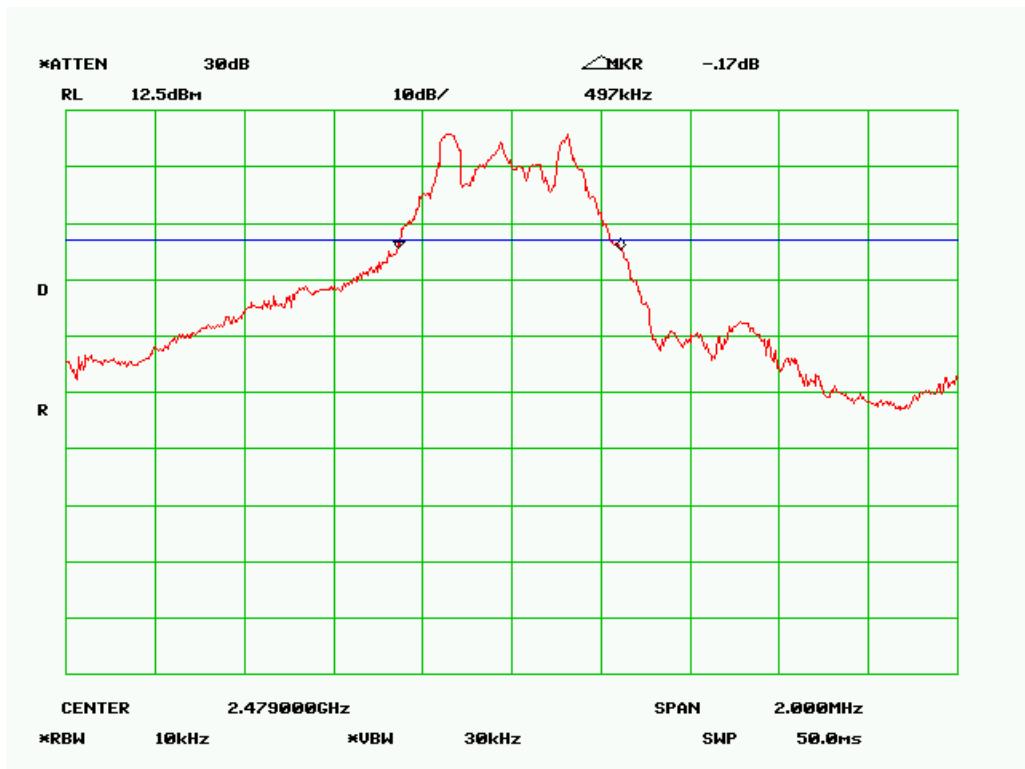High Channel

§15.247 (a) (1) (iii) - NUMBER OF HOPPING FREQUENCIES USED

Standard Applicable

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

Measurement Procedure


1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the bench without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the SA on Max-Hold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

Test Equipment

| Manufacturer | Description | Model No. | Serial No. | Calibration Date |
|--------------|--------------------|-----------|------------|------------------|
| HP | Analyzer, Spectrum | 8565EC | 3946A00131 | 2006-01-11 |

*** Statement of Traceability: BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Test Setup Diagram



Environmental Conditions


| | |
|--------------------|-----------|
| Temperature: | 24 ° C |
| Relative Humidity: | 65 % |
| ATM Pressure: | 1020 mbar |

*The testing was performed by James Ma on 2006-11-13.


Measurement Result: 77 channels

Please refer to the following plots:

First plot is 39 channels

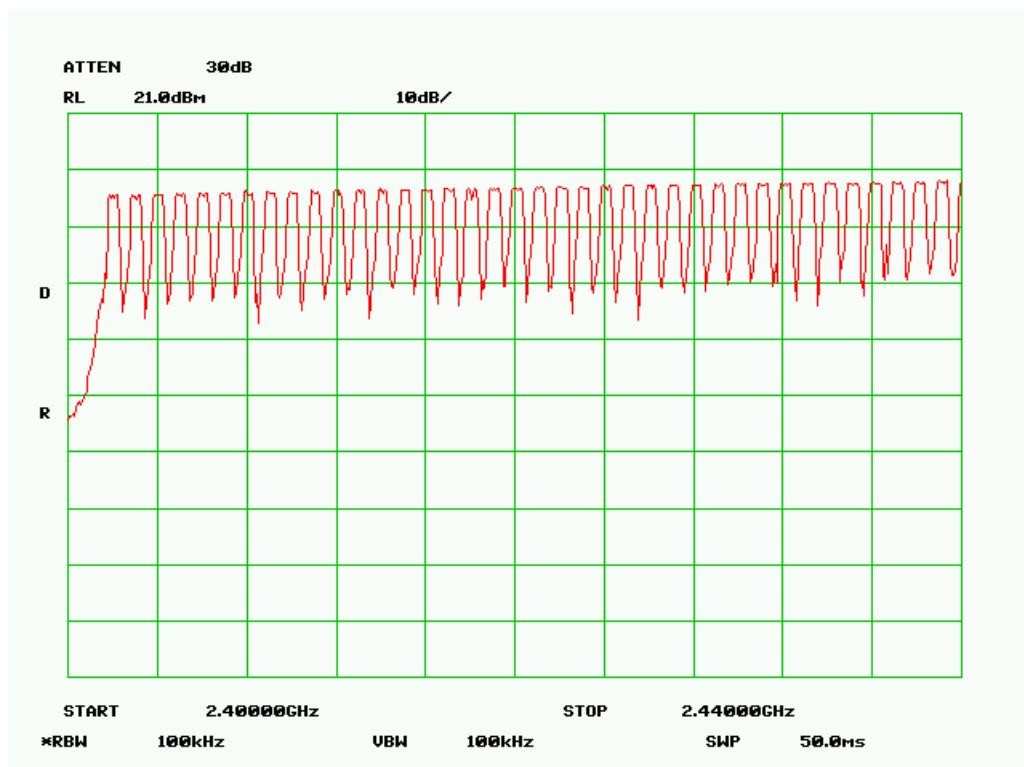

Second plot is 38 channels

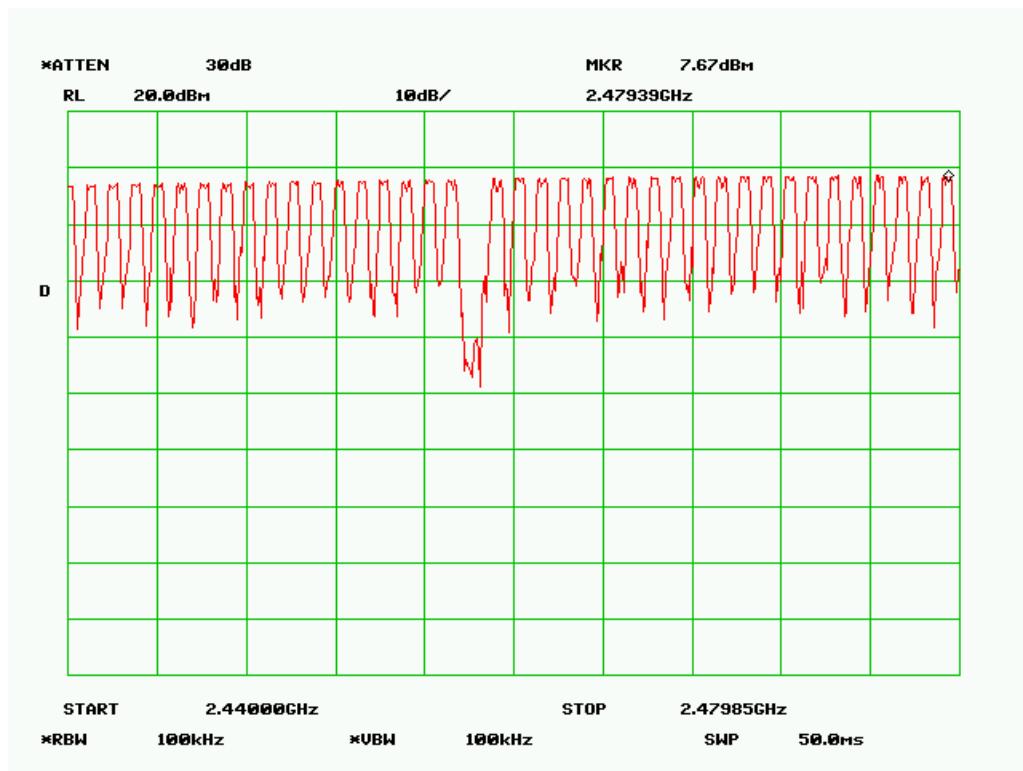

§15.247(a) (1) (iii) - DWELL TIME

Applicable Standard

Standard Applicable

According to §15.247 (a)(1)(iii), the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Measurement Procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.

Test Equipment

| Manufacturer | Description | Model Number | Serial Number | Calibration Date |
|--------------|--------------------|--------------|---------------|------------------|
| HP | Analyzer, Spectrum | 8565EC | 3946A00131 | 2006-01-11 |

* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Test Setup Diagram



Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 24 ° C |
| Relative Humidity: | 65 % |
| ATM Pressure: | 1020 mbar |


*The testing was performed by James Ma on 2006-11-13.



Measurement Results:



| Channel | Frequency (MHz) | Pulse Width (ms) | Pulse Quantity | Dwell Time (sec.) | Limit | Result |
|---------|-----------------|------------------|----------------|-------------------|-------|--------|
| Low | 2402.0 | 1.1500 | 44 | 0.0506 | 0.4 | Pass |
| Mid | 2442.0 | 1.1583 | 44 | 0.0510 | 0.4 | Pass |
| High | 2479.0 | 1.1667 | 44 | 0.0513 | 0.4 | Pass |

Please refer the following plots.

Low CH

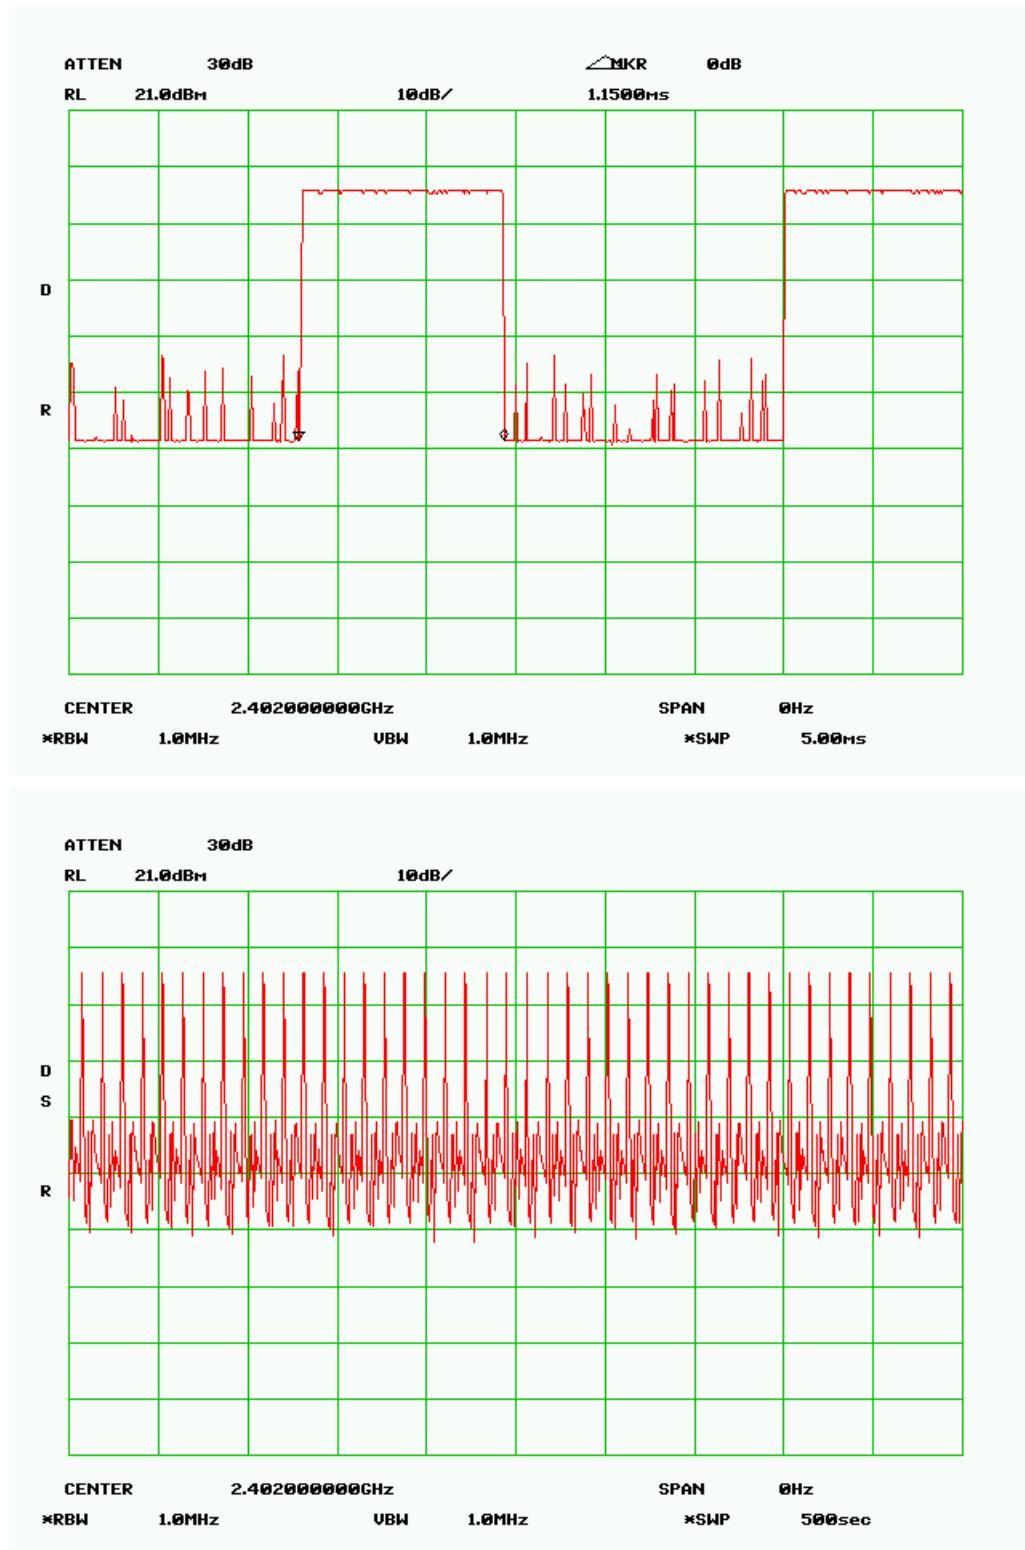

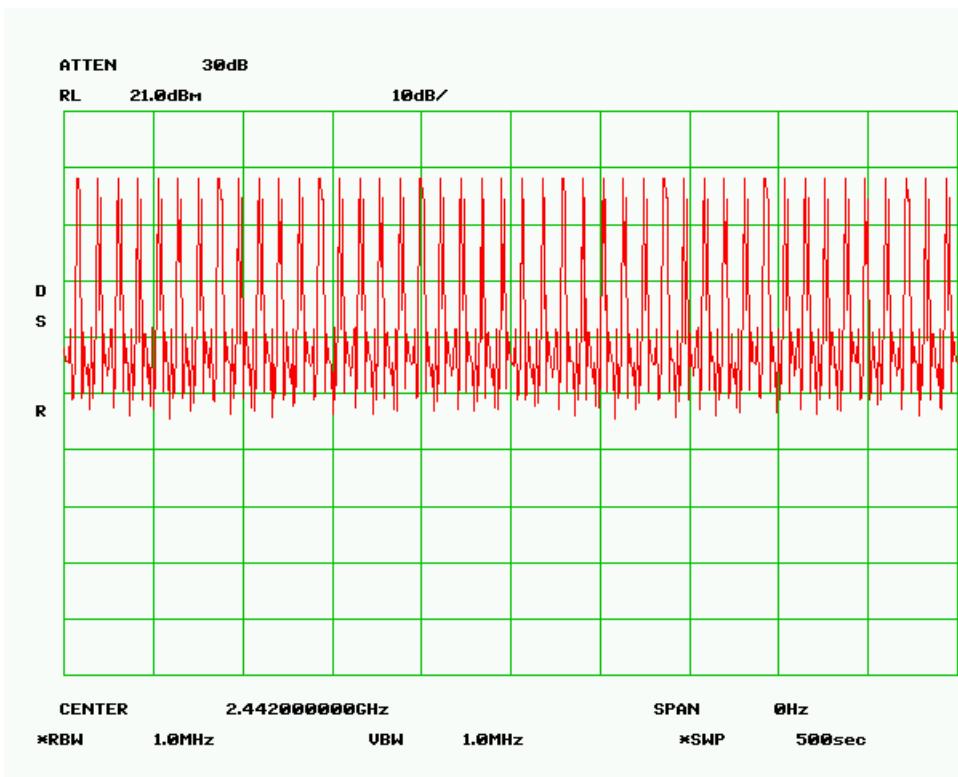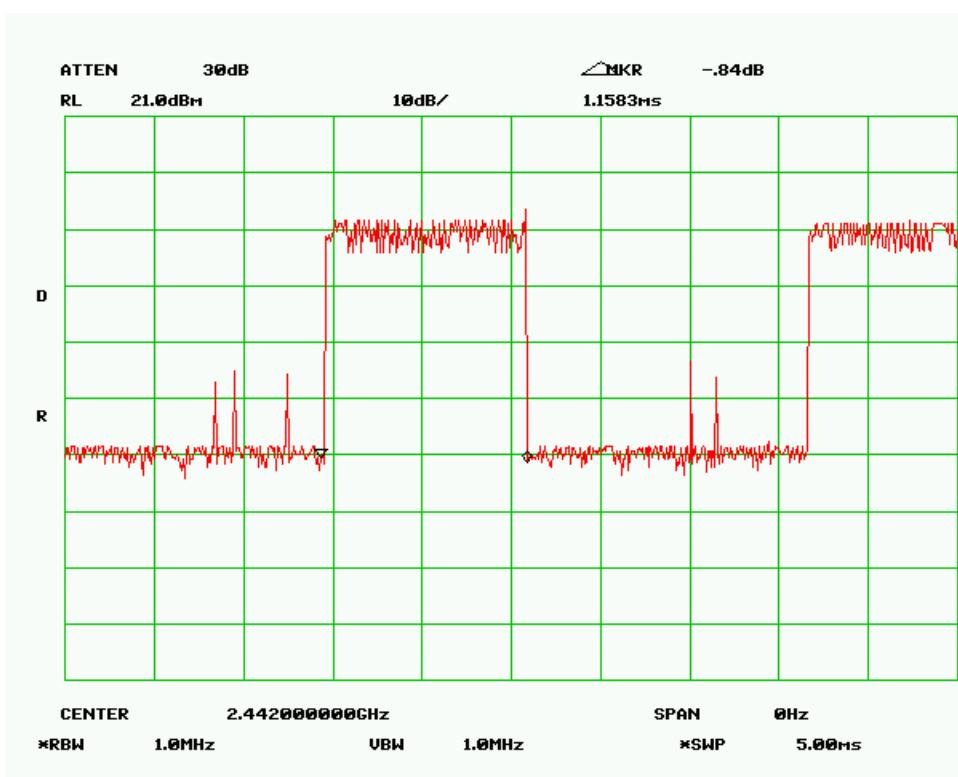Middle CH

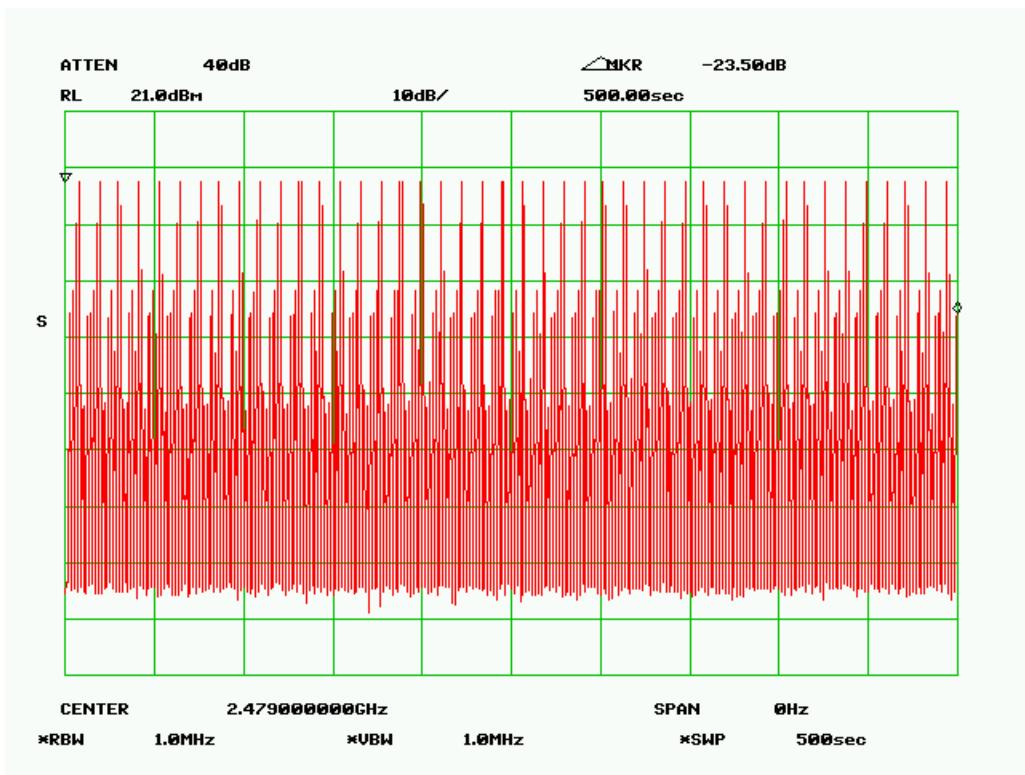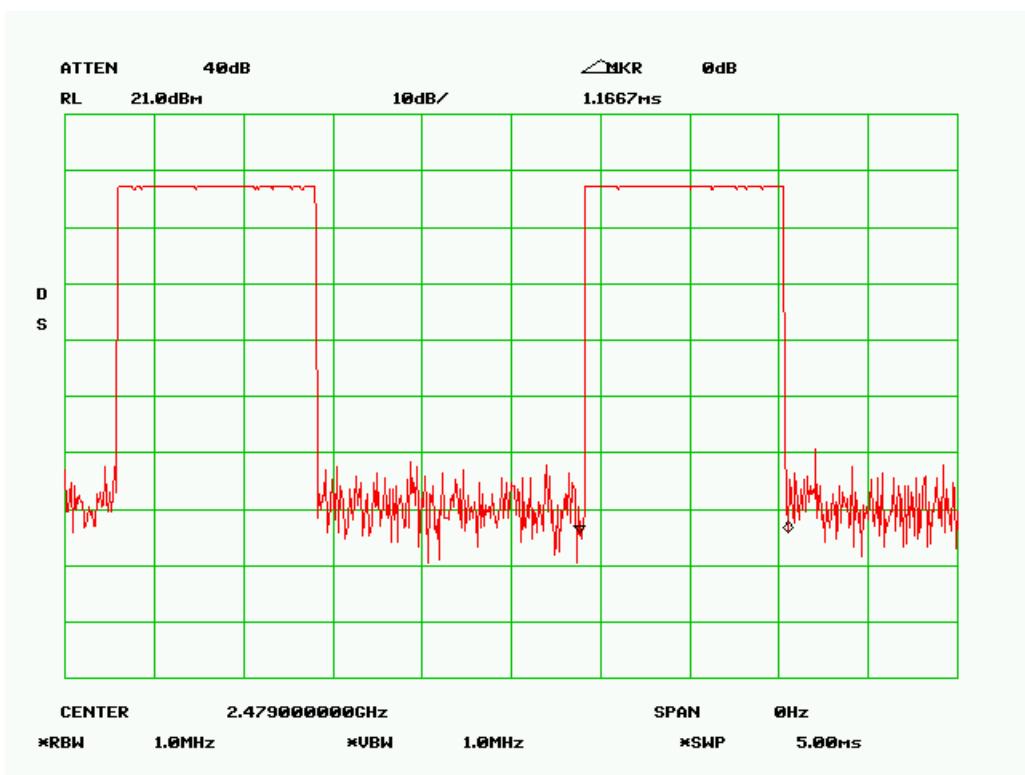High CH

§15.247(B) (1) - MAXIMUM PEAK OUTPUT POWER

Standard Applicable

According to §15.247(b) (1), for frequency hopping systems in the 2400-2483.5MHz band employing at least 75 hopping channels, and all direct sequence systems, the maximum peak output power of the transmitter shall not exceed 1 Watt. For all other frequency hopping system in the 2400 – 2483.5 MHz band, the maximum peak output power of the transmitter shall not exceed 0.125 Watt.

Measurement Procedure


1. Place the EUT on the turntable and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Test Equipment

| Manufacturer | Description | Model Number | Serial Number | Calibration Date |
|--------------|--------------------|--------------|---------------|------------------|
| HP | Analyzer, Spectrum | 8565EC | 3946A00131 | 2006-01-11 |

* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Test Setup Diagram



Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 24 ° C |
| Relative Humidity: | 65 % |
| ATM Pressure: | 1020 mbar |

*The testing was performed by James Ma on 2006-11-13.

Measurement Result


| Channel | Frequency (MHz) | Max Peak Output Power | | Limit (mw) | Result |
|---------|--------------------|-----------------------|-------|---------------|--------|
| | | (dBm) | (mw) | | |
| Low | 2402.0 | 6.50 | 4.47 | 1000 | pass |
| Mid | 2442.0 | 9.00 | 7.94 | 1000 | pass |
| High | 2479.0 | 11.17 | 13.09 | 1000 | pass |


Please see the following plots:

Low Channel



Middle Channel

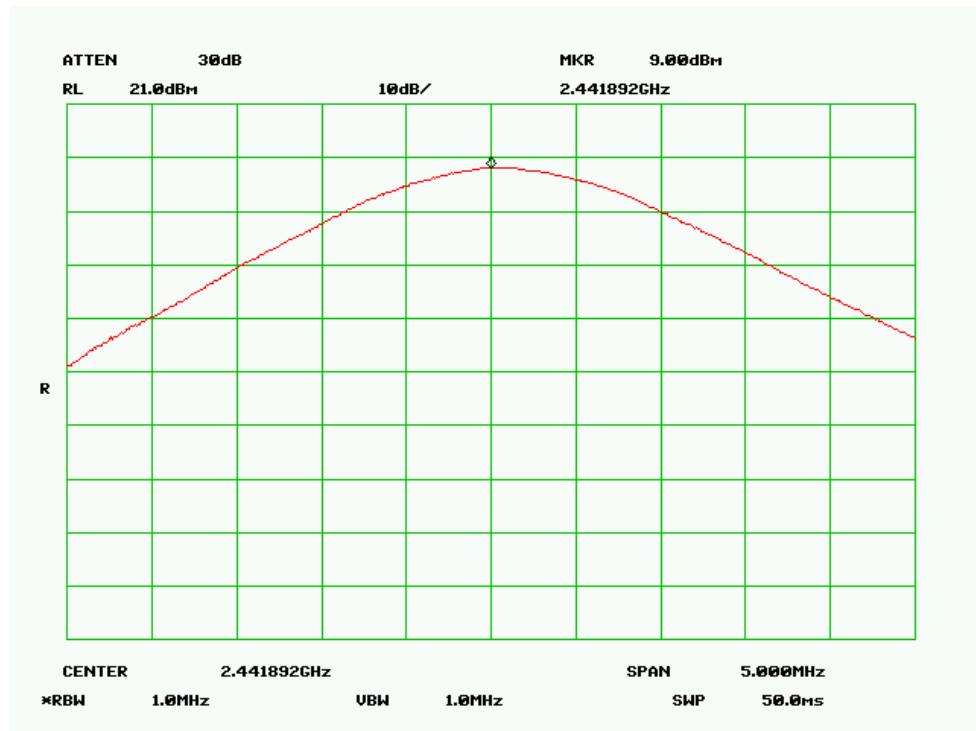

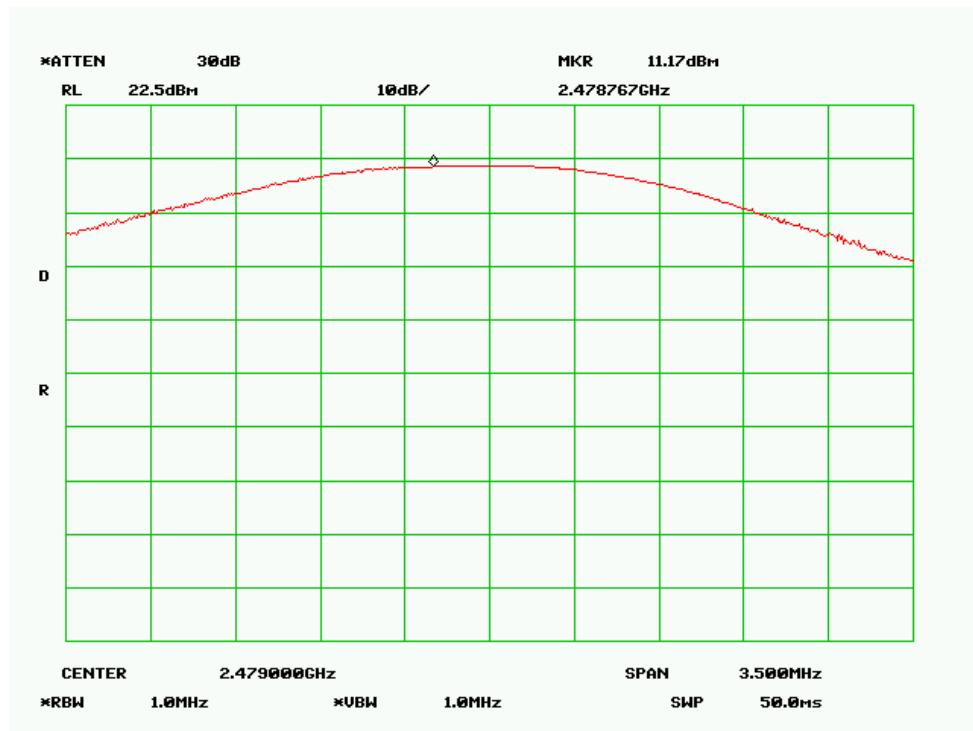High Channel

§15.247 (d) - 100 KHz BANDWIDTH OF BAND EDGES

Applicable Standard

According to §15.247(c), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required.

Measurement Procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment

| Manufacturer | Description | Model No. | Serial No. | Calibration Date |
|--------------|--------------------|-----------|------------|------------------|
| HP | Analyzer, Spectrum | 8565EC | 3946A00131 | 2006-01-11 |

* **Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Test Setup Diagram



Environmental Conditions



| | |
|--------------------|-----------|
| Temperature: | 24 ° C |
| Relative Humidity: | 65 % |
| ATM Pressure: | 1020 mbar |

*The testing was performed by James Ma on 2006-11-13

Please refer to the following plots for results.

Plots of 100 KHz Bandwidth of Band Edge

Hopping Mode:

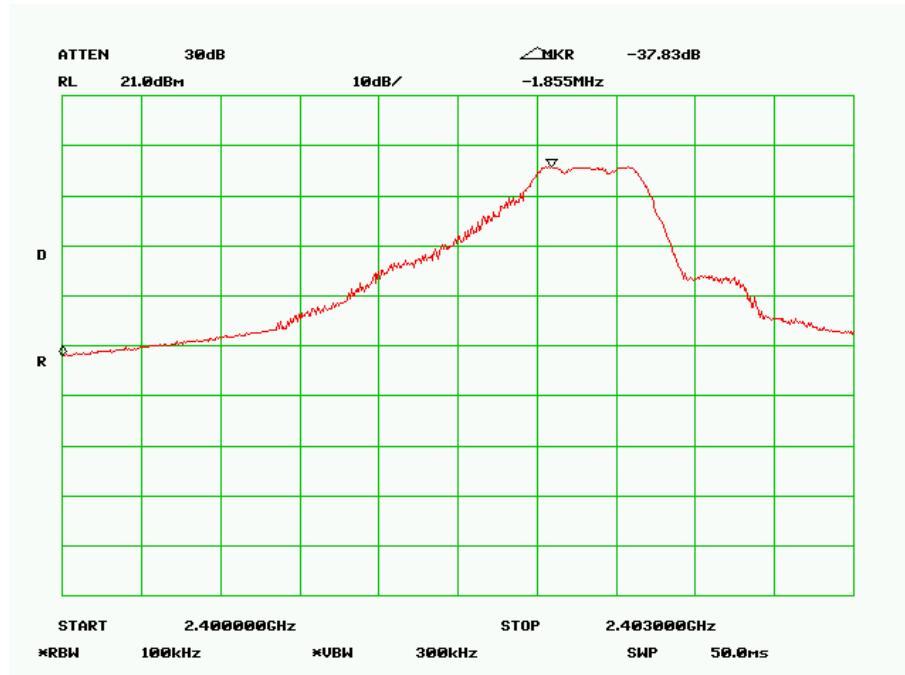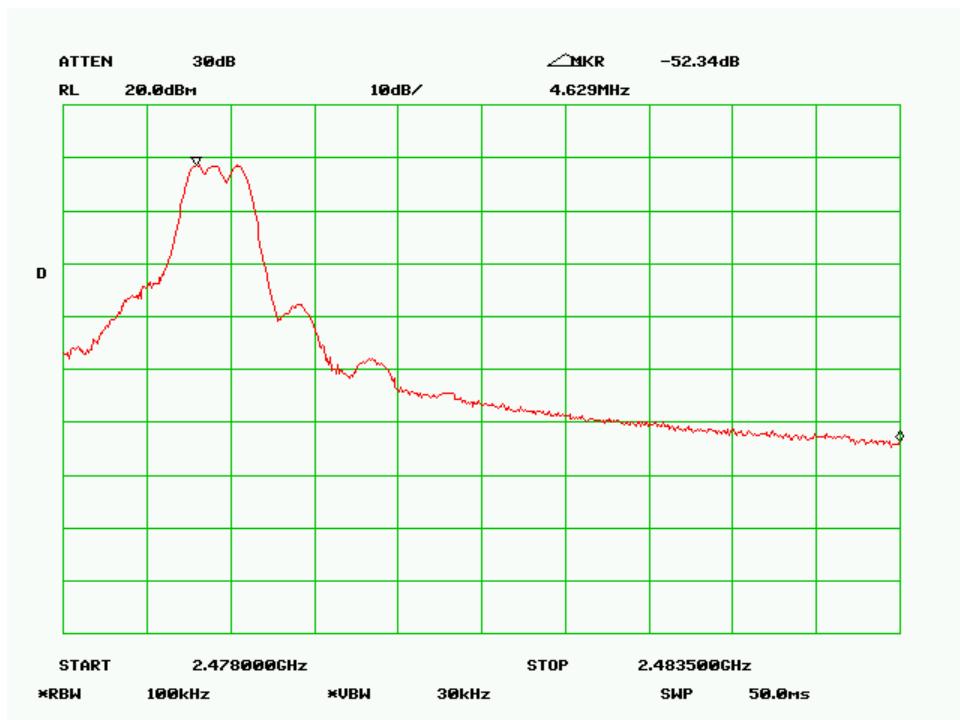Low Channel**High Channel**

§2.1051 SPURIOUS EMISSIONS AT ANTENNA PORT

Applicable Standard

According to §15.209 (f) and §15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in §15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in §15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit

Measurement Procedure


1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on a bench without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the SA on Max-Hold Mode, and then keep the EUT in transmitting mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

Test Equipment

| Manufacturer | Description | Model Number | Serial Number | Calibration Date |
|--------------|--------------------|--------------|---------------|------------------|
| HP | Analyzer, Spectrum | 8565EC | 3946A00131 | 2006-01-11 |

* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Test Setup Diagram







Environmental Conditions


| | |
|--------------------|-----------|
| Temperature: | 26 ° C |
| Relative Humidity: | 65 % |
| ATM Pressure: | 1020 mbar |

*The testing was performed by James Ma on 2006-11-13.


Please refer to the following plots.

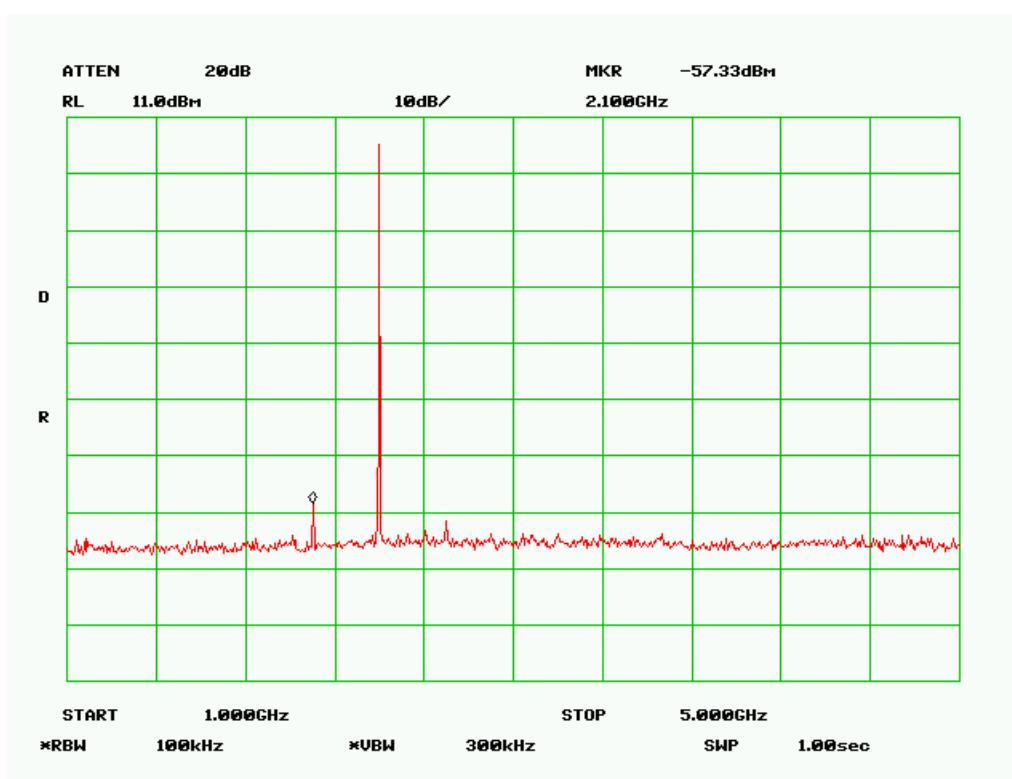
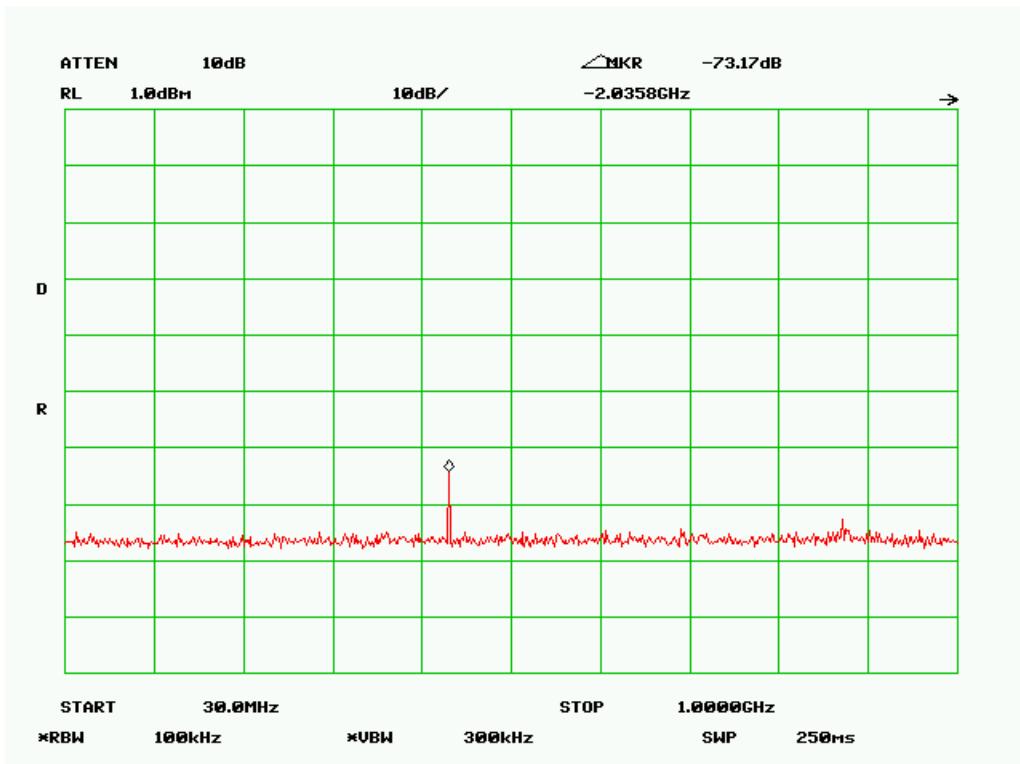
Measurement Results**Low CH**

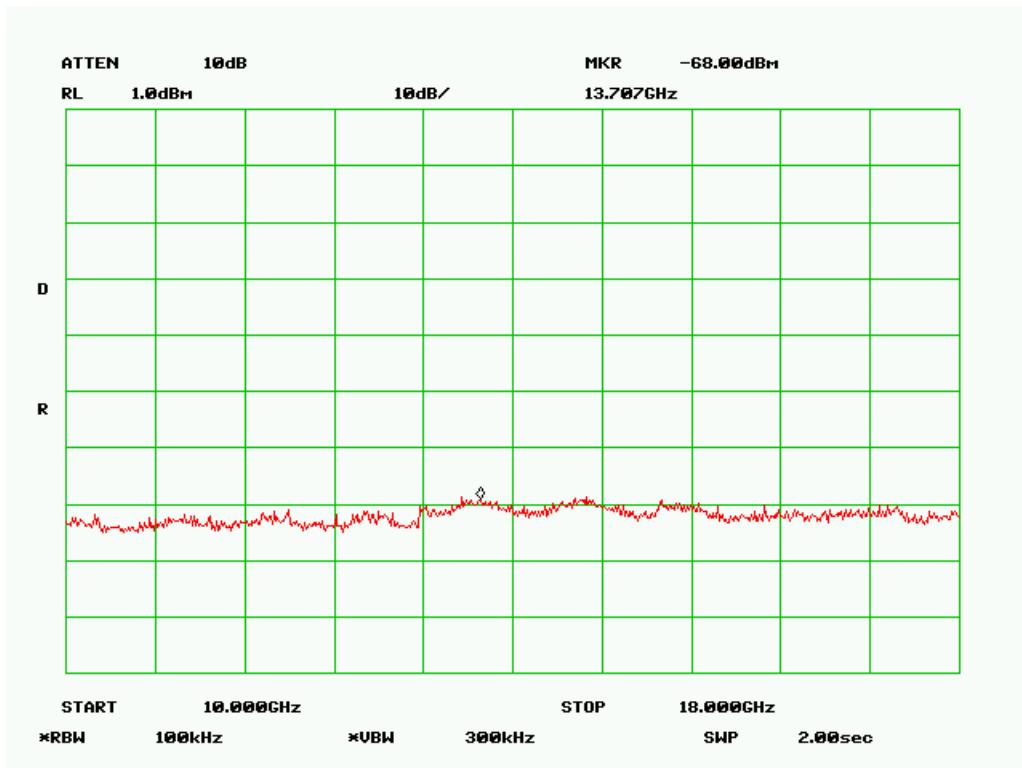
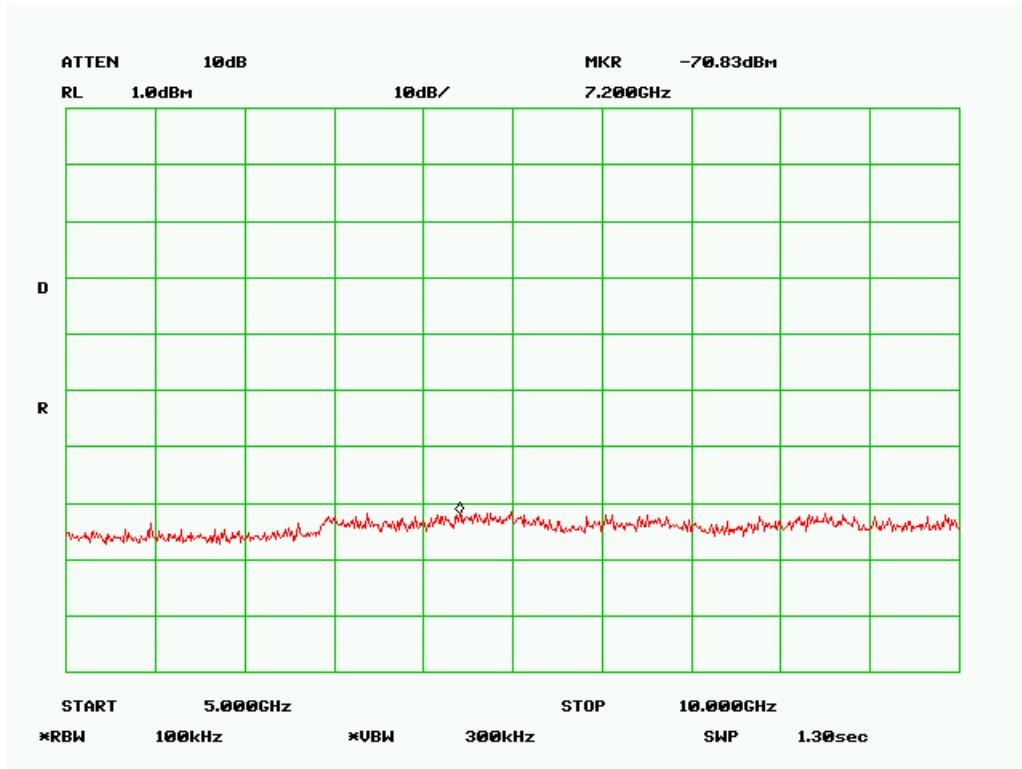



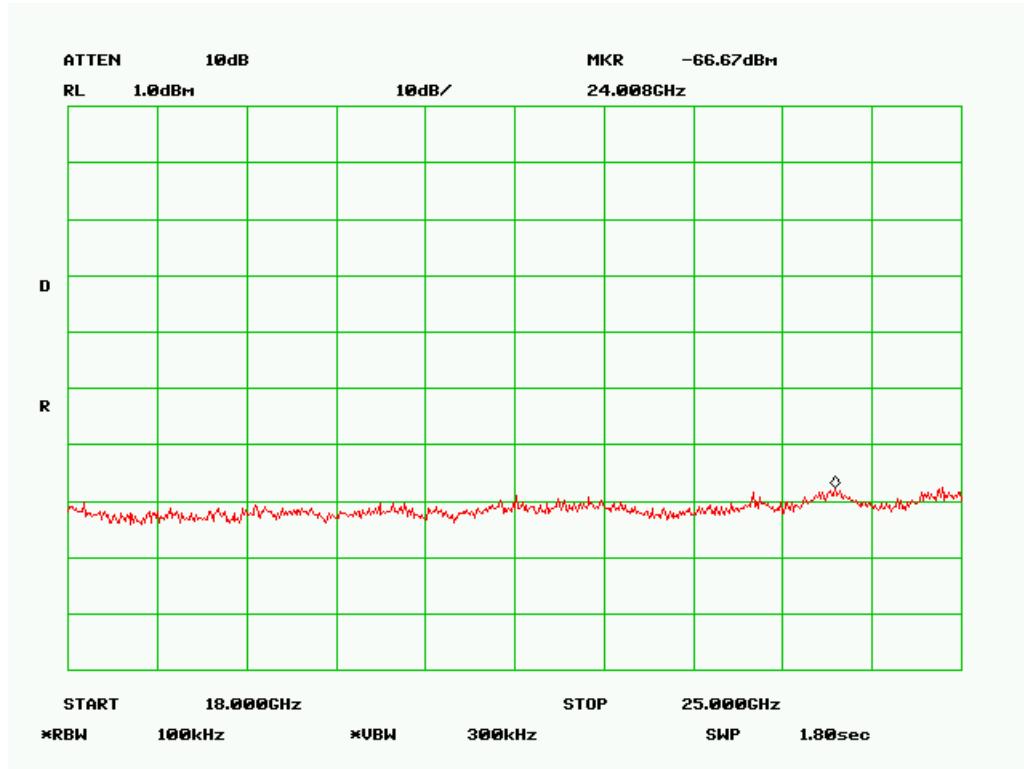




Middle CH

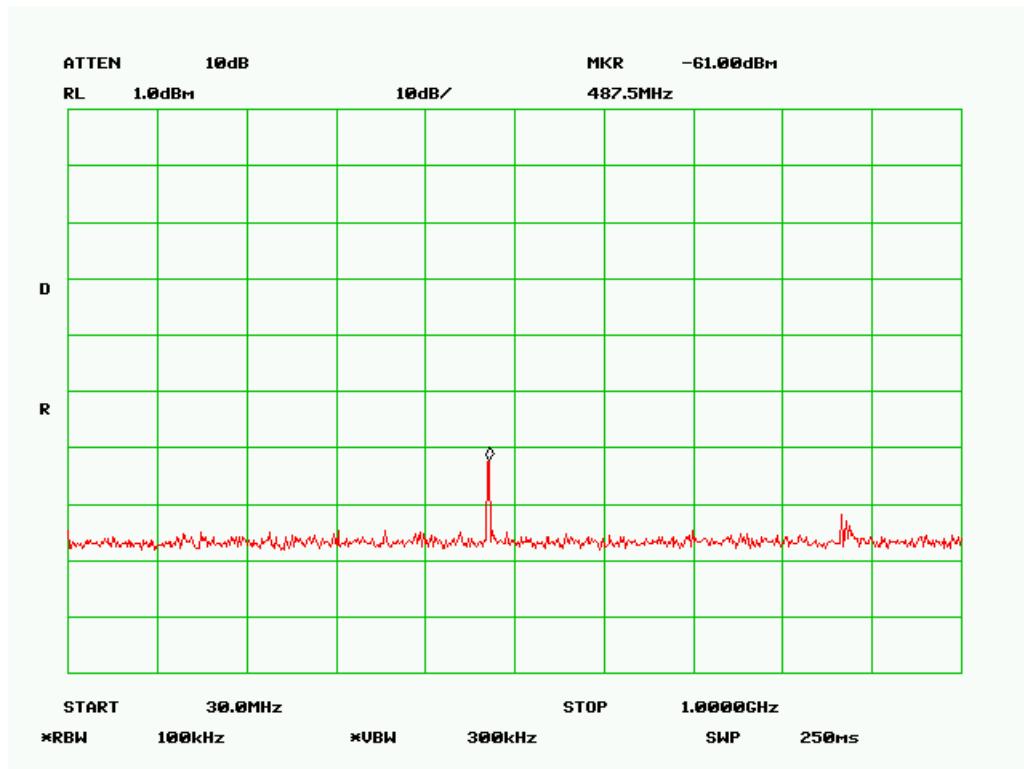


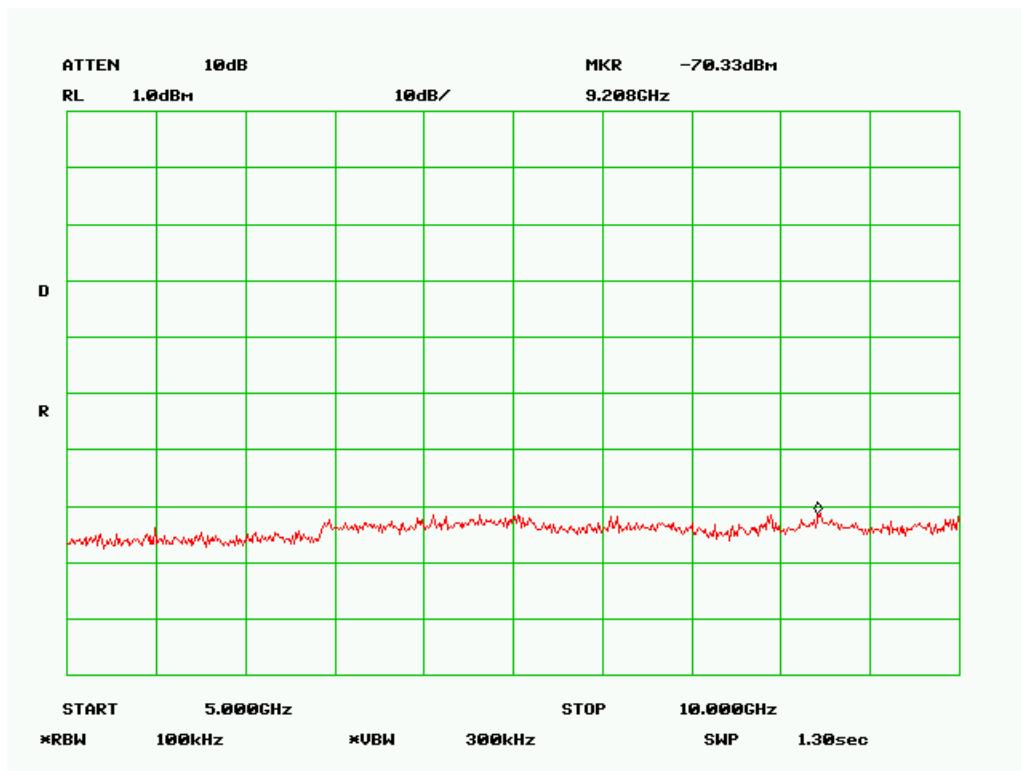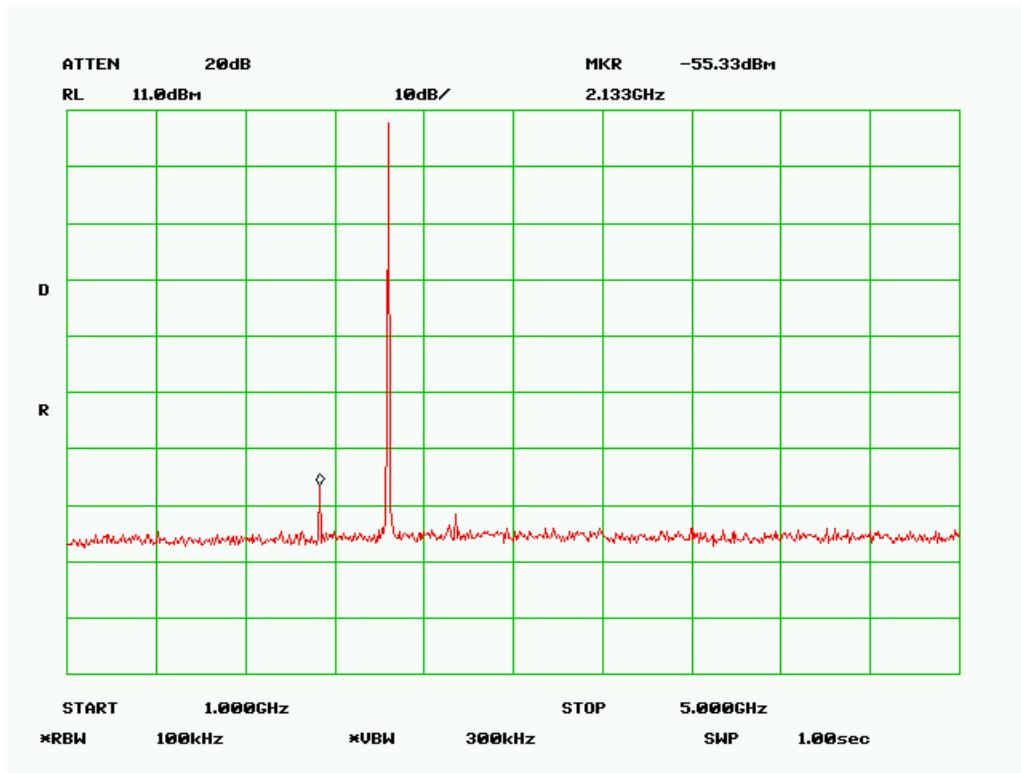

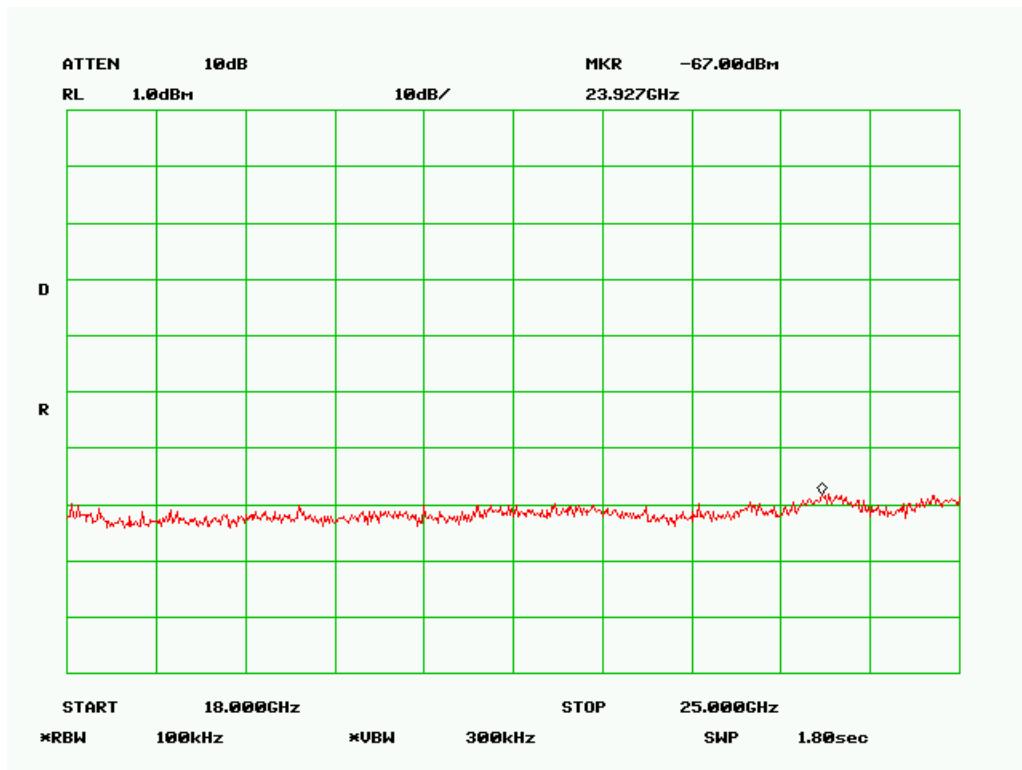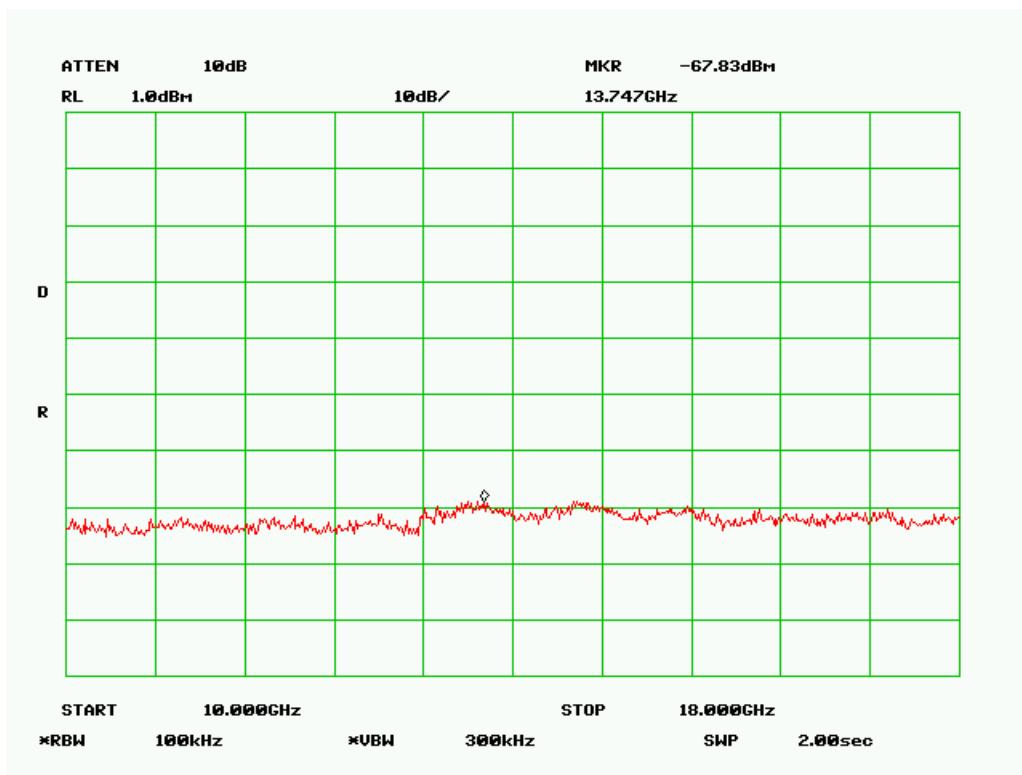

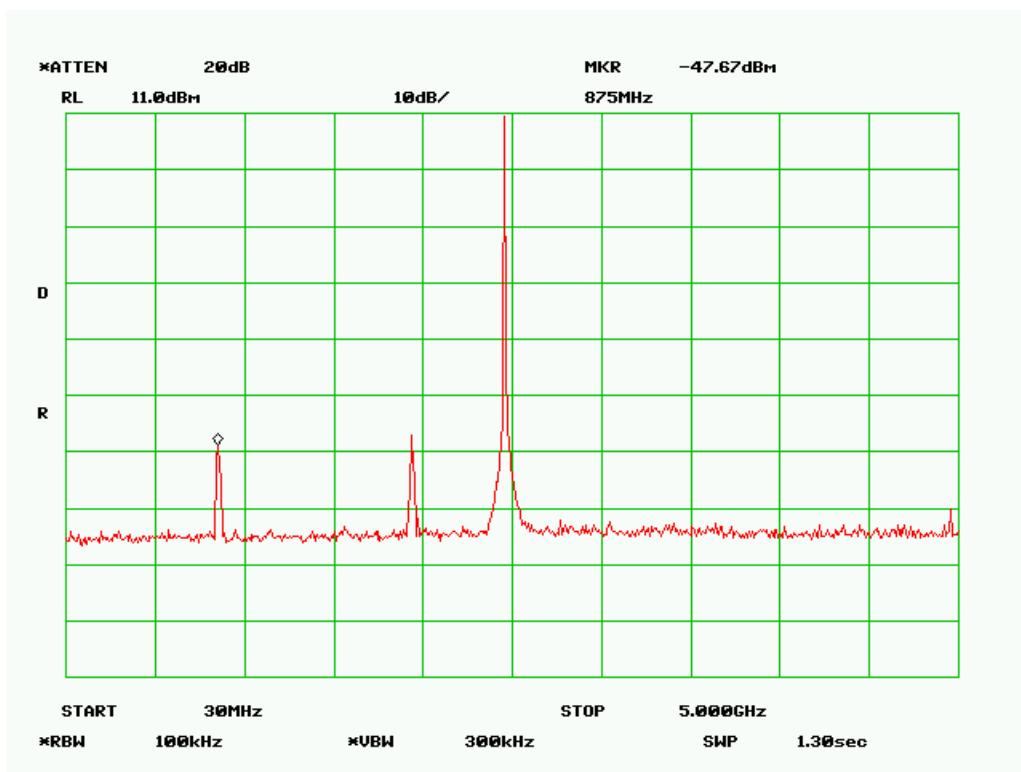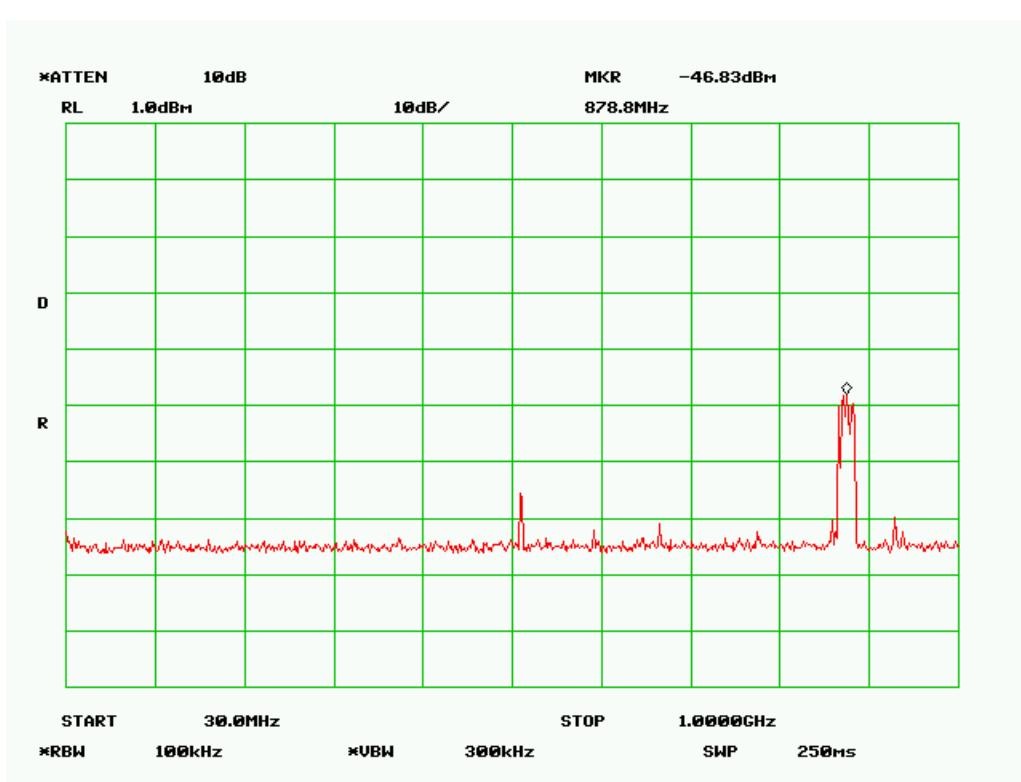High CH

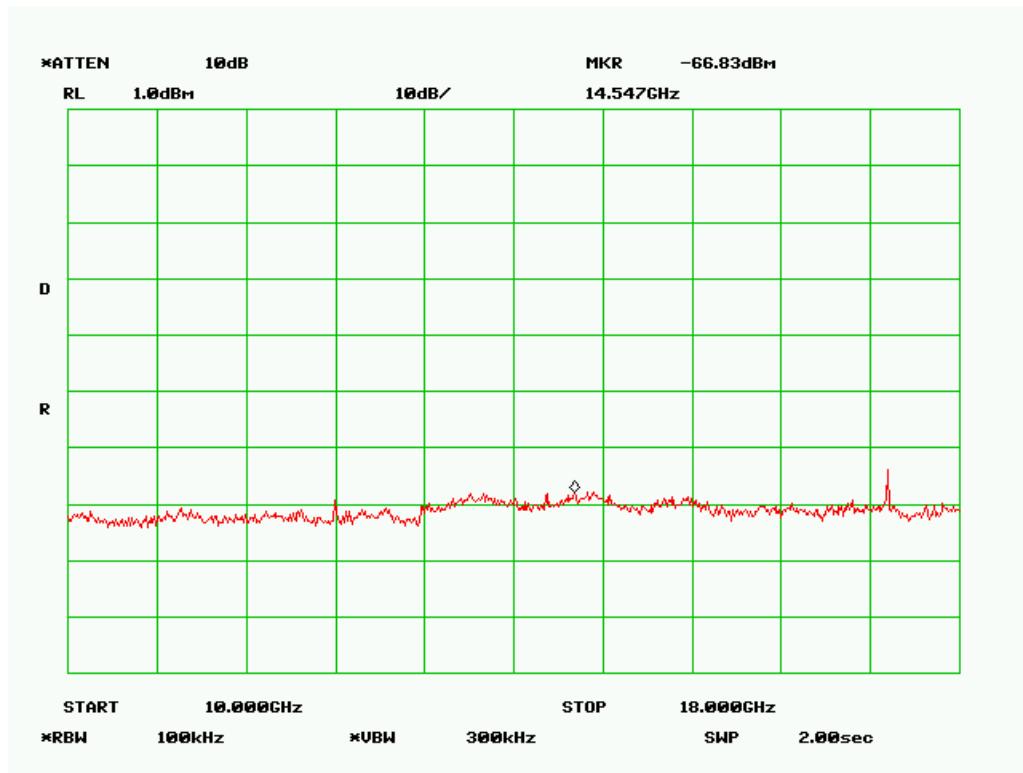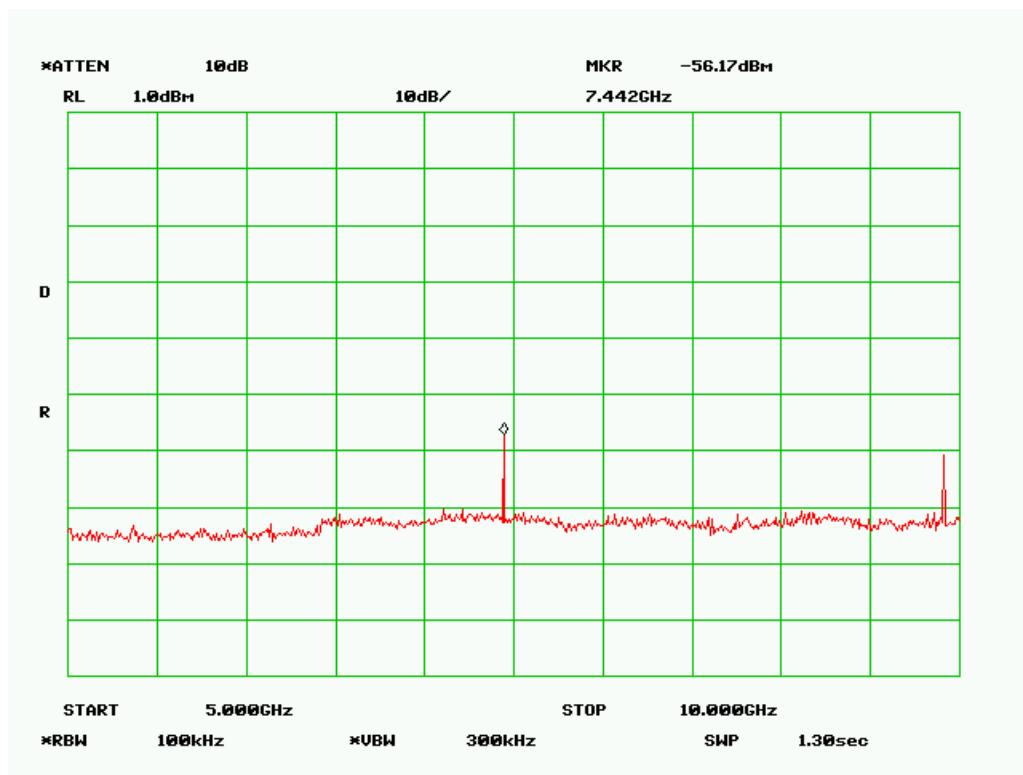

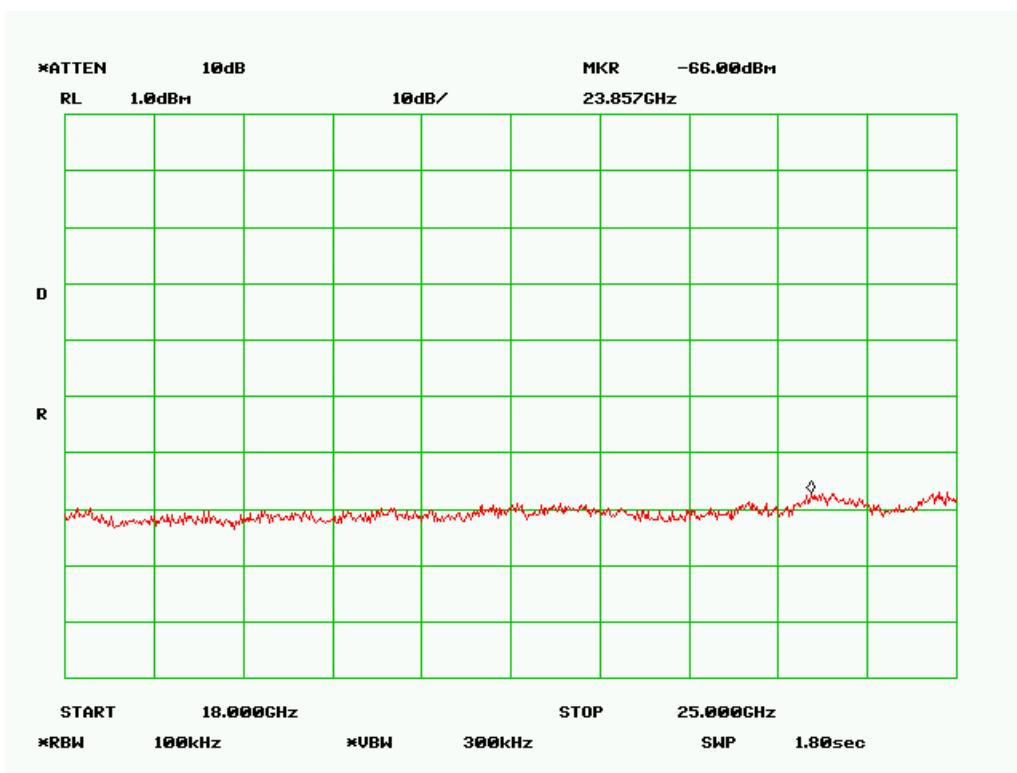

§ 15.247 (e) (i) and § 2.1091 - RF EXPOSURE

According to §15.247(e)(i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated.

Limits for General Population/Uncontrolled Exposure

| Limits for General Population/Uncontrolled Exposure | | | | |
|---|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| Frequency Range (MHz) | Electric Field Strength (V/m) | Magnetic Field Strength (A/m) | Power Density (mW/cm ²) | Averaging Time (minutes) |
| 0.3-1.34 | 614 | 1.63 | *(100) | 30 |
| 1.34-30 | 824/f | 2.19/f | *(180/f ²) | 30 |
| 30-300 | 27.5 | 0.073 | 0.2 | 30 |
| 300-1500 | / | / | f/1500 | 30 |
| 1500-100,000 | / | / | 1.0 | 30 |

f = frequency in MHz

* = Plane-wave equivalent power density

MPE Prediction

Predication of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

Maximum peak output power at antenna input terminal: 11.17(dBm)

Maximum peak output power at antenna input terminal: 13.09 (mw)

Prediction distance: 20 (cm)

Predication frequency: 2479 (MHz)

Antenna Gain (typical): 5.0 (dBi)

Antenna gain: 3.16 (numeric)

Power density at predication frequency at 20 cm: 0.00823(mW/cm²)

MPE limit for uncontrolled exposure at prediction frequency: 1.00 (mW/cm²)

Test Result

The EUT is a mobile device. The power density level at 20 cm is 0.00823mW/cm², which is below the uncontrolled exposure limit of 1.00mW/cm² at 2479 MHz.