

FCC SAR TEST REPORT

Test File No : F690501-RF-SAR000457

Equipment Under Test	Wireless Headphones
Model Name	ATH-CKS50TW2
Applicant	Audio-Technica Corporation
Address of Applicant	2-46-1 Nishi-naruse, Machida, Tokyo, Japan, 194-8666
FCC ID	JFZCKS50TW2L
Exposure Category	General Population/Uncontrolled Exposure
Standards	FCC 47 CFR Part 2 (2.1093) IEEE 1528, 2013
Receipt No.	GPRI2404000466SR
Date of Receipt	2024-04-22
Date of Test(s)	2024-05-20 ~ 2024-05-23
Date of Issue	2024-05-28
Test Result	PASS, Refer to the Page 04
Measurement Uncertainty	Refer to the Page 27

In the configuration tested, the EUT complied with the standards specified above.


This test report does not assure KOLAS accreditation.

Remarks:

- 1) The results of this test report are effective only to the items tested.
- 2) The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received.



Report prepared by /
Jane Lee
Test Engineer



Approved by /
Minhyuk Han
Technical Manager

Report File No : F690501-RF-SAR000457

Date of Issue : 2024-05-28

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)



Revision history

Revision	Date of issue	Revisions	Revised By
-	May 28, 2024	Initial issue	-

Table of Contents

1. Testing Laboratory	4
2. Details of Manufacturer	4
3. Description of EUT(s)	4
4. The Highest Reported SAR Values	4
5. Test Methodology	5
6. Testing Environment	5
7. Specific Absorption Rate (SAR)	6
7.1. Introduction	6
7.2. SAR Definition	6
7.3. Test Standards and Limits	6
8. The SAR Measurement System	8
9. System Components	9
9.1. Probe	9
9.2. SAM Phantom	9
9.3. Device Holder	9
10. SAR Measurement Procedures	10
10.1. Normal SAR Measurement Procedure	10
11. SAR System Verification	12
12. Maximum Output Power Specifications*	13
13. Tissue Simulant Fluid for the Frequency Band	14
14. Instruments List	15
15. FCC Power Measurement Procedures	16
16. Measured and Reported SAR	16
17. RF Conducted Power Measurement	16
17.1. Bluetooth Classic Conducted Power(Left)	16
17.2. Bluetooth LE Conducted Power(Left)	17
18. Bluetooth Duty Cycle used for SAR Testing	18
18.1. Bluetooth Classic DH5 Duty Cycle	18
18.2. Bluetooth LE 1M 255byte Duty Cycle	19
19. SAR Data Summary	20
19.1. SAR data	20
20. SAR Measurement Variability	21
20.1. Measurement Variability	21
20.2. Measurement Uncertainty	21
Appendixes List	22
Appendix A.1 Verification Test Plots for 2450MHz	23
Appendix A.2 SAR Test Plots for Bluetooth Classic	25
Appendix A.3 SAR Test Plots for Bluetooth LE	26
Appendix B.1 Uncertainty Analysis	27
Appendix C.1 Calibration certificate for Probe (S/N : 3791)	28
Appendix C.2 Calibration certificate for DAE (S/N : 1504)	50
Appendix C.3 Calibration certificate for Dipole (S/N: 734)	55
-THE END-	60

1. Testing Laboratory

Company Name	SGS Korea Co., Ltd. (Gunpo Laboratory)
Address	4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807 Republic of Korea
Telephone	+82 31 428 5700
FAX	+82 31 427 2371

2. Details of Manufacturer

Manufacturer	Audio-Technica Corporation
Address	2-46-1 Nishi-naruse, Machida, Tokyo, Japan, 194-8666
Email	kamimura@audio-technica.co.jp
Phone No.	+81-42-739-9128

3. Description of EUT(s)

EUT Type	Wireless Headphones	
Model Name	ATH-CKS50TW2	
Serial Number	1	
Software Version	V1.00	
Hardware Version	V1.00	
Mode of Operation	Bluetooth Classic, Bluetooth LE	
Duty Cycle	76.1 % (Bluetooth Classic), 41.5 % (Bluetooth Low Energy)	
Body worn Accessory	None	
Tx Frequency Range	2 402.00 MHz ~ 2 480.00 MHz (Bluetooth) 2 402.00 MHz ~ 2 480.00 MHz (Bluetooth Low Energy 1M) 2 404.00 MHz ~ 2 478.00 MHz (Bluetooth Low Energy 2M)	
Antenna Information [※]	Manufacturer	AWAVE
	Type	Monopole Antenna
	Antenna Gain (dBi)	-2.80

4. The Highest Reported SAR Values

Equipment Class	Band	Highest Reported SAR 1g (W/kg)
DSS	Bluetooth	0.325
DTS	Bluetooth Low Energy	0.411
Simultaneous SAR per KDB 690783 D01v0r03		N/A

5. Test Methodology

ANSI/IEEE C95.1–2005: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. It specifies the maximum exposure limit of 1.6 W/kg / 4.0 W/kg as averaged over any 1 gram / 10 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

Test tests documented in this report were performed in accordance with IEEE Standard 1528-2013 and the following published KDB procedures.

In additions;

<input checked="" type="checkbox"/>	KDB 865664 D01v01r04	SAR Measurement Requirements for 100 MHz to 6 GHz
<input checked="" type="checkbox"/>	KDB 865664 D02v01r02	RF Exposure Compliance Reporting and Documentation Considerations
<input checked="" type="checkbox"/>	KDB 447498 D04v01	RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices
<input type="checkbox"/>	KDB 447498 D02v02r01	SAR Measurement Procedures for USB Dongle Transmitters
<input type="checkbox"/>	KDB 248227 D01v02r02	SAR Guidance For IEEE 802.11 (Wi-Fi) Transmitters
<input type="checkbox"/>	KDB 615223 D01v01r01	802.16e/WiMax SAR Measurement Guidance
<input type="checkbox"/>	KDB 616217 D04v01r02	SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers
<input type="checkbox"/>	KDB 643646 D01v01r03	SAR Test Considerations for Occupational PTT Radios
<input type="checkbox"/>	KDB 648474 D03v01r04	Evaluation and Approval Considerations for Handsets with Specific Wireless Charging Battery Covers
<input type="checkbox"/>	KDB 648474 D04v01r03	SAR Evaluation Considerations for Wireless Handsets
<input type="checkbox"/>	KDB 680106 D01v03r01	RF Exposure Considerations for Low Power Consumer Wireless Power Transfer Applications
<input type="checkbox"/>	KDB 941225 D01v03r01	3G SAR Measurement Procedures
<input type="checkbox"/>	KDB 941225 D05v02r05	SAR Evaluation Considerations for LTE Devices
<input type="checkbox"/>	KDB 941225 D06v02r01	SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities
<input type="checkbox"/>	KDB 941225 D07v01r02	SAR Evaluation Procedures for UMPC Mini-Tablet Devices

6. Testing Environment

Ambient temperature	: 18°C ~ 25°C
Relative humidity	: 30% ~ 70%
Liquid temperature of during the test	: <± 2°C
Ambient noise & Reflection	: < 0.012 W/kg

7. Specific Absorption Rate (SAR)

7.1. Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

7.2. SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7.3. Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.3-2003, Copyright 2003 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting

source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter. Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

(1) Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over an 10 grams of tissue (defined as a tissue volume in the shape of a cube). Occupational/Controlled limits apply when persons are exposed as a consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.

(2) Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure. Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section.

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Partial Peak SAR (Partial)	1.60 mW/g	8.00 mW/g
Partial Average SAR (Whole Body)	0.08 mW/g	0.40 mW/g
Partial Peak SAR (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

1. The spatial Peak value of the SAR averaged over any 1g gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

8. The SAR Measurement System

A block diagram of the SAR measurement System is given in Fig. 1. This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY system). The model EX3DV4 field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E_i|^2) / \rho$ where σ and ρ are the conductivity and mass density of the tissue-simulant.

The DASY system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Staubli TX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- A dosimeter probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- Data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

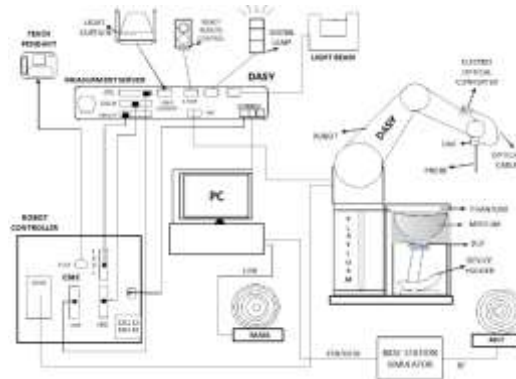


Fig a. The microwave circuit arrangement used for SAR system verification

- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows.
- DASY software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Verification dipole kits allowing to validate the proper functioning of the system.

9. System Components

9.1. Probe

- Construction** : Symmetrical design with triangular core.
 Built-in shielding against static charges.
 PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
- Calibration** : Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 835 and HSL1900.
 Additional CF-Calibration for other liquids and frequencies upon request.
- Frequency** : 10 MHz to 6 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz)
- Directivity** : ± 0.3 dB in HSL (rotation around probe axis)
 ± 0.5 dB in tissue material (rotation normal to probe axis)
- Dynamic Range** : $10\mu\text{W/g}$ to > 100 m W/g;
 Linearity: ± 0.2 dB(noise: typically $< 1\mu\text{W/g}$)
- Dimensions** : Overall length: 337 mm (Tip length: 20 mm)
 Tip diameter: 2.5 mm (Body diameter: 12 mm)
 Distance from probe tip to dipole centers: 1 mm
- Application** : High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%



EX3DV4 E-Field Probe

NOTE:

- The Probe parameters have been calibrated by the SPEAG. Please reference “APPENDIX C” for the Calibration Certification Report.

9.2. SAM Phantom

- Construction** : The SAM Phantom is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90 % of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot
- Shell Thickness** : $2.0\text{ mm} \pm 0.1\text{ mm}$
- Filling Volume** : Approx. 25 liters



SAM Phantom

9.3. Device Holder

- Construction:** : In combination with the Twin SAM PhantomV4.0/V4.0C or Twin SAM, the Mounting Device (made from POM) enables the rotation of the mounted transmitter in spherical coordinates, whereby the rotation point is the ear opening. The devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



Device Holder

10. SAR Measurement Procedures

10.1. Normal SAR Measurement Procedure

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 1.4 mm. This distance cannot be smaller than the Distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2 and 3: Area Scan & Zoom Scan Procedures

The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

1. The extraction of the measured data (grid and values) from the Zoom Scan.
2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
3. The generation of a high-resolution mesh within the measured volume
4. The interpolation of all measured values from the measurement grid to the high-resolution grid
5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
6. The calculation of the averaged SAR within masses of 1 g and 10 g.

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1. SAR drift shall be kept within $\pm 5\%$ and if it without $\pm 5\%$, SAR retest according to measurement procedure step 1~4.

< Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04 >

		≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		$5 \text{ mm} \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \text{ mm} \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$		≤ 2 GHz: $\leq 15 \text{ mm}$ 2 – 3 GHz: $\leq 12 \text{ mm}$	3 – 4 GHz: $\leq 12 \text{ mm}$ 4 – 6 GHz: $\leq 10 \text{ mm}$
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$		≤ 2 GHz: $\leq 8 \text{ mm}$ 2 – 3 GHz: $\leq 5 \text{ mm}^*$	3 – 4 GHz: $\leq 5 \text{ mm}^*$ 4 – 6 GHz: $\leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}(n)}$	$\leq 5 \text{ mm}$	3 – 4 GHz: $\leq 4 \text{ mm}$ 4 – 5 GHz: $\leq 3 \text{ mm}$ 5 – 6 GHz: $\leq 2 \text{ mm}$
	graded grid $\Delta z_{\text{Zoom}(1)}$: between 1 st two points closest to phantom surface	$\leq 4 \text{ mm}$	3 – 4 GHz: $\leq 3 \text{ mm}$ 4 – 5 GHz: $\leq 2.5 \text{ mm}$ 5 – 6 GHz: $\leq 2 \text{ mm}$
	$\Delta z_{\text{Zoom}(n>1)}$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}(n-1)} \text{ mm}$	
Minimum zoom scan volume	x, y, z	$\geq 30 \text{ mm}$	3 – 4 GHz: $\geq 28 \text{ mm}$ 4 – 5 GHz: $\geq 25 \text{ mm}$ 5 – 6 GHz: $\geq 22 \text{ mm}$
<p>Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.</p> <p>* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.</p>			

11. SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig 1. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. These tests were done at 2450 MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1. (SAR values are normalized to 1W forward power delivered to the dipole). During the tests, the ambient temperature of the laboratory was in the range $(22 \pm 2) ^\circ \text{C}$, the relative humidity was in the range $(55 \pm 5) \% \text{ R.H}$ and the liquid depth above the ear reference points was $\geq 15 \text{ cm} \pm 5 \text{ mm}$ (frequency $\leq 3 \text{ GHz}$) or $\geq 10 \text{ cm} \pm 5 \text{ mm}$ (frequency $> 3 \text{ GHz}$) in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

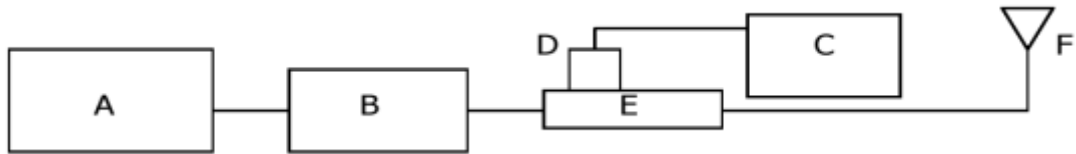


Fig 1. The microwave circuit arrangement used for SAR system verification

- A. Signal Generator
- B. RF Amplifier
- C. Power Meter
- D. Power Sensor
- E. Dual Directional Coupler
- F. Reference dipole Antenna



Photo of the dipole Antenna

SAR System Verification

Dipole Validation Kits		Probe S/N	Freq. (MHz)	Input Power (W)	Target SAR values (W/Kg)		1 W normalized Measured SAR (W/Kg)		Deviation (%)		Date	Temperature (°C)	
					1g SAR	10g SAR	1g SAR	10g SAR	1g SAR	10g SAR		Ambient	Liquid
2450V2	734	3791	2450	0.10	52.90	24.50	54.30	24.70	2.65	0.82	2024-05-20	22.3	22.0
2450V2	734	3791	2450	0.10	52.90	24.50	49.80	22.60	-5.86	-7.76	2024-05-23	22.5	21.7

Table 1 Results system verification

12. Maximum Output Power Specifications[※]

This device operates using the following maximum output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D04v01.

Bluetooth Tune-up Power

Average power for Production (dBm)		
Mode	Maximum/Normal	Classic
BDR	Maximum	10.35
	Normal	9.35
EDR	Maximum	8.50
	Normal	7.50
Tune-up Tolerance: + 1.0dB		

Average power for Production (dBm)					
Mode	Maximum/Normal	Low Energy (Packet: 37)		Low Energy (Packet: 255)	
		1M	2M	1M	2M
LE	Maximum	10.45	10.45	10.45	10.45
	Normal	9.45	9.45	9.45	9.45
Tune-up Tolerance: + 1.0dB					

- The data marked ※ in this report was provided by the customer and may affect the validity of the test results.
We are responsible for all the information of this test report except for the data(※) provided by the customer.

13. Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this simulant fluid were measured by using the Speag Model DAK-3.5 Dielectric Probe in conjunction with Keysight E5063A Network Analyze by using a procedure.

Freq. (MHz)	Target Value		Measure Value		Deviation (%)		Date	Liquid Temperature (°C)
	Permittivity	Conductivity (S/m)	Permittivity	Conductivity (S/m)	Permittivity	Conductivity (S/m)		
2450*	39.20	1.80	38.134	1.767	-2.72	-1.83	2024-05-20	22.0
2402.00	39.20	1.80	38.216	1.735	-2.51	-3.61		
2480.00	39.20	1.80	38.058	1.796	-2.91	-0.22		
2450*	39.20	1.80	37.462	1.831	-4.43	1.72	2024-05-23	21.7
2440.00	39.20	1.80	37.482	1.824	-4.38	1.33		

The brain mixtures consist of a viscous gel using hydroxyethyl cellulose (HEC) gelling agent and saline solution. Preservation with a bactericide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation. The dielectric properties of the liquid material required to fill the phantom shell shall be target.

Frequency (MHz)	450	835	900	1800-2000	2450	2600
Tissue Type	Head & Body					
	Ingredient (% by weight)					
Water	38.91	40.29	40.29	55.24	45.0	45.0
Salt (NaCl)	3.79	1.38	1.38	0.31	0	0
Sugar	56.93	57.90	57.90	0	0	0
HEC	0.25	0.24	0.24	0	0	0
Bactericide	0.12	0.18	0.18	0	0	0
Triton X-100	0	0	0	0	0	0
DGBE	0	0	0	44.45	55.00	55.00
	Tissue parameter target by IEEE 1528-2013					
Dielectric Constant	43.50	41.50	41.50	40.00	39.20	39.00
Conductivity (S/m)	0.87	0.90	0.97	1.40	1.80	1.96
Salt: 99+% Pure Sodium Chloride Water: De-ionized, 16 M ⁺ resistivity				Sucrose: 98+% Pure Sucrose HEC: Hydroxyethyl Cellulose		
DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]						

14. Instruments List

Test Platform	SPEAG DASY System				
Manufacture	SPEAG				
Description	SAR Test System				
Software Reference	DASY52: 52.10.4(1527) SEMCAD X: 14.6.14(7483)				
Equipment	Type	Serial Number	Cal Date	Cal Interval	Cal Due
Phantom	SAM Phantom	1997	N/A	N/A	N/A
Verification Dipole	D2450V2	734	2024-01-22	Biennial	2026-01-22
Dielectric Assessment Kit	DAK-3.5	1228	2023-11-20	Annual	2024-11-20
DAE	DAE4	1504	2024-01-17	Annual	2025-01-17
E-Field Probe	EX3DV4	3791	2024-04-22	Annual	2025-04-22
Network Analyzer	E5063A	MY54706220	2024-01-10	Annual	2025-01-10
Power Meter	N1914A	MY63210027	2023-07-07	Annual	2024-07-07
Power Sensor	N8481A	MY63190004	2023-07-07	Annual	2024-07-07
Power Sensor	N8481A	MY63190005	2023-07-07	Annual	2024-07-07
Signal Generator	N5173B	MY62220611	2023-07-06	Annual	2024-07-06
Power Amplifier	BLMA1060-10	1711221	2024-03-14	Annual	2025-03-14
Dual Directional Coupler	772D	MY52180226	2024-03-05	Annual	2025-03-05
Attenuator	18N-03	18	2023-11-30	Annual	2024-11-30
Attenuator	18N-10	20	2023-11-27	Annual	2024-11-27
Hygro-Thermometer	303	210700048	2024-01-30	Annual	2025-01-30
Digital Thermometer	SDT25	19041500179	2023-09-01	Annual	2024-09-01
Bluetooth Tester	MT8852B	1219006	2023-06-08	Annual	2024-06-08
Spectrum Analyzer	FSP	100007	2023-12-01	Annual	2024-12-01

15. FCC Power Measurement Procedures

The SAR measurement Software calculates a reference point at the start and end of the test to check for power drifts. If conducted power deviations of more than 5 % occurred, the tests were repeated.

16. Measured and Reported SAR

Per FCC KDB Publication 447498 D04v01, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. Test highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

17. RF Conducted Power Measurement

17.1. Bluetooth Classic Conducted Power(Left)


Modulation	Packet	Frequency (MHz)	Channel	Burst-Conducted Average Power	
				Conducted Power (dBm)	E.I.R.P
BDR	DH1	2402.00	0	8.26	2.78
		2441.00	39	8.13	2.65
		2480.00	78	8.32	2.84
	DH3	2402.00	0	9.02	3.54
		2441.00	39	8.87	3.39
		2480.00	78	8.84	3.36
	DH5	2402.00	0	9.51	4.03
		2441.00	39	9.27	3.79
		2480.00	78	9.66	4.18
EDR	2DH1	2402.00	0	7.24	1.76
		2441.00	39	7.07	1.59
		2480.00	78	7.23	1.75
	2DH3	2402.00	0	7.28	1.80
		2441.00	39	7.08	1.60
		2480.00	78	7.21	1.73
	2DH5	2402.00	0	7.34	1.86
		2441.00	39	7.14	1.66
		2480.00	78	7.39	1.91
	3DH1	2402.00	0	7.30	1.82
		2441.00	39	7.06	1.58
		2480.00	78	7.35	1.87
	3DH3	2402.00	0	7.30	1.82
		2441.00	39	7.04	1.56
		2480.00	78	7.23	1.75
	3DH5	2402.00	0	7.31	1.83
		2441.00	39	7.11	1.63
		2480.00	78	7.41	1.93

17.2. Bluetooth LE Conducted Power(Left)

Modulation	Packet	Frequency (MHz)	Channel	Burst-Conducted Average Power	
				Conducted Power (dBm)	E.I.R.P
LE 1M	37byte	2402.00	0	9.34	3.86
		2440.00	19	9.24	3.76
		2480.00	39	9.21	3.73
	255byte	2402.00	0	9.26	3.78
		2440.00	19	9.65	4.17
		2480.00	39	9.29	3.81
LE 2M	37byte	2404.00	1	9.24	3.76
		2440.00	19	9.27	3.79
		2478.00	38	9.26	3.78
	255byte	2404.00	1	9.13	3.65
		2440.00	19	9.56	4.08
		2478.00	38	9.16	3.68

18. Bluetooth Duty Cycle used for SAR Testing

18.1. Bluetooth Classic DH5 Duty Cycle

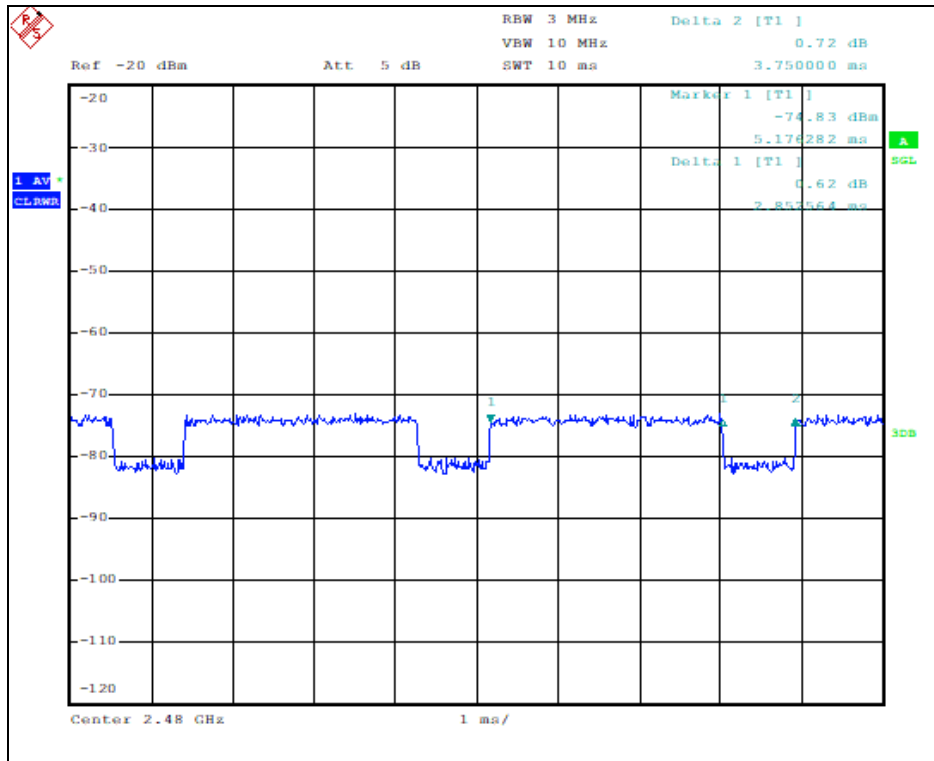

Bluetooth Duty cycle measurement

$T_{on} = 2.853 \text{ ms}$

$T_{on} + T_{off} = 3.750 \text{ ms}$


Duty Cycle = $(T_{on} / T_{on} + T_{off}) \times 100$

76.1 % = $(2.853 / 3.750) \times 100$

SAR Crest Factor = $1 / (2.853 / 3.750) = \mathbf{1.314}$

Bluetooth Duty cycle: 76.1 %

18.2. Bluetooth LE 1M 255byte Duty Cycle

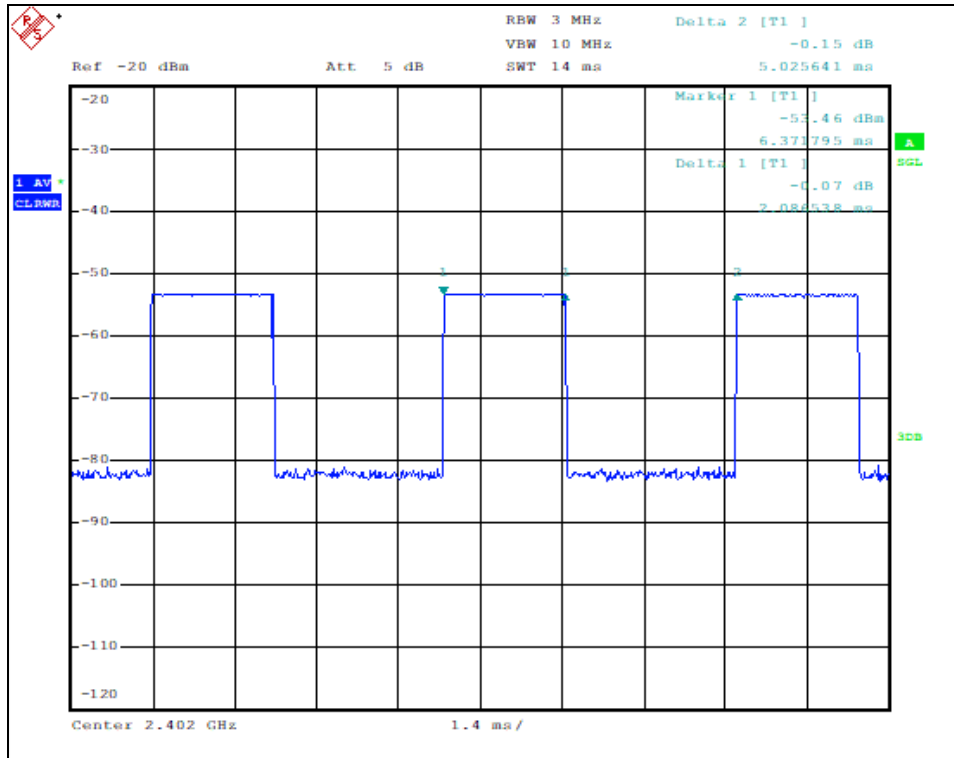

Bluetooth Duty cycle measurement

$T_{on} = 2.087 \text{ ms}$

$T_{on} + T_{off} = 5.026 \text{ ms}$

$\text{Duty Cycle} = (T_{on} / T_{on} + T_{off}) \times 100$

41.5 % = $(2.087 / 5.026) \times 100$

SAR Crest Factor = $1 / (2.087 / 5.026) = \mathbf{2.410}$

Bluetooth Duty cycle: 41.5 %

19. SAR Data Summary

19.1. SAR data

Bluetooth Classic SAR(Left)					Ambient Temperature (°C)			22.3			
					Liquid Temperature (°C)			22.0			
					Date			2024-05-20			
Position	Mod.	Freq (MHz)	Ch.	Sensor State	Space (mm)	Measure Power (dBm)	Measure 1 g SAR (W/kg)	Tune-Up Limit (dBm)	Power Scaling Factor	Duty Scaling Factor	Scaling 1 g SAR (W/kg)
Front	GFSK DH5	2480.00	78	N/A	0	9.66	0.211	10.35	1.172	1.314	0.325
Rear	GFSK DH5	2480.00	78	N/A	0	9.66	0.029	10.35	1.172	1.314	0.045
Right Edge	GFSK DH5	2480.00	78	N/A	0	9.66	0.115	10.35	1.172	1.314	0.177
Left Edge	GFSK DH5	2480.00	78	N/A	0	9.66	0.120	10.35	1.172	1.314	0.185
Top	GFSK DH5	2480.00	78	N/A	0	9.66	0.059	10.35	1.172	1.314	0.091
Bottom	GFSK DH5	2480.00	78	N/A	0	9.66	0.153	10.35	1.172	1.314	0.236

Bluetooth LE SAR(Left)					Ambient Temperature (°C)			22.5			
					Liquid Temperature (°C)			21.7			
					Date			2024-05-23			
Position	Mod.	Freq (MHz)	Ch.	Sensor State	Space (mm)	Measure Power (dBm)	Measure 1 g SAR (W/kg)	Tune-Up Limit (dBm)	Power Scaling Factor	Duty Scaling Factor	Scaling 1 g SAR (W/kg)
Front	1M 255byte	2440.00	19	N/A	0	9.65	0.142	10.45	1.202	2.410	0.411
Rear	1M 255byte	2440.00	19	N/A	0	9.65	0.024	10.45	1.202	2.410	0.070
Right Edge	1M 255byte	2440.00	19	N/A	0	9.65	0.073	10.45	1.202	2.410	0.211
Left Edge	1M 255byte	2440.00	19	N/A	0	9.65	0.008	10.45	1.202	2.410	0.023
Top	1M 255byte	2440.00	19	N/A	0	9.65	0.029	10.45	1.202	2.410	0.084
Bottom	1M 255byte	2440.00	19	N/A	0	9.65	0.118	10.45	1.202	2.410	0.342

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in FCC KDB Publication 447498 D04v01.
2. Liquid tissue depth was at least 15 cm for all frequencies.
3. All modes of operation were investigated, and worst-case results are reported.
4. The EUT is tested 2nd hot-spot peak if it is less than 2 dB below the highest peak.
5. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
6. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D04v01.
7. Batteries are fully charged at the beginning of the SAR measurements.

20. SAR Measurement Variability

20.1. Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

1. When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
2. A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
3. A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
4. Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

20.2. Measurement Uncertainty

The measured SAR was < 1.5 W/kg for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.



Appendixes List

Appendix A	A.1 Verification Test Plots for 2450MHz A.2 SAR Test Plots for Bluetooth Classic A.3 SAR Test Plots for Bluetooth LE
Appendix B	B.1 Uncertainty Analysis
Appendix C	C.1 Calibration certificate for Probe (S/N: 3791) C.2 Calibration certificate for DAE (S/N: 1504) C.3 Calibration certificate for Dipole 2450 MHz (S/N: 734)

Appendix A.1 Verification Test Plots for 2450MHz

Date/Time: 2024-05-20 13:15:58

Test Laboratory : SGS Korea (Gunpo Laboratory)
 File Name: [Verification 2450MHz 2024-05-20.da53:0](#)

Input Power: 100 mW

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:734

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.767$ S/m; $\epsilon_r = 38.134$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


DASY52 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(7.29, 6.72, 6.14) @ 2450 MHz; Calibrated: 2024-04-22
 - Sensor-Surface: 1.4mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1504; Calibrated: 2024-01-17
 - Phantom: Twin-SAM V8.0 (20deg probe tilt)_1997; Type: QD 000 P41 Ax; Serial: 1997
 - DASY52 52.10.4(1527)SEMCAD X 14.6.14(7483)

Verification/Verification 2450MHz/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Info: Interpolated medium parameters used for SAR evaluation.
 Maximum value of SAR (interpolated) = 9.16 W/kg

Verification/Verification 2450MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 65.22 V/m; Power Drift = 0.19 dB
 Peak SAR (extrapolated) = 11.4 W/kg
SAR(1 g) = 5.43 W/kg; SAR(10 g) = 2.47 W/kg
 Smallest distance from peaks to all points 3 dB below = 9 mm
 Ratio of SAR at M2 to SAR at M1 = 47.3%

Info: Interpolated medium parameters used for SAR evaluation.
 Maximum value of SAR (measured) = 9.22 W/kg

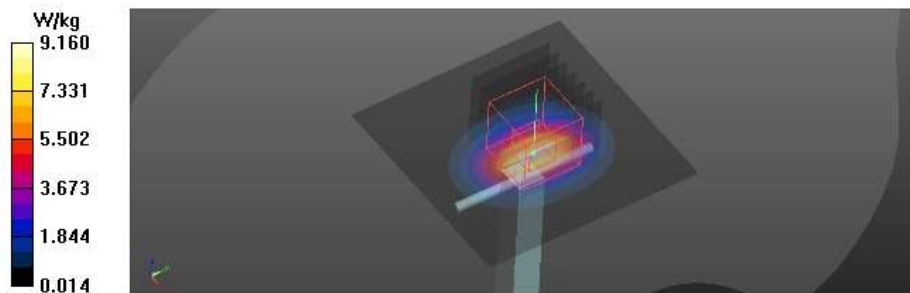

Date/Time: 2024-05-23 13:56:34

Test Laboratory : SGS Korea (Gunpo Laboratory)
 File Name: [Verification 2450MHz 2024-05-23.da53:0](#)

Input Power: 100 mW

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:734

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.831$ S/m; $\epsilon_r = 37.462$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY52 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(7.29, 6.72, 6.14) @ 2450 MHz; Calibrated: 2024-04-22
 - Sensor-Surface: 1.4mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1504; Calibrated: 2024-01-17
 - Phantom: Twin-SAM V8.0 (20deg probe tilt)_1997; Type: QD 000 P41 Ax; Serial: 1997
 - DASY52 52.10.4(1527)SEMCAD X 14.6.14(7483)


Verification/Verification 2450MHz/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)
 Maximum value of SAR (interpolated) = 8.65 W/kg

Verification/Verification 2450MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 72.14 V/m; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 10.5 W/kg
SAR(1 g) = 4.98 W/kg; SAR(10 g) = 2.26 W/kg
 Smallest distance from peaks to all points 3 dB below = 9 mm
 Ratio of SAR at M2 to SAR at M1 = 47.2%

[Info: Interpolated medium parameters used for SAR evaluation.](#)
 Maximum value of SAR (measured) = 8.45 W/kg

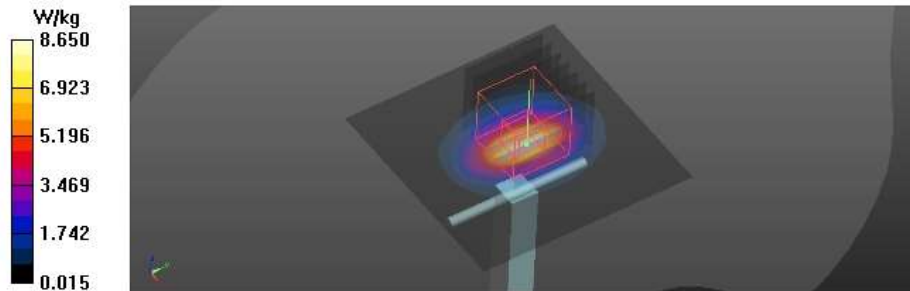

Appendix A.2 SAR Test Plots for Bluetooth Classic

Date/Time: 2024-05-20 13:53:24

Test Laboratory : SGS Korea (Gunpo Laboratory)
 File Name: [BT Ant1 Front GFSK DH5 CH78 Left.da53:0](#)

DUT: ATH-CKS50TW2; Type: Wireless Headphones; Serial: 1


Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1.31401
 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.796$ S/m; $\epsilon_r = 38.058$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN3791; ConvF(7.29, 6.72, 6.14) @ 2480 MHz; Calibrated: 2024-04-22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1504; Calibrated: 2024-01-17
- Phantom: Twin-SAM V8.0 (20deg probe tilt)_1997; Type: QD 000 P41 Ax; Serial: 1997
- DASY52 52.10.4(1527)SEMCAD X 14.6.14(7483)

Head/BT Ant1 Front GFSK DH5 CH78 Left/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.593 W/kg

Head/BT Ant1 Front GFSK DH5 CH78 Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 19.59 V/m; Power Drift = 0.00 dB
 Peak SAR (extrapolated) = 1.52 W/kg
SAR(1 g) = 0.211 W/kg; SAR(10 g) = 0.055 W/kg
 Smallest distance from peaks to all points 3 dB below = 4.1 mm
 Ratio of SAR at M2 to SAR at M1 = 14.2%
 Maximum value of SAR (measured) = 0.659 W/kg

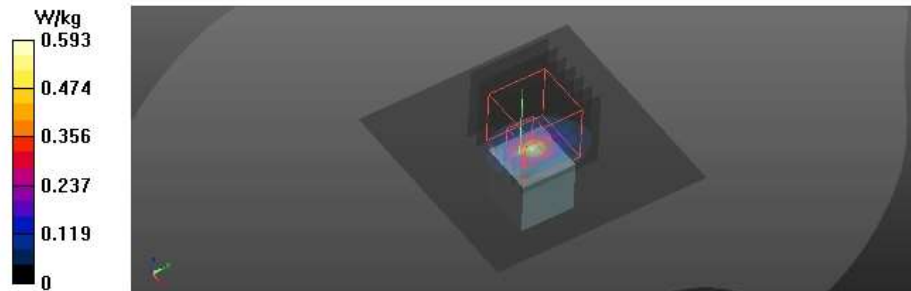

Appendix A.3 SAR Test Plots for Bluetooth LE

Date/Time: 2024-05-23 14:30:59

Test Laboratory : SGS Korea (Gunpo Laboratory)
 File Name: [BTLE Ant1 Front 1M 255byte CH19 Left da53:0](#)

DUT: ATH-CKS50TW2; Type: Wireless Headphones; Serial: 1


Communication System: UID 0, Bluetooth LE (0); Frequency: 2440 MHz; Duty Cycle: 1:2.41046
 Medium parameters used: $f = 2440 \text{ MHz}$; $\sigma = 1.824 \text{ S/m}$; $\epsilon_r = 37.482$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN3791; ConvF(7.29, 6.72, 6.14) @ 2440 MHz; Calibrated: 2024-04-22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1504; Calibrated: 2024-01-17
- Phantom: Twin-SAM V8.0 (20deg probe tilt)_1997; Type: QD 000 P41 Ax; Serial: 1997
- DASY52 52.10.4(1527)SEMCAD X 14.6.14(7483)

Head/BTLE Ant1 Front 1M 255byte CH19 Left/Area Scan (81x81x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.387 W/kg

Head/BTLE Ant1 Front 1M 255byte CH19 Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 16.98 V/m; Power Drift = 0.03 dB
 Peak SAR (extrapolated) = 1.10 W/kg
SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.043 W/kg
 Smallest distance from peaks to all points 3 dB below = 3.6 mm
 Ratio of SAR at M2 to SAR at M1 = 13.9%
 Maximum value of SAR (measured) = 0.464 W/kg

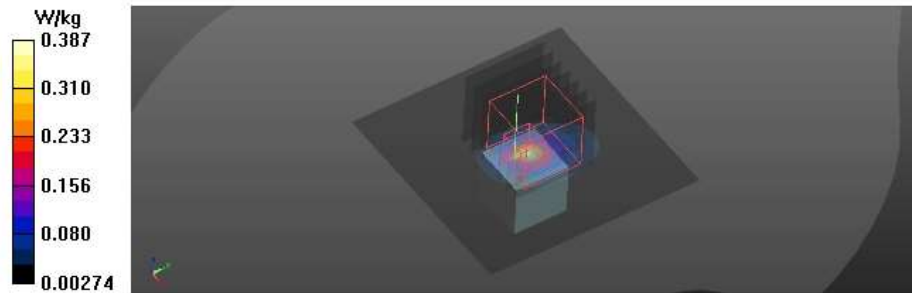

Appendix B.1 Uncertainty Analysis

a	c	d	e = f(d,k)	f	g	h =	i =	k
						cxg/e	cxg/e	
Uncertainty Component	Tol	Prob .	Div.	Ci	Ci	lg	lg	Vi
	(%)	Dist.		(1g)	(10g)	ui (%)	ui (%)	(Veff)
Probe calibration	6.55	N	1.00	1.00	1.00	6.55	6.55	∞
Axial Isotropy	4.70	R	1.73	0.71	0.71	1.92	1.92	∞
Hemispherical Isotropy	9.60	R	1.73	0.71	0.71	3.92	3.92	∞
Boundary Effects	2.00	R	1.73	1.00	1.00	1.15	1.15	∞
Linearity	4.70	R	1.73	1.00	1.00	2.71	2.71	∞
System Detection Limits	0.25	R	1.73	1.00	1.00	0.14	0.14	∞
Modulation Response	4.80	R	1.73	1.00	1.00	2.77	2.77	∞
Readout Electronics	0.30	N	1.00	1.00	1.00	0.30	0.30	∞
Response Time	0.80	R	1.73	1.00	1.00	0.46	0.46	∞
Integration Time	2.60	R	1.73	1.00	1.00	1.50	1.50	∞
RF Ambient Noise	3.00	R	1.73	1.00	1.00	1.73	1.73	∞
RF Ambient Reflections	3.00	R	1.73	1.00	1.00	1.73	1.73	∞
Probe Positioner mechanical tolerance	0.40	R	1.73	1.00	1.00	0.23	0.23	∞
Probe Positioning with respect to phantom shell	6.70	R	1.73	1.00	1.00	3.87	3.87	∞
Extrapolation, interpolation, and integration algorithms for max. SAR evaluation	4.00	R	1.73	1.00	1.00	2.31	2.31	∞
Test sample positioning	1.88/1.97	N	1.00	1.00	1.00	1.88	1.97	35
Device holder uncertainty	3.07/3.21	N	1.00	1.00	1.00	3.07	3.21	3
Output power variation - SAR drift measurement	5.00	R	1.73	1.00	1.00	2.89	2.89	∞
Phantom uncertainty	6.60	R	1.73	1.00	1.00	3.81	3.81	∞
Liquid conductivity- Target	5.00	N	1.00	0.78	0.71	3.90	3.55	∞
Liquid conductivity- measurement	3.10	N	1.00	0.78	0.71	2.42	2.20	71
Liquid permittivity- Target	5.00	N	1.00	0.23	0.26	1.15	1.30	∞
Liquid permittivity- measurement	2.86	N	1.00	0.23	0.26	0.66	0.74	71
Liquid conductivity-temperature	2.46	R	1.73	0.78	0.71	1.11	1.01	20
Liquid permittivity - temperature	0.59	R	1.73	0.23	0.26	0.08	0.09	20
Combined standard uncertainty			RSS			12.93	12.85	854/502
Expanded uncertainty (95% CONFIDENCE INTERVAL)			k=2			25.86	25.70	

Appendix C.1 Calibration certificate for Probe (S/N : 3791)

Calibration Laboratory of
 Schmid & Partner
 Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland




S Schweizerischer Kalibrierdienst
 C Service suisse d'étalonnage
 S Servizio svizzero di taratura
 S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client: **SGS**
 Gyeonggi-Ho, Republic of Korea

Certificate No.: **EX-3791_Apr24**

CALIBRATION CERTIFICATE	
Object	EX3DV4 - SN:3791
Calibration procedure(s)	QA CAL-01.v10, QA CAL-12.v10, QA CAL-14.v7, QA CAL-23.v6, QA CAL-25.v8 Calibration procedure for dosimetric E-field probes
Calibration date	April 22, 2024
This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3) °C and humidity < 70%. Calibration Equipment used (MATE critical for calibration)	

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP-2	SN: 104778	26-Mar-24 (No. 21Y-04056/04037)	Mar-25
Power sensor NRP-251	SN: 103244	26-Mar-24 (No. 21Y-04056)	Mar-25
OCP DAK-3.5 (weighted)	SN: 1249	05-Oct-23 (OCP-DAK3.5-1249_Oct23)	Oct-24
OCP DAK-12	SN: 1016	05-Oct-23 (OCP-DAK12-1016_Oct23)	Oct-24
Reference 20 dB Attenuator	SN: CG2552 (20s)	26-Mar-24 (No. 21Y-04046)	Mar-25
DAE4	SN: 693	23-Feb-24 (No. DAE4-693_Feb24)	Feb-25
Reference Probe EX3DV4	SN: 7349	03-Nov-23 (No. EX3-7349_Nov23)	Nov-24

Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41290674	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
Power sensor E4412A	SN: MY41499387	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
RF generator HP 8448C	SN: US3042U01703	04-Aug-99 (in house check Jun-22)	In house check: Jun-24
Network Analyzer E8358A	SN: US41085477	31-Mar-14 (in house check Oct-22)	In house check: Oct-24

	Name	Function	Signature
Calibrated by	Joanna Liesha	Laboratory Technician	
Approved by	Sven Kohn	Technical Manager	

Issued: April 22, 2024

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
 Schmid & Partner
 Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
 Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary

TSL	issue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- a) IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices – Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- b) KDB 86584, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}: Assessed for E-field polarization $\theta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM_{10x,y,z} = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal. DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereas the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

EX3DV4 - SN:3791

April 22, 2024

Parameters of Probe: EX3DV4 - SN:3791

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k = 2)
Norm ($\mu V/(V/m)^2$) ^A	0.50	0.54	0.55	±10.1%
DCP (mV) ^B	103.4	102.0	102.0	±4.7%

Calibration Results for Modulation Response

UID	Communication System Name		A			D	V _{RI} mV	Max dev.	Max Unc ^B k = 2
			dB	dB $\sqrt{\mu V}$	C				
0	CW	X	0.00	0.00	1.00	0.00	128.8	±1.1%	±4.7%
		Y	0.00	0.00	1.00		135.7		
		Z	0.00	0.00	1.00		129.2		
10352	Pulse Waveform (200Hz, 10%)	X	20.00	93.28	23.69	10.00	60.0	±2.8%	±9.6%
		Y	20.00	94.10	23.49		60.0		
		Z	20.00	94.39	24.18		60.0		
10353	Pulse Waveform (200Hz, 20%)	X	20.00	93.05	22.27	6.59	60.0	±1.4%	±9.6%
		Y	20.00	94.10	22.40		60.0		
		Z	20.00	94.47	22.95		60.0		
10354	Pulse Waveform (200Hz, 40%)	X	20.00	94.56	21.46	3.68	95.0	±0.9%	±9.6%
		Y	20.00	96.33	22.11		95.0		
		Z	20.00	96.19	22.25		95.0		
10355	Pulse Waveform (200Hz, 60%)	X	20.00	97.55	21.54	2.22	120.0	±1.0%	±9.6%
		Y	20.00	100.22	22.66		120.0		
		Z	20.00	99.17	22.26		120.0		
10387	QPSK Waveform, 1 MHz	X	1.56	64.16	13.85	1.00	150.0	±2.1%	±9.6%
		Y	1.63	65.35	14.42		150.0		
		Z	1.59	64.61	14.03		150.0		
10388	QPSK Waveform, 10 MHz	X	2.00	66.88	14.46	0.00	150.0	±1.1%	±9.6%
		Y	2.14	67.07	15.13		150.0		
		Z	2.07	66.39	14.71		150.0		
10396	64-QAM Waveform, 100 kHz	X	3.12	70.25	16.35	3.01	150.0	±0.7%	±9.6%
		Y	2.95	70.09	16.46		150.0		
		Z	2.98	69.65	16.18		150.0		
10399	64-QAM Waveform, 40 MHz	X	3.37	66.24	15.13	0.00	150.0	±0.9%	±9.6%
		Y	3.49	66.89	15.54		150.0		
		Z	3.45	66.54	15.32		150.0		
10414	WLAN CCDF, 64-QAM, 40 MHz	X	4.79	65.22	15.13	0.00	150.0	±2.1%	±9.6%
		Y	4.68	64.95	15.07		150.0		
		Z	4.87	65.48	15.32		150.0		

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).
^B Uncertainty parameter uncertainty for maximum specified field strength.
^C Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4 - SN:3791

April 22, 2024

Parameters of Probe: EX3DV4 - SN:3791

Sensor Model Parameters

	C1 IF	C2 IF	a V ⁻¹	T1 msV ⁻²	T2 msV ⁻¹	T3 ms	T4 V ⁻²	T5 V ⁻¹	T6
x	47.8	347.49	33.79	24.82	1.16	5.05	1.50	0.30	1.01
y	44.3	329.33	34.59	24.76	0.55	5.10	1.13	0.28	1.01
z	47.1	349.13	34.98	24.69	0.95	5.10	0.99	0.38	1.01

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle	67.8°
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Note: Measurement distance from surface can be increased to 3-4 mm for an Area Scan job.

EX3DV4 - SN:3791

April 22, 2024

Parameters of Probe: EX3DV4 - SN:3791

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity ^F (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^H (mm)	Unc (k = 2)
750	41.9	0.89	9.15	8.90	8.17	0.38	1.27	±11.0%
835	41.5	0.90	8.68	8.71	7.96	0.40	1.27	±11.0%
900	41.5	0.97	8.28	8.08	7.80	0.39	1.27	±11.0%
1750	40.1	1.37	8.11	7.47	6.83	0.30	1.27	±11.0%
1900	40.0	1.40	7.90	7.31	6.63	0.31	1.27	±11.0%
1950	40.0	1.40	7.81	7.22	6.55	0.33	1.27	±11.0%
2300	39.5	1.67	7.51	6.91	6.29	0.34	1.27	±11.0%
2450	39.2	1.80	7.29	6.72	6.14	0.33	1.27	±11.0%
2600	39.0	1.96	7.17	6.60	6.05	0.32	1.27	±11.0%
3300	38.2	2.71	6.77	6.21	5.71	0.36	1.27	±13.1%
3500	37.9	2.91	6.72	6.13	5.63	0.38	1.27	±13.1%
3700	37.7	3.12	6.62	6.05	5.57	0.38	1.27	±13.1%
3800	37.5	3.32	6.53	5.95	5.47	0.40	1.27	±13.1%
4100	37.2	3.53	6.44	5.86	5.40	0.40	1.27	±13.1%
5200	36.0	4.66	5.37	4.88	4.59	0.38	1.60	±13.1%
5300	35.9	4.76	5.14	4.68	4.40	0.39	1.63	±13.1%
5500	35.6	4.96	4.92	4.44	4.17	0.45	1.61	±13.1%
5600	35.5	5.07	4.83	4.32	4.09	0.44	1.67	±13.1%
5800	35.3	5.27	4.80	4.30	4.08	0.43	1.78	±13.1%

^C Frequency validity above 300 MHz at ±100 MHz only applies for CASY v4.4 and higher (see Page 2), else it is restricted to 450 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ±10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 200 MHz respectively. Validity of ConvF assessed at 9 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ±110 MHz.

^F The probes are calibrated using tissue simulating liquids (TSL) that deviate for ϵ and σ by less than ±5% from the target values (typically better than ±3%) and are valid for TSL with deviations of up to a 10% if SAR correction is applied.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ±1% for frequencies below 3 GHz and below ±2% for frequencies between 3-9 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4 - SN:3791

April 22, 2024

Parameters of Probe: EX3DV4 - SN:3791


Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity ^G (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha ^D	Depth ^D (mm)	Unc. (k = 2)
6500	34.5	6.07	5.04	4.70	4.90	0.20	2.00	±18.6%

^C Frequency validity at 6.5GHz is ~600~700MHz, and ≥700MHz at or above 7GHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.
^F The probes are calibrated using tissue simulating liquids (TSL) that deviate for ϵ' and σ by less than ±10% from the target values (typically better than ±6%) and are valid for TSL with deviations of up to ±10%.
^D Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ±1% for frequencies below 3GHz, below ±2% for frequencies between 3-8GHz, and below ±4% for frequencies between 8-10GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4 - SN:3791


April 22, 2024

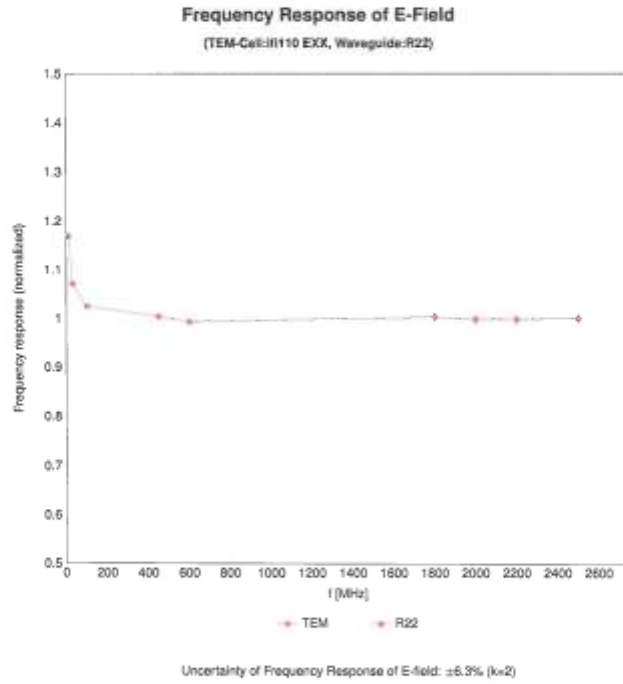

EX3DV4 - SN-3791

April 22, 2024

Receiving Pattern (ϕ), $\theta = 0^\circ$

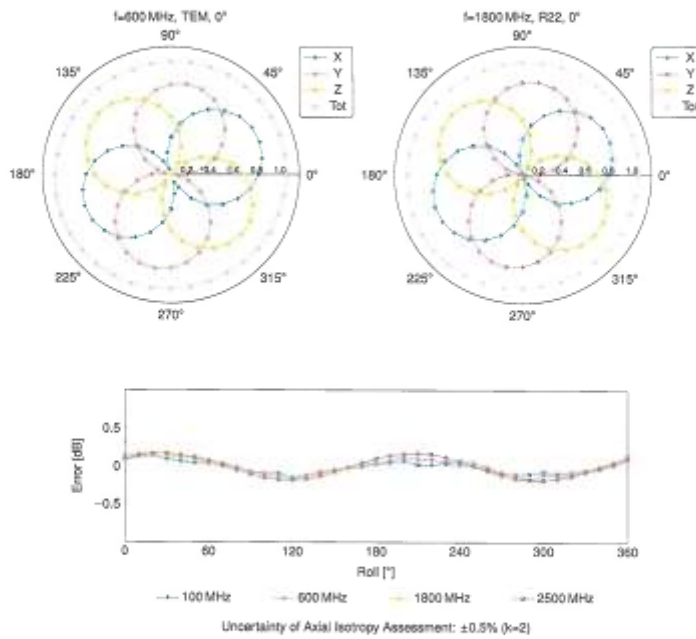


Certificate No: EX-3791_Apr24

Page 8 of 22

EX30V4 - SN-3791


April 22, 2024

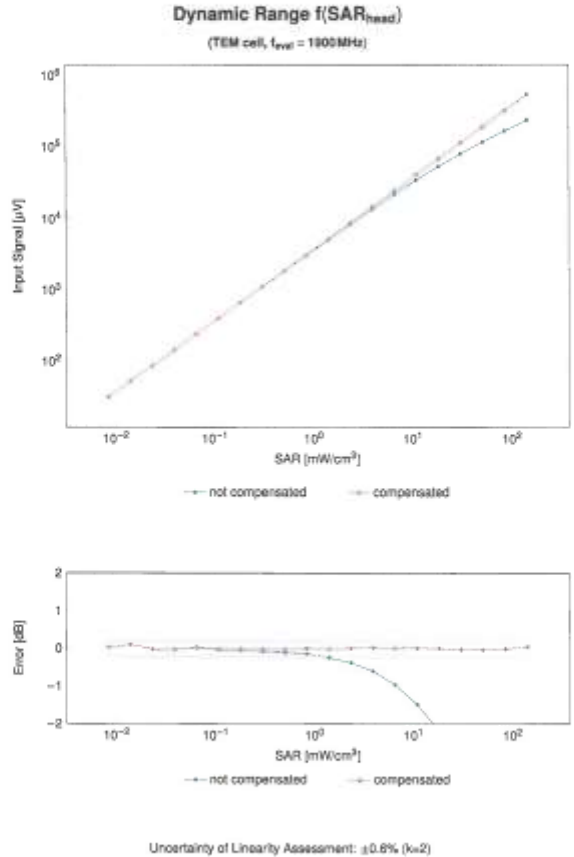

EX3014 - SN:3791


April 22, 2024

Conversion Factor Assessment

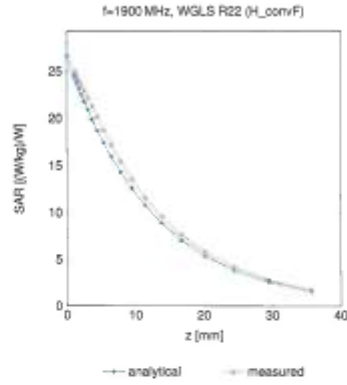

Deviation from Isotropy in Liquid

Error (δ, θ), f = 900MHz

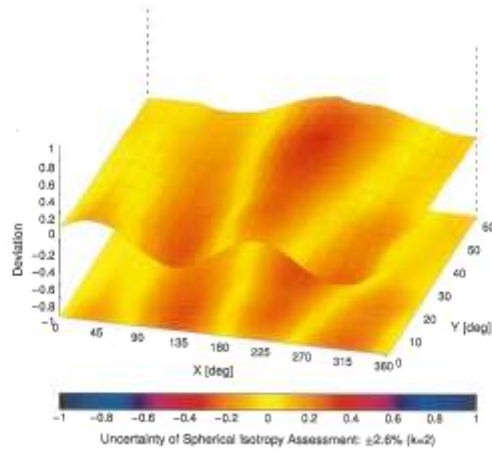

Certificate No: EX-3791_Apr24

Page 10 of 22

EX3DV4 - SN:3791

April 22, 2024

Appendix: Modulation Calibration Parameters

SRO	Rev	Communication System Name	Group	PAR (dB)	Unc ² k = 2
0		CW	CW	0.00	±4.7
10010	CAB	SAR Validation (Square, 100 ms, 10 ms)	Test	10.00	±9.8
10011	CAC	UMTS-FDD (WCDMA)	WCDMA	2.91	±9.8
10012	CAB	IEEE 802.11b WFI 2.4 GHz (CGSS, 1 Mbps)	WLAN	1.87	±9.8
10013	CAB	IEEE 802.11g WFI 2.4 GHz (CGSS-OFDM, 6 Mbps)	WLAN	9.46	±9.8
10021	DAC	GSM-FDD (TDMA, GMSK, TN 0)	GSM	9.39	±9.8
10023	DAC	GPRS-FDD (TDMA, GMSK, TN 0)	GSM	9.57	±9.8
10024	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	GSM	6.96	±9.8
10025	DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	GSM	12.62	±9.8
10026	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	GSM	9.55	±9.8
10027	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	GSM	4.80	±9.8
10028	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	GSM	3.65	±9.8
10029	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	GSM	7.70	±9.8
10030	CAA	IEEE 802.15.1 Bluetooth (QPSK, DH1)	Bluetooth	5.30	±9.8
10031	CAA	IEEE 802.15.1 Bluetooth (QPSK, DH2)	Bluetooth	1.87	±9.8
10032	CAA	IEEE 802.15.1 Bluetooth (QPSK, DH3)	Bluetooth	1.16	±9.8
10033	CAA	IEEE 802.15.1 Bluetooth (PM-QQPSK, DH1)	Bluetooth	7.74	±9.8
10034	CAA	IEEE 802.15.1 Bluetooth (PM-QQPSK, DH2)	Bluetooth	4.53	±9.8
10035	CAA	IEEE 802.15.1 Bluetooth (PM-QQPSK, DH3)	Bluetooth	3.83	±9.8
10036	CAA	IEEE 802.15.1 Bluetooth (8-QPSK, DH1)	Bluetooth	9.01	±9.8
10037	CAA	IEEE 802.15.1 Bluetooth (8-QPSK, DH2)	Bluetooth	4.77	±9.8
10038	CAA	IEEE 802.15.1 Bluetooth (8-QPSK, DH3)	Bluetooth	4.10	±9.8
10039	CAB	CDMA2000 (1xRTT, RC1)	CDMA2000	4.57	±9.8
10042	CAB	IS-54 / IS-136 FDD (TDMA/FDMA, PSK-QQPSK, Fullrate)	AMPS	7.70	±9.8
10044	CAA	IS-89/ISMA/TIA-855 FDD (FDMA, FM)	AMPS	0.00	±9.8
10048	CAA	DECT (TDD, TDMA/FDMA, QPSK, Full Slot, 24)	DECT	13.80	±9.8
10049	CAA	DECT (TDD, TDMA/FDMA, QPSK, Double Slot, 12)	DECT	10.79	±9.8
10058	CAA	UMTS-TDD (TD-SCDMA, 1.28 Mbps)	TD-SCDMA	11.01	±9.8
10059	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	GSM	6.93	±9.8
10060	CAB	IEEE 802.11b WFI 2.4 GHz (DSSS, 2 Mbps)	WLAN	2.13	±9.8
10062	CAB	IEEE 802.11b WFI 2.4 GHz (DSSS, 5.5 Mbps)	WLAN	2.83	±9.8
10061	CAB	IEEE 802.11b WFI 2.4 GHz (DSSS, 11 Mbps)	WLAN	3.00	±9.8
10062	CAE	IEEE 802.11a WFI 5 GHz (OFDM, 6 Mbps)	WLAN	8.03	±9.8
10063	CAE	IEEE 802.11a WFI 5 GHz (OFDM, 9 Mbps)	WLAN	9.83	±9.8
10064	CAE	IEEE 802.11a WFI 5 GHz (OFDM, 12 Mbps)	WLAN	9.99	±9.8
10065	CAE	IEEE 802.11a WFI 5 GHz (OFDM, 18 Mbps)	WLAN	9.00	±9.8
10066	CAE	IEEE 802.11a WFI 5 GHz (OFDM, 24 Mbps)	WLAN	9.98	±9.8
10067	CAE	IEEE 802.11a WFI 5 GHz (OFDM, 36 Mbps)	WLAN	10.12	±9.8
10068	CAE	IEEE 802.11a WFI 5 GHz (OFDM, 48 Mbps)	WLAN	10.34	±9.8
10069	CAE	IEEE 802.11a WFI 5 GHz (OFDM, 54 Mbps)	WLAN	10.36	±9.8
10070	CAB	IEEE 802.11g WFI 2.4 GHz (DSSS/OFDM, 9 Mbps)	WLAN	9.83	±9.8
10072	CAB	IEEE 802.11g WFI 2.4 GHz (DSSS/OFDM, 12 Mbps)	WLAN	9.62	±9.8
10073	CAB	IEEE 802.11g WFI 2.4 GHz (DSSS/OFDM, 18 Mbps)	WLAN	9.94	±9.8
10074	CAB	IEEE 802.11g WFI 2.4 GHz (DSSS/OFDM, 24 Mbps)	WLAN	10.30	±9.8
10075	CAB	IEEE 802.11g WFI 2.4 GHz (DSSS/OFDM, 36 Mbps)	WLAN	10.77	±9.8
10076	CAB	IEEE 802.11g WFI 2.4 GHz (DSSS/OFDM, 48 Mbps)	WLAN	10.94	±9.8
10077	CAB	IEEE 802.11g WFI 2.4 GHz (DSSS/OFDM, 54 Mbps)	WLAN	11.00	±9.8
10081	CAB	CDMA2000 (1xEV-DO)	CDMA2000	3.97	±9.8
10082	CAB	IS-54 / IS-136 FDD (TDMA/FDMA, PSK-QQPSK, Fullrate)	AMPS	4.77	±9.8
10083	DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	GSM	6.99	±9.8
10087	CAC	UMTS-FDD (HSDPA)	WCDMA	3.93	±9.8
10088	CAC	UMTS-FDD (HSPA, Subcar 2)	WCDMA	9.55	±9.8
10089	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	GSM	9.55	±9.8
10100	CAP	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-FDD	5.87	±9.8
10101	CAP	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	±9.8
10102	CAP	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-FDD	6.93	±9.8
10103	CAH	LTE-TDD (SC-FDMA, 100% RB, 30 MHz, QPSK)	LTE-TDD	9.29	±9.8
10104	CAH	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-TDD	9.97	±9.8
10105	CAH	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-TDD	10.51	±9.8
10106	CAH	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-FDD	5.80	±9.8
10108	CAH	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	±9.8
10110	CAH	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-FDD	5.75	±9.8
10111	CAH	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-FDD	6.44	±9.8

Certificate No: EX-3791_Apr24

Page 11 of 22



SGS Korea Co., Ltd.

4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807

Tel. 031-428-5700 / Fax. 031-427-2371

http://www.sgsgroup.kr

EX3D14 - SN-3791

April 22, 2024

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ² & = 2
10112	CAH	LTE-FDD (SC-FDMA, 100% RB, 10MHz, 64-QAM)	LTE-FDD	6.59	±0.6
10113	CAH	LTE-FDD (SC-FDMA, 100% RB, 5MHz, 64-QAM)	LTE-FDD	6.62	±0.6
10114	CAE	IEEE 802.11n (HT Greenfield, 13.5Mbps, BPSK)	WLAN	8.75	±0.8
10115	CAE	IEEE 802.11n (HT Greenfield, 81Mbps, 16-QAM)	WLAN	8.48	±0.6
10116	CAE	IEEE 802.11n (HT Greenfield, 135Mbps, 64-QAM)	WLAN	8.15	±0.6
10117	CAE	IEEE 802.11n (HT Mixed, 13.5Mbps, BPSK)	WLAN	8.07	±0.6
10118	CAE	IEEE 802.11n (HT Mixed, 91Mbps, 16-QAM)	WLAN	8.59	±0.8
10119	CAE	IEEE 802.11n (HT Mixed, 135Mbps, 64-QAM)	WLAN	8.13	±0.6
10140	CAF	LTE-FDD (SC-FDMA, 100% RB, 15MHz, 16-QAM)	LTE-FDD	6.46	±0.6
10141	CAF	LTE-FDD (SC-FDMA, 100% RB, 15MHz, 64-QAM)	LTE-FDD	6.53	±0.6
10142	CAF	LTE-FDD (SC-FDMA, 100% RB, 3MHz, QPSK)	LTE-FDD	5.73	±0.6
10143	CAF	LTE-FDD (SC-FDMA, 100% RB, 3MHz, 16-QAM)	LTE-FDD	6.35	±0.6
10144	CAF	LTE-FDD (SC-FDMA, 100% RB, 3MHz, 64-QAM)	LTE-FDD	6.66	±0.6
10145	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, QPSK)	LTE-FDD	5.76	±0.6
10146	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 16-QAM)	LTE-FDD	6.41	±0.6
10147	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.72	±0.6
10149	CAF	LTE-FDD (SC-FDMA, 50% RB, 20MHz, 16-QAM)	LTE-FDD	6.42	±0.6
10150	CAF	LTE-FDD (SC-FDMA, 50% RB, 20MHz, 64-QAM)	LTE-FDD	6.60	±0.6
10151	CAH	LTE-TDD (SC-FDMA, 50% RB, 20MHz, QPSK)	LTE-TDD	6.26	±0.6
10152	CAH	LTE-TDD (SC-FDMA, 50% RB, 20MHz, 16-QAM)	LTE-TDD	6.62	±0.6
10153	CAH	LTE-TDD (SC-FDMA, 50% RB, 20MHz, 64-QAM)	LTE-TDD	10.05	±0.8
10154	CAH	LTE-FDD (SC-FDMA, 50% RB, 10MHz, QPSK)	LTE-FDD	5.75	±0.6
10155	CAH	LTE-FDD (SC-FDMA, 50% RB, 10MHz, 16-QAM)	LTE-FDD	6.43	±0.6
10156	CAH	LTE-FDD (SC-FDMA, 50% RB, 5MHz, QPSK)	LTE-FDD	5.79	±0.6
10157	CAH	LTE-FDD (SC-FDMA, 50% RB, 5MHz, 16-QAM)	LTE-FDD	6.49	±0.6
10158	CAH	LTE-FDD (SC-FDMA, 50% RB, 10MHz, 64-QAM)	LTE-FDD	6.82	±0.6
10159	CAH	LTE-FDD (SC-FDMA, 50% RB, 5MHz, 64-QAM)	LTE-FDD	6.56	±0.6
10160	CAF	LTE-FDD (SC-FDMA, 50% RB, 15MHz, QPSK)	LTE-FDD	5.82	±0.6
10161	CAF	LTE-FDD (SC-FDMA, 50% RB, 15MHz, 16-QAM)	LTE-FDD	6.43	±0.6
10162	CAF	LTE-FDD (SC-FDMA, 50% RB, 15MHz, 64-QAM)	LTE-FDD	6.59	±0.6
10166	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4MHz, QPSK)	LTE-FDD	5.46	±0.6
10167	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4MHz, 16-QAM)	LTE-FDD	6.31	±0.6
10168	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.79	±0.6
10169	CAF	LTE-FDD (SC-FDMA, 1 RB, 20MHz, QPSK)	LTE-FDD	5.73	±0.6
10170	CAF	LTE-FDD (SC-FDMA, 1 RB, 20MHz, 16-QAM)	LTE-FDD	6.53	±0.6
10171	AAE	LTE-FDD (SC-FDMA, 1 RB, 20MHz, 64-QAM)	LTE-FDD	6.49	±0.6
10172	CAH	LTE-TDD (SC-FDMA, 1 RB, 20MHz, QPSK)	LTE-TDD	9.21	±0.6
10173	CAH	LTE-TDD (SC-FDMA, 1 RB, 20MHz, 16-QAM)	LTE-TDD	9.48	±0.6
10174	CAH	LTE-TDD (SC-FDMA, 1 RB, 20MHz, 64-QAM)	LTE-TDD	10.25	±0.6
10175	CAH	LTE-FDD (SC-FDMA, 1 RB, 10MHz, QPSK)	LTE-FDD	5.72	±0.6
10176	CAH	LTE-FDD (SC-FDMA, 1 RB, 10MHz, 16-QAM)	LTE-FDD	6.54	±0.6
10177	CAJ	LTE-FDD (SC-FDMA, 1 RB, 5MHz, QPSK)	LTE-FDD	5.73	±0.6
10178	CAH	LTE-FDD (SC-FDMA, 1 RB, 5MHz, 16-QAM)	LTE-FDD	6.52	±0.6
10179	CAH	LTE-FDD (SC-FDMA, 1 RB, 10MHz, 64-QAM)	LTE-FDD	6.50	±0.6
10180	CAH	LTE-FDD (SC-FDMA, 1 RB, 5MHz, 64-QAM)	LTE-FDD	6.50	±0.6
10181	CAF	LTE-FDD (SC-FDMA, 1 RB, 15MHz, QPSK)	LTE-FDD	5.72	±0.6
10182	CAF	LTE-FDD (SC-FDMA, 1 RB, 15MHz, 16-QAM)	LTE-FDD	6.52	±0.6
10183	AAE	LTE-FDD (SC-FDMA, 1 RB, 15MHz, 64-QAM)	LTE-FDD	6.50	±0.6
10184	CAF	LTE-FDD (SC-FDMA, 1 RB, 3MHz, QPSK)	LTE-FDD	5.73	±0.6
10186	CAF	LTE-FDD (SC-FDMA, 1 RB, 3MHz, 16-QAM)	LTE-FDD	6.51	±0.6
10188	AAE	LTE-FDD (SC-FDMA, 1 RB, 3MHz, 64-QAM)	LTE-FDD	6.50	±0.6
10187	CAG	LTE-FDD (SC-FDMA, 1 RB, 1.4MHz, QPSK)	LTE-FDD	5.73	±0.6
10188	CAG	LTE-FDD (SC-FDMA, 1 RB, 1.4MHz, 16-QAM)	LTE-FDD	6.52	±0.6
10189	AAE	LTE-FDD (SC-FDMA, 1 RB, 1.4MHz, 64-QAM)	LTE-FDD	6.55	±0.6
10190	CAE	IEEE 802.11n (HT Greenfield, 6.5Mbps, BPSK)	WLAN	8.06	±0.8
10194	CAE	IEEE 802.11n (HT Greenfield, 33Mbps, 16-QAM)	WLAN	8.12	±0.8
10195	CAE	IEEE 802.11n (HT Greenfield, 85Mbps, 64-QAM)	WLAN	8.21	±0.8
10196	CAE	IEEE 802.11n (HT Mixed, 6.5Mbps, BPSK)	WLAN	8.10	±0.8
10197	CAE	IEEE 802.11n (HT Mixed, 33Mbps, 16-QAM)	WLAN	8.12	±0.8
10198	CAE	IEEE 802.11n (HT Mixed, 85Mbps, 64-QAM)	WLAN	8.27	±0.8
10219	CAE	IEEE 802.11n (HT Mixed, 7.5Mbps, BPSK)	WLAN	8.03	±0.8
10220	CAE	IEEE 802.11n (HT Mixed, 43.3Mbps, 16-QAM)	WLAN	8.13	±0.8
10221	CAE	IEEE 802.11n (HT Mixed, 72.2Mbps, 64-QAM)	WLAN	8.27	±0.8
10222	CAE	IEEE 802.11n (HT Mixed, 15Mbps, BPSK)	WLAN	8.06	±0.8
10223	CAE	IEEE 802.11n (HT Mixed, 90Mbps, 16-QAM)	WLAN	8.48	±0.8
10224	CAE	IEEE 802.11n (HT Mixed, 150Mbps, 64-QAM)	WLAN	8.08	±0.8

EX3D14 - SN-3791

April 22, 2024

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^a ±
10225	CAC	UMTS-FDD (HSR4+)	WCDMA	5.97	±0.6
10226	CAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.48	±0.6
10227	CAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.28	±0.6
10228	CAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-TDD	9.22	±0.6
10229	CAE	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-TDD	9.48	±0.6
10230	CAE	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-TDD	10.25	±0.6
10231	CAE	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-TDD	9.19	±0.6
10232	CAH	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-TDD	9.48	±0.6
10233	CAH	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-TDD	10.25	±0.6
10234	CAH	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-TDD	9.21	±0.6
10235	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-TDD	9.48	±0.6
10236	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-TDD	10.25	±0.6
10237	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-TDD	9.21	±0.6
10238	CA0	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-TDD	9.48	±0.6
10239	CA0	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-TDD	10.25	±0.6
10240	CA0	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-TDD	9.21	±0.6
10241	CAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.82	±0.6
10242	CAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-TDD	9.86	±0.6
10243	CAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-TDD	9.46	±0.6
10244	CAE	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-TDD	10.06	±0.6
10245	CAE	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-TDD	10.06	±0.6
10246	CAE	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-TDD	9.30	±0.6
10247	CAH	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-TDD	9.91	±0.6
10248	CAH	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-TDD	10.06	±0.6
10249	CAH	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-TDD	9.29	±0.6
10250	CAH	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-TDD	9.81	±0.6
10251	CAH	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-TDD	10.17	±0.6
10252	CAH	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-TDD	9.24	±0.6
10253	CA0	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-TDD	9.90	±0.6
10254	CA0	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-TDD	10.14	±0.6
10255	CA0	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-TDD	9.20	±0.6
10256	CAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.96	±0.6
10257	CAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.08	±0.6
10258	CAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-TDD	9.34	±0.6
10259	CAE	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-TDD	9.90	±0.6
10260	CAE	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-TDD	9.97	±0.6
10261	CAE	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-TDD	9.24	±0.6
10262	CAH	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-TDD	9.83	±0.6
10263	CAH	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-TDD	10.16	±0.6
10264	CAH	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-TDD	9.23	±0.6
10265	CAH	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-TDD	9.92	±0.6
10266	CAH	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-TDD	10.07	±0.6
10267	CAH	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-TDD	9.30	±0.6
10268	CA0	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-TDD	10.05	±0.6
10269	CA0	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-TDD	10.13	±0.6
10270	CA0	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-TDD	9.58	±0.6
10274	CAC	UMTS-FDD (HSUPA, Subcat 5, 3GPP Rel8.10)	WCDMA	4.87	±0.6
10275	CAC	UMTS-FDD (HSUPA, Subcat 5, 3GPP Rel8.10)	WCDMA	3.95	±0.6
10277	CAA	PHS (QPSK)	PHS	11.81	±0.6
10278	CAA	PHS (QPSK, BW 984 MHz, Relcat 0.5)	PHS	11.81	±0.6
10279	CAA	PHS (QPSK, BW 984 MHz, Relcat 0.38)	PHS	12.18	±0.6
10280	AAB	CDMA2000, RC1, SOG, Full Rate	CDMA2000	3.91	±0.6
10281	AAB	CDMA2000, RC3, SOG, Full Rate	CDMA2000	3.46	±0.6
10282	AAB	CDMA2000, RC3, SOG, Full Rate	CDMA2000	3.39	±0.6
10283	AAB	CDMA2000, RC3, SOG, Full Rate	CDMA2000	3.50	±0.6
10284	AAB	CDMA2000, RC1, SOG, 1.98 Rate 25 ft.	CDMA2000	12.49	±0.6
10287	AAC	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-FDD	5.91	±0.6
10288	AAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-FDD	5.72	±0.6
10289	AAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-FDD	6.39	±0.6
10290	AAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-FDD	6.80	±0.6
10301	AAA	IEEE 802.16e WMAX (20.15, 5 ms, 10 MHz, QPSK, PUSC)	WMAX	12.59	±0.6
10302	AAA	IEEE 802.16e WMAX (20.15, 5 ms, 10 MHz, QPSK, PUSC, 3 CYR, symbols)	WMAX	12.57	±0.6
10303	AAA	IEEE 802.16e WMAX (31.15, 5 ms, 10 MHz, 64QAM, PUSC)	WMAX	12.52	±0.6
10304	AAA	IEEE 802.16e WMAX (20.15, 5 ms, 10 MHz, 64QAM, PUSC)	WMAX	11.86	±0.6
10306	AAA	IEEE 802.16e WMAX (31.15, 10 ms, 10 MHz, 64QAM, PUSC, 15 symbols)	WMAX	13.24	±0.6
10308	AAA	IEEE 802.16e WMAX (20.15, 10 ms, 10 MHz, 64QAM, PUSC, 16 symbols)	WMAX	14.67	±0.6

Certificate No: EX-3791_Apr24

Page 13 of 22



SGS Korea Co., Ltd.

4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807

Tel. 031-428-5700 / Fax. 031-427-2371

http://www.sgsgroup.kr

EX30V4 - SN3791

April 22, 2024

ID	Item	Communication System Name	Group	PAR(dB)	Use# k = 2
10387	AAA	IEEE 802.16e WMAX (25T1E, 10 ms, 10 MHz, QPSK, PUSC, 18 symbols)	WMAX	14.48	±0.5
10388	AAA	IEEE 802.16e WMAX (25T1E, 10 ms, 10 MHz, 16QAM, PUSC)	WMAX	14.48	±0.5
10389	AAA	IEEE 802.16e WMAX (25T1E, 10 ms, 10 MHz, 16QAM, AMC 2x3, 18 symbols)	WMAX	14.58	±0.5
10310	AAA	IEEE 802.16e WMAX (25T1E, 10 ms, 10 MHz, QPSK, AMC 2x3, 18 symbols)	WMAX	14.57	±0.5
10311	AAE	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-FDD	8.06	±0.5
10313	AAA	IDEN 1.3	IDEN	10.51	±0.5
10314	AAA	IDEN 1.7	IDEN	13.48	±0.5
10315	AAE	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	WLAN	1.71	±0.5
10316	AAE	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)	WLAN	8.36	±0.5
10317	AAE	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	WLAN	8.36	±0.5
10392	AAA	Pulse Waveform (200Hz, 10%)	Generic	15.05	±0.5
10393	AAA	Pulse Waveform (200Hz, 20%)	Generic	8.59	±0.5
10394	AAA	Pulse Waveform (200Hz, 40%)	Generic	3.98	±0.5
10395	AAA	Pulse Waveform (200Hz, 60%)	Generic	2.22	±0.5
10396	AAA	Pulse Waveform (200Hz, 80%)	Generic	0.97	±0.5
10387	AAA	QPSK Waveform, 1 MHz	Generic	5.10	±0.5
10388	AAA	QPSK Waveform, 15 MHz	Generic	5.22	±0.5
10395	AAA	64-QAM Waveform, 150 MHz	Generic	6.27	±0.5
10392	AAA	64-QAM Waveform, 45 MHz	Generic	6.27	±0.5
10400	AAF	IEEE 802.11ac WiFi (80 MHz, 64-QAM, 99pc duty cycle)	WLAN	8.07	±0.5
10401	AAF	IEEE 802.11ac WiFi (80 MHz, 64-QAM, 99pc duty cycle)	WLAN	8.00	±0.5
10402	AAF	IEEE 802.11ac WiFi (80 MHz, 64-QAM, 99pc duty cycle)	WLAN	8.03	±0.5
10403	AAE	CDMA2000 (1xEV-DO, Rev. 0)	CDMA2000	3.76	±0.5
10404	AAE	CDMA2000 (1xEV-DO, Rev. A)	CDMA2000	3.77	±0.5
10405	AAE	CDMA2000 (1xEV-DO, Rev. A)	CDMA2000	5.32	±0.5
10410	AAH	LTE-TDD (SC-FDMA, 1 RB, 18 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.80	±0.5
10414	AAA	WLAN CCDF, 64-QAM, 45 MHz	Generic	8.04	±0.5
10415	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	WLAN	1.24	±0.5
10416	AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)	WLAN	8.23	±0.5
10417	AAE	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	WLAN	8.23	±0.5
10418	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble)	WLAN	0.14	±0.5
10419	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble)	WLAN	0.15	±0.5
10422	AAE	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	WLAN	8.39	±0.5
10423	AAE	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	WLAN	8.47	±0.5
10424	AAE	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	WLAN	8.40	±0.5
10425	AAE	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	WLAN	8.41	±0.5
10426	AAE	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	WLAN	8.45	±0.5
10427	AAE	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	WLAN	8.41	±0.5
10436	AAE	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	LTE-FDD	8.38	±0.5
10431	AAE	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	LTE-FDD	8.38	±0.5
10432	AAE	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	LTE-FDD	8.34	±0.5
10433	AAE	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	LTE-FDD	8.34	±0.5
10434	AAE	W-CDMA (BS Test Model 1, 64 DPCCH)	WCDMA	8.63	±0.5
10435	AAE	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±0.5
10447	AAE	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.59	±0.5
10448	AAE	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.53	±0.5
10449	AAE	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.51	±0.5
10450	AAE	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.48	±0.5
10451	AAE	W-CDMA (BS Test Model 1, 64 DPCCH, Clipping 44%)	WCDMA	7.59	±0.5
10453	AAE	Validation (Square, 10 ms, 1 MHz)	Test	10.00	±0.5
10454	AAE	IEEE 802.11ac WiFi (160 MHz, 64-QAM, 99pc duty cycle)	WLAN	8.03	±0.5
10457	AAE	UMTS-FDD (DC-HSDPA)	WCDMA	8.63	±0.5
10458	AAA	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	CDMA2000	5.55	±0.5
10459	AAA	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	CDMA2000	8.25	±0.5
10460	AAE	UMTS-FDD (WCDMA, AMR)	WCDMA	3.29	±0.5
10461	AAE	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±0.5
10462	AAE	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.30	±0.5
10463	AAE	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.58	±0.5
10464	AAE	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±0.5
10465	AAE	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.38	±0.5
10466	AAE	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.37	±0.5
10467	AAE	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.62	±0.5
10468	AAE	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	±0.5
10469	AAE	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.56	±0.5
10470	AAE	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.62	±0.5
10471	AAE	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	±0.5

Certificate No: EX-3791_Apr24

Page 14 of 22

EX30V4 - SN-3791

April 22, 2024

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ² A = 2
10472	AA0	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	±0.0
10473	AA0	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±0.0
10474	AA0	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	±0.0
10475	AA0	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	±0.0
10477	AA0	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	±0.0
10478	AA0	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	±0.0
10479	AA0	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±0.0
10480	AA0	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	8.18	±0.0
10481	AA0	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	8.48	±0.0
10482	AA0	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	7.71	±0.0
10483	AA0	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	8.39	±0.0
10484	AA0	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	8.47	±0.0
10485	AA0	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	7.88	±0.0
10486	AA0	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	8.38	±0.0
10487	AA0	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	8.60	±0.0
10488	AA0	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	7.76	±0.0
10489	AA0	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	8.31	±0.0
10490	AA0	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	8.54	±0.0
10491	AA0	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±0.0
10492	AA0	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	8.41	±0.0
10493	AA0	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	8.55	±0.0
10494	AA0	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±0.0
10495	AA0	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	8.37	±0.0
10496	AA0	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	8.54	±0.0
10497	AA0	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	7.67	±0.0
10498	AA0	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	8.40	±0.0
10499	AA0	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	8.66	±0.0
10500	AA0	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	7.67	±0.0
10501	AA0	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	8.44	±0.0
10502	AA0	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	8.50	±0.0
10503	AA0	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	7.72	±0.0
10504	AA0	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	8.31	±0.0
10505	AA0	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	8.54	±0.0
10506	AA0	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±0.0
10507	AA0	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	8.36	±0.0
10508	AA0	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	8.55	±0.0
10509	AA0	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	7.69	±0.0
10510	AA0	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	8.49	±0.0
10511	AA0	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	8.51	±0.0
10512	AA0	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±0.0
10513	AA0	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	8.42	±0.0
10514	AA0	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL, Subframe=2,3,4,7,8,9)	LTE-TDD	8.45	±0.0
10515	AAA	IEEE 802.11b WiFi (2.4 GHz) (DSSS, 2 Mbps, 99pc duty cycle)	WLAN	1.99	±0.0
10516	AAA	IEEE 802.11b WiFi (2.4 GHz) (DSSS, 5.5 Mbps, 99pc duty cycle)	WLAN	1.57	±0.0
10517	AAA	IEEE 802.11b WiFi (2.4 GHz) (DSSS, 11 Mbps, 99pc duty cycle)	WLAN	1.50	±0.0
10518	AA0	IEEE 802.11a/n WiFi (5 GHz) (OFDM, 9 Mbps, 99pc duty cycle)	WLAN	8.35	±0.0
10519	AA0	IEEE 802.11a/n WiFi (5 GHz) (OFDM, 12 Mbps, 99pc duty cycle)	WLAN	8.39	±0.0
10520	AA0	IEEE 802.11a/n WiFi (5 GHz) (OFDM, 18 Mbps, 99pc duty cycle)	WLAN	8.12	±0.0
10521	AA0	IEEE 802.11a/n WiFi (5 GHz) (OFDM, 24 Mbps, 99pc duty cycle)	WLAN	7.97	±0.0
10522	AA0	IEEE 802.11a/n WiFi (5 GHz) (OFDM, 30 Mbps, 99pc duty cycle)	WLAN	8.45	±0.0
10523	AA0	IEEE 802.11a/n WiFi (5 GHz) (OFDM, 40 Mbps, 99pc duty cycle)	WLAN	8.39	±0.0
10524	AA0	IEEE 802.11a/n WiFi (5 GHz) (OFDM, 54 Mbps, 99pc duty cycle)	WLAN	8.27	±0.0
10525	AA0	IEEE 802.11a/n WiFi (20 MHz, MCS0, 99pc duty cycle)	WLAN	8.35	±0.0
10526	AA0	IEEE 802.11a/n WiFi (20 MHz, MCS1, 99pc duty cycle)	WLAN	8.42	±0.0
10527	AA0	IEEE 802.11a/n WiFi (20 MHz, MCS2, 99pc duty cycle)	WLAN	8.21	±0.0
10528	AA0	IEEE 802.11a/n WiFi (20 MHz, MCS3, 99pc duty cycle)	WLAN	8.35	±0.0
10529	AA0	IEEE 802.11a/n WiFi (20 MHz, MCS4, 99pc duty cycle)	WLAN	8.30	±0.0
10530	AA0	IEEE 802.11a/n WiFi (20 MHz, MCS5, 99pc duty cycle)	WLAN	8.43	±0.0
10531	AA0	IEEE 802.11a/n WiFi (20 MHz, MCS6, 99pc duty cycle)	WLAN	8.39	±0.0
10532	AA0	IEEE 802.11a/n WiFi (20 MHz, MCS7, 99pc duty cycle)	WLAN	8.35	±0.0
10533	AA0	IEEE 802.11a/n WiFi (40 MHz, MCS0, 99pc duty cycle)	WLAN	8.45	±0.0
10534	AA0	IEEE 802.11a/n WiFi (40 MHz, MCS1, 99pc duty cycle)	WLAN	8.45	±0.0
10535	AA0	IEEE 802.11a/n WiFi (40 MHz, MCS2, 99pc duty cycle)	WLAN	8.33	±0.0
10536	AA0	IEEE 802.11a/n WiFi (40 MHz, MCS3, 99pc duty cycle)	WLAN	8.44	±0.0
10537	AA0	IEEE 802.11a/n WiFi (40 MHz, MCS4, 99pc duty cycle)	WLAN	8.54	±0.0
10538	AA0	IEEE 802.11a/n WiFi (40 MHz, MCS5, 99pc duty cycle)	WLAN	8.39	±0.0
10540	AA0	IEEE 802.11a/n WiFi (40 MHz, MCS6, 99pc duty cycle)	WLAN	8.39	±0.0



EX3DN4 - SN:3791

April 22, 2024

UID	Rev	Communication System Name	Group	PMR (dB)	Use# A = 2
10541	AAD	IEEE 802.11ac WiFi (40 MHz, MCS7, 90pc duty cycle)	WLAN	8.45	±0.0
10542	AAD	IEEE 802.11ac WiFi (40 MHz, MCS6, 90pc duty cycle)	WLAN	8.65	±0.0
10543	AAD	IEEE 802.11ac WiFi (40 MHz, MCS6, 90pc duty cycle)	WLAN	8.65	±0.0
10544	AAD	IEEE 802.11ac WiFi (80 MHz, MCS6, 90pc duty cycle)	WLAN	8.47	±0.0
10545	AAD	IEEE 802.11ac WiFi (80 MHz, MCS7, 90pc duty cycle)	WLAN	8.50	±0.0
10546	AAD	IEEE 802.11ac WiFi (80 MHz, MCS6, 90pc duty cycle)	WLAN	8.35	±0.0
10547	AAD	IEEE 802.11ac WiFi (80 MHz, MCS6, 90pc duty cycle)	WLAN	8.48	±0.0
10548	AAD	IEEE 802.11ac WiFi (80 MHz, MCS4, 90pc duty cycle)	WLAN	8.37	±0.0
10549	AAD	IEEE 802.11ac WiFi (80 MHz, MCS6, 90pc duty cycle)	WLAN	8.38	±0.0
10550	AAD	IEEE 802.11ac WiFi (80 MHz, MCS7, 90pc duty cycle)	WLAN	8.53	±0.0
10551	AAD	IEEE 802.11ac WiFi (80 MHz, MCS6, 90pc duty cycle)	WLAN	8.42	±0.0
10552	AAD	IEEE 802.11ac WiFi (80 MHz, MCS6, 90pc duty cycle)	WLAN	8.45	±0.0
10553	AAD	IEEE 802.11ac WiFi (80 MHz, MCS6, 90pc duty cycle)	WLAN	8.48	±0.0
10554	AAD	IEEE 802.11ac WiFi (160 MHz, MCS6, 90pc duty cycle)	WLAN	8.48	±0.0
10555	AAD	IEEE 802.11ac WiFi (160 MHz, MCS7, 90pc duty cycle)	WLAN	8.47	±0.0
10556	AAD	IEEE 802.11ac WiFi (160 MHz, MCS6, 90pc duty cycle)	WLAN	8.50	±0.0
10557	AAD	IEEE 802.11ac WiFi (160 MHz, MCS6, 90pc duty cycle)	WLAN	8.52	±0.0
10558	AAD	IEEE 802.11ac WiFi (160 MHz, MCS4, 90pc duty cycle)	WLAN	8.61	±0.0
10559	AAD	IEEE 802.11ac WiFi (160 MHz, MCS6, 90pc duty cycle)	WLAN	8.73	±0.0
10560	AAD	IEEE 802.11ac WiFi (160 MHz, MCS7, 90pc duty cycle)	WLAN	8.58	±0.0
10561	AAD	IEEE 802.11ac WiFi (160 MHz, MCS6, 90pc duty cycle)	WLAN	8.69	±0.0
10562	AAD	IEEE 802.11ac WiFi (160 MHz, MCS6, 90pc duty cycle)	WLAN	8.69	±0.0
10563	AAD	IEEE 802.11ac WiFi (160 MHz, MCS6, 90pc duty cycle)	WLAN	8.77	±0.0
10564	AAA	IEEE 802.11g WPI 2.4 GHz (DSSS-OFDM, 6 Mbps, 80pc duty cycle)	WLAN	8.25	±0.0
10565	AAA	IEEE 802.11g WPI 2.4 GHz (DSSS-OFDM, 12 Mbps, 80pc duty cycle)	WLAN	8.45	±0.0
10566	AAA	IEEE 802.11g WPI 2.4 GHz (DSSS-OFDM, 18 Mbps, 80pc duty cycle)	WLAN	8.13	±0.0
10567	AAA	IEEE 802.11g WPI 2.4 GHz (DSSS-OFDM, 24 Mbps, 80pc duty cycle)	WLAN	8.09	±0.0
10568	AAA	IEEE 802.11g WPI 2.4 GHz (DSSS-OFDM, 36 Mbps, 80pc duty cycle)	WLAN	8.37	±0.0
10569	AAA	IEEE 802.11g WPI 2.4 GHz (DSSS-OFDM, 48 Mbps, 80pc duty cycle)	WLAN	8.10	±0.0
10570	AAA	IEEE 802.11g WPI 2.4 GHz (DSSS-OFDM, 54 Mbps, 80pc duty cycle)	WLAN	8.36	±0.0
10571	AAA	IEEE 802.11b WPI 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)	WLAN	1.99	±0.0
10572	AAA	IEEE 802.11b WPI 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)	WLAN	1.99	±0.0
10573	AAA	IEEE 802.11b WPI 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)	WLAN	1.28	±0.0
10574	AAA	IEEE 802.11b WPI 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)	WLAN	1.28	±0.0
10575	AAA	IEEE 802.11g WPI 2.4 GHz (DSSS-OFDM, 6 Mbps, 80pc duty cycle)	WLAN	8.59	±0.0
10576	AAA	IEEE 802.11g WPI 2.4 GHz (DSSS-OFDM, 9 Mbps, 80pc duty cycle)	WLAN	8.60	±0.0
10577	AAA	IEEE 802.11g WPI 2.4 GHz (DSSS-OFDM, 12 Mbps, 80pc duty cycle)	WLAN	8.70	±0.0
10578	AAA	IEEE 802.11g WPI 2.4 GHz (DSSS-OFDM, 18 Mbps, 80pc duty cycle)	WLAN	8.49	±0.0
10579	AAA	IEEE 802.11g WPI 2.4 GHz (DSSS-OFDM, 24 Mbps, 80pc duty cycle)	WLAN	8.39	±0.0
10580	AAA	IEEE 802.11g WPI 2.4 GHz (DSSS-OFDM, 36 Mbps, 80pc duty cycle)	WLAN	8.70	±0.0
10581	AAA	IEEE 802.11g WPI 2.4 GHz (DSSS-OFDM, 48 Mbps, 80pc duty cycle)	WLAN	8.35	±0.0
10582	AAA	IEEE 802.11g WPI 2.4 GHz (DSSS-OFDM, 54 Mbps, 80pc duty cycle)	WLAN	8.67	±0.0
10583	AAD	IEEE 802.11a WPI 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)	WLAN	8.59	±0.0
10584	AAD	IEEE 802.11a WPI 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)	WLAN	8.60	±0.0
10585	AAD	IEEE 802.11a WPI 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)	WLAN	8.70	±0.0
10586	AAD	IEEE 802.11a WPI 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)	WLAN	8.49	±0.0
10587	AAD	IEEE 802.11a WPI 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)	WLAN	8.39	±0.0
10588	AAD	IEEE 802.11a WPI 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)	WLAN	8.70	±0.0
10589	AAD	IEEE 802.11a WPI 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)	WLAN	8.35	±0.0
10590	AAD	IEEE 802.11a WPI 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)	WLAN	8.67	±0.0
10591	AAD	IEEE 802.11n (HT Mixad, 20 MHz, MCS0, 90pc duty cycle)	WLAN	8.53	±0.0
10592	AAD	IEEE 802.11n (HT Mixad, 20 MHz, MCS1, 90pc duty cycle)	WLAN	8.70	±0.0
10593	AAD	IEEE 802.11n (HT Mixad, 20 MHz, MCS2, 90pc duty cycle)	WLAN	8.94	±0.0
10594	AAD	IEEE 802.11n (HT Mixad, 20 MHz, MCS3, 90pc duty cycle)	WLAN	8.74	±0.0
10595	AAD	IEEE 802.11n (HT Mixad, 20 MHz, MCS4, 90pc duty cycle)	WLAN	8.74	±0.0
10596	AAD	IEEE 802.11n (HT Mixad, 20 MHz, MCS5, 90pc duty cycle)	WLAN	8.71	±0.0
10597	AAD	IEEE 802.11n (HT Mixad, 20 MHz, MCS6, 90pc duty cycle)	WLAN	8.72	±0.0
10598	AAD	IEEE 802.11n (HT Mixad, 20 MHz, MCS7, 90pc duty cycle)	WLAN	8.90	±0.0
10599	AAD	IEEE 802.11n (HT Mixad, 20 MHz, MCS8, 90pc duty cycle)	WLAN	8.79	±0.0
10600	AAD	IEEE 802.11n (HT Mixad, 20 MHz, MCS9, 90pc duty cycle)	WLAN	8.80	±0.0
10601	AAD	IEEE 802.11n (HT Mixad, 40 MHz, MCS0, 90pc duty cycle)	WLAN	8.34	±0.0
10602	AAD	IEEE 802.11n (HT Mixad, 40 MHz, MCS1, 90pc duty cycle)	WLAN	8.34	±0.0
10603	AAD	IEEE 802.11n (HT Mixad, 40 MHz, MCS2, 90pc duty cycle)	WLAN	9.03	±0.0
10604	AAD	IEEE 802.11n (HT Mixad, 40 MHz, MCS3, 90pc duty cycle)	WLAN	8.70	±0.0
10605	AAD	IEEE 802.11n (HT Mixad, 40 MHz, MCS4, 90pc duty cycle)	WLAN	8.97	±0.0
10606	AAD	IEEE 802.11n (HT Mixad, 40 MHz, MCS5, 90pc duty cycle)	WLAN	8.82	±0.0
10607	AAD	IEEE 802.11ac WPI (80 MHz, MCS0, 90pc duty cycle)	WLAN	8.68	±0.0
10608	AAD	IEEE 802.11ac WPI (80 MHz, MCS1, 90pc duty cycle)	WLAN	8.77	±0.0

Certificate No: EX-3791_Apr24

Page 16 of 22



EX3DV4 - SN:3791

April 22, 2024

UID	Rev	Communication System Name	Group	PAR (dB)	Unit# k = 2
10859	AAD	IEEE 802.11ac WiFi (20 MHz, MCS2, 90pc duty cycle)	WLAN	8.57	±0.6
10860	AAD	IEEE 802.11ac WiFi (20 MHz, MCS2, 90pc duty cycle)	WLAN	8.70	±0.6
10861	AAD	IEEE 802.11ac WiFi (20 MHz, MCS4, 90pc duty cycle)	WLAN	8.70	±0.6
10862	AAD	IEEE 802.11ac WiFi (20 MHz, MCS5, 90pc duty cycle)	WLAN	8.77	±0.6
10863	AAD	IEEE 802.11ac WiFi (20 MHz, MCS8, 90pc duty cycle)	WLAN	8.94	±0.6
10814	AAD	IEEE 802.11ac WiFi (20 MHz, MCS7, 90pc duty cycle)	WLAN	8.59	±0.6
10815	AAD	IEEE 802.11ac WiFi (20 MHz, MCS8, 90pc duty cycle)	WLAN	8.34	±0.6
10816	AAD	IEEE 802.11ac WiFi (40 MHz, MCS5, 90pc duty cycle)	WLAN	8.82	±0.6
10817	AAD	IEEE 802.11ac WiFi (40 MHz, MCS1, 90pc duty cycle)	WLAN	8.81	±0.6
10818	AAD	IEEE 802.11ac WiFi (40 MHz, MCS2, 90pc duty cycle)	WLAN	8.58	±0.6
10819	AAD	IEEE 802.11ac WiFi (40 MHz, MCS3, 90pc duty cycle)	WLAN	8.88	±0.6
10820	AAD	IEEE 802.11ac WiFi (40 MHz, MCS4, 90pc duty cycle)	WLAN	8.87	±0.6
10821	AAD	IEEE 802.11ac WiFi (40 MHz, MCS5, 90pc duty cycle)	WLAN	8.77	±0.6
10822	AAD	IEEE 802.11ac WiFi (40 MHz, MCS6, 90pc duty cycle)	WLAN	8.88	±0.6
10823	AAD	IEEE 802.11ac WiFi (40 MHz, MCS7, 90pc duty cycle)	WLAN	8.82	±0.6
10824	AAD	IEEE 802.11ac WiFi (40 MHz, MCS8, 90pc duty cycle)	WLAN	8.96	±0.6
10825	AAD	IEEE 802.11ac WiFi (40 MHz, MCS9, 90pc duty cycle)	WLAN	8.96	±0.6
10826	AAD	IEEE 802.11ac WiFi (80 MHz, MCS0, 90pc duty cycle)	WLAN	8.83	±0.6
10827	AAD	IEEE 802.11ac WiFi (80 MHz, MCS1, 90pc duty cycle)	WLAN	8.88	±0.6
10828	AAD	IEEE 802.11ac WiFi (80 MHz, MCS2, 90pc duty cycle)	WLAN	8.71	±0.6
10829	AAD	IEEE 802.11ac WiFi (80 MHz, MCS3, 90pc duty cycle)	WLAN	8.85	±0.6
10830	AAD	IEEE 802.11ac WiFi (80 MHz, MCS4, 90pc duty cycle)	WLAN	8.72	±0.6
10831	AAD	IEEE 802.11ac WiFi (80 MHz, MCS5, 90pc duty cycle)	WLAN	8.81	±0.6
10832	AAD	IEEE 802.11ac WiFi (80 MHz, MCS6, 90pc duty cycle)	WLAN	8.74	±0.6
10833	AAD	IEEE 802.11ac WiFi (80 MHz, MCS7, 90pc duty cycle)	WLAN	8.83	±0.6
10834	AAD	IEEE 802.11ac WiFi (80 MHz, MCS8, 90pc duty cycle)	WLAN	8.80	±0.6
10835	AAD	IEEE 802.11ac WiFi (80 MHz, MCS9, 90pc duty cycle)	WLAN	8.81	±0.6
10836	AAD	IEEE 802.11ac WiFi (160 MHz, MCS0, 90pc duty cycle)	WLAN	8.83	±0.6
10837	AAD	IEEE 802.11ac WiFi (160 MHz, MCS1, 90pc duty cycle)	WLAN	8.79	±0.6
10838	AAD	IEEE 802.11ac WiFi (160 MHz, MCS2, 90pc duty cycle)	WLAN	8.86	±0.6
10839	AAD	IEEE 802.11ac WiFi (160 MHz, MCS3, 90pc duty cycle)	WLAN	8.85	±0.6
10840	AAD	IEEE 802.11ac WiFi (160 MHz, MCS4, 90pc duty cycle)	WLAN	8.96	±0.6
10841	AAD	IEEE 802.11ac WiFi (160 MHz, MCS5, 90pc duty cycle)	WLAN	9.06	±0.6
10842	AAD	IEEE 802.11ac WiFi (160 MHz, MCS6, 90pc duty cycle)	WLAN	9.06	±0.6
10843	AAD	IEEE 802.11ac WiFi (160 MHz, MCS7, 90pc duty cycle)	WLAN	8.89	±0.6
10844	AAD	IEEE 802.11ac WiFi (160 MHz, MCS8, 90pc duty cycle)	WLAN	9.05	±0.6
10845	AAD	IEEE 802.11ac WiFi (160 MHz, MCS9, 90pc duty cycle)	WLAN	9.11	±0.6
10846	AAD	LTE-TDD (SC-FDMA, T-PRB 5MHz, QPSK, UL Subframe=3,7)	LTE-TDD	11.96	±0.6
10847	AAD	LTE-TDD (SC-FDMA, T-PRB 25MHz, QPSK, UL Subframe=2,7)	LTE-TDD	11.90	±0.6
10848	AAD	CDMA2000 (1x Advanced)	CDMA2000	9.45	±0.6
10849	AAD	LTE-TDD (OFDMA, 5MHz, E-TM 3.1, Clipping 40%)	LTE-TDD	6.91	±0.6
10850	AAD	LTE-TDD (OFDMA, 10MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.42	±0.6
10851	AAD	LTE-TDD (OFDMA, 15MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	6.90	±0.6
10852	AAD	LTE-TDD (OFDMA, 20MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.91	±0.6
10853	AAD	Pulse Waveform (200Hz, 10%)	Test	10.00	±0.6
10854	AAD	Pulse Waveform (200Hz, 20%)	Test	6.99	±0.6
10855	AAD	Pulse Waveform (200Hz, 40%)	Test	3.93	±0.6
10856	AAD	Pulse Waveform (200Hz, 60%)	Test	3.23	±0.6
10857	AAD	Pulse Waveform (200Hz, 80%)	Test	0.97	±0.6
10858	AAD	Bluetooth Low Energy	Bluetooth	2.19	±0.6
10859	AAC	IEEE 802.11a (20 MHz, MCS0, 90pc duty cycle)	WLAN	9.59	±0.6
10860	AAC	IEEE 802.11a (20 MHz, MCS1, 90pc duty cycle)	WLAN	9.57	±0.6
10861	AAC	IEEE 802.11a (20 MHz, MCS2, 90pc duty cycle)	WLAN	8.78	±0.6
10862	AAC	IEEE 802.11a (20 MHz, MCS3, 90pc duty cycle)	WLAN	8.74	±0.6
10863	AAC	IEEE 802.11a (20 MHz, MCS4, 90pc duty cycle)	WLAN	8.90	±0.6
10864	AAC	IEEE 802.11a (20 MHz, MCS5, 90pc duty cycle)	WLAN	8.77	±0.6
10865	AAC	IEEE 802.11a (20 MHz, MCS6, 90pc duty cycle)	WLAN	8.73	±0.6
10866	AAC	IEEE 802.11a (20 MHz, MCS7, 90pc duty cycle)	WLAN	8.78	±0.6
10867	AAC	IEEE 802.11a (20 MHz, MCS8, 90pc duty cycle)	WLAN	8.89	±0.6
10868	AAC	IEEE 802.11a (20 MHz, MCS9, 90pc duty cycle)	WLAN	8.80	±0.6
10869	AAC	IEEE 802.11g (20 MHz, MCS0, 90pc duty cycle)	WLAN	8.65	±0.6
10870	AAC	IEEE 802.11g (20 MHz, MCS1, 90pc duty cycle)	WLAN	8.63	±0.6
10871	AAC	IEEE 802.11g (20 MHz, MCS2, 90pc duty cycle)	WLAN	8.42	±0.6
10872	AAC	IEEE 802.11g (20 MHz, MCS3, 90pc duty cycle)	WLAN	8.28	±0.6
10873	AAC	IEEE 802.11g (20 MHz, MCS4, 90pc duty cycle)	WLAN	8.33	±0.6
10874	AAC	IEEE 802.11g (20 MHz, MCS5, 90pc duty cycle)	WLAN	8.38	±0.6

Certificate No: EX-3791_Apr24

Page 17 of 22



EX3DV4 - SN:3791

April 22, 2024

UID	Rev	Communication System Name	Group	PAR (dB)	Upl ^o k = 2
10887	AAC	IEEE 802.11ax (20 MHz, MCS4, 90pc duty cycle)	WLAN	8.45	±0.6
10888	AAC	IEEE 802.11ax (20 MHz, MCS4, 90pc duty cycle)	WLAN	8.29	±0.6
10889	AAC	IEEE 802.11ax (20 MHz, MCS6, 90pc duty cycle)	WLAN	8.56	±0.6
10890	AAC	IEEE 802.11ax (20 MHz, MCS7, 90pc duty cycle)	WLAN	8.29	±0.6
10891	AAC	IEEE 802.11ax (20 MHz, MCS8, 90pc duty cycle)	WLAN	8.25	±0.6
10892	AAC	IEEE 802.11ax (20 MHz, MCS9, 90pc duty cycle)	WLAN	8.29	±0.6
10893	AAC	IEEE 802.11ax (20 MHz, MCS10, 90pc duty cycle)	WLAN	8.25	±0.6
10894	AAC	IEEE 802.11ax (20 MHz, MCS11, 90pc duty cycle)	WLAN	8.57	±0.6
10895	AAC	IEEE 802.11ax (40 MHz, MCS0, 90pc duty cycle)	WLAN	8.70	±0.6
10896	AAC	IEEE 802.11ax (40 MHz, MCS1, 90pc duty cycle)	WLAN	8.91	±0.6
10897	AAC	IEEE 802.11ax (40 MHz, MCS2, 90pc duty cycle)	WLAN	8.61	±0.6
10898	AAC	IEEE 802.11ax (40 MHz, MCS3, 90pc duty cycle)	WLAN	8.89	±0.6
10899	AAC	IEEE 802.11ax (40 MHz, MCS4, 90pc duty cycle)	WLAN	8.82	±0.6
10900	AAC	IEEE 802.11ax (40 MHz, MCS5, 90pc duty cycle)	WLAN	8.73	±0.6
10901	AAC	IEEE 802.11ax (40 MHz, MCS6, 90pc duty cycle)	WLAN	8.89	±0.6
10902	AAC	IEEE 802.11ax (40 MHz, MCS7, 90pc duty cycle)	WLAN	8.70	±0.6
10903	AAC	IEEE 802.11ax (40 MHz, MCS8, 90pc duty cycle)	WLAN	8.82	±0.6
10904	AAC	IEEE 802.11ax (40 MHz, MCS9, 90pc duty cycle)	WLAN	8.99	±0.6
10905	AAC	IEEE 802.11ax (40 MHz, MCS10, 90pc duty cycle)	WLAN	8.99	±0.6
10906	AAC	IEEE 802.11ax (40 MHz, MCS11, 90pc duty cycle)	WLAN	8.90	±0.6
10907	AAC	IEEE 802.11ax (80 MHz, MCS0, 90pc duty cycle)	WLAN	8.23	±0.6
10908	AAC	IEEE 802.11ax (80 MHz, MCS1, 90pc duty cycle)	WLAN	8.55	±0.6
10909	AAC	IEEE 802.11ax (80 MHz, MCS2, 90pc duty cycle)	WLAN	8.33	±0.6
10910	AAC	IEEE 802.11ax (80 MHz, MCS3, 90pc duty cycle)	WLAN	8.29	±0.6
10911	AAC	IEEE 802.11ax (80 MHz, MCS4, 90pc duty cycle)	WLAN	8.39	±0.6
10912	AAC	IEEE 802.11ax (80 MHz, MCS5, 90pc duty cycle)	WLAN	8.67	±0.6
10913	AAC	IEEE 802.11ax (80 MHz, MCS6, 90pc duty cycle)	WLAN	8.33	±0.6
10914	AAC	IEEE 802.11ax (80 MHz, MCS7, 90pc duty cycle)	WLAN	8.28	±0.6
10915	AAC	IEEE 802.11ax (80 MHz, MCS8, 90pc duty cycle)	WLAN	8.45	±0.6
10916	AAC	IEEE 802.11ax (80 MHz, MCS9, 90pc duty cycle)	WLAN	8.35	±0.6
10917	AAC	IEEE 802.11ax (80 MHz, MCS10, 90pc duty cycle)	WLAN	8.48	±0.6
10918	AAC	IEEE 802.11ax (80 MHz, MCS11, 90pc duty cycle)	WLAN	8.24	±0.6
10919	AAC	IEEE 802.11ax (90 MHz, MCS0, 90pc duty cycle)	WLAN	8.61	±0.6
10920	AAC	IEEE 802.11ax (90 MHz, MCS1, 90pc duty cycle)	WLAN	8.67	±0.6
10921	AAC	IEEE 802.11ax (90 MHz, MCS2, 90pc duty cycle)	WLAN	8.78	±0.6
10922	AAC	IEEE 802.11ax (90 MHz, MCS3, 90pc duty cycle)	WLAN	8.55	±0.6
10923	AAC	IEEE 802.11ax (90 MHz, MCS4, 90pc duty cycle)	WLAN	8.75	±0.6
10924	AAC	IEEE 802.11ax (90 MHz, MCS5, 90pc duty cycle)	WLAN	8.95	±0.6
10925	AAC	IEEE 802.11ax (90 MHz, MCS6, 90pc duty cycle)	WLAN	8.74	±0.6
10926	AAC	IEEE 802.11ax (90 MHz, MCS7, 90pc duty cycle)	WLAN	8.72	±0.6
10927	AAC	IEEE 802.11ax (90 MHz, MCS8, 90pc duty cycle)	WLAN	8.68	±0.6
10928	AAC	IEEE 802.11ax (90 MHz, MCS9, 90pc duty cycle)	WLAN	8.65	±0.6
10929	AAC	IEEE 802.11ax (90 MHz, MCS10, 90pc duty cycle)	WLAN	8.64	±0.6
10930	AAC	IEEE 802.11ax (90 MHz, MCS11, 90pc duty cycle)	WLAN	8.67	±0.6
10931	AAC	IEEE 802.11ax (90 MHz, MCS0, 90pc duty cycle)	WLAN	8.42	±0.6
10932	AAC	IEEE 802.11ax (90 MHz, MCS1, 90pc duty cycle)	WLAN	8.48	±0.6
10933	AAC	IEEE 802.11ax (90 MHz, MCS2, 90pc duty cycle)	WLAN	8.42	±0.6
10934	AAC	IEEE 802.11ax (90 MHz, MCS3, 90pc duty cycle)	WLAN	8.25	±0.6
10935	AAC	IEEE 802.11ax (90 MHz, MCS4, 90pc duty cycle)	WLAN	8.33	±0.6
10936	AAC	IEEE 802.11ax (90 MHz, MCS5, 90pc duty cycle)	WLAN	8.27	±0.6
10937	AAC	IEEE 802.11ax (90 MHz, MCS6, 90pc duty cycle)	WLAN	8.36	±0.6
10938	AAC	IEEE 802.11ax (90 MHz, MCS7, 90pc duty cycle)	WLAN	8.42	±0.6
10939	AAC	IEEE 802.11ax (90 MHz, MCS8, 90pc duty cycle)	WLAN	8.28	±0.6
10940	AAC	IEEE 802.11ax (90 MHz, MCS9, 90pc duty cycle)	WLAN	8.48	±0.6
10941	AAC	IEEE 802.11ax (90 MHz, MCS10, 90pc duty cycle)	WLAN	8.40	±0.6
10942	AAC	IEEE 802.11ax (90 MHz, MCS11, 90pc duty cycle)	WLAN	8.43	±0.6
10943	AAC	IEEE 802.11ax (180 MHz, MCS0, 90pc duty cycle)	WLAN	8.94	±0.6
10944	AAC	IEEE 802.11ax (180 MHz, MCS1, 90pc duty cycle)	WLAN	9.16	±0.6
10945	AAC	IEEE 802.11ax (180 MHz, MCS2, 90pc duty cycle)	WLAN	8.93	±0.6
10946	AAC	IEEE 802.11ax (180 MHz, MCS3, 90pc duty cycle)	WLAN	9.11	±0.6
10947	AAC	IEEE 802.11ax (180 MHz, MCS4, 90pc duty cycle)	WLAN	9.04	±0.6
10948	AAC	IEEE 802.11ax (180 MHz, MCS5, 90pc duty cycle)	WLAN	8.93	±0.6
10949	AAC	IEEE 802.11ax (180 MHz, MCS6, 90pc duty cycle)	WLAN	8.93	±0.6
10950	AAC	IEEE 802.11ax (180 MHz, MCS7, 90pc duty cycle)	WLAN	8.79	±0.6
10951	AAC	IEEE 802.11ax (180 MHz, MCS8, 90pc duty cycle)	WLAN	8.82	±0.6
10952	AAC	IEEE 802.11ax (180 MHz, MCS9, 90pc duty cycle)	WLAN	8.81	±0.6

Certificate No: EX-3791_Apr24

Page 18 of 22



SGS Korea Co., Ltd.

4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807

Tel. 031-428-5700 / Fax. 031-427-2371

http://www.sgsgroup.kr

EX30V4 - SN3791

April 22, 2024

UID	Rev	Commentation System Name	Group	PAR (dB)	Use# k = 2
10753	AAC	IEEE 802.11ax (160MHz, MCS10, 90pc duty cycle)	WLAN	8.00	±9.6
10754	AAC	IEEE 802.11ax (160MHz, MCS11, 90pc duty cycle)	WLAN	8.04	±9.6
10755	AAC	IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle)	WLAN	8.04	±9.6
10756	AAC	IEEE 802.11ax (160MHz, MCS1, 90pc duty cycle)	WLAN	8.77	±9.6
10757	AAC	IEEE 802.11ax (160MHz, MCS2, 90pc duty cycle)	WLAN	8.77	±9.6
10758	AAC	IEEE 802.11ax (160MHz, MCS3, 90pc duty cycle)	WLAN	8.69	±9.6
10759	AAC	IEEE 802.11ax (160MHz, MCS4, 90pc duty cycle)	WLAN	8.58	±9.6
10760	AAC	IEEE 802.11ax (160MHz, MCS5, 90pc duty cycle)	WLAN	8.46	±9.6
10761	AAC	IEEE 802.11ax (160MHz, MCS6, 90pc duty cycle)	WLAN	8.58	±9.6
10762	AAC	IEEE 802.11ax (160MHz, MCS7, 90pc duty cycle)	WLAN	8.48	±9.6
10763	AAC	IEEE 802.11ax (160MHz, MCS8, 90pc duty cycle)	WLAN	8.53	±9.6
10764	AAC	IEEE 802.11ax (160MHz, MCS9, 90pc duty cycle)	WLAN	8.54	±9.6
10765	AAC	IEEE 802.11ax (160MHz, MCS10, 90pc duty cycle)	WLAN	8.54	±9.6
10766	AAC	IEEE 802.11ax (160MHz, MCS11, 90pc duty cycle)	WLAN	8.51	±9.6
10767	AAF	5G NR (CP-OFDM, 1 RB, 6MHz, QPSK, 15kHz)	5G NR FRI TDD	7.96	±9.6
10768	AAF	5G NR (CP-OFDM, 1 RB, 10MHz, QPSK, 15kHz)	5G NR FRI TDD	8.01	±9.6
10769	AAF	5G NR (CP-OFDM, 1 RB, 15MHz, QPSK, 15kHz)	5G NR FRI TDD	8.01	±9.6
10770	AAF	5G NR (CP-OFDM, 1 RB, 20MHz, QPSK, 15kHz)	5G NR FRI TDD	8.02	±9.6
10771	AAF	5G NR (CP-OFDM, 1 RB, 25MHz, QPSK, 15kHz)	5G NR FRI TDD	8.02	±9.6
10772	AAF	5G NR (CP-OFDM, 1 RB, 30MHz, QPSK, 15kHz)	5G NR FRI TDD	8.23	±9.6
10773	AAF	5G NR (CP-OFDM, 1 RB, 40MHz, QPSK, 15kHz)	5G NR FRI TDD	8.02	±9.6
10774	AAF	5G NR (CP-OFDM, 1 RB, 50MHz, QPSK, 15kHz)	5G NR FRI TDD	8.02	±9.6
10775	AAF	5G NR (CP-OFDM, 50% RB, 5MHz, QPSK, 15kHz)	5G NR FRI TDD	8.31	±9.6
10776	AAF	5G NR (CP-OFDM, 50% RB, 10MHz, QPSK, 15kHz)	5G NR FRI TDD	8.30	±9.6
10777	AAF	5G NR (CP-OFDM, 50% RB, 15MHz, QPSK, 15kHz)	5G NR FRI TDD	8.30	±9.6
10778	AAF	5G NR (CP-OFDM, 50% RB, 20MHz, QPSK, 15kHz)	5G NR FRI TDD	8.34	±9.6
10779	AAF	5G NR (CP-OFDM, 50% RB, 25MHz, QPSK, 15kHz)	5G NR FRI TDD	8.42	±9.6
10780	AAF	5G NR (CP-OFDM, 50% RB, 30MHz, QPSK, 15kHz)	5G NR FRI TDD	8.38	±9.6
10781	AAF	5G NR (CP-OFDM, 50% RB, 40MHz, QPSK, 15kHz)	5G NR FRI TDD	8.38	±9.6
10782	AAF	5G NR (CP-OFDM, 50% RB, 50MHz, QPSK, 15kHz)	5G NR FRI TDD	8.43	±9.6
10783	AAF	5G NR (CP-OFDM, 100% RB, 5MHz, QPSK, 15kHz)	5G NR FRI TDD	8.31	±9.6
10784	AAF	5G NR (CP-OFDM, 100% RB, 10MHz, QPSK, 15kHz)	5G NR FRI TDD	8.29	±9.6
10785	AAF	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 15kHz)	5G NR FRI TDD	8.43	±9.6
10786	AAF	5G NR (CP-OFDM, 100% RB, 20MHz, QPSK, 15kHz)	5G NR FRI TDD	8.35	±9.6
10787	AAF	5G NR (CP-OFDM, 100% RB, 25MHz, QPSK, 15kHz)	5G NR FRI TDD	8.44	±9.6
10788	AAF	5G NR (CP-OFDM, 100% RB, 30MHz, QPSK, 15kHz)	5G NR FRI TDD	8.39	±9.6
10789	AAF	5G NR (CP-OFDM, 100% RB, 40MHz, QPSK, 15kHz)	5G NR FRI TDD	8.37	±9.6
10790	AAF	5G NR (CP-OFDM, 100% RB, 50MHz, QPSK, 15kHz)	5G NR FRI TDD	8.39	±9.6
10791	AAF	5G NR (CP-OFDM, 1 RB, 5MHz, QPSK, 30kHz)	5G NR FRI TDD	7.83	±9.6
10792	AAF	5G NR (CP-OFDM, 1 RB, 10MHz, QPSK, 30kHz)	5G NR FRI TDD	7.92	±9.6
10793	AAF	5G NR (CP-OFDM, 1 RB, 15MHz, QPSK, 30kHz)	5G NR FRI TDD	7.96	±9.6
10794	AAF	5G NR (CP-OFDM, 1 RB, 20MHz, QPSK, 30kHz)	5G NR FRI TDD	7.82	±9.6
10795	AAF	5G NR (CP-OFDM, 1 RB, 25MHz, QPSK, 30kHz)	5G NR FRI TDD	7.84	±9.6
10796	AAF	5G NR (CP-OFDM, 1 RB, 30MHz, QPSK, 30kHz)	5G NR FRI TDD	7.82	±9.6
10797	AAF	5G NR (CP-OFDM, 1 RB, 40MHz, QPSK, 30kHz)	5G NR FRI TDD	8.61	±9.6
10798	AAF	5G NR (CP-OFDM, 1 RB, 50MHz, QPSK, 30kHz)	5G NR FRI TDD	7.89	±9.6
10799	AAF	5G NR (CP-OFDM, 1 RB, 60MHz, QPSK, 30kHz)	5G NR FRI TDD	7.93	±9.6
10800	AAF	5G NR (CP-OFDM, 1 RB, 80MHz, QPSK, 30kHz)	5G NR FRI TDD	7.83	±9.6
10801	AAF	5G NR (CP-OFDM, 1 RB, 90MHz, QPSK, 30kHz)	5G NR FRI TDD	7.87	±9.6
10802	AAF	5G NR (CP-OFDM, 1 RB, 100MHz, QPSK, 30kHz)	5G NR FRI TDD	7.83	±9.6
10803	AAF	5G NR (CP-OFDM, 50% RB, 10MHz, QPSK, 30kHz)	5G NR FRI TDD	8.34	±9.6
10804	AAF	5G NR (CP-OFDM, 50% RB, 15MHz, QPSK, 30kHz)	5G NR FRI TDD	8.37	±9.6
10805	AAF	5G NR (CP-OFDM, 50% RB, 20MHz, QPSK, 30kHz)	5G NR FRI TDD	8.34	±9.6
10806	AAF	5G NR (CP-OFDM, 50% RB, 25MHz, QPSK, 30kHz)	5G NR FRI TDD	8.34	±9.6
10807	AAF	5G NR (CP-OFDM, 50% RB, 30MHz, QPSK, 30kHz)	5G NR FRI TDD	8.34	±9.6
10808	AAF	5G NR (CP-OFDM, 50% RB, 40MHz, QPSK, 30kHz)	5G NR FRI TDD	8.34	±9.6
10809	AAF	5G NR (CP-OFDM, 50% RB, 50MHz, QPSK, 30kHz)	5G NR FRI TDD	8.34	±9.6
10810	AAF	5G NR (CP-OFDM, 50% RB, 60MHz, QPSK, 30kHz)	5G NR FRI TDD	8.38	±9.6
10811	AAF	5G NR (CP-OFDM, 50% RB, 80MHz, QPSK, 30kHz)	5G NR FRI TDD	8.38	±9.6
10812	AAF	5G NR (CP-OFDM, 50% RB, 90MHz, QPSK, 30kHz)	5G NR FRI TDD	8.38	±9.6
10813	AAF	5G NR (CP-OFDM, 100% RB, 10MHz, QPSK, 30kHz)	5G NR FRI TDD	8.34	±9.6
10814	AAF	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 30kHz)	5G NR FRI TDD	8.33	±9.6
10815	AAF	5G NR (CP-OFDM, 100% RB, 20MHz, QPSK, 30kHz)	5G NR FRI TDD	8.30	±9.6
10816	AAF	5G NR (CP-OFDM, 100% RB, 25MHz, QPSK, 30kHz)	5G NR FRI TDD	8.41	±9.6
10817	AAF	5G NR (CP-OFDM, 100% RB, 30MHz, QPSK, 30kHz)	5G NR FRI TDD	8.41	±9.6
10818	AAF	5G NR (CP-OFDM, 100% RB, 40MHz, QPSK, 30kHz)	5G NR FRI TDD	8.36	±9.6
10819	AAF	5G NR (CP-OFDM, 100% RB, 50MHz, QPSK, 30kHz)	5G NR FRI TDD	8.36	±9.6
10820	AAF	5G NR (CP-OFDM, 100% RB, 60MHz, QPSK, 30kHz)	5G NR FRI TDD	8.41	±9.6
10821	AAF	5G NR (CP-OFDM, 100% RB, 80MHz, QPSK, 30kHz)	5G NR FRI TDD	8.42	±9.6
10822	AAF	5G NR (CP-OFDM, 100% RB, 90MHz, QPSK, 30kHz)	5G NR FRI TDD	8.43	±9.6
10823	AAF	5G NR (CP-OFDM, 100% RB, 100MHz, QPSK, 30kHz)	5G NR FRI TDD	8.42	±9.6
10824	AAF	5G NR (CP-OFDM, 100% RB, 20MHz, QPSK, 30kHz)	5G NR FRI TDD	8.41	±9.6
10825	AAF	5G NR (CP-OFDM, 100% RB, 30MHz, QPSK, 30kHz)	5G NR FRI TDD	8.42	±9.6
10826	AAF	5G NR (CP-OFDM, 100% RB, 40MHz, QPSK, 30kHz)	5G NR FRI TDD	8.42	±9.6
10827	AAF	5G NR (CP-OFDM, 100% RB, 50MHz, QPSK, 30kHz)	5G NR FRI TDD	8.42	±9.6
10828	AAF	5G NR (CP-OFDM, 100% RB, 60MHz, QPSK, 30kHz)	5G NR FRI TDD	8.43	±9.6

Certificate No: EX-3791_Apr24

Page 19 of 22

EX3DV4 - SN:3791

April 22, 2024

UID	Rev	Communication System Name	Group	FAIR (dB)	Unc ^k k = 2
10829	AAF	5G NR (CP-OFDM, 150% RB, 150 MHz, QPSK, 30 kHz)	5G NR FRI TDD	8.40	±0.6
10830	AAE	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 60 kHz)	5G NR FRI TDD	7.65	±0.6
10831	AAE	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 60 kHz)	5G NR FRI TDD	7.75	±0.6
10832	AAE	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 60 kHz)	5G NR FRI TDD	7.74	±0.6
10833	AAE	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 60 kHz)	5G NR FRI TDD	7.70	±0.6
10834	AAE	5G NR (CP-OFDM, 1 RB, 35 MHz, QPSK, 60 kHz)	5G NR FRI TDD	7.75	±0.6
10835	AAF	5G NR (CP-OFDM, 1 RB, 45 MHz, QPSK, 60 kHz)	5G NR FRI TDD	7.70	±0.6
10836	AAE	5G NR (CP-OFDM, 1 RB, 55 MHz, QPSK, 60 kHz)	5G NR FRI TDD	7.65	±0.6
10837	AAF	5G NR (CP-OFDM, 1 RB, 65 MHz, QPSK, 60 kHz)	5G NR FRI TDD	7.65	±0.6
10838	AAF	5G NR (CP-OFDM, 1 RB, 65 MHz, QPSK, 60 kHz)	5G NR FRI TDD	7.70	±0.6
10839	AAF	5G NR (CP-OFDM, 1 RB, 65 MHz, QPSK, 60 kHz)	5G NR FRI TDD	7.67	±0.6
10840	AAF	5G NR (CP-OFDM, 1 RB, 65 MHz, QPSK, 60 kHz)	5G NR FRI TDD	7.71	±0.6
10841	AAF	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 60 kHz)	5G NR FRI TDD	7.71	±0.6
10842	AAE	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 60 kHz)	5G NR FRI TDD	8.49	±0.6
10844	AAE	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 60 kHz)	5G NR FRI TDD	8.34	±0.6
10848	AAE	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 60 kHz)	5G NR FRI TDD	8.41	±0.6
10854	AAE	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 60 kHz)	5G NR FRI TDD	8.34	±0.6
10855	AAE	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 60 kHz)	5G NR FRI TDD	8.39	±0.6
10856	AAE	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 60 kHz)	5G NR FRI TDD	8.37	±0.6
10857	AAE	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 60 kHz)	5G NR FRI TDD	8.35	±0.6
10858	AAE	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 60 kHz)	5G NR FRI TDD	8.36	±0.6
10859	AAF	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 60 kHz)	5G NR FRI TDD	8.34	±0.6
10860	AAE	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 60 kHz)	5G NR FRI TDD	8.41	±0.6
10861	AAF	5G NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 60 kHz)	5G NR FRI TDD	8.40	±0.6
10862	AAE	5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 60 kHz)	5G NR FRI TDD	8.41	±0.6
10864	AAE	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 60 kHz)	5G NR FRI TDD	8.37	±0.6
10865	AAF	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 60 kHz)	5G NR FRI TDD	8.41	±0.6
10866	AAF	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FRI TDD	5.89	±0.6
10868	AAF	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)	5G NR FRI TDD	5.89	±0.6
10869	AAE	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)	5G NR FRI TDD	5.75	±0.6
10870	AAE	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FRI TDD	5.80	±0.6
10871	AAE	5G NR (DFT-s-OFDM, 1 RB, 150 MHz, 16QAM, 120 kHz)	5G NR FRI TDD	5.75	±0.6
10872	AAE	5G NR (DFT-s-OFDM, 100% RB, 150 MHz, 16QAM, 120 kHz)	5G NR FRI TDD	5.82	±0.6
10873	AAE	5G NR (DFT-s-OFDM, 1 RB, 150 MHz, 64QAM, 120 kHz)	5G NR FRI TDD	5.61	±0.6
10874	AAE	5G NR (DFT-s-OFDM, 100% RB, 150 MHz, 64QAM, 120 kHz)	5G NR FRI TDD	5.65	±0.6
10875	AAE	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)	5G NR FRI TDD	7.78	±0.6
10876	AAE	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FRI TDD	8.34	±0.6
10877	AAE	5G NR (CP-OFDM, 1 RB, 100 MHz, 16QAM, 120 kHz)	5G NR FRI TDD	7.85	±0.6
10878	AAE	5G NR (CP-OFDM, 100% RB, 100 MHz, 16QAM, 120 kHz)	5G NR FRI TDD	8.41	±0.6
10879	AAE	5G NR (CP-OFDM, 1 RB, 100 MHz, 64QAM, 120 kHz)	5G NR FRI TDD	8.12	±0.6
10880	AAE	5G NR (CP-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz)	5G NR FRI TDD	8.38	±0.6
10881	AAE	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)	5G NR FRI TDD	5.75	±0.6
10882	AAE	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz)	5G NR FRI TDD	5.94	±0.6
10883	AAE	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 16QAM, 120 kHz)	5G NR FRI TDD	5.67	±0.6
10884	AAE	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, 16QAM, 120 kHz)	5G NR FRI TDD	5.63	±0.6
10885	AAE	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 64QAM, 120 kHz)	5G NR FRI TDD	5.61	±0.6
10886	AAE	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz)	5G NR FRI TDD	5.65	±0.6
10887	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)	5G NR FRI TDD	7.78	±0.6
10888	AAE	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz)	5G NR FRI TDD	8.39	±0.6
10889	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, 16QAM, 120 kHz)	5G NR FRI TDD	8.02	±0.6
10890	AAE	5G NR (CP-OFDM, 100% RB, 50 MHz, 16QAM, 120 kHz)	5G NR FRI TDD	8.40	±0.6
10891	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, 64QAM, 120 kHz)	5G NR FRI TDD	8.13	±0.6
10892	AAE	5G NR (CP-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz)	5G NR FRI TDD	8.41	±0.6
10893	AAE	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz)	5G NR FRI TDD	5.69	±0.6
10894	AAE	5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz)	5G NR FRI TDD	5.67	±0.6
10895	AAE	5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 30 kHz)	5G NR FRI TDD	5.67	±0.6
10896	AAE	5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz)	5G NR FRI TDD	5.68	±0.6
10897	AAE	5G NR (DFT-s-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz)	5G NR FRI TDD	5.68	±0.6
10898	AAE	5G NR (DFT-s-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz)	5G NR FRI TDD	5.68	±0.6
10899	AAE	5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)	5G NR FRI TDD	5.68	±0.6
10900	AAE	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz)	5G NR FRI TDD	5.68	±0.6
10901	AAE	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz)	5G NR FRI TDD	5.68	±0.6
10902	AAE	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz)	5G NR FRI TDD	5.68	±0.6
10903	AAE	5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 30 kHz)	5G NR FRI TDD	5.70	±0.6
10904	AAE	5G NR (DFT-s-OFDM, 50% RB, 10 MHz, QPSK, 30 kHz)	5G NR FRI TDD	5.69	±0.6
10905	AAE	5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FRI TDD	5.66	±0.6
10910	AAE	5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 30 kHz)	5G NR FRI TDD	5.65	±0.6



SGS Korea Co., Ltd.

4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807

Tel. 031-428-5700 / Fax. 031-427-2371

http://www.sgsgroup.kr

EX30V4 - SN:3791

April 22, 2024

UID	Item	Communication System Name	Group	PAR (dB)	Use ¹ k = 2
10911	AAB	5G NR (DFT-s-OFDM, 50% RB, 25MHz, QPSK, 30kHz)	5G NR FRI TDD	5.93	±0.0
10912	AAC	5G NR (DFT-s-OFDM, 50% RB, 30MHz, QPSK, 30kHz)	5G NR FRI TDD	5.84	±0.0
10913	AAD	5G NR (DFT-s-OFDM, 50% RB, 40MHz, QPSK, 30kHz)	5G NR FRI TDD	5.84	±0.0
10914	AAC	5G NR (DFT-s-OFDM, 50% RB, 50MHz, QPSK, 30kHz)	5G NR FRI TDD	5.85	±0.0
10915	AAD	5G NR (DFT-s-OFDM, 50% RB, 60MHz, QPSK, 30kHz)	5G NR FRI TDD	5.83	±0.0
10916	AAD	5G NR (DFT-s-OFDM, 50% RB, 80MHz, QPSK, 30kHz)	5G NR FRI TDD	5.87	±0.0
10917	AAD	5G NR (DFT-s-OFDM, 50% RB, 100MHz, QPSK, 30kHz)	5G NR FRI TDD	5.84	±0.0
10918	AAC	5G NR (DFT-s-OFDM, 100% RB, 5MHz, QPSK, 30kHz)	5G NR FRI TDD	5.88	±0.0
10919	AAC	5G NR (DFT-s-OFDM, 100% RB, 10MHz, QPSK, 30kHz)	5G NR FRI TDD	5.88	±0.0
10920	AAC	5G NR (DFT-s-OFDM, 100% RB, 15MHz, QPSK, 30kHz)	5G NR FRI TDD	5.87	±0.0
10921	AAC	5G NR (DFT-s-OFDM, 100% RB, 20MHz, QPSK, 30kHz)	5G NR FRI TDD	5.84	±0.0
10922	AAB	5G NR (DFT-s-OFDM, 100% RB, 25MHz, QPSK, 30kHz)	5G NR FRI TDD	5.82	±0.0
10923	AAC	5G NR (DFT-s-OFDM, 100% RB, 30MHz, QPSK, 30kHz)	5G NR FRI TDD	5.84	±0.0
10924	AAD	5G NR (DFT-s-OFDM, 100% RB, 40MHz, QPSK, 30kHz)	5G NR FRI TDD	5.84	±0.0
10925	AAC	5G NR (DFT-s-OFDM, 100% RB, 50MHz, QPSK, 30kHz)	5G NR FRI TDD	5.86	±0.0
10926	AAD	5G NR (DFT-s-OFDM, 100% RB, 60MHz, QPSK, 30kHz)	5G NR FRI TDD	5.84	±0.0
10927	AAD	5G NR (DFT-s-OFDM, 100% RB, 80MHz, QPSK, 30kHz)	5G NR FRI TDD	5.84	±0.0
10928	AAD	5G NR (DFT-s-OFDM, 1 RB, 5MHz, QPSK, 15kHz)	5G NR FRI FDD	5.90	±0.0
10929	AAD	5G NR (DFT-s-OFDM, 1 RB, 10MHz, QPSK, 15kHz)	5G NR FRI FDD	5.90	±0.0
10930	AAC	5G NR (DFT-s-OFDM, 1 RB, 15MHz, QPSK, 15kHz)	5G NR FRI FDD	5.92	±0.0
10931	AAC	5G NR (DFT-s-OFDM, 1 RB, 20MHz, QPSK, 15kHz)	5G NR FRI FDD	5.91	±0.0
10932	AAC	5G NR (DFT-s-OFDM, 1 RB, 25MHz, QPSK, 15kHz)	5G NR FRI FDD	5.91	±0.0
10933	AAC	5G NR (DFT-s-OFDM, 1 RB, 30MHz, QPSK, 15kHz)	5G NR FRI FDD	5.91	±0.0
10934	AAC	5G NR (DFT-s-OFDM, 1 RB, 40MHz, QPSK, 15kHz)	5G NR FRI FDD	5.91	±0.0
10935	AAD	5G NR (DFT-s-OFDM, 1 RB, 50MHz, QPSK, 15kHz)	5G NR FRI FDD	5.91	±0.0
10936	AAD	5G NR (DFT-s-OFDM, 50% RB, 5MHz, QPSK, 15kHz)	5G NR FRI FDD	5.90	±0.0
10937	AAD	5G NR (DFT-s-OFDM, 50% RB, 10MHz, QPSK, 15kHz)	5G NR FRI FDD	5.97	±0.0
10938	AAC	5G NR (DFT-s-OFDM, 50% RB, 15MHz, QPSK, 15kHz)	5G NR FRI FDD	5.90	±0.0
10939	AAC	5G NR (DFT-s-OFDM, 50% RB, 20MHz, QPSK, 15kHz)	5G NR FRI FDD	5.89	±0.0
10940	AAC	5G NR (DFT-s-OFDM, 50% RB, 30MHz, QPSK, 15kHz)	5G NR FRI FDD	5.90	±0.0
10941	AAC	5G NR (DFT-s-OFDM, 50% RB, 40MHz, QPSK, 15kHz)	5G NR FRI FDD	5.93	±0.0
10942	AAC	5G NR (DFT-s-OFDM, 50% RB, 50MHz, QPSK, 15kHz)	5G NR FRI FDD	5.90	±0.0
10943	AAC	5G NR (DFT-s-OFDM, 50% RB, 60MHz, QPSK, 15kHz)	5G NR FRI FDD	5.90	±0.0
10944	AAD	5G NR (DFT-s-OFDM, 100% RB, 5MHz, QPSK, 15kHz)	5G NR FRI FDD	5.91	±0.0
10945	AAD	5G NR (DFT-s-OFDM, 100% RB, 10MHz, QPSK, 15kHz)	5G NR FRI FDD	5.88	±0.0
10946	AAC	5G NR (DFT-s-OFDM, 100% RB, 15MHz, QPSK, 15kHz)	5G NR FRI FDD	5.93	±0.0
10947	AAC	5G NR (DFT-s-OFDM, 100% RB, 20MHz, QPSK, 15kHz)	5G NR FRI FDD	5.97	±0.0
10948	AAC	5G NR (DFT-s-OFDM, 100% RB, 25MHz, QPSK, 15kHz)	5G NR FRI FDD	5.94	±0.0
10949	AAC	5G NR (DFT-s-OFDM, 100% RB, 30MHz, QPSK, 15kHz)	5G NR FRI FDD	5.97	±0.0
10950	AAC	5G NR (DFT-s-OFDM, 100% RB, 40MHz, QPSK, 15kHz)	5G NR FRI FDD	5.94	±0.0
10951	AAD	5G NR (DFT-s-OFDM, 100% RB, 50MHz, QPSK, 15kHz)	5G NR FRI FDD	5.92	±0.0
10952	AAA	5G NR DL (CP-OFDM, TM 3.1, 5MHz, 64-QAM, 15kHz)	5G NR FRI FDD	6.25	±0.0
10953	AAA	5G NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 15kHz)	5G NR FRI FDD	6.15	±0.0
10954	AAA	5G NR DL (CP-OFDM, TM 3.1, 15MHz, 64-QAM, 15kHz)	5G NR FRI FDD	6.20	±0.0
10955	AAA	5G NR DL (CP-OFDM, TM 3.1, 20MHz, 64-QAM, 15kHz)	5G NR FRI FDD	6.42	±0.0
10956	AAA	5G NR DL (CP-OFDM, TM 3.1, 5MHz, 64-QAM, 30kHz)	5G NR FRI FDD	6.14	±0.0
10957	AAA	5G NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 30kHz)	5G NR FRI FDD	6.31	±0.0
10958	AAA	5G NR DL (CP-OFDM, TM 3.1, 15MHz, 64-QAM, 30kHz)	5G NR FRI FDD	6.61	±0.0
10959	AAA	5G NR DL (CP-OFDM, TM 3.1, 20MHz, 64-QAM, 30kHz)	5G NR FRI FDD	6.33	±0.0
10960	AAA	5G NR DL (CP-OFDM, TM 3.1, 5MHz, 64-QAM, 15kHz)	5G NR FRI TDD	6.32	±0.0
10961	AAA	5G NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 15kHz)	5G NR FRI TDD	6.36	±0.0
10962	AAA	5G NR DL (CP-OFDM, TM 3.1, 15MHz, 64-QAM, 15kHz)	5G NR FRI TDD	6.40	±0.0
10963	AAA	5G NR DL (CP-OFDM, TM 3.1, 20MHz, 64-QAM, 15kHz)	5G NR FRI TDD	6.55	±0.0
10964	AAA	5G NR DL (CP-OFDM, TM 3.1, 5MHz, 64-QAM, 30kHz)	5G NR FRI TDD	6.29	±0.0
10965	AAA	5G NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 30kHz)	5G NR FRI TDD	6.37	±0.0
10966	AAA	5G NR DL (CP-OFDM, TM 3.1, 15MHz, 64-QAM, 30kHz)	5G NR FRI TDD	6.55	±0.0
10967	AAA	5G NR DL (CP-OFDM, TM 3.1, 20MHz, 64-QAM, 30kHz)	5G NR FRI TDD	6.42	±0.0
10968	AAD	5G NR DL (CP-OFDM, TM 3.1, 100MHz, 64-QAM, 30kHz)	5G NR FRI TDD	6.48	±0.0
10972	AAC	5G NR (CP-OFDM, 1 RB, 20MHz, QPSK, 15kHz)	5G NR FRI TDD	11.20	±0.0
10973	AAD	5G NR (DFT-s-OFDM, 1 RB, 100MHz, QPSK, 30kHz)	5G NR FRI TDD	6.06	±0.0
10974	AAD	5G NR (DFT-s-OFDM, 100% RB, 100MHz, 256-QAM, 30kHz)	5G NR FRI TDD	16.28	±0.0
10979	AAA	ULLA HDR	ULLA	7.16	±0.0
10980	AAA	ULLA HDR4	ULLA	8.58	±0.0
10981	AAA	ULLA HDR8	ULLA	10.32	±0.0
10982	AAA	ULLA HDRp4	ULLA	3.19	±0.0
10983	AAA	ULLA HDRp8	ULLA	3.43	±0.0

Certificate No: EX-3791_Apr24

Page 21 of 22

EX3DV4 - SN-3791

April 22, 2024

UTB	Rev	Communication System Name	Group	PAR (dB)	Unc [Ⓢ] k = 2
10983	AAC	5G NR DL (CP-OFDM, TM 3.1, 40MHz, 64-QAM, 15KHz)	5G NR PRR TOD	9.31	±0.6
10994	AAB	5G NR DL (CP-OFDM, TM 3.1, 40MHz, 64-QAM, 15KHz)	5G NR PRR TOD	9.49	±0.6
10995	AAC	5G NR DL (CP-OFDM, TM 3.1, 40MHz, 64-QAM, 30KHz)	5G NR PRR TOD	9.64	±0.6
10996	AAB	5G NR DL (CP-OFDM, TM 3.1, 40MHz, 64-QAM, 30KHz)	5G NR PRR TOD	9.60	±0.6
10987	AAC	5G NR DL (CP-OFDM, TM 3.1, 50MHz, 64-QAM, 30KHz)	5G NR PRR TOD	9.53	±0.6
10988	AAB	5G NR DL (CP-OFDM, TM 3.1, 70MHz, 64-QAM, 30KHz)	5G NR PRR TOD	9.36	±0.6
10989	AAC	5G NR DL (CP-OFDM, TM 3.1, 80MHz, 64-QAM, 30KHz)	5G NR PRR TOD	9.35	±0.6
10990	AAB	5G NR DL (CP-OFDM, TM 3.1, 90MHz, 64-QAM, 30KHz)	5G NR PRR TOD	9.52	±0.6
11003	AAA	5G NR DL (CP-OFDM, TM 3.1, 30MHz, 64-QAM, 15KHz)	5G NR PRR TOD	10.24	±0.6
11004	AAA	5G NR DL (CP-OFDM, TM 3.1, 30MHz, 64-QAM, 30KHz)	5G NR PRR TOD	10.75	±0.6
11005	AAA	5G NR DL (CP-OFDM, TM 3.1, 25MHz, 64-QAM, 15KHz)	5G NR PRR FDD	8.70	±0.6
11006	AAA	5G NR DL (CP-OFDM, TM 3.1, 30MHz, 64-QAM, 15KHz)	5G NR PRR FDD	8.95	±0.6
11007	AAA	5G NR DL (CP-OFDM, TM 3.1, 40MHz, 64-QAM, 15KHz)	5G NR PRR FDD	8.66	±0.6
11008	AAA	5G NR DL (CP-OFDM, TM 3.1, 50MHz, 64-QAM, 15KHz)	5G NR PRR FDD	8.91	±0.6
11009	AAA	5G NR DL (CP-OFDM, TM 3.1, 25MHz, 64-QAM, 30KHz)	5G NR PRR FDD	8.70	±0.6
11010	AAA	5G NR DL (CP-OFDM, TM 3.1, 30MHz, 64-QAM, 30KHz)	5G NR PRR FDD	8.95	±0.6
11011	AAA	5G NR DL (CP-OFDM, TM 3.1, 45MHz, 64-QAM, 30KHz)	5G NR PRR FDD	8.95	±0.6
11012	AAA	5G NR DL (CP-OFDM, TM 3.1, 50MHz, 64-QAM, 30KHz)	5G NR PRR FDD	8.68	±0.6
11013	AAB	IEEE 802.11be (320MHz, MCS1, 56pc duty cycle)	WLAN	8.47	±0.6
11014	AAB	IEEE 802.11be (320MHz, MCS2, 56pc duty cycle)	WLAN	8.45	±0.6
11015	AAB	IEEE 802.11be (320MHz, MCS3, 56pc duty cycle)	WLAN	8.44	±0.6
11016	AAB	IEEE 802.11be (320MHz, MCS4, 56pc duty cycle)	WLAN	8.44	±0.6
11017	AAB	IEEE 802.11be (320MHz, MCS5, 56pc duty cycle)	WLAN	8.41	±0.6
11018	AAB	IEEE 802.11be (320MHz, MCS6, 56pc duty cycle)	WLAN	8.45	±0.6
11019	AAB	IEEE 802.11be (320MHz, MCS7, 56pc duty cycle)	WLAN	8.29	±0.6
11020	AAB	IEEE 802.11be (320MHz, MCS8, 56pc duty cycle)	WLAN	8.27	±0.6
11021	AAB	IEEE 802.11be (320MHz, MCS9, 56pc duty cycle)	WLAN	8.48	±0.6
11022	AAB	IEEE 802.11be (320MHz, MCS10, 56pc duty cycle)	WLAN	8.36	±0.6
11023	AAB	IEEE 802.11be (320MHz, MCS11, 56pc duty cycle)	WLAN	8.59	±0.6
11024	AAB	IEEE 802.11be (320MHz, MCS12, 56pc duty cycle)	WLAN	8.42	±0.6
11025	AAB	IEEE 802.11be (320MHz, MCS13, 56pc duty cycle)	WLAN	8.37	±0.6
11026	AAB	IEEE 802.11be (320MHz, MCS14, 56pc duty cycle)	WLAN	8.39	±0.6

[Ⓢ] Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Appendix C.2 Calibration certificate for DAE (S/N : 1504)

Calibration Laboratory of
 Schmid & Partner
 Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client: **SGS**
 Gyeonggi-do, Republic of Korea

S Schweizerischer Kalibrierdienst
 S Service suisse d'étalonnage
 S Servizio svizzero di taratura
 S Swiss Calibration Service

Accreditation No.: **SCS 0108**

Certificate No.: **DAE4-1504_Jan24**

CALIBRATION CERTIFICATE

Object: **DAE4 - SD 000 D04 BM - SN: 1504**

Calibration procedure(s): **QA CAL-06.v30**
 Calibration procedure for the data acquisition electronics (DAE)

Calibration date: **January 17, 2024**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 0.5)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Ketley Multimeter Type 2001	SN: 0810278	29-Aug-23 (No:37421)	Aug-24

Secondary Standards	ID #	Check Date (In house)	Scheduled Check
Auto DAE Calibration Unit	SE LMS 053 AA 1001	27-Jan-23 (In house check)	In house check Jan-24
Calibrator Box VZ.1	SE LMS 006 AA 1002	27-Jan-23 (In house check)	In house check Jan-24

Calibrated by: **Dominique Steffen**
 Function: **Laboratory Technician**

Approved by: **Sven Kjelln**
 Function: **Technical Manager**

Signature:

Signature:

Issued: **January 17, 2024**

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
 Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Glossary

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters :

- **DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrated Instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- **Connector angle:** The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - **DC Voltage Measurement Linearity:** Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - **Common mode sensitivity:** Influence of a positive or negative common mode voltage on the differential measurement.
 - **Channel separation:** Influence of a voltage on the neighbor channels not subject to an input voltage.
 - **AD Converter Values with inputs shorted:** Values on the internal AD converter corresponding to zero input voltage
 - **Input Offset Measurement:** Output voltage and statistical results over a large number of zero voltage measurements.
 - **Input Offset Current:** Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - **Input resistance:** Typical value for information; DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - **Low Battery Alarm Voltage:** Typical value for information. Below this voltage, a battery alarm signal is generated.
 - **Power consumption:** Typical value for information. Supply currents in various operating modes.

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 μ V, full range = -100...+300 mV
 Low Range: 1LSB = 61nV, full range = -1...+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.412 \pm 0.02% (k=2)	403.889 \pm 0.02% (k=2)	403.937 \pm 0.02% (k=2)
Low Range	3.95738 \pm 1.50% (k=2)	3.95342 \pm 1.50% (k=2)	4.01625 \pm 1.50% (k=2)

Connector Angle

Connector Angle to be used in DASY system	79.0 ° \pm 1 °
---	------------------

Appendix (Additional assessments outside the scope of SCS0108)

1. DC Voltage Linearity

High Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	200007.15	-0.23	-0.00
Channel X + Input	20017.75	2.63	0.01
Channel X - Input	-19984.39	4.44	-0.02
Channel Y + Input	200005.81	-1.02	-0.00
Channel Y + Input	20013.77	-1.57	-0.01
Channel Y - Input	-19989.24	-0.56	0.00
Channel Z + Input	200006.10	-1.17	-0.00
Channel Z + Input	20013.90	-1.65	-0.01
Channel Z - Input	-19985.76	-0.08	0.00

Low Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	2015.88	1.45	0.07
Channel X + Input	216.22	1.61	0.75
Channel X - Input	-183.53	1.65	-0.89
Channel Y + Input	2015.02	0.47	0.02
Channel Y + Input	214.12	-0.65	-0.30
Channel Y - Input	-185.25	-0.07	0.04
Channel Z + Input	2014.58	0.00	0.00
Channel Z + Input	214.04	-0.77	-0.36
Channel Z - Input	-185.59	-0.30	0.16

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (µV)	Low Range Average Reading (µV)
Channel X	200	-6.16	-8.34
	-200	10.38	8.54
Channel Y	200	7.38	7.56
	-200	-8.71	-8.97
Channel Z	200	-3.44	-3.56
	-200	1.65	1.43

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (µV)	Channel Y (µV)	Channel Z (µV)
Channel X	200	-	-1.00	-4.15
Channel Y	200	7.05	-	0.89
Channel Z	200	10.80	4.58	-

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15945	16176
Channel Y	15782	15862
Channel Z	16066	16639

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M Ω

	Average (μ V)	min. Offset (μ V)	max. Offset (μ V)	Std. Deviation (μ V)
Channel X	0.97	0.05	1.95	0.35
Channel Y	-0.00	-1.10	0.66	0.35
Channel Z	-0.47	-1.48	1.44	0.49

6. Input Offset Current

Nominal input circuitry offset current on all channels: <25 μ A

7. Input Resistance (Typical values for information)

	Zeroing (k Ω)	Measuring (M Ω)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.8
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+8	+14
Supply (- Vcc)	-0.01	-8	-8

Appendix C.3 Calibration certificate for Dipole (S/N: 734)

Calibration Laboratory of Schmid & Partner Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland

Accredited by the Swiss Accreditation Service (BAS)
 The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

S Schweizerischer Kalibrierdienst
 C Service suisse d'étalonnage
 S Servizio svizzero di taratura
 S Swiss Calibration Service

Accreditation No.: SCS 0108

Client: **SGS** Certificate No: **D2450V2-734_Jan24**
 Gyeonggi-do, Republic of Korea

CALIBRATION CERTIFICATE

Object: **D2450V2 - SN:734**

Calibration procedure(s): **QA CAL-05.v12
 Calibration Procedure for SAR Validation Sources between 0.7-3 GHz**

Calibration date: **January 22, 2024**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 3°C and humidity < 70%).

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP2	SN: 104778	30-Mar-23 (No. 217-03804/03805)	Mar-24
Power sensor NRP-ZB1	SN: 103244	30-Mar-23 (No. 217-03804)	Mar-24
Power sensor NRP-ZB1	SN: 103245	30-Mar-23 (No. 217-03805)	Mar-24
Reference 20 dB Attenuator	SN: B48394 (20k)	30-Mar-23 (No. 217-03805)	Mar-24
Type-N mismatch combination	SN: 310882 / 00327	30-Mar-23 (No. 217-03810)	Mar-24
Reference Probe EX30V4	SN: 7349	15-Jan-25 (No. EX3-7348_Jan23)	Jan-24
DAB4	SN: 601	03-Oct-23 (No. DAB4-601_Oct23)	Oct-24

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: 0839912475	30-Oct-14 (in house check Oct-22)	In house check: Oct-24
Power sensor HP 8491A	SN: U837292793	07-Oct-15 (in house check Oct-22)	In house check: Oct-24
Power sensor HP 8491A	SN: MY41093315	07-Oct-15 (in house check Oct-22)	In house check: Oct-24
RF generator R&S SMW-06	SN: 100972	15-Jun-15 (in house check Oct-22)	In house check: Oct-24
Network Analyzer Agilent E8358A	SN: U841080477	31-Mar-14 (in house check Oct-22)	In house check: Oct-24

Calibrated by: **Paulo Pina**
 Laboratory Technician

Approved by: **Sivan Kühn**
 Technical Manager

Signature:

Signature:

Issued: January 23, 2024

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D2450V2-734_Jan24

Page 1 of 6

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8604 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service
 Accreditation No.: **SCS 0108**

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL tissue simulating liquid
 ConvF sensitivity in TSL / NORM x,y,z
 N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- c) DASY System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The source is mounted in a touch configuration below the center marking of the flat phantom.
- *Return Loss:* This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	38.5 ± 6 %	1.85 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.5 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	52.9 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.19 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.5 W/kg ± 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.3 Ω + 6.2 jΩ
Return Loss	- 24.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.153 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

DASY5 Validation Report for Head TSL

Date: 22.01.2024

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:734


Communication System: UID 0 - CW; Frequency: 2450 MHz
 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:


- Probe: EX3DV4 - SN7349; ConvF(7.96, 7.96, 7.96) @ 2450 MHz; Calibrated: 03.11.2023
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 03.10.2023
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 116.2 V/m; Power Drift = 0.06 dB
 Peak SAR (extrapolated) = 26.8 W/kg
SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.19 W/kg
 Smallest distance from peaks to all points 3 dB below = 9 mm
 Ratio of SAR at M2 to SAR at M1 = 50.2%
 Maximum value of SAR (measured) = 22.0 W/kg

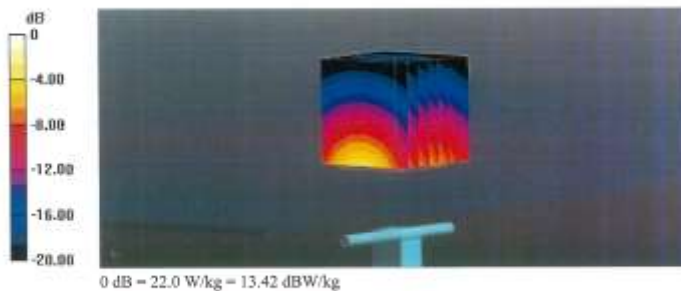

Impedance Measurement Plot for Head TSL

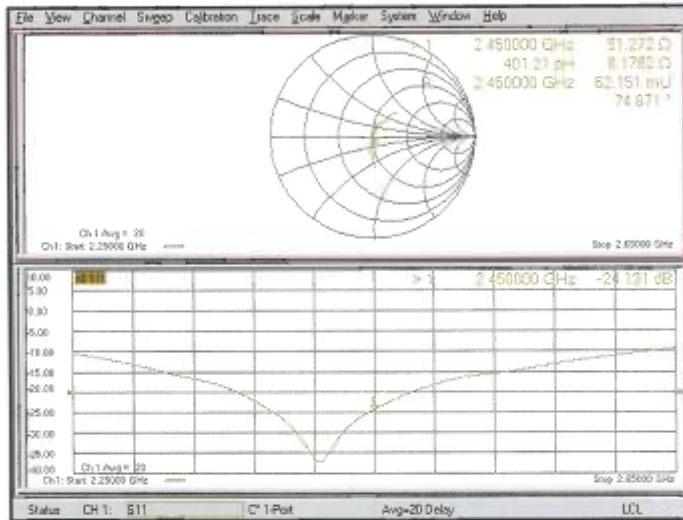

-THE END-