



849 NW State Road 45  
Newberry, FL 32669 USA  
Phone: 888.472.2424 or  
352.472.5500  
Fax: 352.472.2030  
Email: [info@timcoengr.com](mailto:info@timcoengr.com)

## FCC PART 15 SUBPART B CLASS B TEST REPORT

<b>Applicant</b>	AUDIO TECHNICA CORPORATION
<b>Address</b>	2-46-1 NISHI-NARUSE MACHIDA TOKYO194-8666JAPAN
<b>FCC ID</b>	JFZCKS550BT
<b>Model Number</b>	ATH-CKS550BT
<b>Product Description</b>	BLUETOOTH WIRELESS STEREO HEADSET
<b>Date Sample Received</b>	7/15/2016
<b>Date Tested</b>	8/3/2016
<b>Tested By</b>	Tim Royer
<b>Approved By</b>	Cory Leverett
<b>Test Results</b>	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

Report Number	Version Number	Description	Issue Date
1374BUT16TestReport	Rev1	Initial Issue	8/8/2016
1374BUT16TestReport	Rev2	Clerical update on page 4	8/28/2016

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL  
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**

## TABLE OF CONTENTS

<b>GENERAL REMARKS</b> .....	3
EUT SPECIFICATION.....	4
EUT CABLES USED FOR TESTING.....	5
TEST RESULTS SUMMARY .....	5
RADIATED SPURIOUS EMISSIONS.....	6
RADIATED EMISSIONS TEST DATA: .....	8
30-200 MHZ PLOT.....	9
200-1000 MHZ PLOT.....	10
POWER LINE CONDUCTED INTERFERENCE .....	12
POWERLINE 1 PLOT .....	13
POWERLINE 2 PLOT .....	14
TEST EQUIPMENT LIST .....	15

## GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

## Summary

The device under test does:

- ☒ Fulfill the general approval requirements as identified in this test report and was selected by the customer.
- ☐ Not fulfill the general approval requirements as identified in this test report

## Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made at:

**Timco Engineering Inc.**  
**849 NW State Road 45**  
**Newberry, FL 32669**



**Tested by:** \_\_\_\_\_

Name and Title: Tim Royer, Project Manager/Testing Engineer

**Date: 8/ 3/ 2016**



**Reviewed and approved by:** \_\_\_\_\_

Name and Title: Cory Leverett Project Manager

**Date: 8/ 8/ 2016**

## EUT SPECIFICATION

<b>This test results relates only to the items tested.</b>	
<b>EUT DESCRIPTION</b>	BLUETOOTH WIRELESS STEREO HEADSET
<b>REQUIREMENTS</b>	CFR 47 FCC Pt 15.109, Pt 15.107
<b>FCC ID</b>	JFZCKS550BT
<b>MODEL NUMBER</b>	ATH-CKS550BT
<b>TEST STANDARDS</b>	ANSI C63.4 – 2014
<b>TEST FREQUENCIES</b>	NA
<b>EUT POWER SOURCE</b>	<input type="checkbox"/> 110–120Vac/50– 60Hz
	<input type="checkbox"/> DC Power
	<input checked="" type="checkbox"/> Battery Operated Exclusively
<b>TEST ITEM</b>	<input type="checkbox"/> Prototype
	<input type="checkbox"/> Pre-Production
	<input checked="" type="checkbox"/> Production
<b>TYPE OF EQUIPMENT</b>	<input type="checkbox"/> Fixed
	<input type="checkbox"/> Mobile
	<input checked="" type="checkbox"/> Portable
<b>MODIFICATIONS TO EUT:</b>	<input checked="" type="checkbox"/> No <input type="checkbox"/> Yes (explanation below)
<b>TEST MODE DESCRIPTION</b>	The EUT was switched on and placed in a receive mode using test software. For conducted emissions the EUT was connected to a laptop charging only.
<b>TEST FACILITIES</b>	<b>Timco Engineering Inc. located at 849 NW State Road 45 Newberry, FL 32669 USA.</b>
<b>LABORATORY TEST CONDITION</b>	Temperature: 24-26°C Relative humidity: 50-65% Barometric Pressure: 30.01 in

**EUT CABLES USED FOR TESTING**

Description	Type	Connector	Length
Charging	USB	Micro USB	0.5m

**TEST RESULTS SUMMARY**

FCC Part 15.109	Pass
FCC Part 15.107	Pass

## **RADIATED SPURIOUS EMISSIONS**

### **RULES PART NO.:FCC PART 15.109**

#### **REQUIREMENTS:**

Frequency MHz	Limits
30 – 88	40.0 dB $\mu$ V/m measured @ 3 meters
88 – 216	43.5 dB $\mu$ V/m measured @ 3 meters
216 – 960	46.0 dB $\mu$ V/m measured @ 3 meters
Above 960	54.0 dB $\mu$ V/m measured @ 3 meters

#### **Method of Measurement for Radiated Emissions:**

The test procedure used for radiated emissions is described ANSI C63.4 using a spectrum analyzer. The resolution bandwidth used was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. All cable loss and antenna factors were calibrated to provide plots with correction factors applied to results using the formula and example described below. The video bandwidth of the analyzer was always greater than or equal to the resolution bandwidth, and a peak detector with max hold was used

The unit under test was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The table used for radiated measurements is capable of continuous rotation. When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes. The frequency was scanned from 30 MHz to 1.0 GHz... The EUT was measured in three parts of the tunable band of EUT and (3) orthogonal planes when necessary.

#### **Radiated Emissions Test Setup:**

EUT setup and arrangement was completed as described in ANSI C63.4. Exploratory measurements were taken following different peripheral placement and cable manipulations as described in ANSI C63.4. A photo is provided of the Test setup to record the exact peripheral equipment and cable manipulation arrangement found to produce the highest possible level of radiated emissions.

**Formula of Conversion Factors:**

The field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB $\mu$ V) to the antenna correction factor supplied by the antenna manufacturer plus the coax loss. The antenna correction factors are stated in terms of dB. The gain of the preselector was accounted for in the spectrum analyzer meter reading.

**Field Strength Correction Factor Conversion Example:**


Freq (MHz)	Meter Reading	+ ACF	+ CL	= FS
33	20 dB $\mu$ V	+ 10.36 dB/m	+ 0.40 dB	= 30.76 dB $\mu$ V/m @ 3m

**RADIATED EMISSIONS TEST DATA:**

The following plots represent the maximum emissions found when taking final measurements following the procedure described in ANSI C63.4. The final measurements were preceded by taking exploratory measurements described in ANSI C63.4. The plots include the limit line for radiated emissions as required by FCC part 15.109.

## RADIATED SPURIOUS EMISSIONS

### 30-200 MHz PLOT

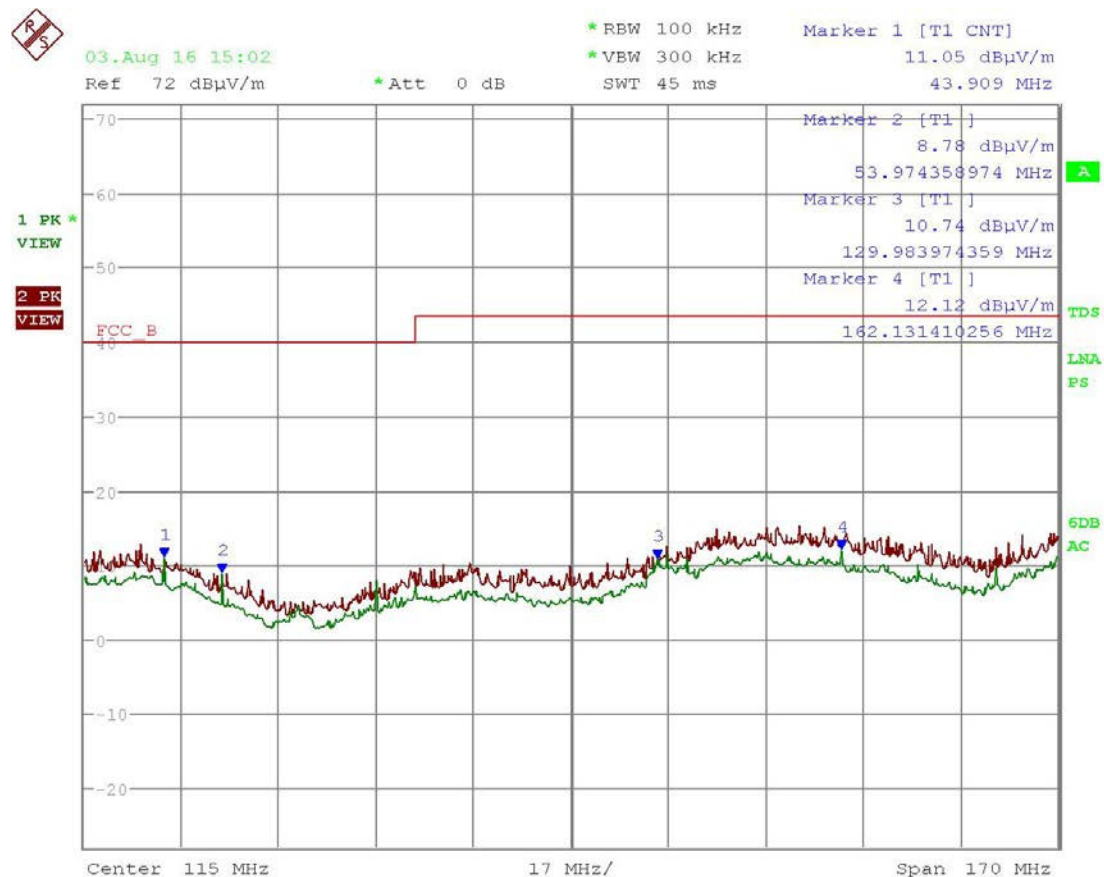

Date: 3.AUG.2016 15:02:40

### Results - Meets Requirements

Ant Polarity: T1 (Green) = Vertical, T2 (Red) = Horizontal

RADIATED SPURIOUS EMISSIONS

200-1000 MHZ PLOT



Date: 3.AUG.2016 15:06:59

Results - Meets Requirements

Ant Polarity: T1 (Green) = Vertical, T2 (Red) = Horizontal

## RADIATED SPURIOUS EMISSIONS

Emission Frequency MHz	Detector (PK/AV)	Meter Reading dBu V	Antenna Polarity	Coax Loss Db	Correction Factor dB/M	Field Strength dBu V/M
4871.85	PK	26.80	V	8.127	33.930	68.857
4871.85	AV	8.09	V	8.127	33.930	50.147
10777.30	PK	20.53	H	12.177	37.880	70.587
10777.30	AV	3.14	H	12.177	37.880	53.197

## POWER LINE CONDUCTED INTERFERENCE

Rules Part No.: Part 15.107


### Requirements:

Frequency (MHz)	Quasi Peak Limits (dB $\mu$ V)	Average Limits (dB $\mu$ V)
0.15 – 0.5	66 – 56 *	56 – 46 *
0.5 – 5.0	56	46
5.0 – 30	60	50
* Decrease with logarithm of frequency		

**Method of Measurement:** The procedure used was ANSI C63.4 using a 50 $\mu$ H LISN. Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed. The spectrum was scanned from 0.15 to 30 MHz.


**Test Data:** The following plots represent the emissions for power line conducted. Both lines were observed.

## POWER LINE CONDUCTED INTERFERENCE

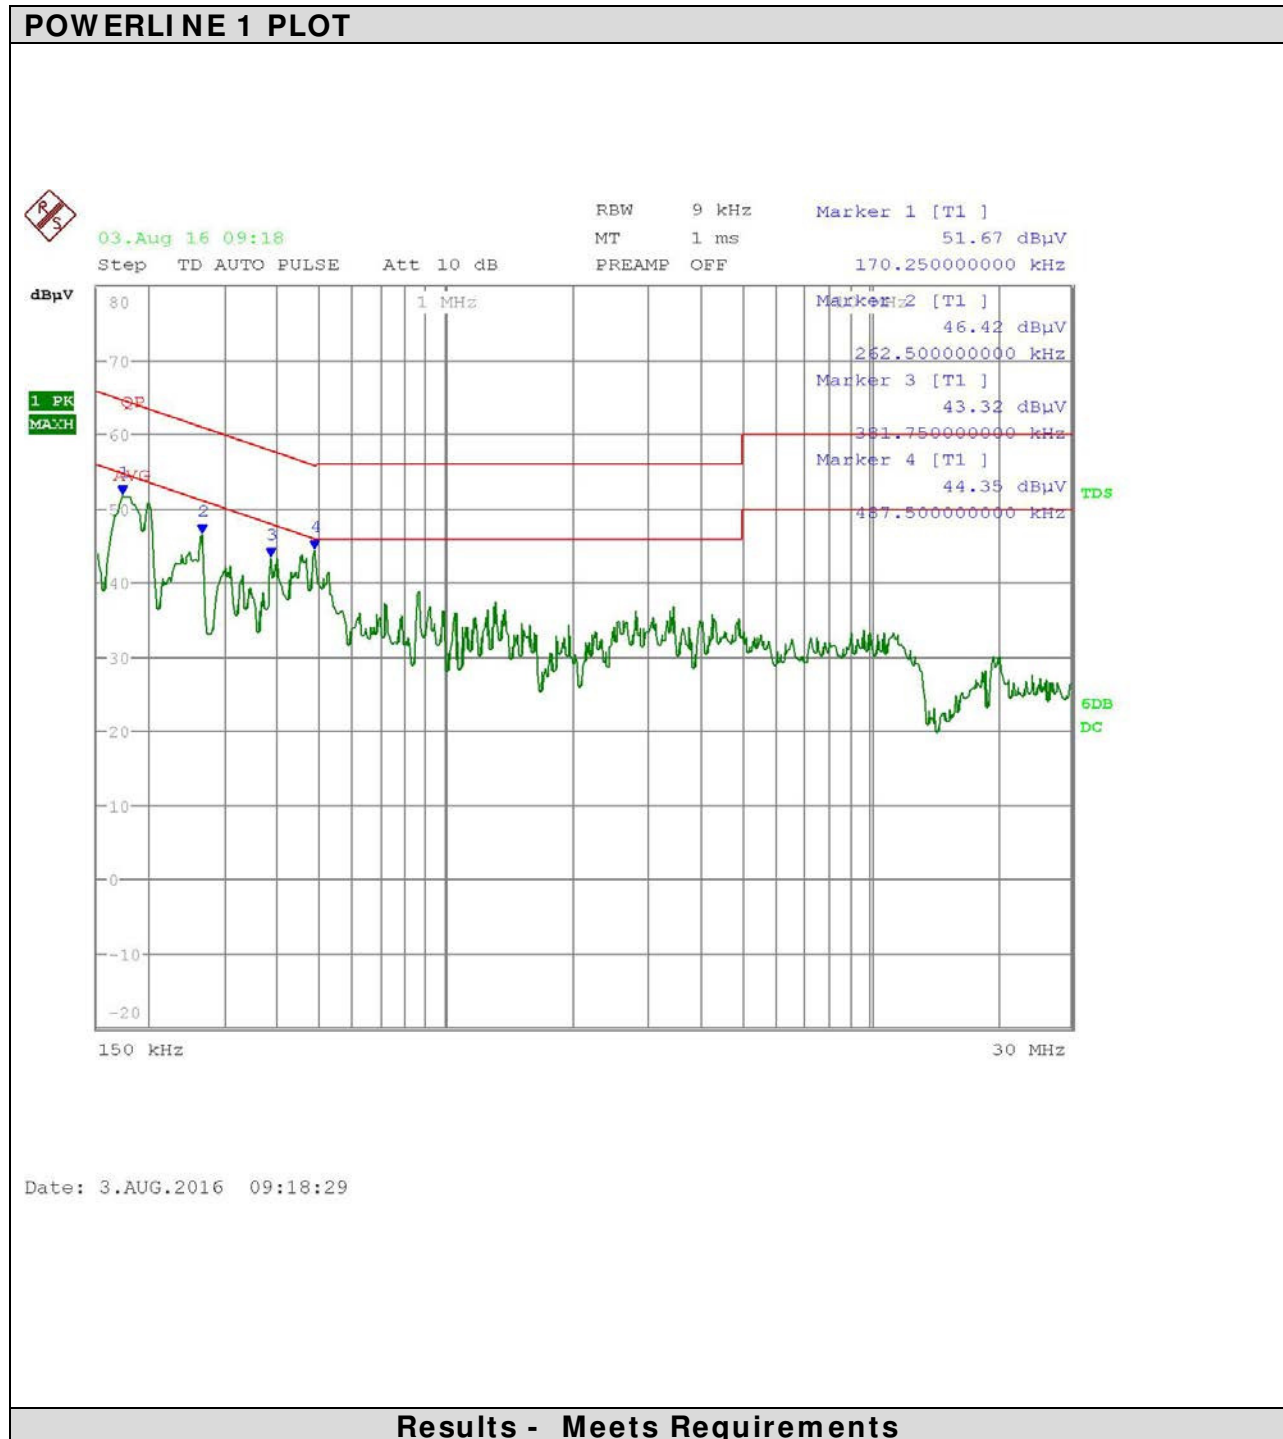

POWER LINE CONDUCTED INTERFERENCE

POWERLINE 2 PLOT

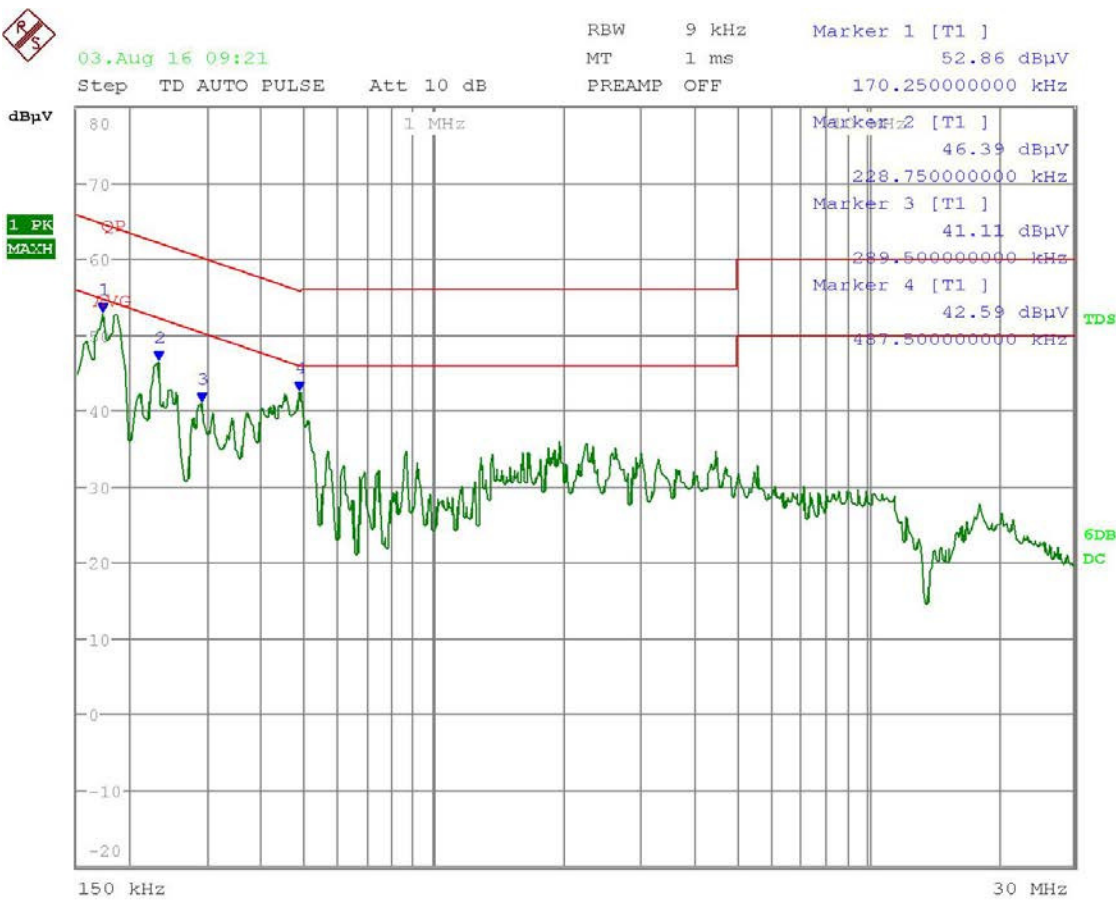

Date: 3.AUG.2016 09:21:07

Results - Meets Requirements

## TEST EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
Antenna: Biconical 1096 Chamber	Eaton	94455-1	1096	07/14/15	07/14/17
Antenna: Log- Periodic 1122	Electro-Metrics	-25	1122	07/14/15	07/14/17
LISN (Primary)	Electro-Metrics	ANS-25/2	2604	07/13/15	07/13/17
CHAMBER	Panashield	3M	N/A	04/25/16	12/31/17
Antenna: Double-Ridged Horn/ETS Horn 2	ETS-Lindgren Chamber	3117	00041534	02/25/15	02/25/17
EMI Test Receiver R & S ESIB 40 Screen Room	Rohde & Schwarz	ESIB 40	100274	08/12/14	08/12/16
Software: Field Strength Program	Timco	N/A	Version 4.0	N/A	N/A
EMI Test Receiver R & S ESU 40 Chamber	Rohde & Schwarz	ESU 40	100320	04/01/16	04/01/18
Coaxial Cable - BMBM-1000-00 Silver	Semflex	LISN Cable	BMBM-1000-00	01/05/16	01/04/17
Coaxial Cable - Chamber 3 cable set (Primary)	Micro-Coax	Chamber 3 cable set (Primary)	KMKM-0244-00; KMKM-0670-00; KFKF-0198-00	12/05/15	12/05/17
Bore-sight Antenna Positioning Tower	Sunol Sciences	TLT2	N/A	N/A	N/A

### \* EMI RECEIVER SOFTWARE VERSION

The receiver firmware used was version 4.43 Service Pack 3

END OF TEST REPORT