



849 NW STATE ROAD 45
NEWBERRY, FL 32669 USA
PH: 888.472.2424 OR 352.472.5500
FAX: 352.472.2030
EMAIL: INFO@TIMCOENGR.COM
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

**FCC PART 74
AND INDUSTRY CANADA RSS-123
LOW POWER LICENSED TRANSMITTER
TEST REPORT**

APPLICANT	AUDIO TECHNICA CORPORATION 2206 NARUSE, MACHIDA TOKYO 194 JAPAN
FCC ID	JFZM3TM
IC CERT	1752B-ATWM3M
MODEL NUMBER	M3T
PRODUCT DESCRIPTION	EAR MONITOR SYSTEM – STEREO TRANSMITTER
DATE SAMPLE RECEIVED	11/22/2007
DATE TESTED	11/26/2007
TESTED BY	NAM NGUYEN
APPROVED BY	NAM NGUYEN
TIMCO REPORT NO.	3685AUT7TestReport.doc
TOTAL PAGES	17
TEST RESULTS	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**



Certificate # 0955-01



Certificate # 0955-01

TABLE OF CONTENTS

GENERAL REMARKS..... 3

GENERAL INFORMATION 4

TEST PROCEDURES 6

RF POWER OUTPUT 7

MODULATION CHARACTERISTICS..... 8

VOICE MODULATED COMMUNICATION EQUIPMENT 9

OCCUPIED BANDWIDTH..... 11

FIELD STRENGTH OF SPURIOUS EMISSIONS..... 14

FREQUENCY STABILITY..... 16

EMC EQUIPMENT LIST 17

Applicant: AUDIO TECHNICA CORPORATION
 FCC ID: JFZM3TM
 IC #: 1752B-ATWM3M
 MODEL #: M3T
 REPORT: W:\A\AudioTechnica_JFZ\3685AUT7\3685AUT7TestReport.doc
 Page 2 of 17



Certificate # 0955-01

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

Summary

The device under test does:

- fulfill the general approval requirements as identified in this test report
- not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.



Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, Fl 32669

Authorized Signatory Name: *Mario de Aranzeta*

Mario de Aranzeta C.E.T.
Compliance Engineer/ Lab. Supervisor

Date: 10/12/2007

Applicant: AUDIO TECHNICA CORPORATION
 FCC ID: JFZM3TM
 IC #: 1752B-ATWM3M
 MODEL #: M3T
 REPORT: W:\A\AudioTechnica_JFZ\3685AUT7\3685AUT7TestReport.doc
 Page 3 of 17



Certificate # 0955-01

**GENERAL INFORMATION
RULES PART 2.1033**

DUT TECHNICAL DESCRIPTION

The test results relate only to the items tested.	
DUT Description	EAR MONITOR SYSTEM – STEREO TRANSMITTER
FCC ID	JFZM3TM
IC Certification	1752B-ATWM3M
Model Number	M3T
Modulation	FM
Type of Emission	110KOF3E Bn = 2M+2DK M = 15000 D = 40 kHz (Peak Deviation) K = 1 Bn = 2(15k) + 2(40k)(1) = 110k
Frequency Range	614-647 MHz
Test Frequencies	614.00 MHz, 630.50MHz, and 647.000 MHz
Output Power	0.050 WATTS ERP 0.010 WATTS ERP
DUT Power Source	<input checked="" type="checkbox"/> 110-120Vac/50- 60Hz
	<input type="checkbox"/> DC Power
	<input type="checkbox"/> Battery Operated Exclusively
Test Item	<input type="checkbox"/> Prototype
	<input checked="" type="checkbox"/> Pre-Production
	<input type="checkbox"/> Production
Type of Equipment	<input checked="" type="checkbox"/> Fixed
	<input type="checkbox"/> Mobile
	<input type="checkbox"/> Portable

Applicant: AUDIO TECHNICA CORPORATION
 FCC ID: JFZM3TM
 IC #: 1752B-ATWM3M
 MODEL #: M3T
 REPORT: W:\A\AudioTechnica_JFZ\3685AUT7\3685AUT7TestReport.doc
 Page 4 of 17



Certificate # 0955-01

GENERAL INFORMATION

Test Facility	Timco Engineering, Inc. 849 NW State Road 45, Newberry, FL 32669
Test Condition	The temperature was 26°C with a relative humidity of 50%.
Modifications	None
Test Exercise (e.g software description, test signal, etc.)	The DUT was placed in continuous transmit mode of operation.
Applicable Standards	TIA 603, FCC CFR 47 Parts 2 and 74, RSS-123 Issue 1, Rev. 2

Applicant: AUDIO TECHNICA CORPORATION
FCC ID: JFZM3TM
IC #: 1752B-ATWM3M
MODEL #: M3T
REPORT: W:\A\AudioTechnica_JFZ\3685AUT7\3685AUT7TestReport.doc
Page 5 of 17



Certificate # 0955-01

TEST PROCEDURES

Power Line Conducted Interference: The procedure used was TIA 603 using a 50uH LISN. Both lines were observed with the UUT transmitting. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

Bandwidth 20 dB: The measurements were made with the spectrum analyzer's resolution bandwidth (RBW) = 1 MHz and the video bandwidth (VBW) = 3 MHz and the span set as shown on plot.

Power Output: For a device with a fixed antenna, RF power is measured as ERP as the antenna is permanently attached. The substitution method was used as described in TIA-603-C.

Antenna Conducted Emissions: The RBW = 100 kHz, VBW = 300 kHz and the span set to 10.0 MHz and the spectrum was scanned from 30 MHz to the 10th Harmonic of the fundamental. Above 1 GHz the resolution bandwidth was 1 MHz and the VBW = 3 MHz and the span to 50 MHz.

Radiation Interference: The test procedure used was TIA 603 using an Agilent spectrum receiver with pre-selector. The bandwidth (RBW) of the spectrum TIA 603 receiver was 100 kHz up to 1 GHz and 1 MHz above 1 GHz with an appropriate sweep speed. The VBW above 1 GHz was 3 MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The ambient temperature of the UUT was 76°F with a humidity of 55%.

Applicant: AUDIO TECHNICA CORPORATION
FCC ID: JFZM3TM
IC #: 1752B-ATWM3M
MODEL #: M3T
REPORT: W:\A\AudioTechnica_JFZ\3685AUT7\3685AUT7TestReport.doc
Page 6 of 17




Certificate # 0955-01

RF POWER OUTPUT

Rule Part No.: Part 2.1046(a), Part 74, RSS-123 Issue 1, Rev. 2

Method of Measurement: For a device has a fixed antenna, RF power is measured as ERP as the antenna is permanently attached. The substitution method was used. With a nominal battery voltage, and the transmitter properly adjusted the RF output measures:

Test Setup Diagram:

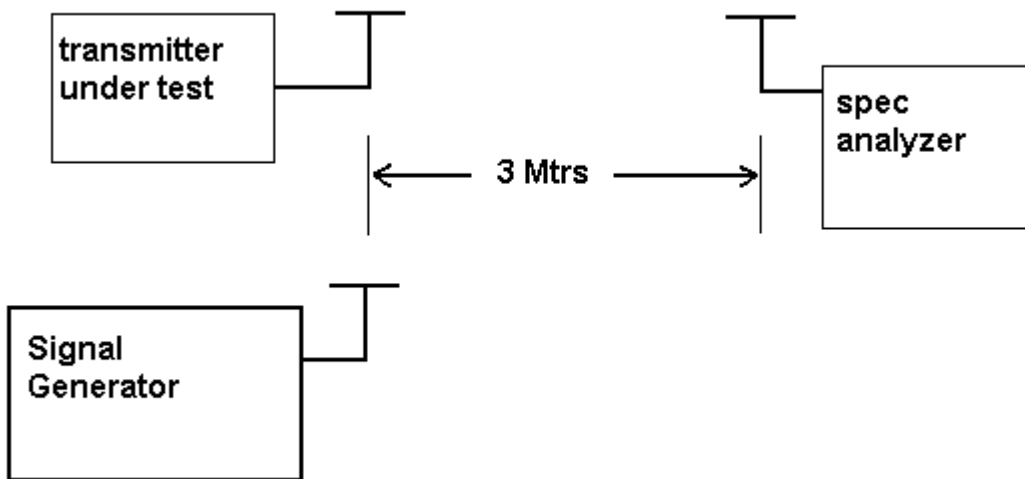

Test Data:

OUTPUT POWER: HIGH: 0.050 WATTS ERP
LOW: 0.010 WATTS ERP

Part 2.1033 (C)(8) DC Input into the final amplifier

INPUT POWER: $(12.0V)(0.24A) = 2.88$ Watts

Applicant: AUDIO TECHNICA CORPORATION
 FCC ID: JFZM3TM
 IC #: 1752B-ATWM3M
 MODEL #: M3T
 REPORT: W:\A\AudioTechnica_JFZ\3685AUT7\3685AUT7TestReport.doc
 Page 7 of 17



Certificate # 0955-01

MODULATION CHARACTERISTICS

Rule Part No.: Part 2.1047(a)(b), RSS-123 Issue 1, Rev. 2


Method of Measurement:

Audio frequency response

The audio frequency response was measured in accordance with TIA/EIA Specification 603 with no exception. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 – 5000Hz shall be submitted. The audio frequency response curve is shown below.

AUDIO FREQUENCY RESPONSE PLOT

Audio Frequency Response Plot

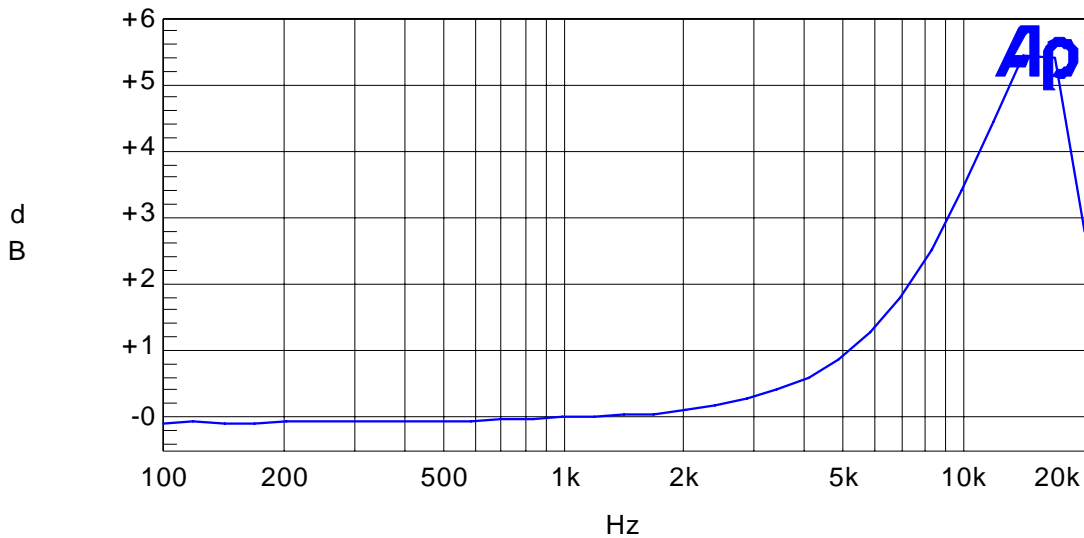

Color	Line Style	Thick	Data	Axis
Blue	Solid	1	Anlr.Level A!Normalize	Left

MaxFreq.at1

Applicant: AUDIO TECHNICA CORPORATION
 FCC ID: JFZM3TM
 IC #: 1752B-ATWM3M
 MODEL #: M3T
 REPORT: W:\A\AudioTechnica_JFZ\3685AUT7\3685AUT7TestReport.doc
 Page 8 of 17



Certificate # 0955-01

VOICE MODULATED COMMUNICATION EQUIPMENT

Part 2.1047(a) Voice modulated communication equipment: For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all the circuitry installed between the modulation limiter and the modulated stage shall be submitted.

Audio low pass filter is not required in this unit.

Applicant: AUDIO TECHNICA CORPORATION
FCC ID: JFZM3TM
IC #: 1752B-ATWM3M
MODEL #: M3T
REPORT: W:\A\AudioTechnica_JFZ\3685AUT7\3685AUT7TestReport.doc
Page 9 of 17



Certificate # 0955-01

AUDIO INPUT VERSUS MODULATION


Rule Part No.: Part 2.1047(b) & 74, RSS-123 Issue 1, Rev. 2

Test Requirements:

Method of Measurement: Modulation cannot exceed 100%, The audio input level needed for a particular percentage of modulation was measured in accordance with TIA/EIA Specification 603. The audio input curves versus modulation are shown below. Curves are provided for audio input frequencies of 300, 1000, and 3000 Hz.

Test data:

Modulation Limiting: 15.0 KHz (Green), 2.5 KHz (Blue), and 1.0 KHz

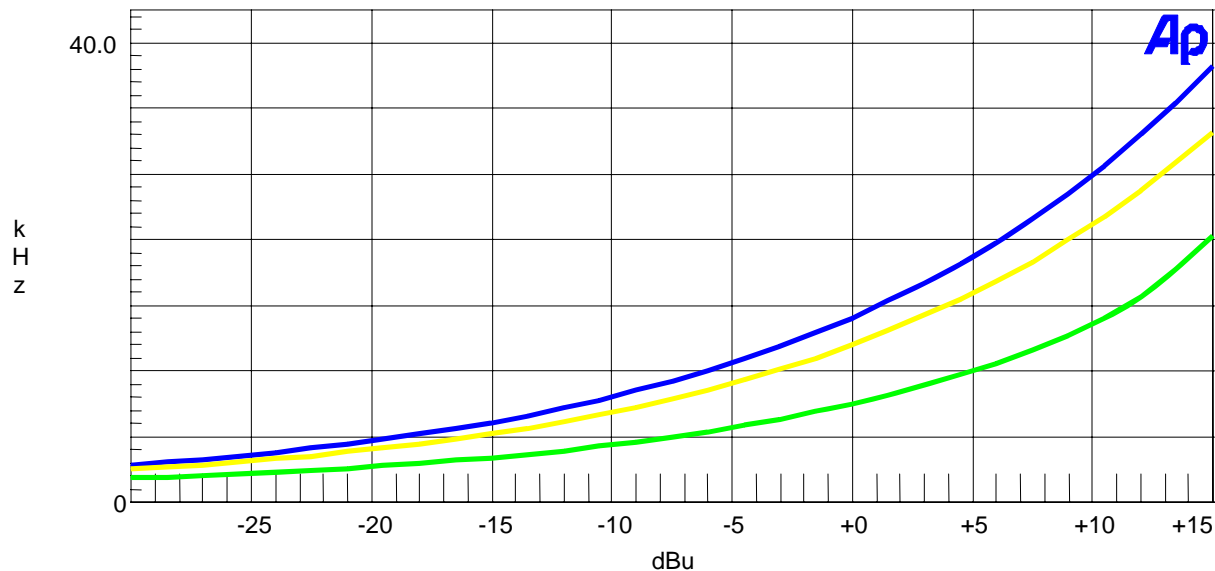


Color	Line Style	Thick	Data	Axis
Green	Solid	3	Anlr.Level A	Left
Blue	Solid	3	Anlr.Level A	Left
Yellow	Solid	3	Anlr.Level A	Left

modulation limiting.at1

Applicant: AUDIO TECHNICA CORPORATION
 FCC ID: JFZM3TM
 IC #: 1752B-ATWM3M
 MODEL #: M3T
 REPORT: W:\A\AudioTechnica_JFZ\3685AUT7\3685AUT7TestReport.doc

OCCUPIED BANDWIDTH

Data in the plots show that all sidebands between 50 & 100% for the authorized bandwidth are attenuated by at least 25dB. From 100 to 250% of the authorized bandwidth they are attenuated by at least 35dB and beyond 250% 43 log(Po) dB. The plot shows the transmitter modulated with 15000 Hz (the highest modulation frequency), adjusted for 50% modulation plus 16 dB. The spectrum analyzer was set with the unmodulated carrier at the top of the screen. The test procedure diagram and occupied bandwidth plot follows.

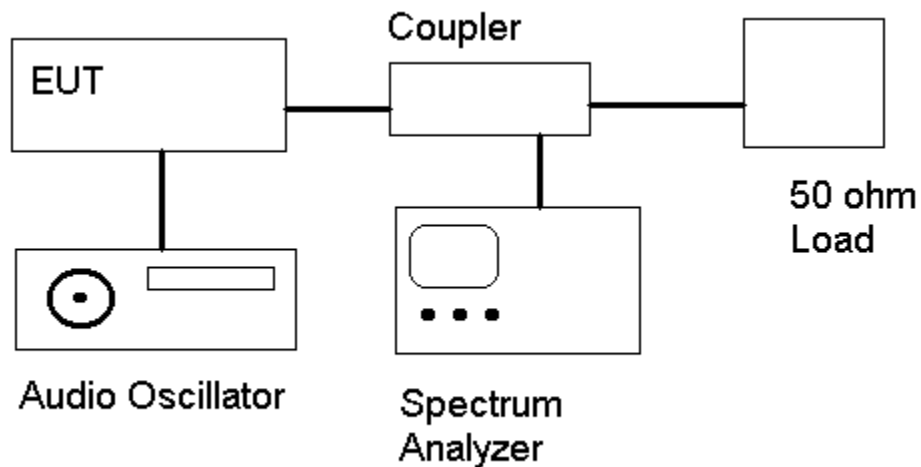

OCCUPIED BANDWIDTH MEASUREMENT




Certificate # 0955-01

OCCUPIED BANDWIDTH PLOT

NOTES:

AUDIO TECHNICA CORPORATION - FCC ID: JFZM3T
OCCUPIED BANDWIDTH PLOT

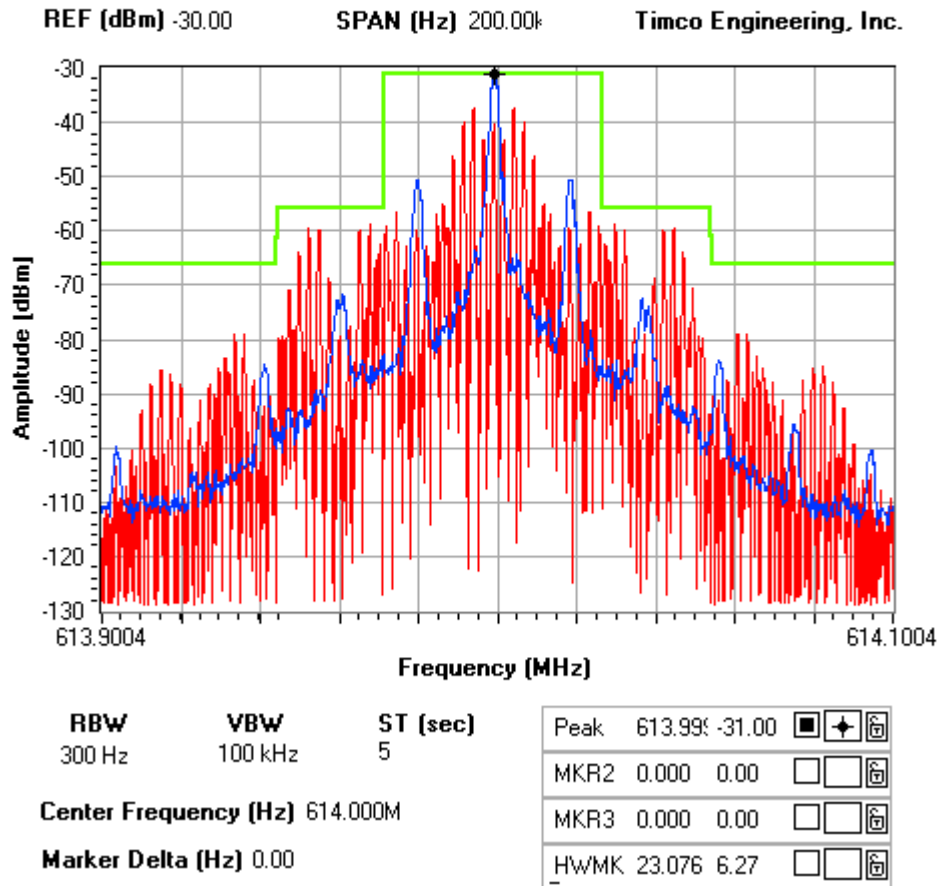

Applicant: AUDIO TECHNICA CORPORATION
 FCC ID: JFZM3TM
 IC #: 1752B-ATWM3M
 MODEL #: M3T
 REPORT: W:\A\AudioTechnica_JFZ\3685AUT7\3685AUT7TestReport.doc
 Page 12 of 17



Certificate # 0955-01

SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)

REQUIREMENTS: Emissions must be 43 +10log(Po) dB below the mean power output of the transmitter.

TEST DATA:

$$43 + 10 \log (0.010) = 23.00\text{dB}$$

	dBc			dBc			dBc
614.00	0		630.50	0		647.00	0
1228.00	61.3		1261.00	62.2		1294.00	66.4
1842.00	76.8		1891.50	75.7		1941.00	76.6
2456.00	76.9		2522.00	73.7		2588.00	75.7
3070.00	75.5		3152.50	76.5		3235.00	78.7
3684.00	> 60.0		3783.00	> 60.0		3882.00	78.2
4298.00	> 60.0		4413.50	> 60.0		4529.00	> 60.0
4912.00	> 60.0		5044.00	> 60.0		5176.00	> 60.0
5526.00	> 60.0		5674.50	> 60.0		5823.00	> 60.0
6140.00	> 60.0		6305.00	> 60.0		6470.00	> 60.0

$$43 + 10 \log (0.050) = 29.99\text{dB}$$

	dBc
614.00	
1228.00	66.7
1842.00	86
2456.00	85.9
3070.00	99.1
3684.00	101.2
4298.00	100.5
4912.00	93.4
5526.00	> 60.0
6140.00	> 60.0

	dBc
630.50	
1261.00	69
1891.50	89
2522.00	88.7
3152.50	98.9
3783.00	95.4
4413.50	96.4
5044.00	98.3
5674.50	> 60.0
6305.00	> 60.0

	dBc
647.00	
1294.00	67.2
1941.00	89.2
2588.00	84.5
3235.00	92.4
3882.00	100.3
4529.00	94.7
5176.00	> 60.0
5823.00	> 60.0
6470.00	> 60.0

Applicant: AUDIO TECHNICA CORPORATION
 FCC ID: JFZM3TM
 IC #: 1752B-ATWM3M
 MODEL #: M3T
 REPORT: W:\A\AudioTechnica_JFZ\3685AUT7\3685AUT7TestReport.doc



Certificate # 0955-01

FIELD STRENGTH OF SPURIOUS EMISSIONS

Rule Parts. No.: Part 2.1053, RSS-123 Issue 1, Rev. 2


Requirements: Emissions must be 43 + 10log(Po) dB below the mean power output of the transmitter.

Low power: $43 + 10 \log(0.010) = 23.00\text{dB}$

High power: $43 + 10 \log(0.050) = 29.99\text{dB}$

METHOD OF MEASUREMENTS: The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per ANSI/TIA 603-C:2004 using the substitution method. Measurements were made at the test site of Timco Engineering, Inc. located at 849 NW State Road 45, Newberry, FL 32669.

Test Setup Diagram:

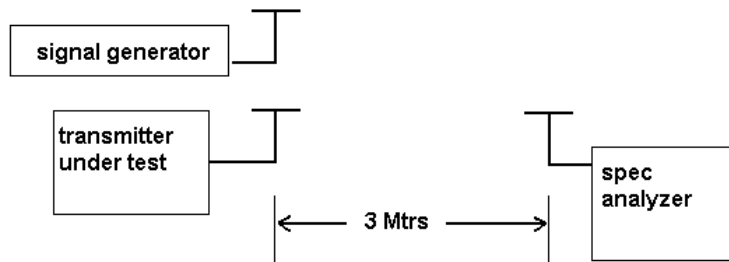

Test Data:

Low power:

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
614.00	0	0
1228.00	H	71.52
1842.00	H	69.66
2456.00	H	69.82
3070.00	V	68.19
3684.00	V	64.45
4298.00	V	65.09
4912.00	V/H	> 60.0
5526.00	V/H	> 60.0
6140.00	V/H	> 60.0

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
630.50	0	0
1261.00	V	71.51
1891.50	H	70.55
2522.00	H	70.28
3152.50	H	67.55
3783.00	V	66.08
4413.50	V	63.71
5044.00	V/H	> 60.0
5674.50	V/H	> 60.0
6305.00	V/H	> 60.0

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
647.00	0	0
1294.00	H	74.19
1941.00	V	69.13
2588.00	H	67.73
3235.00	H	66.22
3882.00	H	64.21
4529.00	H	64.00
5176.00	V/H	> 60.0
5823.00	V/H	> 60.0
6470.00	V/H	> 60.0

Applicant: AUDIO TECHNICA CORPORATION
 FCC ID: JFZM3TM
 IC #: 1752B-ATWM3M
 MODEL #: M3T
 REPORT: W:\A\AudioTechnica_JFZ\3685AUT7\3685AUT7TestReport.doc



Certificate # 0955-01

High power:

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
614.00		0
1228.00	V	72.80
1842.00	V	69.44
2456.00	V	67.00
3070.00	V	66.47
3684.00	H	66.33
4298.00	V	63.57
4912.00	H	64.69
5526.00	V	62.18
6140.00	V	59.47

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
630.50	0	0
1261.00	V	73.69
1891.50	V	70.33
2522.00	V	66.46
3152.50	V	66.63
3783.00	V	64.96
4413.50	V	63.39
5044.00	V	64.41
5674.50	V	63.76
6305.00	V	60.57

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
647.00		0
1294.00	V	70.87
1941.00	V	69.81
2588.00	V	65.41
3235.00	V	64.40
3882.00	V	65.69
4529.00	V	64.78
5176.00	V	64.06
5823.00	V	63.43
6470.00	V	60.37

Applicant: AUDIO TECHNICA CORPORATION
 FCC ID: JFZM3TM
 IC #: 1752B-ATWM3M
 MODEL #: M3T
 REPORT: W:\A\AudioTechnica_JFZ\3685AUT7\3685AUT7TestReport.doc



Certificate # 0955-01

FREQUENCY STABILITY

Rule Parts. No.: Part 2.1055, Part 74.861, RSS-123 Issue 1, Rev. 2

Requirements: Temperature and voltage tests were performed to verify that the frequency remains within the .0050%,(50 ppm)

Method of Measurements: TIA/EIA 603.

The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 °C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15-second intervals. The worse case number used in the table below. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 °C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15-second intervals. The worst-case number was again used in the table below. This procedure was repeated in 10-degree increments up to + 50 degrees C.

Test Data:

Assigned Frequency (Ref. Frequency) (MHz)		630.500104
Temperature (°C)	Frequency (MHz)	Frequency Stability (PPM)
-30	630.496921	-5.05
-20	630.499309	-1.26
-10	630.501205	1.75
0	630.501437	2.11
+10	630.501417	2.08
+20	630.500104	0.00
+30	630.498943	-1.84
+40	630.498558	-2.45
+50	630.499404	-1.11

Assigned Frequency (Ref. Frequency) (MHz)		
% Battery	Frequency (MHz)	Frequency Stability (PPM)
-15%	630.500082	-0.03
0		
+15%	630.500141	0.06

Applicant: AUDIO TECHNICA CORPORATION
 FCC ID: JFZM3TM
 IC #: 1752B-ATWM3M
 MODEL #: M3T
 REPORT: W:\A\AudioTechnica_JFZ\3685AUT7\3685AUT7TestReport.doc
 Page 16 of 17



Certificate # 0955-01

EMC EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3/10-Meter OATS	TEI	N/A	N/A	Listed 3/20/07	3/19/10
3-Meter OATS	TEI	N/A	N/A	Listed 1/11/06	1/10/09
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	Listed 5/11/07	5/10/10
AC Voltmeter	HP	400FL	2213A14499	CAL 12/29/06	12/29/08
Coaxial Cable #64	Semflex Inc.	60637	Timco #64	CHAR 3/30/07	3/30/09
Antenna: Dipole Kit	Electro-Metrics	TDA-30/1-4	153	CHAR 4/5/06	4/5/09
Antenna: Log-Periodic	Electro-Metrics	LPA-25	1122	CAL 12/1/06	12/1/08
Modulation Analyzer	HP	8901A	3435A06868	CAL 5/9/07	5/9/09
Digital Multimeter	Fluke	FLUKE-77-3	79510405	CAL 5/14/07	5/14/09
Analyzer Open-Frame Tower Preamplifier	HP	8449B	3008A01075	CAL 6/20/07	6/20/09
Analyzer Silver Tower Quasi-Peak Adapter	HP	85650A	3303A01844	CAL 10/30/06	10/30/08
Analyzer Silver Tower RF Preselector	HP	85685A	2620A00294	CAL 3/6/07	3/6/09
Analyzer Silver Tower Spectrum Analyzer	HP	8566B Opt 462	3552A22064 3638A08608	CAL 10/30/06	10/30/08
System One	Audio Precision	System One	SYS1-45868	CHAR 3/27/06	3/27/08
Analyzer Tan Tower Preamplifier	HP	8449B-H02	3008A00372	CAL 12/8/05	12/8/07
Analyzer Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 12/8/05	12/8/07
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	CAL 12/7/05	12/7/07
Analyzer Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 12/7/05	12/7/07
Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 3/23/06	3/23/08

Applicant: AUDIO TECHNICA CORPORATION

FCC ID: JFZM3TM

IC #: 1752B-ATWM3M

MODEL #: M3T

REPORT: W:\A\AudioTechnica_JFZ\3685AUT7\3685AUT7TestReport.doc