

FCC Test Report

Product Name	Wireless Headphones
Model No.	ATH-S200BT
FCC ID.	JFZS200BT

Applicant	Audio-Technica Corporation
Address	2-46-1 Nishi-naruse, Machida, Tokyo,194-8666

Date of Receipt	Sep. 29, 2017
Issued Date	Oct. 31, 2017
Report No.	1790408R-RFUSP01V00
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

Test Report


Issued Date: Oct. 31, 2017

Report No.: 1790408R-RFUSP01V00



Product Name	Wireless Headphones
Applicant	Audio-Technica Corporation
Address	2-46-1 Nishi-naruse, Machida, Tokyo, 194-8666
Manufacturer	Audio-Technica Corporation
Factory	Cresyn Hanoi Co., Ltd
Model No.	ATH-S200BT
FCC ID.	JFZS200BT
EUT Rated Voltage	DC 3.7V
EUT Test Voltage	DC 3.7V
Trade Name	Audio-Technica Corporation
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2016 ANSI C63.4: 2014, ANSI C63.10: 2013
Test Result	Complied

Documented By :



(Senior Adm. Specialist / Jinn Chen)

Tested By :



(Engineer / Kevin Liu)

Approved By :



(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description.....	5
1.2. Operational Description.....	7
1.3. Tested System Details.....	8
1.4. Configuration of Tested System	8
1.5. EUT Exercise Software	8
1.6. Test Facility	9
1.7. List of Test Equipment.....	10
2. CONDUCTED EMISSION	11
2.1. Test Setup	11
2.2. Limits.....	11
2.3. Test Procedure	12
2.4. Uncertainty	12
2.5. Test Result of Conducted Emission.....	13
3. PEAK POWER OUTPUT	15
3.1. Test Setup	15
3.2. Limit	15
3.3. Test Procedure	15
3.4. Uncertainty	15
3.5. Test Result of Peak Power Output.....	16
4. RADIATED EMISSION	18
4.1. Test Setup	18
4.2. Limits.....	19
4.3. Test Procedure	20
4.4. Uncertainty	20
4.5. Test Result of Radiated Emission.....	21
5. RF ANTENNA CONDUCTED TEST	29
5.1. Test Setup	29
5.2. Limits.....	29
5.3. Test Procedure	29
5.4. Uncertainty	29
5.5. Test Result of RF Antenna Conducted Test.....	30
6. BAND EDGE	32
6.1. Test Setup	32
6.2. Limit	33
6.3. Test Procedure	33
6.4. Uncertainty	33
6.5. Test Result of Band Edge	34
7. CHANNEL NUMBER.....	46
7.1. Test Setup	46
7.2. Limit	46
7.3. Test Procedure	46
7.4. Uncertainty	46
7.5. Test Result of Channel Number.....	47
8. CHANNEL SEPARATION.....	49
8.1. Test Setup	49
8.2. Limit	49
8.3. Test Procedure	49
8.4. Uncertainty	49
8.5. Test Result of Channel Separation.....	50
9. DWELL TIME.....	54
9.1. Test Setup	54
9.2. Limit	54
9.3. Test Procedure	54
9.4. Uncertainty	54
9.5. Test Result of Dwell Time.....	55
10. OCCUPIED BANDWIDTH	59
10.1. Test Setup	59

10.2.	Limits.....	59
10.3.	Test Procedure	59
10.4.	Uncertainty	59
10.5.	Test Result of Occupied Bandwidth	60
11.	EMI REDUCTION METHOD DURING COMPLIANCE TESTING	64
Attachment 1: EUT Test Photographs		
Attachment 2: EUT Detailed Photographs		

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	Wireless Headphones
Trade Name	Audio-Technica Corporation
Model No.	ATH-S200BT
FCC ID.	JFZS200BT
Frequency Range	2402 – 2480MHz
Channel Number	79
Type of Modulation	FHSS: GFSK(1Mbps) / π /4DQPSK(2Mbps) / 8DPSK(3Mbps)
Antenna Type	Chip Antenna
Channel Control	Auto
Antenna Gain	Refer to the table “Antenna List”

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	AMOTECH	ALA321C3	Chip Antenna	2.3 dBi for 2.4 GHz

Note: The antenna of EUT is conforming to FCC 15.203.

Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 20:	2422 MHz	Channel 40:	2442 MHz	Channel 60:	2462 MHz
Channel 01:	2403 MHz	Channel 21:	2423 MHz	Channel 41:	2443 MHz	Channel 61:	2463 MHz
Channel 02:	2404 MHz	Channel 22:	2424 MHz	Channel 42:	2444 MHz	Channel 62:	2464 MHz
Channel 03:	2405 MHz	Channel 23:	2425 MHz	Channel 43:	2445 MHz	Channel 63:	2465 MHz
Channel 04:	2406 MHz	Channel 24:	2426 MHz	Channel 44:	2446 MHz	Channel 64:	2466 MHz
Channel 05:	2407 MHz	Channel 25:	2427 MHz	Channel 45:	2447 MHz	Channel 65:	2467 MHz
Channel 06:	2408 MHz	Channel 26:	2428 MHz	Channel 46:	2448 MHz	Channel 66:	2468 MHz
Channel 07:	2409 MHz	Channel 27:	2429 MHz	Channel 47:	2449 MHz	Channel 67:	2469 MHz
Channel 08:	2410 MHz	Channel 28:	2430 MHz	Channel 48:	2450 MHz	Channel 68:	2470 MHz
Channel 09:	2411 MHz	Channel 29:	2431 MHz	Channel 49:	2451 MHz	Channel 69:	2471 MHz
Channel 10:	2412 MHz	Channel 30:	2432 MHz	Channel 50:	2452 MHz	Channel 70:	2472 MHz
Channel 11:	2413 MHz	Channel 31:	2433 MHz	Channel 51:	2453 MHz	Channel 71:	2473 MHz
Channel 12:	2414 MHz	Channel 32:	2434 MHz	Channel 52:	2454 MHz	Channel 72:	2474 MHz
Channel 13:	2415 MHz	Channel 33:	2435 MHz	Channel 53:	2455 MHz	Channel 73:	2475 MHz
Channel 14:	2416 MHz	Channel 34:	2436 MHz	Channel 54:	2456 MHz	Channel 74:	2476 MHz
Channel 15:	2417 MHz	Channel 35:	2437 MHz	Channel 55:	2457 MHz	Channel 75:	2477 MHz
Channel 16:	2418 MHz	Channel 36:	2438 MHz	Channel 56:	2458 MHz	Channel 76:	2478 MHz
Channel 17:	2419 MHz	Channel 37:	2439 MHz	Channel 57:	2459 MHz	Channel 77:	2479 MHz
Channel 18:	2420 MHz	Channel 38:	2440 MHz	Channel 58:	2460 MHz	Channel 78:	2480 MHz
Channel 19:	2421 MHz	Channel 39:	2441 MHz	Channel 59:	2461 MHz		

Note:

1. The EUT is a Wireless Headphones with a Bluetooth transceiver.
2. These tests were conducted on a sample for the purpose of demonstrating compliance of Bluetooth transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
3. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
4. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.
5. Bluetooth operation was evaluated at both 1Mb/s and 3Mb/s data rates. 2Mb/s data rate was found, through pre-testing, to produce emissions similar to those for 3Mb/s.

Test Mode	Mode 1: Transmit - 1Mbps Mode 2: Transmit - 3Mbps
-----------	--


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 Test Fixture	N/A	N/A	N/A	N/A
2 Notebook PC	DELL	P62G	229FJC2	N/A

Signal Cable Type	Signal cable Description
A Micro USB Cable	Non-shielded, 0.2m
B Micro USB Cable	Shielded, 1.8m, with one ferrite core bonded.
C RS-232 to USB Cable	Shielded, 1.5m

1.4. Configuration of Tested System

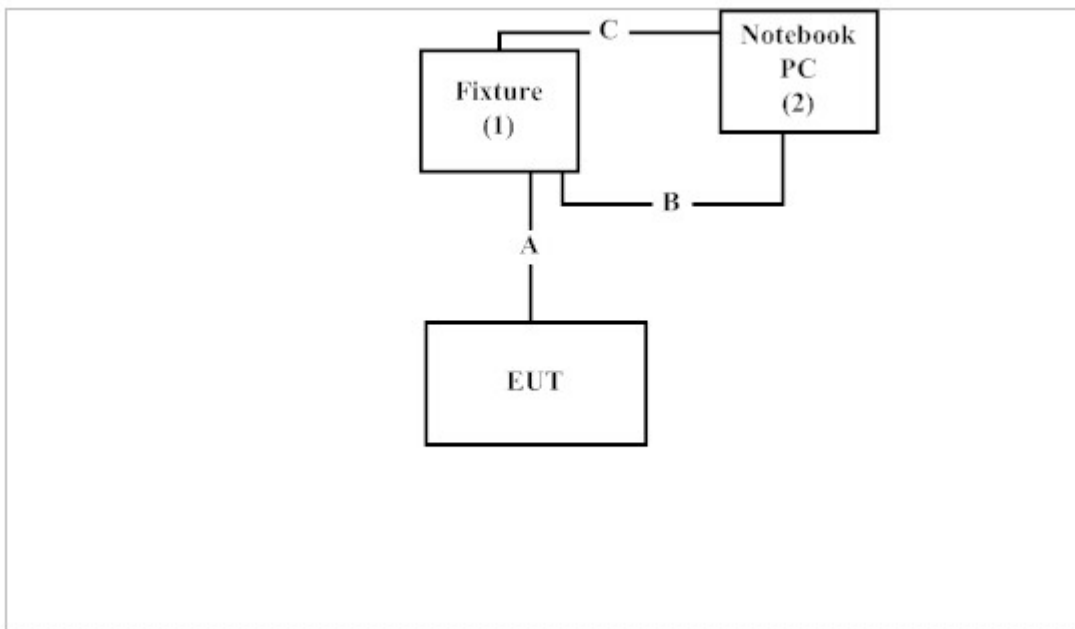

1.5. EUT Exercise Software

1. Setup the EUT as shown in Section 1.4.
2. Execute software “CSR BlueSuite 2.6.2” on the EUT.
3. Configure the test mode, the test channel, and the data rate.
4. Press “OK” to start the continuous Transmit.
5. Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from DEKRA Testing and Certification Co., Ltd. Web Site:

<http://www.dekra.com.tw/english/about/certificates.aspx?bval=5>

The address and introduction of DEKRA Testing and Certification Co., Ltd. laboratories can be founded in our Web site: http://www.dekra.com.tw/index_en

Site Description: Accredited by TAF
Accredited Number: 3023

Site Name: DEKRA Testing and Certification Co., Ltd.
Site Address: No.159, Sec. 2, Wenhua 1st Rd., Linkou Dist.,
New Taipei City 24457, Taiwan.
TEL: 886-2-2602-7968 / FAX : 866-2-2602-3286
E-Mail : info.tw@dekra.com

FCC Accreditation Number: TW3023

1.7. List of Test Equipment

For Conduction measurements /ASR1

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	EMI Test Receiver	R&S	ESR7	161601	2017.01.06	2018.01.05
X	Two-Line V-Network	R&S	ENV216	101306	2017.02.16	2018.02.15
X	Two-Line V-Network	R&S	ENV216	101307	2017.03.17	2018.03.16
X	Coaxial Cable	Quietek	RG400_BNC	RF001	2017.05.24	2018.05.23

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : QuieTek EMI 2.0 V2.1.113

For Conducted measurements /ASR4

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Spectrum Analyzer	R&S	FSV30	103464	2017.01.09	2018.01.08
X	Power Meter	Anritsu	ML2496A	1548003	2016.12.15	2017.12.14
X	Power Sensor	Anritsu	MA2411B	1531024	2016.12.15	2017.12.14
X	Power Sensor	Anritsu	MA2411B	1531025	2016.12.15	2017.12.14
	Bluetooth Tester	R&S	CBT	101238	2017.01.03	2018.01.02

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : QuieTek Conduction Test System V8.0.110

For Radiated measurements /ACB1


	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Loop Antenna	TESEQ	HLA6121	37133	2016.03.18	2018.03.17
X	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-674	2017.02.13	2018.02.12
X	Horn Antenna	ETS-Lindgren	3117	00203761	2017.10.25	2018.10.24
X	Horn Antenna	Com-Power	AH-840	101087	2017.05.24	2018.05.23
X	Pre-Amplifier	EMCI	EMC001330	980316	2017.05.16	2018.05.15
X	Pre-Amplifier	EMCI	EMC051835SE	980311	2017.05.17	2018.05.16
X	Pre-Amplifier	EMCI	EMC05820SE	980310	2017.05.17	2018.05.16
X	Pre-Amplifier	EMCI	EMC184045SE	980314	2017.05.17	2018.05.16
X	Filter	MICRO TRONICS	BRM50702	G249	2017.08.11	2018.08.10
	Filter	MICRO TRONICS	BRM50716	G187	2017.08.16	2018.08.15
X	EMI Test Receiver	R&S	ESR7	101602	2016.12.15	2017.12.14
X	Spectrum Analyzer	R&S	FSV40	101148	2017.01.24	2018.01.23
X	Coaxial Cable	SUHNER	SUCOFLEX 106	RF002	2017.05.25	2018.05.24
X	Mircoflex Cable	HUBER SUHNER	SUCOFLEX 102	MY3381/2	2017.08.11	2018.08.10

Note:

1. Loop Antenna is calibrated every two year, the other equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : QuieTek EMI 2.0 V2.1.113

2. Conducted Emission

2.1. Test Setup

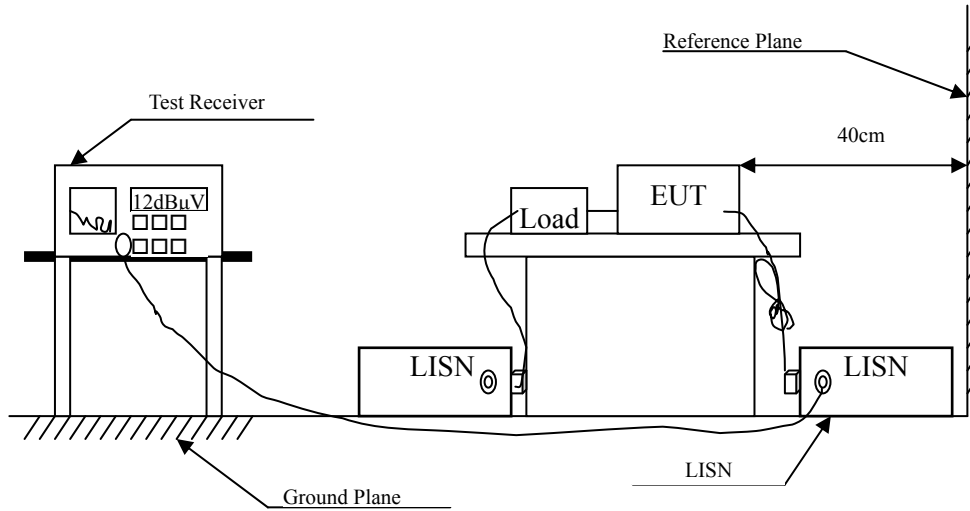

2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dB μ V) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.3. Test Procedure

The EUT and Peripherals are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

2.4. Uncertainty

±2.35dB

2.5. Test Result of Conducted Emission

Product : Wireless Headphones
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 2: Transmit - 3Mbps (2441MHz)
 Test Date : 2017/10/19

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V	Margin dB	Limit dB μ V
LINE 1					
Quasi-Peak					
0.152	9.616	35.723	45.340	-20.603	65.943
0.191	9.680	28.791	38.471	-26.358	64.829
0.508	9.700	23.080	32.780	-23.220	56.000
3.631	9.796	18.460	28.256	-27.744	56.000
10.408	9.942	18.611	28.553	-31.447	60.000
24.576	10.100	12.891	22.991	-37.009	60.000
Average					
0.152	9.616	22.188	31.804	-24.139	55.943
0.191	9.680	17.109	26.789	-28.040	54.829
0.508	9.700	17.160	26.859	-19.141	46.000
3.631	9.796	10.723	20.519	-25.481	46.000
10.408	9.942	14.023	23.965	-26.035	50.000
24.576	10.100	14.613	24.713	-25.287	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "■" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Wireless Headphones
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 2: Transmit - 3Mbps (2441MHz)
 Test Date : 2017/10/19


Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V	Margin dB	Limit dB μ V
LINE 2					
Quasi-Peak					
0.150	9.601	33.219	42.821	-23.179	66.000
0.181	9.677	29.569	39.246	-25.868	65.114
0.481	9.690	12.490	22.180	-34.363	56.543
3.775	9.804	15.096	24.899	-31.101	56.000
10.043	9.931	9.075	19.006	-40.994	60.000
24.576	10.140	12.982	23.122	-36.878	60.000
Average					
0.150	9.601	18.550	28.151	-27.849	56.000
0.181	9.677	15.593	25.269	-29.845	55.114
0.481	9.690	7.487	17.177	-29.366	46.543
3.775	9.804	5.095	14.899	-31.101	46.000
10.043	9.931	4.898	14.829	-35.171	50.000
24.576	10.140	10.219	20.359	-29.641	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "█" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

3. Peak Power Output

3.1. Test Setup

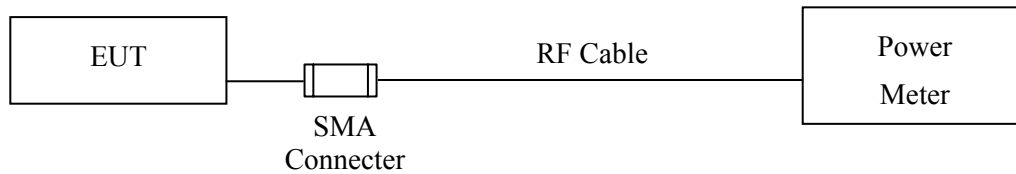

3.2. Limit

The maximum peak power shall be less 1Watt.

3.3. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

3.4. Uncertainty

± 0.86 dB

3.5. Test Result of Peak Power Output

Product : Wireless Headphones
Test Item : Peak Power Output
Test Mode : Mode 1: Transmit - 1Mbps
Test Date : 2017/10/25

Channel No.	Frequency (MHz)	Measurement		Required Limit	Result
		Avg (dBm)	Peak (dBm)		
Channel 00	2402.00	1.23	2.89	1 Watt= 30 dBm	Pass
Channel 39	2441.00	3.17	4.38	1 Watt= 30 dBm	Pass
Channel 78	2480.00	3.67	4.52	1 Watt= 30 dBm	Pass


Product : Wireless Headphones
Test Item : Peak Power Output
Test Mode : Mode 2: Transmit - 3Mbps
Test Date : 2017/10/25

Channel No.	Frequency (MHz)	Measurement		Required Limit	Result
		Avg (dBm)	Peak (dBm)		
Channel 00	2402.00	-0.63	2.63	1 Watt= 30 dBm	Pass
Channel 39	2441.00	1.26	4.34	1 Watt= 30 dBm	Pass
Channel 78	2480.00	1.85	4.86	1 Watt= 30 dBm	Pass


4. Radiated Emission

4.1. Test Setup


Radiated Emission Under 30MHz

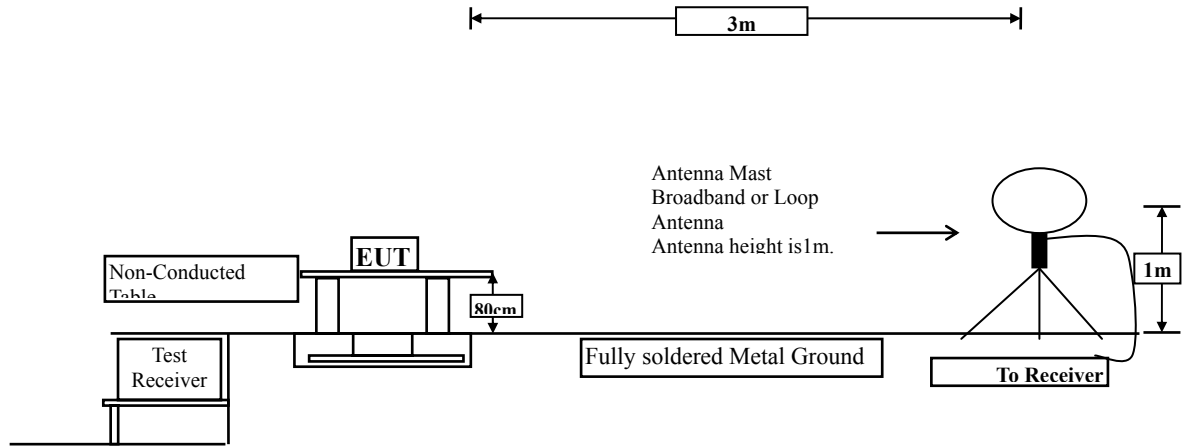

Radiated Emission Below 1GHz

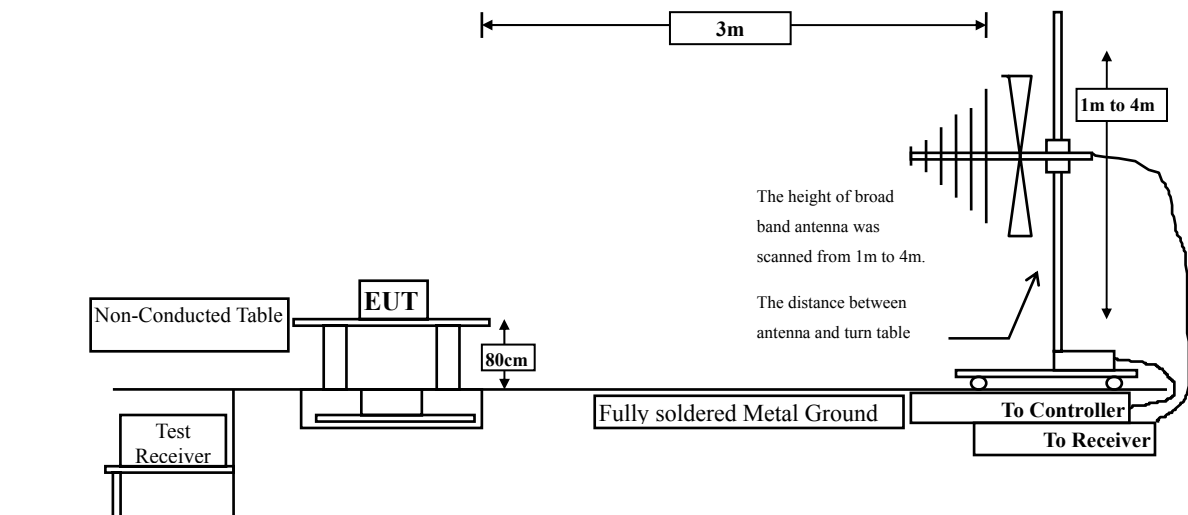

Radiated Emission Above 1GHz

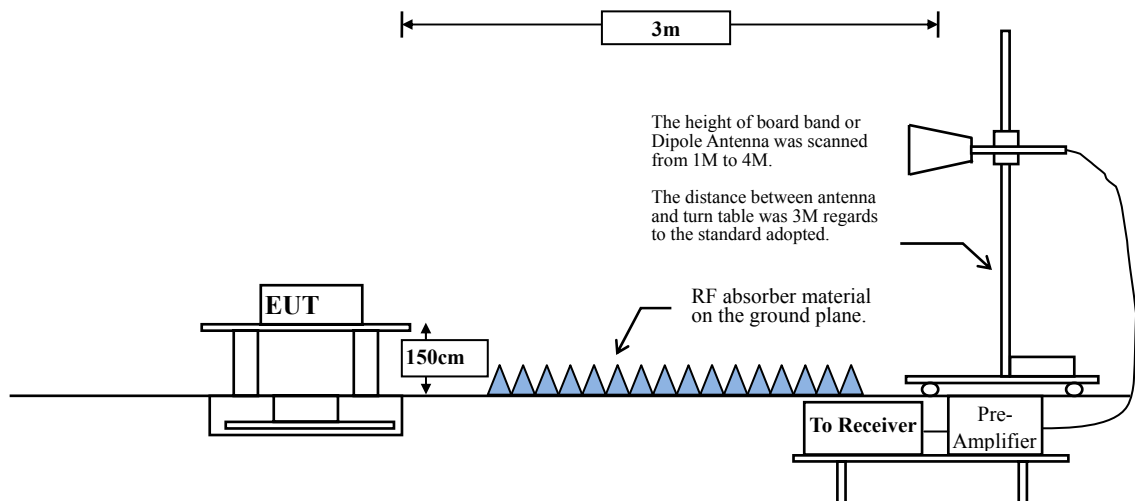

4.2. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

- Remarks:
1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

4.4. Uncertainty

Horizontal polarization :

30-300MHz: ± 4.08 dB ; 300M-1GHz: ± 3.86 dB ; 1-18GHz: ± 3.77 dB ; 18-40GHz: ± 3.98 dB

Vertical polarization :

30-300MHz: ± 4.81 dB ; 300M-1GHz: ± 3.87 dB ; 1-18GHz : ± 3.83 dB ; 18-40GHz: ± 3.98 dB

4.5. Test Result of Radiated Emission

Product : Wireless Headphones
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps(2402MHz)
 Test Date : 2017/10/17

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
4804.000	-2.875	57.690	54.816	-19.184	74.000
7206.000	0.384	55.090	55.474	-18.526	74.000
9608.000	2.338	42.840	45.178	-28.822	74.000
Average					
Detector:					
4804.000	-2.875	47.800	44.926	-9.074	54.000
7206.000	0.384	44.080	44.464	-9.536	54.000
Vertical					
Peak Detector:					
4804.000	-2.875	52.660	49.786	-24.214	74.000
7206.000	0.384	53.580	53.964	-20.036	74.000
9608.000	2.338	42.740	45.078	-28.922	74.000
Average					
Detector:					
--					54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Headphones
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps(2441MHz)
 Test Date : 2017/10/17

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
4882.000	-2.812	57.500	54.688	-19.312	74.000
7323.000	0.464	54.340	54.804	-19.196	74.000
9764.000	2.615	43.690	46.304	-27.696	74.000
Average Detector:					
4882.000	-2.812	49.600	46.788	-7.212	54.000
7323.000	0.464	45.400	45.864	-8.136	54.000
Vertical					
Peak Detector:					
4882.000	-2.812	53.420	50.608	-23.392	74.000
7323.000	0.464	54.810	55.274	-18.726	74.000
9764.000	2.615	43.830	46.444	-27.556	74.000
Average Detector:					
7323.000	0.464	45.780	46.244	-7.756	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Headphones
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps(2480MHz)
 Test Date : 2017/10/17

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
4960.000	-2.791	59.470	56.679	-17.321	74.000
7440.000	0.499	50.150	50.649	-23.351	74.000
9920.000	2.917	42.940	45.857	-28.143	74.000
Average Detector:					
4960.000	-2.791	51.520	48.729	-5.271	54.000
Vertical					
Peak Detector:					
4960.000	-2.791	54.040	51.249	-22.751	74.000
7440.000	0.499	52.040	52.539	-21.461	74.000
9920.000	2.917	42.590	45.507	-28.493	74.000
Average Detector:					
--					54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Headphones
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - 3Mbps(2402MHz)
 Test Date : 2017/10/17

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
4804.000	-2.875	57.790	54.916	-19.084	74.000
7206.000	0.384	54.870	55.254	-18.746	74.000
9608.000	2.338	43.710	46.048	-27.952	74.000
Average Detector:					
4804.000	-2.875	46.770	43.896	-10.104	54.000
7206.000	0.384	45.080	45.464	-8.536	54.000
Vertical					
Peak Detector:					
4804.000	-2.875	54.460	51.586	-22.414	74.000
7206.000	0.384	54.170	54.554	-19.446	74.000
9608.000	2.338	43.760	46.098	-27.902	74.000
Average Detector:					
7206.000	0.384	43.550	43.934	-10.066	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Headphones
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - 3Mbps (2441MHz)
 Test Date : 2017/10/17

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
4882.000	-2.812	58.100	55.288	-18.712	74.000
7323.000	0.464	55.620	56.084	-17.916	74.000
9764.000	2.615	45.170	47.784	-26.216	74.000
Average Detector:					
4882.000	-2.812	49.810	46.998	-7.002	54.000
7323.000	0.464	47.340	47.804	-6.196	54.000
Vertical					
Peak Detector:					
4882.000	-2.812	55.740	52.928	-21.072	74.000
7323.000	0.464	55.510	55.974	-18.026	74.000
9764.000	2.615	43.740	46.354	-27.646	74.000
Average Detector:					
7323.000	0.464	47.730	48.194	-5.806	54.000

Note:

- All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
- Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
- Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
- Measurement Level = Reading Level + Correct Factor.
- Correct Factor = Antenna factor + Cable loss – Amplifier gain.
- The average measurement was not performed when the peak measured data under the limit of average detection.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Headphones
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - 3Mbps (2480MHz)
 Test Date : 2017/10/17

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
4960.000	-2.791	58.920	56.129	-17.871	74.000
7440.000	0.499	54.310	54.809	-19.191	74.000
9920.000	2.917	43.170	46.087	-27.913	74.000
Average Detector:					
4960.000	-2.791	47.210	44.419	-9.581	54.000
7440.000	0.499	42.210	42.709	-11.291	54.000
Vertical					
Peak Detector:					
4960.000	-2.791	55.340	52.549	-21.451	74.000
7440.000	0.499	55.060	55.559	-18.441	74.000
9920.000	2.917	43.120	46.037	-27.963	74.000
Average Detector:					
7440.000	0.499	44.060	44.559	-9.441	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Headphones
 Test Item : General Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps (2441MHz)
 Test Date : 2017/10/03

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
202.913	-13.362	49.802	36.440	-7.060	43.500
239.464	-11.891	51.467	39.575	-6.425	46.000
335.058	-9.093	41.399	32.306	-13.694	46.000
624.652	-2.858	31.203	28.345	-17.655	46.000
768.043	-0.718	32.264	31.546	-14.454	46.000
894.565	0.806	32.436	33.242	-12.758	46.000
Vertical					
179.014	-12.083	43.135	31.052	-12.448	43.500
239.464	-11.891	45.227	33.335	-12.665	46.000
455.957	-6.059	34.789	28.730	-17.270	46.000
696.348	-1.781	30.207	28.427	-17.573	46.000
768.043	-0.718	34.316	33.598	-12.402	46.000
888.942	0.738	35.182	35.920	-10.080	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless Headphones
 Test Item : General Radiated Emission
 Test Mode : Mode 2: Transmit - 3Mbps (2441MHz)
 Test Date : 2017/10/03


Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
202.913	-13.362	50.396	37.034	-6.466	43.500
239.464	-11.891	53.158	41.266	-4.734	46.000
335.058	-9.093	43.463	34.370	-11.630	46.000
479.855	-5.647	33.015	27.368	-18.632	46.000
730.087	-1.231	31.839	30.609	-15.391	46.000
886.130	0.704	32.404	33.108	-12.892	46.000
Vertical					
179.014	-12.083	44.365	32.282	-11.218	43.500
239.464	-11.891	44.414	32.522	-13.478	46.000
335.058	-9.093	37.184	28.091	-17.909	46.000
455.957	-6.059	34.575	28.516	-17.484	46.000
768.043	-0.718	33.868	33.150	-12.850	46.000
947.986	1.399	30.830	32.229	-13.771	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

5. RF Antenna Conducted Test

5.1. Test Setup

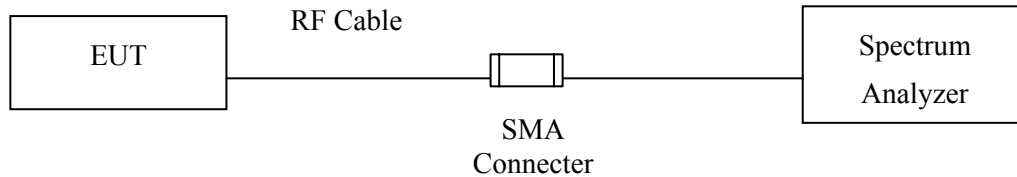

5.2. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

5.3. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

5.4. Uncertainty

$\pm 1.23\text{dB}$

5.5. Test Result of RF Antenna Conducted Test

Product : Wireless Headphones
 Test Item : RF Antenna Conducted Test
 Test Mode : Mode 1: Transmit - 1Mbps
 Test Date : 2017/10/19

Figure Channel 00:

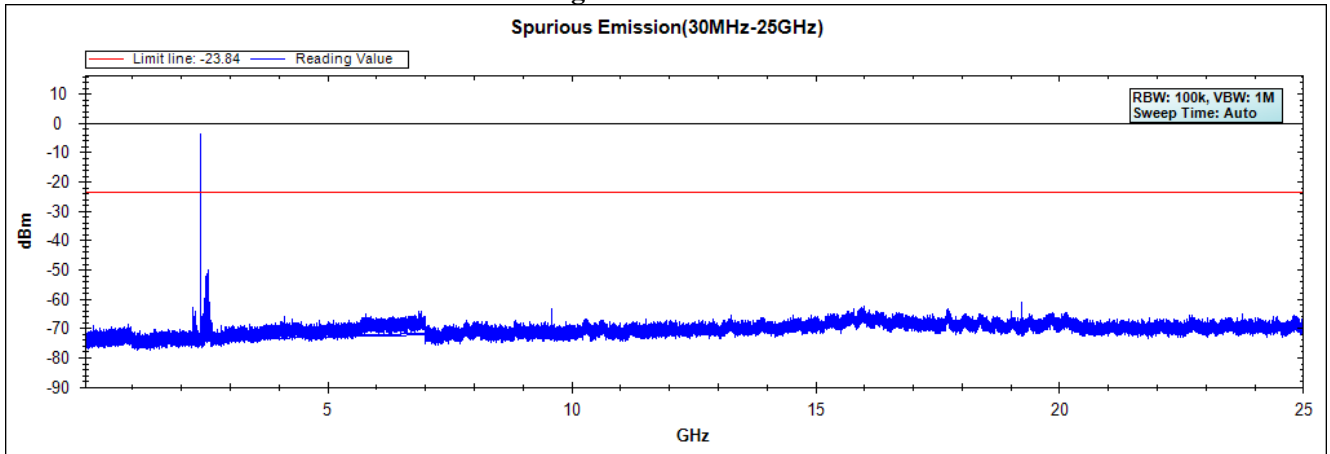


Figure Channel 39:


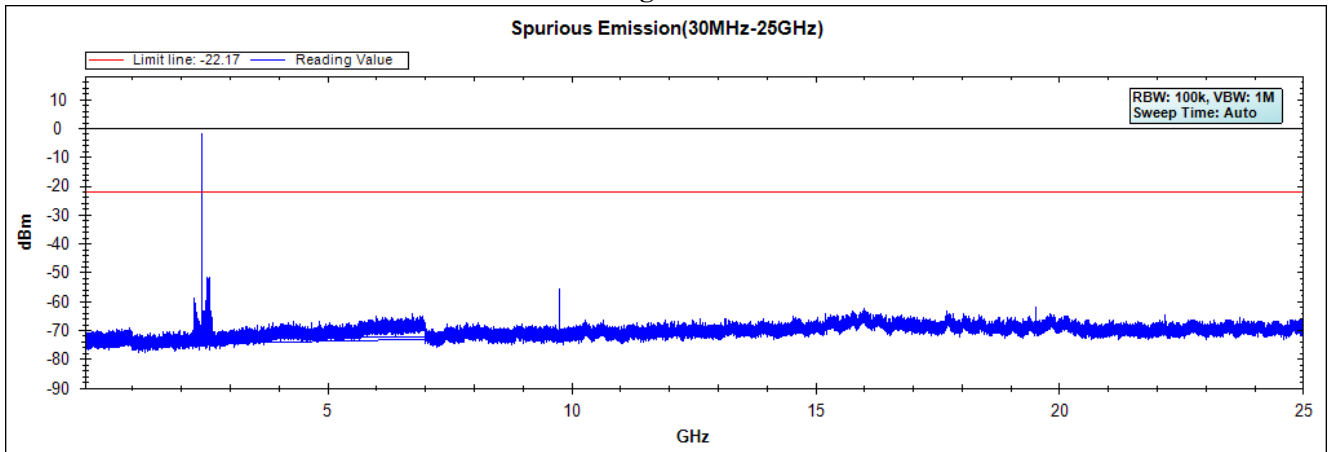


Figure Channel 78:

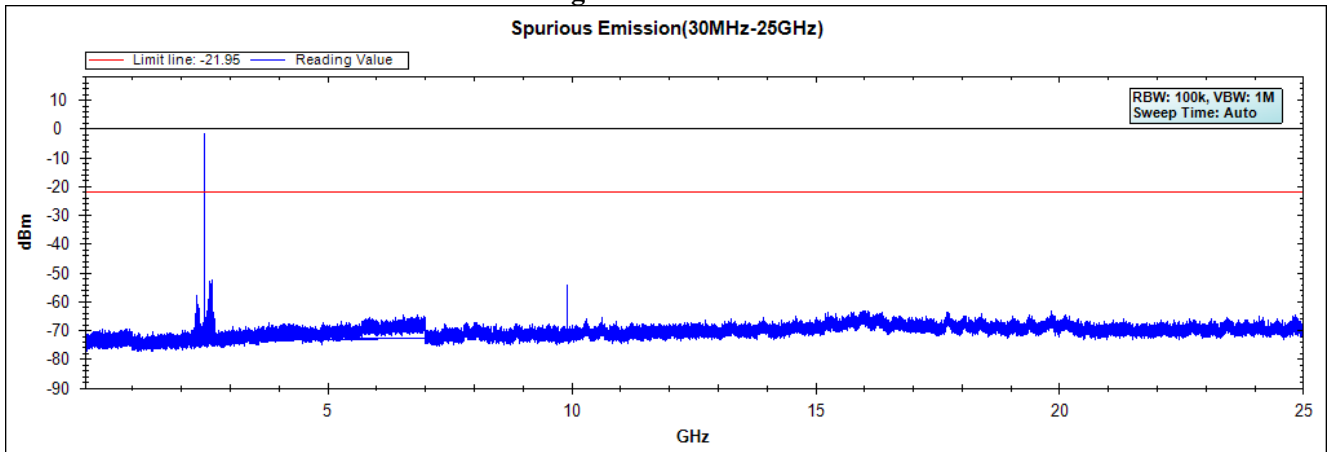

Note: The above test pattern is synthesized by multiple of the frequency range.

Product : Wireless Headphones
Test Item : RF Antenna Conducted Test
Test Mode : Mode 2: Transmit - 3Mbps
Test Date : 2017/10/19

Figure Channel 00:

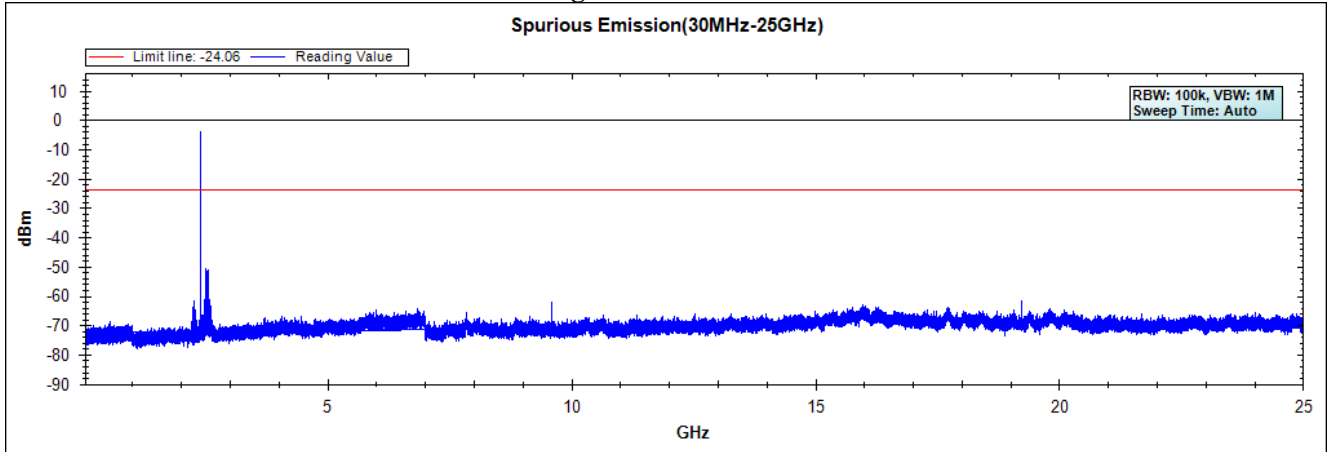


Figure Channel 39:


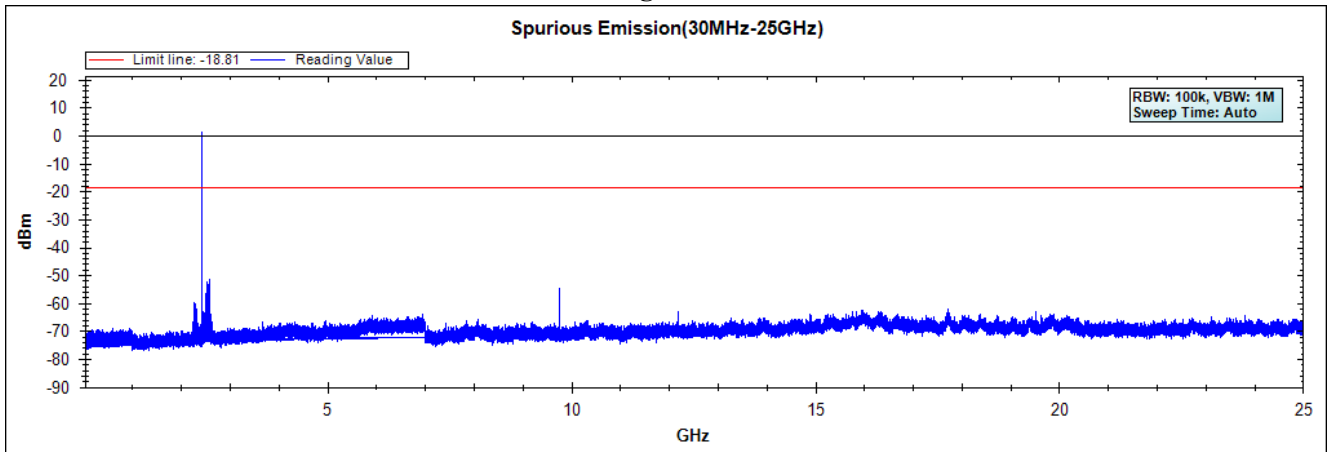


Figure Channel 78:

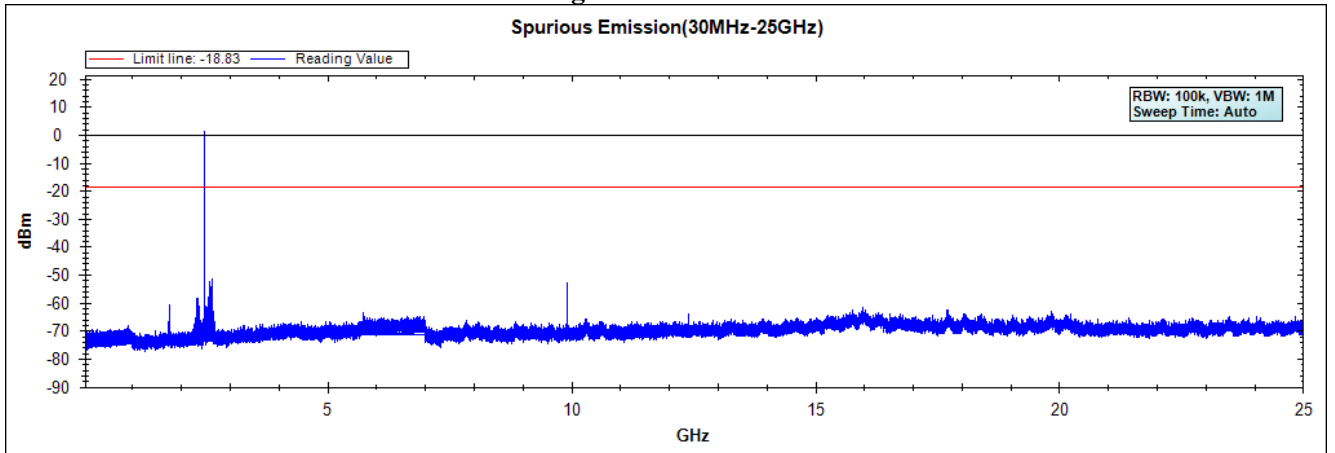


Note: The above test pattern is synthesized by multiple of the frequency range.


6. Band Edge

6.1. Test Setup

RF Conducted Measurement

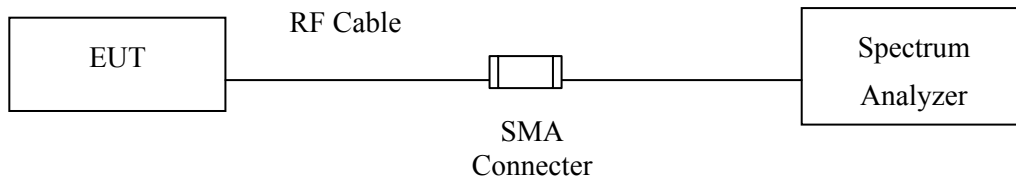

RF Radiated Measurement:

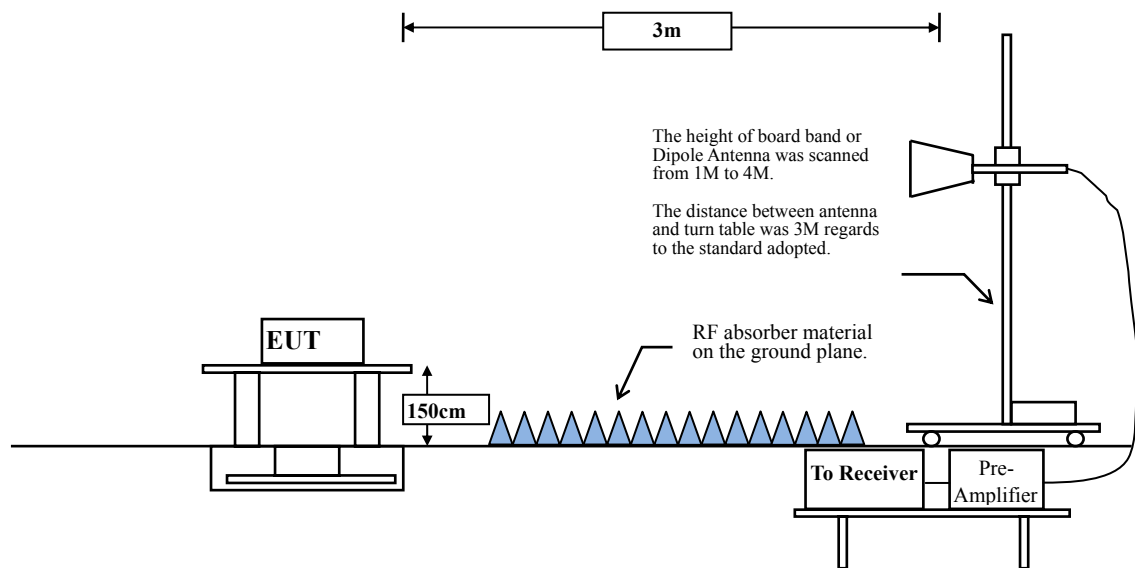

6.2. Limit

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.3. Test Procedure

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

The bandwidth setting below 1GHz and above 1GHz on the field strength meter is 120 kHz and 1MHz, respectively.

6.4. Uncertainty

Conducted: ± 1.23 dB

Radiated:

Horizontal polarization : 1-18GHz: ± 3.77 dB

Vertical polarization : 1-18GHz : ± 3.83 dB

6.5. Test Result of Band Edge

Product : Wireless Headphones
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps (2402MHz)
 Test Date : 2017/10/06

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
00 (Peak)	2376.957	12.110	31.872	43.982	74.00	54.00	Pass
00 (Peak)	2390.000	12.148	29.313	41.461	74.00	54.00	Pass
00 (Peak)	2400.000	12.176	57.603	69.779	--	--	--
00 (Peak)	2402.174	12.182	91.253	103.435	--	--	--
00 (Average)	2375.942	12.108	20.324	32.432	74.00	54.00	Pass
00 (Average)	2390.000	12.148	16.297	28.445	74.00	54.00	Pass
00 (Average)	2402.029	12.182	75.566	87.747	--	--	--

Figure Channel 00: Horizontal (Peak)


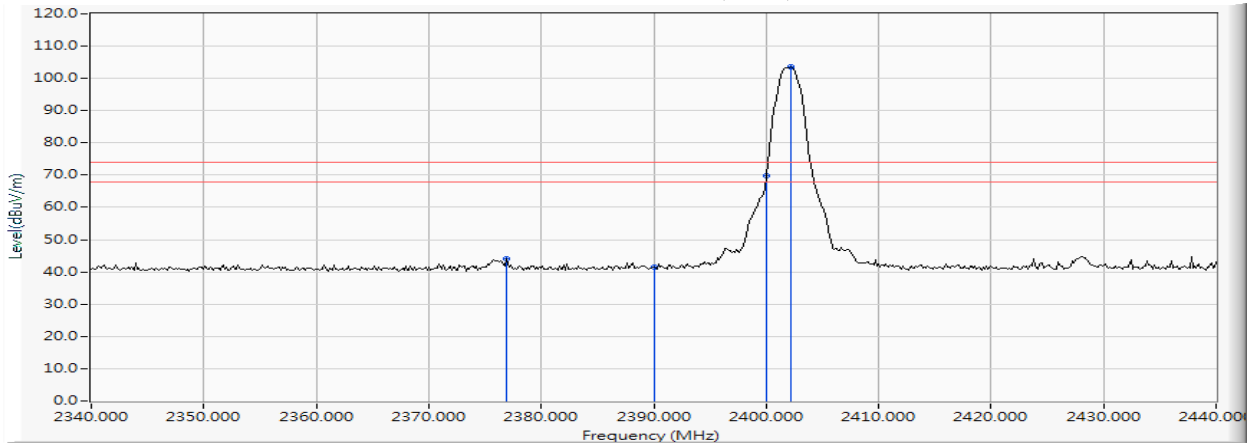


Figure Channel 00: Horizontal (Average)

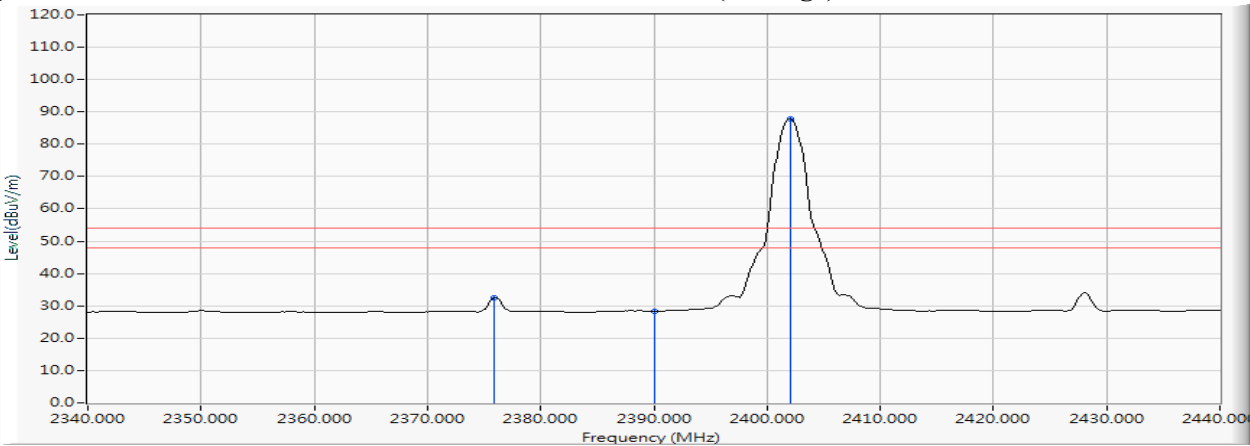

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Wireless Headphones
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps (2402MHz)
 Test Date : 2017/10/06

RF Radiated Measurement (VERTICAL):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
00 (Peak)	2375.652	12.107	31.288	43.395	74.00	54.00	Pass
00 (Peak)	2390.000	12.148	28.884	41.032	74.00	54.00	Pass
00 (Peak)	2400.000	12.176	54.253	66.429	--	--	--
00 (Peak)	2402.174	12.182	88.153	100.335	--	--	--
00 (Average)	2375.942	12.108	19.388	31.496	74.00	54.00	Pass
00 (Average)	2390.000	12.148	16.071	28.219	74.00	54.00	Pass
00 (Average)	2402.029	12.182	73.114	85.295	--	--	--

Figure Channel 00: VERTICAL (Peak)


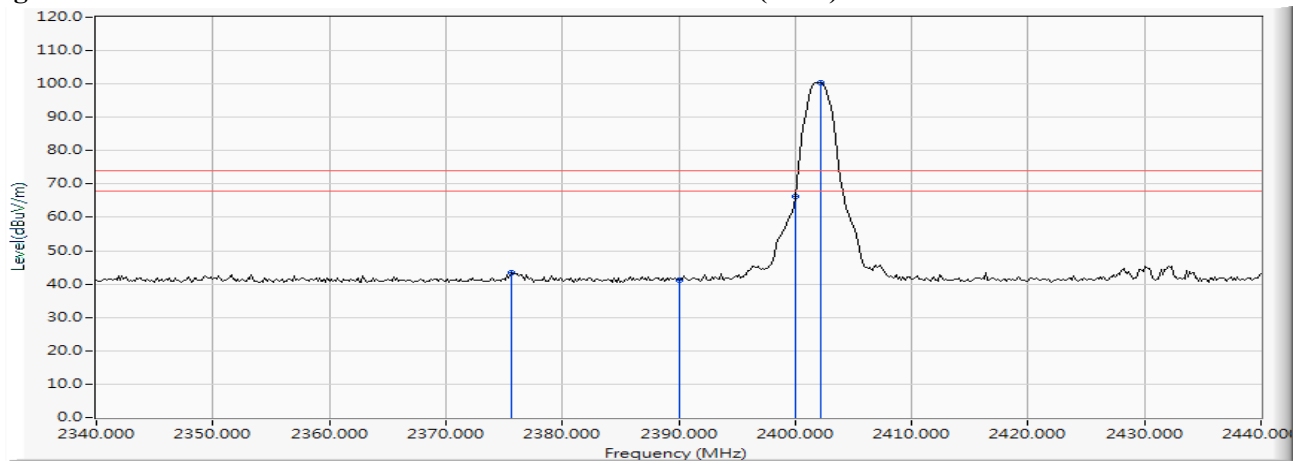


Figure Channel 00: VERTICAL (Average)

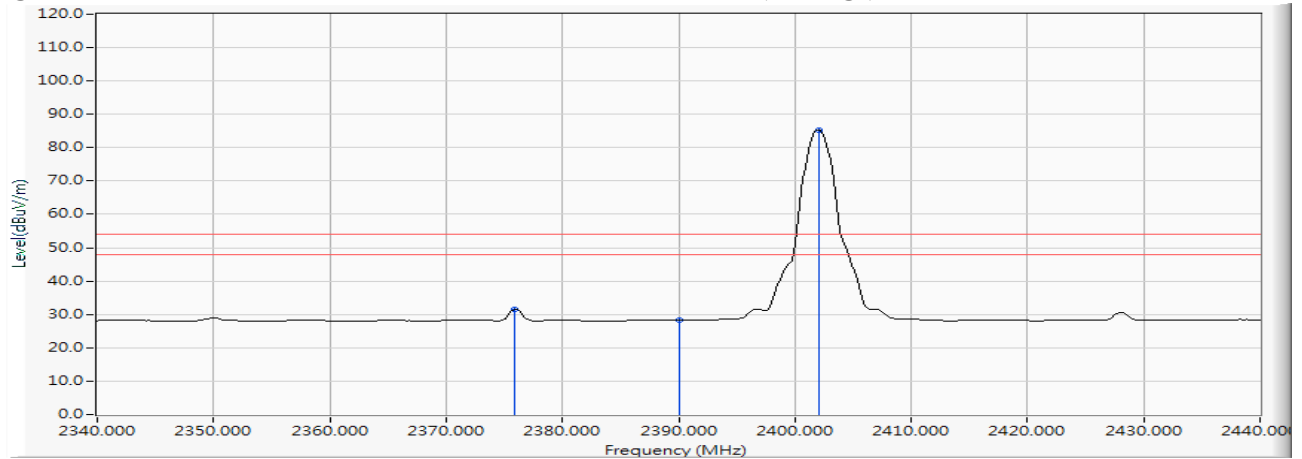

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Wireless Headphones
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps (2480MHz)
 Test Date : 2017/10/06

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
78 (Peak)	2479.877	12.393	87.563	99.956	--	--	--
78 (Peak)	2483.500	12.403	37.435	49.838	74.00	54.00	Pass
78 (Average)	2480.022	12.393	72.553	84.946	--	--	--
78 (Average)	2483.500	12.403	25.025	37.428	74.00	54.00	Pass

Figure Channel 78: Horizontal (Peak)


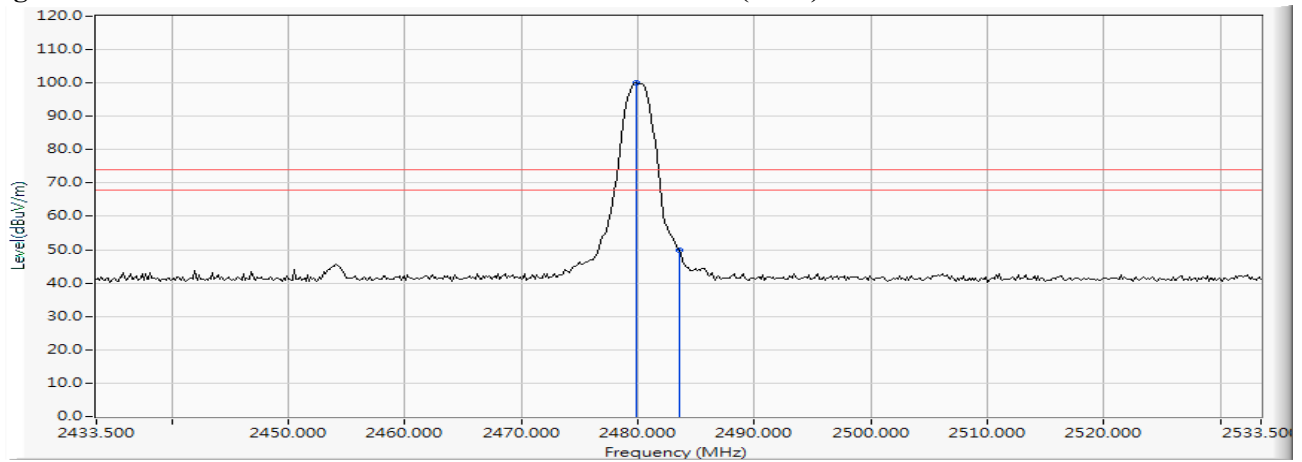


Figure Channel 78: Horizontal (Average)

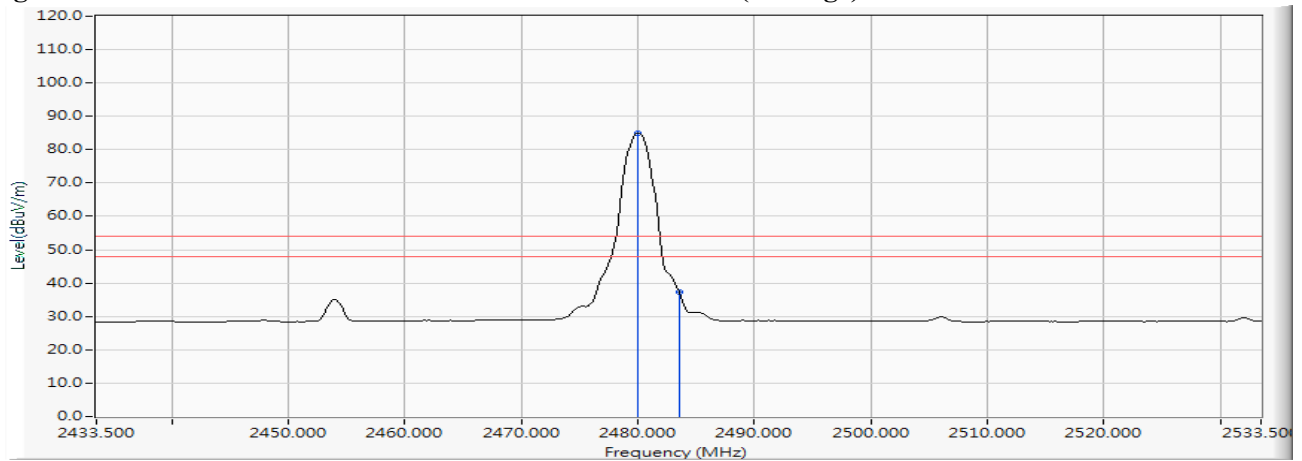

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Wireless Headphones
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps (2480MHz)
 Test Date : 2017/10/06

RF Radiated Measurement (VERTICAL):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
78 (Peak)	2479.877	12.393	84.034	96.427	--	--	--
78 (Peak)	2483.500	12.403	36.181	48.584	74.00	54.00	Pass
78 (Average)	2480.022	12.393	69.804	82.197	--	--	--
78 (Average)	2483.500	12.403	23.113	35.516	74.00	54.00	Pass

Figure Channel 78: VERTICAL (Peak)


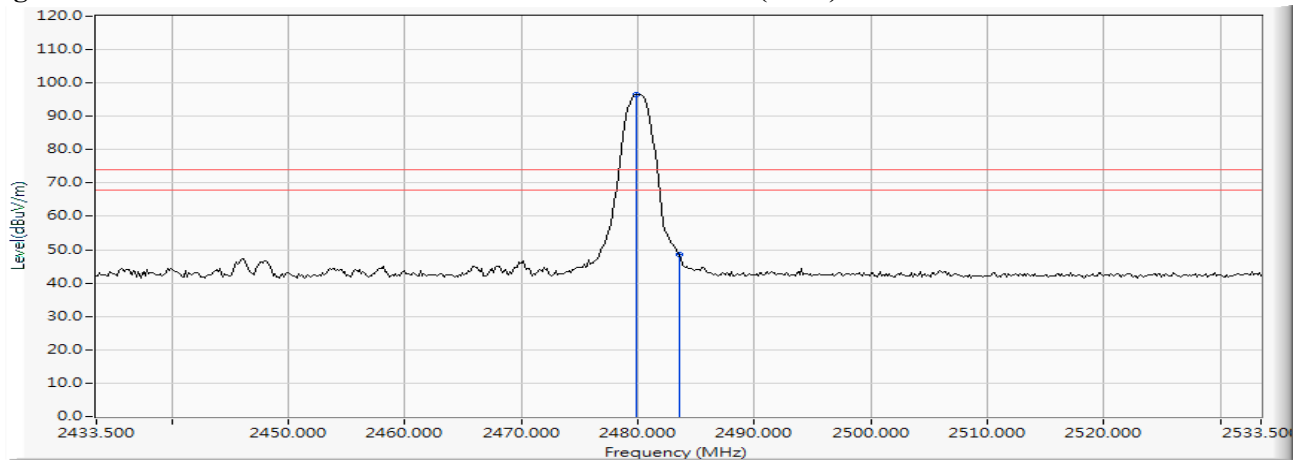


Figure Channel 78: VERTICAL (Average)

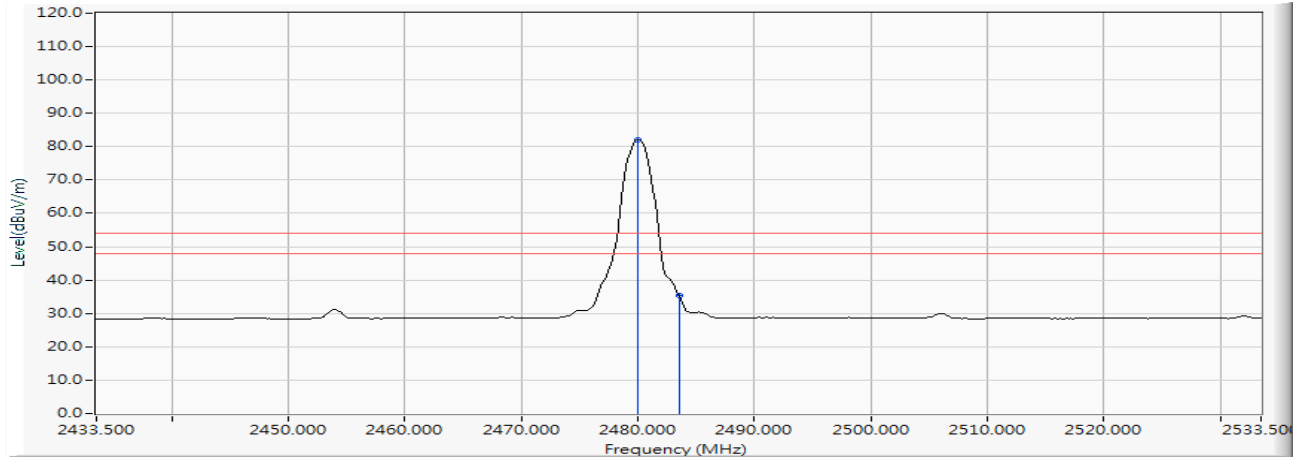

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Wireless Headphones
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - 3Mbps (2402MHz)
 Test Date : 2017/10/06

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Peak Limit (dBµV/m)	Average Limit (dBµV/m)	Result
00 (Peak)	2383.768	12.131	30.038	42.168	74.00	54.00	Pass
00 (Peak)	2390.000	12.148	29.603	41.751	74.00	54.00	Pass
00 (Peak)	2400.000	12.176	63.544	75.720	--	--	--
00 (Peak)	2402.029	12.182	88.476	100.657	--	--	--
00 (Average)	2376.087	12.108	16.760	28.868	74.00	54.00	Pass
00 (Average)	2390.000	12.148	16.070	28.218	74.00	54.00	Pass
00 (Average)	2402.029	12.182	71.314	83.495	--	--	--

Figure Channel 00: Horizontal (Peak)


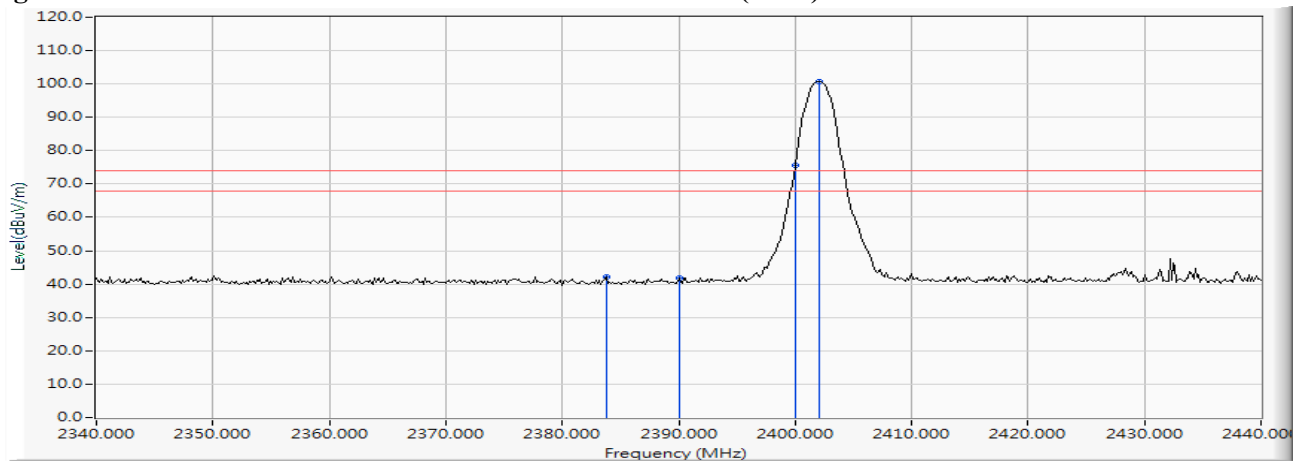


Figure Channel 00: Horizontal (Average)

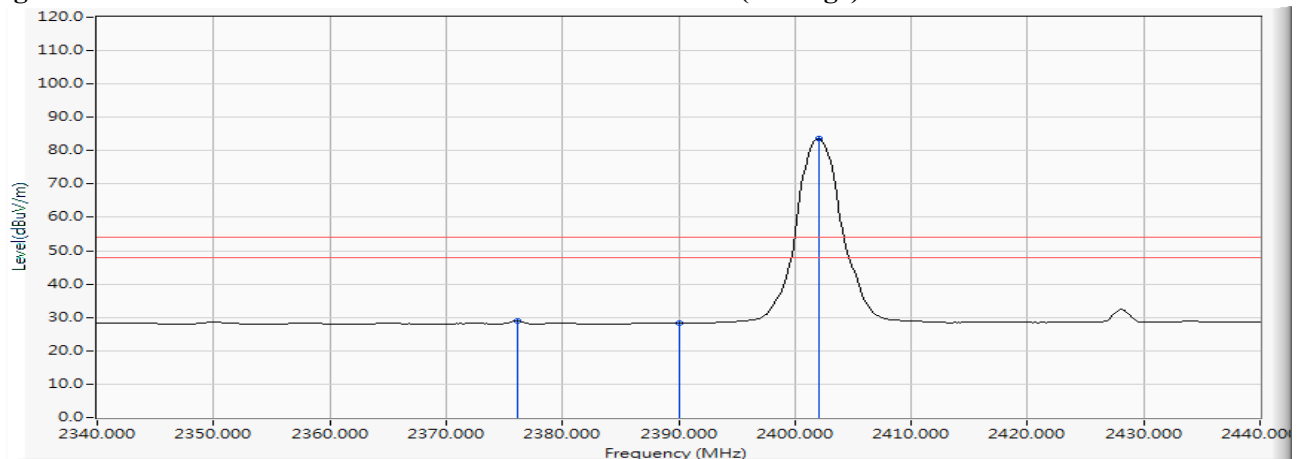

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Wireless Headphones
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - 3Mbps (2402MHz)
 Test Date : 2017/10/06

RF Radiated Measurement (VERTICAL):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
00 (Peak)	2386.377	12.138	30.395	42.533	74.00	54.00	Pass
00 (Peak)	2390.000	12.148	28.495	40.643	74.00	54.00	Pass
00 (Peak)	2400.000	12.176	60.557	72.733	--	--	--
00 (Peak)	2402.029	12.182	85.482	97.663	--	--	--
00 (Average)	2376.087	12.108	17.468	29.576	74.00	54.00	Pass
00 (Average)	2390.000	12.148	16.113	28.261	74.00	54.00	Pass
00 (Average)	2402.029	12.182	68.946	81.127	--	--	--

Figure Channel 00: VERTICAL (Peak)


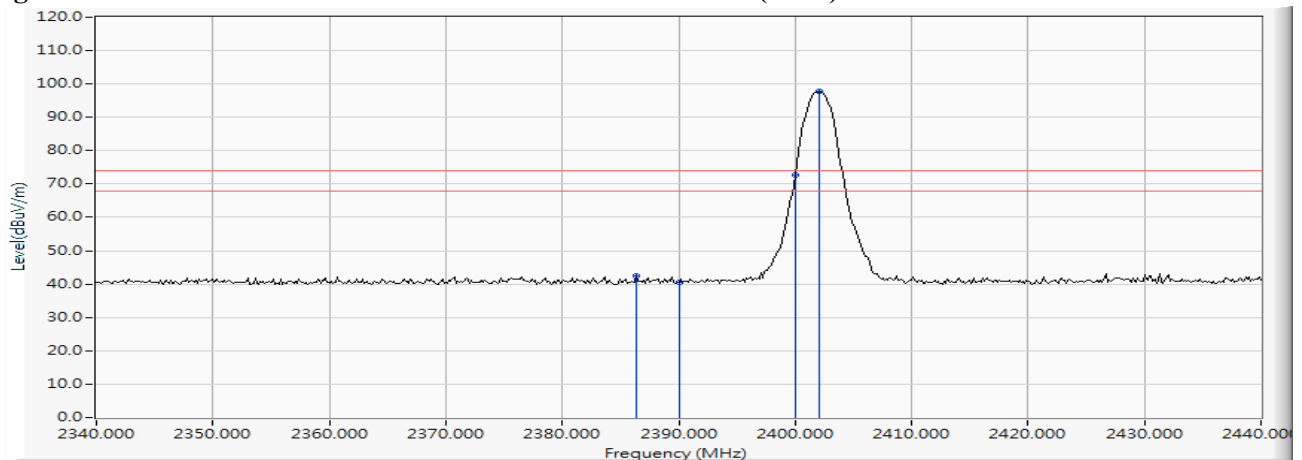


Figure Channel 00: VERTICAL (Average)

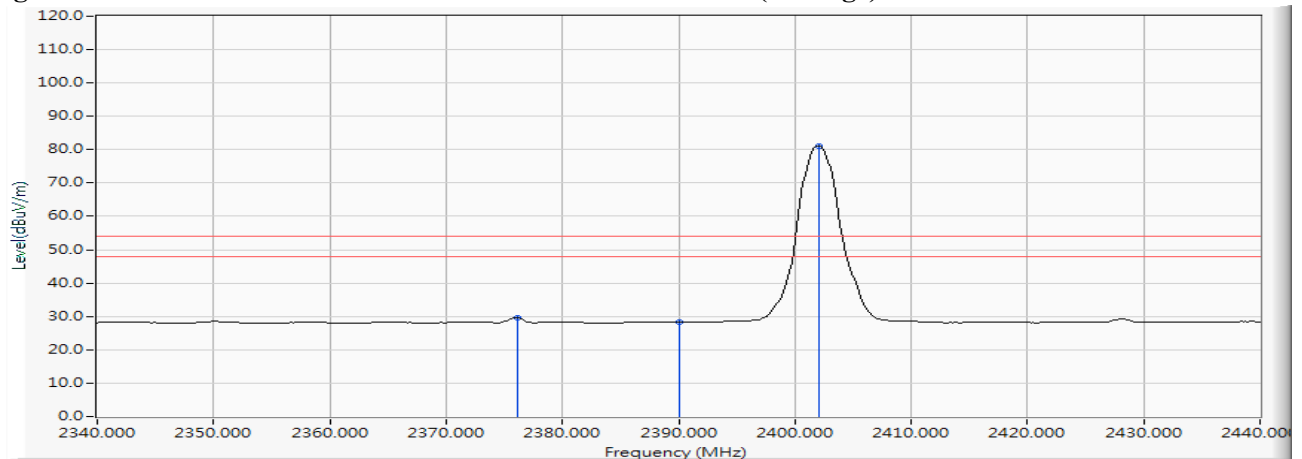

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Wireless Headphones
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - 3Mbps (2480MHz)
 Test Date : 2017/10/06

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
78 (Peak)	2480.022	12.393	87.545	99.938	--	--	--
78 (Peak)	2483.500	12.403	39.865	52.268	74.00	54.00	Pass
78 (Average)	2479.877	12.393	70.789	83.182	--	--	--
78 (Average)	2483.500	12.403	24.895	37.298	74.00	54.00	Pass

Figure Channel 00: Horizontal (Peak)


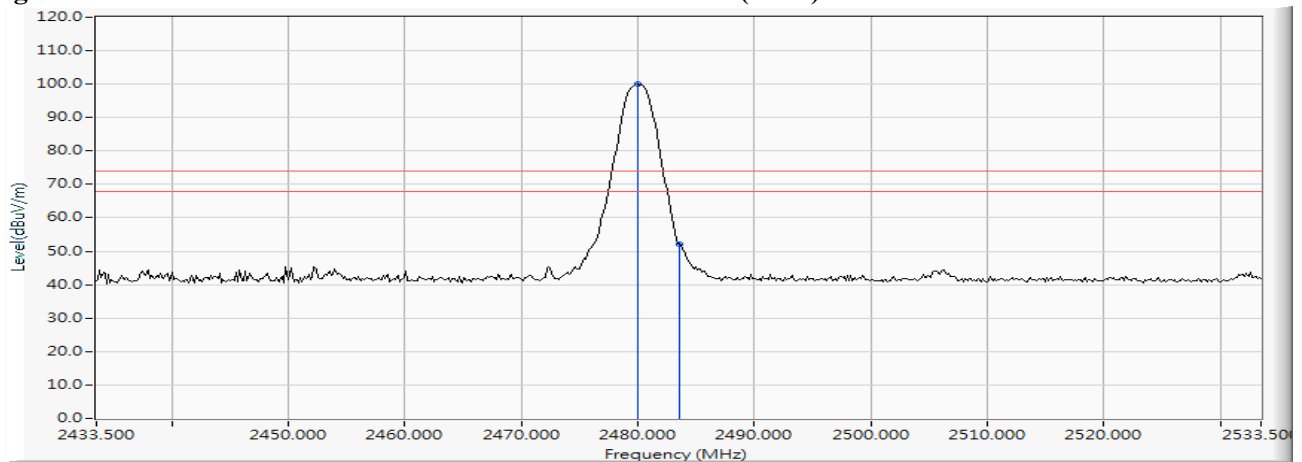


Figure Channel 00: Horizontal (Average)

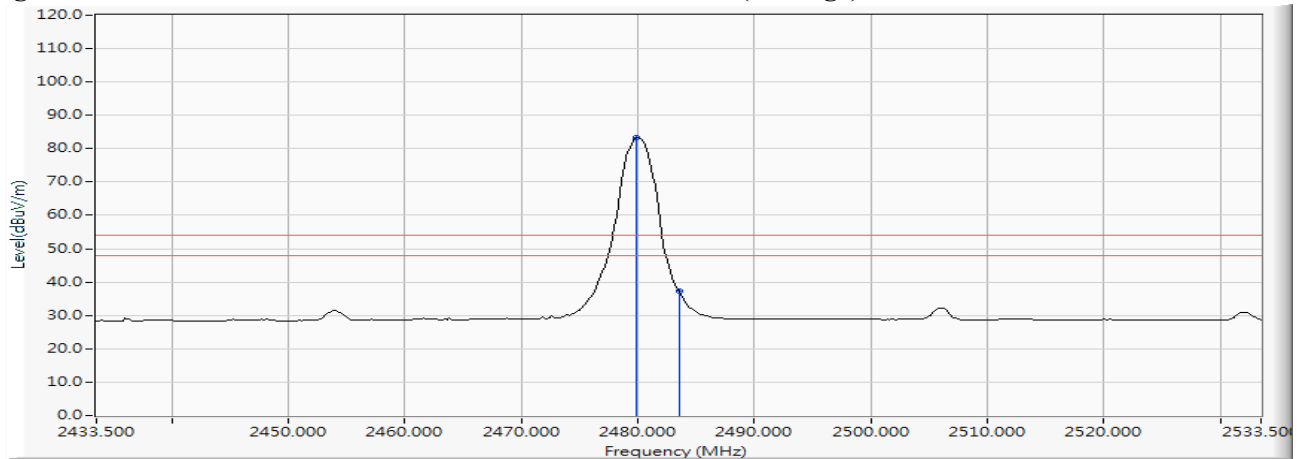

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Wireless Headphones
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - 3Mbps (2480MHz)
 Test Date : 2017/10/06

RF Radiated Measurement (VERTICAL):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
78 (Peak)	2480.022	12.393	83.703	96.096	--	--	--
78 (Peak)	2483.500	12.403	36.064	48.467	74.00	54.00	Pass
78 (Average)	2480.022	12.393	67.744	80.137	--	--	--
78 (Average)	2483.500	12.403	22.262	34.665	74.00	54.00	Pass

Figure Channel 78: VERTICAL (Peak)


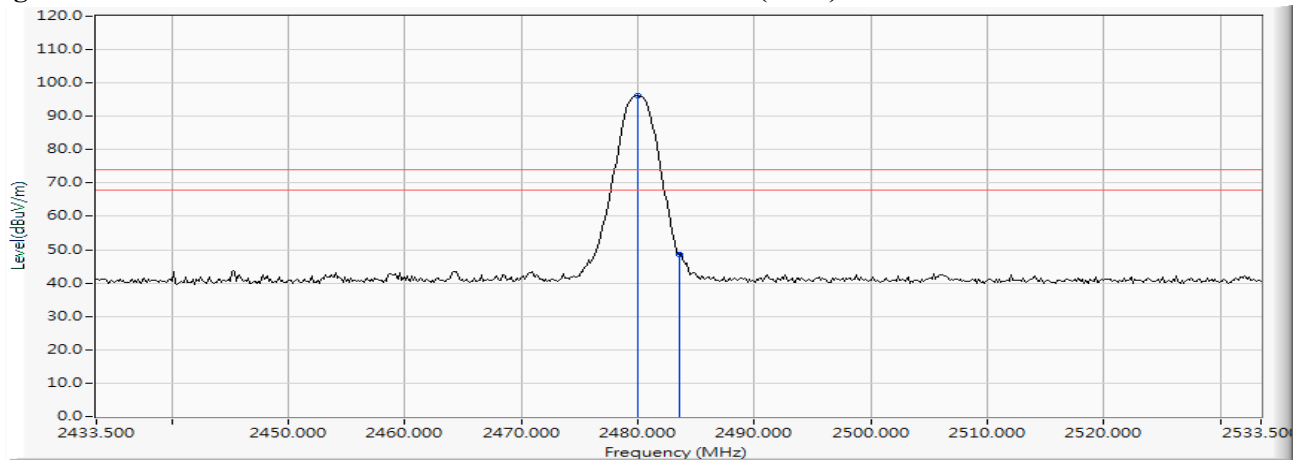


Figure Channel 78: VERTICAL (Average)

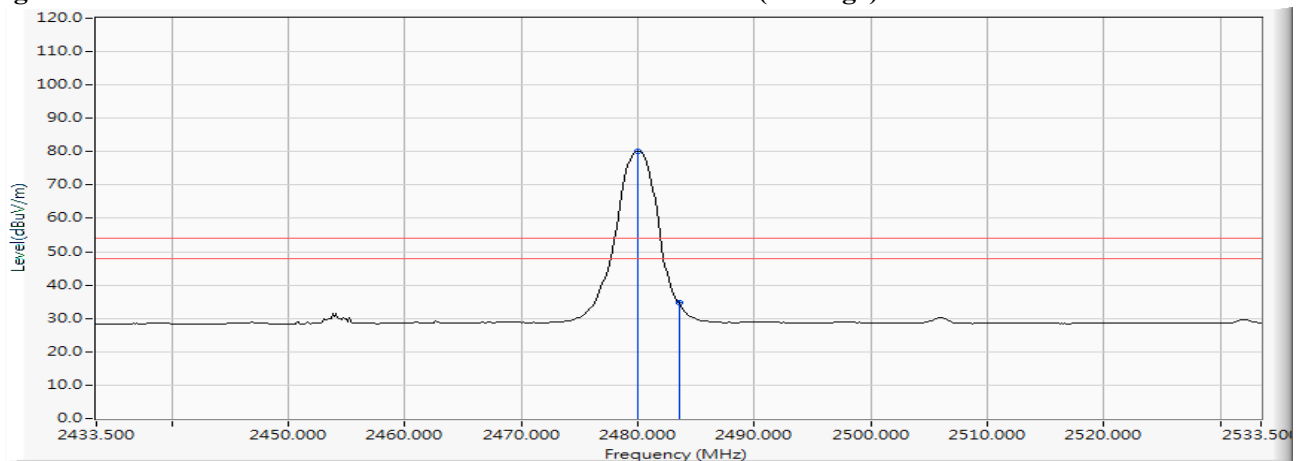


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Wireless Headphones
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps(Hopping off)


Measurement Level Δ (dB)	Result
> 20	PASS

Figure Channel 00:

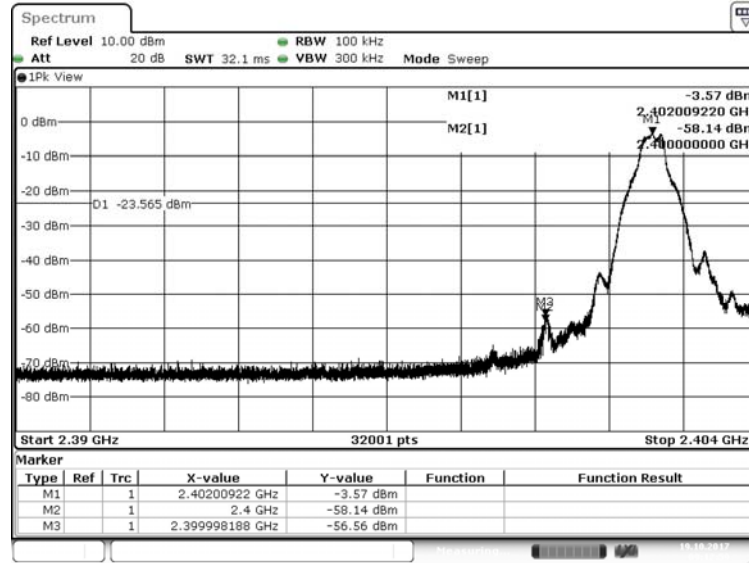

Date: 19.OCT.2017 09:12:59

Figure Channel 78:

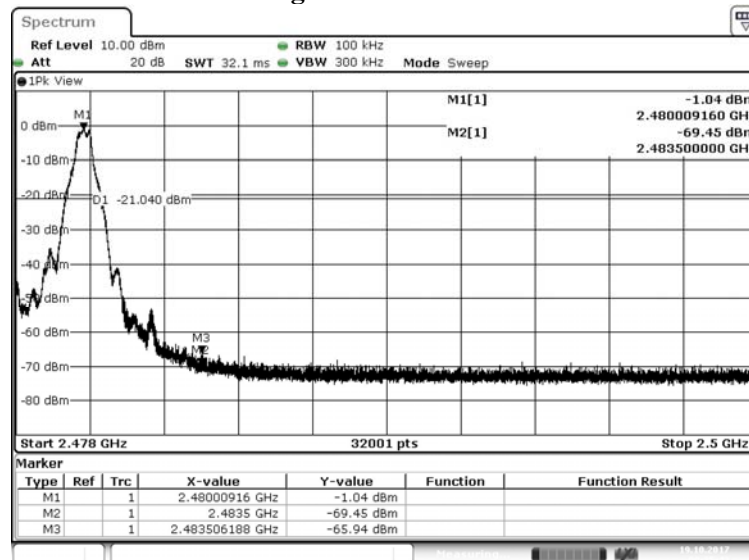


Date: 19.OCT.2017 09:35:43

Product : Wireless Headphones
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - 3Mbps (Hopping off)


Measurement Level	Result
Δ (dB)	
> 20	PASS

Figure Channel 00:

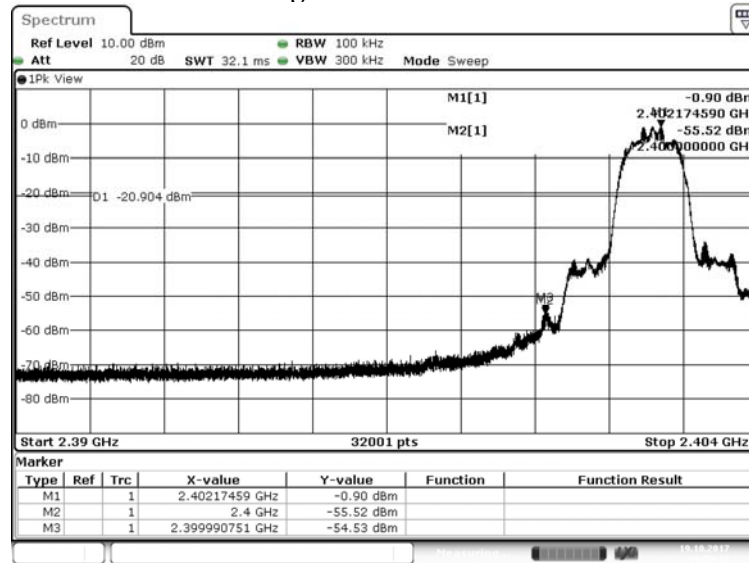

Date: 19.OCT.2017 09:59:19

Figure Channel 78:

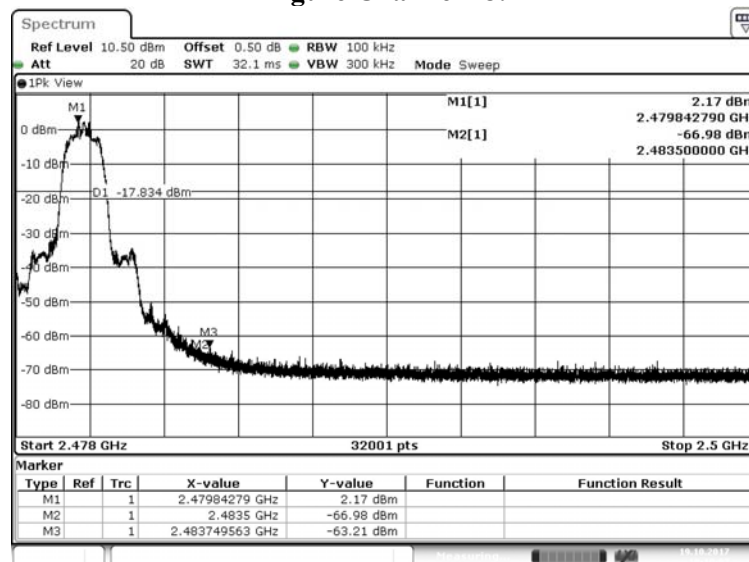


Date: 19.OCT.2017 10:19:08

Product : Wireless Headphones
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps(Hopping on)


Measurement Level Δ (dB)	Result
> 20	PASS

Figure Channel Hopping:

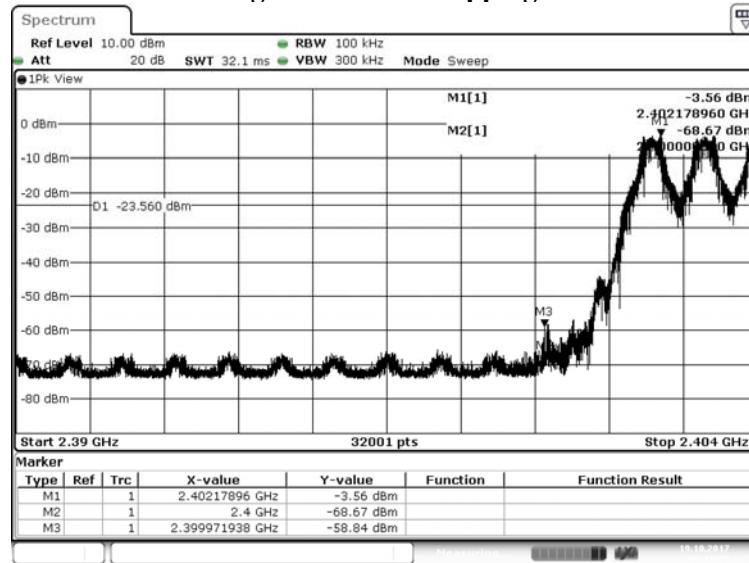

Date: 19.OCT.2017 09:15:56

Figure Channel Hopping:

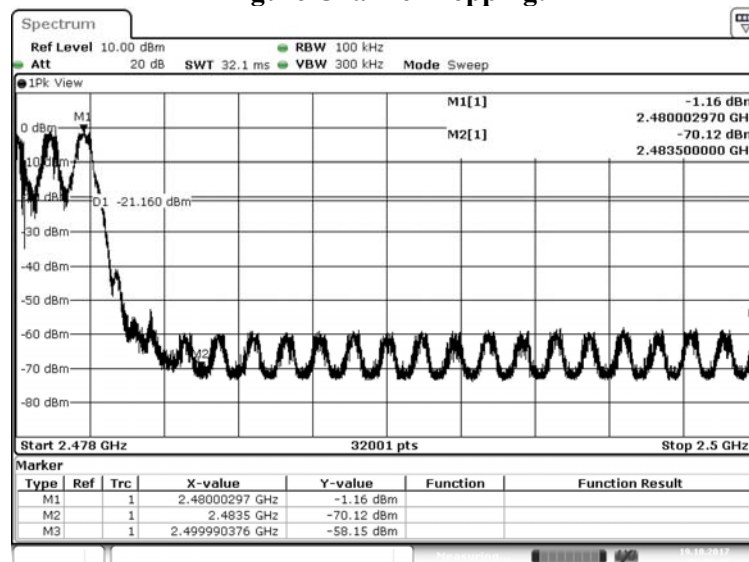


Date: 19.OCT.2017 09:38:49

Product : Wireless Headphones
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - 3Mbps (Hopping on)


Measurement Level	Result
Δ (dB)	
> 20	PASS

Figure Channel Hopping:

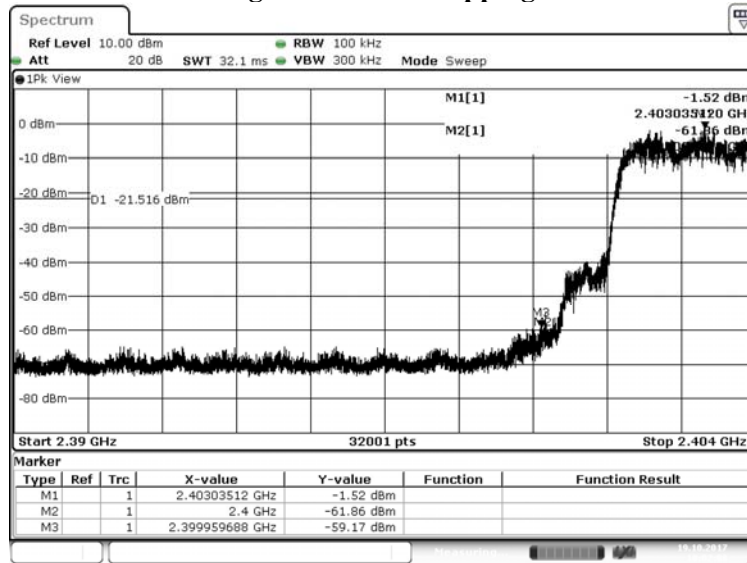

Date: 19.OCT.2017 10:02:09


Figure Channel Hopping:

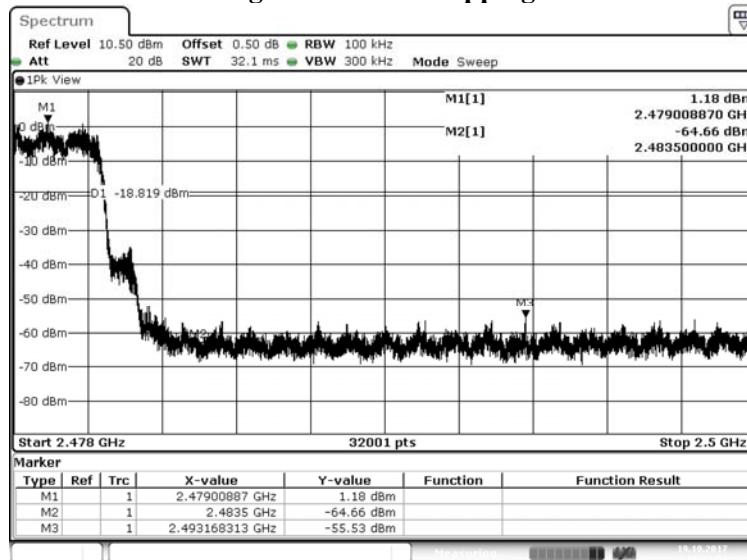

Date: 19.OCT.2017 10:21:51

7. Channel Number

7.1. Test Setup

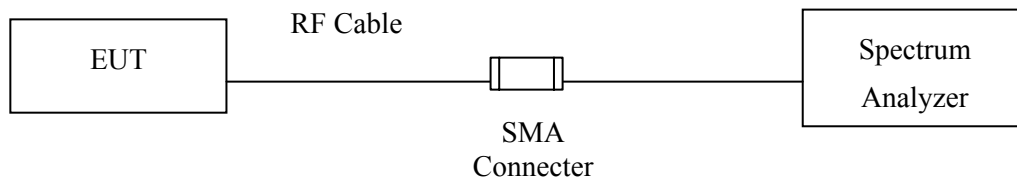

7.2. Limit

Frequency hopping systems operating in the 2400-2483.5 MHz bands shall use at least 75 hopping frequencies.

7.3. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

7.4. Uncertainty


N/A

7.5. Test Result of Channel Number

Product : Wireless Headphones
 Test Item : Channel Number
 Test Mode : Mode 1: Transmit - 1Mbps


Frequency Range (MHz)	Measurement (Hopping Channel)	Required Limit (Hopping Channel)	Result
2402 ~ 2480	79	>75	Pass

2402-2421MHz

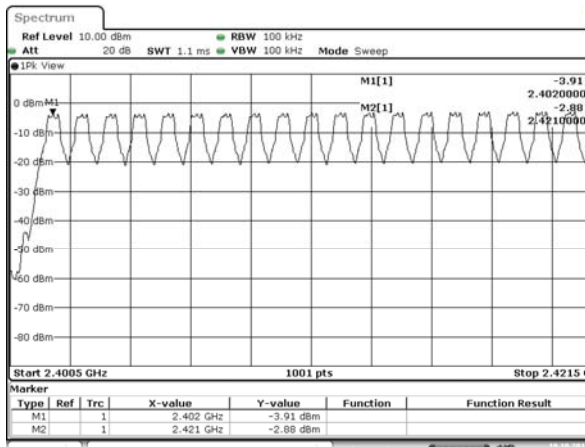


Date: 19.OCT.2017 09:51:09

2422-2441MHz

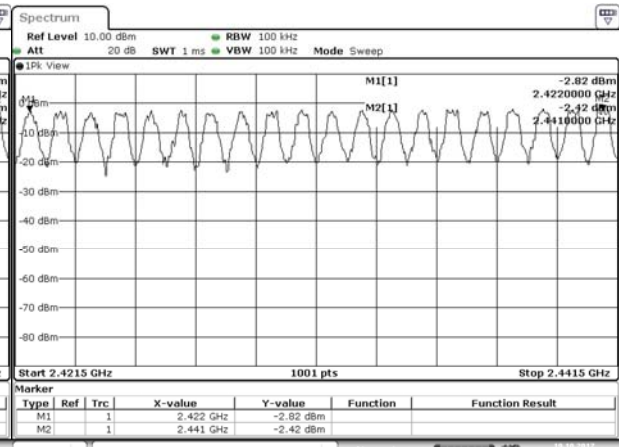


Date: 19.OCT.2017 09:52:02

2442-2461MHz

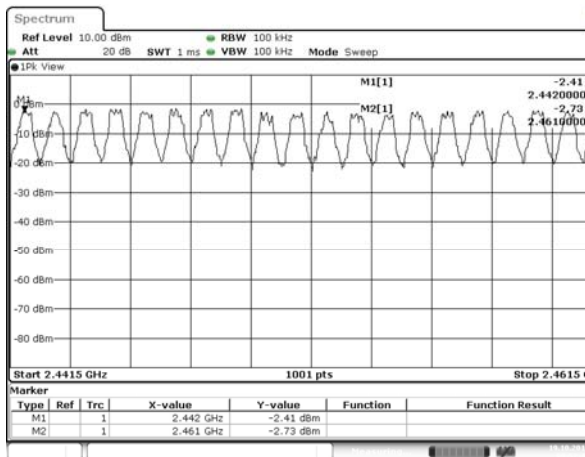

Date: 19.OCT.2017 09:52:45

2462-2480MHz

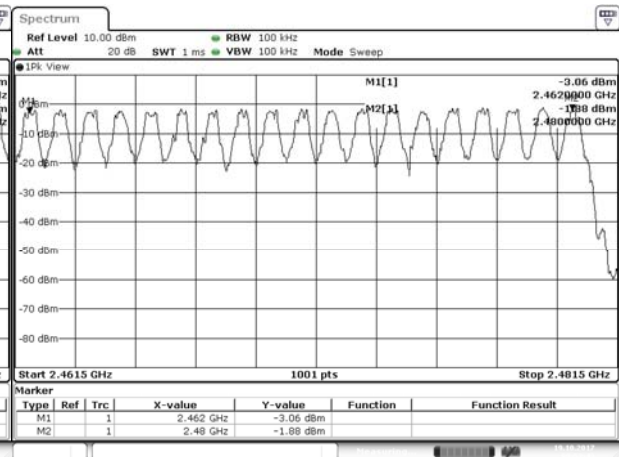


Date: 19.OCT.2017 09:53:44

Product : Wireless Headphones
 Test Item : Channel Number
 Test Mode : Mode 2: Transmit - 3Mbps


Frequency Range (MHz)	Measurement (Hopping Channel)	Required Limit (Hopping Channel)	Result
2402 ~ 2480	79	>75	Pass

2402-2421MHz

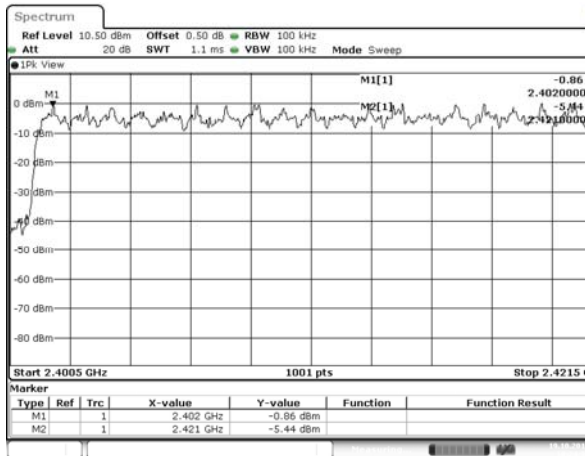


Date: 19.OCT.2017 10:24:35

2422-2441MHz

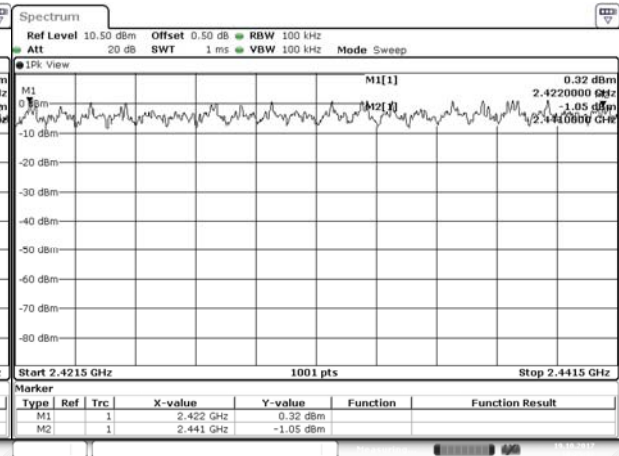


Date: 19.OCT.2017 10:25:32

2442-2461MHz

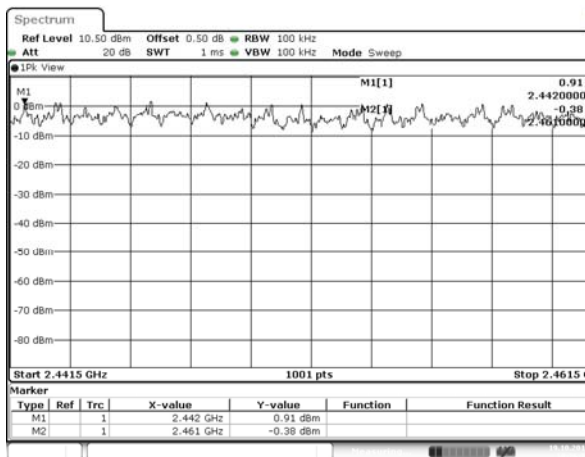

Date: 19.OCT.2017 10:26:20


2462-2480MHz

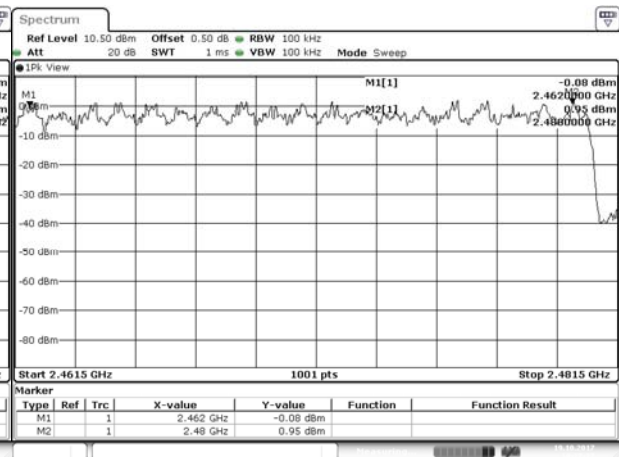

Date: 19.OCT.2017 10:27:28

8. Channel Separation

8.1. Test Setup

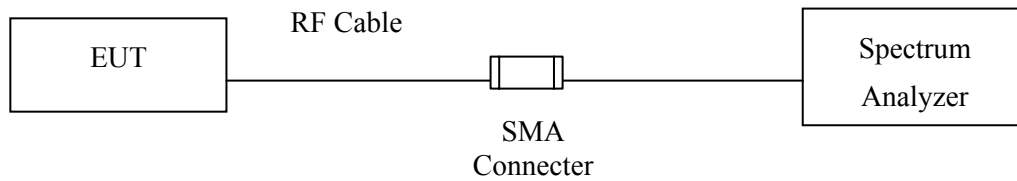

8.2. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

8.3. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

8.4. Uncertainty

$\pm 279.2\text{Hz}$


8.5. Test Result of Channel Separation

Product : Wireless Headphones
 Test Item : Channel Separation
 Test Mode : Mode 1: Transmit - 1Mbps

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Limit (kHz)	Limit of (2/3)*20dB Bandwidth (kHz)	Result
00	2402	1000	>25 kHz	584.0	Pass
39	2441	1000	>25 kHz	562.0	Pass
78	2480	1000	>25 kHz	560.0	Pass


NOTE: The 20dB Bandwidth is refer to section 10.

Channel 00 (2402MHz)

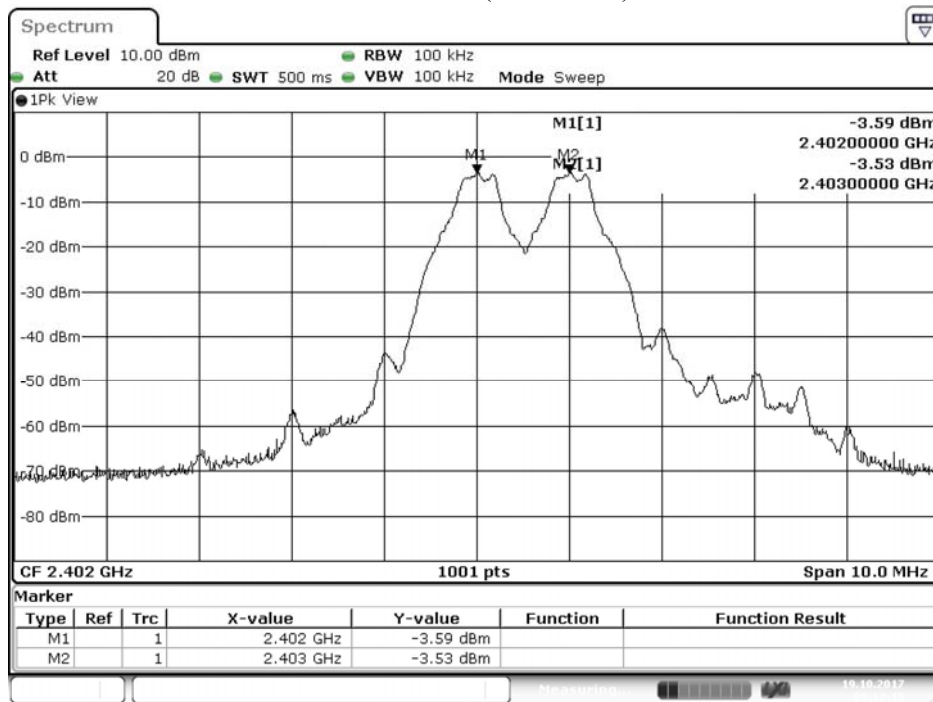


Date: 19.OCT.2017 09:12:15

Channel 39 (2441MHz)

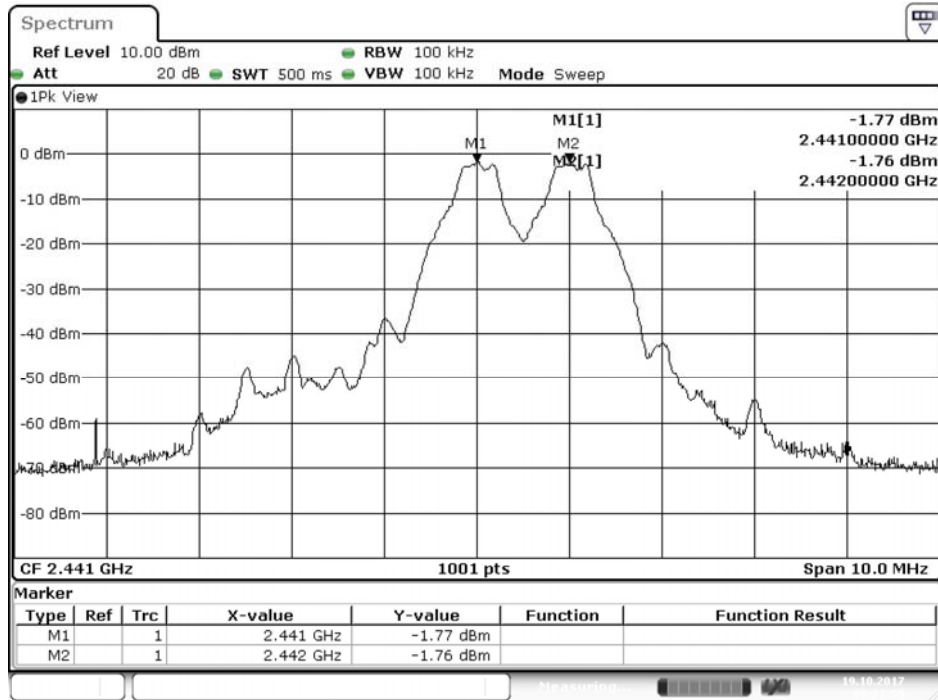

Date: 19.OCT.2017 09:21:56

Channel 78 (2480MHz)

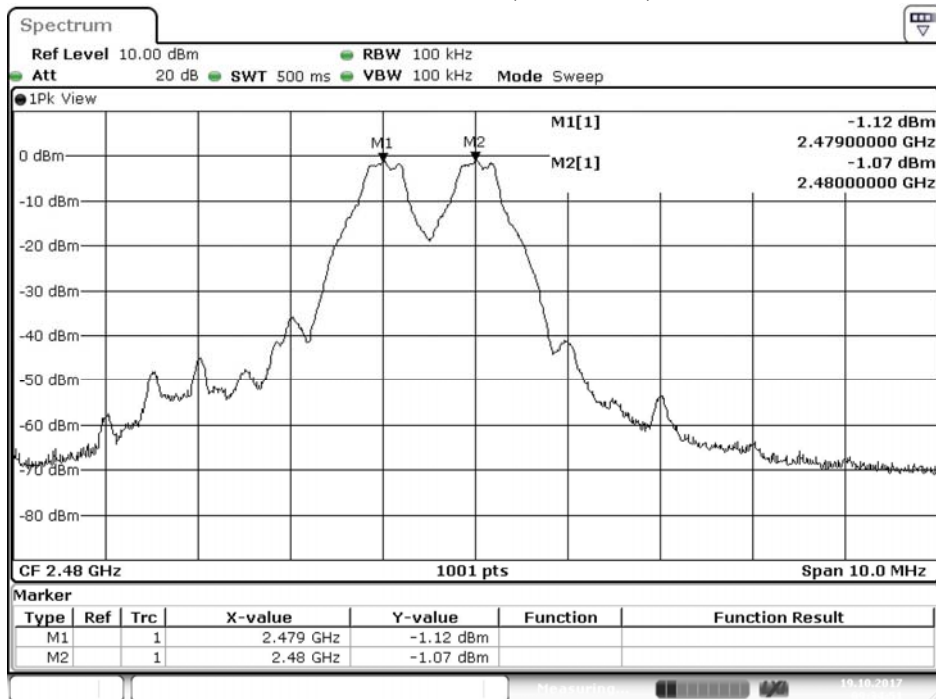


Date: 19.OCT.2017 09:34:51

Product : Wireless Headphones
 Test Item : Channel Separation
 Test Mode : Mode 2: Transmit - 3Mbps

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Limit (kHz)	Limit of (2/3)*20dB Bandwidth (kHz)	Result
00	2402	1000	>25 kHz	852.0	Pass
39	2441	1000	>25 kHz	842.0	Pass
78	2480	1000	>25 kHz	842.0	Pass


NOTE: The 20dB Bandwidth is refer to section 10.

Channel 00 (2402MHz)

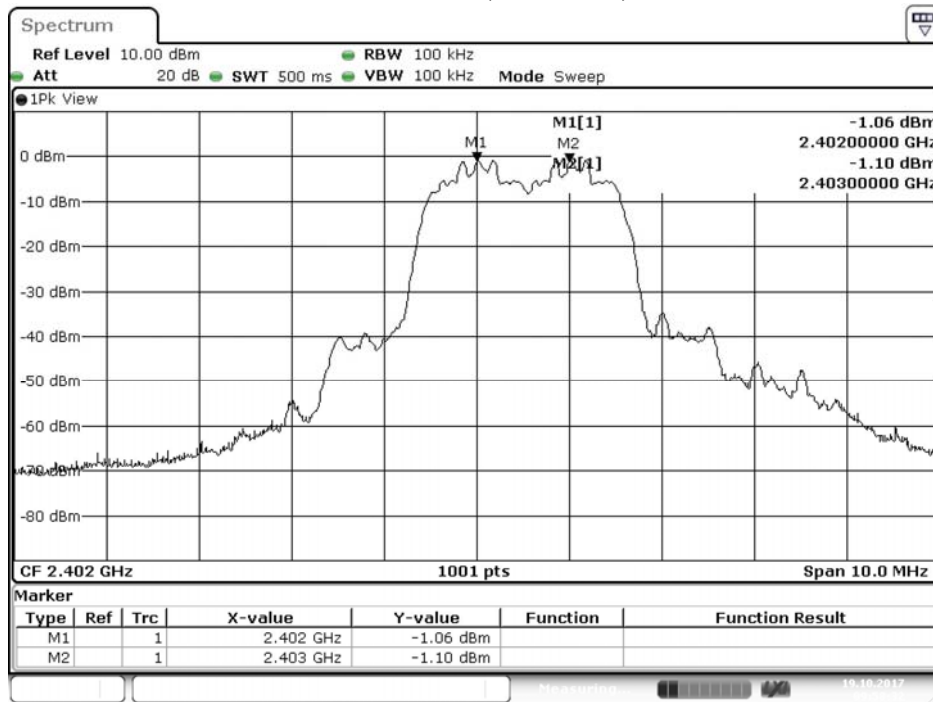


Date: 19.OCT.2017 09:58:32

Channel 39 (2441MHz)

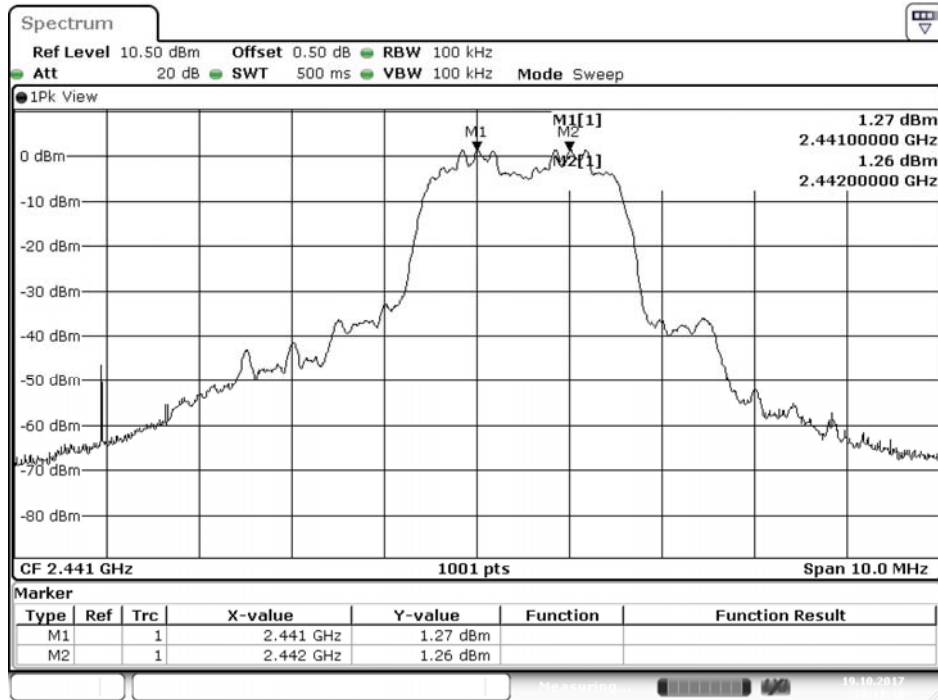

Date: 19.OCT.2017 10:11:16


Channel 78 (2480MHz)

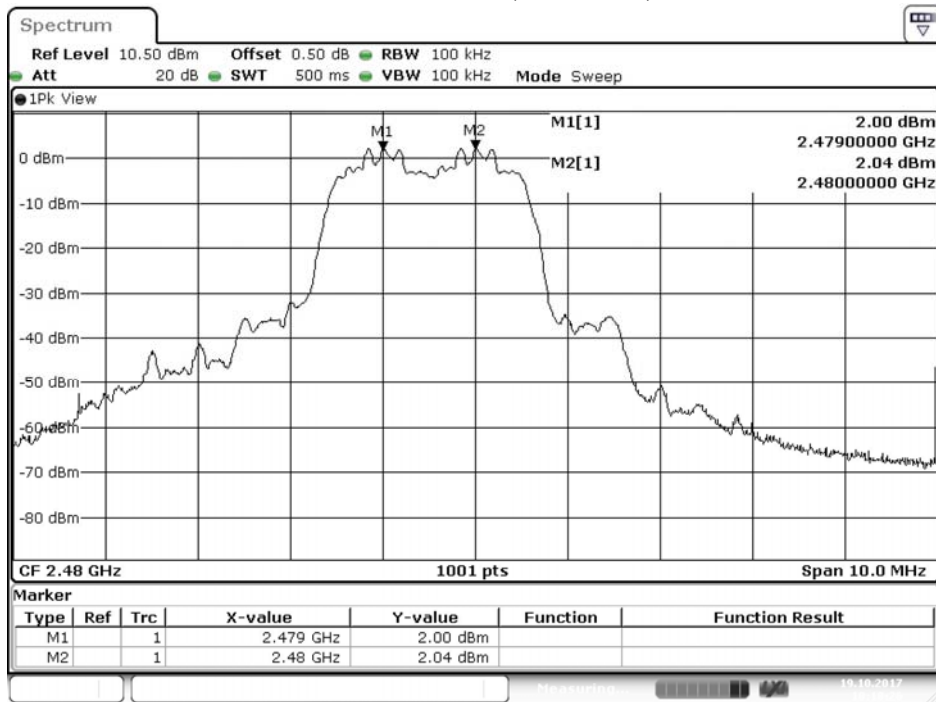

Date: 19.OCT.2017 10:18:26

9. Dwell Time

9.1. Test Setup

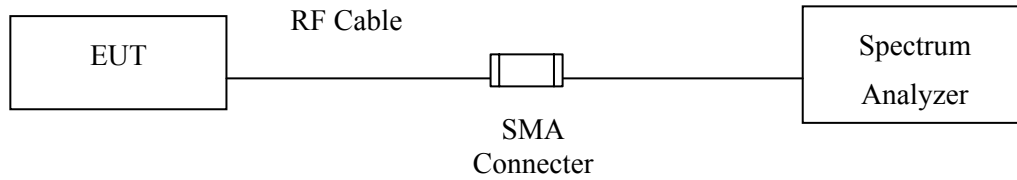

9.2. Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

9.3. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

9.4. Uncertainty

± 2.31 msec

9.5. Test Result of Dwell Time


Product : Wireless Headphones
 Test Item : Dwell Time
 Test Mode : Mode 1: Transmit - 1Mbps (Channel 00,39,78)

Frequency (MHz)	Time slot length (ms)	Hopping of Number	Sweep time (ms)	Duty cycle	Dwell Time (Sec)	Limit (Sec)	Result
2402	2.897	13	50	0.75	0.301	0.4	Pass
2441	2.897	13	50	0.75	0.301	0.4	Pass
2480	2.897	13	50	0.75	0.301	0.4	Pass


Duty cycle = ((Time slot length(ms)*Hopping of Number) / Sweep time (ms)

Dwell time = (Duty cycle /79) * (79*0.4)


CH 00 Hopping of Number

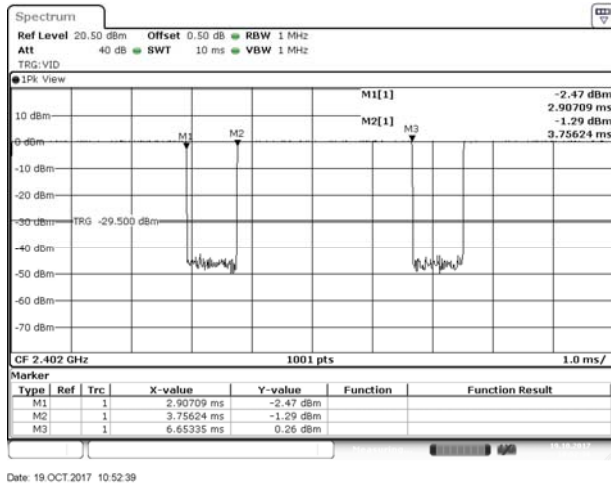


CH 00 Time slot length

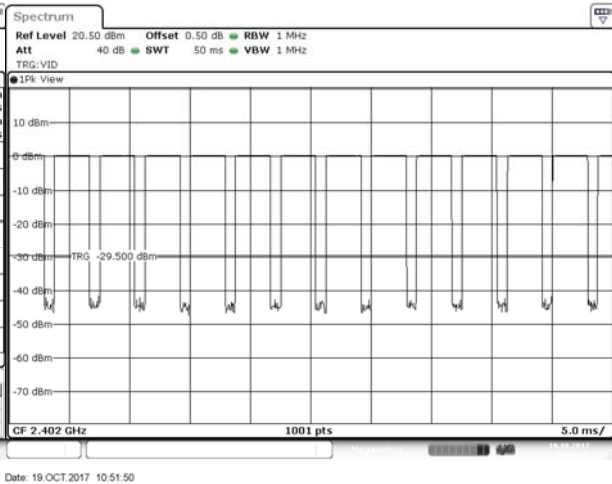

CH39 Hopping of Number

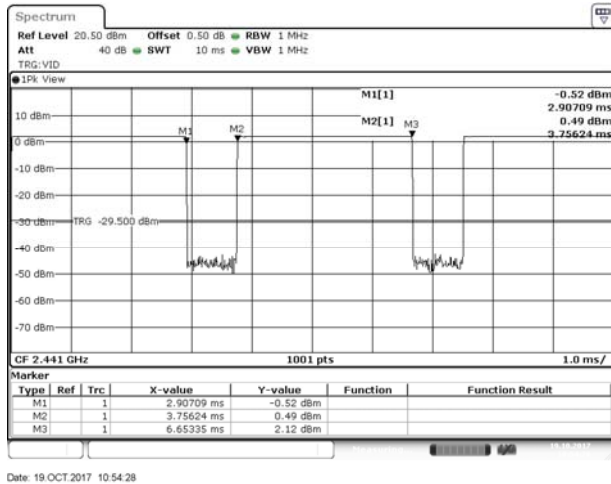


CH 39 Time slot length

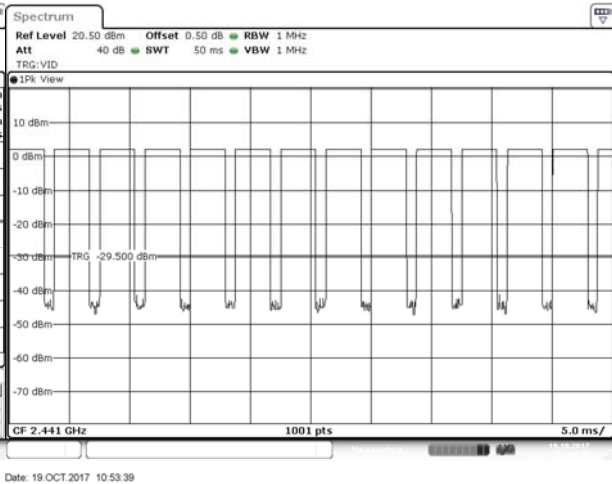

CH 78 Hopping of Number

CH 78 Time slot length

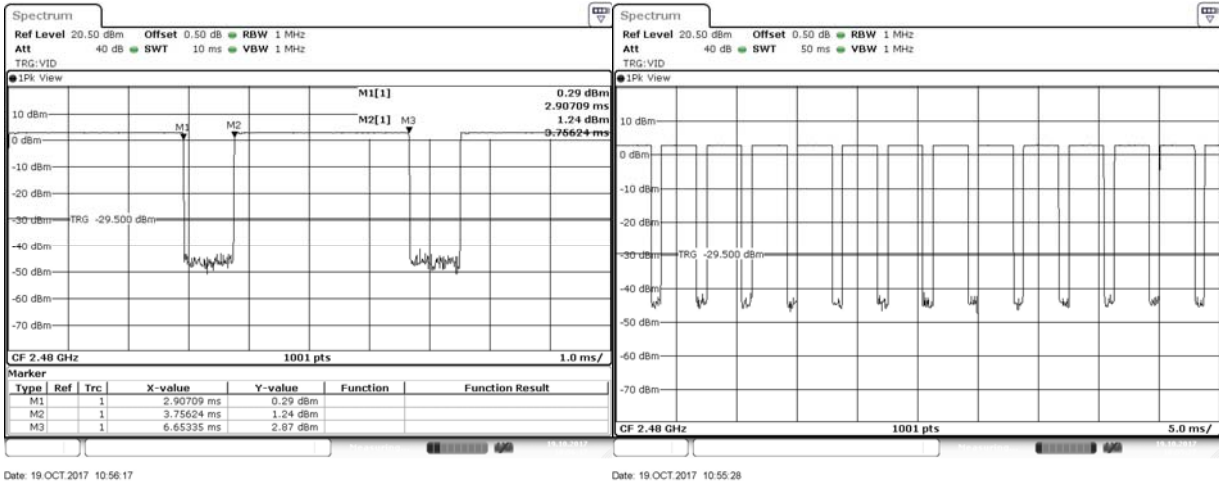

Note:

The dwell times of the packet type of DH1, DH3, and DH5 are tested. Only the worst case is shown on the report.


Product : Wireless Headphones
 Test Item : Dwell Time
 Test Mode : Mode 2: Transmit - 3Mbps (Channel 00,39,78)

Frequency (MHz)	Time slot length (ms)	Hopping of Number	Sweep time (ms)	Duty cycle	Dwell Time (Sec)	Limit (Sec)	Result
2402	2.897	13	50	0.75	0.301	0.4	Pass
2441	2.897	13	50	0.75	0.301	0.4	Pass
2480	2.897	13	50	0.75	0.301	0.4	Pass

Duty cycle = ((Time slot length(ms)*Hopping of Number) / Sweep time (ms))


Dwell time = (Duty cycle / 79) * (79*0.4)

CH 00 Hopping of Number

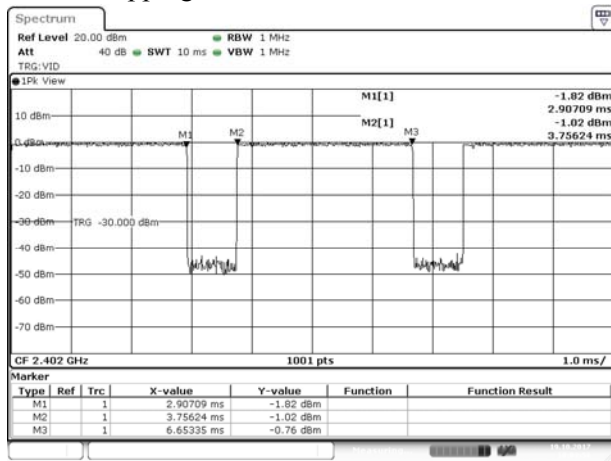


Date: 19.OCT.2017 10:03:58

CH 00 Time slot length

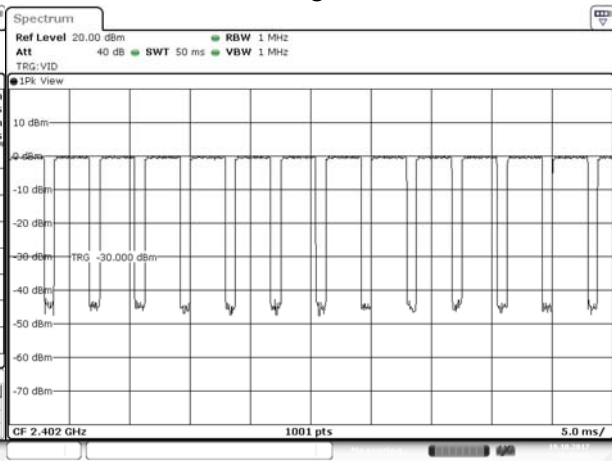


Date: 19.OCT.2017 10:03:09

CH39 Hopping of Number

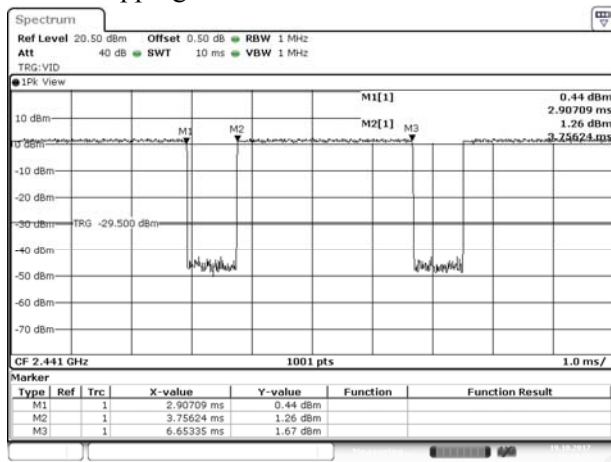

Date: 19.OCT.2017 10:14:14


CH 39 Time slot length

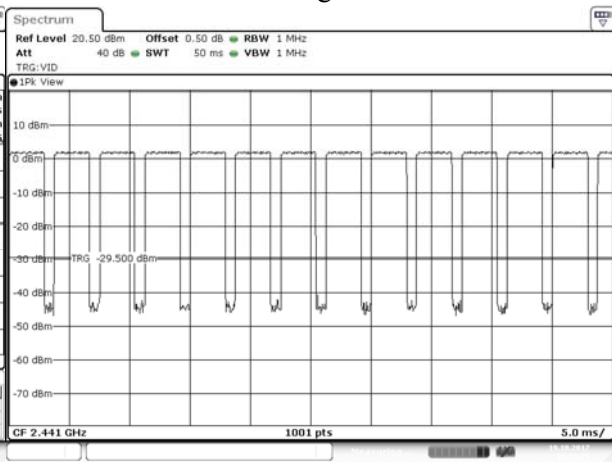

Date: 19.OCT.2017 10:13:25

CH 78 Hopping of Number

CH 78 Time slot length

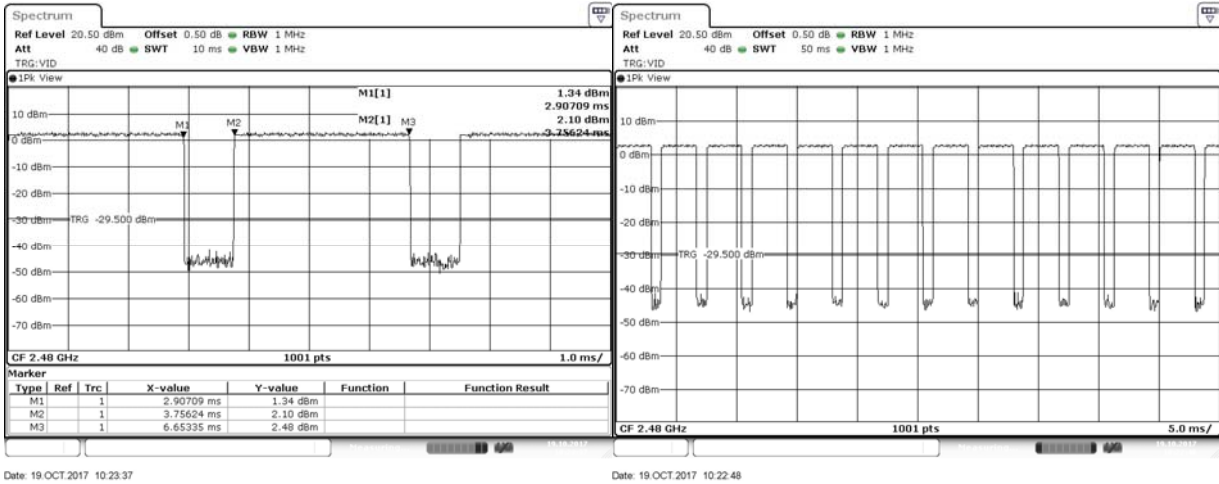


Note:

The dwell times of the packet type of DH1, DH3, and DH5 are tested. Only the worst case is shown on the report.

10. Occupied Bandwidth

10.1. Test Setup

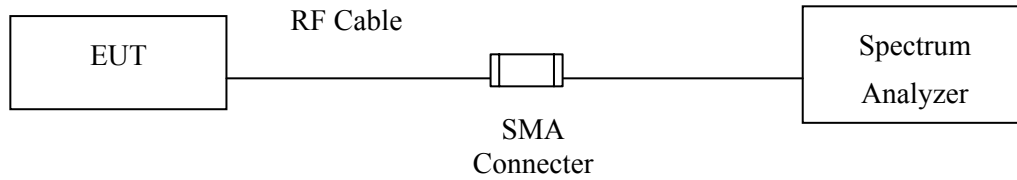

10.2. Limits

N/A

10.3. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

10.4. Uncertainty


$\pm 279.2\text{Hz}$

10.5. Test Result of Occupied Bandwidth

Product : Wireless Headphones
 Test Item : Occupied Bandwidth Data
 Test Mode : Mode 1: Transmit - 1Mbps


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	876	--	NA
39	2441	843	--	NA
78	2480	840	--	NA

Figure Channel 00:

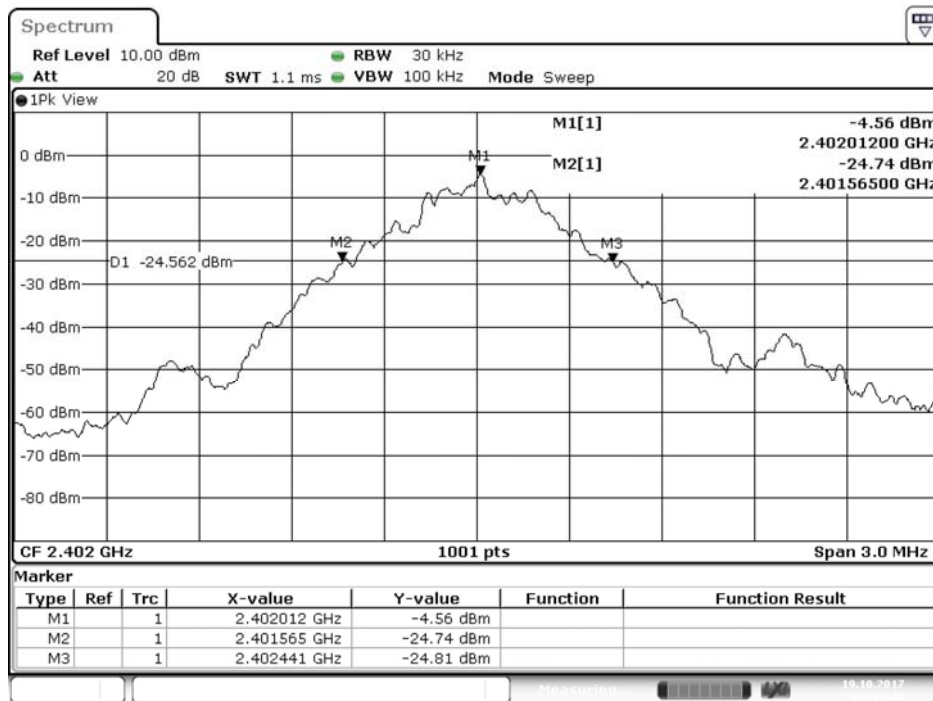


Date: 19.OCT.2017 09:18:45

Figure Channel 39:

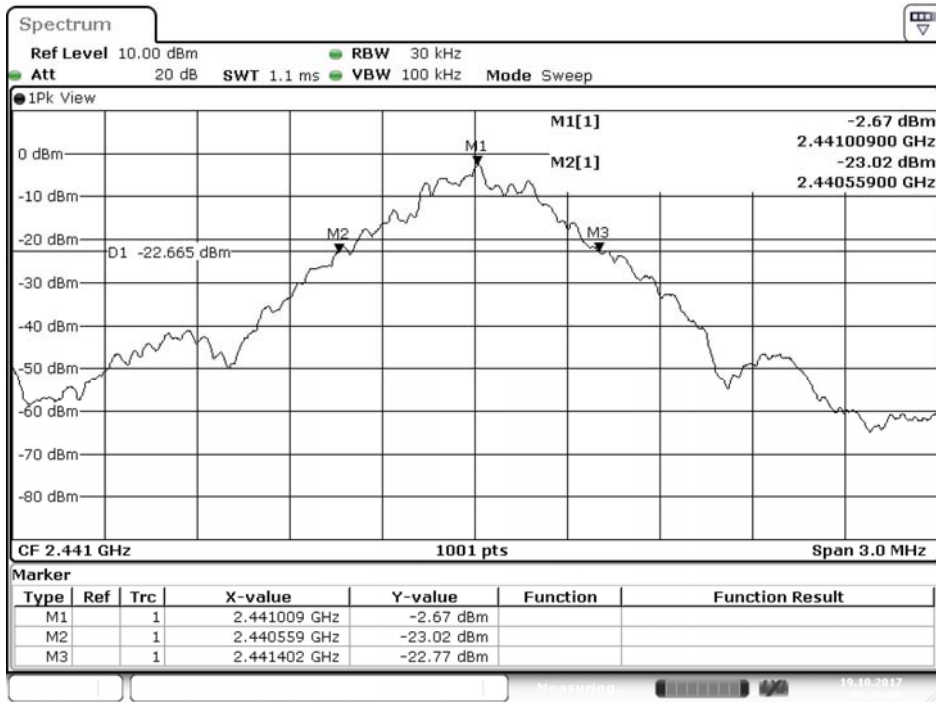

Date: 19.OCT.2017 09:26:07

Figure Channel 78:

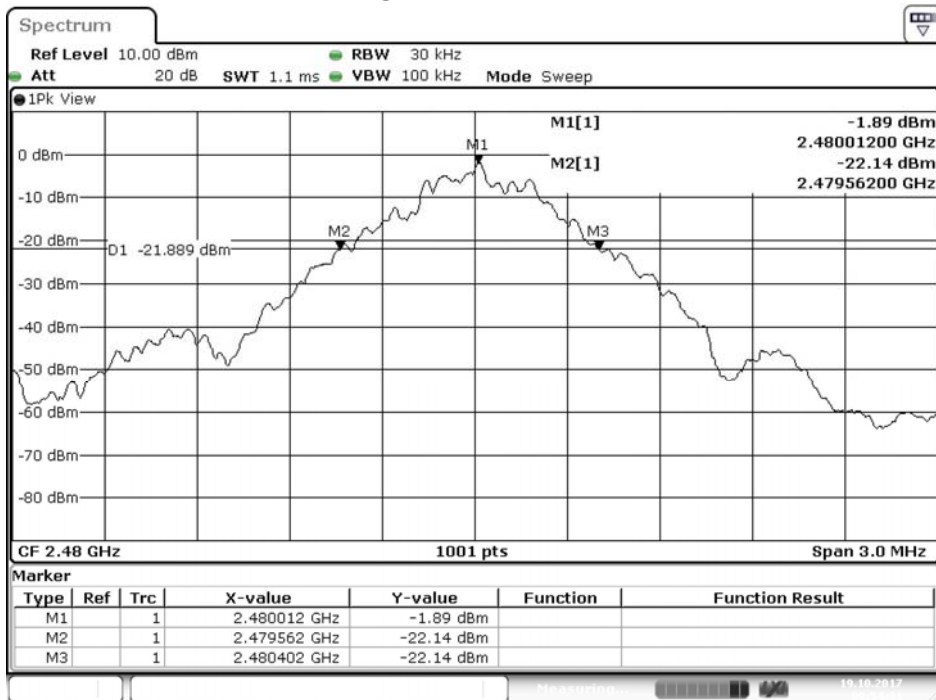


Date: 19.OCT.2017 09:54:31

Product : Wireless Headphones
 Test Item : Occupied Bandwidth Data
 Test Mode : Mode 2: Transmit - 3Mbps


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	1278	--	NA
39	2441	1263	--	NA
78	2480	1263	--	NA

Figure Channel 00:

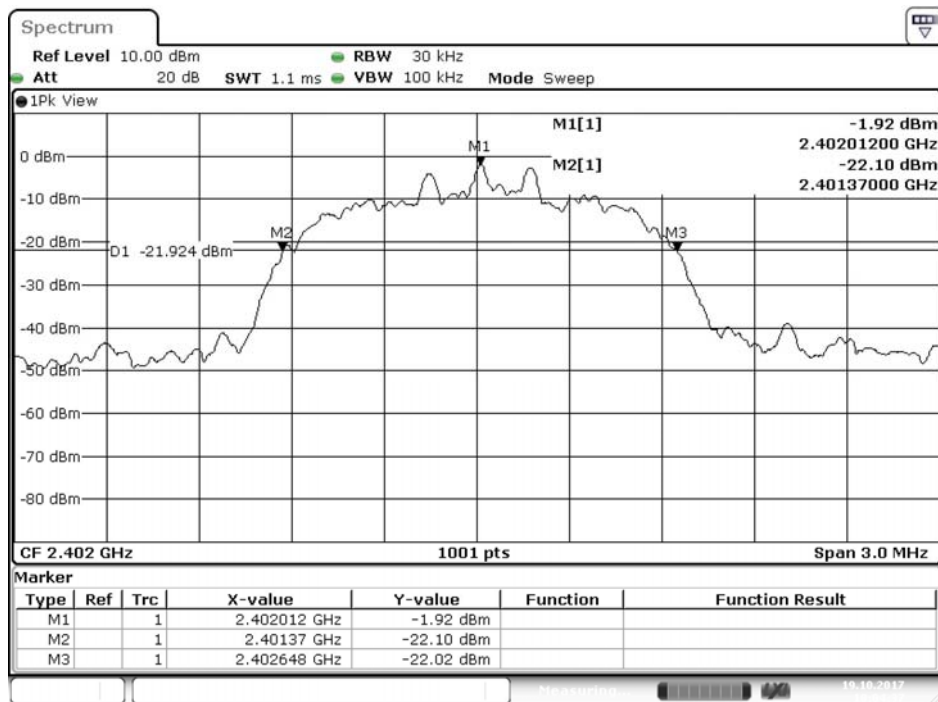


Date: 19.OCT.2017 10:04:38

Figure Channel 39:

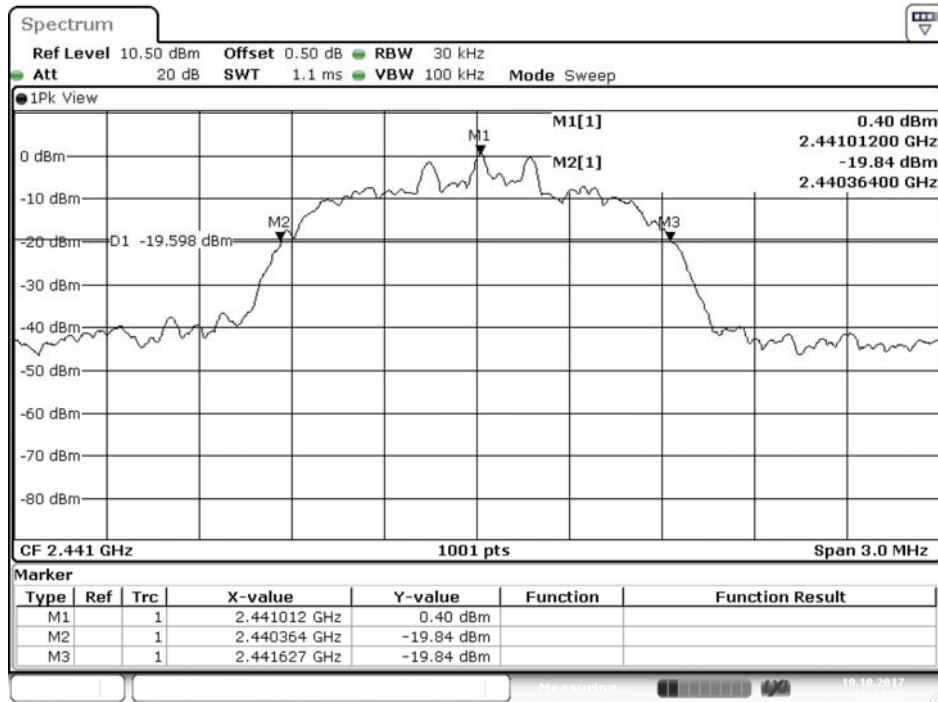

Date: 19.OCT.2017 10:14:54

Figure Channel 78:

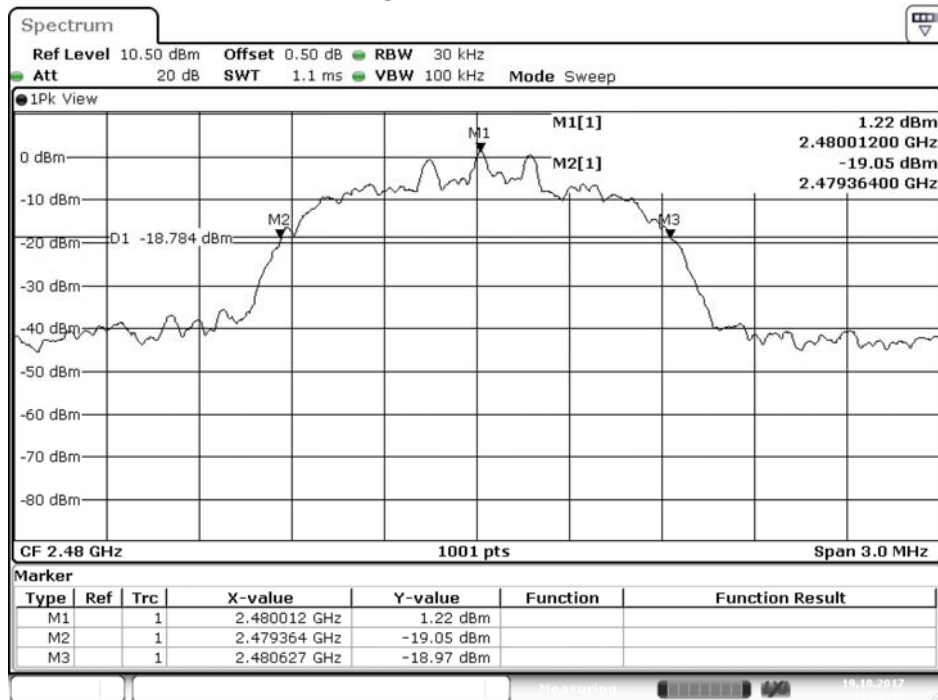

Date: 19.OCT.2017 10:28:50

11. EMI Reduction Method During Compliance Testing

No modification was made during testing.