

# **SAR TEST REPORT**

# Test Report No. 15106908H-F-R1

Customer	Audio-Technica Corporation	
Description of EUT	HANDHELD TRANSMITTER	
Model Number of EUT	ATW-T220cS	
FCC ID	JFZT220CS	
Test Regulation	FCC47CFR 2.1093	
Test Result	Complied	
Issue Date	June 28, 2024	
Remarks	The highest reported SAR Body : 0.10 W/kg (1 g)	

Representative Test Engineer	Approved By
YMosicya	S. Matsuyama
Yuta Moriya Engineer	Satofumi Matsuyama Engineer  ACCREDITED
	CERTIFICATE 5107.02
The testing in which "Non-accreditation" is displayed	is outside the accreditation scopes in UL Japan, Inc.
There is no testing item of "Non-accreditation".	

Report Cover Page - Form-ULID-003532 (DCS:13-EM-F0429) Issue# 23.0

Test Report No. 15106908H-F-R1 Page 2 of 70

## **ANNOUNCEMENT**

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested. (Laboratory was not involved in sampling.)
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers SAR technical requirements.
   It does not cover administrative issues such as Manual or non-SAR test related Requirements.
   (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided by the customer for this report is identified in SECTION 1.
- The laboratory is not responsible for information provided by the customer which can impact the validity of the results.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.

# **REVISION HISTORY**

## Original Test Report No. 15106908H-F

This report is a revised version of 15106908H-F. 15106908H-F is replaced with this report.

Revision	Test report No.	Date	Page Re	vised Co	ntents						
- (Original)	15106908H-F	May 31, 2024	-								
1	15106908H-F-R1	June 28, 2024	14.49 → SECTIO	ed measu 14.48	red averaç	ge pov	ver f	for 508	.125 M⊦	Iz in the	table.
			Date Tested	Test Freq	Model,S/N	T.S. Liqui		Measur Zoom Scan	Normalize to 1 W	Target (Ref. Value)	Delta ± 10 %
			2024/4/24	450	D450V3,1051	Head	1 g	1.09 0.73	4.4 2.9	4.56 3.06	-4.4 -4.7
			$\rightarrow$								
			Date Tested	TestFreq	Model,S/N	T.S. Liquid		Zoom Scan [W/kg]	Normalize to 1 W [W/kg]	Target (Ref. Value) [W/kg]	Delta ± 10 %
			2024/4/24	450	D450V3,1051		1 g 10 g	1.09 0.728	4.36 2.91	4.56 3.06	-4.39 -4.90
			Appendix		of calibration				LIMS ID	: 141468	

Test Report No. 15106908H-F-R1 Page 3 of 70

## Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	ICES	Interference-Causing Equipment Standard
AC	Alternating Current	IEC	International Electrotechnical Commission
AFH	Adaptive Frequency Hopping	IEEE	Institute of Electrical and Electronics Engineers
AM	Amplitude Modulation	IF	Intermediate Frequency
Amp, AMP	Amplifier	ILAC	International Laboratory Accreditation Conference
ANSI	American National Standards Institute	ISED	Innovation, Science and Economic Development Canada
Ant, ANT	Antenna	ISO	International Organization for Standardization
AP	Access Point	JAB	Japan Accreditation Board
APD	Absorbed Power Density	LAN	Local Area Network
ASK	Amplitude Shift Keying	LIMS	Laboratory Information Management System
Atten., ATT	Attenuator	MCS	Modulation and Coding Scheme
AV	Average	MRA	Mutual Recognition Arrangement
BPSK	Binary Phase-Shift Keying	N/A	Not Applicable
BR	Bluetooth Basic Rate	NIST	National Institute of Standards and Technology
BT	Bluetooth	NS	Nerve Stimulation
BT LE	Bluetooth Low Energy	NSA	Normalized Site Attenuation
BW	BandWidth	NVLAP	National Voluntary Laboratory Accreditation Program
Cal Int	Calibration Interval	OBW	Occupied Band Width
CCK	Complementary Code Keying	OFDM	Orthogonal Frequency Division Multiplexing
Ch., CH	Channel	P/M	Power meter
CISPR	Comite International Special des Perturbations Radioelectriques	PCB	Printed Circuit Board
CW	Continuous Wave	PER	Packet Error Rate
DBPSK	Differential BPSK	PHY	Physical Layer
DC	Direct Current	PK	Peak
D-factor	Distance factor	PN	Pseudo random Noise
DFS	Dynamic Frequency Selection	PRBS	Pseudo-Random Bit Sequence
DQPSK	Differential QPSK	PSD	Power Spectral Density
DSSS	Direct Sequence Spread Spectrum	QAM	Quadrature Amplitude Modulation
EDR	Enhanced Data Rate	QP	Quasi-Peak
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	QPSK	Quadri-Phase Shift Keying
EMC	ElectroMagnetic Compatibility	RBW	Resolution Band Width
EMI	ElectroMagnetic Interference	RDS	Radio Data System
EN	European Norm	RE	Radio Equipment
ERP, e.r.p.	Effective Radiated Power	RF	Radio Frequency
EU	European Union	RMS	Root Mean Square
EUT	Equipment Under Test	RSS	Radio Standards Specifications
Fac.	Factor	Rx	Receiving
FCC	Federal Communications Commission	SA, S/A	Spectrum Analyzer
FHSS	Frequency Hopping Spread Spectrum	SAR	Specific Absorption Rate
FM	Frequency Modulation	SG	Signal Generator
Freq.	Frequency	SVSWR	Site-Voltage Standing Wave Ratio
FSK	Frequency Shift Keying	TR	Test Receiver
GFSK	Gaussian Frequency-Shift Keying	Tx	Transmitting
GNSS	Global Navigation Satellite System	VBW	Video BandWidth
GPS	Global Positioning System		Vertical
		Vert.	
Hori.	Horizontal	WLAN	Wireless LAN
HPF	High-Pass Filter	WPT	Wireless Power Transmit

CONTENTS	PAGE
SECTION 1: Customer information	5
SECTION 2: Equipment under test (EUT)	5 5
2.1 Identification of EUT	5
2.2 Product Description	
SECTION 3: Test standard information	
3.1 Test Specification	
3.2 Procedure	
3.3 Additions or deviations to standard	6
3.4 Exposure limit	
3.5 SAR	
3.6 Test Location	
SECTION 4: Test result	
4.1 Result	
4.2 Stand-alone SAR result	8
4.3 Simultaneous transmission SAR result.	8
SECTION 5: Tune-up tolerance information and software information	
SECTION 6: RF Exposure Conditions (Test Configurations)	
6.1 Summary of the distance between antenna and surface of EUT	10
6.3 SAR test exclusion considerations according to KDB 447498 D01	
SECTION 7: Description of the Body setup	
7.1 Procedure for SAR test position determination	13
7.2 Test position for Body setup	
SECTION 8: Description of the operating mode	
8.1 Output Power and SAR test required	
SECTION 9: Test surrounding	
9.1 Measurement uncertainty	
SECTION 10: Parameter Check	
10.1 For SAR system check	
10.2 For SAR measurement	18
SECTION 11: System Check confirmation	
SECTION 12: Measured and Reported (Scaled) SAR Results	
12.1 Result of Body SAR of 519 MHz S-band	
12.2 Repeated measurement	
SECTION 13: Test instruments	
APPENDIX 1: System Check	
APPENDIX 1: System Check	
APPENDIX 2: SAK Measurement data	
APPENDIX 4: Photographs of test setup	66

Test Report No. 15106908H-F-R1 Page 5 of 70

#### **SECTION 1: Customer information**

Company Name	Audio-Technica Corporation
Address 2-46-1 Nishi-naruse, Machida, Tokyo 194-8666, Japan	
Telephone Number	+81-42-739-9121
Contact Person	Hirohisa Yamamoto

The information provided by the customer is as follows;

- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer Information
- SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date
- SECTION 5: Tune-up tolerance information and software information

## **SECTION 2: Equipment under test (EUT)**

#### 2.1 Identification of EUT

Description	HANDHELD TRANSMITTER	
Model Number	ATW-T220cS	
Serial Number	No.9	
Condition	Production prototype	
	(Not for Sale: This sample is equivalent to mass-produced items.)	
Modification	No Modification by the test lab	
Receipt Date	April 1, 2024	
Test Date	April 12, 2024 (For Output power measurement)	
	April 24, 2024 (For SAR measurement)	

#### 2.2 Product Description

## **General Specification**

Rating	DC 3.0 V (Battery (2 x Alkaline AA Batteries))
Option battery	N/A
Body-worn accessory	N/A

## **Radio Specification**

This report contains data provided by the customer which can impact the validity of results. UL Japan, Inc. is only responsible for the validity of results after the integration of the data provided by the customer. The data provided by the customer is marked "a)" in the table below.

Radio type	Transmitter	
Modulation type	FM	
Necessary bandwidth	110 kHz = 2M + 2D	
	where M: Maximum modulation frequency = 15 kHz	
	D: Peak deviation = 40 kHz	
Declared Channel	200 kHz	
Bandwidth (B)		
Frequency of operation	508.125 MHz to 526.825 MHz	
RF power	10 mW, 30 mW	
Antenna gain <sup>a)</sup> :	0 dBi max	

Test Report No. 15106908H-F-R1 Page 6 of 70

#### **SECTION 3: Test standard information**

## 3.1 Test Specification

Title : FCC47CFR 2.1093

Radiofrequency radiation exposure evaluation: portable devices.

## **Published RF exposure KDB procedures**

⊠ KDB 447498 D01(v06)	RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices	
☐ KDB 447498 D02(v02r01)	SAR Measurement Procedures for USB Dongle Transmitters	
☐ KDB 648474 D04(v01r03)	SAR Evaluation Considerations for Wireless Handsets	
☐ KDB 941225 D01(v03r01)	3G SAR Measurement Procedures	
☐ KDB 941225 D05(v02r05)	SAR Evaluation Considerations for LTE Devices	
☐ KDB 941225 D06(v02r01)	SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities (Hot Spot SAR)	
☐ KDB 941225 D07(v01r02)	SAR Evaluation Procedures for UMPC Mini-Tablet Devices	
☐ KDB 616217 D04(v01r02)	SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers	
☑ KDB 865664 D01(v01r04)	SAR Measurement Requirements for 100 MHz to 6 GHz	
☐ KDB 248227 D01(v02r02)	SAR Guidance for 802.11(Wi-Fi) Transmitters	

#### Reference

[1] Schmid & Partner Engineering AG, DASY Manual, September 2019

[2] IEEE Std 1528-2013

#### 3.2 Procedure

Transmitter	Radio microphone		
Test Procedure Published RF exposure KDB procedures			
Category SAR			
Note: UL Japan, Inc.'s SAR Work Procedures: Work Instructions-ULID-003598 and Work Instructions-			
ULID-003599			

## 3.3 Additions or deviations to standard

Other than above, no addition, exclusion nor deviation has been made from the standard.

Test Report No. 15106908H-F-R1 Page 7 of 70

#### 3.4 Exposure limit

(A) Limits for Occupational/Controlled Exposure (W/kg)

- 4	. ,	1 ( • 3/	
Spatial Average		Spatial Peak	Spatial Peak
	(averaged over the whole	(averaged over any 1 g of	(hands/wrists/feet/ankles averaged over 10
ı	body)	tissue)	g)
	0.4	8.0	20.0

(B) Limits for General population/Uncontrolled Exposure (W/kg)

Spatial Average	Spatial Peak	Spatial Peak
(averaged over the whole	(averaged over any 1 g of	(hands/wrists/feet/ankles averaged over
body	tissue)	10 g)
0.08	1.6	4.0

**Occupational/Controlled Environments:** are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

**General Population/Uncontrolled Environments:** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

# NOTE:GENERAL POPULATION/UNCONTROLLED EXPOSURE SPATIAL PEAK(averaged over any 1 g of tissue) LIMIT 1.6 W/kg

#### 3.5 SAR

Specific Absorption Rate (SAR): The time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density ( $\rho$ ), as shown in the following equation:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg) or equivalently milliwatts per gram (mW/g).

SAR is related to the E-field at a point by the following equation:

$$SAR = \frac{\sigma |E|^2}{\rho}$$

where

 $\sigma$  = conductivity of the tissue (S/m)

 $\rho$  = mass density of the tissue (kg/m3)

E = rms E-field strength (V/m)

#### 3.6 Test Location

UL Japan, Inc. Ise EMC Lab. Shielded room for SAR testing

\*A2LA Certificate Number: 5107.02 / FCC Test Firm Registration Number: 884919

ISED Lab Company Number: 2973C / CAB identifier: JP0002 4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81-596-24-8999

Test Report No. 15106908H-F-R1 Page 8 of 70

#### **SECTION 4: Test result**

## 4.1 Result

Complied

Highest values at each band are listed next section.

#### 4.2 Stand-alone SAR result

RF Exposure C	anditions	Equipment Class - Highest Reported SAR (W/kg)
Kr Exposule O	DITUITIONS	Radio microphone
Standalone Tx (1-g SAR)	Body-worn	0.098

<sup>\*</sup>Details are shown at section 12

## 4.3 Simultaneous transmission SAR result

EUT does not have simultaneous transmission functionality.

Test Report No. 15106908H-F-R1 Page 9 of 70

## **SECTION 5: Tune-up tolerance information and software information**

Maximum tune-up tolerance limit

Mode	band	·	Maximum tune-up tolerance limit [mW] (Burst Average)
Radio microphone	508.125 to 526.825	15.31	34.00

## Software setting

\*The power value of the EUT was set for testing as follows (setting value might be different from product specification value);

Power settings: 30 mW Software: Ver1.0

The test was performed with condition that obtained the maximum average power (Burst) in pre-check. Any conditions under the normal use do not exceed the condition of setting.

In addition, end users cannot change the settings of the output power of the product.

<sup>\*</sup>This setting of software is the worst case.

Test Report No. 15106908H-F-R1 Page 10 of 70

## **SECTION 6: RF Exposure Conditions (Test Configurations)**

## 6.1 Summary of the distance between antenna and surface of EUT

Test position	Distance
Front	4.5 mm
Rear	4.5 mm
Left	4.5 mm
Right	4.5 mm
Тор	211.6 mm
Bottom	6.5 mm

<sup>\*</sup>Details are shown in appendix 4

Test Report No. 15106908H-F-R1 Page 11 of 70

#### 6.3 SAR test exclusion considerations according to KDB 447498 D01

The following is based on KDB 447498 D01.

1) The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]  $\cdot [\sqrt{f(GHz)}] \le 3.0$  for 1-g SAR and  $\le 7.5$  for 10-g extremity SAR

- The upper frequency of the frequency band was used in order to calculate standalone SAR test exclusion considerations.
- 2. Power and distance are rounded to the nearest mW and mm before calculation
- 3. The result is rounded to one decimal place for comparison
- 4. The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine</p>
- 5. "N/A" displayed on below exclusion calculation means not applicable this formula since distance between antenna and surface is > 50 mm.

When the calculated threshold value by a numerical formula above-mentioned in the following table is 3.0 or less, SAR test is excluded.

The following table lists only the highest tune up limit in each frequency band.

The following table lists only the highest channel in each frequency band.

#### SAR exclusion calculations for antenna <50mm from the user

,	Antenna	Tx Interface	Frequency (MHz)	Output	Pow er	Calculated Threshold Value								
				dBm	mW	Front	Rear	Left	Right	Тор	Bottom			
	Main	FM	526.825	15.31	34	4.9 -MEASURE-	4.9 -MEASURE-	4.9 -MEASURE-	4.9 -MEASURE-	N/A	4.9 -MEASURE-			

Test Report No. 15106908H-F-R1 Page 12 of 70

- 2) At 100 MHz to 6 GHz and for test separation distances > 50 mm, the SAR test exclusion threshold is determined according to the following.
- a)  $[(3.50)/(\sqrt{f(GHz)})) + (test separation distance 50 mm) \cdot (f(MHz)/150)] \, mW$  at > 100 MHz and  $\leq$  1500 MHz b)  $[(3.50)/(\sqrt{f(GHz)})) + (test separation distance 50 mm) \cdot 10] \, mW$  at > 1500 MHz and  $\leq$  6 GHz
- 1. The upper frequency of the frequency band was used in order to calculate standalone SAR test exclusion considerations.
- 2. Power and distance are rounded to the nearest mW and mm before calculation
- 3. "N/A" displayed on below exclusion calculation means not applicable this formula since distance between antenna and surface is < 50 mm.

When output power is less than the calculated threshold value by a numerical formula above-mentioned in the following table, SAR test is excluded.

The following table lists only the highest tune up limit in each frequency band.

The following table lists only the highest channel in each frequency band.

#### SAR exclusion calculations for antenna >50mm from the user

Antenna	Tx Interface	Frequency (MHz)	Output	Pow er	Calculated Threshold Value							
			dBm	mW	Front	Rear	Left	Right	Тор	Bottom		
Main	FM	526.825	15.31	34	N/A	N/A	N/A	N/A	774.2 mW -EXEMPT-	N/A		

Test Report No. 15106908H-F-R1 Page 13 of 70

## **SECTION 7: Description of the Body setup**

## 7.1 Procedure for SAR test position determination

The tested procedure was performed according to the KDB 447498 D01 (Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies),

## 7.2 Test position for Body setup

No.	Position	Test distance	Radio microphone Tested
1	Front	0 mm	
2	Rear	0 mm	
3	Left	0 mm	
4	Right	0 mm	
5	Тор	0 mm	
6	Bottom	0 mm	$\square$

Test Report No. 15106908H-F-R1 Page 14 of 70

## **SECTION 8: Description of the operating mode**

## 8.1 Output Power and SAR test required

Date of Output power measurement April 12, 2024 Temperature / Humidity 24 deg. C / 49 % RH

Mode	(MHz)		Measured average Pow er (dBm) (Burst)	Initial test configuration	
Radio	508.125	15.31	14.48		
microphone	518.775	15.31	14.49	Yes	
moroprioric	526.825	15.31	14.38		

Test Report No. 15106908H-F-R1 Page 15 of 70

## **SECTION 9: Test surrounding**

## 9.1 Measurement uncertainty

This measurement uncertainty budget is suggested by IEEE Std 1528(2013) and determined by Schmid & Partner Engineering AG (DASY5/6 Uncertainty Budget). Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz Section 2.8.1., when the highest measured SAR(1 g) within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std.1528 (2013) is not required in SAR reports submitted for equipment approval.

300 MHz to 3 GHz

5		Uncer	t.	Prob.	Div.	(ci)	(ci)	Std. Unc.	Std.Unc.
Error Description  Measurement System		value		Dist.		1g	10g	(1g)	(10g)
Probe Calibration	±	6.0	%	N	1	1	1	±6.00%	±6.00%
Axial Isotropy	±	4.7	%	R	√3	0.7	0.7	±1.9%	±1.9%
The state of the s	_	9.6	%	R	√3	0.7	0.7	+3.9%	±3.9%
Hemispherical Isotropy	±				100	-			
Boundary Effects	±	1.0	%	R	√3	1	1	±0.6%	±0.6%
Linearity	±	4.7	%	R	√3	1	1	±2.7%	±2.7%
System Detection Limits	±	1.0	%	R	√3	1	1	±0.6%	±0.6%
Modulation Response	±	2.4	%	R	√3	1	1	±1.4%	±1.4%
Readout Electronics	±	0.3	%	N	1	1	1	±0.3%	±0.3%
Response Time	±	0.8	%	R	√3	1	1	±0.5%	±0.5%
Integration Time	±	2.6	%	R	√3	1	1	±1.5%	±1.5%
RF Ambient Noise	±	3.0	%	R	√3	1	1	±1.7%	±1.7%
RF Ambient Reflections	±	3.0	%	R	√3	1	1	±1.7%	±1.7%
Probe Positioner	±	0.02	%	R	√3	1	1	±0.0%	±0.0%
Probe Positioning	±	0.4	%	R	√3	1	1	±0.2%	±0.2%
Max. SAR Eval.	±	2.0	%	R	√3	1	1	±1.2%	±1.2%
Test Sample Related									
Device Positioning	±	2.9	%	N	1	1	_	±2.9%	±2.9%
Device Holder	±	3.6	%	N	1	1	_	±3.6%	±3.6%
Power Scaling	±	0.0	%	R	√3	1		±0.0%	±0.0%
Power Drift	±	5.0	%	R	√3	1	1	±2.9%	±2.9%
Phantom and Setup					,				
Phantom Uncertainty	±	6.1	%	R	√3	1	1	±3.5%	±3.5%
SAR correction	±	1.9	%	N	1	1	0.84	±1.9%	±1.6%
Liquid Conductivity (mea.)	±	5.0	%	N	1	0.78	0.71	±3.9%	±3.6%
Liquid Permittivity (mea.)	±	5.0	%	N	1	0.23	0.26	±1.2%	±1.3%
Temp. unc Conductivity	±	3.4	%	R	√3	0.78	0.71	±1.5%	±1.4%
Temp. unc Permittivity	±	0.4	%	R	√3	0.23	0.26	±0.1%	±0.1%
Combined Std. Uncertainty								±11.8%	±11.7%
Expanded STD Uncertainty (K	=2)							±23.6%	±23.3%

Note: This uncertainty budget for validation is worst-case. Table of uncertainties are listed for ISO/IEC 17025.

## 3 GHz to 6 GHz

		Uncer	t.	Prob.	Div.	(ci)	(ci)	Std. Unc.	Std.Unc.
Error Description		value		Dist.		1g	10g	(1g)	(10g)
Measurement System	1				T.	1 .			
Probe Calibration	±	6.55	%	N	1	1	1	±6.55%	±6.55%
Axial Isotropy	±	4.7	%	R	√3	0.7	0.7	±1.9%	±1.9%
Hemispherical Isotropy	±	9.6	%	R	√3	0.7	0.7	±3.9%	±3.9%
Boundary Effects	±	2.0	%	R	√3	1	1	±1.2%	±1.2%
Linearity	±	4.7	%	R	√3	1	1	±2.7%	±2.7%
System Detection Limits	±	1.0	%	R	√3	1	1	±0.6%	±0.6%
Modulation Response	±	2.4	%	R	√3	1	1	±1.4%	±1.4%
Readout Electronics	±	0.3	%	N	1	1	1	±0.3%	±0.3%
Response Time	±	0.8	%	R	√3	1	1	±0.5%	±0.5%
Integration Time	±	2.6	%	R	√3	1	1	±1.5%	±1.5%
RF Ambient Noise	±	3.0	%	R	√3	1	1	±1.7%	±1.7%
RF Ambient Reflections	±	3.0	%	R	√3	1	1	±1.7%	±1.7%
Probe Positioner	±	0.04	%	R	√3	1	1	±0.0%	±0.0%
Probe Positioning	±	0.8	%	R	√3	1	1	±0.5%	±0.5%
Max. SAR Eval.	±	4.0	%	R	√3	1	1	±2.3%	±2.3%
Test Sample Related				•		•		•	•
Device Positioning	±	2.9	%	N	1	1	1	±2.9%	±2.9%
Device Holder	±	3.6	%	N	1	1	1	±3.6%	±3.6%
Power Scaling	±	0.0	%	R	√3	1	1	±0.0%	±0.0%
Power Drift	±	5.0	%	R	√3	1	1	±2.9%	±2.9%
Phantom and Setup									
Phantom Uncertainty	±	6.6	%	R	√3	1	1	±3.8%	±3.8%
SAR correction	±	1.9	%	N	1	1	0.84	±1.9%	±1.6%
Liquid Conductivity (mea.)	±	5.0	%	N	1	0.78	0.71	±3.9%	±3.6%
Liquid Permittivity (mea.)	±	5.0	%	N	1	0.23	0.26	±1.2%	±1.3%
Temp. unc Conductivity	±	3.4	%	R	√3	0.78	0.71	±1.5%	±1.4%
Temp. unc Permittivity	±	0.4	%	R	√3	0.23	0.26	±0.1%	±0.1%
Combined Std. Uncertainty								±12.4%	±12.3%
Expanded STD Uncertainty (K	=2)							±24.8%	±24.5%

Note: This uncertainty budget for validation is worst-case. Table of uncertainties are listed for ISO/IEC 17025.

Test Report No. 15106908H-F-R1 Page 17 of 70

#### **SECTION 10: Parameter Check**

The dielectric parameters were checked prior to assessment using the DAK dielectric probe kit. The dielectric parameters measurement is reported in each correspondent section.

The dielectric parameters is measured within 24 hours before the SAR measurements, and for every 48 hours of continuous use.

According to KDB 865664 D01, +/- 5 % tolerances are required for  $\varepsilon r$  and  $\sigma$  and then below table which is the target value of the simulated tissue liquid is quoted from KDB 865664 D01.

Target Frequency	Н	ead	Во	ody
(MHz)	$\mathcal{E}_{\mathrm{r}}$	σ(S/m)	Eq	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 - 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

( $\varepsilon_r$  = relative permittivity,  $\sigma$  = conductivity and  $\rho$  = 1000 kg/m<sup>3</sup>)

The dielectric parameters are linearly interpolated between the closest pair of target frequencies to determine the applicable dielectric parameters corresponding to the device test frequency.

Test Report No. 15106908H-F-R1 Page 18 of 70

## 10.1 For SAR system check

DIELECTRIC	DIELECTRIC PARAMETERS MEASUREMENT RESULTS												
Date	Ambient	Relative	Liquid type	Liquid	Measured	Target	Target	Measure	Measure	Deviation $\sigma$	Deviation εr	Limit	Remark
	Temp.	Humidity		Temp.	Frequency	[σ]	[ɛr]	[σ]	[ɛr]	[%]	[%]	[%]	
	[deg.c]	[%]		[deg.c]	[MHz]								
2024/4/24	24.0	40	HBBL600-10000	24.6	450.0	0.87	43.5	0.83	43.0	-4.3	-1.2	+/- 5	

## 10.2 For SAR measurement

DIELECTRIC	PARAMETER	RS MEASUR	EMENT RESULTS										
Date	Ambient	Relative	Liquid type	Liquid	Measured	Target	Target	Measure	Measure	Deviation σ	Deviation εr	Limit	Remark
	Temp.	Humidity		Temp.	Frequency	[σ]	[ɛr]	[σ]	[ɛr]	[%]	[%]	[%]	
	[deg.c]	[%]		[deg.c]	[MHz]								
2024/4/24	24.0	40	HBBL600-10000	24.6	508.125	0.87	43.2	0.85	42.6	-3.0	-1.3	+/- 5	
2024/4/24	24.0	40	HBBL600-10000	24.6	518.775	0.88	43.1	0.85	42.6	-2.7	-1.3	+/- 5	
2024/4/24	24.0	40	HBBL600-10000	24.6	526.825	0.88	43.1	0.85	42.6	-2.4	-1.2	+/- 5	

Test Report No. 15106908H-F-R1 Page 19 of 70

#### **SECTION 11: System Check confirmation**

The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ±0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.

The depth of tissue-equivalent liquid in a phantom must be  $\geq 15.0$  cm  $\pm 0.5$  cm for SAR measurements  $\leq 3$  GHz and  $\geq 10.0$  cm  $\pm 0.5$  cm for measurements > 3 GHz.

The DASY system with an E-Field Probe was used for the measurements.

The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom).

The standard measuring distance was 10 mm (above 1 GHz to 6 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.

The coarse grid with a grid spacing of 15 mm (below 2 GHz), 12 mm (2 GHz to 4 GHz) and 10 mm (4 GHz to 6 GHz) was aligned with the dipole.

Around this point found in the coarse grid, a volume of 30 mm x 30 mm x 30 mm or more was assessed by measuring 7 x 7 x 7 points at least for below 3 GHz, a volume of 28 mm x 28 mm x 34 mm or more was assessed by measuring 8 x 8 x 8(ratio step method) points at least for 3 GHz to 5 GHz and a volume of 28 mm x 28 mm x 24 mm or more was assessed by measuring 8 x 8 x 8(ratio step method) points at least for 5 GHz to 6 GHz.

Distance between probe sensors and phantom surface was set to 1.4 mm.

The dipole input power (forward power) was 100 mW or 250 mW.

The results are normalized to 1 W input power.

#### **Target Value**

Freq [MHz]		Model,S/N		He	ad
				(SPEAG)	(SPEAG)
				1 g [W/kg]	10 g [W/kg]
	450	D450V3,1051	450D450V3,1051	4.56	3.06

The target(reference) SAR values can be obtained from the calibration certificate of system validation dipoles(Refer to Appendix 3). The target SAR values are SAR measured value in the calibration certificate scaled to 1 W.

							Measure	ed Results	Target	
Date Tested	Test Frea	Model,S/N	T.S		Zoom	Normalize	(Ref. Value)	Delta		
Bate rested	10011104	Wiodoi,O/IT	Liquid		Scan	to 1 W	[W/kg]	± 10 %		
					[W/kg]	[W/kg]	[vv/kg]			
2024/4/24	450	D450V3,1051	Head	1 g	1.09	4.36	4.56	-4.39		
				10 g	0.728	2.91	3.06	-4.90		

Test Report No. 15106908H-F-R1 Page 20 of 70

### SECTION 12: Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows

#### KDB 447498 D01 (General RF Exposure Guidance):

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ♦ ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ♦ ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- When reported SAR value is exceed 1.2 W/kg(if any), device holder perturbation verification is required; however, since distance between device holder and antenna of EUT is enough, it was not conducted.
- Reported SAR= Measured SAR [W/kg] \* Power Scaled factor \* Duty Scaled factor Maximum tune-up tolerance limit is by the specification from a customer.
  - \* Power Scaled factor = Maximum tune-up tolerance limit [mW] / Measured power [mW]
  - \* Duty Scaled factor = 1 / Duty (%) / 100
- Maximum tune-up tolerance limit is by the specification from a customer.

Note: Measured value is rounded round off to three decimal places

Test Report No. 15106908H-F-R1 Page 21 of 70

## 12.1 Result of Body SAR of 519 MHz S-band

				Power	(dBm)	Power		Duty	1-g SAF	R (W/kg)	
Test Position	Dist. (mm)	Mode	Freq. (MHz)	Tune-up upper Power	Measured average Power	Scaled factor	Duty (%)	Scaled factor	Meas.	Reported	Plot No.
		Radio	508.125	15.31	14.48	1.21	100.0	1.00			
Front	0	microphone	518.775	15.31	14.49	1.21	100.0	1.00	0.063	0.076	
		inicrophone	526.825	15.31	14.38	1.24	100.0	1.00			
		Radio microphone	508.125	15.31	14.48	1.21	100.0	1.00			
Rear	0		518.775	15.31	14.49	1.21	100.0	1.00	0.051	0.062	
			526.825	15.31	14.38	1.24	100.0	1.00			
	0	Radio	508.125	15.31	14.48	1.21	100.0	1.00			
Left		microphone	518.775	15.31	14.49	1.21	100.0	1.00	0.053	0.064	
		illicropilone	526.825	15.31	14.38	1.24	100.0	1.00			
		Radio	508.125	15.31	14.48	1.21	100.0	1.00	0.081	0.098	1
Right	0	microphone	518.775	15.31	14.49	1.21	100.0	1.00	0.064	0.077	
		illicropilone	526.825	15.31	14.38	1.24	100.0	1.00	0.038	0.047	
		Radio	508.125	15.31	14.48	1.21	100.0	1.00			
Bottom	0	microphone	518.775	15.31	14.49	1.21	100.0	1.00	0.025	0.030	
		moophone	526.825	15.31	14.38	1.24	100.0	1.00			

#### 12.2 Repeated measurement

According to KDB 865664 D1.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps
- 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10 % from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

Test	Configura	tion		_	Meas. SA	R (W/kg)	Largest to	D
Exposure	Position	Dist. (mm)	Mode	Freq. (MHz)	Original	Repeated	Smallest SAR Ratio	Plot No.
Body	Right	0	Radio microphone	526.825	0.081	N/A	N/A	ı

#### Note(s):

N/A: Repeated Measurement is not required since the original highest measured SAR for all band is < 0.80 W/kg.

Test Report No. 15106908H-F-R1 Page 22 of 70

#### **SECTION 13: Test instruments**

## For Output power measurement

LIMS ID	Description	Manufacturer	Model	Serial	Last Cal Date	Interval
244712	Thermo-Hygrometer	HIOKI E.E. CORPORATION	LR5001	231202106	2024/01/25	12
141810	Pow er Meter	Anritsu Corporation	ML2495A	824014	12/12/2023	12
141832	Pow er sensor	Anritsu Corporation	MA2411B	738174	12/12/2023	12
141171	Attenuator(20dB)_DC-1GHz_N	Weinschel Corp	MODEL 1	BG0143	12/06/2023	12
141414	Microw ave Cable	Junkosha	MWX221	1207S407	08/01/2023	12
184490	Microw ave Cable	Murata Manufacturing Company, Ltd.	MXHS83QE3000	-	09/12/2023	12

#### For SAR measurement

LIMS ID	Description	Manufacturer	Model	Serial	Last Cal Date	Interval
141482	Data Acquisition Electronics	Schmid & Partner Engineering AG	DAE4	509	2023/08/04	12
141589	Dosimetric E-Field Probe	Schmid & Partner Engineering AG	EX3DV4	3922	2023/08/11	12
141468	Dipole Antenna	Schmid & Partner Engineering AG	D450V3	1051	2021/09/17	36
142484	Device holder	Schmid & Partner Engineering AG	Mounting device for transmitte	-	2023/11/17	12
88581	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	-	2023/07/18	12
142247	SAR robot	Schmid & Partner Engineering AG	TX60 Lspeag	F10/5E3LA1/A	2024/04/30	12
142561	Dual Directional Coupler	Keysight Technologies Inc	778D	MY52180243	-	-
142056	2mm Oval Flat Phantom	Schmid & Partner Engineering AG	QDOVA001BB	1045	2023/05/10	12
141182	Dielectric assessment softw are	Schmid & Partner Engineering AG	DAK	-	-	-
173900	Software for MA24106A	Anritsu Corporation	Anritsu Pow erXpert	-	-	-
197379	Dielectric assessment kit	Schmid & Partner Engineering AG	DAKS-3.5	1058	2023/05/22	12
142313	Attenuator	Telegrartner	J01156A0011	42294119	-	-
141865	Vector Reflectometer	Copper Mountain Technologies	PLANAR R140	0110614	2023/05/19	12
141574	Digital thermometer	LKM electronic	DTM3000	-	2023/07/18	12
141843	Pow er sensor	Anritsu Corporation	MA24106A	1026164	2024/03/15	12
141844	Pow er sensor	Anritsu Corporation	MA24106A	1031504	2024/03/15	12
141875	Pre Amplifier	R&K	R&K CGA020M602-2633R	B30550	2023/06/27	12
176484	Head Simulating Liquid	Schmid & Partner Engineering AG	HBBL600-10000V6	SL AAH U16 B	-	-
141181	Dasy5	Schmid & Partner Engineering AG	DASY5	-	-	-
141890	Signal Generator	Keysight Technologies Inc	N5181A	MY47421098	2023/11/10	12
142865	Water, distilled	KISHIDA CHEMICAL Co.,Ltd.	020-85566	K70244M	-	-
141311	Attenuator	Weinschel Associates	WA1-20-33	100131	2024/04/03	12
141808	Dual Pow er Meter	Keysight Technologies Inc	E4419B	MY45102060	2023/08/25	12
221492	Pow er sensor	Keysight Technologies Inc	E9300H	MY62080002	2023/08/25	12
244706	Thermo-Hygrometer	A & D	AD-5648A	1003	2024/01/25	12
	_					

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

SAR room is checked before every testing and ambient noise is <0.012 W/kg

Test Report No. 15106908H-F-R1 Page 23 of 70

## **APPENDIX 1: System Check**

#### System check result Body 450 MHz

Communication System Channel Number: 0; Duty Cycle: 1:1

Medium parameters used: f = 450 MHz;  $\sigma$  = 0.832 S/m;  $\epsilon_r$  = 42.985;  $\rho$  = 1000 kg/m<sup>3</sup>

#### DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Electronics: DAE4 Sn509; Calibrated: 2023/08/04 Probe: EX3DV4 SN3922; ConvF(11.23, 11.23, 11.23) @ 450 MHz; Calibrated: 2023/08/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI v4.0 (20deg probe tilt); Phantom section: Flat Section; Type: QDOVA001BB
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin/250 mW/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm Maximum value of SAR (interpolated) = 1.48 W/kg

Pin/250 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx= 5mm, dy=5 mm, dz=5 mm

Reference Value = 43.56 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.70 W/kg

SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.728 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 64%


Maximum value of SAR (measured) = 1.48 W/kg

Pin/250 mW/Z Scan 2 (1x1x7): Measurement grid: dx=20 mm, dy=20 mm, dz=5 mm Maximum value of SAR (measured) = 1.48 W/kg

Ambient Temp.: 24.0 degree.C. Liquid Temp.; 24.6 degree.C.

Liquid temp. is kept within the 2 degree.C. during the test.

Date: 2024/04/24

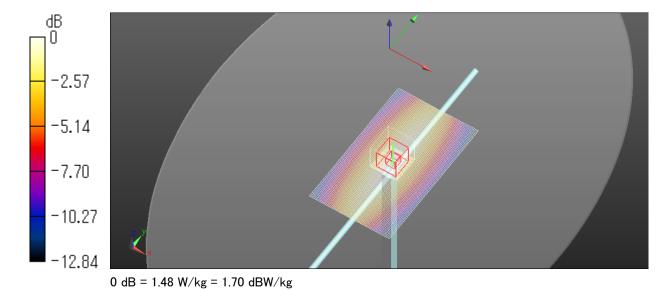

Test Report No. 15106908H-F-R1 Page 24 of 70

#### **APPENDIX 2: SAR Measurement data**

#### **Evaluation procedure**

#### The evaluation was performed with the following procedure:

**Step 1:** Measurement of the E-field at a fixed location above the ear point or central position of flat phantom was used as a reference value for assessing the power drop.

**Step 2:** The SAR distribution at the exposed side of head or body position was measured at a distance of each device from the inner surface of the shell. The area covered the entire dimension of the antenna of EUT and the horizontal grid spacing was 15 mm x 15 mm, 12 mm x 12 mm, 10 mm x 10 mm. Based on these data, the area of the maximum absorption was determined by spline interpolation.

**Step 3:** Around this point found in the Step 2 (area scan), a volume of 30 mm x 30 mm x 30 mm or more was assessed by measuring 7 x 7 x 7 points at least for below 3 GHz, a volume of 28 mm x 28 mm x 34 mm or more was assessed by measuring 8 x 8 x 8(ratio step method (\*1)) points at least for 3 GHz to 5 GHz, a volume of 28 mm x 28 mm x 24 mm or more was assessed by measuring 8 x 8 x 8(ratio step method) points at least for 5 GHz to 6 GHz.

And for any secondary peaks found in the Step2 which are within 2 dB of maximum peak and not with this Step3 (Zoom scan) is repeated. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

(1). The data at the surface were extrapolated, since the center of the dipoles is 1 mm(EX3DV4) away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm [4]. A polynomial of the fourth order was calculated through the points in z-axes.

This polynomial was then used to evaluate the points between the surface and the probe tip.

- (2). The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 y 10) were interpolated to calculate the average.
- (3). All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

#### \*1. Ratio step method parameters used;

The first measurement point: 1.4 mm from the phantom surface, the initial grid separation: 1.4 mm, subsequent graded grid ratio: 1.4

These parameters comply with the requirement of the KDB 865664 D01.

Step 4: Re-measurement of the E-field at the same location as in Step 1.

Confirmation after SAR testing

It was checked that the power drift [W] is within +/-5 %. The verification of power drift during the SAR test is that DASY5 system calculates the power drift by measuring the e-filed at the same location at beginning and the end of the scan measurement for each test position.

DASY5 system calculation Power drift value[dB] =20log(Ea)/(Eb)

 $\begin{array}{lll} \mbox{Before SAR testing} & : \mbox{Eb } [\mbox{V/m}] \\ \mbox{After SAR testing} & : \mbox{Ea } [\mbox{V/m}] \end{array}$ 

Limit of power drift[W] =  $\pm$ -5 %

X[dB] = 10log[P] = 10log(1.05/1) = 10log(1.05) -10log(1) = 0.212 dB

from E-filed relations with power.

 $p=E^2/n$ 

Therefore, The correlation of power and the E-filed

 $X dB = 10log(P) = 10log(E)^2 = 20log(E)$ 

Therefore,

The calculated power drift of DASY5 System must be the less than +/- 0.212 dB.

Test Report No. 15106908H-F-R1 Page 25 of 70

#### Measurement data

Plot No. 1

#### 519 MHz S-band

Frequency: 508.125 MHz; Communication System Channel Number: 1; Duty Cycle: 1:1

Medium parameters used (interpolated): f = 508.125 MHz;  $\sigma = 0.848 \text{ S/m}$ ;  $\epsilon_r = 42.624$ ;  $\rho = 1000 \text{ kg/m}^3$ 

#### DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Electronics: DAE4 Sn509; Calibrated: 2023/08/04
- Probe: EX3DV4 SN3922; ConvF(11.23, 11.23, 11.23) @ 508.125 MHz; Calibrated: 2023/08/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI v4.0 (20deg probe tilt); Phantom section: Flat Section; Type: QDOVA001BB
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Radio/Right 508.125 MHz/Area Scan (41x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.125 W/kg

Radio/Right 508.125 MHz/Zoom Scan 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.01 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.339 W/kg

SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.032 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm


Ratio of SAR at M2 to SAR at M1 = 25.9%

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.195 W/kg


Ambient Temp.: 24.0 degree.C. Liquid Temp.; 24.6 degree.C. Liquid temp. is kept within the 2 degree.C. during the test.

Date: 2024/04/24

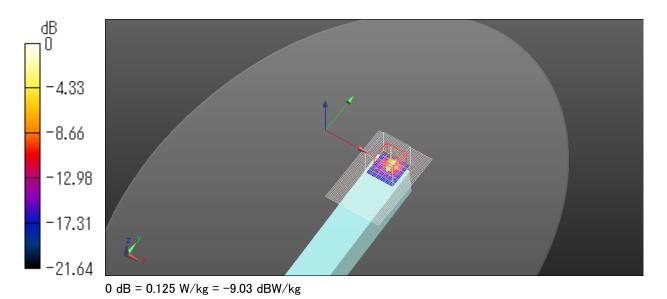

**APPENDIX 3: System specifications** 

#### Configuration and peripherals

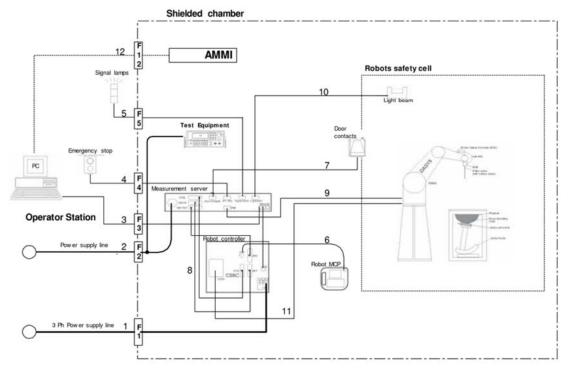

The DASY5 system for performing compliance tests consist of the following items: Our system is DASY6; however, it behaves as DASY5.

- a) A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- b) An isotropic field probe optimized and calibrated for the targeted measurement.
- c) A data acquisition electronic (DAE), which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- d) The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- e) The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- f) The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- g) A computer running Windows 10 or 7 and the DASY5/6 software.
- h) Remote control with teaches pendant and additional circuitry for robot safety such as warning lamps, etc.
- i) The phantom, the device holder and other accessories according to the targeted measurement.

Test Report No. 15106908H-F-R1 Page 27 of 70

#### **Specifications**

a) Robot TX60L

Number of Axes 6 **Nominal Load** 2 kg **Maximum Load** 5 kg Reach 920 mm Repeatability +/-0.03 mm **Control Unit** CS8c **Programming Language:** VAL3 Weight 52.2 kg

Manufacture : Stäubli Robotics

b) E-Field Probe

Model : EX3DV4

**Construction** : Symmetrical design with triangular core

Built-in shielding against static charges

PEEK enclosure material

(resistant to organic solvents, e.g., glycol ether)

Frequency: 10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)

**Directivity**: +/-0.3 dB in HSL (rotation around probe axis)

+/-0.5 dB in tissue material (rotation normal probe axis)

**Dynamic Range** : 10 uW/g to > 100 mW/g;Linearity

+/-0.2 dB(noise: typically < 1 uW/g)

**Dimensions**: Overall length: 337 mm (Tip: 20 mm)

Tip diameter: 2.5 mm (Body: 12 mm)

Typical distance from probe tip to dipole centers: 1 mm

**Application**: Highprecision dosimetric measurement in any exposure scenario

(e.g., very strong gradient fields). Only probe which enables compliance

testing for frequencies up to 6 GHz with precision of better 30 %.

Manufacture : Schmid & Partner Engineering AG



**EX3DV4 E-field Probe** 

Test Report No. 15106908H-F-R1 Page 28 of 70

c) Data Acquisition Electronic (DAE4)

Features : Signal amplifier, multiplexer, A/D converter and control logic

Serial optical link for communication with DASY5 embedded system (fully remote

controlled)

Two step probe touch detector for mechanical surface detection and emergency

robot stop

Measurement Range : -100 to +300 mV (16 bit resolution and two range settings: 4 mV, 400 mV)

Input Offset voltage :  $< 5 \mu V$  (with auto zero)

 Input Resistance
 :
  $200 \text{ M}\Omega$  

 Input Bias Current
 :
 < 50 fA 

**Battery Power** : > 10 h of operation (with two 9.6 V NiMH accus)

**Dimension** :  $60 \times 60 \times 68 \text{ mm}$ 

Manufacture : Schmid & Partner Engineering AG

d) Electro-Optic Converter (EOC)

Version : EOC 61

**Description**: for TX60 robot arm, including proximity sensor

Manufacture : Schmid & Partner Engineering AG

e) DASY5 Measurement server

Features : Intel ULV Celeron 400 MHz

128 MB chip disk and 128 MB RAM

16 Bit A/D converter for surface detection system

Vacuum Fluorescent Display

Robot Interface

Serial link to DAE (with watchdog supervision)

Door contact port (Possibility to connect a light curtain) Emergency stop port (to connect the remote control)

Signal lamps port Light beam port

Three Ethernet connection ports

Two USB 2.0 Ports Two serial links

Expansion port for future applications

**Dimensions (L x W x H)** : 440 x 241 x 89 mm

Manufacture : Schmid & Partner Engineering AG

f) Light Beam Switches

Version : LB5

Dimensions (L x H) : 110 x 80 mm
Thickness : 12 mm
Beam-length : 80 mm

Manufacture : Schmid & Partner Engineering AG

g) Software

Item : Dosimetric Assessment System DASY5

Type No. : SD 000 401A, SD 000 402A Software version No. : DASY52, Version 52.6 (1)

Manufacture / Origin : Schmid & Partner Engineering AG

h) Robot Control Unit

Weight : 70 Kg
AC Input Voltage : selectable
Manufacturer : Stäubli Robotics

Test Report No. 15106908H-F-R1 Page 29 of 70

#### i) Phantom and Device Holder

**Phantom** 

Type : SAM Twin Phantom V4.0

**Description**: The shell corresponds to the specifications of the Specific Anthropomorphic

Mannequin

(SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

Material : Vinylester, glass fiber reinforced (VE-GF)

Shell Material : Fiberglass
Thickness : 2.0 +/- 0.2 mm

Dimensions : Length: 1000 mm Width: 500 mm Height: adjustable feet

Volume : Approx. 25 liters

Manufacture : Schmid & Partner Engineering AG

Type : 2 mm Flat phantom ELI4.0 or 5

**Description**: Phantom for compliance testing of handheld and body-mounted wireless

devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209 Part II and all known tissue simulating liquids. ELI4 has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is supported by software version DASY4.5 and higher and is

compatible with all SPEAG dosimetric probes and dipoles.

Material : Vinylester, glass fiber reinforced (VE-GF)

**Shell Thickness** :  $2.0 \pm 0.2 \text{ mm (sagging: } < 1 \%)$ 

Filling Volume : Approx. 30 liters

**Dimensions**: Major ellipse axis: 600 mm Minor axis: 400 mm

Manufacture : Schmid & Partner Engineering AG

#### **Device Holder**

In combination with the Twin SAM Phantom V4.0/V4.0c or ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to IEC, IEEE, FCC or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat).

Material : POM

#### **Laptop Extensions kit**

Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.). It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin-SAM, ELI4 Phantoms.

Material : POM, Acrylic glass, Foam

#### <u>Urethane</u>

For this measurement, the urethane foam was used as device holder.

Test Report No. 15106908H-F-R1 Page 30 of 70

## j) Simulated Tissues (Liquid)

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

## **Product identifier**

Trade name	Broad Band Tissue Simulation Liquid
	HBBL600-10000V6, MBBL600-6000V6, HU16B, MU16B
Manufacturer/Supplier	Schmid & Partner Engineering AG

#### **Declarable components:**

Deciarable components.		
CAS: 107-21-1	Ethanediol	< 5.2%
EINECS: 203-473-3	STOT RE 2, H373;	
Reg.nr.: 01-2119456816-28-0000	Acute Tox. 4, H302	
CAS: 68608-26-4	Sodium petroleum sulfonate	< 2.9%
EINECS: 271-781-5	Eye Irrit. 2, H319	
Reg.nr.: 01-2119527859-22-0000		
CAS: 107-41-5	Hexylene Glycol / 2-Methyl-pentane-2,4-diol	< 2.9%
EINECS: 203-489-0	Skin Irrit. 2, H315; Eye Irrit. 2, H319	
Reg.nr.: 01-2119539582-35-0000		
CAS: 68920-66-1	Alkoxylated alcohol, > C <sub>16</sub>	< 2.0%
NLP: 500-236-9	Aquatic Chronic 2, H411;	
Reg.nr.: 01-2119489407-26-0000	Skin Irrit. 2, H315; Eye Irrit. 2, H319	

Test Report No. 15106908H-F-R1 Page 31 of 70

## System Check Dipole SAR Calibration Certificate -Dipole 450 MHz (D450V3 S/N: 1051)

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA

Multilateral Agreement for the recognition of calibration certificates

Client

UL Japan (RCC)

Certificate No: D450V3-1051\_Sep21

Dbject	D450V3 - SN:105		
Calibration procedure(s)	QA CAL-15.v9 Calibration Proced	dure for SAR Validation Sources	below 700 MHz
Calibration date:	September 17, 20	21	
This calibration cartificate documen	ts the traceability to nation	onal standards, which realize the physical uni	its of measurements (SI).
he measurements and the uncerta	inties with confidence pr	obability are given on the following pages an	d are part of the certificate.
All calibrations have been conducte	d in the closed laborator	y facility: environment temperature (22 ± 3)°C	and humidity < 70%.
Calibration Equipment used (M&TE	oritical for calibration)		
Calibration Equipment used (Ma I E	critical for calibration)		
Primary Standards	ID#	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	09-Apr-21 (No. 217-03291/03292)	Apr-22
Power sensor NRP-Z91	SN: 103244	09-Apr-21 (No. 217-03291)	Apr-22
Power sensor NRP-Z91	SN: 103245	09-Apr-21 (No. 217-03292)	Apr-22
Print of the Control	SN: CC2552 (20x)	09-Apr-21 (No. 217-03343)	Apr-22
Reference 20 dB Attenuator		,	
Reference 20 dB Attenuator Type-N mismatch combination	SN: 310982 / 06327	09-Apr-21 (No. 217-03344)	Apr-22
Type-N mismatch combination	and the second s	the same from a control to the first terms of the f	Dec-21
11010101100 =0 1	SN: 310982 / 06327	09-Apr-21 (No. 217-03344)	
Type-N mismatch combination Reference Probe EX3DV4 DAE4	SN: 310982 / 06327 SN: 3877 SN: 654	09-Apr-21 (No. 217-03344) 30-Dec-20 (No. EX3-3877_Dec20)	Dec-21
Type-N mismatch combination Reference Probe EX3DV4 DAE4 Secondary Standards	SN: 310982 / 06327 SN: 3877	09-Apr-21 (No. 217-03344) 30-Dec-20 (No. EX3-3877_Dec20) 28-Jun-21 (No. DAE4-654_Jun21)	Dec-21 Jun-22
Type-N mismatch combination Reference Probe EX3DV4 DAE4 Secondary Standards Power meter E4419B	SN: 310982 / 06327 SN: 3877 SN: 654	09-Apr-21 (No. 217-03344) 30-Dec-20 (No. EX3-3877_Dec20) 28-Jun-21 (No. DAE4-654_Jun21) Check Date (in house)	Dec-21 Jun-22 Scheduled Check
Type-N mismatch combination Reference Probe EX3DV4 DAE4  Secondary Standards Power meter E4419B Power sensor E4412A	SN: 310982 / 06327 SN: 3877 SN: 654 ID # SN: GB41293874 SN: MY41498087	09-Apr-21 (No. 217-03344) 30-Dec-20 (No. EX3-3877_Dec20) 28-Jun-21 (No. DAE4-654_Jun21) Check Date (in house) 06-Apr-16 (in house check Jun-20)	Dec-21 Jun-22 Scheduled Check In house check: Jun-22
Type-N mismatch combination Reference Probe EX3DV4 DAE4  Secondary Standards Power meter E4419B Power sensor E4412A Power sensor E4412A	SN: 310982 / 06327 SN: 3877 SN: 654 ID # SN: GB41293874 SN: MY41498087 SN: 000110210	09-Apr-21 (No. 217-03344) 30-Dec-20 (No. EX3-3877_Dec20) 28-Jun-21 (No. DAE4-654_Jun21)  Check Date (in house)  06-Apr-16 (in house check Jun-20) 06-Apr-16 (in house check Jun-20) 06-Apr-16 (in house check Jun-20)	Dec-21 Jun-22  Scheduled Check In house check: Jun-22 In house check: Jun-22
Type-N mismatch combination Reference Probe EX3DV4 DAE4  Secondary Standards Power meter E4419B Power sensor E4412A	SN: 310982 / 06327 SN: 3877 SN: 654 ID # SN: GB41293874 SN: MY41498087	09-Apr-21 (No. 217-03344) 30-Dec-20 (No. EX3-3877_Dec20) 28-Jun-21 (No. DAE4-654_Jun21)  Check Date (in house) 06-Apr-16 (in house check Jun-20) 06-Apr-16 (in house check Jun-20)	Dec-21 Jun-22  Scheduled Check In house check: Jun-22 In house check: Jun-22 In house check: Jun-22
Type-N mismatch combination Reference Probe EX3DV4 DAE4  Secondary Standards Power meter E4419B Power sensor E4412A Power sensor E4412A RF generator HP 8648C	SN: 310982 / 06327 SN: 3877 SN: 654 ID # SN: GB41293874 SN: MY41498087 SN: 000110210 SN: US3642U01700 SN: US41080477	09-Apr-21 (No. 217-03344) 30-Dec-20 (No. EX3-3877_Dec20) 28-Jun-21 (No. DAE4-654_Jun21)  Check Date (in house) 06-Apr-16 (in house check Jun-20) 06-Apr-16 (in house check Jun-20) 06-Apr-16 (in house check Jun-20) 04-Aug-99 (in house check Jun-20)	Dec-21 Jun-22  Scheduled Check In house check: Jun-22 In house check: Jun-22 In house check: Jun-22 In house check: Jun-22
Type-N mismatch combination Reference Probe EX3DV4 DAE4  Secondary Standards Power meter E4419B Power sensor E4412A Power sensor E4412A RF generator HP 8648C Network Analyzer Agilent E8358A	SN: 310982 / 06327 SN: 3877 SN: 654 ID # SN: GB41293874 SN: MY41498087 SN: 000110210 SN: US3642U01700 SN: US41080477 Name	09-Apr-21 (No. 217-03344) 30-Dec-20 (No. EX3-3877_Dec20) 28-Jun-21 (No. DAE4-654_Jun21)  Check Date (in house)  06-Apr-16 (in house check Jun-20) 06-Apr-16 (in house check Jun-20) 04-Aug-99 (in house check Jun-20) 31-Mar-14 (in house check Jun-20)	Dec-21 Jun-22 Scheduled Check In house check: Jun-22
Type-N mismatch combination Reference Probe EX3DV4 DAE4  Secondary Standards Power meter E4419B Power sensor E4412A Power sensor E4412A RF generator HP 8648C	SN: 310982 / 06327 SN: 3877 SN: 654 ID # SN: GB41293874 SN: MY41498087 SN: 000110210 SN: US3642U01700 SN: US41080477	09-Apr-21 (No. 217-03344) 30-Dec-20 (No. EX3-3877_Dec20) 28-Jun-21 (No. DAE4-654_Jun21)  Check Date (in house) 06-Apr-16 (in house check Jun-20) 06-Apr-16 (in house check Jun-20) 06-Apr-16 (in house check Jun-20) 04-Aug-99 (in house check Jun-20) 31-Mar-14 (in house check Oct-20)	Dec-21 Jun-22 Scheduled Check In house check: Jun-22
Type-N mismatch combination Reference Probe EX3DV4 DAE4  Secondary Standards Power meter E4419B Power sensor E4412A Power sensor E4412A RF generator HP 8648C Network Analyzer Agilent E8358A  Calibrated by:	SN: 310982 / 06327 SN: 3877 SN: 654 ID # SN: GB41293874 SN: MY41498087 SN: 000110210 SN: US3642U01700 SN: US41080477 Name Jeffrey Katzman	09-Apr-21 (No. 217-03344) 30-Dec-20 (No. EX3-3877_Dec20) 28-Jun-21 (No. DAE4-654_Jun21)  Check Date (in house)  06-Apr-16 (in house check Jun-20) 06-Apr-16 (in house check Jun-20) 06-Apr-16 (in house check Jun-20) 04-Aug-99 (in house check Jun-20) 31-Mar-14 (in house check Oct-20)  Function  Laboratory Technician	Dec-21 Jun-22 Scheduled Check In house check: Jun-22
Type-N mismatch combination Reference Probe EX3DV4 DAE4  Secondary Standards Power meter E4419B Power sensor E4412A Power sensor E4412A RF generator HP 8648C Network Analyzer Agilent E8358A	SN: 310982 / 06327 SN: 3877 SN: 654 ID # SN: GB41293874 SN: MY41498087 SN: 000110210 SN: US3642U01700 SN: US41080477 Name	09-Apr-21 (No. 217-03344) 30-Dec-20 (No. EX3-3877_Dec20) 28-Jun-21 (No. DAE4-654_Jun21)  Check Date (in house)  06-Apr-16 (in house check Jun-20) 06-Apr-16 (in house check Jun-20) 04-Aug-99 (in house check Jun-20) 31-Mar-14 (in house check Jun-20)	Dec-21 Jun-22 Scheduled Check In house check: Jun-22

Certificate No: D450V3-1051\_Sep21

Page 1 of 8

Test Report No. 15106908H-F-R1 Page 32 of 70

#### Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA

Multilateral Agreement for the recognition of calibration certificates

#### Glossary:

TSL

tissue simulating liquid

ConvF N/A sensitivity in TSL / NORM x,y,z not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

## **Additional Documentation:**

c) DASY System Handbook

#### Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end
  of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The source is mounted in a touch configuration below the center marking of the flat phantom.
- Return Loss: This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: D450V3-1051\_Sep21 Page 2 of 8

Test Report No. 15106908H-F-R1 Page 33 of 70

## **Measurement Conditions**

DASY system configuration, as far as not given on page 1

DASY Version	DASY52	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	ELI4 Flat Phantom	Shell thickness: 2 ± 0.2 mm
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, $dy$ , $dz = 5$ mm	
Frequency	450 MHz ± 1 MHz	

## **Head TSL parameters**

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	43.5	0.87 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	42.8 ± 6 %	0.86 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		

## SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	1.14 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	4.59 W/kg ± 18.1 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	0.764 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	3.07 W/kg ± 17.6 % (k=2)

### **Body TSL parameters**

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	56.7	0.94 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	55.9 ± 6 %	0.95 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C		

## SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	1.18 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	4.67 W/kg ± 18.1 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	0.795 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	3.15 W/kg ± 17.6 % (k=2)

Certificate No: D450V3-1051\_Sep21

Test Report No. 15106908H-F-R1 Page 34 of 70

## Appendix (Additional assessments outside the scope of SCS 0108)

#### Antenna Parameters with Head TSL

Impedance, transformed to feed point	56.0 Ω - 6.8 jΩ
Return Loss	- 21.4 dB

## Antenna Parameters with Body TSL

Impedance, transformed to feed point	53.0 Ω - 9.5 jΩ
Return Loss	- 20.3 dB

## General Antenna Parameters and Design

Floatrical Dalay (and discours)	
Electrical Delay (one direction)	1.350 ns
	1.550 115

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

#### **Additional EUT Data**

Manufactured by	
Manufactured by	SPEAG
	l oi EAG

Certificate No: D450V3-1051\_Sep21

Page 4 of 8

Test Report No. 15106908H-F-R1 Page 35 of 70

#### **DASY5 Validation Report for Head TSL**

Date: 17.09.2021

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 450 MHz; Type: D450V3; Serial: D450V3 - SN:1051

Communication System: UID 0 - CW; Frequency: 450 MHz

Medium parameters used: f = 450 MHz;  $\sigma = 0.86$  S/m;  $\varepsilon_r = 42.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

#### DASY52 Configuration:

- Probe: EX3DV4 SN3877; ConvF(10.64, 10.64, 10.64) @ 450 MHz; Calibrated: 30.12.2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 28.06.2021
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1003
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

## Dipole Calibration for Head Tissue/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 39.24 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 1.78 W/kg

SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.764 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 30 mm)

Ratio of SAR at M2 to SAR at M1 = 64.2%


Maximum value of SAR (measured) = 1.55 W/kg

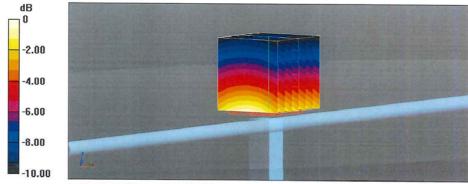

0 dB = 1.55 W/kg = 1.90 dBW/kg

Certificate No: D450V3-1051\_Sep21

#### Impedance Measurement Plot for Head TSL

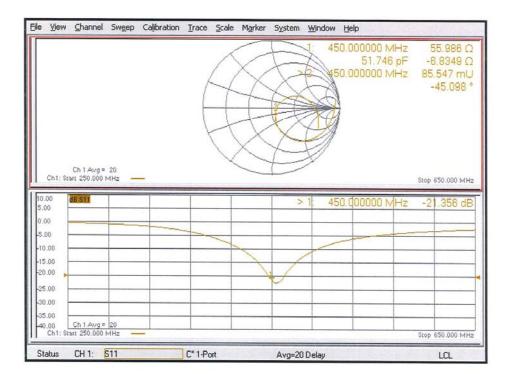

Certificate No: D450V3-1051\_Sep21

Page 6 of 8

Test Report No. 15106908H-F-R1 Page 37 of 70

#### **DASY5 Validation Report for Body TSL**

Date: 17.09.2021

Test Laboratory: SPEAG, Zurich, Switzerland

### DUT: Dipole 450 MHz; Type: D450V3; Serial: D450V3 - SN:1051

Communication System: UID 0 - CW; Frequency: 450 MHz

Medium parameters used: f = 450 MHz;  $\sigma = 0.95 \text{ S/m}$ ;  $\varepsilon_r = 55.9$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

### DASY52 Configuration:

- Probe: EX3DV4 SN3877; ConvF(10.64, 10.64, 10.64) @ 450 MHz; Calibrated: 30.12.2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 28.06.2021
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1003
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

### Dipole Calibration for Body Tissue/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 42.43 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.81 W/kg

#### SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.795 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 30 mm)

Ratio of SAR at M2 to SAR at M1 = 65.4%


Maximum value of SAR (measured) = 1.58 W/kg

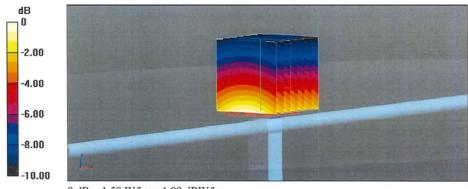

0 dB = 1.58 W/kg = 1.99 dBW/kg

Certificate No: D450V3-1051\_Sep21

### Impedance Measurement Plot for Body TSL

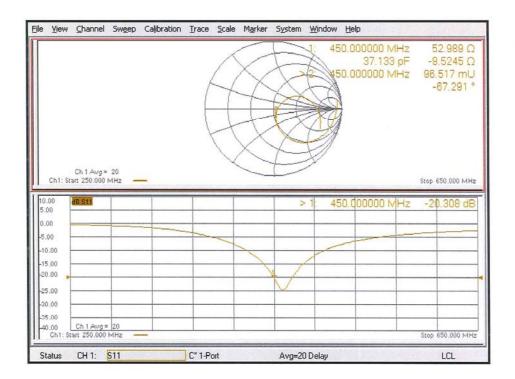

Certificate No: D450V3-1051\_Sep21

Page 8 of 8

Test Report No. 15106908H-F-R1 Page 39 of 70

# **Calibration for Impedance and Return-loss**

Equipment	Dipole Antenna	Model	D450V3
Manufacture	Schmid & Partner Engineering AG	Serial	1051
Tested by	Hisayoshi Sato		

# 1. Test environment

Date	September 30, 2022		
Ambient Temperature	24.0 deg.C	Relative humidity	40 %RH
Date	August 1, 2023		
Ambient Temperature	22.5 deg.C	Relative humidity	40 %RH

# 2. Equipment used

### 2022

Local ld	LIMS ID	Description	Manufacturer	Model	Serial	Last Cal Date	Interval
			Schmid&Partner Engineering				
MPF-03	142057	2mm Oval Flat Phantom	AG	QDOVA001BB	1203	2021/05/28	12
MOS-33	88581	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	-	2021/07/08	12
			Schmid&Partner Engineering				
MPF-02	142056	2mm Oval Flat Phantom	AG	QDOVA001BB	1045	2021/05/28	12
			Schmid & Partner Engineering				
MMBBL600-6000	176483	Body Simulating Liquid	AG	MBBL600-6000	SL AAM U16 BC	-	-
			Schmid & Partner Engineering				
MHBBL600-10000	176484	Head Simulating Liquid	AG	HBBL600-10000V6	SL AAH U16 BC	-	-
EST-63	150815	Netw ork Analyzer	Keysight Technologies Inc	E5071C	MY 46523746	2021/07/02	12
EST-57	141991	2.4mm Calibration Kit	Keysight Technologies Inc	85056A	MY44300225	2021/08/31	12

### 2023

Local ld	LIMS ID	Description	Manufacturer	Model	Serial	Last Cal Date	Interval
LUCALIU	LIIVIO ID	Description	ivaliuracturei	Model	Jei iai	Last Cai Date	IIIlei vai
MOS-33	88581	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	-	2023/07/18	12
			Schmid & Partner Engineering				
MPSAM-02	142060	SAM Phantom	AG	QD000P40CB	1333	2023/05/10	12
			Schmid & Partner Engineering				
MPF-02	142056	2mm Oval Flat Phantom	AG	QDOVA001BB	1045	2023/05/10	12
			Schmid & Partner Engineering		SL AAM U16		
MMBBL600-6000	176483	Body Simulating Liquid	AG	MBBL600-6000	BC	-	-
			Schmid & Partner Engineering		SL AAH U16		
MHBBL600-10000	176484	Head Simulating Liquid	AG	HBBL600-10000V6	BC	-	-
EST-63	150815	Netw ork Analyzer	Keysight Technologies Inc	E5071C	MY46523746	2022/08/23	12
EST-57	141991	2.4mm Calibration Kit	Keysight Technologies Inc	85056A	MY44300225	2022/08/18	12

Test Report No. 15106908H-F-R1 Page 40 of 70

### 3. Test Result

		Head	Head	Deviation	Deviation		
Impeadance, Transformed to feed poin	cal day	(real part) [Ω]	(img part) [jΩ]	(real part) [Ω]	(img part) [jΩ]	Tolerance	Result
Calibration (SPEAG)	2021/9/17	55.99	-6.83	-	-	-	-
Calibration(ULJ)	2022/9/30	58.31	-9.55	2.32	-2.72	+/- 5 Ω +/- 5 jΩ	Complied
Calibration(ULJ)	2023/8/1	59.13	-10.33	3.14	-3.50	+/- 5 Ω +/- 5 jΩ	Complied

		Head	Deviation	Deviation	Tolerance	Tolerance	
Return loss	cal day	[dB]	[%]	[dB]	[%]	[+/- dB]	Result
Calibration (SPEAG)	2021/9/17	-21.36	-	-	-	-	-
Calibration(ULJ)	2022/9/30	-18.70	12.43	2.66	+/- 20.00	4.27	Complied
Calibration(ULJ)	2023/8/1	-18.01	15.67	3.35	+/- 20.00	4.27	Complied


		Body	Body	Deviation	Deviation		
Impeadance, Transformed to feed poin	cal day	(real part) [Ω]	(img part) [jΩ]	(real part) [Ω]	(img part) [jΩ]	Tolerance	Result
Calibration (SPEAG)	2021/9/17	52.99	-9.52	-	-	-	-
Calibration(ULJ)	2022/9/30	54.48	-12.08	1.49	-2.56	+/- 5 Ω +/- 5 jΩ	Complied
Calibration(ULJ)	2023/8/1	55.65	-9.07	2.66	0.45	+/- 5 Ω +/- 5 jΩ	Complied

		Body	Deviation	Deviation	Tolerance	Tolerance	
Return loss	cal day	[dB]	[%]	[dB]	[%]	[+/- dB]	Result
Calibration (SPEAG)	2021/9/17	-20.31	-	-	-	-	-
Calibration(ULJ)	2022/9/30	-18.23	10.26	2.08	+/- 20.00	4.06	Complied
Calibration(ULJ)	2023/8/1	-19.91	1.96	0.40	+/- 20.00	4.06	Complied


Tolerance: According to the KDB 865664 D1

### Measurement Plots 2022


# <Head Liquid>

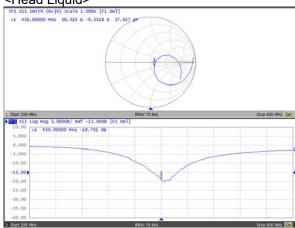


# <Body Liquid>

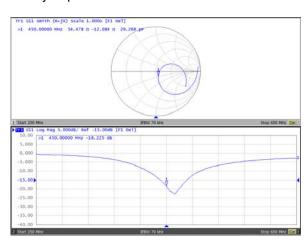

## Measurement Plots 2023

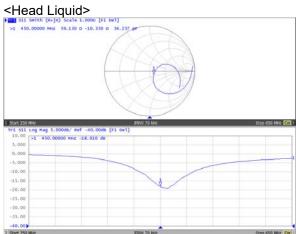

# <Body Liquid>

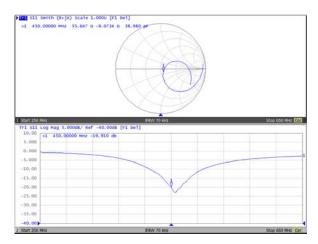

Test Report No. 15106908H-F-R1 Page 42 of 70

### Dosimetric E-Field Probe Calibration Certificate (EX3DV4, S/N: 3922)

Calibration Laboratory of Schmid & Partner Engineering AG





S Schweizerischer Kalibrierdienst C Service suisse d'étalonnage Servizio svizzero di taratura

Swiss Calibration Service

Zeughausstrasse 43, 8004 Zurich, Switzerland

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client

**UL Japan Head Office** 

lse, Japan

Certificate No.

EX-3922\_Aug23

### **CALIBRATION CERTIFICATE**

Object

EX3DV4 - SN:3922

Calibration procedure(s)

QA CAL-01.v10, QA CAL-12.v10, QA CAL-14.v7, QA CAL-23.v6,

QA CAL-25.v8

Calibration procedure for dosimetric E-field probes

Calibration date

August 11, 2023

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22  $\pm$  3)  $^{\circ}$ C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP2	SN: 104778	30-Mar-23 (No. 217-03804/03805)	Mar-24
Power sensor NRP-Z91	SN: 103244	30-Mar-23 (No. 217-03804)	Mar-24
OCP DAK-3.5 (weighted)	SN: 1249	20-Oct-22 (OCP-DAK3.5-1249_Oct22)	Oct-23
OCP DAK-12	SN: 1016	20-Oct-22 (OCP-DAK12-1016_Oct22)	Oct-23
Reference 20 dB Attenuator	SN: CC2552 (20x)	30-Mar-23 (No. 217-03809)	Mar-24
DAE4	SN: 660	16-Mar-23 (No. DAE4-660_Mar23)	Mar-24
Reference Probe ES3DV2	SN: 3013	06-Jan-23 (No. ES3-3013_Jan23)	Jan-24

Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-22)	In house check: Jun-24
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-22)	In house check: Oct-24

	Name	Function	Sign
Calibrated by	Michael Weber	Laboratory Technician	A.M.
Approved by	Sven Kühn	Technical Manager	
This calibration certificate	shall not be reproduced except in	n full without written approval of the lab	Issued: A

Certificate No: EX-3922\_Aug23


Page 1 of 22

Test Report No. 15106908H-F-R1 Page 43 of 70

#### Calibration Laboratory of Schmid & Partner Engineering AG







Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates Accreditation No.: SCS 0108

#### Glossary

DCP

TSL NORMx,y,z ConvF

tissue simulating liquid sensitivity in free space sensitivity in TSL / NORMx,y,z diode compression point

CF A, B, C, D Polarization  $\varphi$ 

crest factor (1/duty\_cycle) of the RF signal modulation dependent linearization parameters

 $\phi$  rotation around probe axis

Polarization ∂

 $\vartheta$  rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e.,  $\vartheta = 0$  is

normal to probe axis

information used in DASY system to align probe sensor X to the robot coordinate system Connector Angle

#### Calibration is Performed According to the Following Standards:

- a) IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

#### Methods Applied and Interpretation of Parameters:

- NORMx,y,z: Assessed for E-field polarization ∂ = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide). NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not affect the E2-field uncertainty inside TSL (see below ConvF).
- NORM(f)x,y,z = NORMx,y,z \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of
- · DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal. DCP does not depend on frequency nor media
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VRx,y,z: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMx,y,z \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ±50 MHz to ±100 MHz.
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch
- · Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- · Connector Angle: The angle is assessed using the information gained by determining the NORMx (no uncertainty required).

Certificate No: EX-3922 Aug23

Page 2 of 22

Test Report No. 15106908H-F-R1 Page 44 of 70

EX3DV4 - SN:3922 August 11, 2023

### Parameters of Probe: EX3DV4 - SN:3922

#### **Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k = 2)
Norm $(\mu V/(V/m)^2)$ A	0.64	0.56	0.59	±10.1%
DCP (mV) B	98.8	101.6	100.4	±4.7%

### **Calibration Results for Modulation Response**

UID	Communication System Name		Α	В	С	D	VR	Max	Max
			dB	dB√ <del>μV</del>		dB	m۷	dev.	Unc <sup>E</sup>
									k = 2
0	CW	X	0.00	0.00	1.00	0.00	140.7	±2.7%	±4.7%
		Y	0.00	0.00	1.00		149.2		
		Z	0.00	0.00	1.00		157.2		
10352	Pulse Waveform (200Hz, 10%)	X	20.00	90.38	20.71	10.00	60.0	±3.3%	±9.6%
		Y	20.00	90.30	20.27		60.0	1	
		Z	20.00	90.21	20.58		60.0		
10353	Pulse Waveform (200Hz, 20%)	X	20.00	90.72	20.10	6.99	80.0	±1.7%	±9.6%
		Y	20.00	91.35	19.65		80.0	1	
		Z	20.00	90.57	19.96		80.0		
10354	Pulse Waveform (200Hz, 40%)	Х	20.00	93.48	20.33	3.98	95.0	±0.9%	±9.6%
		Y	20.00	93.20	19.10	ĺ	95.0	1	
		Z	20.00	93.23	20.12		95.0		
10355	Pulse Waveform (200Hz, 60%)	X	20.00	98.42	21.51	2.22	120.0	±1.0%	±9.6%
		Y	20.00	92.91	17.59		120.0		
		Z	20.00	94.28	19.42		120.0		
10387	QPSK Waveform, 1 MHz	X	1.74	67.04	15.54	1.00	150.0	±3.1%	±9.6%
		Y	1.42	65.45	13.81	1	150.0	1	
		Z	1.76	66.77	15.33		150.0		
10388	QPSK Waveform, 10 MHz	X	2.33	68.89	16.26	0.00	150.0	±1.1%	±9.6%
		Y	1.93	66.59	14.79	1	150.0	1	±9.6%  ±9.6%  ±9.6%  ±9.6%
		Z	2.36	68.92	16.11	1	150.0	1	
10396	64-QAM Waveform, 100 kHz	X	3.28	72.62	20.01	3.01	150.0	±0.8%	±9.6%
		Y	2.59	69.05	18.11	1	150.0	1	
		Z	4.03	76.28	21.53	1	150.0	1	
10399	64-QAM Waveform, 40 MHz	X	3.57	67.49	16.02	0.00	150.0	±2.0%	±9.6%
		Y	3.30	66.51	15.31	1	150.0	1	
		Z	3.47	67.00	15.70	1	150.0	1	
10414	WLAN CCDF, 64-QAM, 40 MHz	X	4.89	65.83	15.68	0.00	150.0	±4.0%	±9.6%
		Y	4.63	65.44	15.32	1	150.0	1	
		Z	4.83	65.49	15.44	1	150.0	1	

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: EX-3922\_Aug23 Page 3 of 22

A The uncertainties of Norm X,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 5 and 6).

B Linearization parameter uncertainty for maximum specified field strength.

E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Test Report No. 15106908H-F-R1 Page 45 of 70

EX3DV4 - SN:3922 August 11, 2023

### Parameters of Probe: EX3DV4 - SN:3922

### **Sensor Model Parameters**

	C1 fF	C2 fF	α V <sup>-1</sup>	T1 msV <sup>-2</sup>	T2 msV <sup>-1</sup>	T3 ms	T4 V <sup>-2</sup>	T5 V <sup>-1</sup>	T6
x	44.8	333.36	35.33	28.51	0.06	5.10	1.30	0.26	1.01
у	34.9	259.92	35.33	14.08	0.19	5.10	0.72	0.27	1.01
Z	47.6	352.96	35.14	27.90	0.08	5.10	1.77	0.21	1.01

#### Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle	-70.1°
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1,4 mm

Note: Measurement distance from surface can be increased to 3-4 mm for an Area Scan job.

Certificate No: EX-3922\_Aug23 Page 4 of 22

Test Report No. 15106908H-F-R1 Page 46 of 70

EX3DV4 - SN:3922 August 11, 2023

#### Parameters of Probe: EX3DV4 - SN:3922

### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity <sup>F</sup> (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unc (k = 2)
450	43.5	0.87	11.23	11.23	11.23	0.16	1.30	±13.3%
600	42.7	0.88	10.53	10.53	10.53	0.10	1.25	±13.3%
900	41.5	0.97	9.92	9.92	9.92	0.46	0.82	±12.0%
2450	39.2	1.80	7.88	7.88	7.88	0.36	0.90	±12.0%
5250	35.9	4.71	5.54	5.54	5.54	0.40	1.80	±14.0%
5600	35.5	5.07	4.72	4.72	4.72	0.40	1.80	±14.0%
5800	35.3	5.27	4.86	4.86	4.86	0.40	1.80	±14.0%

C Frequency validity above 300 MHz of ±100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ±50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ±10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4–9 MHz, and ConvF assessed at 13 MHz is 9–19 MHz. Above 5 GHz frequency validity can be extended to ±110 MHz.

The probes are calibrated using tissue simulating liquids (TSL) that deviate for \$\varepsilon\$ and \$\sigma\$ by less than ±5% from the target values (typically better than ±3%) and are valid for TSL with deviations of up to ±10%. If TSL with deviations from the target of less than ±5% are used, the calibration uncertainties are 11.1% for 0.7–3 GHz and 13.1% for 3 - 6 GHz.

Certificate No: EX-3922\_Aug23 Page 5 of 22

G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than  $\pm 1\%$  for frequencies below 3 GHz and below  $\pm 2\%$  for frequencies between 3–6 GHz at any distance larger than half the probe tip diameter from the boundary.

Test Report No. 15106908H-F-R1 Page 47 of 70

EX3DV4 - SN:3922 August 11, 2023

#### Parameters of Probe: EX3DV4 - SN:3922

### Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity <sup>F</sup> (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unc (k = 2)
450	56.7	0.94	11.48	11.48	11.48	0.11	1.20	±13.3%
600	56.1	0.95	10.88	10.88	10.88	0.10	1.35	±13.3%
2450	52.7	1.95	7.66	7.66	7.66	0.33	0.90	±12.0%
5250	48.9	5.36	4.77	4.77	4.77	0.50	1.90	±14.0%
5600	48.5	5.77	4.11	4.11	4.11	0.50	1.90	±14.0%
5800	48.2	6.00	4.18	4.18	4.18	0.50	1.90	±14.0%

C Frequency validity above 300 MHz of ±100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ±50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ±10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4–9 MHz, and ConvF assessed at 13 MHz is 9–19 MHz. Above 5 GHz frequency validity can be extended to ±110 MHz.

The probes are calibrated using tissue simulating liquids (TSL) that deviate for ɛ and σ by less than ±5% from the target values (typically better than ±3%) and are valid for TSL with deviations of up to ±10%. If TSL with deviations from the target of less than ±5% are used, the calibration uncertainties are 11.1% for 0.7 - 3 GHz and 13.1% for 3 - 6 GHz.


Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less

Certificate No: EX-3922\_Aug23 Page 6 of 22

than ±1% for frequencies below 3 GHz and below ±2% for frequencies between 3–6 GHz at any distance larger than half the probe tip diameter from the boundary.

### Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide:R22)

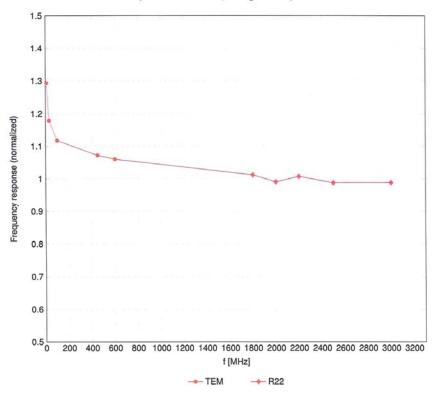

Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)

Certificate No: EX-3922\_Aug23 Page 7 of 22

# Receiving Pattern ( $\phi$ ), $\vartheta = 0^{\circ}$

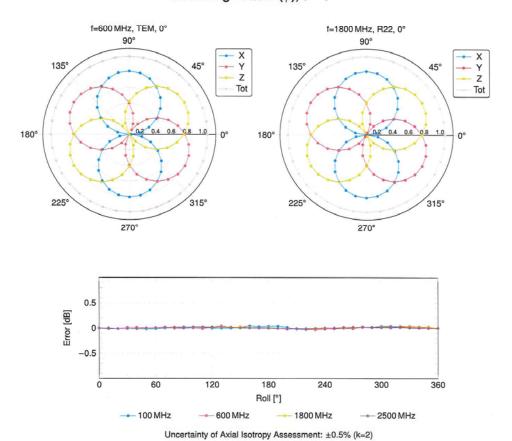



Certificate No: EX-3922\_Aug23

Page 8 of 22

# Dynamic Range f(SAR<sub>head</sub>)

(TEM cell,  $f_{eval} = 1900\,\text{MHz}$ )

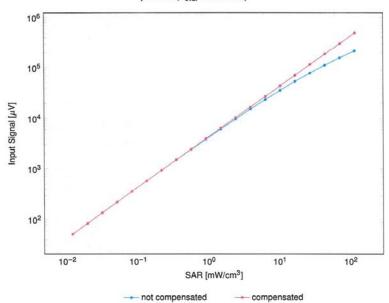

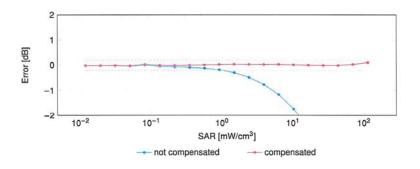


Uncertainty of Linearity Assessment: ±0.6% (k=2)

Certificate No: EX-3922\_Aug23

Page 9 of 22

### **Conversion Factor Assessment**

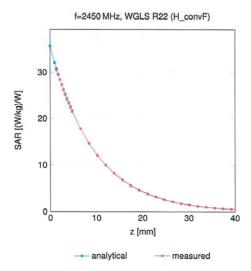

# **Deviation from Isotropy in Liquid** Error $(\phi, \theta)$ , f = 900 MHz

8.0 0.6 0.4 0.2 Deviation 0 -0.2 -0.4 -0.6

> 3600 X [deg] -0.6 -0.4 -0.2 0.2 0.4 0 0.6 Uncertainty of Spherical Isotropy Assessment: ±2.6% (k=2)

270

315

50

Y [deg]

40

Certificate No: EX-3922\_Aug23

-0.8

45

90

135 180

Page 10 of 22

Test Report No. 15106908H-F-R1 Page 52 of 70

EX3DV4 - SN:3922 August 11, 2023

# **Appendix: Modulation Calibration Parameters**

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> <i>k</i> = 2
0		CW	CW	0.00	±4.7
10010	CAB	SAR Validation (Square, 100 ms, 10 ms)	Test	10.00	±9.6
10011	CAC	UMTS-FDD (WCDMA)	WCDMA	2.91	±9.6
10012	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	WLAN	1.87	±9.6
10013	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	WLAN	9.46	±9.6
10021	DAC	GSM-FDD (TDMA, GMSK)	GSM	9.39	±9.6
10023	DAC	GPRS-FDD (TDMA, GMSK, TN 0)	GSM	9.57	±9.6
10024	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	GSM	6.56	±9.6
10025	DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	GSM	12.62	±9.6
10026	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	GSM	9.55	±9.6
10027	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	GSM	4.80	±9.6
10028	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	GSM	3.55	±9.6
10029	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	GSM	7.78	±9.6
10030	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	Bluetooth	5.30	±9.6
10031	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	Bluetooth	1.87	±9.6
10032	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	Bluetooth	1.16	±9.6
10033	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	Bluetooth	7.74	±9.6
10034	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)	Bluetooth	4.53	±9.6
10035	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)	Bluetooth	3.83	±9.6
10036	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	Bluetooth	8.01	±9.6
10037	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	Bluetooth	4.77	±9.6
10038	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	Bluetooth	4.10	±9.6
10039	CAB	CDMA2000 (1xRTT, RC1)	CDMA2000	4.57	±9.6
10042	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate)	AMPS	7.78	±9.6
10044	CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	AMPS	0.00	±9.6
10048	CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	DECT	13.80	±9.6
10049	CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	DECT	10.79	±9.6
10056	CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	TD-SCDMA	11.01	±9.6
10058	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	GSM	6.52	±9.6
10059	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	WLAN	2.12	±9.6
10060	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	WLAN	2.83	±9.6
10061	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	WLAN WLAN	3.60 8.68	±9.6
10062	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	WLAN	8.63	±9.6
10063	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)	WLAN	9.09	±9.6
10064	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)  IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	WLAN	9.09	±9.6
10065	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mipps)	WLAN	9.38	±9.6
10066	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mops)	WLAN	10.12	±9.6
10067	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)	WLAN	10.12	±9.6
10069	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	WLAN	10.56	±9.6
10003	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	WLAN	9.83	±9.6
10071	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	WLAN	9.62	±9.6
10072	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	WLAN	9.94	±9.6
10073	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	WLAN	10.30	±9.6
10074	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 MiDps)	WLAN	10.30	±9.6
10075	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 30 Mbps)	WLAN	10.77	±9.6
10078	CAB	IEEE 802.11g WIFI 2.4 GHz (DSSS/OFDM, 46 MIDPS)	WLAN	11.00	±9.6
10077	CAB	CDMA2000 (1xRTT, RC3)	CDMA2000	3.97	±9.6
10082	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate)	AMPS	4.77	±9.6
10090	DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	GSM	6.56	±9.6
10097	CAC	UMTS-FDD (HSDPA)	WCDMA	3.98	±9.6
10098	CAC	UMTS-FDD (HSUPA, Subtest 2)	WCDMA	3.98	±9.6
10099	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	GSM	9.55	±9.6
10100	CAF	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-FDD	5.67	±9.6
10101	CAF	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	±9.6
10102	ÇAF	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	±9.6
10103	CAH		LTE-TDD	9.29	±9.6
10104	CAH		LTE-TDD	9.97	±9.6
10105	CAH		LTE-TDD	10.01	±9.6
10108	CAH		LTE-FDD	5.80	±9.6
10109	CAH		LTE-FDD	6.43	±9.6
10110	CAH		LTE-FDD	5.75	±9.6
10111	CAH		LTE-FDD	6.44	±9.6
		the state of the s			

Certificate No: EX-3922\_Aug23 Page 11 of 22

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10112	CAH	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-FDD	6.59	±9.6
10113	CAH	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-FDD	6.62	±9.6
10114	CAD	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	WLAN	8.10	±9.6
10115	CAD	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	WLAN	8.46	±9.6
10116	CAD	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	WLAN	8.15	±9.6
10117	CAD	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	WLAN	8.07	±9.6
10118	CAD	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	WLAN	8.59	±9.6
10119	ÇAD	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	WLAN	8.13	±9.6
10140	CAF	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-FDD	6.49	±9.6
10141	CAF	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-FDD	6.53	±9.6
10142	CAF	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-FDD	5.73	±9.6
10143	CAF	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-FDD	6.35	±9.6
10144	CAF	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-FDD	6.65	±9.6
10145	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-FDD	5.76	±9.6
10146	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.41	±9.6
10147	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.72	±9.6
10149	CAF	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	±9.6
10150	CAF	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	±9.6
10151	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	9.28	±9.6
10152	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-TDD	9.92	±9.6
10153	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-TDD	10.05	±9.6
10154	CAH	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-FDD	5.75	±9.6
10155	CAH	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	±9.6
10156	CAH	LTE-FDD (SC-FDMA, 50% RB, 5MHz, QPSK)	LTE-FDD	5.79	±9.6
10157	CAH	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-FDD	6.49	±9.6
10158	CAH	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-FDD	6.62	±9.6
10159	CAH	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-FDD	6.56	±9.6
10160	CAF	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-FDD	5.82	±9.6
10161	CAF	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-FDD	6.43	±9.6
10162	CAG	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)  LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-FDD	6.58	±9.6
10167	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-FDD	5.46	±9.6
10168	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.21	±9.6
10169	CAF	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-FDD	5.73	±9.6
10170	CAF	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10171	AAF	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-FDD	6.49	±9.6
10172	CAH	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-TDD	9.21	±9.6
10173	CAH	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10174	CAH	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10175	CAH	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-FDD	5.72	±9.6
10176	CAH	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10177	CAJ	LTE-FDD (SC-FDMA, 1 RB, 5MHz, QPSK)	LTE-FDD	5.73	±9.6
10178	CAH	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10179	CAH	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10180	CAH	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10181	CAF	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-FDD	5.72	±9.6
10182	CAF	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10183	AAE	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10184	CAF	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-FDD	5.73	±9.6
10185	CAF	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-FDD	6.51	±9.6
10186	AAF	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10187	CAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-FDD	5.73	±9.6
10188	CAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10189	AAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10193	CAD	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	WLAN	8.09	±9.6
10194	CAD	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	WLAN	8.12	±9.6
10195	CAD	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	WLAN	8.21	±9.6
10196	CAD	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)  IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	WLAN	8.10	±9.6
10197	CAD	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	WLAN WLAN	8.13	±9.6
10198	CAD	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	WLAN	8.27 8.03	±9.6 ±9.6
10219	CAD	IEEE 802.11n (HT Mixed, 7.2 Mbps, BFSK)	WLAN	8.13	±9.6
10221	CAD	IEEE 802.11n (HT Mixed, 45.3 Mbps, 16-QAM)	WLAN	8.27	±9.6
10222	CAD	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAW)	WLAN	8.06	±9.6
10223	CAD	IEEE 802.11n (HT Mixed, 15 Mipps, Br Grt/)	WLAN	8.48	±9.6
10224	CAD	IEEE 802.11n (HT Mixed, 30 Mbps, 10-QAM)	WLAN	8.08	±9.6
	1	1 ,		1 0.00	

Certificate No: EX-3922\_Aug23 Page 12 of 22

10225   CAC   MITS-EDD (1987H-)   WCDMA   597   92.6     10226   CAC   LTE-TDD (1987H-)   19.6   19.6     10227   CAC   LTE-TDD (1987H-)   19.6   19.6     10228   CAC   LTE-TDD (1987H-)   19.1   19.6   19.6     10228   CAC   LTE-TDD (1987H-)   19.1   19.2   19.6     10228   CAC   LTE-TDD (1987H-)   19.1   19.1   19.2   19.6     10228   CAC   LTE-TDD (1987H-)   19.1   19.1   19.2   19.6     10229   CAE   LTE-TDD (1987H-)   18.1   19.1   19.1   19.1   19.1   19.1   19.1   19.1     10230   CAE   LTE-TDD (1987H-)   18.1   19.1   1	UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
1922  CAC   LTE-TDG (SC-PDMA, 1 RB, 1 AMPL, 64-CAM)						±9.6
19228   AC   INT-TID (SC-FDMA, 1 RB, 3 I-MHz, 1 GOAM)	10226	CAC		LTE-TDD	9.49	±9.6
1922  CAS. LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-OAM)						±9.6
10291 CAR   LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-OAM)   LTE-TDD   10.25   29.6					9.22	±9.6
10231 CAR   LTE-TDD (SC-PEMA, 1 RB, 3 MHz, 1-6-0AM)   LTE-TDD   9.19   29.6     10232 CAR   LTE-TDD (SC-PEMA, 1 RB, 5 MHz, 1-6-0AM)   LTE-TDD   10.25   29.6     10233 CAR   LTE-TDD (SC-PEMA, 1 RB, 5 MHz, 1-6-0AM)   LTE-TDD   10.25   29.6     10234 CAR   LTE-TDD (SC-PEMA, 1 RB, 6 MHz, 1-6-0AM)   LTE-TDD   9.48   29.6     10235 CAR   LTE-TDD (SC-PEMA, 1 RB, 1 MHz, 1-6-0AM)   LTE-TDD   9.48   29.6     10236 CAR   LTE-TDD (SC-PEMA, 1 RB, 1 MHz, 1-6-0AM)   LTE-TDD   9.48   29.6     10237 CAR   LTE-TDD (SC-PEMA, 1 RB, 1 MHz, 1-6-0AM)   LTE-TDD   9.21   29.6     10238 CAR   LTE-TDD (SC-PEMA, 1 RB, 1 MHz, 1-6-0AM)   LTE-TDD   9.21   29.6     10238 CAR   LTE-TDD (SC-PEMA, 1 RB, 1 MHz, 1-6-0AM)   LTE-TDD   9.21   29.6     10238 CAR   LTE-TDD (SC-PEMA, 1 RB, 1 MHz, 1-6-0AM)   LTE-TDD   10.25   29.6     10249 CAR   LTE-TDD (SC-PEMA, 1 RB, 1 MHz, 1-6-0AM)   LTE-TDD   10.25   29.6     10240 CAR   LTE-TDD (SC-PEMA, 1 RB, 1 MHz, 1-6-0AM)   LTE-TDD   10.25   29.6     10241 CAR   LTE-TDD (SC-PEMA, 1 RB, 1 MHz, 1-6-0AM)   LTE-TDD   9.82   29.6     10242 CAR   LTE-TDD (SC-PEMA, 50% RB, 1 AMHz, 1-6-0AM)   LTE-TDD   9.82   29.6     10243 CAR   LTE-TDD (SC-PEMA, 50% RB, 1 AMHz, 1-6-0AM)   LTE-TDD   9.46   29.6     10244 CAR   LTE-TDD (SC-PEMA, 50% RB, 1 AMHz, 1-6-0AM)   LTE-TDD   9.46   29.6     10245 CAR   LTE-TDD (SC-PEMA, 50% RB, 1 MHz, 1-6-0AM)   LTE-TDD   10.06   29.6     10245 CAR   LTE-TDD (SC-PEMA, 50% RB, 5 MHz, 6-0AM)   LTE-TDD   10.06   29.6     10246 CAR   LTE-TDD (SC-PEMA, 50% RB, 5 MHz, 6-0AM)   LTE-TDD   10.06   29.6     10247 CAR   LTE-TDD (SC-PEMA, 50% RB, 5 MHz, 6-0AM)   LTE-TDD   9.91   29.6     10248 CAR   LTE-TDD (SC-PEMA, 50% RB, 5 MHz, 6-0AM)   LTE-TDD   9.91   29.6     10249 CAR   LTE-TDD (SC-PEMA, 50% RB, 5 MHz, 6-0AM)   LTE-TDD   9.91   29.6     10249 CAR   LTE-TDD (SC-PEMA, 50% RB, 5 MHz, 6-0AM)   LTE-TDD   9.91   29.6     10249 CAR   LTE-TDD (SC-PEMA, 50% RB, 5 MHz, 6-0AM)   LTE-TDD   9.91   29.6     10249 CAR   LTE-TDD (SC-PEMA, 50% RB, 5 MHz, 6-0AM)   LTE-TDD   9.91   29.6     10250 CAR   LTE-TDD (SC-P	10229	CAE		LTE-TDD	9.48	±9.6
19225   CAH   LTE-TDD (SC-PEMA 1 RB. SMHz, 16-OAM)	10230	CAE	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
19235   CAH   LTE-TDD   (SC-PDMA, 1 RB, SMHz, 6+CAM)					9.19	±9.6
10236   CAH   LTE-TDD (SC-FDMA, 1 RB, 5MHz, G-PSK)   LTE-TDD   9.21   ±9.6     10236   CAH   LTE-TDD (SC-FDMA, 1 RB, 10MHz, 64-QAM)   LTE-TDD   10.25   ±9.6     10237   CAH   LTE-TDD (SC-FDMA, 1 RB, 10MHz, 64-QAM)   LTE-TDD   9.48   ±9.6     10238   CAG   LTE-TDD (SC-FDMA, 1 RB, 15MHz, 1.69K)   LTE-TDD   9.48   ±9.6     10238   CAG   LTE-TDD (SC-FDMA, 1 RB, 15MHz, 1.69K)   LTE-TDD   9.48   ±9.6     10239   CAG   LTE-TDD (SC-FDMA, 1 RB, 15MHz, 1.69K)   LTE-TDD   9.21   ±9.6     10240   CAG   LTE-TDD (SC-FDMA, 1 RB, 15MHz, 64-QAM)   LTE-TDD   9.21   ±9.6     10241   CAC   LTE-TDD (SC-FDMA, 50 RB, 1 MHz, 16-CAM)   LTE-TDD   9.21   ±9.6     10242   CAC   LTE-TDD (SC-FDMA, 50 RB, 1 MHz, 16-CAM)   LTE-TDD   9.82   ±9.6     10243   CAC   LTE-TDD (SC-FDMA, 50 RB, 1 MHz, 16-CAM)   LTE-TDD   9.48   ±9.6     10244   CAC   LTE-TDD (SC-FDMA, 50 RB, 1 MHz, 16-CAM)   LTE-TDD   9.49   ±9.6     10245   CAC   LTE-TDD (SC-FDMA, 50 RB, 8 MHz, 16-CAM)   LTE-TDD   9.40   ±9.6     10246   CAC   LTE-TDD (SC-FDMA, 50 RB, 8 MHz, 16-CAM)   LTE-TDD   9.40   ±9.6     10246   CAE   LTE-TDD (SC-FDMA, 50 RB, 8 MHz, 16-CAM)   LTE-TDD   10.06   ±9.6     10247   CAH   LTE-TDD (SC-FDMA, 50 RB, 8 MHz, 16-CAM)   LTE-TDD   10.06   ±9.6     10248   CAE   LTE-TDD (SC-FDMA, 50 RB, 8 MHz, 16-CAM)   LTE-TDD   9.30   ±9.6     10249   CAH   LTE-TDD (SC-FDMA, 50 RB, 8 MHz, 16-CAM)   LTE-TDD   9.30   ±9.6     10259   CAH   LTE-TDD (SC-FDMA, 50 RB, 8 BMz, 4 BMz, 4 CAM)   LTE-TDD   10.09   ±9.6     10259   CAH   LTE-TDD (SC-FDMA, 50 RB, 8 BMz, 4 BMZ,		CAH		LTE-TDD	9.48	±9.6
10258 CAH   LTE-TIDG   SC-FDMA, 1 RB, 10MHz, 16-CAM)   LTE-TIDD   9.48   ±9.6   10263 CAH   LTE-TIDG   SC-FDMA, 1 RB, 10MHz, 64-CAM)   LTE-TIDD   9.21   ±9.6   10263 CAG   LTE-TIDG   SC-FDMA, 1 RB, 10MHz, 64-CAM)   LTE-TIDD   9.21   ±9.6   10283 CAG   LTE-TIDG   SC-FDMA, 1 RB, 15MHz, 64-CAM)   LTE-TIDD   10.25   ±9.6   10284 CAG   LTE-TIDG   SC-FDMA, 1 RB, 15MHz, 64-CAM)   LTE-TIDD   9.21   ±9.6   10284 CAG   LTE-TIDG   SC-FDMA, 1 RB, 15MHz, 64-CAM)   LTE-TIDD   9.82   ±9.6   10284 CAG   LTE-TIDG   SC-FDMA, 1 RB, 15MHz, 69-SW,   LTE-TIDD   9.82   ±9.6   10284 CAG   LTE-TIDG   SC-FDMA, 50% RB, 14MHz, 64-CAM)   LTE-TIDD   9.82   ±9.6   10284 CAG   LTE-TIDG   SC-FDMA, 50% RB, 14MHz, 64-CAM)   LTE-TIDD   9.82   ±9.6   10284 CAG   LTE-TIDG   SC-FDMA, 50% RB, 14MHz, 64-CAM)   LTE-TIDD   9.82   ±9.6   10284 CAG   LTE-TIDG   SC-FDMA, 50% RB, 14MHz, 64-CAM)   LTE-TIDD   9.82   ±9.6   10284 CAG   LTE-TIDG   SC-FDMA, 50% RB, 81MHz, 16-CAM)   LTE-TIDD   9.84   ±9.6   10284 CAG   LTE-TIDG   SC-FDMA, 50% RB, 81MHz, 16-CAM)   LTE-TIDD   9.84   ±9.6   10285 CAG   LTE-TIDG   SC-FDMA, 50% RB, 81MHz, 16-CAM)   LTE-TIDD   10.06   ±9.5   10286 CAG   LTE-TIDG   SC-FDMA, 50% RB, 81MHz, 16-CAM)   LTE-TIDD   10.06   ±9.5   10287 CAH   LTE-TIDG   SC-FDMA, 50% RB, 81MHz, 20-SW)   LTE-TIDD   10.06   ±9.5   10286 CAG   LTE-TIDG   SC-FDMA, 50% RB, 81MHz, 20-SW)   LTE-TIDD   10.06   ±9.5   10286 CAG   LTE-TIDG   SC-FDMA, 50% RB, 81MHz, 20-SW)   LTE-TIDD   9.91   ±9.6   10287 CAH   LTE-TIDG   SC-FDMA, 50% RB, 81MHz, 20-SW)   LTE-TIDD   9.91   ±9.6   10289 CAH   LTE-TIDG   SC-FDMA, 50% RB, 81MHz, 20-SW)   LTE-TIDD   9.91   ±9.6   10280 CAH   LTE-TIDG   SC-FDMA, 50% RB, 81MHz, 20-SW)   LTE-TIDD   9.92   ±9.6   10280 CAH   LTE-TIDG   SC-FDMA, 50% RB, 81MHz, 20-SW)   LTE-TIDD   9.20   ±9.6   10280 CAH   LTE-TIDG   SC-FDMA, 50% RB, 81MHz, 20-SW)   LTE-TIDD   9.80   ±9.6   10280 CAG   LTE-TIDG   SC-FDMA, 50% RB, 81MHz, 60-CAM)   LTE-TIDD   9.80   ±9.6   10280 CAG   LTE-TIDG   SC-FDMA, 50% RB, 81MHz, 60-CAM)   LTE-TIDD   9.80   ±9.6   10280 CAG	10233	CAH	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10256   CAH   LTE-TDD (SC-FDMA, 1 RB, 10MHz, 64-CAM)   LTE-TDD   10.25   19.6     10238   CAG   LTE-TDD (SC-FDMA, 1 RB, 15MHz, 16-CAM)   LTE-TDD   9.48   19.6     10239   CAG   LTE-TDD (SC-FDMA, 1 RB, 15MHz, 16-CAM)   LTE-TDD   9.48   19.6     10240   CAG   LTE-TDD (SC-FDMA, 1 RB, 15MHz, 64-CAM)   LTE-TDD   9.21   19.6     10241   CAC   LTE-TDD (SC-FDMA, 50'R, RB, 15MHz, 0-FSK)   LTE-TDD   9.21   19.6     10242   CAC   LTE-TDD (SC-FDMA, 50'R, RB, 15MHz, 0-FSK)   LTE-TDD   9.21   19.6     10243   CAC   LTE-TDD (SC-FDMA, 50'R, RB, 15MHz, 0-FSK)   LTE-TDD   9.88   19.5     10245   CAC   LTE-TDD (SC-FDMA, 50'R, RB, 14MHz, 0-FSK)   LTE-TDD   9.88   19.5     10246   CAC   LTE-TDD (SC-FDMA, 50'R, RB, 14MHz, 0-FSK)   LTE-TDD   9.88   19.5     10247   CAC   LTE-TDD (SC-FDMA, 50'R, RB, 14MHz, 0-FSK)   LTE-TDD   10.06   29.6     10248   CAC   LTE-TDD (SC-FDMA, 50'R, RB, 34MHz, 10-FSM)   LTE-TDD   10.06   29.6     10249   CAC   LTE-TDD (SC-FDMA, 50'R, RB, 34MHz, 10-FSM)   LTE-TDD   10.06   29.6     10246   CAE   LTE-TDD (SC-FDMA, 50'R, RB, 34MHz, 10-FSM)   LTE-TDD   10.06   29.6     10247   CAH   LTE-TDD (SC-FDMA, 50'R, RB, 34MHz, 10-FSM)   LTE-TDD   10.06   29.6     10248   CAE   LTE-TDD (SC-FDMA, 50'R, RB, 54MHz, 10-CAM)   LTE-TDD   5.31   29.6     10249   CAH   LTE-TDD (SC-FDMA, 50'R, RB, 54MHz, 10-CAM)   LTE-TDD   5.31   29.6     10240   CAH   LTE-TDD (SC-FDMA, 50'R, RB, 54MHz, 10-CAM)   LTE-TDD   5.9   29.6     10240   CAH   LTE-TDD (SC-FDMA, 50'R, RB, 54MHz, 10-CAM)   LTE-TDD   5.9   29.6     10250   CAH   LTE-TDD (SC-FDMA, 50'R, RB, 54MHz, 10-CAM)   LTE-TDD   5.9   29.6     10250   CAH   LTE-TDD (SC-FDMA, 50'R, RB, 15MHz, 10-CAM)   LTE-TDD   5.9   29.6     10250   CAH   LTE-TDD (SC-FDMA, 50'R, RB, 15MHz, 10-CAM)   LTE-TDD   5.9   29.6     10250   CAH   LTE-TDD (SC-FDMA, 50'R, RB, 15MHz, 10-CAM)   LTE-TDD   5.9   29.6     10250   CAH   LTE-TDD (SC-FDMA, 50'R, RB, 15MHz, 10-CAM)   LTE-TDD   5.9   29.6     10250   CAH   LTE-TDD (SC-FDMA, 50'R, RB, 15MHz, 10-CAM)   LTE-TDD   5.9   29.6     10250   CAE   LTE-TDD (SC-FD						±9.6
10237   CAH   LTF-TDD   SC-FDMA 1 RB, 15MHz, 16-QAM)   LTF-TDD   9.21   19.6						±9.6
10288   CAG   LTF-TDD (SC-FDMA, 1 RB, 15MHz, 16-CAM)   LTF-TDD   9.48   9.58     10280   CAG   LTF-TDD (SC-FDMA, 1 RB, 15MHz, CPSK)   LTF-TDD   9.21   19.6     10281   CAG   LTF-TDD (SC-FDMA, 50 RB, 15 MHz, CPSK)   LTF-TDD   9.21   19.6     10282   CAG   LTF-TDD (SC-FDMA, 50 RB, 15 MHz, CPSK)   LTF-TDD   9.82   19.6     10283   CAG   LTF-TDD (SC-FDMA, 50 RB, 14 MHz, 16-CAM)   LTF-TDD   9.88   19.5     10284   CAG   LTF-TDD (SC-FDMA, 50 RB, 14 MHz, 16-CAM)   LTF-TDD   9.88   19.5     10284   CAG   LTF-TDD (SC-FDMA, 50 RB, 14 MHz, 16-CAM)   LTF-TDD   10.66   29.5     10285   CAE   LTF-TDD (SC-FDMA, 50 RB, 14 MHz, 16-CAM)   LTF-TDD   10.66   29.5     10285   CAE   LTF-TDD (SC-FDMA, 50 RB, 30 MHz, 16-CAM)   LTF-TDD   10.66   29.5     10285   CAE   LTF-TDD (SC-FDMA, 50 RB, 30 MHz, 16-CAM)   LTF-TDD   10.66   29.5     10286   CAE   LTF-TDD (SC-FDMA, 50 RB, 30 MHz, 16-CAM)   LTF-TDD   10.66   29.5     10287   CAH   LTF-TDD (SC-FDMA, 50 RB, 30 MHz, 16-CAM)   LTF-TDD   10.66   29.6     10288   CAE   LTF-TDD (SC-FDMA, 50 RB, 30 MHz, 16-CAM)   LTF-TDD   10.60   29.6     10289   CAH   LTF-TDD (SC-FDMA, 50 RB, 50 MHz, 16-CAM)   LTF-TDD   10.60   29.6     10289   CAH   LTF-TDD (SC-FDMA, 50 RB, 50 MHz, 16-CAM)   LTF-TDD   10.60   29.6     10285   CAH   LTF-TDD (SC-FDMA, 50 RB, 50 MHz, 16-CAM)   LTF-TDD   5.81   29.6     10285   CAH   LTF-TDD (SC-FDMA, 50 RB, 50 MHz, 16-CAM)   LTF-TDD   5.82   29.6     10285   CAH   LTF-TDD (SC-FDMA, 50 RB, 10 MHz, 16-CAM)   LTF-TDD   10.17   29.8     10285   CAH   LTF-TDD (SC-FDMA, 50 RB, 10 MHz, 16-CAM)   LTF-TDD   10.17   29.6     10285   CAG   LTF-TDD (SC-FDMA, 50 RB, 15 MHz, 16-CAM)   LTF-TDD   9.90   29.6     10285   CAG   LTF-TDD (SC-FDMA, 50 RB, 15 MHz, 16-CAM)   LTF-TDD   9.20   29.6     10285   CAG   LTF-TDD (SC-FDMA, 50 RB, 15 MHz, 16-CAM)   LTF-TDD   9.20   29.6     10285   CAG   LTF-TDD (SC-FDMA, 50 RB, 15 MHz, 16-CAM)   LTF-TDD   9.20   29.6     10286   CAG   LTF-TDD (SC-FDMA, 10 RB, 15 MHz, 16-CAM)   LTF-TDD   9.90   29.6     10286   CAG   LTF-TDD (SC-FDMA, 10 RB, 15 MHz, 16-C						±9.6
10280   CAG   LTE-TDD (SC-FDMA, 1 RB, 15MHz, 64-OAM)   LTE-TDD   9.21   9.86   10241   CAC   LTE-TDD (SC-FDMA, 1 RB, 15MHz, 05-SK)   LTE-TDD   9.22   9.67   10242   CAC   LTE-TDD (SC-FDMA, 50% RB, 14 MHz, 16-OAM)   LTE-TDD   9.82   9.56   10243   CAC   LTE-TDD (SC-FDMA, 50% RB, 14 MHz, 16-OAM)   LTE-TDD   9.88   9.95   10243   CAC   LTE-TDD (SC-FDMA, 50% RB, 14 MHz, 16-OAM)   LTE-TDD   10.08   9.96   10244   CAC   LTE-TDD (SC-FDMA, 50% RB, 14 MHz, 16-OAM)   LTE-TDD   10.08   19.06   10244   CAC   LTE-TDD (SC-FDMA, 50% RB, 13 MHz, 16-OAM)   LTE-TDD   10.08   19.06   10245   CAE   LTE-TDD (SC-FDMA, 50% RB, 13 MHz, 16-OAM)   LTE-TDD   10.08   19.06   10246   CAE   LTE-TDD (SC-FDMA, 50% RB, 13 MHz, 16-OAM)   LTE-TDD   10.09   19.06   10247   CAH   LTE-TDD (SC-FDMA, 50% RB, 50 MHz, 16-OAM)   LTE-TDD   9.91   19.06   CAP   CAP						
10241 CAG						
10242   CAC						±9.6
10242   CAC   LTE-TDD (SC-PDMA, 50% RB, 14 MHz, 6-CAM)						
10242   CAC   LTE-TID (SC-FDMA, 50% RB, 1.4MHz, 0.PSK)   LTE-TID D   9.46   9.9.6   10245   CAE   LTE-TID (SC-FDMA, 50% RB, 3 MHz, 18-CAM)   LTE-TID D   10.06   19.8   10245   CAE   LTE-TID (SC-FDMA, 50% RB, 3 MHz, 18-CAM)   LTE-TID D   10.08   19.6   10246   CAE   LTE-TID (SC-FDMA, 50% RB, 3 MHz, 18-CAM)   LTE-TID D   9.91   19.6   10247   CAH   LTE-TID (SC-FDMA, 50% RB, 5 MHz, 64-CAM)   LTE-TID D   9.91   19.6   10247   CAH   LTE-TID (SC-FDMA, 50% RB, 5 MHz, 0.8 CAM)   LTE-TID D   9.91   19.6   10249   CAH   LTE-TID (SC-FDMA, 50% RB, 5 MHz, 0.8 CAM)   LTE-TID D   9.91   19.6   10.99   10.99   10.9						
10246   CAE   LTE-TID (SC-FDMA, 50% RB, 3MHz, 16-QAM)						
10246   CAE   LTE-TID (SC-FDMA, 50% RB, 3MHz, 64-CAM)					9.46	±9.6
10246   CAE   LITE-TDD (SC-FDMA, 50% RB, 3MHz, 6-OAM)   LITE-TDD   9.90   19.6     10247   CAH   LITE-TDD (SC-FDMA, 50% RB, 5MHz, 16-OAM)   LITE-TDD   10.09   19.6     10248   CAH   LITE-TDD (SC-FDMA, 50% RB, 5MHz, 6-OAM)   LITE-TDD   10.09   19.6     10249   CAH   LITE-TDD (SC-FDMA, 50% RB, 5MHz, 6-OAM)   LITE-TDD   10.10   19.9     10250   CAH   LITE-TDD (SC-FDMA, 50% RB, 5MHz, 6-OAM)   LITE-TDD   10.17   19.8     10251   CAH   LITE-TDD (SC-FDMA, 50% RB, 10MHz, 6-OAM)   LITE-TDD   10.17   19.8     10252   CAH   LITE-TDD (SC-FDMA, 50% RB, 10MHz, 6-OAM)   LITE-TDD   10.17   19.8     10252   CAH   LITE-TDD (SC-FDMA, 50% RB, 10MHz, 6-OAM)   LITE-TDD   10.17   19.8     10252   CAG   LITE-TDD (SC-FDMA, 50% RB, 15MHz, 6-OAM)   LITE-TDD   10.17   19.8     10255   CAG   LITE-TDD (SC-FDMA, 50% RB, 15MHz, 6-OAM)   LITE-TDD   10.14   19.6     10255   CAG   LITE-TDD (SC-FDMA, 50% RB, 15MHz, 6-OAM)   LITE-TDD   10.14   19.6     10256   CAC   LITE-TDD (SC-FDMA, 50% RB, 15MHz, 6-OAM)   LITE-TDD   10.14   19.6     10257   CAC   LITE-TDD (SC-FDMA, 100% RB, 1-14MHz, 16-OAM)   LITE-TDD   9.96   19.6     10258   CAC   LITE-TDD (SC-FDMA, 100% RB, 1-14MHz, 16-OAM)   LITE-TDD   10.08   19.6     10259   CAC   LITE-TDD (SC-FDMA, 100% RB, 1-14MHz, 16-OAM)   LITE-TDD   10.08   19.6     10259   CAC   LITE-TDD (SC-FDMA, 100% RB, 1-14MHz, 16-OAM)   LITE-TDD   10.14   19.6     10259   CAC   LITE-TDD (SC-FDMA, 100% RB, 1-14MHz, 6-OAM)   LITE-TDD   10.10     10259   CAC   LITE-TDD (SC-FDMA, 100% RB, 3MHz, 6-OAM)   LITE-TDD   9.97   19.6     10260   CAE   LITE-TDD (SC-FDMA, 100% RB, 3MHz, 6-OAM)   LITE-TDD   9.97   19.6     10261   CAE   LITE-TDD (SC-FDMA, 100% RB, 5MHz, 6-OAM)   LITE-TDD   9.92   19.6     10262   CAH   LITE-TDD (SC-FDMA, 100% RB, 5MHz, 6-OAM)   LITE-TDD   9.92   19.6     10263   CAH   LITE-TDD (SC-FDMA, 100% RB, 5MHz, 6-OAM)   LITE-TDD   9.22   19.6     10264   CAH   LITE-TDD (SC-FDMA, 100% RB, 5MHz, 6-OAM)   LITE-TDD   9.92   19.6     10265   CAH   LITE-TDD (SC-FDMA, 100% RB, 5MHz, 6-OAM)   LITE-TDD   9.93   19.8     10266						±9.6
10247   CAH						±9.6
10248   CAH   LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-CAM)   LTE-TDD   10.09   ±9.6						
10250						±9.6
10250   CAH   LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)   LTE-TDD   9.81   9.6						
10251						
10252   CAH				LTE-TDD	9.81	±9.6
10253   CAG						±9.6
10254   CAG						±9.6
10255   CAG   LTE-TDD (SC-FDMA, 100% RB, 15MHz, QPSK)   LTE-TDD   9.20   49.6   10256   CAC   LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)   LTE-TDD   10.08   49.6   10257   CAC   LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)   LTE-TDD   10.08   49.6   10258   CAC   LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)   LTE-TDD   9.34   49.8   10258   CAC   LTE-TDD (SC-FDMA, 100% RB, 3.1 MHz, 64-QAM)   LTE-TDD   9.39   49.6   10250   CAE   LTE-TDD (SC-FDMA, 100% RB, 3.1 MHz, 64-QAM)   LTE-TDD   9.39   49.6   10261   CAE   LTE-TDD (SC-FDMA, 100% RB, 3.1 MHz, 64-QAM)   LTE-TDD   9.37   49.6   10261   CAE   LTE-TDD (SC-FDMA, 100% RB, 3.1 MHz, 2.0 MM)   LTE-TDD   9.24   49.6   10262   CAE   LTE-TDD (SC-FDMA, 100% RB, 3.1 MHz, 2.0 MM)   LTE-TDD   9.23   49.6   10262   CAE   LTE-TDD (SC-FDMA, 100% RB, 5.0 MHz, 16-QAM)   LTE-TDD   9.23   49.6   10263   CAH   LTE-TDD (SC-FDMA, 100% RB, 5.0 MHz, 64-QAM)   LTE-TDD   9.24   49.6   10264   CAH   LTE-TDD (SC-FDMA, 100% RB, 5.0 MHz, 64-QAM)   LTE-TDD   10.16   49.6   10265   CAH   LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)   LTE-TDD   9.23   49.6   10266   CAH   LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)   LTE-TDD   9.29   49.6   10266   CAH   LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)   LTE-TDD   9.20   49.6   10266   CAH   LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 2.0 MMz, 2				LTE-TDD	9.90	±9.6
10256   CAC   LTE-TDD   (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)   LTE-TDD   9.96   ±9.6   10257   CAC   LTE-TDD   (SC-FDMA, 100% RB, 1.4 MHz, QFSK)   LTE-TDD   9.34   ±9.6   10258   CAC   LTE-TDD   (SC-FDMA, 100% RB, 1.4 MHz, QFSK)   LTE-TDD   9.34   ±9.6   10259   CAC   LTE-TDD   (SC-FDMA, 100% RB, 3.4 MHz, QFSK)   LTE-TDD   9.98   ±9.6   10260   CAE   LTE-TDD   (SC-FDMA, 100% RB, 3.8 MHz, QFSK)   LTE-TDD   9.97   ±9.6   10261   CAE   LTE-TDD   SC-FDMA, 100% RB, 3.8 MHz, QFSK)   LTE-TDD   9.24   ±9.6   10262   CAH   LTE-TDD   SC-FDMA, 100% RB, 3.8 MHz, QFSK)   LTE-TDD   9.24   ±9.6   10262   CAH   LTE-TDD   SC-FDMA, 100% RB, 5.8 MHz, QFSK)   LTE-TDD   9.24   ±9.6   10263   CAH   LTE-TDD   SC-FDMA, 100% RB, 5.8 MHz, QFSK)   LTE-TDD   9.23   ±9.6   10265   CAH   LTE-TDD   SC-FDMA, 100% RB, 5.8 MHz, QFSK)   LTE-TDD   9.23   ±9.6   10265   CAH   LTE-TDD   SC-FDMA, 100% RB, 5.8 MHz, QFSK)   LTE-TDD   9.23   ±9.6   10265   CAH   LTE-TDD   SC-FDMA, 100% RB, 5.8 MHz, QFSK)   LTE-TDD   9.92   ±9.6   10266   CAH   LTE-TDD   SC-FDMA, 100% RB, 10MHz, 64-QAM)   LTE-TDD   10.07   ±9.6   10266   CAH   LTE-TDD   SC-FDMA, 100% RB, 10MHz, 64-QAM)   LTE-TDD   10.07   ±9.6   10266   CAH   LTE-TDD   SC-FDMA, 100% RB, 10MHz, 64-QAM)   LTE-TDD   10.06   ±9.6   10266   CAH   LTE-TDD   SC-FDMA, 100% RB, 15MHz, 64-QAM)   LTE-TDD   10.06   ±9.6   10266   LTE-TDD   SC-FDMA, 100% RB, 15MHz, 64-QAM)   LTE-TDD   10.16   ±9.6   LTE-TDD   SC-FDMA, 100% RB, 15MHz, 64-QAM)   LTE-TDD   10.16   ±9.6   LTE-TDD   SC-FDMA, 100% RB, 15MHz, 64-QAM)   LTE-TDD   10.16   ±9.6   LTE-TDD   SC-FDMA, 100% RB, 15MHz, 64-QAM)   LTE-TDD   10.16   ±9.6   LTE-TDD   SC-FDMA, 100% RB, 15MHz, 64-QAM)   LTE-TDD   10.16   ±9.6   LTE-TDD   SC-FDMA, 100% RB, 15MHz, 64-QAM)   LTE-TDD   10.16   ±9.6   LTE-TDD   SC-FDMA, 100% RB, 15MHz, 64-QAM)   LTE-TDD   10.16   ±9.6   LTE-TDD   SC-FDMA, 100% RB, 15MHz, 64-QAM)   LTE-TDD   10.17   ±9.6   LTE-TDD   SC-FDMA, 100% RB, 15MHz, 64-QAM)   LTE-TDD   SC-FDMA, 500% RB, 5MHz, 64-QAM)   LTE-TDD   SC-FDMA, 500% RB, 5MHz, 64-QAM, 9LS-C						±9.6
10257 CAC LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-OAM)						±9.6
10255   CAC   LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 6-QAM)   LTE-TDD   9.94   ±9.6				LTE-TDD	9.96	±9.6
10259   CAE				LTE-TDD	10.08	
10260 CAE   LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)				LTE-TDD	9.34	±9.6
10261 CAE	10259	CAE	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-TDD	9.98	±9.6
10262   CAH				LTE-TDD	9.97	±9.6
10263 CAH				LTE-TDD	9.24	±9.6
10264   CAH				LTE-TDD	9.83	
10265 CAH   LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)   LTE-TDD   9.92 ±9.6		_		LTE-TDD	10.16	±9.6
10266   CAH   LTE-TDD (SC-FDMA, 100% RB, 10MHz, 64-QAM)   LTE-TDD   10.07   ±9.6						
10267 CAH						±9.6
10268   CAG	10266	CAH	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-TDD	10.07	±9.6
10269   CAG	10267	CAH	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-TDD	9.30	±9.6
10270   CAG   LTE-TDD (SC-FDMA, 100% RB, 15MHz, QPSK)   LTE-TDD   9.58   ±9.6     10274   CAC   UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)   WCDMA   4.87   ±9.6     10275   CAC   UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)   WCDMA   3.96   ±9.6     10277   CAA   PHS (QPSK, Subtest 5, 3GPP Rel8.4)   PHS   11.81   ±9.6     10278   CAA   PHS (QPSK, BW 884 MHz, Rolloff 0.5)   PHS   11.81   ±9.6     10279   CAA   PHS (QPSK, BW 884 MHz, Rolloff 0.5)   PHS   11.81   ±9.6     10290   AAB   CDMA2000, RC1, SO55, Full Rate   CDMA2000   3.91   ±9.6     10291   AAB   CDMA2000, RC3, SO55, Full Rate   CDMA2000   3.46   ±9.6     10292   AAB   CDMA2000, RC3, SO32, Full Rate   CDMA2000   3.46   ±9.6     10293   AAB   CDMA2000, RC3, SO3, Full Rate   CDMA2000   3.50   ±9.6     10294   AAB   CDMA2000, RC3, SO3, Full Rate   CDMA2000   3.50   ±9.6     10295   AAB   CDMA2000, RC3, SO3, Full Rate   CDMA2000   3.50   ±9.6     10296   AAB   CDMA2000, RC3, SO3, Full Rate   CDMA2000   3.50   ±9.6     10297   AAE   LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)   LTE-FDD   5.72   ±9.6     10299   AAE   LTE-FDD (SC-FDMA, 50% RB, 3 MHz, GPSK)   LTE-FDD   6.39   ±9.6     10299   AAE   LTE-FDD (SC-FDMA, 50% RB, 3 MHz, GPSK)   LTE-FDD   6.80   ±9.6     10300   AAE   LTE-FDD (SC-FDMA, 50% RB, 3 MHz, GPSK, PUSC)   WIMAX   12.03   ±9.6     10301   AAA   LEEE 802.16e WIMAX (29:18, 5ms, 10 MHz, QPSK, PUSC)   WIMAX   12.57   ±9.6     10303   AAA   LEEE 802.16e WIMAX (29:18, 5ms, 10 MHz, GPSK, PUSC)   WIMAX   12.57   ±9.6     10304   AAA   LEEE 802.16e WIMAX (29:18, 5ms, 10 MHz, GPSK, PUSC)   WIMAX   12.57   ±9.6     10305   AAA   LEEE 802.16e WIMAX (29:18, 5ms, 10 MHz, GAQAM, PUSC)   WIMAX   12.54   ±9.6     10305   AAA   LEEE 802.16e WIMAX (29:18, 5ms, 10 MHz, GAQAM, PUSC)   WIMAX   12.54   ±9.6     10305   AAA   LEEE 802.16e WIMAX (31:15, 10ms, 10 MHz, GAQAM, PUSC)   WIMAX   15.24   ±9.6     10305   AAA   LEEE 802.16e WIMAX (31:15, 10ms, 10 MHz, GAQAM, PUSC)   WIMAX   15.24   ±9.6     10306   AAA   LEEE 802.16e WIMAX (31:15, 10ms, 10 MHz, GAQAM, PUSC)   WIMA				LTE-TDD	10.06	±9.6
10274   CAC   UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)				LTE-TDD	10.13	±9.6
10275   CAC   UMTS-FDD (HSUPA, Subtest 5, 3GPP Rei8.4)						±9.6
10277   CAA						±9.6
10278         CAA         PHS (QPSK, BW 884 MHz, Rolloff 0.5)         PHS         11.81         ±9.6           10279         CAA         PHS (QPSK, BW 884 MHz, Rolloff 0.38)         PHS         12.18         ±9.6           10290         AAB         CDMA2000, RC1, SO55, Full Rate         CDMA2000         3.91         ±9.6           10291         AAB         CDMA2000, RC3, SO55, Full Rate         CDMA2000         3.46         ±9.6           10292         AAB         CDMA2000, RC3, SO32, Full Rate         CDMA2000         3.39         ±9.6           10293         AAB         CDMA2000, RC3, SO3, Full Rate         CDMA2000         3.50         ±9.6           10295         AAB         CDMA2000, RC3, SO3, Full Rate         CDMA2000         3.50         ±9.6           10295         AAB         CDMA2000, RC3, SO3, Full Rate         CDMA2000         3.50         ±9.6           10295         AAB         CDMA2000, RC3, SO3, Full Rate         CDMA2000         3.50         ±9.6           10295         AAB         CDMA2000, RC3, SO3, Full Rate         CDMA2000         12.49         ±9.6           10297         AAE         LTE-FDD (SC-FDMA, 50% RB, 20MHz, QPSK)         LTE-FDD         5.81         ±9.6           10298         AAE						±9.6
10279   CAA   PHS (QPSK, BW 884 MHz, Rolloff 0.38)   PHS   12.18   ±9.6					11.81	±9.6
10290 AAB   CDMA2000, RC1, SO55, Full Rate   CDMA2000   3.91   ±9.6						
10291         AAB         CDMA2000, RC3, SO55, Full Rate         CDMA2000         3.46         ±9.6           10292         AAB         CDMA2000, RC3, SO32, Full Rate         CDMA2000         3.39         ±9.6           10293         AAB         CDMA2000, RC3, SO3, Full Rate         CDMA2000         3.50         ±9.6           10293         AAB         CDMA2000, RC1, SO3, 1/8th Rate 25 fr.         CDMA2000         12.49         ±9.6           10297         AAE         LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)         LTE-FDD         5.81         ±9.6           10298         AAE         LTE-FDD (SC-FDMA, 50% RB, 3MHz, QPSK)         LTE-FDD         5.72         ±9.6           10299         AAE         LTE-FDD (SC-FDMA, 50% RB, 3MHz, G-QAM)         LTE-FDD         6.39         ±9.6           10300         AAE         LTE-FDD (SC-FDMA, 50% RB, 3MHz, G-QAM)         LTE-FDD         6.60         ±9.6           10301         AAA         IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, QPSK, PUSC)         WiMAX         12.03         ±9.6           10302         AAA         IEEE 802.16e WiMAX (31:15, 5 ms, 10 MHz, 64QAM, PUSC)         WiMAX         12.57         ±9.6           10303         AAA         IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, 64QAM, PUSC)         WiMAX <td< td=""><td></td><td></td><td></td><td></td><td></td><td></td></td<>						
10292         AAB         CDMA2000, RC3, SO32, Full Rate         CDMA2000         3.39         ±9.6           10293         AAB         CDMA2000, RC3, SO3, Full Rate         CDMA2000         3.50         ±9.6           10295         AAB         CDMA2000, RC1, SO3, 1/8th Rate 25 fr.         CDMA2000         12.49         ±9.6           10297         AAE         LTE-FDD (SC-FDMA, 50% RB, 20MHz, QPSK)         LTE-FDD         5.81         ±9.6           10298         AAE         LTE-FDD (SC-FDMA, 50% RB, 3MHz, QPSK)         LTE-FDD         5.72         ±9.6           10299         AAE         LTE-FDD (SC-FDMA, 50% RB, 3MHz, 6-QAM)         LTE-FDD         6.39         ±9.6           10300         AAE         LTE-FDD (SC-FDMA, 50% RB, 3MHz, 6-QAM)         LTE-FDD         6.60         ±9.6           10301         AAA         IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC)         WIMAX         12.03         ±9.6           10302         AAA         IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, GPSK, PUSC)         WIMAX         12.57         ±9.6           10303         AAA         IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)         WIMAX         12.52         ±9.6           10305         AAA         IEEE 802.16e WIMAX (29:18, 5ms, 10 MHz, 64QAM, PUSC)         WIMAX		_				
10293 AAB   CDMA2000, RC3, SO3, Full Rate   CDMA2000   3.50   ±9.6     10295 AAB   CDMA2000, RC1, SO3, 1/8th Rate 25 fr.   CDMA2000   12.49   ±9.6     10297 AAE   LTE-FDD (SC-FDMA, 50% RB, 20MHz, QPSK)   LTE-FDD   5.81   ±9.6     10298 AAE   LTE-FDD (SC-FDMA, 50% RB, 3MHz, QPSK)   LTE-FDD   5.72   ±9.6     10299 AAE   LTE-FDD (SC-FDMA, 50% RB, 3MHz, G-QAM)   LTE-FDD   6.39   ±9.6     10300 AAE   LTE-FDD (SC-FDMA, 50% RB, 3MHz, 64-QAM)   LTE-FDD   6.60   ±9.6     10301 AAA   LEEE 802.16e WiMAX (29:18, 5ms, 10 MHz, QPSK, PUSC)   WiMAX   12.03   ±9.6     10302 AAA   LEEE 802.16e WiMAX (29:18, 5ms, 10 MHz, QPSK, PUSC, 3 CTRL symbols)   WiMAX   12.57   ±9.6     10303 AAA   LEEE 802.16e WiMAX (29:18, 5ms, 10 MHz, GAQAM, PUSC)   WiMAX   12.52   ±9.6     10304 AAA   LEEE 802.16e WiMAX (29:18, 5ms, 10 MHz, GAQAM, PUSC)   WiMAX   12.52   ±9.6     10305 AAA   LEEE 802.16e WiMAX (29:18, 5ms, 10 MHz, GAQAM, PUSC)   WiMAX   11.86   ±9.6     10305 AAA   LEEE 802.16e WiMAX (31:15, 10ms, 10 MHz, GAQAM, PUSC)   WiMAX   15.24   ±9.6     10305 AAA   LEEE 802.16e WiMAX (31:15, 10ms, 10 MHz, GAQAM, PUSC)   WiMAX   15.24   ±9.6     10305 AAA   LEEE 802.16e WiMAX (31:15, 10ms, 10 MHz, GAQAM, PUSC)   WiMAX   15.24   ±9.6     10305 AAA   LEEE 802.16e WiMAX (31:15, 10ms, 10 MHz, GAQAM, PUSC)   WiMAX   15.24   ±9.6     10306 AAA   LEEE 802.16e WiMAX (31:15, 10ms, 10 MHz, GAQAM, PUSC)   WiMAX   15.24   ±9.6     10307 AAA   LEEE 802.16e WiMAX (31:15, 10ms, 10 MHz, GAQAM, PUSC)   WiMAX   15.24   ±9.6     10308 AAA   LEEE 802.16e WiMAX (31:15, 10ms, 10 MHz, GAQAM, PUSC)   WiMAX   15.24   ±9.6     10309 AAA   LEEE 802.16e WiMAX (31:15, 10ms, 10 MHz, GAQAM, PUSC)   WiMAX   15.24   ±9.6     10300 AAA   LEEE 802.16e WiMAX (31:15, 10ms, 10 MHz, GAQAM, PUSC)   WiMAX   15.24   ±9.6     10300 AAA   LEEE 802.16e WiMAX (31:15, 10ms, 10 MHz, GAQAM, PUSC)   WiMAX   15.24   ±9.6     10300 AAA   LEEE 802.16e WiMAX (31:15, 10ms, 10 MHz, GAQAM, PUSC)   WiMAX   15.24   ±9.6     10300 AAA   LEEE 802.16e WiMAX (31:15, 10ms, 10 MHz, GAQAM, PUSC)   WiMAX   15.2	k-101771-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-			CDMA2000	3.46	±9.6
10295         AAB         CDMA2000, RC1, SO3, 1/8th Rate 25 fr.         CDMA2000         12.49         ±9.6           10297         AAE         LTE-FDD (SC-FDMA, 50% RB, 20MHz, QPSK)         LTE-FDD         5.81         ±9.6           10298         AAE         LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)         LTE-FDD         5.72         ±9.6           10299         AAE         LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)         LTE-FDD         6.39         ±9.6           10300         AAE         LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)         LTE-FDD         6.60         ±9.6           10301         AAA         IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, QPSK, PUSC)         WiMAX         12.03         ±9.6           10302         AAA         IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, 64QAM, PUSC)         WiMAX         12.57         ±9.6           10303         AAA         IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, 64QAM, PUSC)         WiMAX         12.52         ±9.6           10305         AAA         IEEE 802.16e WiMAX (31:15, 5 ms, 10 MHz, 64QAM, PUSC)         WiMAX         11.86         ±9.6           10305         AAA         IEEE 802.16e WiMAX (31:15, 10 ms, 10 MHz, 64QAM, PUSC)         WiMAX         11.86         ±9.6						
10297         AAE         LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)         LTE-FDD         5.81         ±9.6           10298         AAE         LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)         LTE-FDD         5.72         ±9.6           10299         AAE         LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)         LTE-FDD         6.39         ±9.6           10300         AAE         LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)         LTE-FDD         6.60         ±9.6           10301         AAA         IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, QPSK, PUSC)         WiMAX         12.03         ±9.6           10302         AAA         IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, 64QAM, PUSC, 3 CTRL symbols)         WiMAX         12.57         ±9.6           10303         AAA         IEEE 802.16e WiMAX (31:15, 5 ms, 10 MHz, 64QAM, PUSC)         WiMAX         12.52         ±9.6           10305         AAA         IEEE 802.16e WiMAX (31:15, 10 ms, 10 MHz, 64QAM, PUSC)         WiMAX         11.86         ±9.6           10305         AAA         IEEE 802.16e WiMAX (31:15, 10 ms, 10 MHz, 64QAM, PUSC)         WiMAX         11.86         ±9.6		_				
10298         AAE         LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)         LTE-FDD         5.72         ±9.6           10299         AAE         LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)         LTE-FDD         6.39         ±9.6           10300         AAE         LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)         LTE-FDD         6.60         ±9.6           10301         AAA         IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, QPSK, PUSC)         WiMAX         12.03         ±9.6           10302         AAA         IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, QPSK, PUSC, 3 CTRL symbols)         WiMAX         12.57         ±9.6           10303         AAA         IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, 64QAM, PUSC)         WiMAX         12.52         ±9.6           10304         AAA         IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, 64QAM, PUSC)         WiMAX         11.86         ±9.6           10305         AAA         IEEE 802.16e WiMAX (31:15, 10 ms, 10 MHz, 64QAM, PUSC)         WiMAX         11.86         ±9.6           10305         AAA         IEEE 802.16e WiMAX (31:15, 10 ms, 10 MHz, 64QAM, PUSC)         WiMAX         11.524         ±9.6						
10299         AAE         LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)         LTE-FDD         6.39         ±9.6           10300         AAE         LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)         LTE-FDD         6.60         ±9.6           10301         AAA         IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, QPSK, PUSC)         WiMAX         12.03         ±9.6           10302         AAA         IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, QPSK, PUSC, 3 CTRL symbols)         WiMAX         12.57         ±9.6           10303         AAA         IEEE 802.16e WiMAX (31:15, 5 ms, 10 MHz, 64QAM, PUSC)         WiMAX         12.52         ±9.6           10304         AAA         IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, 64QAM, PUSC)         WiMAX         11.86         ±9.6           10305         AAA         IEEE 802.16e WiMAX (31:15, 10 ms, 10 MHz, 64QAM, PUSC)         WiMAX         15.24         ±9.6						
10300         AAE         LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)         LTE-FDD         6.60         ±9.6           10301         AAA         IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, QPSK, PUSC)         WiMAX         12.03         ±9.6           10302         AAA         IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, QPSK, PUSC, 3 CTRL symbols)         WiMAX         12.57         ±9.6           10303         AAA         IEEE 802.16e WiMAX (31:15, 5 ms, 10 MHz, 64QAM, PUSC)         WiMAX         12.52         ±9.6           10304         AAA         IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, 64QAM, PUSC)         WiMAX         11.86         ±9.6           10305         AAA         IEEE 802.16e WiMAX (31:15, 10 ms, 10 MHz, 64QAM, PUSC, 15 symbols)         WiMAX         15.24         ±9.6						
10301         AAA         IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, QPSK, PUSC)         WiMAX         12.03         ±9.6           10302         AAA         IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, QPSK, PUSC, 3 CTRL symbols)         WiMAX         12.57         ±9.6           10303         AAA         IEEE 802.16e WiMAX (31:15, 5 ms, 10 MHz, 64QAM, PUSC)         WiMAX         12.52         ±9.6           10304         AAA         IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, 64QAM, PUSC)         WiMAX         11.86         ±9.6           10305         AAA         IEEE 802.16e WiMAX (31:15, 10 ms, 10 MHz, 64QAM, PUSC, 15 symbols)         WiMAX         15.24         ±9.6					6.39	±9.6
10302         AAA         IEEE 802.16e WiMAX (29:18, 5ms, 10 MHz, QPSK, PUSC, 3 CTRL symbols)         WiMAX         12.57         ±9.6           10303         AAA         IEEE 802.16e WiMAX (31:15, 5ms, 10 MHz, 64QAM, PUSC)         WiMAX         12.52         ±9.6           10304         AAA         IEEE 802.16e WiMAX (29:18, 5ms, 10 MHz, 64QAM, PUSC)         WiMAX         11.86         ±9.6           10305         AAA         IEEE 802.16e WiMAX (31:15, 10 ms, 10 MHz, 64QAM, PUSC, 15 symbols)         WiMAX         15.24         ±9.6				LTE-FDD	6.60	±9.6
10303         AAA         IEEE 802.16e WiMAX (31:15, 5 ms, 10 MHz, 64QAM, PUSC)         WiMAX         12.52         ±9.6           10304         AAA         IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, 64QAM, PUSC)         WiMAX         11.86         ±9.6           10305         AAA         IEEE 802.16e WiMAX (31:15, 10 ms, 10 MHz, 64QAM, PUSC, 15 symbols)         WiMAX         15.24         ±9.6						
10304         AAA         IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, 64QAM, PUSC)         WiMAX         11.86         ±9.6           10305         AAA         IEEE 802.16e WiMAX (31:15, 10 ms, 10 MHz, 64QAM, PUSC, 15 symbols)         WiMAX         15.24         ±9.6	10302	AAA	IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, QPSK, PUSC, 3 CTRL symbols)	WiMAX	12.57	±9.6
10305 AAA IEEE 802.16e WiMAX (31:15, 10 ms, 10 MHz, 64QAM, PUSC, 15 symbols) WiMAX 15.24 ±9.6	10303	AAA	IEEE 802.16e WIMAX (31:15, 5 ms, 10 MHz, 64QAM, PUSC)	WiMAX	12.52	±9.6
10305 AAA IEEE 802.16e WiMAX (31:15, 10 ms, 10 MHz, 64QAM, PUSC, 15 symbols) WiMAX 15.24 ±9.6	10304	AAA	IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, 64QAM, PUSC)	WiMAX	11.86	±9.6
10306   AAA   IEEE 802.16e WIMAX (29:18, 10 ms, 10 MHz, 64QAM, PUSC, 18 symbols)   WIMAX   14.67   +9.6					15.24	±9.6
	10306	AAA	IEEE 802.16e WiMAX (29:18, 10 ms, 10 MHz, 64QAM, PUSC, 18 symbols)	WiMAX	14.67	±9.6

Certificate No: EX-3922\_Aug23 Page 13 of 22

	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> $k=2$
10307	AAA	IEEE 802.16e WiMAX (29:18, 10 ms, 10 MHz, QPSK, PUSC, 18 symbols)	WiMAX	14.49	±9.6
10308	AAA	IEEE 802.16e WiMAX (29:18, 10 ms, 10 MHz, 16QAM, PUSC)	WiMAX	14.46	±9.6
10309	AAA	IEEE 802.16e WIMAX (29:18, 10 ms, 10 MHz, 16QAM, AMC 2x3, 18 symbols)	WiMAX	14.58	±9.6
10310	AAA	IEEE 802.16e WIMAX (29:18, 10 ms, 10 MHz, QPSK, AMC 2x3, 18 symbols)	WiMAX	14.57	±9.6
10311	AAE	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-FDD	6.06	±9.6
10313	AAA	iDEN 1:3	iDEN	10.51	±9.6
10314	AAA	iDEN 1:6	iDEN	13.48	±9.6
10315	AAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	WLAN	1.71	±9.6
10316	AAB	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)	WLAN	8.36	±9.6
10317	AAD	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)	WLAN	8.36	±9.6
10352	AAA	Pulse Waveform (200Hz, 10%)	Generic	10.00	±9.6
10353	AAA	Pulse Waveform (200Hz, 20%)	Generic	6.99	±9.6
10354	AAA	Pulse Waveform (200Hz, 40%)	Generic	3.98	±9.6
10355	AAA	Pulse Waveform (200Hz, 60%)	Generic	2.22	±9.6
10356	AAA	Pulse Waveform (200Hz, 80%)	Generic	0.97	±9.6
10387	AAA	QPSK Waveform, 1 MHz	Generic	5.10	±9.6
10388	AAA	QPSK Waveform, 10 MHz	Generic	5.22	±9.6
10396	AAA	64-QAM Waveform, 100 kHz	Generic	6.27	±9.6
10399	AAA	64-QAM Waveform, 40 MHz	Generic	6.27	±9.6
10400	AAE	IEEE 802.11ac WiFi (20 MHz, 64-QAM, 99pc duty cycle)	WLAN	8.37	±9.6
10401	AAE	IEEE 802.11ac WiFi (40 MHz, 64-QAM, 99pc duty cycle)	WLAN	8.60	±9.6
10402	AAE	IEEE 802.11ac WiFi (80 MHz, 64-QAM, 99pc duty cycle)	WLAN	8.53	±9.6
10403	AAB	CDMA2000 (1xEV-DO, Rev. 0)	CDMA2000	3.76	±9.6
10404	AAB	CDMA2000 (1xEV-DO, Rev. A)	CDMA2000	3.77	±9.6
10406	AAB	CDMA2000, RC3, SO32, SCH0, Full Rate	CDMA2000	5.22	±9.6
10410	AAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9, Subframe Conf=4)	LTE-TDD	7.82	±9.6
10414	AAA	WLAN CCDF, 64-QAM, 40 MHz	Generic	8.54	±9.6
10415	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	WLAN	1.54	±9.6
10416	AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)	WLAN	8.23	±9.6
10417	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	WLAN	8.23	±9.6
10418	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preambule)	WLAN	8.14	±9.6
10419	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preambule)	WLAN	8.19	±9.6
10422	AAC	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	WLAN	8.32	±9.6
10423	AAC	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	WLAN	8.47	±9.6
10424	AAC	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	WLAN	8.40	±9.6
10425	AAC	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	WLAN	8.41	±9.6
10426	AAC	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	WLAN	8.45	±9.6
10427	AAC	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	WLAN	8.41	±9.6
10430	AAE	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	LTE-FDD	8.28	±9.6
10431	AAE	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	LTE-FDD	8.38	±9.6
10432	AAD	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	LTE-FDD	8.34	±9.6
10433	AAD	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	LTE-FDD	8.34	±9.6
10434	AAB	W-CDMA (BS Test Model 1, 64 DPCH)	WCDMA	8.60	±9.6
10435	AAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±9.6
10447	AAE	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.56	±9.6
10448	AAE	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clippin 44%)	LTE-FDD	7.53	±9.6
10449	AAD	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Cliping 44%)	LTE-FDD	7.51	±9.6
10450	AAD	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.48	±9.6
10451	AAB	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	WCDMA	7.59	±9.6
10453	AAE	Validation (Square, 10 ms, 1 ms)	Test	10.00	±9.6
10456	AAC	IEEE 802.11ac WiFi (160 MHz, 64-QAM, 99pc duty cycle)	WLAN	8.63	±9.6
10457	AAB	UMTS-FDD (DC-HSDPA)	WCDMA	6.62	±9.6
10458	AAA	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	CDMA2000	6.55	±9.6
	AAA	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	CDMA2000	8.25	±9.6
					±9.6
10459	AAA	UMTS-FDD (WCDMA, AMR)	WCDMA	2.39	
10459 10460	AAB	UMTS-FDD (WCDMA, AMR)  LTE-TDD (SC-FDMA, 1 RB, 1,4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	4		
10459 10460 10461	AAB	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±9.6
10459 10460 10461 10462	AAB AAC AAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD LTE-TDD	7.82 8.30	±9.6 ±9.6
10459 10460 10461 10462 10463	AAB AAC AAC AAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)  LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD LTE-TDD LTE-TDD	7.82 8.30 8.56	±9.6 ±9.6 ±9.6
10459 10460 10461 10462 10463 10464	AAB AAC AAC AAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD LTE-TDD LTE-TDD	7.82 8.30 8.56 7.82	±9.6 ±9.6 ±9.6 ±9.6
10459 10460 10461 10462 10463 10464 10465	AAB AAC AAC AAC AAD	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 3 MHz, L6-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD  LTE-TDD  LTE-TDD  LTE-TDD  LTE-TDD	7.82 8.30 8.56 7.82 8.32	±9.6 ±9.6 ±9.6 ±9.6 ±9.6
10459 10460 10461 10462 10463 10464 10465 10466	AAB AAC AAC AAC AAD AAD	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD  LTE-TDD  LTE-TDD  LTE-TDD  LTE-TDD  LTE-TDD	7.82 8.30 8.56 7.82 8.32 8.57	±9.6 ±9.6 ±9.6 ±9.6 ±9.6 ±9.6
10459 10460 10461 10462 10463 10464 10465 10466 10467	AAB AAC AAC AAC AAD AAD AAD AAD	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD  LTE-TDD  LTE-TDD  LTE-TDD  LTE-TDD  LTE-TDD  LTE-TDD  LTE-TDD	7.82 8.30 8.56 7.82 8.32 8.57 7.82	±9.6 ±9.6 ±9.6 ±9.6 ±9.6 ±9.6 ±9.6
10459 10460 10461 10462 10463 10464 10465 10466 10467 10468	AAB AAC AAC AAC AAD AAD AAD AAD AAG AAG	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD  LTE-TDD  LTE-TDD  LTE-TDD  LTE-TDD  LTE-TDD  LTE-TDD  LTE-TDD  LTE-TDD	7.82 8.30 8.56 7.82 8.32 8.57 7.82 8.32	±9.6 ±9.6 ±9.6 ±9.6 ±9.6 ±9.6 ±9.6 ±9.6
10459 10460 10461 10462 10463 10464 10465 10466 10467	AAB AAC AAC AAC AAD AAD AAD AAD	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD  LTE-TDD  LTE-TDD  LTE-TDD  LTE-TDD  LTE-TDD  LTE-TDD  LTE-TDD	7.82 8.30 8.56 7.82 8.32 8.57 7.82	±9.6 ±9.6 ±9.6 ±9.6 ±9.6 ±9.6 ±9.6

Page 14 of 22 Certificate No: EX-3922\_Aug23

UID	Bev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10472	AAG	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	±9.6
10473	AAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±9.6
10474	AAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	±9.6
10475	AAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	±9.6
10477	AAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	±9.6
10478	AAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	±9.6
10479	AAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±9.6
10480	AAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.18	±9.6
10481	AAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.45	±9.6
10482	AAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.71	±9.6
10483	AAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.39	±9.6
10484	AAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.47	±9.6
10485	AAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.59	±9.6
10486	AAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.38	±9.6
10487	AAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.60	±9.6
10488	AAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.70	±9.6
10489	AAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.31	±9.6
10490	AAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.54	±9.6
10491	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±9.6
10492	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.41	±9.6
10493	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.55	±9.6
10494	AAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±9.6
10495	AAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.37	±9.6
10496	AAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.54	±9.6
10497	AAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.67	±9.6
10498	AAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.40	±9.6
10499	AAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.68	±9.6
10500	AAD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.67	±9.6
10501	AAD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.44	±9.6
10502	AAD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.52	±9.6
10503	AAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.72	±9.6
10504	AAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.31 8.54	±9.6
10505	AAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)  LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±9.6
10508	AAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.36	±9.6
10507	AAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.55	±9.6
10509	AAF	LTE-TDD (SC-FDMA, 100% RB, 15MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.99	±9.6
10510	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.49	±9.6
10511	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.51	±9.6
10512	AAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±9.6
10513	AAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.42	±9.6
10514	AAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.45	±9.6
10515	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)	WLAN	1.58	±9.6
10516	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)	WLAN	1.57	±9.6
10517	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)	WLAN	1.58	±9.6
10518	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)	WLAN	8.23	±9.6
10519	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)	WLAN	8.39	±9.6
10520	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)	WLAN	8.12	±9.6
10521	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle)	WLAN	7.97	±9.6
10522	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)	WLAN	8.45	±9.6
10523	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle)	WLAN	8.08	±9.6
10524	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle)	WLAN	8.27	±9.6
10525	AAC	IEEE 802.11ac WiFi (20 MHz, MCS0, 99pc duty cycle)	WLAN	8.36	±9.6
10526	AAC	IEEE 802.11ac WiFi (20 MHz, MCS1, 99pc duty cycle)	WLAN	8.42	±9.6
10527	AAC	IEEE 802.11ac WiFi (20 MHz, MCS2, 99pc duty cycle)	WLAN	8.21	±9.6
10528	AAC	IEEE 802.11ac WiFi (20 MHz, MCS3, 99pc duty cycle)	WLAN	8.36	±9.6
10529	AAC	IEEE 802.11ac WiFi (20 MHz, MCS4, 99pc duty cycle)	WLAN	8.36	±9.6
10531	AAC	IEEE 802.11ac WiFi (20 MHz, MCS6, 99pc duty cycle)	WLAN	8.43	±9.6
10532	AAC	IEEE 802.11ac WiFi (20 MHz, MCS7, 99pc duty cycle)	WLAN	8.29	±9.6
10533	AAC	IEEE 802.11ac WiFi (20 MHz, MCS8, 99pc duty cycle)	WLAN	8.38	±9.6
10534	AAC	IEEE 802.11ac WiFi (40 MHz, MCS0, 99pc duty cycle)	WLAN	8.45	±9.6
10535	AAC	IEEE 802.11ac WiFi (40 MHz, MCS1, 99pc duty cycle)	WLAN	8.45	±9.6
10536	AAC	IEEE 802.11ac WiFi (40 MHz, MCS2, 99pc duty cycle)	WLAN	8.32	±9.6
10537	AAC	IEEE 802.11ac WiFi (40 MHz, MCS3, 99pc duty cycle)	WLAN	8.44	±9.6
10538	AAC	IEEE 802.11ac WiFi (40 MHz, MCS4, 99pc duty cycle)	WLAN	8.54	±9.6
10540	AAC	IEEE 802.11ac WiFi (40 MHz, MCS6, 99pc duty cycle)	WLAN	8.39	±9.6

Certificate No: EX-3922\_Aug23 Page 15 of 22

ŲID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> $k=2$
10541	AAC	IEEE 802.11ac WiFi (40 MHz, MCS7, 99pc duty cycle)	WLAN	8.46	±9.6
10542	AAC	IEEE 802.11ac WiFi (40 MHz, MCS8, 99pc duty cycle)	WLAN	8.65	±9.6
10543	AAC	IEEE 802.11ac WiFi (40 MHz, MCS9, 99pc duty cycle)	WLAN	8.65	±9.6
10544	AAC	IEEE 802.11ac WiFi (80 MHz, MCS0, 99pc duty cycle)	WLAN	8.47	±9.6
10545	AAC	IEEE 802.11ac WiFi (80 MHz, MCS1, 99pc duty cycle)	WLAN	8.55	±9.6
10546	AAC	IEEE 802.11ac WiFi (80 MHz, MCS2, 99pc duty cycle)	WLAN	8.35	±9.6
10547	AAC	IEEE 802.11ac WiFi (80 MHz, MCS3, 99pc duty cycle)	WLAN	8.49	±9.6
10548	AAC	IEEE 802.11ac WiFi (80 MHz, MCS4, 99pc duty cycle)	WLAN	8.37	±9.6
10550	AAC	IEEE 802.11ac WiFi (80 MHz, MCS6, 99pc duty cycle)	WLAN	8.38	±9.6
10551	AAC	IEEE 802.11ac WiFi (80 MHz, MCS7, 99pc duty cycle)	WLAN	8.50	±9.6
10552	AAC	IEEE 802.11ac WiFi (80 MHz, MCS8, 99pc duty cycle)	WLAN	8.42	±9.6
10553	AAC	IEEE 802.11ac WiFi (80 MHz, MCS9, 99pc duty cycle)	WLAN	8.45	±9.6
10554	AAD	IEEE 802.11ac WiFi (160 MHz, MCS0, 99pc duty cycle)	WLAN	8.48	±9.6
10555	AAD	IEEE 802.11ac WiFi (160 MHz, MCS1, 99pc duty cycle)	WLAN	8.47	±9.6
10556	AAD	IEEE 802.11ac WiFi (160 MHz, MCS2, 99pc duty cycle)	WLAN	8.50	±9.6
10557	AAD	IEEE 802.11ac WiFi (160 MHz, MCS3, 99pc duty cycle)	WLAN	8.52	±9.6
10558	AAD	IEEE 802.11ac WiFi (160 MHz, MCS4, 99pc duty cycle)	WLAN	8.61	±9.6
10560	AAD	IEEE 802.11ac WiFi (160 MHz, MCS6, 99pc duty cycle)	WLAN	8.73	±9.6
10561	AAD	IEEE 802.11ac WiFi (160 MHz, MCS7, 99pc duty cycle)	WLAN	8.56	±9.6
10562	AAD	IEEE 802.11ac WiFi (160 MHz, MCS8, 99pc duty cycle)	WLAN	8.69	±9.6
10563	AAD	IEEE 802.11ac WiFi (160 MHz, MCS9, 99pc duty cycle)	WLAN	8.77	±9.6
10564	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle)	WLAN	8.25	±9.6
10565	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle)	WLAN	8.45	±9.6
10566	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle)	WLAN	8.13	±9.6
10567	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle)	WLAN	8.00	±9.6
10568	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle)	WLAN	8.37	±9.6
10569 10570	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle) IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle)	WLAN	8.10	±9.6
10570	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS-OPDM, 64 Mops, 99pc duty cycle)	WLAN	8.30 1.99	±9.6
10572	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)	WLAN	1.99	±9.6
10572	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)	WLAN	1.98	±9.6
10574	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)	WLAN	1.98	±9.6
10575	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle)	WLAN	8.59	±9.6
10576	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle)	WLAN	8.60	±9.6
10577	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle)	WLAN	8.70	±9.6
10578	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle)	WLAN	8.49	±9.6
10579	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle)	WLAN	8.36	±9.6
10580	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle)	WLAN	8.76	±9.6
10581	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle)	WLAN	8.35	±9.6
10582	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle)	WLAN	8.67	±9.6
10583	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)	WLAN	8.59	±9.6
10584	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)	WLAN	8.60	±9.6
10585	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)	WLAN	8.70	±9.6
10586	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)	WLAN	8.49	±9.6
10587	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)	WLAN	8.36	±9.6
10588	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)	WLAN	8.76	±9.6
10589	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)	WLAN	8.35	±9.6
10590	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)	WLAN	8.67	±9.6
10591	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS0, 90pc duty cycle)	WLAN	8.63	±9.6
10592	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS1, 90pc duty cycle)	WLAN	8.79	±9.6
10593	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS2, 90pc duty cycle)	WLAN	8.64	±9.6
10594	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS3, 90pc duty cycle)	WLAN	8.74	±9.6
10595	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS4, 90pc duty cycle)	WLAN	8.74	±9.6
10596	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS5, 90pc duty cycle)	WLAN	8.71	±9.6
10597	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS6, 90pc duty cycle)	WLAN	8.72	±9.6
10598	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS7, 90pc duty cycle)	WLAN	8.50	±9.6
10599 10600	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS0, 90pc duty cycle) IEEE 802.11n (HT Mixed, 40 MHz, MCS1, 90pc duty cycle)	WLAN	8.79	±9.6
10600	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS1, 90pc duty cycle)	WLAN	8.88	±9.6
10602	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS2, 90pc duty cycle)	WLAN	8.82	±9.6
10602	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS4, 90pc duty cycle)	WLAN	9.03	±9.6
10604	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS4, 90pc duty cycle)	WLAN	8.76	±9.6
10605	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCSS, 90pc duty cycle)	WLAN	8.97	±9.6
10605	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS7, 90pc duty cycle)	WLAN	8.82	±9.6
10607	AAC	IEEE 802.11ac WiFi (20 MHz, MCS0, 90pc duty cycle)	WLAN	8.64	±9.6
10608	AAC	IEEE 802.11ac WiFi (20 MHz, MCS1, 90pc duty cycle)	WLAN	8.77	±9.6
.5008	,,,,,,,		1 *****	3.77	13.0

ACC   REER 802.11 tas WIFF (20 MHz, MCSS, 90pc day yeyle)	UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
1981   AAC   EEE 80.21 fac Wiff (20 MHz, MCSS, 30pc day yoyle)   W.ANN   8.77   9.9.6	10609			·		
10611   ACC   IEEE 80.21 Tale WIFF (20 MHz, MCSS, 90pc duty cycle)   W.A.N.   8.77   9.56		_				
10512   ACC   EEES 80.11 faw Wiff (20 MHz, MCSS, 90pc duty cycle)				WLAN		4
106161   AAC   EEE 80.211 tas WHF (20 MHz, MCSP, 90pc duty cycle)   WLAN   8.94   £9.6   £9.6   10616   AAC   EEE 80.21 tas WHF (20 MHz, MCSP, 90pc duty cycle)   WLAN   8.82   £9.6   10616   AAC   EEE 80.21 tas WHF (20 MHz, MCSP, 90pc duty cycle)   WLAN   8.82   £9.6   10617   AAC   EEE 80.21 tas WHF (40 MHz, MCSP, 90pc duty cycle)   WLAN   8.81   £9.6   10617   AAC   EEE 80.21 tas WHF (40 MHz, MCSP, 90pc duty cycle)   WLAN   8.81   £9.6   10618   AAC   EEE 80.21 tas WHF (40 MHz, MCSP, 90pc duty cycle)   WLAN   8.81   £9.6   10618   AAC   EEE 80.21 tas WHF (40 MHz, MCSP, 90pc duty cycle)   WLAN   8.87   £9.6   10619   AAC   EEE 80.21 tas WHF (40 MHz, MCSP, 90pc duty cycle)   WLAN   8.87   £9.6   10620   AAC   EEE 80.21 tas WHF (40 MHz, MCSP, 90pc duty cycle)   WLAN   8.87   £9.6   10620   AAC   EEE 80.21 tas WHF (40 MHz, MCSP, 90pc duty cycle)   WLAN   8.87   £9.6   10620   AAC   EEE 80.21 tas WHF (40 MHz, MCSP, 90pc duty cycle)   WLAN   8.87   £9.6   10622   AAC   EEE 80.21 tas WHF (40 MHz, MCSP, 90pc duty cycle)   WLAN   8.82   £9.6   10622   AAC   EEE 80.21 tas WHF (40 MHz, MCSP, 90pc duty cycle)   WLAN   8.82   £9.6   10622   AAC   EEE 80.21 tas WHF (40 MHz, MCSP, 90pc duty cycle)   WLAN   8.82   £9.6   10622   AAC   EEE 80.21 tas WHF (40 MHz, MCSP, 90pc duty cycle)   WLAN   8.82   £9.6   10622   AAC   EEE 80.21 tas WHF (40 MHz, MCSP, 90pc duty cycle)   WLAN   8.82   £9.6   10625   AAC   EEE 80.21 tas WHF (60 MHz, MCSP, 90pc duty cycle)   WLAN   8.82   £9.6   10625   AAC   EEE 80.21 tas WHF (60 MHz, MCSP, 90pc duty cycle)   WLAN   8.80   £9.6   10625   AAC   EEE 80.21 tas WHF (60 MHz, MCSP, 90pc duty cycle)   WLAN   8.80   £9.6   10628   AAC   EEE 80.21 tas WHF (60 MHz, MCSP, 90pc duty cycle)   WLAN   8.81   £9.6   10628   AAC   EEE 80.21 tas WHF (60 MHz, MCSP, 90pc duty cycle)   WLAN   8.81   £9.6   10628   AAC   EEE 80.21 tas WHF (60 MHz, MCSP, 90pc duty cycle)   WLAN   8.81   £9.6   10628   AAC   EEE 80.21 tas WHF (60 MHz, MCSP, 90pc duty cycle)   WLAN   8.81   £9.6   10628   AAC   EEE 80.21 tas WHF (6						
160161   AAC   IEEE 802.11ae WHF   (20 MHz, MCSP, 90pc duty cycle)   WLAN   8.59   29.6   29.6   100161   AAC   IEEE 802.11ae WHF   (20 MHz, MCSP, 90pc duty cycle)   WLAN   8.82   29.6   100161   AAC   IEEE 802.11ae WHF   (40 MHz, MCSP, 90pc duty cycle)   WLAN   8.81   29.6   10017   AAC   IEEE 802.11ae WHF   (40 MHz, MCSP, 90pc duty cycle)   WLAN   8.81   29.6   10017   AAC   IEEE 802.11ae WHF   (40 MHz, MCSP, 90pc duty cycle)   WLAN   8.81   29.6   10018   AAC   IEEE 802.11ae WHF   (40 MHz, MCSP, 90pc duty cycle)   WLAN   8.85   29.6   10018   AAC   IEEE 802.11ae WHF   (40 MHz, MCSP, 90pc duty cycle)   WLAN   8.87   29.6   10018   AAC   IEEE 802.11ae WHF   (40 MHz, MCSP, 90pc duty cycle)   WLAN   8.87   29.6   10022   AAC   IEEE 802.11ae WHF   (40 MHz, MCSP, 90pc duty cycle)   WLAN   8.87   29.6   10022   AAC   IEEE 802.11ae WHF   (40 MHz, MCSP, 90pc duty cycle)   WLAN   8.87   29.6   10022   AAC   IEEE 802.11ae WHF   (40 MHz, MCSP, 90pc duty cycle)   WLAN   8.88   29.6   10023   AAC   IEEE 802.11ae WHF   (40 MHz, MCSP, 90pc duty cycle)   WLAN   8.88   29.6   10023   AAC   IEEE 802.11ae WHF   (40 MHz, MCSP, 90pc duty cycle)   WLAN   8.96   29.6   10023   AAC   IEEE 802.11ae WHF   (40 MHz, MCSP, 90pc duty cycle)   WLAN   8.96   29.6   10023   AAC   IEEE 802.11ae WHF   (40 MHz, MCSP, 90pc duty cycle)   WLAN   8.96   29.6   10022   AAC   IEEE 802.11ae WHF   (80 MHz, MCSP, 90pc duty cycle)   WLAN   8.96   29.6   10022   AAC   IEEE 802.11ae WHF   (80 MHz, MCSP, 90pc duty cycle)   WLAN   8.95   29.6   10022   AAC   IEEE 802.11ae WHF   (80 MHz, MCSP, 90pc duty cycle)   WLAN   8.95   29.6   10022   AAC   IEEE 802.11ae WHF   (80 MHz, MCSP, 90pc duty cycle)   WLAN   8.95   29.6   10022   AAC   IEEE 802.11ae WHF   (80 MHz, MCSP, 90pc duty cycle)   WLAN   8.95   29.6   10022   AAC   IEEE 802.11ae WHF   (80 MHz, MCSP, 90pc duty cycle)   WLAN   8.95   29.6   10022   AAC   IEEE 802.11ae WHF   (80 MHz, MCSP, 90pc duty cycle)   WLAN   8.95   29.6   10022   AAC   IEEE 802.11ae WHF   (80 MHz, MCSP, 90pc duty cycle)   WLAN   8	10613	AAC	IEEE 802.11ac WiFi (20 MHz, MCS6, 90pc duty cycle)	WLAN		
16615   AAC   EEE 802.11ae WHF (20MHz, MCS9, 90pc duty cycle)   WLAN   6.82   ±9.6	10614	AAC	IEEE 802.11ac WiFi (20 MHz, MCS7, 90pc duty cycle)	WLAN		
16016   ACC   EEE 802.11ae WFF (40MHz, MCS9, 90pc duty cycle)   WLAN   8.81   ±9.6 km   19.6 k	10615	AAC	IEEE 802.11ac WiFi (20 MHz, MCS8, 90pc duty cycle)	WLAN	8.82	
10617   ACC   IEEE 802.11ae Wirl (40MHz, MCSS, 90pc duty cycle)   WLAN   8.81   19.6	10616	AAC	IEEE 802.11ac WiFi (40 MHz, MCS0, 90pc duty cycle)	WLAN	8.82	
10618] AAC   IEEE 802.11ae Wift (40 MHz, MCSZ, 90pc duty cycle)   WLAN   8.58   19.6   10620   AAC   IEEE 802.11ae Wift (40 MHz, MCSZ, 90pc duty cycle)   WLAN   8.67   19.6   10621   AAC   IEEE 802.11ae Wift (40 MHz, MCSZ, 90pc duty cycle)   WLAN   8.77   19.6   10621   AAC   IEEE 802.11ae Wift (40 MHz, MCSZ, 90pc duty cycle)   WLAN   8.77   19.6   10622   AAC   IEEE 802.11ae Wift (40 MHz, MCSS, 90pc duty cycle)   WLAN   8.68   19.6   10623   AAC   IEEE 802.11ae Wift (40 MHz, MCSS, 90pc duty cycle)   WLAN   8.58   19.6   10623   AAC   IEEE 802.11ae Wift (40 MHz, MCSS, 90pc duty cycle)   WLAN   8.96   19.6   10625   AAC   IEEE 802.11ae Wift (40 MHz, MCSS, 90pc duty cycle)   WLAN   8.96   19.6   10625   AAC   IEEE 802.11ae Wift (40 MHz, MCSS, 90pc duty cycle)   WLAN   8.96   19.6   10625   AAC   IEEE 802.11ae Wift (80 MHz, MCSS, 90pc duty cycle)   WLAN   8.83   19.6   10626   AAC   IEEE 802.11ae Wift (80 MHz, MCSS, 90pc duty cycle)   WLAN   8.83   19.6   10626   AAC   IEEE 802.11ae Wift (80 MHz, MCSS, 90pc duty cycle)   WLAN   8.71   19.6   10629   AAC   IEEE 802.11ae Wift (80 MHz, MCSS, 90pc duty cycle)   WLAN   8.71   19.6   10629   AAC   IEEE 802.11ae Wift (80 MHz, MCSS, 90pc duty cycle)   WLAN   8.71   19.6   10630   AAC   IEEE 802.11ae Wift (80 MHz, MCSS, 90pc duty cycle)   WLAN   8.72   19.6   10630   AAC   IEEE 802.11ae Wift (80 MHz, MCSS, 90pc duty cycle)   WLAN   8.72   19.6   10631   AAC   IEEE 802.11ae Wift (80 MHz, MCSS, 90pc duty cycle)   WLAN   8.74   19.6   10633   AAC   IEEE 802.11ae Wift (80 MHz, MCSS, 90pc duty cycle)   WLAN   8.74   19.6   10633   AAC   IEEE 802.11ae Wift (80 MHz, MCSS, 90pc duty cycle)   WLAN   8.80   19.6   10633   AAC   IEEE 802.11ae Wift (80 MHz, MCSS, 90pc duty cycle)   WLAN   8.80   19.6   10633   AAC   IEEE 802.11ae Wift (80 MHz, MCSS, 90pc duty cycle)   WLAN   8.80   19.6   10633   AAC   IEEE 802.11ae Wift (80 MHz, MCSS, 90pc duty cycle)   WLAN   8.80   19.6   10633   AAC   IEEE 802.11ae Wift (80 MHz, MCSS, 90pc duty cycle)   WLAN   8.80   19.6   10633   AAC   IEEE 80	10617	AAC	IEEE 802.11ac WiFi (40 MHz, MCS1, 90pc duty cycle)	WLAN	8.81	
10619   ACC   IEEE 802.11ac Wiff (40 MHz, MCS3, 40 pc duty cycle)   WLAN   8.86   2.95.	10618	AAC	IEEE 802.11ac WiFi (40 MHz, MCS2, 90pc duty cycle)	WLAN	8.58	
1962  AAC   IEEE 802 11ae Wiff (40)MHz, MCSS, 80pc duty cycle	10619	AAC	IEEE 802.11ac WiFi (40 MHz, MCS3, 90pc duty cycle)	WLAN	8.86	±9.6
1962  ACC   IEEE 802 11ae Wiff (40 MHz, MCSS, 90pc duty cycle)   WLAN   8.77   ±9.8     1962  ACC   IEEE 802 11ae Wiff (40 MHz, MCSS, 90pc duty cycle)   WLAN   8.82   ±9.6     1963  ACC   IEEE 802 11ae Wiff (40 MHz, MCSS, 90pc duty cycle)   WLAN   8.82   ±9.6     1962  ACC   IEEE 802 11ae Wiff (40 MHz, MCSS, 90pc duty cycle)   WLAN   8.96   ±9.6     1962  ACC   IEEE 802 11ae Wiff (40 MHz, MCSS, 90pc duty cycle)   WLAN   8.96   ±9.6     1962  ACC   IEEE 802 11ae Wiff (60 MHz, MCSS, 90pc duty cycle)   WLAN   8.96   ±9.6     1962  ACC   IEEE 802 11ae Wiff (80 MHz, MCSS, 90pc duty cycle)   WLAN   8.88   ±9.6     1962  ACC   IEEE 802 11ae Wiff (80 MHz, MCSS, 90pc duty cycle)   WLAN   8.88   ±9.6     1962  ACC   IEEE 802 11ae Wiff (80 MHz, MCSS, 90pc duty cycle)   WLAN   8.88   ±9.6     1962  ACC   IEEE 802 11ae Wiff (80 MHz, MCSS, 90pc duty cycle)   WLAN   8.85   ±9.6     1963  ACC   IEEE 802 11ae Wiff (80 MHz, MCSS, 90pc duty cycle)   WLAN   8.85   ±9.6     1963  ACC   IEEE 802 11ae Wiff (80 MHz, MCSS, 90pc duty cycle)   WLAN   8.81   ±9.6     1963  ACC   IEEE 802 11ae Wiff (80 MHz, MCSS, 90pc duty cycle)   WLAN   8.81   ±9.6     1963  ACC   IEEE 802 11ae Wiff (80 MHz, MCSS, 90pc duty cycle)   WLAN   8.81   ±9.6     1963  ACC   IEEE 802 11ae Wiff (80 MHz, MCSS, 90pc duty cycle)   WLAN   8.83   ±9.6     1963  ACC   IEEE 802 11ae Wiff (80 MHz, MCSS, 90pc duty cycle)   WLAN   8.83   ±9.6     1963  ACC   IEEE 802 11ae Wiff (80 MHz, MCSS, 90pc duty cycle)   WLAN   8.83   ±9.6     1963  ACC   IEEE 802 11ae Wiff (80 MHz, MCSS, 90pc duty cycle)   WLAN   8.81   ±9.6     1963  ACC   IEEE 802 11ae Wiff (80 MHz, MCSS, 90pc duty cycle)   WLAN   8.81   ±9.6     1963  ACC   IEEE 802 11ae Wiff (80 MHz, MCSS, 90pc duty cycle)   WLAN   8.81   ±9.6     1963  ACC   IEEE 802 11ae Wiff (160 MHz, MCSS, 90pc duty cycle)   WLAN   8.81   ±9.6     1963  ACC   IEEE 802 11ae Wiff (160 MHz, MCSS, 90pc duty cycle)   WLAN   8.81   ±9.6     1963  ACC   IEEE 802 11ae Wiff (160 MHz, MCSS, 90pc duty cycle)   WLAN   8.85   ±9.6     1963  ACC   IEEE	10620	AAC	IEEE 802.11ac WiFi (40 MHz, MCS4, 90pc duty cycle)	WLAN	8.87	±9.6
19828   AAC   IEEE 802.11ac WIF1 (60 MHz, MCSF, 90pc duty cycle)   WLAN   8.92   49.6   19828   AAC   IEEE 802.11ac WIF1 (60 MHz, MCSB, 90pc duty cycle)   WLAN   8.96   49.6   19828   AAC   IEEE 802.11ac WIF1 (80 MHz, MCSB, 90pc duty cycle)   WLAN   8.98   49.6   19828   AAC   IEEE 802.11ac WIF1 (80 MHz, MCSB, 90pc duty cycle)   WLAN   8.83   49.6   19828   AAC   IEEE 802.11ac WIF1 (80 MHz, MCSB, 90pc duty cycle)   WLAN   8.71   49.6   19828   AAC   IEEE 802.11ac WIF1 (80 MHz, MCSB, 90pc duty cycle)   WLAN   8.71   49.6   19828   AAC   IEEE 802.11ac WIF1 (80 MHz, MCSB, 90pc duty cycle)   WLAN   8.71   49.6   19828   AAC   IEEE 802.11ac WIF1 (80 MHz, MCSB, 90pc duty cycle)   WLAN   8.72   49.6   19828   AAC   IEEE 802.11ac WIF1 (80 MHz, MCSB, 90pc duty cycle)   WLAN   8.72   49.6   19838   AAC   IEEE 802.11ac WIF1 (80 MHz, MCSB, 90pc duty cycle)   WLAN   8.74   49.6   19838   AAC   IEEE 802.11ac WIF1 (80 MHz, MCSB, 90pc duty cycle)   WLAN   8.74   49.6   19838   AAC   IEEE 802.11ac WIF1 (80 MHz, MCSB, 90pc duty cycle)   WLAN   8.74   49.6   19838   AAC   IEEE 802.11ac WIF1 (80 MHz, MCSB, 90pc duty cycle)   WLAN   8.74   49.6   19838   AAC   IEEE 802.11ac WIF1 (80 MHz, MCSB, 90pc duty cycle)   WLAN   8.80   49.6   19838   AAC   IEEE 802.11ac WIF1 (80 MHz, MCSB, 90pc duty cycle)   WLAN   8.80   49.6   19838   AAC   IEEE 802.11ac WIF1 (80 MHz, MCSB, 90pc duty cycle)   WLAN   8.80   49.6   19838   AAC   IEEE 802.11ac WIF1 (80 MHz, MCSB, 90pc duty cycle)   WLAN   8.81   49.6   19838   AAC   IEEE 802.11ac WIF1 (80 MHz, MCSB, 90pc duty cycle)   WLAN   8.83   49.6   19838   AAC   IEEE 802.11ac WIF1 (80 MHz, MCSB, 90pc duty cycle)   WLAN   8.83   49.6   19838   AAC   IEEE 802.11ac WIF1 (80 MHz, MCSB, 90pc duty cycle)   WLAN   8.89   49.6   19838   AAC   IEEE 802.11ac WIF1 (80 MHz, MCSB, 90pc duty cycle)   WLAN   8.89   49.6   19838   AAC   IEEE 802.11ac WIF1 (80 MHz, MCSB, 90pc duty cycle)   WLAN   8.89   49.6   19838   AAC   IEEE 802.11ac WIF1 (80 MHz, MCSB, 90pc duty cycle)   WLAN   8.89   49.6   19838   AAC   IEEE 8	10621		IEEE 802.11ac WiFi (40 MHz, MCS5, 90pc duty cycle)	WLAN	8.77	
10625 AAC   IEEE 802.11ac WIF1 (60 MHz, MCSS, 90 pc duty cycle)   WLAN   8.96   4.96	10622	AAC	IEEE 802.11ac WiFi (40 MHz, MCS6, 90pc duty cycle)	WLAN	8.68	±9.6
10825   AAC   IEEE 802.11ac WiFi (40NHz, MCS8, 90pc duty cycle)   WLAN   8.96   4.96   10827   AAC   IEEE 802.11ac WiFi (80NHz, MCS1, 90pc duty cycle)   WLAN   8.88   4.96   10827   AAC   IEEE 802.11ac WiFi (80NHz, MCS1, 90pc duty cycle)   WLAN   8.87   4.96   10828   AAC   IEEE 802.11ac WiFi (80NHz, MCS2, 90pc duty cycle)   WLAN   8.77   4.96   10828   AAC   IEEE 802.11ac WiFi (80NHz, MCS3, 90pc duty cycle)   WLAN   8.78   4.96   10830   AAC   IEEE 802.11ac WiFi (80NHz, MCS3, 90pc duty cycle)   WLAN   8.72   4.96   10831   AAC   IEEE 802.11ac WiFi (80NHz, MCS3, 90pc duty cycle)   WLAN   8.72   4.96   10832   AAC   IEEE 802.11ac WiFi (80NHz, MCS3, 90pc duty cycle)   WLAN   8.74   4.96   10832   AAC   IEEE 802.11ac WiFi (80NHz, MCS5, 90pc duty cycle)   WLAN   8.74   4.96   10832   AAC   IEEE 802.11ac WiFi (80NHz, MCS5, 90pc duty cycle)   WLAN   8.74   4.96   10832   AAC   IEEE 802.11ac WiFi (80NHz, MCS5, 90pc duty cycle)   WLAN   8.74   4.96   10833   AAC   IEEE 802.11ac WiFi (80NHz, MCS5, 90pc duty cycle)   WLAN   8.80   4.96   10835   AAC   IEEE 802.11ac WiFi (80NHz, MCS5, 90pc duty cycle)   WLAN   8.81   4.96   10836   AAC   IEEE 802.11ac WiFi (80NHz, MCS5, 90pc duty cycle)   WLAN   8.81   4.96   10836   AAC   IEEE 802.11ac WiFi (80NHz, MCS5, 90pc duty cycle)   WLAN   8.81   4.96   10836   AAC   IEEE 802.11ac WiFi (160NHz, MCS5, 90pc duty cycle)   WLAN   8.83   4.96   10838   AAD   IEEE 802.11ac WiFi (160NHz, MCS2, 90pc duty cycle)   WLAN   8.86   4.96   10839   AAD   IEEE 802.11ac WiFi (160NHz, MCS2, 90pc duty cycle)   WLAN   8.86   4.96   10839   AAD   IEEE 802.11ac WiFi (160NHz, MCS2, 90pc duty cycle)   WLAN   8.86   4.96   10840   AAD   IEEE 802.11ac WiFi (160NHz, MCS2, 90pc duty cycle)   WLAN   8.86   4.96   10840   AAD   IEEE 802.11ac WiFi (160NHz, MCS2, 90pc duty cycle)   WLAN   8.96   4.96   10840   AAD   IEEE 802.11ac WiFi (160NHz, MCS2, 90pc duty cycle)   WLAN   8.90   4.96   10840   AAD   IEEE 802.11ac WiFi (160NHz, MCS2, 90pc duty cycle)   WLAN   9.00   4.96   10840   AAD   IEEE 802.11ac WiFi (1	10623	AAC	IEEE 802.11ac WiFi (40 MHz, MCS7, 90pc duty cycle)	WLAN	8.82	±9.6
196827 AAC   IEEE 802.11ac WIF  (80MHz, MCS6, 90pc duty cycle)   WLAN   8.83   4.9.6	10624	AAC	IEEE 802.11ac WiFi (40 MHz, MCS8, 90pc duty cycle)	WLAN	8.96	±9.6
10627 AAC   EEE 802.11ac WFF (60MHz, MCS2, 90pc duty cycle)   WLAN   8.98   4.96   10629   AAC   IEEE 802.11ac WFF (80MHz, MCS2, 90pc duty cycle)   WLAN   8.77   4.96   10629   AAC   IEEE 802.11ac WFF (80MHz, MCS3, 90pc duty cycle)   WLAN   8.85   4.96   10629   AAC   IEEE 802.11ac WFF (80MHz, MCS3, 90pc duty cycle)   WLAN   8.81   4.96   10629   AAC   IEEE 802.11ac WFF (80MHz, MCS3, 90pc duty cycle)   WLAN   8.81   4.96   10629   AAC   IEEE 802.11ac WFF (80MHz, MCS3, 90pc duty cycle)   WLAN   8.81   4.96   10629   AAC   IEEE 802.11ac WFF (80MHz, MCS3, 90pc duty cycle)   WLAN   8.81   4.96   10629   AAC   IEEE 802.11ac WFF (80MHz, MCS3, 90pc duty cycle)   WLAN   8.83   4.96   10633   AAC   IEEE 802.11ac WFF (80MHz, MCS3, 90pc duty cycle)   WLAN   8.83   4.96   10638   AAC   IEEE 802.11ac WFF (80MHz, MCS3, 90pc duty cycle)   WLAN   8.80   4.96   10638   AAC   IEEE 802.11ac WFF (100MHz, MCS3, 90pc duty cycle)   WLAN   8.81   4.96   10639   AAC   IEEE 802.11ac WFF (100MHz, MCS3, 90pc duty cycle)   WLAN   8.81   4.96   10637   AAD   IEEE 802.11ac WFF (100MHz, MCS3, 90pc duty cycle)   WLAN   8.83   4.96   10639   AAD   IEEE 802.11ac WFF (160MHz, MCS3, 90pc duty cycle)   WLAN   8.86   4.96   10639   AAD   IEEE 802.11ac WFF (160MHz, MCS3, 90pc duty cycle)   WLAN   8.86   4.96   10639   AAD   IEEE 802.11ac WFF (160MHz, MCS3, 90pc duty cycle)   WLAN   8.86   4.96	10625	AAC	IEEE 802.11ac WiFi (40 MHz, MCS9, 90pc duty cycle)	WLAN	8.96	±9.6
19628   AAC			IEEE 802.11ac WiFi (80 MHz, MCS0, 90pc duty cycle)	WLAN	8.83	±9.6
19629   AAC	10627	AAC	IEEE 802.11ac WiFi (80 MHz, MCS1, 90pc duty cycle)	WLAN	8.88	±9.6
10630   AAC   IEEE 802-11ac WIFF (60 MHz, MCS4, 90pc duly cycle)   WLAN   8.72   4.96	10628	AAC	IEEE 802.11ac WiFi (80 MHz, MCS2, 90pc duty cycle)	WLAN	8.71	±9.6
10631   AAC   IEEE 802.11ac WIFI (60 MHz, MCSS, 90pc duly cycle)   WLAN   8.81   4.9.6	10629	AAC	IEEE 802.11ac WiFi (80 MHz, MCS3, 90pc duty cycle)	WLAN	8.85	±9.6
10632   AAC				WLAN	8.72	±9.6
10632   AAC		AAC	IEEE 802.11ac WiFi (80 MHz, MCS5, 90pc duty cycle)	WLAN	8.81	±9.6
10635   AAC				WLAN	8.74	±9.6
10636   AAC				WLAN	8.83	±9.6
10686   AAD			IEEE 802.11ac WiFi (80 MHz, MCS8, 90pc duty cycle)	WLAN	8.80	±9.6
10637   AAD	10635	AAC		WLAN	8.81	±9.6
10639   AAD	10636	AAD	IEEE 802.11ac WiFi (160 MHz, MCS0, 90pc duty cycle)	WLAN	8.83	±9.6
10839   AAD	10637		IEEE 802.11ac WiFi (160 MHz, MCS1, 90pc duty cycle)	WLAN	8.79	±9.6
10640   AAD				WLAN	8.86	±9.6
10641   AAD	10639		IEEE 802.11ac WiFi (160 MHz, MCS3, 90pc duty cycle)	WLAN	8.85	±9.6
10842   AAD				WLAN	8.98	±9.6
10643   AAD			IEEE 802.11ac WiFi (160 MHz, MCS5, 90pc duty cycle)	WLAN	9.06	±9.6
10644   AAD				WLAN	9.06	±9.6
10645   AAD						±9.6
10646					9.05	±9.6
10647   AAG   LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7)   LTE-TDD   11.96   ±9.6   10648   AAA   CDMA2000 (1x Advanced)   CDMA2000   3.45   ±9.6   10652   AAF   LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)   LTE-TDD   6.91   ±9.6   10653   AAF   LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)   LTE-TDD   7.42   ±9.6   10654   AAE   LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)   LTE-TDD   6.96   ±9.6   10655   AAF   LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)   LTE-TDD   6.96   ±9.6   10655   AAF   LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)   LTE-TDD   7.21   ±9.6   10658   AAB   Pulse Waveform (200Hz, 10%)   Test   10.00   ±9.6   10659   AAB   Pulse Waveform (200Hz, 40%)   Test   10.00   ±9.6   10659   AAB   Pulse Waveform (200Hz, 40%)   Test   2.22   ±9.6   10660   AAB   Pulse Waveform (200Hz, 40%)   Test   2.22   ±9.6   10661   AAB   Pulse Waveform (200Hz, 80%)   Test   2.22   ±9.6   10662   AAB   Pulse Waveform (200Hz, 80%)   Test   2.22   ±9.6   10662   AAB   Pulse Waveform (200Hz, 80%)   Test   2.22   ±9.6   10662   AAB   Pulse Waveform (200Hz, 80%)   Test   2.22   ±9.6   10663   AAB   Pulse Waveform (200Hz, 80%)   Test   2.22   ±9.6   10664   AAB   Pulse Waveform (200Hz, 80%)   Test   2.22   ±9.6   10667   AAC   IEEE 802.11ax (20 MHz, MCS0, 90pc duty cycle)   WLAN   8.57   ±9.6   10673   AAC   IEEE 802.11ax (20 MHz, MCS1, 90pc duty cycle)   WLAN   8.78   ±9.6   10673   AAC   IEEE 802.11ax (20 MHz, MCS2, 90pc duty cycle)   WLAN   8.74   ±9.6   10676   AAC   IEEE 802.11ax (20 MHz, MCS6, 90pc duty cycle)   WLAN   8.79   ±9.6   10677   AAC   IEEE 802.11ax (20 MHz, MCS6, 90pc duty cycle)   WLAN   8.79   ±9.6   10679   AAC   IEEE 802.11ax (20 MHz, MCS6, 90pc duty cycle)   WLAN   8.79   ±9.6   10679   AAC   IEEE 802.11ax (20 MHz, MCS6, 90pc duty cycle)   WLAN   8.79   ±9.6   10679   AAC   IEEE 802.11ax (20 MHz, MCS6, 90pc duty cycle)   WLAN   8.79   ±9.6   10679   AAC   IEEE 802.11ax (20 MHz, MCS6, 90pc duty cycle)   WLAN   8.89   ±9.6   10683   AAC   IEEE 802.11ax (20 MHz, MCS9, 90p						±9.6
10648						±9.6
10652					11.96	±9.6
10653						
10654   AAE						
10655						
10658 AAB   Pulse Waveform (200Hz, 10%)   Test   10.00						
Test   6.99						
Test   3.98						
Test   2.22   ±9.6						
Test						
10670						
10671						
10672						
10673   AAC   IEEE 802.11ax (20 MHz, MCS2, 90pc duty cycle)   WLAN   8.78   ±9.6						
10674						
10675						_
10676						
10677   AAC   IEEE 802.11ax (20 MHz, MCS6, 90pc duty cycle)   WLAN   8.73   ±9.6						
10678						
10679						
10680         AAC         IEEE 802.11ax (20 MHz, MCS9, 90pc duty cycle)         WLAN         8.80         ±9.6           10681         AAC         IEEE 802.11ax (20 MHz, MCS10, 90pc duty cycle)         WLAN         8.62         ±9.6           10682         AAC         IEEE 802.11ax (20 MHz, MCS11, 90pc duty cycle)         WLAN         8.83         ±9.6           10683         AAC         IEEE 802.11ax (20 MHz, MCS0, 99pc duty cycle)         WLAN         8.42         ±9.6           10684         AAC         IEEE 802.11ax (20 MHz, MCS1, 99pc duty cycle)         WLAN         8.26         ±9.6           10685         AAC         IEEE 802.11ax (20 MHz, MCS2, 99pc duty cycle)         WLAN         8.23         ±9.6						
10681         AAC         IEEE 802.11ax (20 MHz, MCS10, 90pc duty cycle)         WLAN         8.62         ±9.6           10682         AAC         IEEE 802.11ax (20 MHz, MCS11, 90pc duty cycle)         WLAN         8.83         ±9.6           10683         AAC         IEEE 802.11ax (20 MHz, MCS0, 99pc duty cycle)         WLAN         8.42         ±9.6           10684         AAC         IEEE 802.11ax (20 MHz, MCS1, 99pc duty cycle)         WLAN         8.26         ±9.6           10685         AAC         IEEE 802.11ax (20 MHz, MCS2, 99pc duty cycle)         WLAN         8.33         ±9.6						
10682         AAC         IEEE 802.11ax (20 MHz, MCS11, 90pc duty cycle)         WLAN         8.83         ±9.6           10683         AAC         IEEE 802.11ax (20 MHz, MCS0, 99pc duty cycle)         WLAN         8.42         ±9.6           10684         AAC         IEEE 802.11ax (20 MHz, MCS1, 99pc duty cycle)         WLAN         8.26         ±9.6           10685         AAC         IEEE 802.11ax (20 MHz, MCS2, 99pc duty cycle)         WLAN         8.33         ±9.6						
10683         AAC         IEEE 802.11ax (20 MHz, MCS0, 99pc duty cycle)         WLAN         8.42         ±9.6           10684         AAC         IEEE 802.11ax (20 MHz, MCS1, 99pc duty cycle)         WLAN         8.26         ±9.6           10685         AAC         IEEE 802.11ax (20 MHz, MCS2, 99pc duty cycle)         WLAN         8.33         ±9.6						
10684         AAC         IEEE 802.11ax (20 MHz, MCS1, 99pc duty cycle)         WLAN         8.26         ±9.6           10685         AAC         IEEE 802.11ax (20 MHz, MCS2, 99pc duty cycle)         WLAN         8.33         ±9.6						
10685 AAC IEEE 802.11ax (20 MHz, MCS2, 99pc duty cycle) WLAN 8.33 ±9.6						
10080 AAC   IEEE 802.11ax (20MHz, MCS3, 99pc duty cycle) WLAN 8.28 ±9.6						
	10686	AAC	IEEE 802.11ax (20 MHz, MCS3, 99pc duty cycle)	WLAN	8.28	±9.6

Certificate No: EX-3922\_Aug23 Page 17 of 22

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10687	AAC	IEEE 802.11ax (20 MHz, MCS4, 99pc duty cycle)	WLAN	8.45	
10688	AAC	IEEE 802.11ax (20 MHz, MCS5, 99pc duty cycle)	WLAN	8.29	±9.6 ±9.6
10689	AAC	IEEE 802.11ax (20 MHz, MCS6, 99pc duty cycle)	WLAN	8.55	±9.6
10690	AAC	IEEE 802.11ax (20 MHz, MCS7, 99pc duty cycle)	WLAN	8.29	±9.6
10690	AAC	IEEE 802.11ax (20 MHz, MCS8, 99pc duty cycle)	WLAN	8.25	±9.6
10692	AAC	IEEE 802.11ax (20 MHz, MCS9, 99pc duty cycle)	WLAN	8.29	±9.6
10693	AAC	IEEE 802.11ax (20 MHz, MCS10, 99pc duty cycle)	WLAN	8.25	±9.6
10693	AAC	IEEE 802.11ax (20 MHz, MCS10, 99pc duty cycle)	WLAN	8.57	±9.6
10694	AAC	IEEE 802.11ax (40 MHz, MCS0, 90pc duty cycle)	WLAN	8.78	±9.6
10695	AAC	IEEE 802.11ax (40 MHz, MCS1, 90pc duty cycle)	WLAN	8.91	±9.6
10697	AAC	IEEE 802.11ax (40 MHz, MCS1, 90pc duty cycle)	WLAN	8.61	±9.6
10698	AAC	IEEE 802.11ax (40 MHz, MCS3, 90pc duty cycle)	WLAN	8.89	
10699	AAC	IEEE 802.11ax (40 MHz, MCS4, 90pc duty cycle)	WLAN	8.82	±9.6
10700	AAC	IEEE 802.11ax (40 MHz, MCS5, 90pc duty cycle)	WLAN	8.73	±9.6
10701	AAC	IEEE 802.11ax (40 MHz, MCS6, 90pc duty cycle)	WLAN	8.86	±9.6
10702	AAC	IEEE 802.11ax (40 MHz, MCS7, 90pc duty cycle)	WLAN	8.70	±9.6
10703	AAC	IEEE 802.11ax (40 MHz, MCS8, 90pc duty cycle)	WLAN	8.82	±9.6
10704	AAC	IEEE 802.11ax (40 MHz, MCS9, 90pc duty cycle)	WLAN	8.56	±9.6
10705	AAC	IEEE 802.11ax (40 MHz, MCS10, 90pc duty cycle)	WLAN	8.69	±9.6
10706	AAC	IEEE 802.11ax (40 MHz, MCS11, 90pc duty cycle)	WLAN	8.66	±9.6
10707	AAC	IEEE 802.11ax (40 MHz, MCS0, 99pc duty cycle)	WLAN	8.32	±9.6
10708	AAC	IEEE 802.11ax (40 MHz, MCS1, 99pc duty cycle)	WLAN	8.55	±9.6
10709	AAC	IEEE 802.11ax (40 MHz, MCS2, 99pc duty cycle)	WLAN	8.33	±9.6
10710	AAC	IEEE 802.11ax (40 MHz, MCS3, 99pc duty cycle)	WLAN	8.29	±9.6
10710	AAC	IEEE 802.11ax (40 MHz, MCS4, 99pc duty cycle)	WLAN	8.39	±9.6
10712	AAC	IEEE 802.11ax (40 MHz, MCS5, 99pc duty cycle)	WLAN	8.67	±9.6
10712	AAC	IEEE 802.11ax (40 MHz, MCS6, 99pc duty cycle)	WLAN	8.33	±9.6
10714	AAC	IEEE 802.11ax (40 MHz, MCS7, 99pc duty cycle)	WLAN	8.26	±9.6
10715	AAC	IEEE 802.11ax (40 MHz, MCS8, 99pc duty cycle)	WLAN	8.45	±9.6
10716	AAC	IEEE 802.11ax (40 MHz, MCS9, 99pc duty cycle)	WLAN	8.30	±9.6
10717	AAC	IEEE 802.11ax (40 MHz, MCS10, 99pc duty cycle)	WLAN	8.48	±9.6
10718	AAC	IEEE 802.11ax (40 MHz, MCS11, 99pc duty cycle)	WLAN	8.24	±9.6
10719	AAC	IEEE 802.11ax (80 MHz, MCS0, 90pc duty cycle)	WLAN	8.81	±9.6
10713	AAC	IEEE 802.11ax (80 MHz, MCS1, 90pc duty cycle)	WLAN	8.87	±9.6
10721	AAC	IEEE 802.11ax (80 MHz, MCS2, 90pc duty cycle)	WLAN	8.76	±9.6
10722	AAC	IEEE 802.11ax (80 MHz, MCS3, 90pc duty cycle)	WLAN	8.55	±9.6
10723	AAC	IEEE 802.11ax (80 MHz, MCS4, 90pc duty cycle)	WLAN	8.70	±9.6
10724	AAC	IEEE 802.11ax (80 MHz, MCS5, 90pc duty cycle)	WLAN	8.90	±9.6
10725	AAC	IEEE 802.11ax (80 MHz, MCS6, 90pc duty cycle)	WLAN	8.74	±9.6
10726	AAC	IEEE 802.11ax (80 MHz, MCS7, 90pc duty cycle)	WLAN	8.72	±9.6
10727	AAC	IEEE 802.11ax (80 MHz, MCS8, 90pc duty cycle)	WLAN	8.66	±9.6
10728	AAC	IEEE 802.11ax (80 MHz, MCS9, 90pc duty cycle)	WLAN	8.65	±9.6
10729	AAC	IEEE 802.11ax (80 MHz, MCS10, 90pc duty cycle)	WLAN	8.64	±9.6
10730	AAC	IEEE 802.11ax (80 MHz, MCS11, 90pc duty cycle)	WLAN	8.67	±9.6
10731	AAC	IEEE 802.11ax (80 MHz, MCS0, 99pc duty cycle)	WLAN	8.42	±9.6
10732	AAC	IEEE 802.11ax (80 MHz, MCS1, 99pc duty cycle)	WLAN	8.46	±9.6
10733	AAC	IEEE 802.11ax (80 MHz, MCS2, 99pc duty cycle)	WLAN	8.40	±9.6
10734	AAC	IEEE 802.11ax (80 MHz, MCS3, 99pc duty cycle)	WLAN	8.25	±9.6
10735	AAC	IEEE 802.11ax (80 MHz, MCS4, 99pc duty cycle)	WLAN	8.33	±9.6
10736	AAC	IEEE 802.11ax (80 MHz, MCS5, 99pc duty cycle)	WLAN	8.27	±9.6
10737	AAC	IEEE 802.11ax (80 MHz, MCS6, 99pc duty cycle)	WLAN	8.36	±9.6
10738	AAC	IEEE 802.11ax (80 MHz, MCS7, 99pc duty cycle)	WLAN	8.42	±9.6
10739	AAC	IEEE 802.11ax (80 MHz, MCS8, 99pc duty cycle)	WLAN	8.29	±9.6
10740	AAC	IEEE 802.11ax (80 MHz, MCS9, 99pc duty cycle)	WLAN	8.48	±9.6
10741	AAC	IEEE 802.11ax (80 MHz, MCS10, 99pc duty cycle)	WLAN	8.40	±9.6
10742	AAC	IEEE 802.11ax (80 MHz, MCS11, 99pc duty cycle)	WLAN	8.43	±9.6
10743	AAC	IEEE 802.11ax (160 MHz, MCS0, 90pc duty cycle)	WLAN	8.94	±9.6
10744	AAC	IEEE 802.11ax (160 MHz, MCS1, 90pc duty cycle)	WLAN	9.16	±9.6
10745	AAC	IEEE 802.11ax (160 MHz, MCS2, 90pc duty cycle)	WLAN	8.93	±9.6
10746	AAC	IEEE 802.11ax (160 MHz, MCS3, 90pc duty cycle)	WLAN	9.11	±9.6
10747	AAC	IEEE 802.11ax (160 MHz, MCS4, 90pc duty cycle)	WLAN	9.04	±9.6
10748	AAC	IEEE 802.11ax (160 MHz, MCS5, 90pc duty cycle)	WLAN	8.93	±9.6
10749	AAC	IEEE 802.11ax (160 MHz, MCS6, 90pc duty cycle)	WLAN	8.90	±9.6
10750	AAC	IEEE 802.11ax (160 MHz, MCS7, 90pc duty cycle)	WLAN	8.79	±9.6
10751	AAC	IEEE 802.11ax (160 MHz, MCS8, 90pc duty cycle)	WLAN	8.82	±9.6
10752	AAC	IEEE 802.11ax (160 MHz, MCS9, 90pc duty cycle)	WLAN	8.81	±9.6
L		4	4		

EX3DV4 - SN:3922

August 11, 2023

UID	Rev	Communication System Name	T-2		
10753	AAC	IEEE 802.11ax (160 MHz, MCS10, 90pc duty cycle)	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10754	AAC	IEEE 802.11ax (160 MHz, MCS11, 90pc duty cycle)	WLAN	9.00	±9.6
10755	AAC	IEEE 802.11ax (160 MHz, MCS0, 99pc duty cycle)	WLAN	8.94	±9.6
10756	AAC	IEEE 802.11ax (160 MHz, MCS1, 99pc duty cycle)	WLAN	8.64	±9.6
10757	AAC	IEEE 802.11ax (160 MHz, MCS2, 99pc duty cycle)	WLAN	8.77	±9.6
10758	AAC	IEEE 802.11ax (160 MHz, MCS3, 99pc duty cycle)	WLAN	8.77	±9.6
10759	AAC	IEEE 802.11ax (160 MHz, MCS4, 99pc duty cycle)	WLAN	8.69	±9.6
10760	AAC	IEEE 802.11ax (160 MHz, MCS5, 99pc duty cycle)	WLAN	8.58	±9.6
10761	AAC	IEEE 802.11ax (160 MHz, MCS6, 99pc duty cycle)	WLAN	8.49	±9.6
10762	AAC	IEEE 802.11ax (160 MHz, MCS7, 99pc duty cycle)	WLAN	8.58	±9.6
10763	AAC	IEEE 802.11ax (160 MHz, MCS8, 99pc duty cycle)	WLAN	8.49	±9.6
10764	AAC	IEEE 802.11ax (160 MHz, MCS9, 99pc duty cycle)	WLAN	8.53	±9.6
10765	AAC	IEEE 802.11ax (160 MHz, MCS10, 99pc duty cycle)	WLAN	8.54	±9.6
10766	AAC	IEEE 802.11ax (160 MHz, MCS11, 99pc duty cycle)	WLAN	8.54	±9.6
10767	AAE	5G NR (CP-OFDM, 1 RB, 5MHz, QPSK, 15kHz)	WLAN	8.51	±9.6
10768	AAD	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	7.99	±9.6
10769	AAD	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)		8.01	±9.6
10770	AAD	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.01	±9.6
10771	AAD	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	±9.6
10772	AAD	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	±9.6
10773	AAD	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.23	±9.6
10774	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.03	±9.6
10775	AAD	5G NR (CP-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	±9.6
10776	AAD	5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD 5G NR FR1 TDD	8.31	±9.6
10777	AAC	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.30	±9.6
10778	AAD	5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.30	±9.6
10779	AAC	5G NR (CP-OFDM, 50% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.34	±9.6
10780	AAD	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.42	±9.6
10781	AAD	5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.38 8.38	±9.6
10782	AAD	5G NR (CP-OFDM, 50% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD		±9.6
10783	AAE	5G NR (CP-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.43 8.31	±9.6
10784	AAD	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.29	±9.6
10785	AAD	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.40	±9.6
10786	AAD	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.35	±9.6 ±9.6
10787	AAD	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.44	±9.6
10788	AAD	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.39	±9.6
10789	AAD	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.37	±9.6
10790	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.39	±9.6
10791	AAE	5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.83	±9.6
10792	AAD	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.92	±9.6
10793	AAD	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.95	±9.6
10794	AAD	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.82	±9.6
10795	AAD	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.84	±9.6
10796	AAD	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.82	±9.6
10797	AAD	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.01	±9.6
10798	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.89	±9.6
10799	AAD	5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.93	±9.6
10801	AAD	5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.89	±9.6
10802	AAD	5G NR (CP-OFDM, 1 RB, 90 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.87	±9.6
10803	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.93	±9.6
10805	AAD	5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	±9.6
10806	AAD	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.37	±9.6
10809	AAD	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	±9.6
10810	AAD	5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	±9.6
10812	AAD	5G NR (CP-OFDM, 50% RB, 60 MHz, QPSK, 30 KHz)	5G NR FR1 TDD	8.35	±9.6
10817	AAE	5G NR (CP-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.35	±9.6
10818	AAD	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	±9.6
10819	AAD	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.33	±9.6
10820	AAD	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.30	±9.6
10821	AAD	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	±9.6
10822	AAD	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	±9.6
10823	AAD	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.36	±9.6
10824	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.39	±9.6
10825	AAD	5G NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	±9.6
10827	AAD	5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.42	±9.6
10828	AAD	5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.43	±9.6

EX3DV4 - SN:3922

August 11, 2023

UID	Rev	Communication System Name	Group	DAD (JD)	Lu-Fa
10829	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)		PAR (dB)	Unc <sup>E</sup> k = 2
10830	AAD	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 60 kHz)	5G NR FR1 TDD 5G NR FR1 TDD	8.40 7.63	±9.6
10831	AAD	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD		±9.6
10832	AAD	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 60 kHz)		7.73	±9.6
10833	AAD	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 60 KHz)	5G NR FR1 TDD	7.74	±9.6
10834	AAD	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	±9.6
10835	AAD	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 60 KHz)	5G NR FR1 TDD	7.75	±9.6
10836	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	±9.6
10837	AAD	5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 60 KHz)	5G NR FR1 TDD	7.66	±9.6
10839	AAD	5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 60 KHz)	5G NR FR1 TDD	7.68	±9.6
10840	AAD	5G NR (CP-OFDM, 1 RB, 90 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	±9.6
10841	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.67	±9.6
10843	AAD	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.71	±9.6
10844	AAD	5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.49	±9.6
10846	AAD	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	±9.6
10854	AAD	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±9.6
10855	AAD	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	±9.6
10856	AAD	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.36	±9.6
10857	AAD	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.37	±9.6
10858	AAD	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.35	±9.6
10859	AAD	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.36	±9.6
10860	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	±9.6
10861	AAD	5G NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±9.6
10863	AAD	5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.40	±9.6
10864	AAD	5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±9.6
10865	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.37	±9.6
10866	AAD	5G NR (DFT-s-OFDM, 100 MHz, QPSK, 30 KHz)	5G NR FR1 TDD	8.41	±9.6
10868	AAD	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10869	AAE	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 120 KHz)	5G NR FR1 TDD	5.89	±9.6
10870	AAE	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 120 KHz)	5G NR FR2 TDD	5.75	±9.6
10871	AAE	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	5.86	±9.6
10872	AAE	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 16QAM, 120 KHz) 5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 16QAM, 120 KHz)	5G NR FR2 TDD	5.75	±9.6
10873	AAE	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.52	±9.6
10874	AAE	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.61	±9.6
10875	AAE	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	6.65	±9.6
10876	AAE	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	7.78	±9.6
10877	AAE	5G NR (CP-OFDM, 100% RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.39	±9.6
10878	AAE	5G NR (CP-OFDM, 100% RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	7.95	±9.6
10879	AAE	5G NR (CP-OFDM, 1 RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.41	±9.6
10880	AAE	5G NR (CP-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.12	±9.6
10881	AAE	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	8.38	±9.6
10882	AAE	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.75	±9.6
10883	AAE	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	5.96	±9.6
10884	AAE	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.57	±9.6
10885	AAE	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.53	±9.6
10886	AAE	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.61	±9.6
10887	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	6.65	±9.6
10888	AAE	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	7.78	±9.6
10889	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.35	±9.6
10890	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, 16QAM, 120 KHz)  5G NR (CP-OFDM, 100% RB, 50 MHz, 16QAM, 120 KHz)	5G NR FR2 TDD	8.02	±9.6
10891	AAE	5G NR (CP-OFDM, 100% HB, 50 MHz, 16QAM, 120 KHz)  5G NR (CP-OFDM, 1 RB, 50 MHz, 64QAM, 120 KHz)	5G NR FR2 TDD	8.40	±9.6
10892	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, 64QAM, 120 KHz) 5G NR (CP-OFDM, 100% RB, 50 MHz, 64QAM, 120 KHz)	5G NR FR2 TDD	8.13	±9.6
10897	AAC	5G NR (CP-OFDM, 100% NB, 50 MHz, 64QAM, 120 KHz)  5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 30 KHz)	5G NR FR2 TDD	8.41	±9.6
10898	AAB		5G NR FR1 TDD	5.66	±9.6
10899	AAB	5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.67	±9.6
10999	AAB	5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 30 kHz) 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.67	±9.6
10901	AAB	5G NR (DFT-s-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10901	AAB	5G NR (DFT-s-OFDM, 1 RB, 25 MHz, QPSK, 30 KHz)	5G NR FR1 TDD	5.68	±9.6
10902	AAB	5G NR (DFT-s-OFDM, 1 RB, 30 MHz, QPSK, 30 KHz)	5G NR FR1 TDD	5.68	±9.6
10903	AAB	5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 30 KHz)  5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 30 KHz)	5G NR FR1 TDD	5.68	±9.6
10904	AAB		5G NR FR1 TDD	5.68	±9.6
10905	AAB	5G NR (DFT-s-OFDM, 1 RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10906	AAC	5G NR (DFT-s-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10907	AAC	5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.78	±9.6
10908	AAB	5G NR (DFT-s-OFDM, 50% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.93	±9.6
10909	AAB	5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.96	±9.6
10910	AAB	5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.83	±9.6

EX3DV4 - SN:3922

August 11, 2023

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> $k=2$
10911	AAB	5G NR (DFT-s-OFDM, 50% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.93	±9.6
10912	AAB	5G NR (DFT-s-OFDM, 50% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10913	AAB	5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10914	AAB	5G NR (DFT-s-OFDM, 50% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.85	±9.6
10915	AAB	5G NR (DFT-s-OFDM, 50% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.83	±9.6
10916	AAB	5G NR (DFT-s-OFDM, 50% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.87	±9.6
10917	AAB	5G NR (DFT-s-OFDM, 50% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.94	±9.6
10918	AAC	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.86	±9.6
10919	AAB	5G NR (DFT-s-OFDM, 100% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.86	±9.6
10920	AAB	5G NR (DFT-s-OFDM, 100% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.87	±9.6
10921	AAB	5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10922	AAB	5G NR (DFT-s-OFDM, 100% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.82	±9.6
10923	AAB	5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10924	AAB	5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10925	AAB	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.95	±9.6
10926	AAB	5G NR (DFT-s-OFDM, 100% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10927	AAB	5G NR (DFT-s-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.94	±9.6
10928	AAC	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	±9.6
10929	AAC	5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	±9.6
10930	AAC	5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	±9.6
10931	AAC	5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
10932	AAC	5G NR (DFT-s-OFDM, 1 RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	
10933	AAC	5G NR (DFT-s-OFDM, 1 RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
10934	AAC	5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
10935	AAD	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
10936	AAC	5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.90	±9.6
10937	AAC	5G NR (DFT-s-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD		±9.6
10938	AAC	5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 15 kHz)		5.77	±9.6
10939	AAC	5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.90	±9.6
10940	AAC	5G NR (DFT-s-OFDM, 50% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.82	±9.6
10941	AAC	5G NR (DFT-s-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.89	±9.6
10942	AAC		5G NR FR1 FDD	5.83	±9.6
10942	AAD	SG NR (DFT-s-OFDM, 50% RB, 40 MHZ, QPSK, 15 KHZ)	5G NR FR1 FDD	5.85	±9.6
10943	AAC	5G NR (DFT-s-OFDM, 50% RB, 50 MHz, QPSK, 15kHz)	5G NR FR1 FDD	5.95	±9.6
10945	AAC	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.81	±9.6
10946	AAC	5G NR (DFT-s-OFDM, 100% RB, 10MHz, QPSK, 15kHz)	5G NR FR1 FDD	5.85	±9.6
10947	AAC	5G NR (DFT-s-OFDM, 100% RB, 15MHz, QPSK, 15kHz)	5G NR FR1 FDD	5.83	±9.6
10948	AAC	5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.87	±9.6
10948	AAC	5G NR (DFT-s-OFDM, 100% RB, 25MHz, QPSK, 15kHz)	5G NR FR1 FDD	5.94	±9.6
		5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.87	±9.6
10950	AAC	5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.94	±9.6
10951		5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.92	±9.6
10952	AAA	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.25	±9.6
10953	AAA	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.15	±9.6
10954	AAA	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.23	±9.6
10955	AAA	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.42	±9.6
10956	AAA	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.14	±9.6
10957	AAA	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.31	±9.6
10958	AAA	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.61	±9.6
10959	AAA	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.33	±9.6
10960	AAC	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.32	±9.6
10961	AAB	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.36	±9.6
10962	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.40	±9.6
10963	AAB	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.55	±9.6
10964	AAC	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.29	±9.6
10965	AAB	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.37	±9.6
10966	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.55	±9.6
10967	AAB	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.42	±9.6
10968	AAB	5G NR DL (CP-OFDM, TM 3.1, 100 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.49	±9.6
10972	AAB	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	11.59	±9.6
10973	AAB	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	9.06	±9.6
10974	AAB	5G NR (CP-OFDM, 100% RB, 100 MHz, 256-QAM, 30 kHz)	5G NR FR1 TDD	10.28	±9.6
10978	AAA	ULLA BDR	ULLA	1.16	±9.6
10979	AAA	ULLA HDR4	ULLA	8.58	±9.6
10980	AAA	ULLA HDR8	ULLA	10.32	±9.6
10981	AAA	ULLA HDR04	ULLA	3.19	±9.6
10982	AAA	ULLA HDRp8	ULLA	3.43	
		T	ULLA	0.40	±9.6

Certificate No: EX-3922\_Aug23

Page 21 of 22

Test Report No. 15106908H-F-R1 Page 63 of 70

EX3DV4 - SN:3922 August 11, 2023

UID	Rev	Communication System Name	Group	DAD (ID)	. F
10983	AAA	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	PAR (dB)	Unc <sup>E</sup> k = 2
10984	AAA	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.31	±9.6
10985	AAA	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.42	±9.6
10986	AAA	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 30 kHz)		9.54	±9.6
10987	AAA	5G NR DL (CP-OFDM, TM 3.1, 60 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.50	±9.6
10988	AAA	5G NR DL (CP-OFDM, TM 3.1, 70 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.53	±9.6
10989	AAA	5G NR DL (CP-OFDM, TM 3.1, 80 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.38	±9.6
10990	AAA	5G NR DL (CP-OFDM, TM 3.1, 90 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.33	±9.6
11003	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.52	±9.6
11004	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	10.24	±9.6
11005	AAA	5G NR DL (CP-OFDM, TM 3.1, 25 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	10.73	±9.6
11006	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.70	±9.6
11007	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.55	±9.6
11008	AAA	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.46	±9.6
11009	AAA	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.51	±9.6
11010	AAA	5G NR DL (CP-OFDM, TM 3.1, 25 MHz, 64-QAM, 30 KHz)	5G NR FR1 FDD	8.76	±9.6
11011	AAA	5G NR DL (CR OFDM, TM 3.1, 30 MHZ, 64-QAM, 30 KHZ)	5G NR FR1 FDD	8.95	±9.6
11012	AAA	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.96	±9.6
11013	AAA	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.68	±9.6
11013	AAA	IEEE 802.11be (320 MHz, MCS1, 99pc duty cycle)	WLAN	8.47	±9.6
11015	AAA	IEEE 802.11be (320 MHz, MCS2, 99pc duty cycle)	WLAN	8.45	±9.6
11016	AAA	IEEE 802.11be (320 MHz, MCS3, 99pc duty cycle)	WLAN	8.44	±9.6
11016	AAA	IEEE 802.11be (320 MHz, MCS4, 99pc duty cycle)	WLAN	8.44	±9.6
11017		IEEE 802.11be (320 MHz, MCS5, 99pc duty cycle)	WLAN	8.41	±9.6
	AAA	IEEE 802.11be (320 MHz, MCS6, 99pc duty cycle)	WLAN	8.40	±9.6
11019	AAA	IEEE 802.11be (320 MHz, MCS7, 99pc duty cycle)	WLAN	8.29	±9.6
11020	AAA	IEEE 802.11be (320 MHz, MCS8, 99pc duty cycle)	WLAN	8.27	±9.6
11021	AAA	IEEE 802.11be (320 MHz, MCS9, 99pc duty cycle)	WLAN	8.46	±9.6
11022	AAA	IEEE 802.11be (320 MHz, MCS10, 99pc duty cycle)	WLAN	8.36	±9.6
11023	AAA	IEEE 802.11be (320 MHz, MCS11, 99pc duty cycle)	WLAN	8.09	±9.6
11024	AAA	IEEE 802.11be (320 MHz, MCS12, 99pc duty cycle)	WLAN	8,42	±9.6
11025	AAA	IEEE 802.11be (320 MHz, MCS13, 99pc duty cycle)	WLAN	8.37	±9.6
11026	AAA	IEEE 802.11be (320 MHz, MCS0, 99pc duty cycle)	WLAN	8.39	±9.6

<sup>&</sup>lt;sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Certificate No: EX-3922\_Aug23 Page 22 of 22

Test Report No. 15106908H-F-R1 Page 64 of 70

# System check uncertainty

The uncertainty budget has been determined for the DASY5 measurement system according to the SPEAG documents and is given in the following Table.

# Repeatability Budget for System Check

<0.3 to 3 GHz range Body>

Error Description	Uncertainty value ± %	Probability distribution	divisor	(ci)	(ci) 10g	Standard Uncertainty (1g) %	Standard Uncertainty (10g) %
Measurement Syster	n						
Probe calibration	± 1.8	Normal	1	1	1	± 1.8	± 1.8
Axial isotropy of the probe	± 0.0	Rectangular	√3	1	1	± 0.0	± 0.0
Spherical isotropy of the probe	± 0.0	Rectangular	√3	1	0	± 0.0	± 0.0
Boundary effects	± 0.0	Rectangular	√3	1	1	± 0.0	± 0.0
Probe linearity	± 0.0	Rectangular	√3	1	1	± 0.0	± 0.0
Detection limit	± 0.0	Rectangular	√3	1	1	± 0.0	± 0.0
Modulation response	± 0.0	Rectangular	√3	1	1	± 0.0	± 0.0
Readout electronics	± 0.0	Normal	1	1	1	± 0.0	± 0.0
Response time	± 0.0	Rectangular	√3	1	1	± 0.0	± 0.0
Integration time	± 0.0	Rectangular	√3	1	1	± 0.0	± 0.0
RF ambient Noise	± 0.0	Rectangular	√3	1	1	± 0.0	± 0.0
RF ambient Reflections	± 0.0	Rectangular	√3	1	1	± 0.0	± 0.0
Probe Positioner	± 0.02	Rectangular	√3	1	1	± 0.0	± 0.0
Probe positioning	± 0.4	Rectangular	√3	1	1	± 0.2	± 0.2
Max.SAR Eval.	± 0.0	Rectangular	√3	1	1	± 0.0	± 0.0
Dipole Related	•						
Dev. of experimental dipole	± 0.0	Rectangular	√3	1	1	± 0.0	± 0.0
Dipole Axis to Liquid Distance	± 2.0	Rectangular	√3	1	1	± 1.2	± 1.2
Input power and SAR drift meas.	± 3.4	Rectangular	√3	1	1	± 2.0	± 2.0
Phantom and Setup	1				Mark II II I		
Phantom uncertainty	± 4.0	Rectangular	√3	1	1	± 2.3	± 2.3
SAR correction	± 1.9	Rectangular	√3	1	0.84	± 1.1	± 0.9
Liquid conductivity (meas.)	± 5.0	Normal	1	0.78	0.71	± 3.9	± 3.6
Liquid permittivity (meas.)	± 5.0	Normal	1	0.26	0.26	± 1.3	± 1.3
Temp. unc Conductivity	± 3.4	Rectangular	√3	0.78	0.71	± 1.5	± 1.4
Temp. unc. - Permittivity	± 0.4	Rectangular	√3	0.23	0.26	± 0.1	± 0.1
Combined Standard	Unant-lat	Ī					
Combined Standard					+	± 5.9	± 5.6
Expanded Uncertain	ty (K=Z)					± 11.8	± 11.2

Table of uncertainties are listed for ISO/IEC 17025.

# <3 to 6 GHz range Body >

Error Description	Uncertainty value ± %	Probability distribution	divisor	(ci) 1g	(ci) 10g	Standard Uncertainty (1g) %	Standard Uncertaint (10g) %
Measurement System	1					10	•
Probe calibration	± 1.8	Normal	1	1	1	± 1.8	± 1.8
Axial isotropy of the probe	± 0.0	Rectangular	√3	1	1	± 0.0	± 0.0
Spherical isotropy of the probe	± 0.0	Rectangular	√3	1	0	± 0.0	± 0.0
Boundary effects	± 0.0	Rectangular	√3	1	1	± 0.0	± 0.0
Probe linearity	± 0.0	Rectangular	√3	1	1	± 0.0	± 0.0
Detection limit	± 0.0	Rectangular	√3	1	1	± 0.0	± 0.0
Modulation response	± 0.0	Rectangular	√3	1	1	± 0.0	± 0.0
Readout electronics	± 0.0	Normal	1	1	1	± 0.0	± 0.0
Response time	± 0.0	Rectangular	√3	1	1	± 0.0	± 0.0
Integration time	± 0.0	Rectangular	√3	1	1	± 0.0	± 0.0
RF ambient Noise	± 0.0	Rectangular	√3	1	1	± 0.0	± 0.0
RF ambient Reflections	± 0.0	Rectangular	√3	1	1	± 0.0	± 0.0
Probe Positioner	± 0.04	Rectangular	√3	1	1	± 0.0	± 0.0
Probe positioning	± 0.8	Rectangular	√3	1	1	± 0.5	± 0.5
Max.SAR Eval.	± 0.0	Rectangular	√3	1	1	± 0.0	± 0.0
Test Sample Related	•	,				•	
Dev. of experimental dipole	± 0.0	Rectangular	√3	1	1	± 0.0	± 0.0
Dipole Axis to Liquid Distance	± 2.0	Rectangular	√3	1	1	± 1.2	± 1.2
Input power and SAR drift meas.	± 3.4	Rectangular	√3	1	1	± 2.0	± 2.0
Phantom and Setup					-		
Phantom uncertainty	± 4.0	Rectangular	√3	1	1	± 2.3	± 2.3
SAR correction	± 1.9	Rectangular	√3	1	0.84	± 1.1	± 0.9
Liquid conductivity (meas.)	± 5.0	Normal	1	0.78	0.71	± 3.9	± 3.6
Liquid permittivity (meas.)	± 5.0	Normal	1	0.26	0.26	± 1.3	± 1.3
Temp. unc Conductivity	± 3.4	Rectangular	√3	0.78	0.71	± 1.5	± 1.4
Temp. unc. - Permittivity	± 0.4	Rectangular	√3	0.23	0.26	± 0.1	± 0.1
Combined Standard	Uncertainty	I			Ī	± 5.9	± 5.6
Expanded Uncertaint					± 11.8	± 11.2	

Table of uncertainties are listed for ISO/IEC 17025.