



849 NW STATE ROAD 45  
 NEWBERRY, FL 32669 USA  
 PH: 888.472.2424 OR  
 352.472.5500  
 FAX: 352.472.2030  
 EMAIL: [INFO@TIMCOENGR.COM](mailto:INFO@TIMCOENGR.COM)  
[HTTP:// WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

**FCC PART 15.236  
 WIRELESS MICROPHONE  
 TEST REPORT**

APPLICANT	<b>AUDIO-TECHNICA CORPORATION</b>
	<b>2-46-1 NISHI-NARUSE TOKYO, JAPAN 194-8666</b>
FCC ID	<b>JFZT3202DE2</b>
PRODUCT DESCRIPTION	<b>3000 SERIES HANDHELD MICROPHONE</b>
DATE SAMPLE RECEIVED	<b>9/27/2017</b>
DATE TESTED	<b>11/21/2011</b>
TESTED BY	<b>Tim Royer</b>
APPROVED BY	<b>Sid Sanders</b>
TEST RESULTS	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

Report Number	Version Number	Description	Issue Date
1737BUT17TestReport	Rev1	Initial Issue	11/27/2017
	Rev2	Revised report	12/21/2017

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL  
 WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**

## TABLE OF CONTENTS

<b>GENERAL REMARKS</b> .....	2
GENERAL INFORMATION.....	3
RF POWER OUTPUT .....	5
MODULATION CHARACTERISTICS .....	7
Frequency Selection .....	8
MODULATION CHARACTERISTICS .....	9
Test Data: .....	9
OCCUPIED BANDWIDTH.....	10
OCCUPIED BANDWIDTH (26 dB) .....	11
Test Data: 470.125 MHz.....	11
Test Data: 500 MHz.....	12
Test Data: 529.975 MHz.....	13
OCCUPIED BANDWIDTH (99%).....	14
Test Data: 470.125 MHz.....	14
Test Data: 500 MHz.....	15
Test Data: 529.975 MHz.....	16
OCCUPIED BANDWIDTH.....	17
Test Data: Low End of Band.....	18
Test Data: Middle of Band .....	19
Test Data: High End of Band .....	20
FIELD STRENGTH OF SPURIOUS EMISSIONS.....	21
FREQUENCY STABILITY.....	23
STATE OF THE MEASUREMENT UC.....	24
EMC EQUIPMENT LIST .....	25

## GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

## Summary

The device under test does:

- Fulfill the general approval requirements as identified in this test report and was selected by the customer.
- Not fulfill the general approval requirements as identified in this test report

## Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made at:

**Timco Engineering Inc.**  
**849 NW State Road 45**  
**Newberry, FL 32669**



### Tested by:


Name and Title: Tim Royer, Project Manager/Testing Engineer

Sr. EMC Engineer  
EMC-003838-NE



**Date: 11 / 27 / 2017**

### Reviewed and approved by:

  
Name and Title: Sid Sanders, Engineer

**Date: 11 / 30 / 2017**

Applicant: AUDIO-TECHNICA CORPORATION  
FCC ID: JFZT3202DE2  
REPORT: 1737BUT17TestReport\_Rev2

[Table of Contents](#)

Page 2 of 25



**GENERAL INFORMATION  
RULES PART 2.1033**

**TECHNICAL DESCRIPTION**

The test results relate only to the items tested.	
<b>EUT Description</b>	3000 SERIES HANDHELD MICROPHONE
<b>FCC ID</b>	JFZT3202DE2
<b>Modulation</b>	FM
<b>Type of Emission</b>	14K1F3E
<b>Frequency Range</b>	470 – 530 MHz
<b>Test Frequencies</b>	470.125, 500 & 529.975 MHz
<b>Maximum Output Power</b>	30mW
<b>EUT Power Source</b>	<input type="checkbox"/> 110–120Vac/50– 60Hz
	<input type="checkbox"/> DC Power
	<input checked="" type="checkbox"/> Battery Operated Exclusively
<b>Test Item</b>	<input type="checkbox"/> Prototype
	<input checked="" type="checkbox"/> Pre-Production
	<input type="checkbox"/> Production
<b>Type of Equipment</b>	<input type="checkbox"/> Fixed
	<input type="checkbox"/> Mobile
	<input checked="" type="checkbox"/> Portable



## GENERAL INFORMATION

<b>Test Facility</b>	<b>Timco Engineering, Inc. 849 NW State Road 45, Newberry, FL 32669</b> <b>Test Site Designation # : US1070</b>
<b>Test Condition</b>	The temperature was 26°C with a relative humidity of 50%.
<b>Modifications</b>	None
<b>Test Exercise (e.g. software description, test signal, etc.)</b>	The EUT was placed in continuous transmit mode of operation.
<b>Applicable Standards</b>	TIA 603, FCC CFR 47 Parts 2 and 15


## RF POWER OUTPUT

**Rule Part No.:** Part 2.1046 ,15.236 (d) (1)

**Test Requirements:** In the bands allocated and assigned for broadcast television and in the 600 MHz service band: 50 mW EIRP ; in the Guard Band 614-617MHz the limit is 20 mW EIRP.

**Method of Measurement:** For a device that has a permanently attached antenna, RF power is measured as ERP. The substitution method was used. With a nominal battery voltage, and the transmitter properly adjusted, the ,RF output measures:

### Test Setup Diagram :

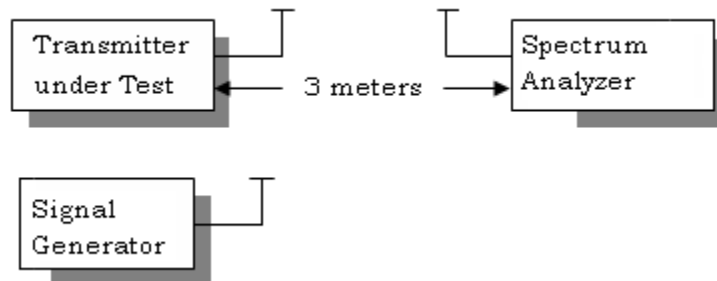

### Test Data:

OUTPUT POWER:

Tuned Freq MHz	Antenna Polarity	eirp (dBm)	Margin
470.12	V	3.38	13.60
470.12	H	8.22	8.76
500.00	H	8.51	8.47
500.00	V	-4.40	21.38
529.98	V	0.33	16.65

**Result: Meets Requirements**

**Test Data:**

Guard Band 614-617MHz:

Tuned Freq MHz	Meter Reading dBu V	eirp (dBm)	Margin
470.00	29.71	-42.86	55.86
470.00	31.26	-41.39	54.39
470.00	31.89	-40.54	53.54
500.00	31.08	-41.49	54.49
500.00	30.97	-41.68	54.68
500.00	31.41	-41.02	54.02
530.00	28.81	-43.76	56.76
530.00	29.39	-43.26	56.26
530.00	30.15	-42.28	55.28

**Result: Meets Requirements**

## MODULATION CHARACTERISTICS

**Rule Part No.:** Part 2.1047(a)(b)

**Test Requirements:**


**Method of Measurement:**

*Audio frequency response*

The audio frequency response was measured in accordance with TIA/EIA Specification 603 with no exception. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 – 5000Hz shall be submitted. The audio frequency response curve is shown below.

Part 2.1047(a) Voice modulated communication equipment: For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all the circuitry installed between the modulation limiter and the modulated stage shall be submitted.

### AUDIO FREQUENCY RESPONSE PLOT

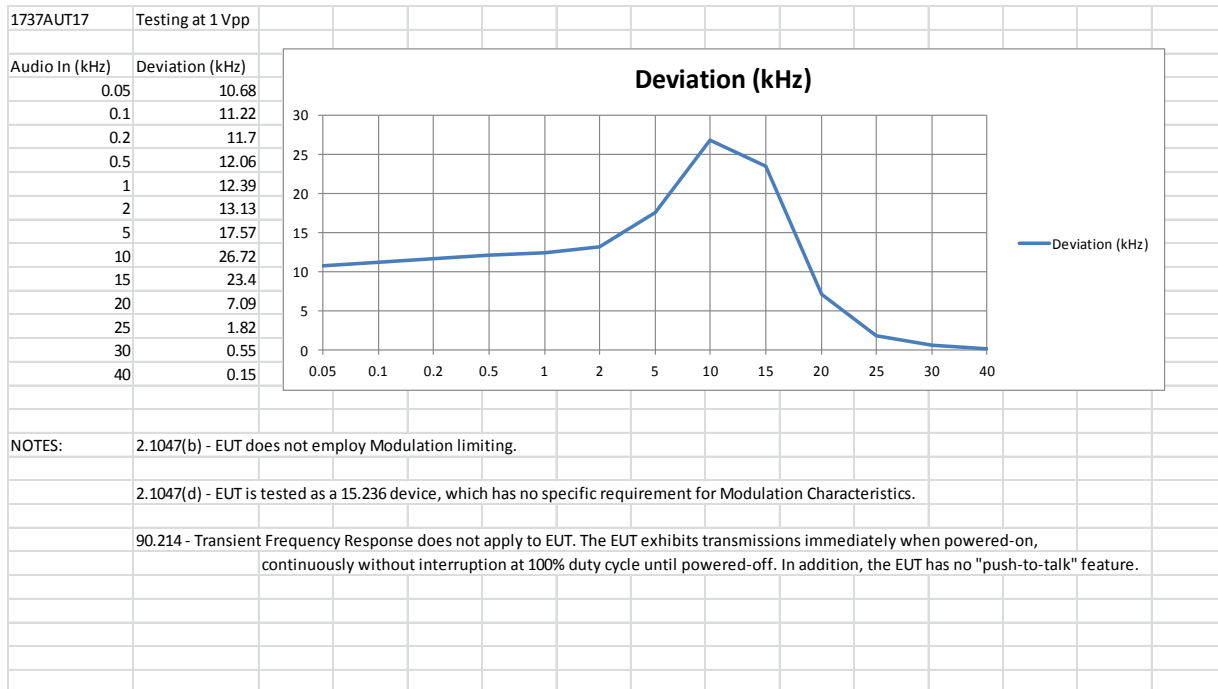




## Frequency Selection

**Rule Part No.:** 15.236 (f) (1)

**Test Requirements:** The frequency selection shall be offset from the upper or lower band limits by 25 kHz or an integral multiple thereof. 470 – 608 MHz , and 614-698 MHz.

**Method of Measurement:** For a device that has a permanently attached antenna, RF power is measured radiated. With a nominal battery voltage, and the transmitter properly adjusted, the ,RF output measures:

### Test Setup Diagram :

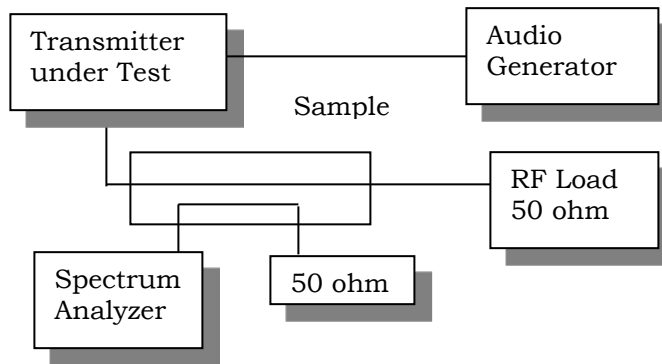

### Test Data:

Frequency Range  
470 - 608 MHz

Low Frequency	470.125
High Frequency	529.975

**Result: Meets Requirements**



## **MODULATION CHARACTERISTICS**

**Rule Part No.:** Part 2.1033(c) (4)

**Test Data:**

The 99 % bandwidth is 78.1 kHz. 78K1F3E


## OCCUPIED BANDWIDTH

**Rules Part No.:** FCC Part 15.236

**Requirements:** One or more adjacent 25 kHz segments within the assignable frequencies may be combined to form a channel whose maximum bandwidth shall not exceed 200 kHz. The operating bandwidth shall not exceed 200 kHz.


**Measurement Procedure:** ANSI C63.26 sec. 5.4.3

**Test Setup Diagram:**

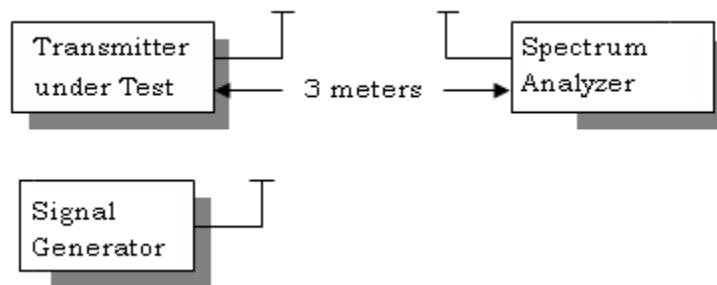

# OCCUPIED BANDWIDTH (26 dB)


Test Data: 470.125 MHz

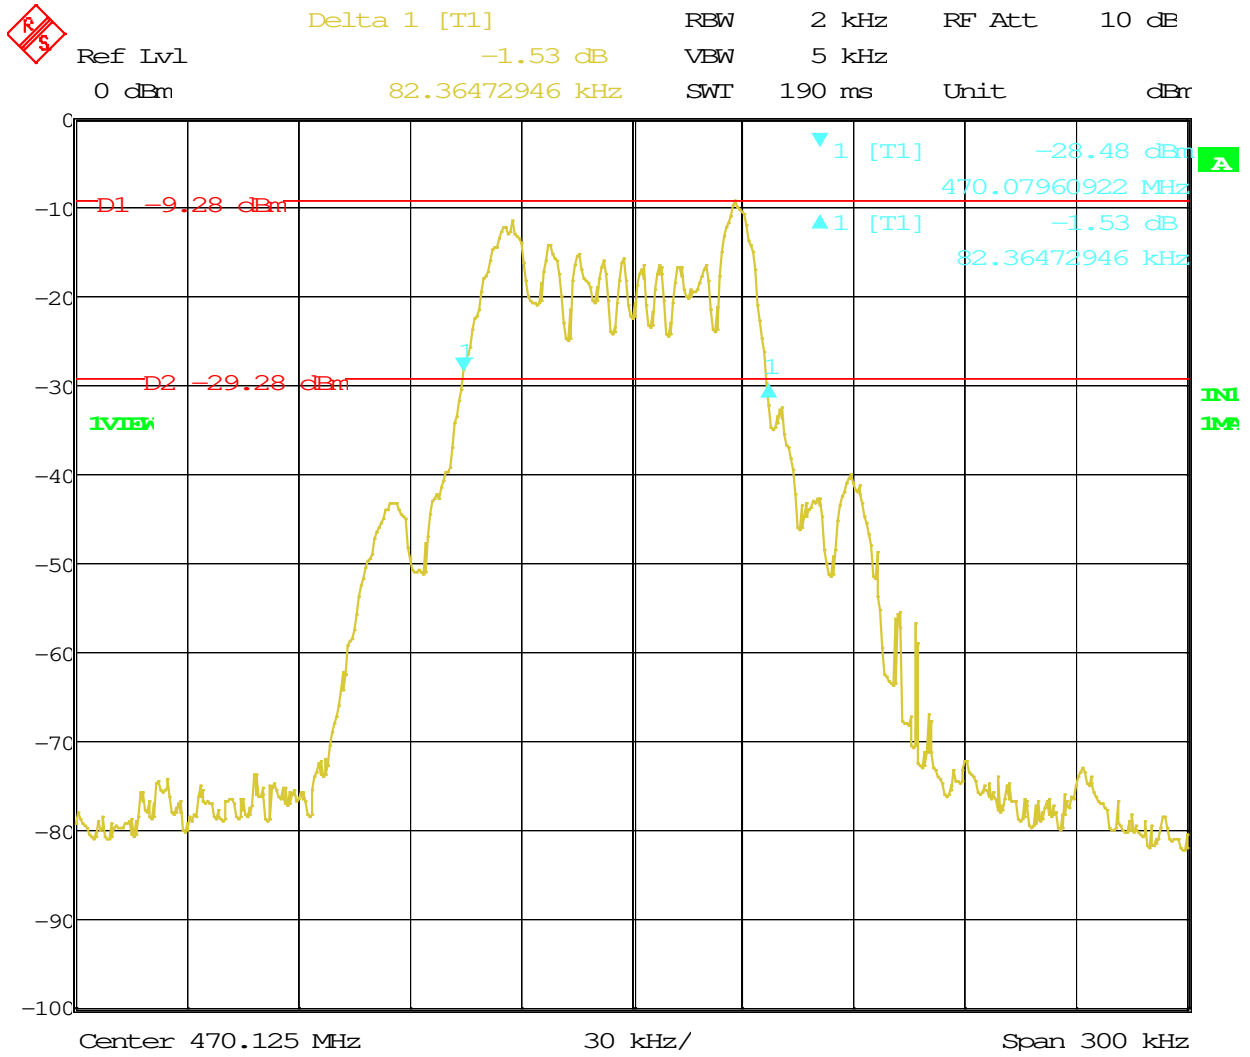

Date: 1.JAN.1997 07:40:45

# OCCUPIED BANDWIDTH PLOT (26 dB)


Test Data: 500 MHz

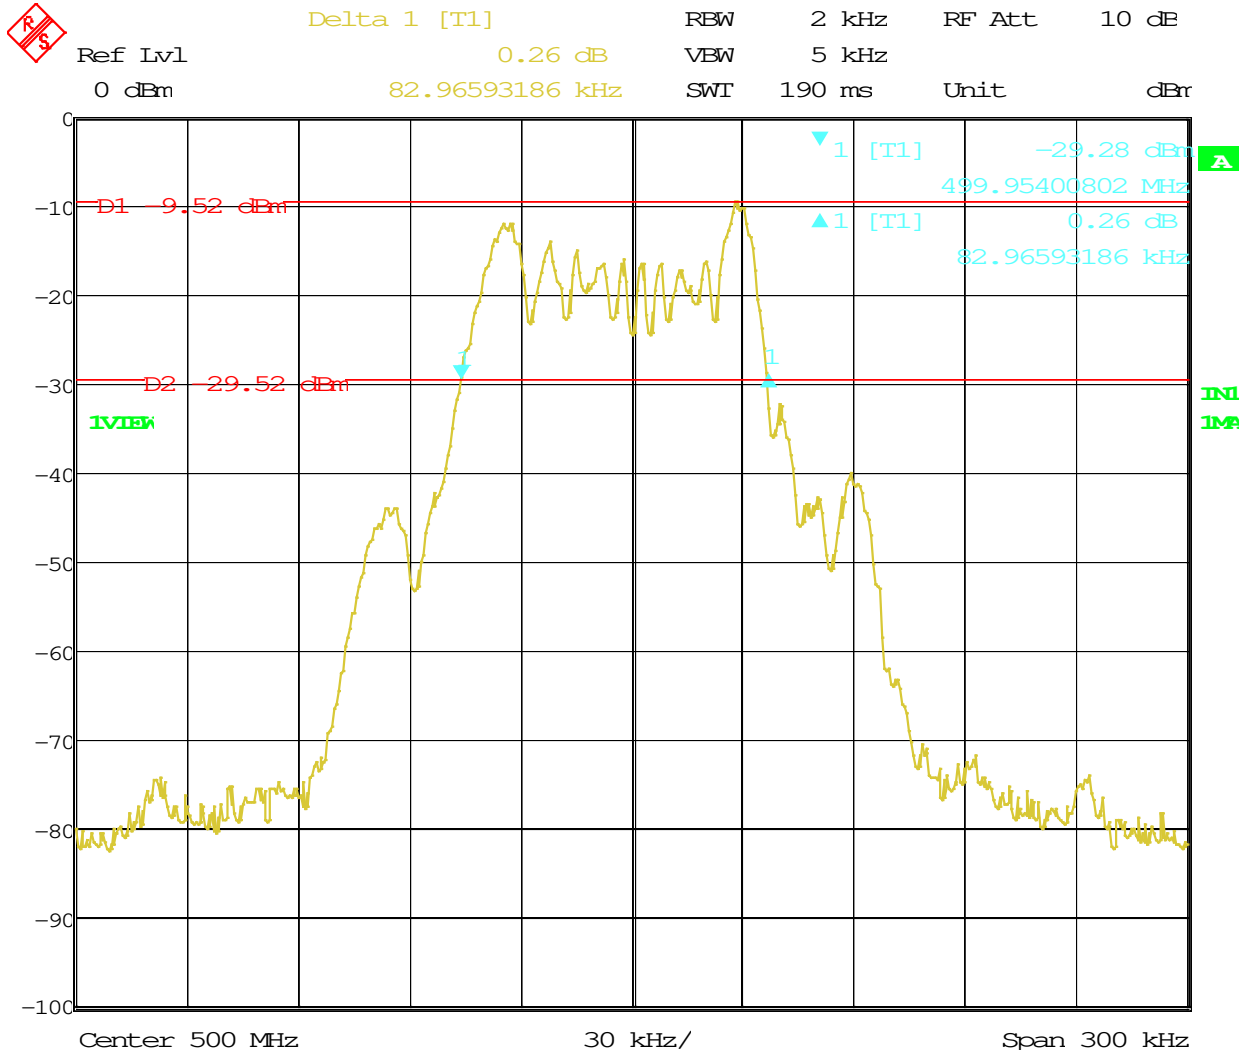

Date: 1.JAN.1997 07:37:01

# OCCUPIED BANDWIDTH PLOT (26 dB)


Test Data: 529.975 MHz

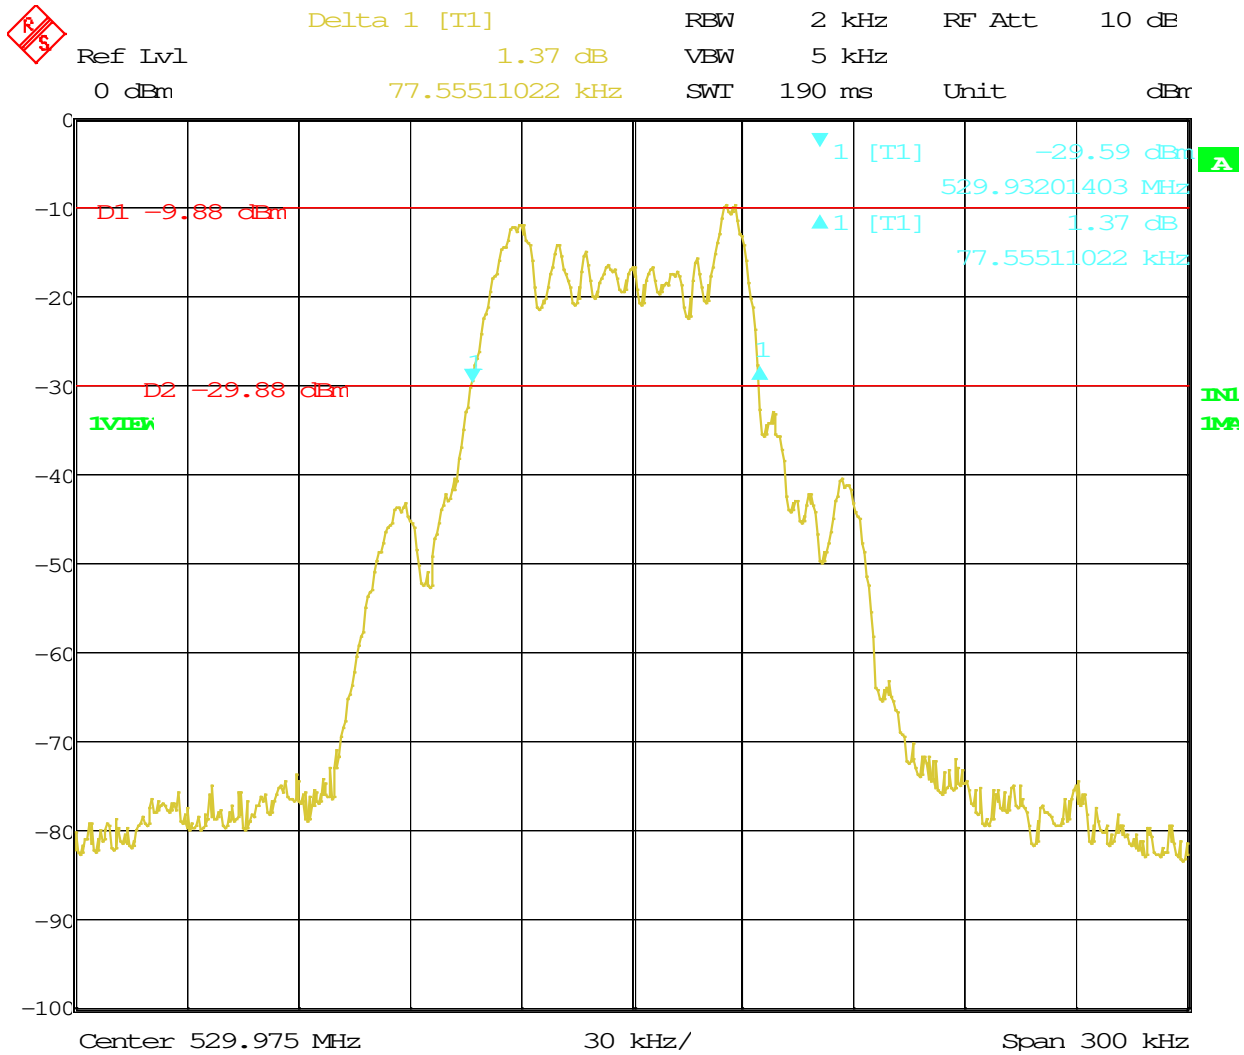

Date: 1.JAN.1997 07:44:37

# OCCUPIED BANDWIDTH (99%)

Test Data: 470.125 MHz

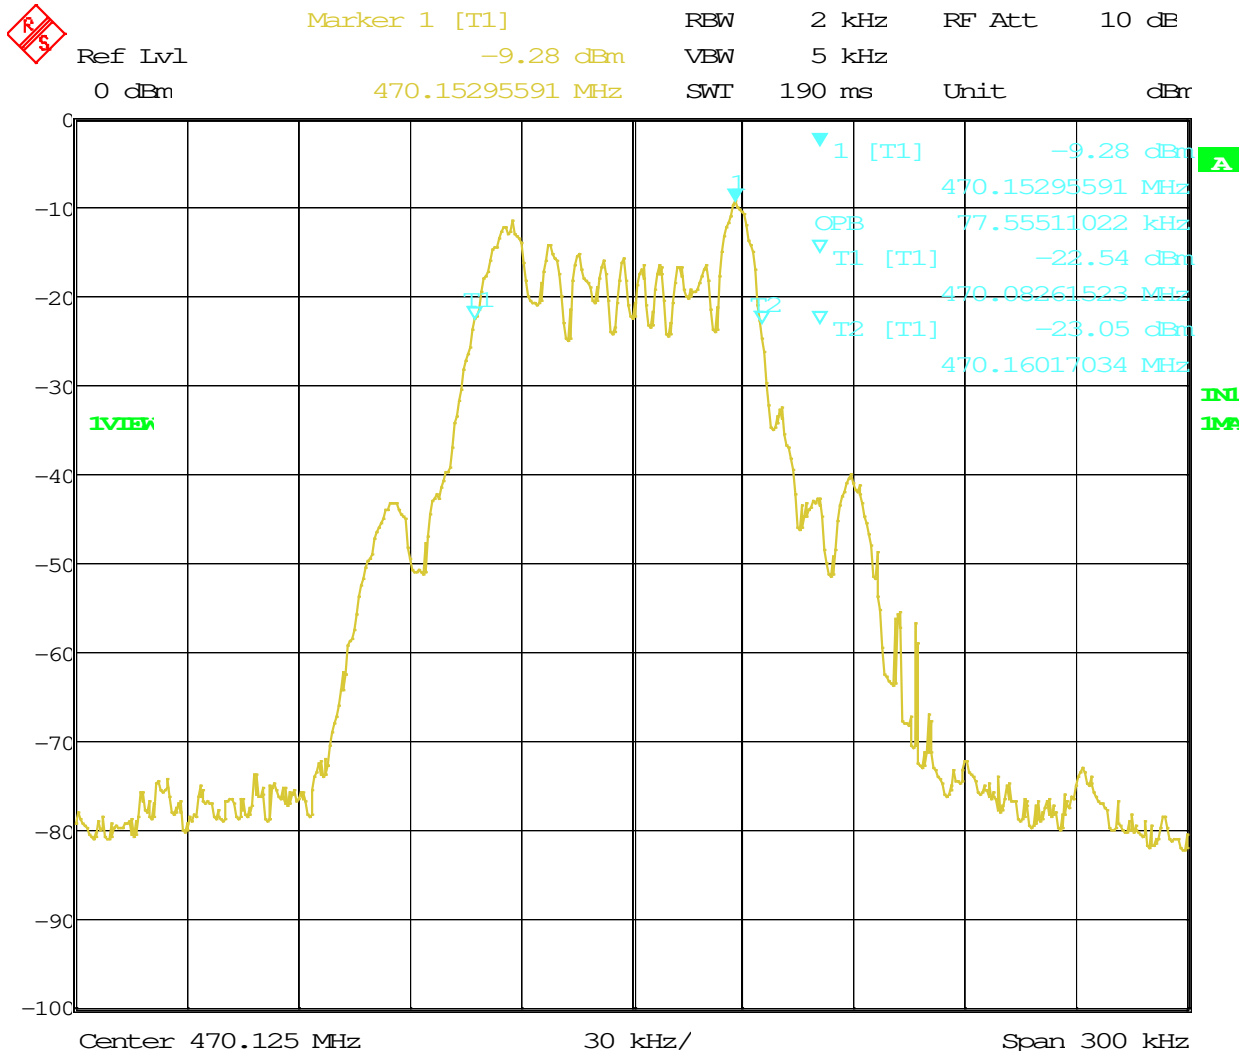


Date: 1.JAN.1997 07:39:58

# OCCUPIED BANDWIDTH PLOT (99%)

Test Data: 500 MHz

	Ref Lvl	Marker 1 [T1]	RBW	2 kHz	RF Att	10 dB
	0 dBm	-16.34 dBm	VBW	5 kHz		
		500.0200000 MHz	SWT	190 ms	Unit	dBm

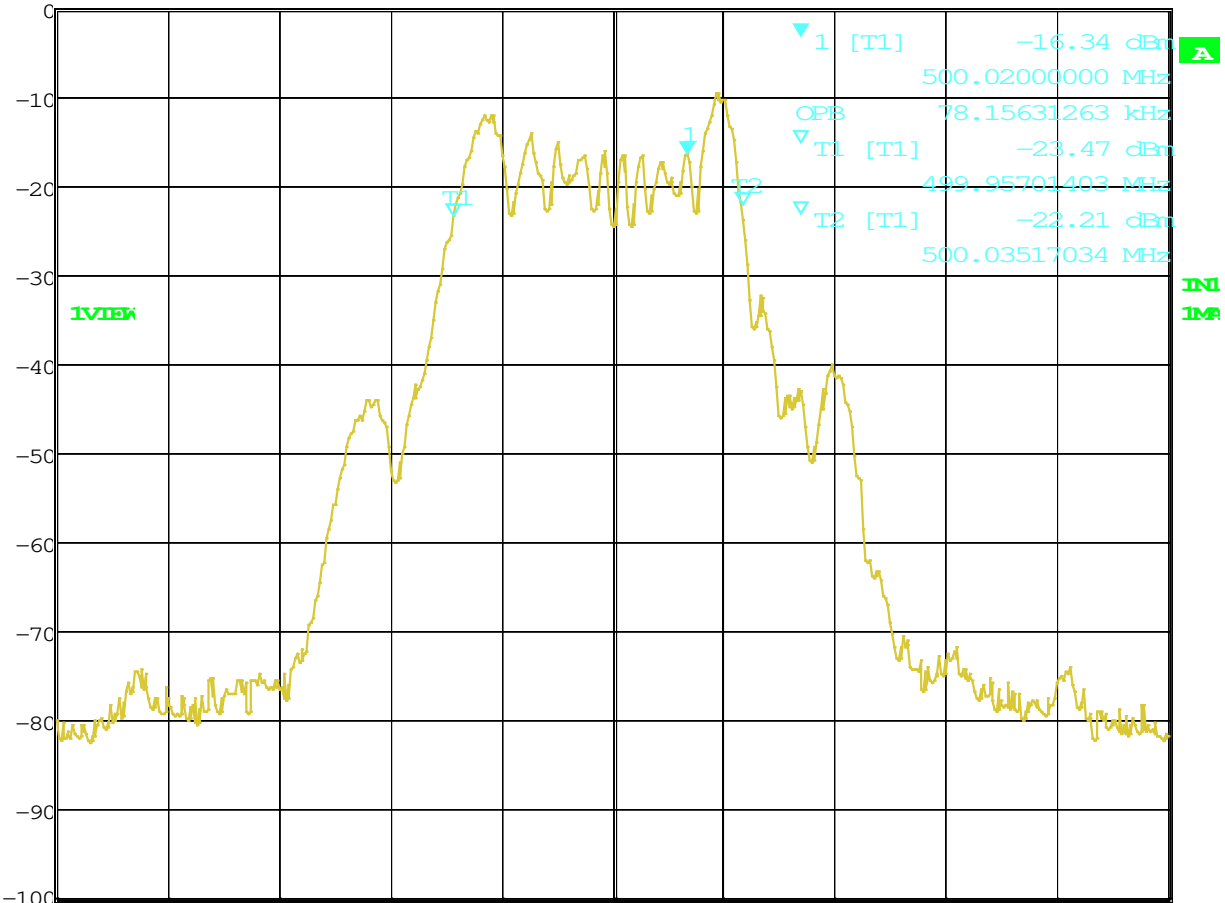


Center 500 MHz      30 kHz/      Span 300 kHz

Date: 1.JAN.1997 07:34:42



# OCCUPIED BANDWIDTH PLOT (99%)

Test Data: 529.975 MHz

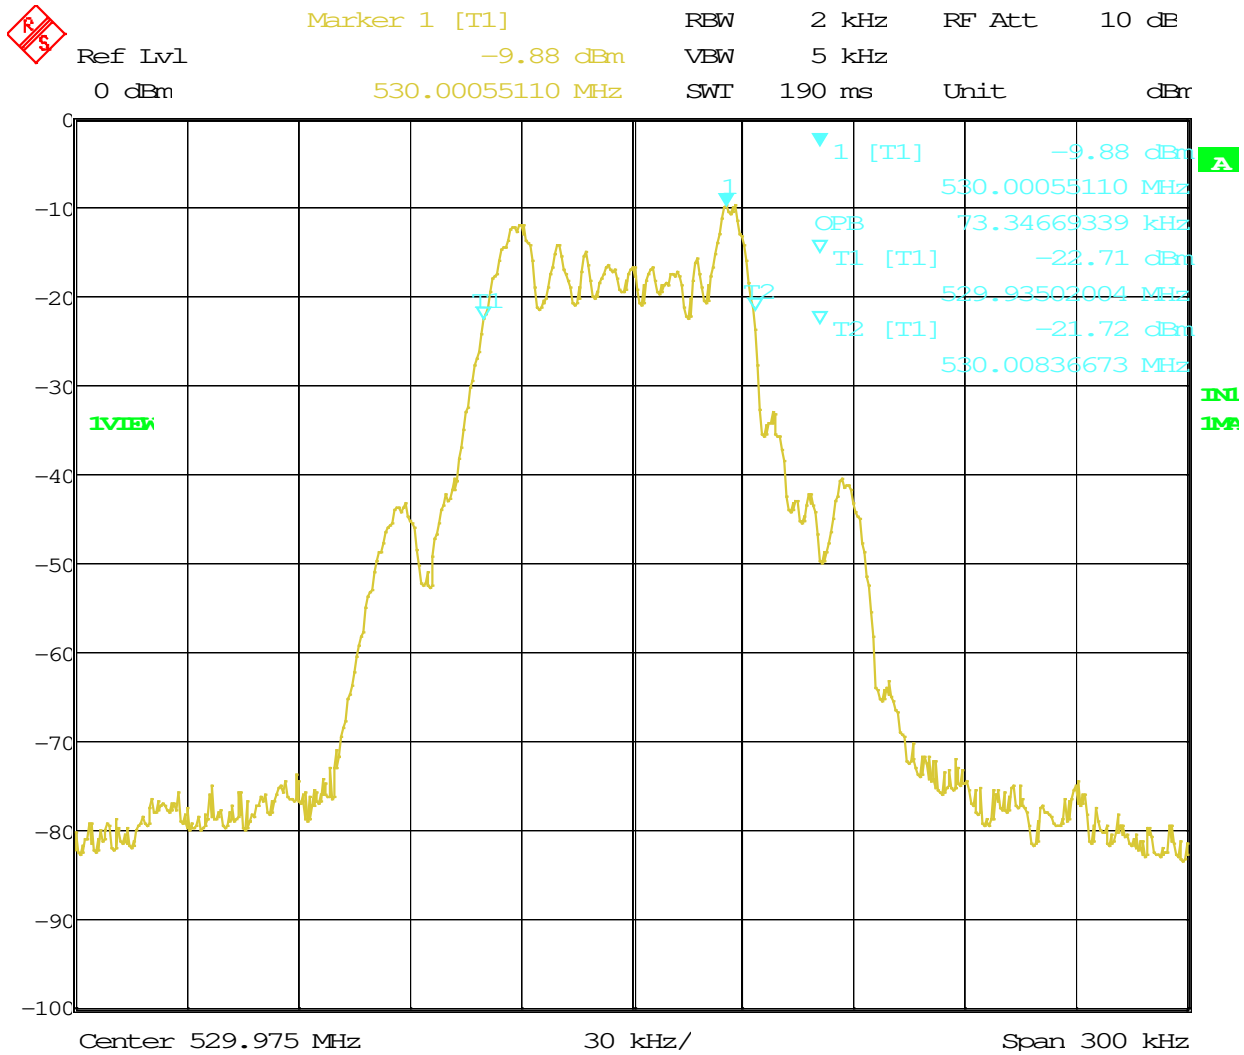


Date: 1.JAN.1997 07:45:16

## OCCUPIED BANDWIDTH

**Rules Part No.:** FCC Part 15.236 (g)

**Requirements:** Emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in §8.3 of ETSI EN 300 422-1 V1.4.2 (2011-08), *Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; Part 1: Technical characteristics and methods of measurement.*


Emissions outside of this band shall comply with the limits specified in section 8.4 of ETSI EN 300 422-1 V1.4.2 (2011-08).

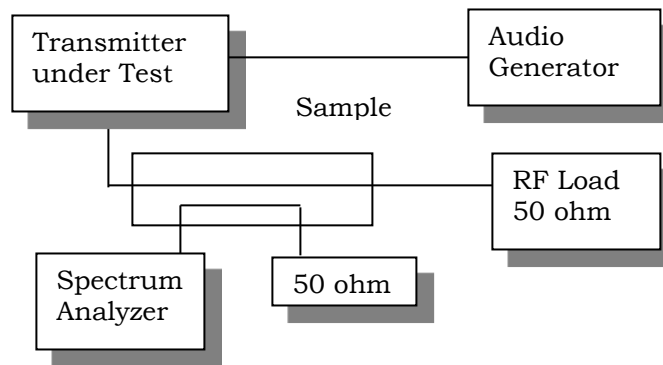

## OCCUPIED BANDWIDTH MEASUREMENT

# OCCUPIED BANDWIDTH PLOT

## Test Data: Low End of Band

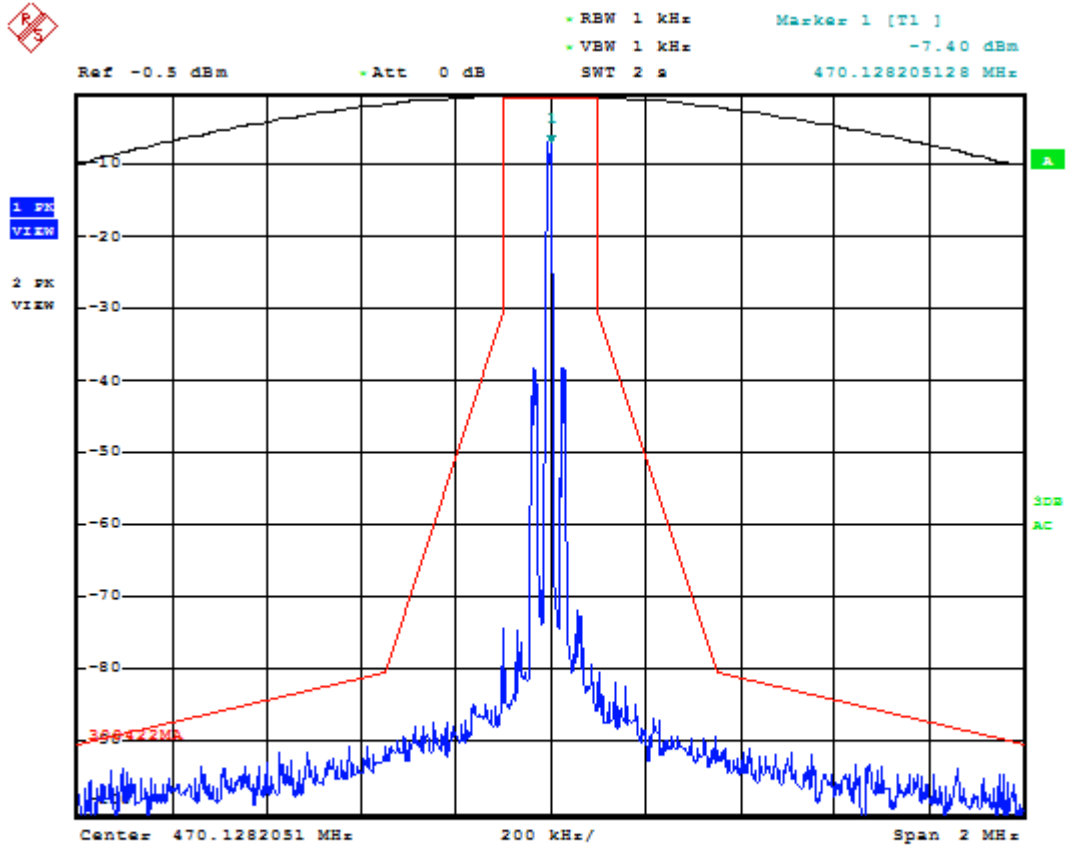


Date: 24.OCT.2017 10:38:21

**Result: Meets Requirements**

# OCCUPIED BANDWIDTH PLOT

## Test Data: Middle of Band

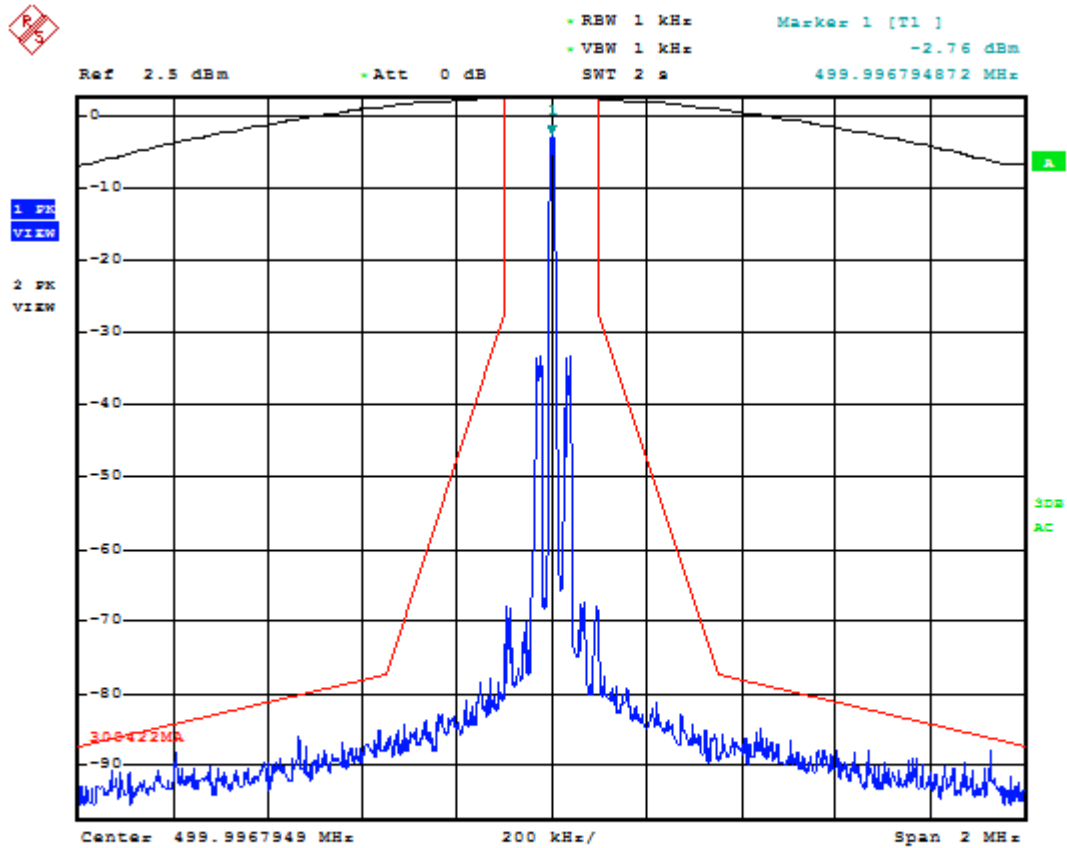


Date: 24.OCT.2017 10:40:17

**Result: Meets Requirements**

## OCCUPIED BANDWIDTH PLOT

### Test Data: High End of Band

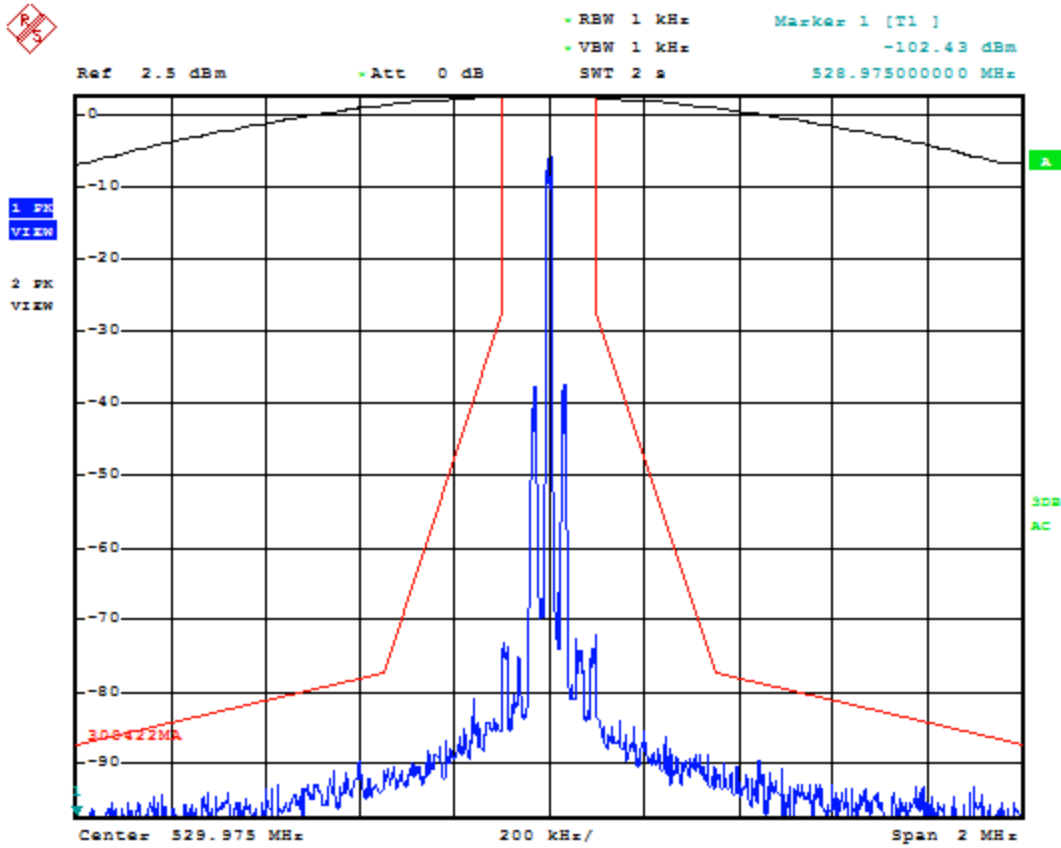

Date: 24.OCT.2017 11:00:13

**Result: Meets Requirements**

## FIELD STRENGTH OF SPURIOUS EMISSIONS

**Rules Part No.:** FCC Part 15.236 (g)


**Requirements:** Emissions outside of this band shall comply with the limits specified in section 8.4 of ETSI EN 300 422-1 V1.4.2 (2011-08).

State	Frequency		
	47 MHz to 74 MHz 87,5 MHz to 137 MHz 174 MHz to 230 MHz 470 MHz to 862 MHz	Other Frequencies below 1 000 MHz	Frequencies above 1 000 MHz
Operation	4 nW	250 nW	1 $\mu$ W
Standby	2 nW	2 nW	20 nW

**METHOD OF MEASUREMENTS:** The measuring receiver, as defined in table 4, shall be tuned over the frequency range 25 MHz to 4 GHz for equipment operating on frequencies below 1 GHz or in the frequency range of 25 MHz to 12,75 GHz for equipment operating on frequencies above 1 GHz.

Measurements were made at the test site of **Timco Engineering, Inc. located at 849 NW State Road 45, Newberry, FL 32669.**

### Test Setup Diagram :

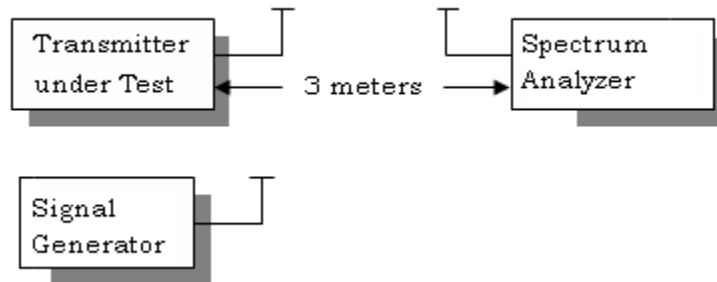

**FIELD STRENGTH OF SPURIOUS EMISSIONS**

**Test Data:**

Tuned Freq MHz	Emission Frequency MHz	Antenna Polarity	erp (dBm)	Margin
470.12	940.25	H	-57.42	33.52
470.12	940.25	V	-62.54	38.64
470.12	1235.50	V	-27.87	3.97
470.12	1375.00	H	-26.43	2.53
470.12	2475.90	V	-25.51	1.61
500	2052.80	H	-24.72	0.82
500	2471.15	V	-26.25	2.35
529.98	1240.38	V	-27.60	3.70
529.98	1322.11	H	-27.96	4.06

**Result: Meets Requirements**



## FREQUENCY STABILITY

**Rule Parts. No.:** Part 2.1055, Part 74.861

**Requirements:** Temperature and voltage tests were performed to verify that the frequency remains within the .0050%,(50 ppm)

**Method of Measurements:** ANSI/TIA 603-C: 2004.

**The test was conducted as follows:** The transmitter was placed in the temperature chamber at 25 °C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15-second intervals. The worst case number used in the table below. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -20 °C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15-second intervals. The worst-case number was again used in the table below. This procedure was repeated in 10-degree increments up to + 50 °C.

### Test Data:

Temperature	Frequency MHz	Hz	PPM
25°C (reference)	529.97403		
-30°C	529.97395	-80	-0.151
-20°C	529.97395	-80	-0.151
-10°C	529.97383	-200	-0.377
0°C	529.97392	-110	-0.208
10°C	529.97396	-70	-0.132
20°C	529.97403	0	0.000
30°C	529.97397	-60	-0.113
40°C	529.97396	-70	-0.132
50°C	529.97393	-100	-0.189
Battery Voltage	Frequency	Hz	PPM
-15%	529.97379	-240	-0.453
15%	529.97455	520	0.981

**Result: Meets Requirements**



## STATE OF THE MEASUREMENT UC

The data and results referenced in this document are true and accurate. The measurement uncertainty was calculated for all measurements listed in this test report according To CISPR 16-4 or ENTR 100-028 Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: “Uncertainty in EMC Measurements” and is documented in the Timco Engineering, Inc. quality system according to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Timco Engineering, Inc. is reported:

Test Items	Measurement Uncertainty	Notes
RF Frequency Accuracy	± 49.5 Hz	(1)
RF Conducted Power	± 0.93dB	(1)
Conducted spurious emission of transmitter valid up to 40GHz	± 1.86dB	
Occupied Bandwidth	± 2.65%	
Audio Frequency Response	± 1.86dB	
Modulation limiting	± 1.88%	
Radiated RF Power	± 1.4dB	
Maximum frequency deviation: Within 300 Hz and 6kHz of audio freq.	± 1.88%	
Within 6kHz and 25kHz of audio Freq.	± 2.04%	
Rad Emissions Sub Meth up to 26.5GHz	± 2.14dB	
Adjacent channel power	± 1.47dB	(1)
Transient Frequency Response	± 1.88%	
Temperature	± 1.0° C	(1)
Humidity	± 5.0%	

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k= 1.96.



## EMC EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
Antenna: Biconical 1096	Eaton	94455-1	1096	08/01/17	08/01/19
Antenna: Log-Periodic 1122	Electro- Metrics	LPA-25	1122	07/26/17	07/26/19
Temperature Chamber LARGE	Tenney Engineering	TTRC	11717-7	09/01/16	09/01/18
Frequency Counter	HP	5385A	2730A03025	11/08/17	11/08/18
CHAMBER	Panashield	3M	N/A	04/25/16	12/31/17
Antenna: Double- Ridged Horn/ETS Horn 2	ETS-Lindgren	3117	00041534	03/01/17	03/01/19
Software: Field Strength Program	Timco	N/A	Version 4.10.7.0	N/A	N/A
Antenna: Active Loop	ETS-Lindgren	6502	00062529		
Type K J Thermometer	Martel	303	080504494	11/06/17	11/06/19
Modulation Analyzer	HP	8901A	3050A05856	04/13/17	04/13/19
EMI Test Receiver R & S ESU 40 Chamber	Rohde & Schwarz	ESU 40	100320	04/01/16	04/01/18
Coaxial Cable - Chamber 3 cable set (Primary)	Micro-Coax	Chamber 3 cable set (Primary)	KMKM-0244- 01; KMKM- 0670-00; KFKF-0198- 01	08/09/16	08/09/18
Function Generator	Standford	DS340	25200	02/02/16	02/02/18
Bore-sight Antenna Positioning Tower	Sunol Sciences	TLT2	N/A	N/A	N/A

### \* EMI RECEIVER SOFTWARE VERSION

The receiver firmware used was version 4.43 Service Pack 3

### End of REPORT

Applicant: AUDIO-TECHNICA CORPORATION  
 FCC ID: JFZT3202DE2  
 REPORT: 1737BUT17TestReport\_Rev2

[Table of Contents](#)

Page 25 of 25