



849 NW State Road 45  
 Newberry, FL 32669 USA  
 Ph: 888.472.2424 or 352.472.5500  
 Fax: 352.472.2030  
 Email: [info@timcoengr.com](mailto:info@timcoengr.com)  
 Website: [www.timcoengr.com](http://www.timcoengr.com)

**FCC PART 15.249 & IC RSS-210 (i8) ANNEX A2.9  
 UNLICENSED INTENTIONAL RADIATOR  
 COMBINED TEST REPORT**

<b>Applicant</b>	<b>AUDIO TECHNICA CORPORATION</b>
<b>Address</b>	<b>2-46-1 NISHI-NARUSE MACHIDA TOKYO 194-8666 JAPAN</b>
<b>FCC ID</b>	JFZWS99BT
<b>IC Certification Number</b>	1752B-WS99BT
<b>Model Number</b>	ATH-WS99BT
<b>Product Description</b>	BLUETOOTH WIRELESS STEREO HEADSET
<b>FCC Standard Applied</b>	47 CFR §15.249
<b>Industry Canada Standard Applied</b>	RSS-210 Issue 8 Annex A2.9
<b>Date Sample Received</b>	3/12/2015
<b>Date Tested</b>	3/27/2015 & 4/20/2015
<b>Tested By</b>	Cory Leverett
<b>Approved By</b>	Sid Sanders
<b>Test Results</b>	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

Report Number	Version Number	Description	Issue Date
484AUT15TestReport.docx	Rev.1	Initial Issue	4/20/2015

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL  
 WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**

## Table of Contents

GENERAL REMARKS .....	7
GENERAL INFORMATION.....	8
TEST RESULTS SUMMARY .....	8
TEST PROCEDURES.....	9
RADIATION INTERFERENCE.....	10
20 dB BANDWIDTH AND BANDEDGE .....	12
99% BANDWIDTH AND BANDEDGE .....	14
ADJACENT RESTRICTED BAND .....	16
DUTY CYCLE .....	17
POWER LINE CONDUCTED INTERFERENCE .....	18
EMC EQUIPMENT LIST .....	21

APPLICANT: AUDIO TECHNICA CORPORATION

IC: 1752B-WS99BT

FCC ID: JFZWS99BT

REPORT: A\AUDIO TECHNICA\_JFZ\484AUT15\484AUT15TestReport.docx Page 6 of 21

## GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

### Summary

The device under test does:

- fulfill the general approval requirements as identified in this test report  
 not fulfill the general approval requirements as identified in this test report

### Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025: 2005 requirements.

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.  
849 NW State Road 45  
Newberry, FL 32669

**Authorized Signatory Name:**

**Cory Leverett**  
**Project Manager**

**Date:** 4/20/2015



[Table of Contents](#)

APPLICANT: AUDIO TECHNICA CORPORATION

IC: 1752B-WS99BT

FCC ID: JFZWS99BT

REPORT: A\AUDIO TECHNICA\_JFZ\484AUT15\484AUT15TestReport.docx Page 7 of 21

## GENERAL INFORMATION

### EUT Specification

The test results relate only to the items tested.			
<b>Applicable Standards</b>	FCC Part 15.249 & IC RSS-210 (i8), RSS-GEN (i4)		
<b>EUT Description</b>	BLUETOOTH WIRELESS STEREO HEADSET		
<b>FCC ID</b>	JFZWS99BT		
<b>IC Certification Number</b>	1752B-WS99BT		
<b>Model Number</b>	ATH-WS99BT		
<b>Operating Frequency</b>	TX: 2402 - 2480 MHz	RX: Same	
<b>No. of Channels</b>	40	<b>Modulations</b>	GFSK
<b>EUT Power Source</b>	<input type="checkbox"/> 110–120Vac/50– 60Hz when Charging		
	<input type="checkbox"/> DC Power		
	<input checked="" type="checkbox"/> Battery Operated Exclusively		
<b>Test Item</b>	<input type="checkbox"/> Prototype	<input checked="" type="checkbox"/> Pre-Production	<input type="checkbox"/> Production
<b>Type of Equipment</b>	<input type="checkbox"/> Fixed	<input type="checkbox"/> Mobile	<input checked="" type="checkbox"/> Portable
<b>Antenna Connector</b>	FCC Rules part 15.203 requires that the antenna connector be unique. There is no antenna connector, it has an integrated PCB antenna		
<b>Test Facility</b>	Timco Engineering Inc. located at 849 NW State Road 45 Newberry, FL 32669 USA.		
<b>Conditions in the Test laboratory</b>	Temperature: 24-26°C Relative humidity: 50-65%		
<b>Test Exercise</b>	Configured with Blue tooth test software.		
<b>Revision History of EUT</b>	None		

### TEST RESULTS SUMMARY

FCC Rules Part No.	Industry Canada Rules	RESULTS – Pass/Fail/NA
15.249 Fundamental Emission	RSS-210 (i8) ANNEX A2.9, RSS-GEN (i4)	Pass
15.249 & 15.209 Harmonics & Spurious	RSS-210 (i8) ANNEX A2.9, RSS-GEN (i4)	Pass
15.205 & 2.202 Occupied Bandwidth	RSS-GEN (i4), 6.6	Pass
15.249 & 15.205 Bandedge Compliance	RSS-GEN (i4), 6.6	Pass
15.207 Power Line Emissions	RSS-GEN (i4), 8.8	Pass

[Table of Contents](#)

APPLICANT: AUDIO TECHNICA CORPORATION

IC: 1752B-WS99BT

FCC ID: JFZWS99BT

REPORT: A\AUDIO TECHNICA\_JFZ\484AUT15\484AUT15TestReport.docx Page 8 of 21

## TEST PROCEDURES

**Radiation Interference:** ANSI C63.4-2003 using a spectrum analyzer, a preselector, a quasi-peak adapter, and an appropriate antenna. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz with an appropriate sweep speed and the video bandwidth was 300 kHz up to 1 GHz and 1 MHz with a video BW of 3 MHz above 1 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worst case emissions were reported. The spectrum was searched to at least the tenth (10) harmonic of the fundamental. Emissions were scanned from 30MHz to the tenth harmonic of the fundamental frequency at three places in the band. All emissions greater than 20 dB from the limit are not reported.

**Formula Of Conversion Factors:** The field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the preselector was accounted for in the spectrum analyzer meter reading.

Example:

Freq (MHz)	Meter Reading	+ ACF	+ CL	= FS
33	20 dBuV	+ 10.36 dB	+ 0.5	= 30.86 dBuV/m @ 3m

**Power Line Conducted Interference:** The procedure used was ANSI C63.4-2003 using a 50uH LISN. Both lines were observed. The bandwidth of the spectrum analyzer was 10kHz with an appropriate sweep speed. The spectrum was scanned from 0.15 to 30 MHz.

**Occupied Bandwidth:** A small sample of the transmitter output was fed into the spectrum analyzer and the attached plot was printed. The vertical scale is set to -10 dBm per division.

**ANSI C63.4-2003 10.1 Measurement Procedures:** The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes. Emissions attenuated more than 20 dB below the permissible value are not reported.

[Table of Contents](#)

## RADIATION INTERFERENCE

**Rules Part No.:** FCC 15.249, 15.209 & IC RSS-210 (i8) ANNEX A2.9, RSS-GEN (i4)

**Requirements:**

Frequency	Limits
Part 15.209 & RSS-GEN (i4)	
9 to 490 kHz	2400/F (kHz) $\mu\text{V/m}$ @ 300 meters
490 to 1705 kHz	24000/F (kHz) $\mu\text{V/m}$ @ 30 meters
1705 kHz to 30 MHz	29.54 dB $\mu\text{V/m}$ @ 30 meters
30 – 88	40.0 dB $\mu\text{V/m}$ @ 3 meters
80 – 216	43.5 dB $\mu\text{V/m}$ @ 3 meters
216 – 960	46.0 dB $\mu\text{V/m}$ @ 3 meters
Above 960	54.0 dB $\mu\text{V/m}$ @ 3 meters
Part 15.249 & RSS-210 (i8) ANNEX A.2.9	
Fundamental 902 – 928 MHz	94.0 dB $\mu\text{V/m}$ @ 3 meters
Fundamental 2.4 – 2.4835 GHz	94.0 dB $\mu\text{V/m}$ @ 3 meters
Harmonics	54.0 dB $\mu\text{V/m}$ @ 3 meters

**Test Data:** Peak Detector Used for all Measurement's unless otherwise noted in table.

APPLICANT: AUDIO TECHNICA CORPORATION

IC: 1752B-WS99BT

FCC ID: JFZWS99BT

REPORT: A\AUDIO TECHNICA\_JFZ\484AUT15\484AUT15TestReport.docx Page 10 of 21

## RADIATION INTERFERENCE

**Test Data:** Peak Detector Used for all Measurement's unless otherwise noted in table.

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity	Coax Loss dB	Correction Factor dB/m	Field Strength dBuV/m	Margin dB
2,402.0	2,314.10	5.5	V	3.12	31.97	40.60	13.40
2,402.0	2,376.02	14.3	H	3.16	32.09	49.53	4.47
2,402.0	2,402.00	57.2(AV)	H	3.18	32.15	92.49	1.51
2,402.0	2,402.00	69.4	H	3.18	32.15	104.74	9.26
2,402.0	2,490.21	9.1	V	3.24	32.32	44.66	9.34
2,402.0	2,494.65	9.9	H	3.25	32.33	45.51	8.49
2,402.0	4,804.00	4.3	V	4.90	34.13	43.30	10.70
2,402.0	4,804.00	5.1	H	4.90	34.13	44.15	9.85
2,402.0	7,206.00	7.2	H	5.72	36.07	48.98	5.02
2,402.0	7,206.00	7.4	V	5.72	36.07	49.19	4.81
2,441.0	2,336.79	6.8	V	3.14	32.02	41.99	12.01
2,441.0	2,336.79	7.7	H	3.14	32.02	42.86	11.14
2,441.0	2,441.00	57.8(AV)	H	3.21	32.22	93.26	0.74
2,441.0	2,441.00	67.8	H	3.21	32.22	103.22	10.78
2,441.0	2,492.64	11.4	H	3.24	32.33	46.93	7.07
2,441.0	2,493.15	9.3	V	3.25	32.33	44.92	9.08
2,441.0	4,882.00	5.3	V	4.94	34.14	44.40	9.60
2,441.0	4,882.00	5.7	H	4.94	34.14	44.80	9.20
2,441.0	7,323.00	5.5	V	5.79	36.01	47.30	6.70
2,441.0	7,323.00	6.1	H	5.79	36.01	47.93	6.07
2,480.0	24.32	19.3	V	0.15	12.44	31.88	8.12
2,480.0	27.93	14.3	V	0.16	12.48	26.97	13.03
2,480.0	51.74	14.3	V	0.34	10.44	25.10	14.90
2,480.0	55.35	20.0	V	0.36	9.07	29.42	10.58
2,480.0	56.43	23.3	V	0.36	8.66	32.32	7.68
2,480.0	64.00	23.5	V	0.40	6.34	30.22	9.78
2,480.0	76.27	18.6	V	0.47	7.26	26.33	13.67
2,480.0	836.47	10.1	V	2.04	22.43	34.56	11.44
2,480.0	2,376.02	3.1	V	3.16	32.09	38.38	15.62
2,480.0	2,376.02	9.4	V	3.16	32.09	44.60	9.40
2,480.0	2,376.15	5.4	H	3.16	32.09	40.65	13.35
2,480.0	2,376.15	10.1	H	3.16	32.09	45.32	8.68
2,480.0	2,480.00	57.8(AV)	H	3.24	32.30	93.36	0.64
2,480.0	2,480.00	71.6	H	3.24	32.30	107.09	6.91
2,480.0	2,483.52	13.9(AV)	V	3.24	32.31	49.46	4.54
2,480.0	2,483.52	15.7(AV)	H	3.24	32.31	51.27	2.73
2,480.0	2,483.52	18.7	V	3.24	32.31	54.20	19.80
2,480.0	2,483.52	22.9	H	3.24	32.31	58.47	15.53
2,480.0	4,960.00	7.9	H	4.98	34.16	47.04	6.96
2,480.0	4,960.00	8.5	V	4.98	34.16	47.66	6.34
2,480.0	7,440.00	3.7	H	5.86	35.96	45.50	8.50
2,480.0	7,440.00	6.5	V	5.86	35.96	48.36	5.64

[Table of Contents](#)

APPLICANT: AUDIO TECHNICA CORPORATION

IC: 1752B-WS99BT

FCC ID: JFZWS99BT

REPORT: A\AUDIO TECHNICA\_JFZ\484AUT15\484AUT15TestReport.docx Page 11 of 21


## 20 dB BANDWIDTH AND BANDEDGE

Rules Part No.: 15.249 (d)

**Requirements:** The field strength of any emissions appearing outside the bandedges and up to 10 kHz above and below the band edges shall be attenuated at least 50 dB below the level of the carrier or to the general limits of 15.249.

### Test Data: Low End of Band

20 dB OCC BW = 1.29 MHz  
 Lower Band Edge = 52.51 dBc

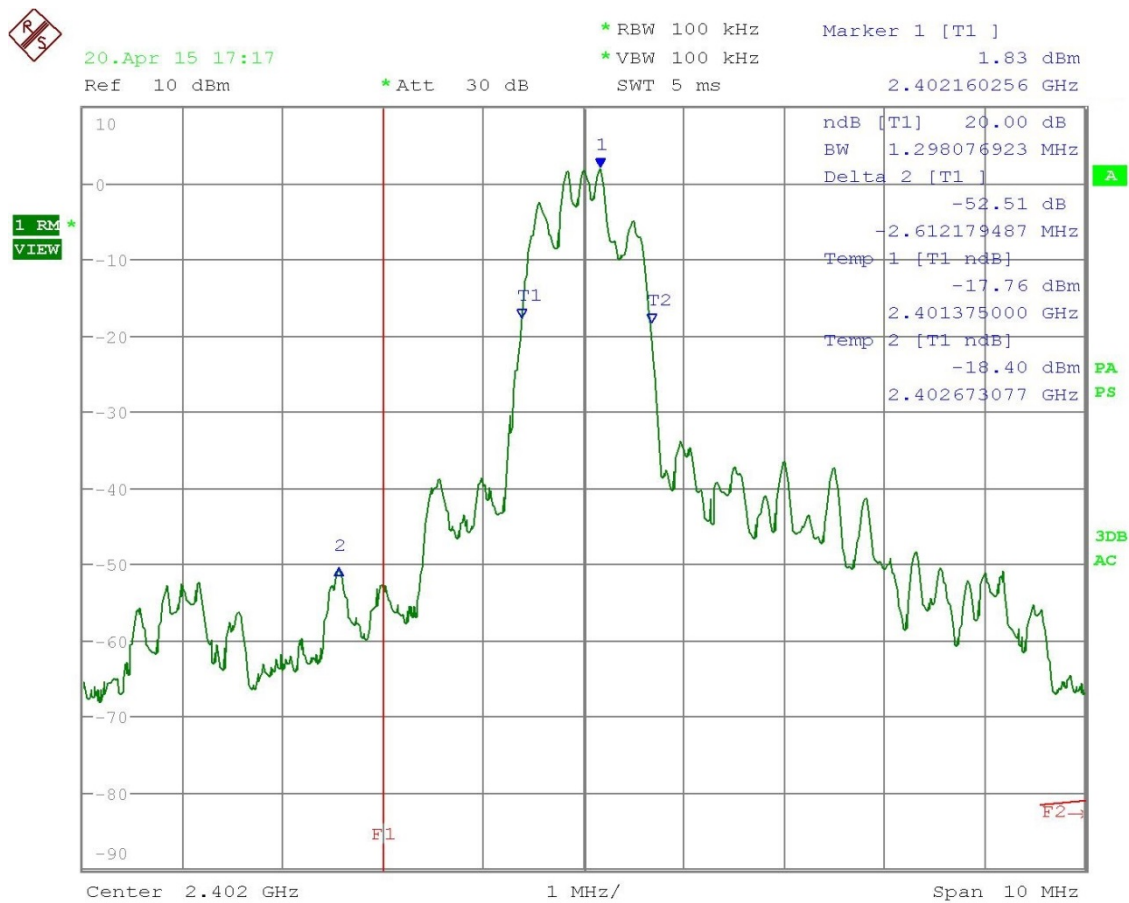

Date: 20.APR.2015 17:17:03


[Table of Contents](#)



## 20 dB BANDWIDTH AND BANDEDGE

### Test Data: High End of Band

20 dB OCC BW = 1.29 MHz  
 Upper Band Edge = 52.35 dBc

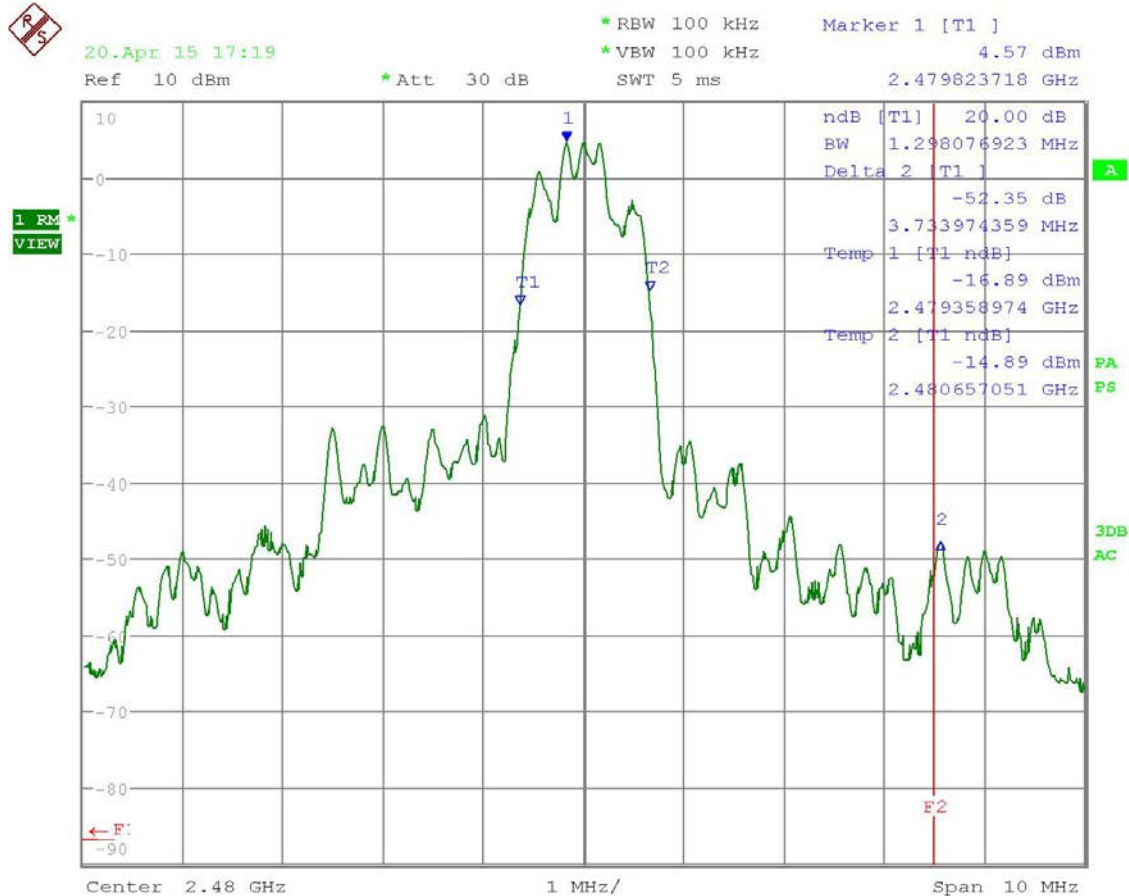

Date: 20.APR.2015 17:19:23

[Table of Contents](#)

## 99% BANDWIDTH AND BANDEGE


Rules Part No.: RSS-GEN (i4), 6.6

**Requirements:** . Emissions radiated outside of the specified frequency bands, except for the harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the highest general field strength limits listed in RSS-GEN, whichever is less stringent.

### Test Data: Low End of Band

99% OCC BW Low End = 1.16 MHz

Lower Band Edge = 52.51 dBc

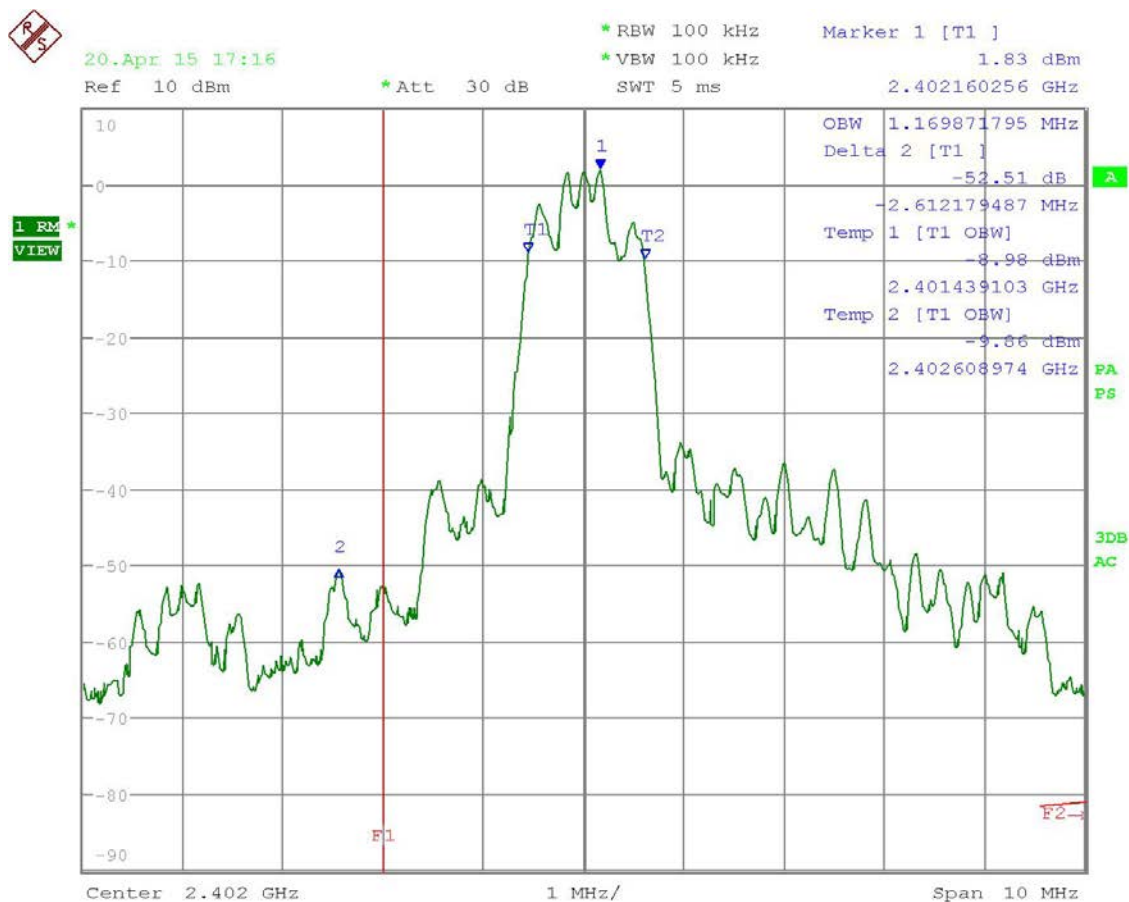

Date: 20.APR.2015 17:16:10

[Table of Contents](#)

APPLICANT: AUDIO TECHNICA CORPORATION

IC: 1752B-WS99BT


FCC ID: JFZWS99BT

REPORT: A\AUDIO TECHNICA\_JFZ\484AUT15\484AUT15TestReport.docx Page 14 of 21

# 99% BANDWIDTH AND BANDEDGE

## Test Data: High End of Band

99% OCC BW High End = 1.16 MHz  
 Upper Band Edge Emission = 52.35 dBc

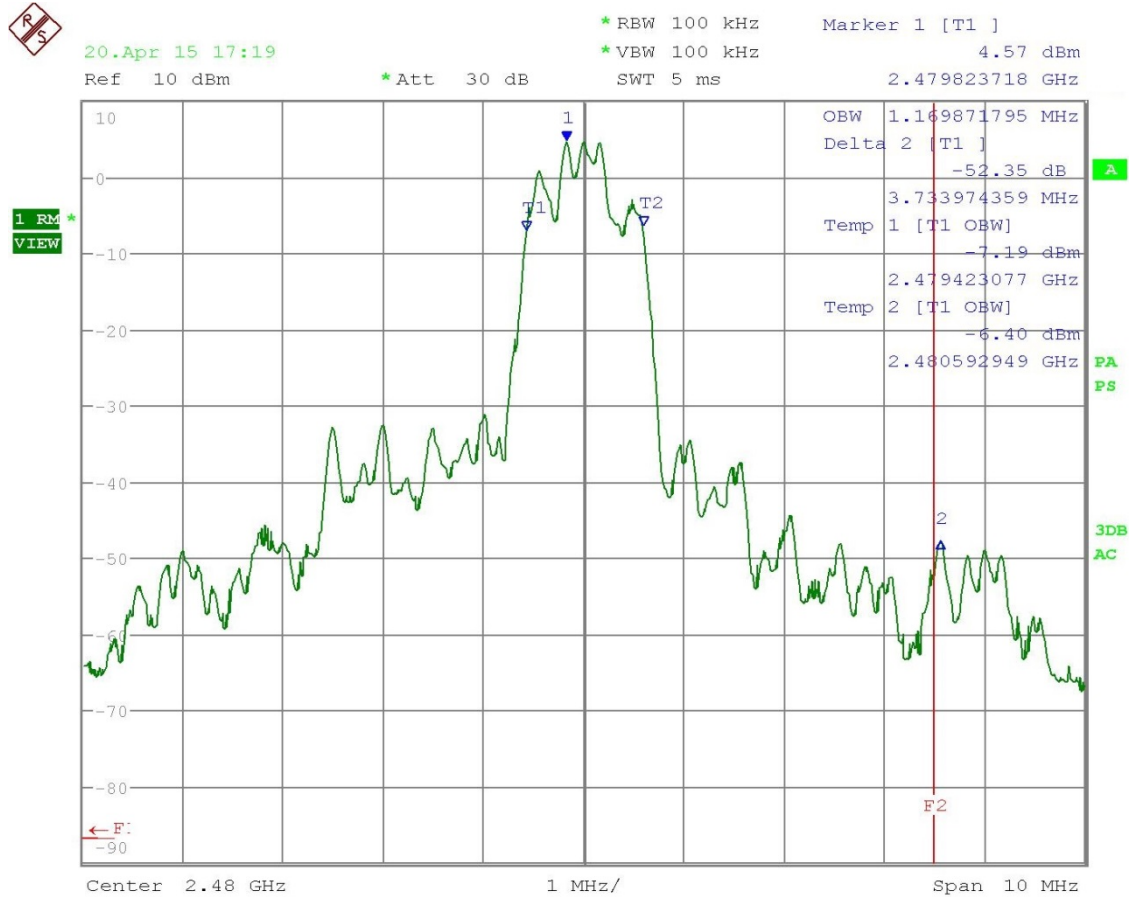

Date: 20.APR.2015 17:19:56

[Table of Contents](#)


### ADJACENT RESTRICTED BAND

Rules Part No.: 15.249 (d), & RSS-GEN (i4), 6.6

Requirements: 50 dBc or in the case of restricted bands 54 dBuV/m.

Test Data: Field Strength calculation: (Fund FS) 93.36dBuV/m-(MD)54.06dB= 39.3dBuV/m

	Delta 1 [T1]	RBW	100 kHz	RF Att	20 dB
	Ref Lvl	-54.06 dB	VBW	100 kHz	
	112 dBuV	4.00801603 MHz	SWT	5 ms	Unit dBuV

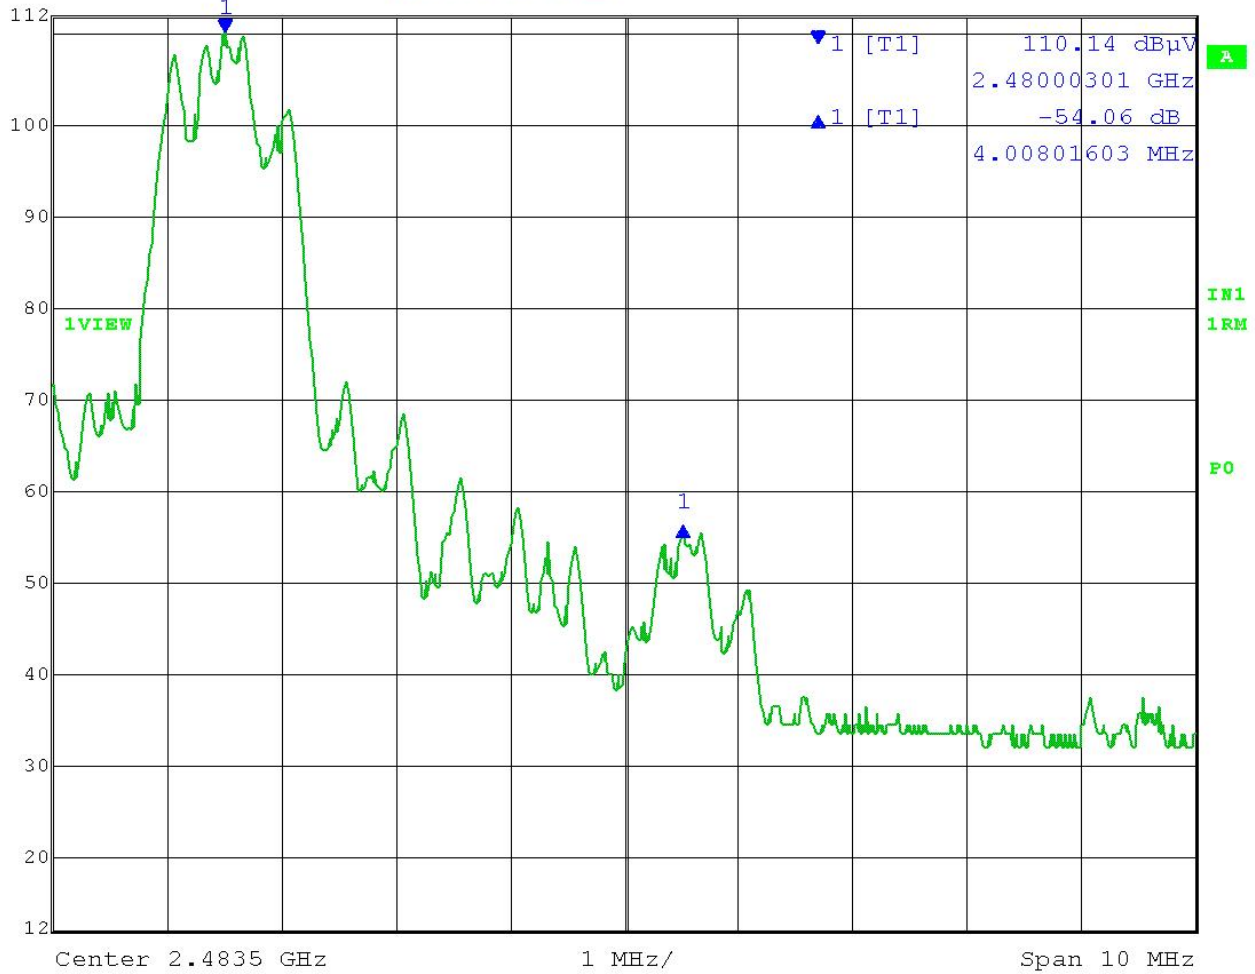

Date: 8.APR.2015 13:42:47

## DUTY CYCLE

**NOT APPLICABLE TESTED AT 100% DUTY CYCLE**

**Total # of pulses:**

**Duration of pulse:**

[Table of Contents](#)

APPLICANT: AUDIO TECHNICA CORPORATION

IC: 1752B-WS99BT

FCC ID: JFZWS99BT

REPORT: A\AUDIO TECHNICA\_JFZ\484AUT15\484AUT15TestReport.docx Page 17 of 21

## POWER LINE CONDUCTED INTERFERENCE

Rules Part No.: 15.207, & RSS-GEN (i4), 8.8

### Requirements:

Frequency (MHz)	Quasi Peak Limits (dBuv)	Average Limits (dBuV)
0.15 – 0.5	66 – 56	56 – 46
0.5 – 5.0	56	46
5.0 – 30	60	50

**Test Data:** The attached graphs represent the emissions read for power line conducted for this device while charging the battery. Both lines were observed.

[Table of Contents](#)

APPLICANT: AUDIO TECHNICA CORPORATION

IC: 1752B-WS99BT


FCC ID: JFZWS99BT

REPORT: A\AUDIO TECHNICA\_JFZ\484AUT15\484AUT15TestReport.docx Page 18 of 21

### Line 1 Quasi Peak and Average



Att 10 dB      Marker 1 [T1]      Det      MA Trd  
 INPUT 2      150.00000000 kHz      ResBW 9 kHz  
 Meas T      1 ms Unit      dBµV

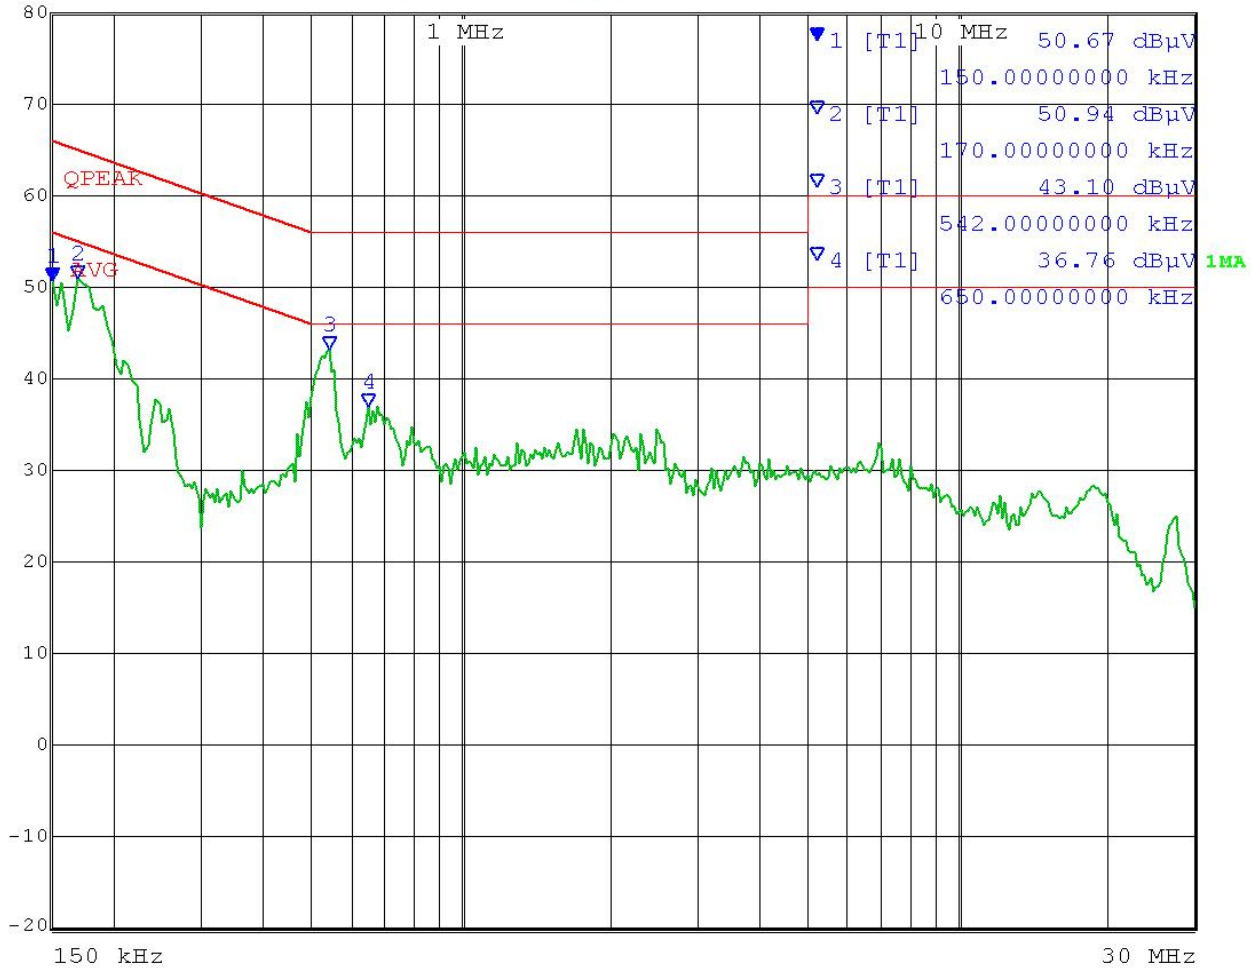


Date: 27.MAR.2015 14:27:36

[Table of Contents](#)

### Line 2 Quasi Peak and Average



Att 10 dB      Marker 1 [T1]      Det      MA Trd  
 INPUT 2      49.62 dBµV      ResBW      9 kHz  
 150.00000000 kHz      Meas T      1 ms Unit      dBµV

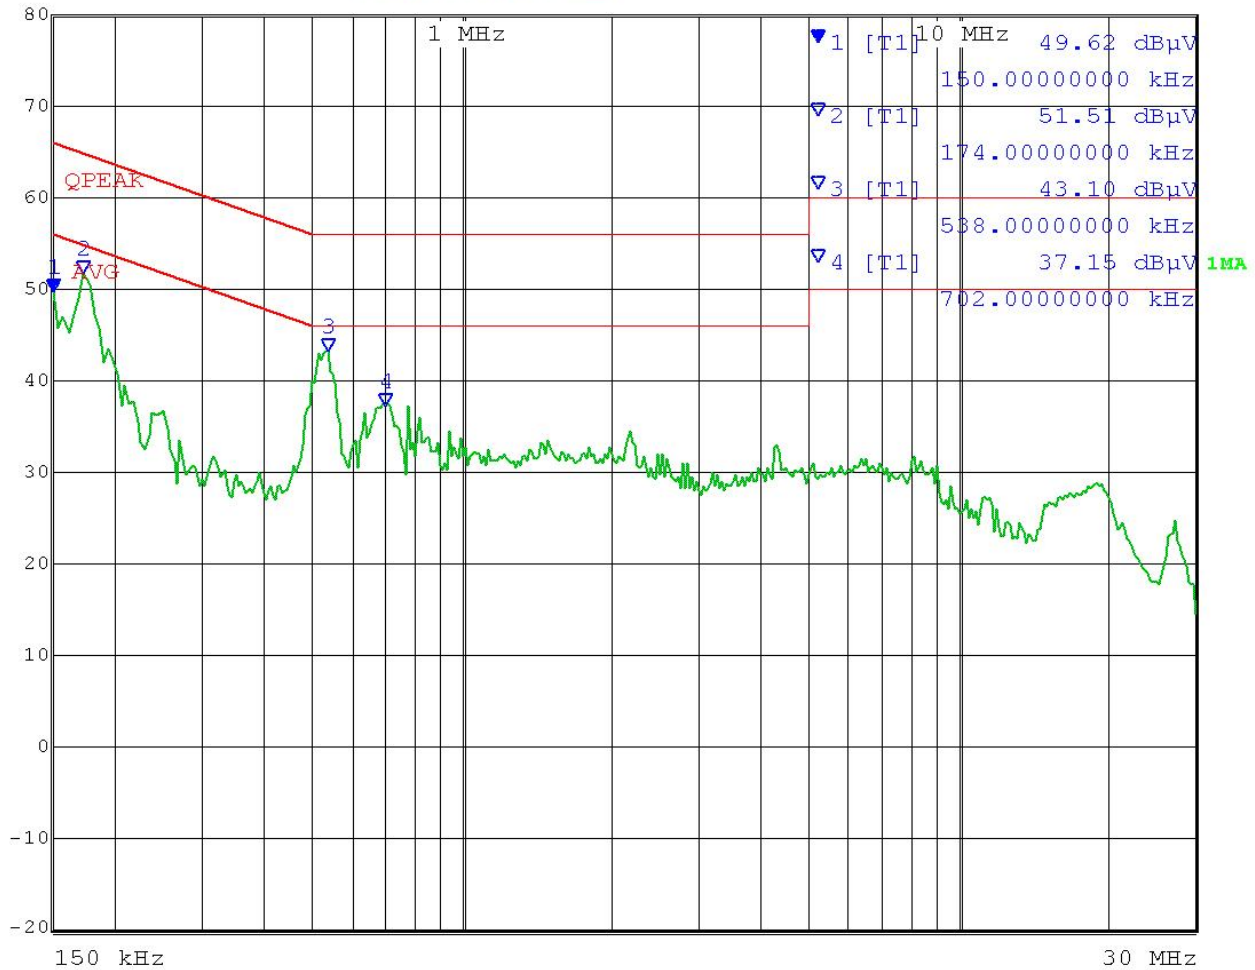

Date: 27.MAR.2015 14:38:14

[Table of Contents](#)

APPLICANT: AUDIO TECHNICA CORPORATION

IC: 1752B-WS99BT

FCC ID: JFZWS99BT

REPORT: A\AUDIO TECHNICA\_JFZ\484AUT15\484AUT15TestReport.docx Page 20 of 21



## EMC EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
Antenna: Biconnical Chamber	Eaton Chamber	94455-1	1057	06/14/13	06/14/15
Antenna: Log-Periodic Chamber	Eaton	96005	1243	05/31/13	05/31/15
Antenna: Passive Loop	EMC Test Systems	EMCO 6512	9706-1211	06/14/12	06/14/15
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	12/31/13	12/31/15
Ant: Double-Ridged Horn/ETS Horn 1 Ch	ETS-Lindgren Chamber	3117	00035923	06/13/14	06/13/16
EMI Test Receiver R & S ESIB 40 Screen Room	Rohde & Schwarz	ESIB 40	100274	08/12/14	08/12/16
EMI Test Receiver R & S ESU 40 Chamber	Rohde & Schwarz	ESU 40	100320	03/11/14	03/11/16

### \*EMI RECEIVER SOFTWARE VERSION

The receiver firmware used was version 4.43 Service Pack 3

[Table of Contents](#)

APPLICANT: AUDIO TECHNICA CORPORATION

IC: 1752B-WS99BT

FCC ID: JFZWS99BT

REPORT: A\AUDIO TECHNICA\_JFZ\484AUT15\484AUT15TestReport.docx Page 21 of 21