

### Hong Kong Standards and Testing Centre

No.: HM151222

Applicant: Perfect Toys International Co., Ltd

Description of Samples: Model name: Sport-3

Model no.: 30113

Brand name: Smartech
FCC ID: JHP30113-TX

Date Samples Received: 2003-10-11

**Date Tested:** 2004-05-28

Investigation Requested: FCC Part 15 Subpart C

Conclusions: The submitted product <u>COMPLIED</u> with the

requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on

Section 2.2 in this Test Report.

Remarks: ----

K C Lee, EMC for Chief Executive

This report shall not be reproduced unless with prior written approval from the Hong Kong Standards and Testing Centre.



### Hong Kong Standards and Testing Centre

No.: HM151222

## CONTENT:

	Cover Content	Page 1 of 31 Page 2-3 of 31
<u>1.0</u>	General Details	
1.1	Test Laboratory	Page 4 of 31
1.2	Applicant Details Applicant HKSTC Code Number for Applicant Manufacturer	Page 4 of 31
1.3	Equipment Under Test [EUT] Description of EUT operation	Page 5 of 31
1.4	Date of Order	Page 5 of 31
1.5	Submitted Samples	Page 5 of 31
1.6	Test Duration	Page 5 of 31
1.7	Country of Origin	Page 5 of 31
1.8	Additional Information of EUT	Page 6 of 31
2.0	Technical Details	
2.1	Investigations Requested	Page 7 of 31
2.2	Test Standards and Results Summary	Page 7 of 31
<u>3.0</u>	Test Results	
3.1	Emission	Page 8-15 of 31
3.2	Bandwidth Measurement	Page 16-19 of 31



### Hong Kong Standards and Testing Centre

Date : 2004-06-10 **TEST REPORT** Page 3 of 3

No.: HM151222

Appendix A

List of Measurement Equipment Page 20 of 31

**Appendix B** 

Duty Cycle Correction During 100 msec Page 21-29 of 31

**Appendix C** 

Photographs Page 30-31 of 31



### Hong Kong Standards and Testing Centre

No.: HM151222

### 1.0 General Details

#### 1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd. EMC Laboratory 10 Dai Wang Street, Taipo Industrial Estate New Territories, Hong Kong

Telephone: 852 2666 1888 Fax: 852 2664 4353

# 1.2 Applicant Details Applicant

Perfect Toys International Co., Ltd. 2/F., Block 3, Wah Lai Industrial Centre, 10-14 Kwei Tei Street, Fo Tan, Shatin, New Territireies, Hong Kong

**HKSTC Code Number for Applicant** 

PET004

#### Manufacturer

Dong Guan Xian Hao Electric Appliances & Toys Co., Ltd. Tian Xin Mangement Zone, Huang Jiang Town, Dong Guan, Guang Dong, China



### Hong Kong Standards and Testing Centre

No.: HM151222

# 1.3 Equipment Under Test [EUT] Description of Sample

Model Name: Sport-3

Manufacturer: Dong Guan Xian Hao Electric Appliances & Toys Co., Ltd

Brand Name: Smartech Model Number: 30113

Input Voltage: 12Vd.c ("AA" size battery x 8)

#### 1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is a Perfect Toys International Co., Ltd., Sport-3. The transmitter is a 2 button transmitter. The EUT continues to transmit while button is being pressed, Modulation by IC. and type is pulse modulation.

#### 1.4 Date of Order

2003-10-11

#### 1.5 Submitted Sample(s):

10 Samples

#### 1.6 Test Duration

2004-05-28

#### 1.7 Country of Origin

China



Hong Kong Standards and Testing Centre

No.: HM151222

### 1.8 Additional Information of EUT

	Submitted	NOT Available
User Manual		
Part List		
Circuit Diagram		
Printed Circuit Board [PCB] Layout		
Block diagram	$\boxtimes$	
FCC ID Label	$\boxtimes$	

#### 香港新界大埔工業村大宏街 10 號



#### 香 港 檢 定 **Standards** Hong Kong and **Testing**

Page 7 of 7

**TEST REPORT** 

Date: 2004-06-10 No.: HM151222

#### 2.0 **Technical Details**

#### 2.1 **Investigations Requested**

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15 and ANSI C63.4:2003 for FCC Certification.

#### 2.2 **Test Standards and Results Summary Tables**

EMISSION Results Summary						
Test Condition	Test Requirement	Test Method	Class /	Te	est Result	į
			Severity	Pass	Failed	N/A
Field Strength of Fundamental Emissions & Spurious Emissions	FCC 47CFR 15.227	ANSI C63.4:2003	N/A	$\boxtimes$		
Radiated Emissions, 30MHz to 1GHz	FCC 47CFR 15.209	ANSI C63.4:2003	Class B	$\boxtimes$		
Conducted Emissions on AC, 0.15MHz to 30MHz	FCC 47CFR 15.207	ANSI C63.4:2003	Class B			

Note: N/A - Not Applicable



### Hong Kong Standards and Testing Centre

Date : 2004-06-10 **TEST REPORT** Page 8 of 8

No.: HM151222

### 3.0 Test Results

#### 3.1 Emission

#### 3.1.1 Radiated Emissions (30 – 1000MHz)


Test Requirement: FCC 47CFR 15.227
Test Method: ANSI C63.4:2003
Test Date: 2004-05-28
Mode of Operation: On mode

#### **Test Method:**

The sample was placed 0.8m above the ground plane on the OATS \*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

\*: OATS [Open Area Test Site] located at HKSTC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 90657.

#### **Test Setup:**

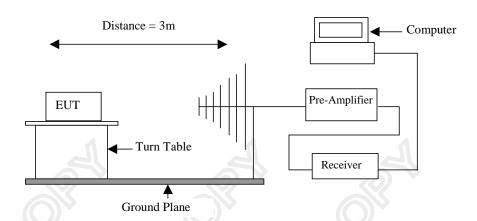



### Hong Kong Standards and Testing Centre

No.: HM151222

#### Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.227]:

Frequency Range of	Field Strength of	Field Strength of
Fundamental	Fundamental Emission	Fundamental Emission
	[Peak]	[Average]
[MHz]	[µV/m]	[μV/m]
26.96-27.28	100,000	10,000

#### Results:

	F	ield Strength	of Fundame Peak Value	ental Emissio	ns	
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field
	Level @3m	Factor	Strength	Strength		Polarity
MHz	dBµV/m	dBµV/m	dBµV/m	μV/m	μV/m	
26.98	40.80	21.9	62.7	1,364.6	100,000	Vertical

Field Strength of Fundamental Emissions							
	Average						
Frequency	Measured	Adjusted by	Correction	Field	Field	Limit @3m	E-Field
	Level @3m	Duty Cycle	Factor	Strength	Strength		Polarity
MHz	dBµV/m	dB	dBµV/m	dBµV/m	μV/m	μV/m	
26.98	40.0	-0.8	21.9	61.9	1,244.5	10,000	Vertical

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

#### Remarks:

Correction Factor included Antenna Factor and Cable Attenuation.



### Hong Kong Standards and Testing Centre

No.: HM151222

### Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Frequency Range [MHz]	Quasi-Peak Limits [μV/m]
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasipeak detector and above 1000MHz are based on measurements employing an average detector.

#### Results:

	Radiated Emissions						
			Quasi-Peal	k			
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field	
	Level @3m	Factor	Strength	Strength		Polarity	
MHz	dBµV/m	dBµV/m	dBµV/m	μV/m	μV/m		
53.95	17.4	10.1	27.5	23.7	100	Vertical	
80.93	24.8	9.5	34.3	51.9	100	Vertical	
107.90	27.0	10.7	37.7	76.7	150	Vertical	
134.88	19.1	10.2	29.3	29.2	200	Vertical	
161.85	13.6	11.9	25.5	18.8	200	Vertical	
188.83	< 1.0	17.2	< 18.2	< 8.1	200	Vertical	
215.80	< 1.0	18.8	< 19.8	< 9.8	200	Vertical	
242.78	< 1.0	19.7	< 20.7	< 10.8	200	Vertical	
269.75	< 1.0	20.6	< 21.6	< 12.0	200	Vertical	

Remarks:

Correction Factor included Antenna Factor and Cable Attenuation.



### Hong Kong Standards and Testing Centre

No.: HM151222

### Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.227]:

Eroguenay Pango of	Field Strength of	Field Strength of
Frequency Range of		Ÿ.
Fundamental	Fundamental Emission	Fundamental Emission
	[Peak]	[Average]
[MHz]	[μV/m]	[μV/m]
26.96-27.28	100,000	10,000

#### Results:

	F	ield Strength	of Fundame Peak Value	ental Emissio	ns	
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field
	Level @3m	Factor	Strength	Strength	4	Polarity
MHz	dBµV/m	dBµV/m	dBµV/m	μV/m	μV/m	
27.15	42.40	21.9	64.3	1,640.6	100,000	Vertical

Field Strength of Fundamental Emissions Average							
Frequency	Measured	Adjusted by	Correction	Field	Field	Limit @3m	E-Field
	Level @3m	<b>Duty Cycle</b>	Factor	Strength	Strength		Polarity
MHz	dBµV/m	dB	dBµV/m	dBµV/m	μV/m	μV/m	
27.15	41.8	-0.6	21.9	63.7	1,531.1	10,000	Vertical

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Remarks:

Correction Factor included Antenna Factor and Cable Attenuation.



### Hong Kong Standards and Testing Centre

Date : 2004-06-10 **TEST REPORT** Page 12 of 12

No.: HM151222

### Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Frequency Range [MHz]	Quasi-Peak Limits [μV/m]		
30-88	100		
88-216	150		
216-960	200		
Above960	500		

The emission limits shown in the above table are based on measurement employing a CISPR quasipeak detector and above 1000MHz are based on measurements employing an average detector.

#### Results:

	Radiated Emissions							
	Quasi-Peak							
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field		
	Level @3m	Factor	Strength	Strength		Polarity		
MHz	dBµV/m	dBµV/m	dBµV/m	μV/m	μV/m			
54.29	20.4	10.1	30.5	33.5	100	Vertical		
81.44	19.6	9.5	29.1	28.5	100	Vertical		
108.58	22.2	10.7	32.9	44.2	150	Vertical		
135.73	25.7	10.2	35.9	62.4	200	Horizontall		
162.87	24.1	11.9	36.0	63.1	200	Vertical		
190.02	< 1.0	17.2	< 18.2	< 8.1	200	Vertical		
217.16	< 1.0	18.8	< 19.8	< 9.8	200	Vertical		
244.31	< 1.0	19.7	< 20.7	< 10.8	200	Vertical		
271.45	< 1.0	20.6	< 21.6	< 12.0	200	Vertical		

Remarks:

Correction Factor included Antenna Factor and Cable Attenuation.



### Hong Kong Standards and Testing Centre

Date : 2004-06-10 **TEST REPORT** Page 13 of 13

No.: HM151222

### Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.227]:

Frequency Range of	Field Strength of	Field Strength of
Fundamental	Fundamental Emission	Fundamental Emission
	[Peak]	[Average]
[MHz]	[μV/m]	[µV/m]
26.96-27.28	100,000	10,000

#### Results:

Field Strength of Fundamental Emissions							
			Peak Value	•			
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field	
	Level @3m Factor Strength Strength Polarity						
MHz	dBµV/m	dBµV/m	dBµV/m	μV/m	μV/m		
27.26	40.50	21.9	62.4	1,318.3	100,000	Vertical	

Field Strength of Fundamental Emissions Average							
Frequency	Measured	Adjusted by	Correction	Field	Field	Limit @3m	E-Field
	Level @3m	<b>Duty Cycle</b>	Factor	Strength	Strength		Polarity
MHz	dBµV/m	dB	dBµV/m	dBµV/m	μV/m	μV/m	
27.26	39.4	-1.1	21.9	61.3	1,161.4	10,000	Vertical

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

#### Remarks:

Correction Factor included Antenna Factor and Cable Attenuation.



### Hong Kong Standards and Testing Centre

Date : 2004-06-10 **TEST REPORT** Page 14 of 14

No.: HM151222

### Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Frequency Range [MHz]	Quasi-Peak Limits [μV/m]
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasipeak detector and above 1000MHz are based on measurements employing an average detector.

#### Results:

	Radiated Emissions							
	Quasi-Peak							
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field		
	Level @3m	Factor	Strength	Strength		Polarity		
MHz	dBµV/m	dBµV/m	dBµV/m	μV/m	μV/m			
54.51	13.2	10.1	23.3	14.6	100	Vertical		
81.77	19.8	9.5	29.3	29.2	100	Vertical		
109.02	23.4	10.7	34.1	50.7	150	Vertical		
136.28	11.8	10.2	22.0	12.6	200	Vertical		
163.53	< 1.0	11.9	< 12.9	< 4.4	200	Vertical		
190.79	< 1.0	17.2	< 18.2	< 8.1	200	Vertical		
218.04	< 1.0	18.8	< 19.8	< 9.8	200	Vertical		
245.30	< 1.0	19.7	< 20.7	< 10.8	200	Vertical		
272.55	< 1.0	20.6	< 21.6	< 12.0	200	Vertical		

Remarks:

Correction Factor included Antenna Factor and Cable Attenuation.



Hong Kong Standards and Testing Centre

Date : 2004-06-10 **TEST REPORT** Page 15 of 15

No.: HM151222

### 3.1.1 Conducted Emissions (0.15MHz to 30MHz)

Test Requirement: FCC 47CFR 15.107
Test Method: ANSI C63.4:2003
Test Date: 2004-05-28
Mode of Operation: N/A

Results: N/A

The EUT is operated by a single source of internal battery power [located in the battery compartment], therefore power line conducted emission was deemed unnecessary.



Hong Kong Standards and Testing Centre

No.: HM151222

### 3.2 20dB Bandwidth of Fundamental Emission

Test Requirement: FCC 47 CFR 15.227

Test Method: ANSI C63.4:2003 (Section 13.1.7)

Test Date: 2004-05-28 Mode of Operation: On mode

#### **Test Method:**

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

#### **Test Setup:**

As Test Setup of clause 3.1.1 in this test report.




### Hong Kong Standards and Testing Centre


No.: HM151222

#### Limits for 20 dB Bandwidth of Fundamental Emission:

Frequency Range	20dB Bandwidth	FCC Limits
[MHz]	[KHz]	[MHz]
26.975	39.2	within 26.96-27.28

### 20dB Bandwidth of Fundamental Emission



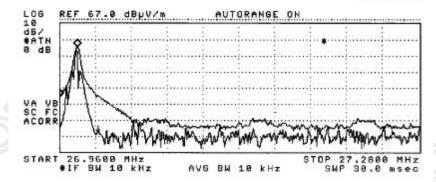




### Hong Kong Standards and Testing Centre

No.: HM151222

#### Limits for 20 dB Bandwidth of Fundamental Emission:

Frequency Range	20dB Bandwidth	FCC Limits
[MHz]	[KHz]	[MHz]
27.145	36	within 26.96-27.28

### 20dB Bandwidth of Fundamental Emission

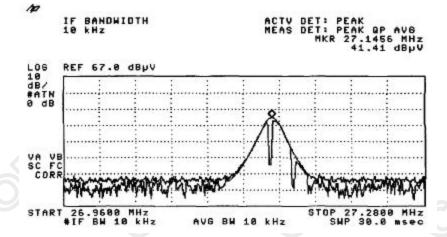



### Hong Kong Standards and Testing Centre

No.: HM151222

#### Limits for 20 dB Bandwidth of Fundamental Emission:

Frequency Range	20dB Bandwidth	FCC Limits
[MHz]	[KHz]	[MHz]
27.255	39.4	within 26.96-27.28


### 20dB Bandwidth of Fundamental Emission

## 09:11:24 JAN 16, 1995 23:49:37 NOV 12, 1997

MARKER A ACTV DET: PEAK
23.2 kHz MEAS DET: PEAK QP A

-32.97 dB

-32.97 dB

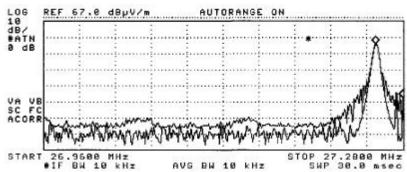



### Hong Kong Standards and Testing Centre

No.: HM151222

### Appendix A

### **Test Equipment Audit**

#### **Radiated Emission**

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL
EM007	SPECTRUM ANALYZER	HEWLETT PACKARD	HP85660B	3144A21192	14/03/03
EM008	SPECTRUM ANALYZER DISPLAY	HEWLETT PACKARD	HP85662A	3144A20514	14/03/03
EM009	QUASI PEAK ADAPTOR	HEWLETT PACKARD	HP85650A	3303A01702	14/03/03
EM010	RF PRESELECTOR	HEWLETT PACKARD	HP85685A	3221A01410	14/03/03
EM011	ATTENNUATOR/SWITCH	HEWLETT PACKARD	HP11713A	2508A10595	14/03/03
EM012	PRE-AMPLIFIER	HEWLETT PACKARD	HP8449B	3008A00262	14/03/03
EM013	CONTROLLER (COMPUTER), COLOR MONITOR, KEYBOARD & MOUSE FLOPPY DRIVE	HEWLETT PACKARD HEWLETT PACKARD HEWLETT PACKARD	HP9000 HP A1097C HP9133L	6226A60314 3151J39517 2623A02468	СМ
EM020	HORN ANTENNA	EMCO	3115	4032	19/07/00
EM022	LOOP ANTENNA	EMCO	6502	1189-2424	04/08/00
EM072	SIGNAL GENERATOR	HEWLETT PACKARD	8640B	1948A11892	N/A
EM083	HKSTC OPEN AREA TEST SITE	HKSTC	N/A	N/A	08/11/02
EM131	PORTABLE SPECTRUM ANALYSER	HEWLETT PACKARD	8595EM	3710A00155	18/12/01
EM145	EMI TEST RECEIVER	R&S	ESCS 30	830245/021	02/08/03
EM194	BICONILOG ANTENNA	EMCO	3142B	1795	14/05/02
EM195	ANTENNA POSITIONING MAST	EMCO	2075	2368	N/A
EM196	MULTI-DEVICE CONTROLLER	EMCO	2090	1662	N/A

#### **Conducted Emission**

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL
EM078	VARIAC	SHANGHAI VOLTAGE	TDGC-3/0.5	N/A	CM
EM081	SMALL SCREENED ROOM	MIKO INST HK	N/A	N/A	18/10/02
EM119	LISN	R&S	ESH3-Z5	0831.5518.52	01/10/02
EM127	ISOLATION TRANSFORMER 220 TO 300	WING SUN	N/A	N/A	СМ
EM142	PULES LIMITER	R&S	ESH3Z2	357.8810.52	03/07/02
EM181	EMI TEST RECEIVER	R&S	ESIB7	100072	28/11/01
EM154	SHIELDING ROOM	SIEMENA MATSUSHITA COMPONENTS	N/A	803-740-057- 99A	18/10/02
EM197	LISN	EMCO	4825/2	1193	08/04/03

#### Remarks:

CM Corrective Maintenance N/A Not Applicable or Not Available

TBD To Be Determined



### 香港標準及檢定中心 Hong Kong Standards and Testing Centre

No.: HM151222

### Appendix B

#### 26.975MHz

### **Duty Cycle Correction During 100msec**


Each function key sends a different series of characters, but each packet period (19.75msec) never exceeds a series of 1 long (15.825msec) and 2 short (1.2 and 0.825msec) pulses. Assuming any combination of short and long pulses may be obtained due to encoding the worst case transmit duty cycle would be considered 15.825msec+1.2msec+0.825msec per 19.75msec=90.3% duty cycle. Figure A through C show the characteristics of the pulse train for one of these functions.

#### Remarks:

Duty Cycle Correction = 20Log(0.903) =-0.8dB

The following figures [Figure A to Figure C] show the characteristics of the pulse train for one of these functions.

### Figure A [Pulse Train]

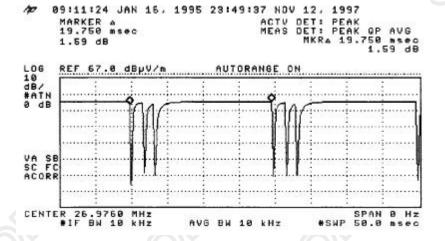




### Hong Kong Standards and Testing Centre


No.: HM151222


### Figure B [Long Pulse]



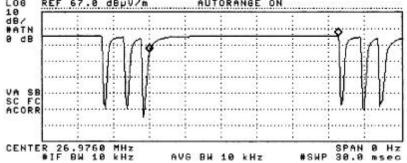

### Figure C [Short Pulse 1]

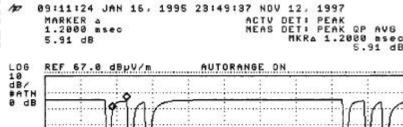

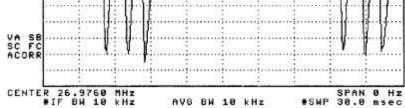




### Hong Kong Standards and Testing Centre

Date : 2004-06-10 **TEST REPORT** Page 23 of 23

No.: HM151222

### Figure C [Short Pulse 2]

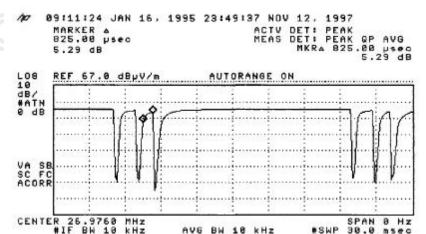



## 香港標準及檢定中心 Hong Kong Standards and Testing Centre

Date : 2004-06-10 **TEST REPORT** Page 24 of 24

No.: HM151222

#### 27.145MHz

#### **Duty Cycle Correction During 100msec**


Each function key sends a different series of characters, but each packet period (19.875msec) never exceeds a series of 3 long or short (15.975, 1.5 and 0.9msec) pulses. Assuming any combination of short and long pulses may be obtained due to encoding the worst case transmit duty cycle would be considered 15.975msec+1.5msec+0.9msec per 19.875msec=92.4% duty cycle. Figure A through C show the characteristics of the pulse train for one of these functions.

#### Remarks:

Duty Cycle Correction = 20Log(0.924) =-0.6dB

The following figures [Figure A to Figure C] show the characteristics of the pulse train for one of these functions.

### Figure A [Pulse Train]

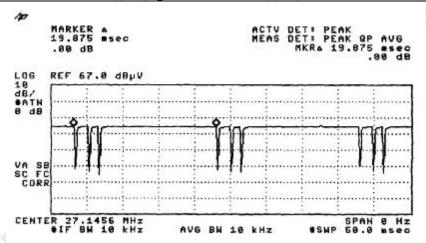




### Hong Kong Standards and Testing Centre


Date : 2004-06-10 **TEST REPORT** Page 25 of 25

No.: HM151222

# Figure B [Long Pulse]

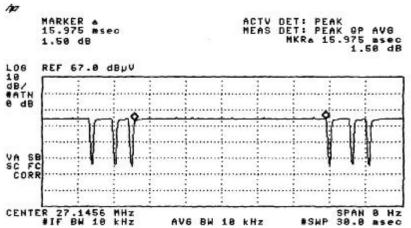


### Figure C [Short Pulse 1]

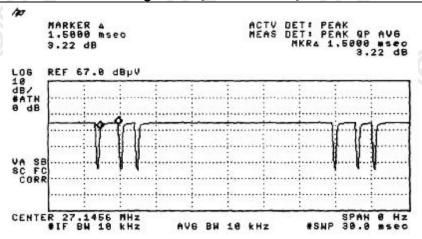



### Hong Kong Standards and Testing Centre

No.: HM151222

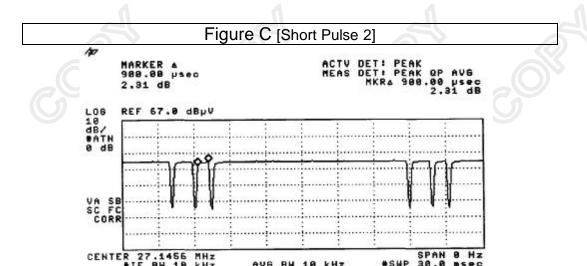

#### 香港新界大埔工業村大宏街 10 號



Hong Kong Standards and Testing Centre

No.: HM151222

#### 27.255MHz

#### **Duty Cycle Correction During 100msec**


Each function key sends a different series of characters, but each packet period (19.875msec) never exceeds a series of 1 long (15.525msec) and 2 short (1.125 and 0.675msec) pulses. Assuming any combination of short and long pulses may be obtained due to encoding the worst case transmit duty cycle would be considered 15.525msec+1.125msec+0.675msec per 19.875msec=87.1% duty cycle. Figure A through C show the characteristics of the pulse train for one of these functions.

#### Remarks:

Duty Cycle Correction = 20Log(0.871) =--1.1dB

The following figures [Figure A to Figure C] show the characteristics of the pulse train for one of these functions.

### Figure A [Pulse Train]

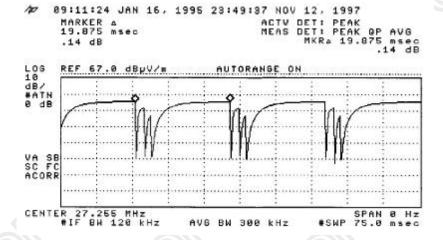



### Hong Kong Standards and Testing Centre


Date : 2004-06-10 **TEST REPORT** Page 28 of 28

No.: HM151222

CENTER 27.255 MHz #IF BW 120 kHz


> 27.255 MHz IF BW 120 k

### Figure B [Long Pulse]

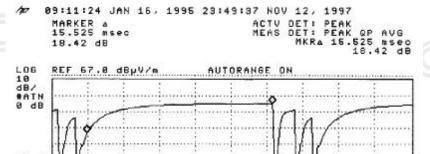

### Figure C [Short Pulse 1]

AVG BH 300 kHz

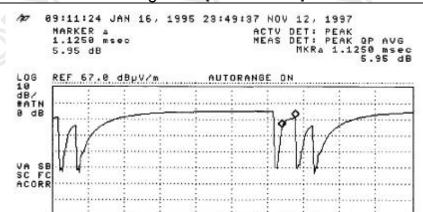

AVG BH 300 kHz



### Hong Kong Standards and Testing Centre

Date : 2004-06-10 **TEST REPORT** Page 29 of 29

No.: HM151222

### Figure C [Short Pulse 2]

Æ 09:11:24 JAN 16, 1995 23:49:37 NOV 12, 1997

MARKER & 675.00 µsec 7.22 dB ACTV BET: PEAK MEAS BET: PEAK QP AVG MKR4 675.00 psec

LOS REF 67.0 dBpV/m AUTORANGE ON

18
dB/
HATN
9 dB

VA SB
SC FC
ACORR

CENTER 27.255 HHz
#IF BN 120 kHz AVG BN 300 kHz #SMP 30.0 msec



### Hong Kong Standards and Testing Centre

Date : 2004-06-10 **TEST REPORT** Page 30 of 30

No.: HM151222

### Appendix C

### **Photographs of EUT**

Front View of the product



Rear View of the product



Inner Circuit Top View



**Inner Circuit Bottom View** 





### Hong Kong Standards and Testing Centre

No.: HM151222

### Photographs of EUT

Measurement of Radiated Emission Test Set Up

\*\*\*\*\* End of Test Report \*\*\*\*\*