


Label Diagram

**自印 Content LABEL:45x45MM (一式一聯)

•For household Only.
•Locate SMCSM01-Z in areas the temperature range is between 40° and 100° F (4.4° and 37.8° C).
•Refer to instructions Guide SMCSM01-Z 04262010.
•Use with Control Unit: RB5701-Z
•RETURN TO SMC Networks Inc., 20 Mason, Irvine, CA 92618 FOR SERVICING.
•The SMCSM01-Z specifications heat alarm specifications are:
Ratio-of-rise:
15° F/min > 105° F (8.3° C/min > 40.6° C)
Fixed: 135° F ± 5° F (57.2° C ± 2.8° C)

3A

本體後背蓋板(內側)




Code 128

**自印 CARTON LABEL



**Box LABEL:45x45MM (一式一聯)

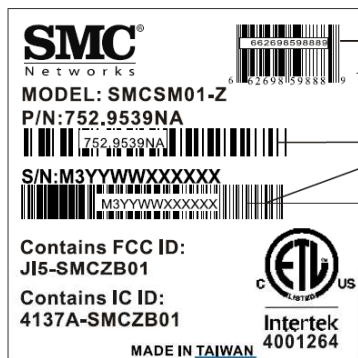

UPC(A)

3B

Code 128

PS:將浮貼於本體的 LABEL, 隨線列印數值後,即丟棄之。

Taiwan Assembled :Made in Taiwan
China Assembled :Made in China

序號編碼原則:

M3YYWWXXXXXX

M3	固定碼 (VENDOR CODE)
YY	西元年份末2碼
WW	2碼週別碼
XXXXXX	6碼流水號碼

PS:SMCSM01-Z產品之序號必須連貫, 每批出貨都必須從00001開始,且年變、週別變, 或REV變動後,序號也需從00001開始。

CARTON ID:
JYYMMXXXXX

序號
月
年
固定

Code 128



Taiwan
China

**自印 INSIDE BACK COVER LABEL:50x25MM (一式一聯)

• Sensitivity 2.25 % ± 1.35 % Drift compensation adjustment 0.5%/ft. max.
• The Device shall not be installed in locations where the normal ambient temperature exceeds 37.8° C (100° F).
• CONSTANT EXPOSURES TO HIGH OR LOW TEMPERATURES OR HIGH HUMIDITY MAY REDUCE BATTERY LIFE.

9B

