


Mouse Pulsefire Dart

Marking Type: Printing

Label p/n: 5551282C

Label Spec:

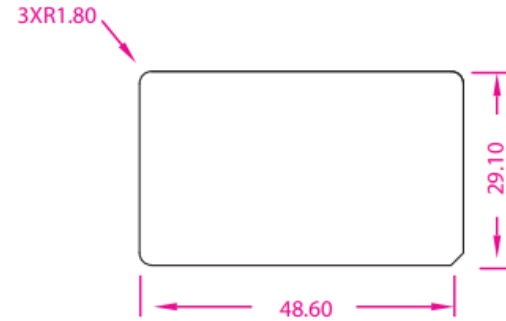

| The Last 3 Revisions | | |
|----------------------|------------------|----------|
| REV | DESCRIPTION | DATE |
| 001 | Initial Released | 12/19/18 |
| | | |
| | | |




Pre-printed

Secondary Printing Spec (black)

Printing Info on the left side

- 1st line: Product Name
- 2nd line: SKU#
- 3rd line: BOM#
- 4th line: Voltage & Current





Printing Info on the right side

- 1st line: TUV, KCC and EAC logo
- 2nd line: KCC ID#, Serial #
- 3rd line: Supplier#

2D Barcode info:

Supplier SP# (16 digits) + Serial #(11 digits)
(Separated in 2 lines)



Secondary Printing Spec:

- Minimum Printer resolution: 600 dpi
- Minimum gap between text to edge of label: 2.0 mm
- Minimum gap between text to text or logo: 1.0 mm
- **Texts Font Type:** Arial
- **Texts size:** 4 for 5V 200mA, 5 for the others.
- **Texts width:** 90% to 100%
- **KCC logo:** minimum requirement is 5mm height
- **Barcode type:** Data Matrix
- **Barcode height:** minimum 4 mm x 4 mm (Scanable)
- **Barcode quiet zone:** 1.5 mm

Artwork (1:1) Artwork built at 100%, all units in millimeters

Reference: HWC-QACI-018.xxx

| | Document # | Document Name | Author |
|--|-----------------|---|-------------|
| | HWC-MEV-0xx.001 | WW Channel HyperX Peripheral Pulsefire Dart Mouse Label Printing - Vendor Specification | Marie Duong |

Label Location

