



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Portable Data Collector

Model: Z-2121 series

Trade Name: ZEBEX

Issued to

**ZEBEX INDUSTRIES INC.
B1-1, No. 207, Sec 3, Beisin Road, Sindian City,
Taipei 231, Taiwan, R.O.C.**

Issued by

**Compliance Certification Services Inc.
No. 11, Wu-Gong 6th Rd., Wugu Industrial Park,
Taipei Hsien 248, Taiwan (R.O.C.)
<http://www.ccsemc.com.tw>
service@ccsrf.com**





TABLE OF CONTENTS

- 1. TEST RESULT CERTIFICATION.....3**
- 2. EUT DESCRIPTION4**
- 3. TEST METHODOLOGY5**
 - 3.1 EUT CONFIGURATION5
 - 3.2 EUT EXERCISE.....5
 - 3.3 GENERAL TEST PROCEDURES.....5
 - 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....6
 - 3.5 DESCRIPTION OF TEST MODES7
- 4. INSTRUMENT CALIBRATION.....8**
 - 4.1 MEASURING INSTRUMENT CALIBRATION8
 - 4.2 MEASUREMENT EQUIPMENT USED8
 - 4.3 MEASUREMENT UNCERTAINTY9
- 5. FACILITIES AND ACCREDITATIONS10**
 - 5.1 FACILITIES10
 - 5.2 EQUIPMENT.....10
 - 5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....11
- 6. SETUP OF EQUIPMENT UNDER TEST12**
 - 6.1 SETUP CONFIGURATION OF EUT.....12
 - 6.2 SUPPORT EQUIPMENT12
- 7. FCC PART 15.247 REQUIREMENTS.....13**
 - 7.1 20 DB BANDWIDTH.....13
 - 7.2 PEAK POWER.....18
 - 7.3 AVERAGE POWER20
 - 7.4 BAND EDGES MEASUREMENT21
 - 7.5 FREQUENCY SEPARATION30
 - 7.6 NUMBER OF HOPPING FREQUENCY.....34
 - 7.7 TIME OF OCCUPANCY (DWELL TIME)37
 - 7.8 SPURIOUS EMISSIONS50
 - 7.8.3 POWERLINE CONDUCTED EMISSIONS.....65
- APPENDIX I RADIO FREQUENCY EXPOSURE68**
- APPENDIX II PHOTOGRAPHS OF TEST SETUP69**



1. TEST RESULT CERTIFICATION

Applicant: ZEBEX INDUSTRIES INC.
 B1-1, No. 207, Sec 3, Beisin Road, Sindian City,
 Taipei 231, Taiwan, R.O.C.

Equipment Under Test: Portable Data Collector

Trade Name: ZEBEX

Model: Z-2121 series

Date of Test: September 10 ~ October 16, 2009

| APPLICABLE STANDARDS | |
|------------------------------|-------------------------|
| STANDARD | TEST RESULT |
| FCC 47 CFR Part 15 Subpart C | No non-compliance noted |

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.4: 2003** and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Rex Lai
 Section Manager
 Compliance Certification Services Inc.

Gina Lo
 Section Manager
 Compliance Certification Services Inc.



2. EUT DESCRIPTION

| | |
|------------------------------|--|
| Product | Portable Data Collector |
| Trade Name | ZEBEX |
| Model Number | Z-2121 series |
| Model Discrepancy | N/A |
| Power Supply | 1. Powered from Power Adapter TRAVEL CHARGER / TDA-USB-0501000 I/P: 100-240V, 200mA, 50-60Hz O/P: 5V, 1000mA 2. Powered from Battery Rating: 3.7V, 830mAh |
| Frequency Range | 2402 ~ 2480 MHz |
| Transmit Power | 6.93 dBm |
| Modulation Technique | GFSK for 1Mbps; $\pi/4$ -DQPSK for 2Mbps; 8DPSK for 3Mbps |
| Transmit Data Rate | 1, 2, 3Mbps |
| Number of Channels | 79 Channels |
| Antenna Specification | Gain: 1.5 dBi |
| Antenna Designation | Chip Antenna |

Remark:

1. The sample selected for test was production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **JFN-Z-2121** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 Part 15.207, 15.209 and 15.247.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|----------------------------|---------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.52525 | 2655 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 156.7 - 156.9 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 162.0125 - 167.17 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 167.72 - 173.2 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 240 - 285 | 3600 - 4400 | (²) |
| 13.36 - 13.41 | 322 - 335.4 | | |

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

The EUT (model: Z-2121 series) had been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting mode was programmed.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

The worst case data rate is determined as the data rate with highest output power.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only.

During the preliminary test, GFSK, $\pi/4$ -QPSK & 8DPSK with DH1 were pre-tested and found that 8DPSK emits the highest output power. Then the tests were carried on with DH1 compare to DH3 & DH5 and found that 8DPSK with DH5 emit the highest output power, and therefore had been tested under operating condition.

Following channels were selected for the radiated emission testing only as listed below:

| Tested Channel | Modulation Type | Packet Type | Date Rate | Axis |
|----------------|-----------------|-------------|-----------|------|
| Low, Mid, High | GFSK | DH 5 | 1 | Z |
| Low, Mid, High | 8DPSK | DH 5 | 3 | Z |

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

| Conducted Emissions Test Site | | | | |
|-------------------------------|--------------|--------|---------------|-----------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| Spectrum Analyzer | Agilent | E4446A | MY43360131 | 02/23/2010 |
| Power Meter | Agilent | E4416A | GB41291611 | 04/05/2010 |
| Power Sensor | Agilent | E9327A | US40441097 | 06/05/2010 |

| 3M Semi Anechoic Chamber | | | | |
|--------------------------|-----------------|-------------------|-------------------------------------|--------------------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| Spectrum Analyzer | Agilent | E4446A | US42510252 | 09/09/2010 |
| Test Receiver | Rohde&Schwarz | ESCI | 100064 | 11/28/2010 |
| Switch Controller | TRC | Switch Controller | SC94050010 | 05/02/2010 |
| 4 Port Switch | TRC | 4 Port Switch | SC94050020 | 05/02/2010 |
| Loop Antenna | EMCO | 6502 | 8905/2356 | 05/28/2010 |
| Horn-Antenna | TRC | HA-0502 | 06 | 06/03/2010 |
| Horn-Antenna | TRC | HA-0801 | 04 | 06/18/2010 |
| Horn-Antenna | TRC | HA-1201A | 01 | 08/10/2010 |
| Horn-Antenna | TRC | HA-1301A | 01 | 08/10/2010 |
| Bilog- Antenna | Sunol Sciences | JB3 | A030205 | 03/27/2010 |
| Loop Antenna | EMCO | 6502 | 8905/2356 | 05/28/2010 |
| Turn Table | Max-Full | MFT-120S | T120S940302 | N.C.R. |
| Antenna Tower | Max-Full | MFA-430 | A440940302 | N.C.R. |
| Controller | Max-Full | MF-CM886 | CC-C-1F-13 | N.C.R. |
| Site NSA | CCS | N/A | FCC MRA: TW1039 IC: 2324G-1 / -2 | 10/16/2010 11/04/2010 |
| Test S/W | LABVIEW (V 6.1) | | | |

| Powerline Conducted Emission room | | | | |
|-----------------------------------|--------------|------------------|---------------|-----------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| TEST RECEIVER | R&S | ESHS20 | 840455/006 | 02/12/2010 |
| LISN (EUT) | SCHWARZBECK | NSLK 8127 | 8127382 | 12/09/2009 |
| LISN | SOLAR | 8012-50-R-24-BNC | 8305114 | 12/09/2009 |
| BNC CABLE | MIYAZAKI | 5D-FB | BNC A4 | 05/11/2010 |
| THERMO-HYGRO METER | TECPEL | DTM-303 | No.7 | 11/24/2009 |
| Test S/W | EMI 32.exe | | | |



4.3 MEASUREMENT UNCERTAINTY

| PARAMETER | UNCERTAINTY |
|---|-------------|
| Powerline Conducted Emission | +/- 3.70 |
| 3M Semi Anechoic Chamber / 30MHz ~ 1GHz | +/-3.70 |
| 3M Semi Anechoic Chamber / Above 1GHz | +/-3.09 |

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

Remark: The Powerline conducted emissions test items was tested at Compliance Certification Services Inc. (Hsintien Lab.) The test equipments were listed in page 8 and the test data, please refer page 66-67.

No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.




Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."



5.3 TABLE OF ACCREDITATIONS AND LISTINGS

| Country | Agency | Scope of Accreditation | Logo |
|---------|-----------------|--|---|
| USA | FCC | 3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements |  FCC MRA: TW1039 |
| Taiwan | TAF | LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11 |  Testing Laboratory 1309 |
| Canada | Industry Canada | 3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform |  IC 2324G-1 IC 2324G-2 |

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

| No. | Device Type | Brand | Model | Series No. | FCC ID | Data Cable | Power Cord |
|-----|-------------|-------|-------|------------|--------------|------------|---|
| 1. | Notebook PC | DELL | PP19L | GK102 A00 | QDS-BRCM1021 | N/A | AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core |

Remark:

1. *All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
2. *Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*




7. FCC PART 15.247 REQUIREMENTS

7.120 DB BANDWIDTH

LIMIT

None; for reporting purposes only.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=10kHz, VBW = 30kHz, Span = 1.5MHz, Sweep = auto.
4. Mark the peak frequency and 20dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted.

Test Data

For GFSK / DH5

| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) |
|---------|-----------------|----------------------|
| Low | 2402 | 0.934 |
| Mid | 2441 | 0.932 |
| High | 2480 | 0.938 |

For 8DPSK / DH5

| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) |
|---------|-----------------|----------------------|
| Low | 2402 | 1.295 |
| Mid | 2441 | 1.300 |
| High | 2480 | 1.250 |



Test Plot


For GFSK / DH5

20dB Bandwidth (CH Low)

Agilent 01:05:38 Oct 16, 2009

R T

Δ Mkr2 934 kHz
-1.14 dB

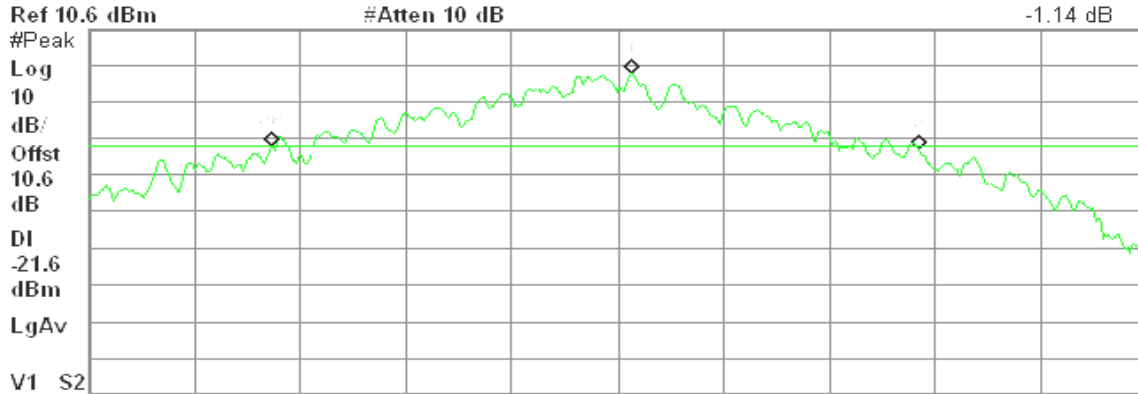


| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|---------------|------------|
| 1 | (1) | Freq | 2.402 020 GHz | -1.58 dBm |
| 2R | (1) | Freq | 2.401 507 GHz | -21.36 dBm |
| 2Δ | (1) | Freq | 934 kHz | -1.14 dB |

20dB Bandwidth (CH Mid)

Agilent 01:02:20 Oct 16, 2009

R T

Δ Mkr2 932 kHz
-0.18 dB

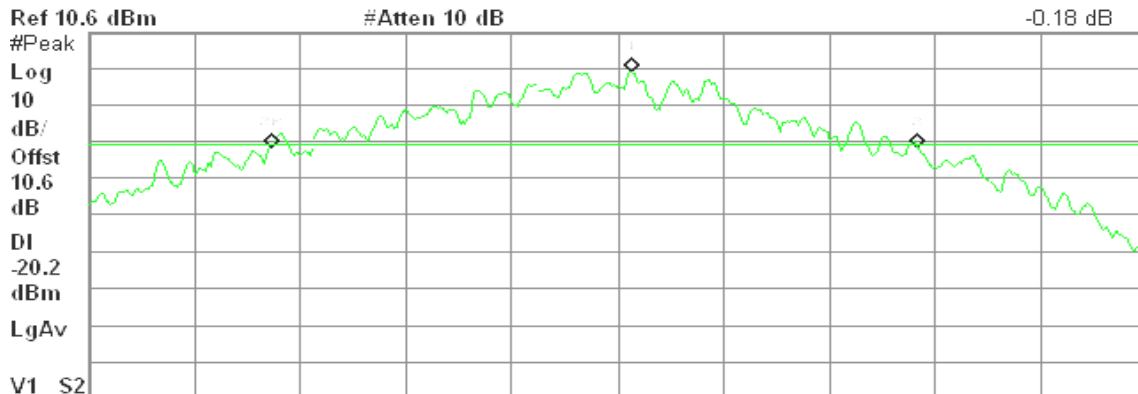

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|---------------|------------|
| 1 | (1) | Freq | 2.441 020 GHz | -0.22 dBm |
| 2R | (1) | Freq | 2.440 507 GHz | -20.83 dBm |
| 2Δ | (1) | Freq | 932 kHz | -0.18 dB |




20dB Bandwidth (CH High)

Agilent 01:04:34 Oct 16, 2009

R T

Δ Mkr2 938 kHz
-0.49 dB

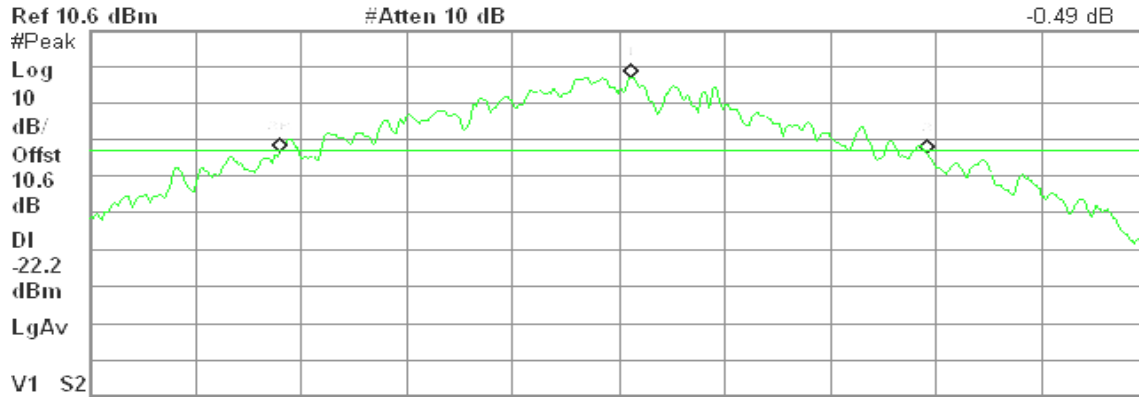

Center 2.480 000 GHz

Span 1.5 MHz

#Res BW 10 kHz

#VBW 30 kHz

Sweep 14.36 ms (601 pts)

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|---------------|------------|
| 1 | (1) | Freq | 2.480 018 GHz | -2.23 dBm |
| 2R | (1) | Freq | 2.479 503 GHz | -22.75 dBm |
| 2Δ | (1) | Freq | 938 kHz | -0.49 dB |



For 8DPSK / DH5

20dB Bandwidth (CH Low)

Agilent 02:16:42 Oct 16, 2009


R T

Δ Mkr2 1.295 MHz

0.12 dB

Ref 10.6 dBm

Atten 10 dB

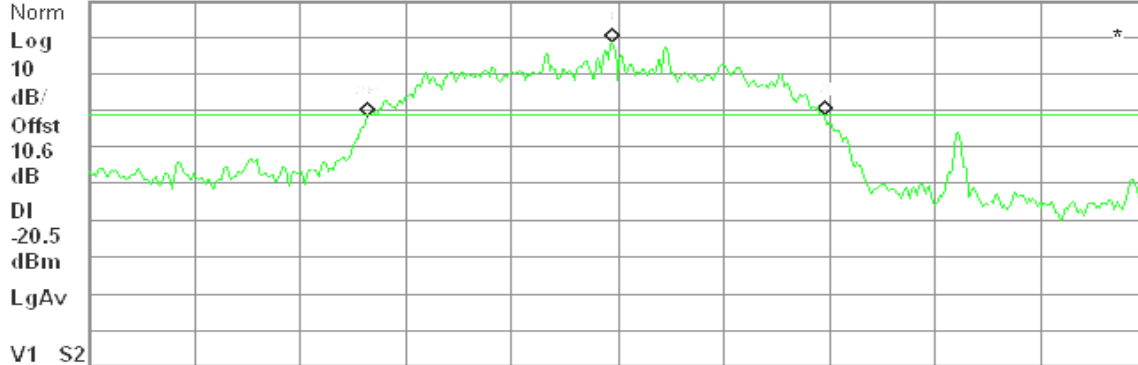

Center 2.402 000 GHz

Span 3 MHz

#Res BW 10 kHz

#VBW 30 kHz

Sweep 28.68 ms (601 pts)

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|---------------|------------|
| 1 | (1) | Freq | 2.401 980 GHz | -0.47 dBm |
| 2R | (1) | Freq | 2.401 290 GHz | -20.90 dBm |
| 2Δ | (1) | Freq | 1.295 MHz | 0.12 dB |

20dB Bandwidth (CH Mid)

Agilent 02:17:43 Oct 16, 2009


R T

Δ Mkr2 1.300 MHz

-1.03 dB

Ref 10.6 dBm

Atten 10 dB

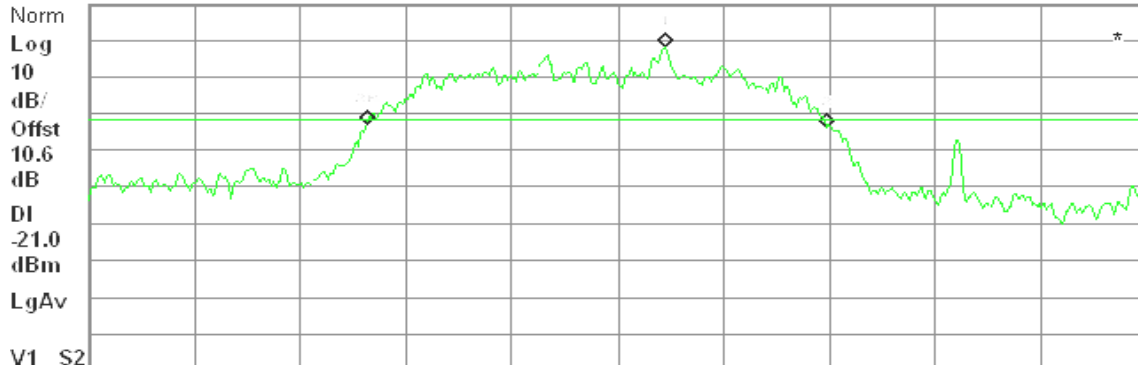

Center 2.441 000 GHz

Span 3 MHz

#Res BW 10 kHz

#VBW 30 kHz

Sweep 28.68 ms (601 pts)

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|---------------|------------|
| 1 | (1) | Freq | 2.441 135 GHz | -1.05 dBm |
| 2R | (1) | Freq | 2.440 290 GHz | -22.25 dBm |
| 2Δ | (1) | Freq | 1.300 MHz | -1.03 dB |




20dB Bandwidth (CH High)

Agilent 02:18:36 Oct 16, 2009

R T

Δ Mkr2 1.250 MHz

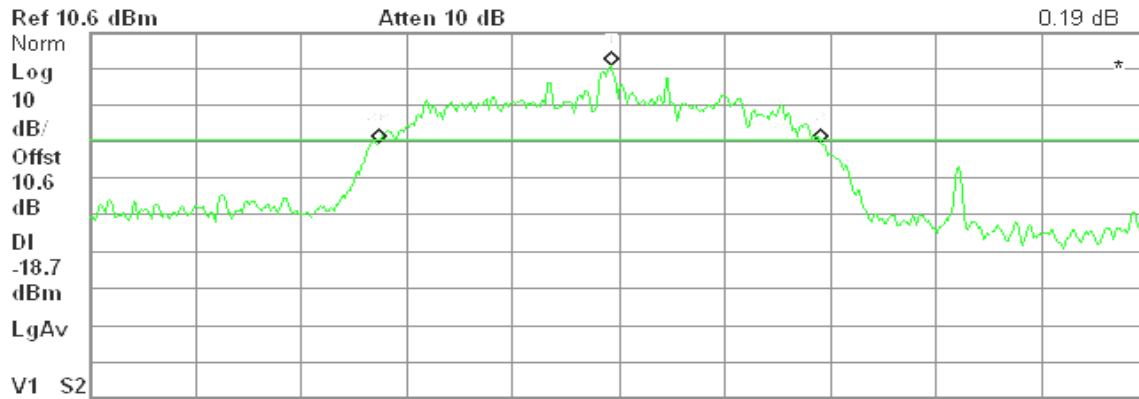

Center 2.480 000 GHz

Span 3 MHz

#Res BW 10 kHz

#VBW 30 kHz

Sweep 28.68 ms (601 pts)

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|---------------|------------|
| 1 | (1) | Freq | 2.479 975 GHz | 1.31 dBm |
| 2R | (1) | Freq | 2.479 320 GHz | -19.90 dBm |
| 2Δ | (1) | Freq | 1.250 MHz | 0.19 dB |




7.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
2. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
3. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted.



Test Data

For GFSK / DH5

| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) | Limit (W) | Result |
|---------|-----------------|--------------------|------------------|-----------|--------|
| Low | 2402 | 4.26 | 0.00267 | 0.125 | PASS |
| Mid | 2441 | 5.34 | 0.00342 | | PASS |
| High | 2480 | 3.89 | 0.00245 | | PASS |

For 8DPSK / DH5

| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) | Limit (W) | Result |
|---------|-----------------|--------------------|------------------|-----------|--------|
| Low | 2402 | 6.57 | 0.00454 | 0.125 | PASS |
| Mid | 2441 | 6.86 | 0.00485 | | PASS |
| High | 2480 | 6.93 | 0.00493 | | PASS |




7.3 AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the average power detection.

TEST RESULTS

No non-compliance noted.

Test Data

For GFSK / DH5

| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) |
|---------|-----------------|--------------------|------------------|
| Low | 2402 | 3.02 | 0.00200 |
| Mid | 2441 | 4.09 | 0.00256 |
| High | 2480 | 2.61 | 0.00182 |

For 8DPSK / DH5


| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) |
|---------|-----------------|--------------------|------------------|
| Low | 2402 | 3.18 | 0.00208 |
| Mid | 2441 | 3.36 | 0.00217 |
| High | 2480 | 3.40 | 0.00219 |

7.4 BAND EDGES MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

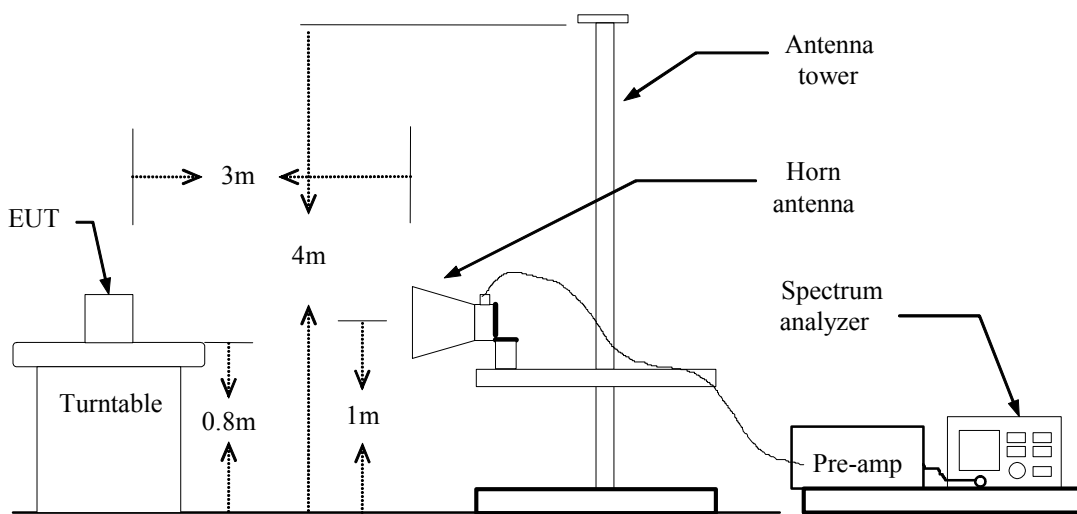

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.




For GFSK / DH5

Band Edges (CH Low)


Detector mode: Peak

Polarity: Vertical

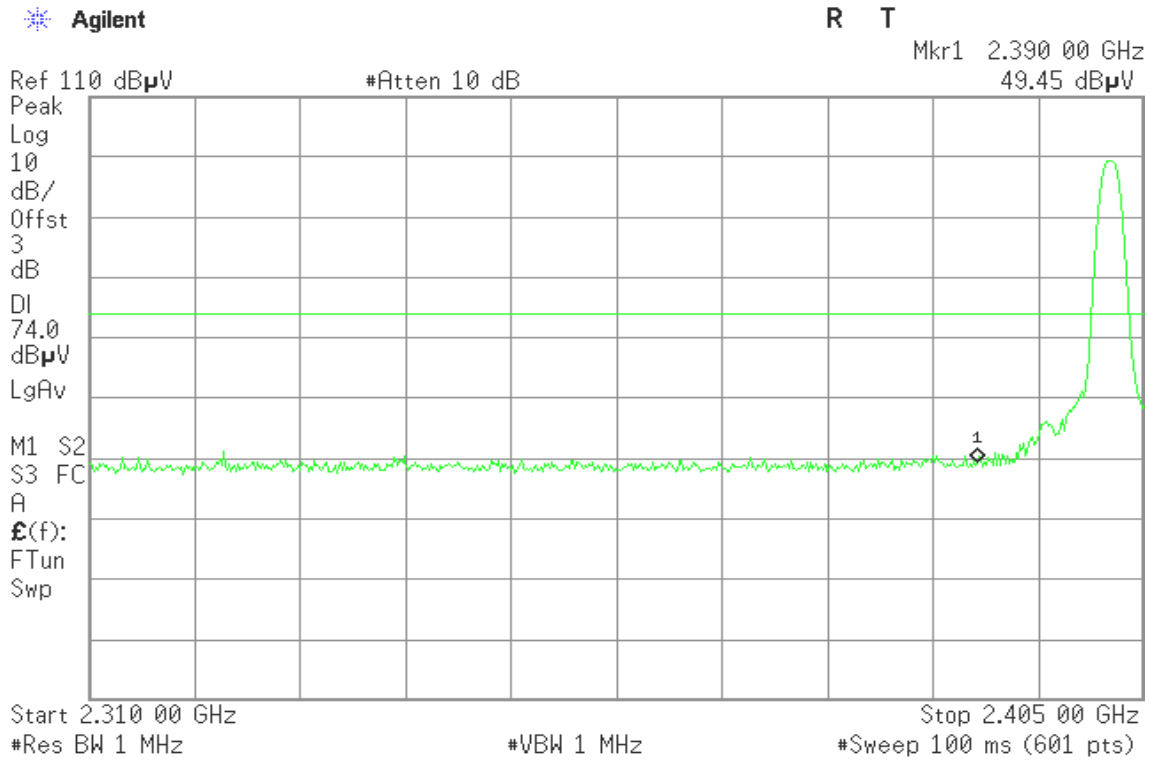

Detector mode: Average

Polarity: Vertical

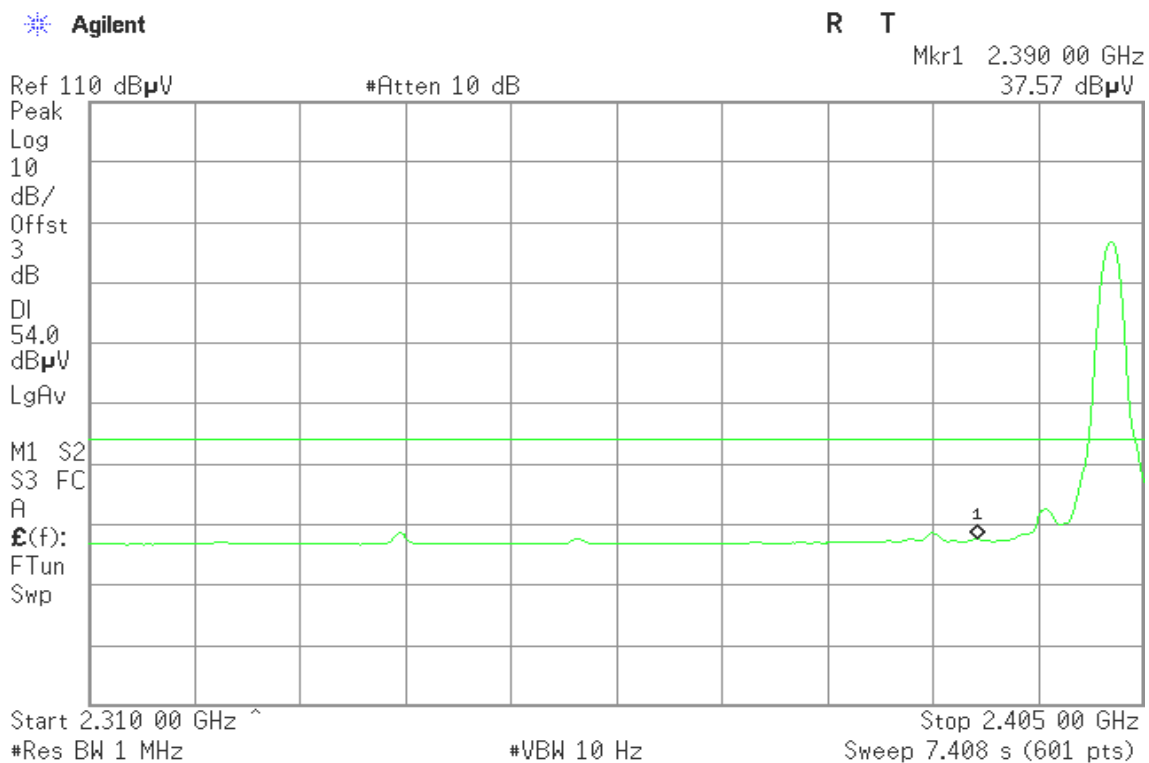



Detector mode: Peak

Polarity: Horizontal


Agilent

R T

Mkr1 2.390 00 GHz
49.79 dBµV

Ref 110 dBµV

#Atten 10 dB

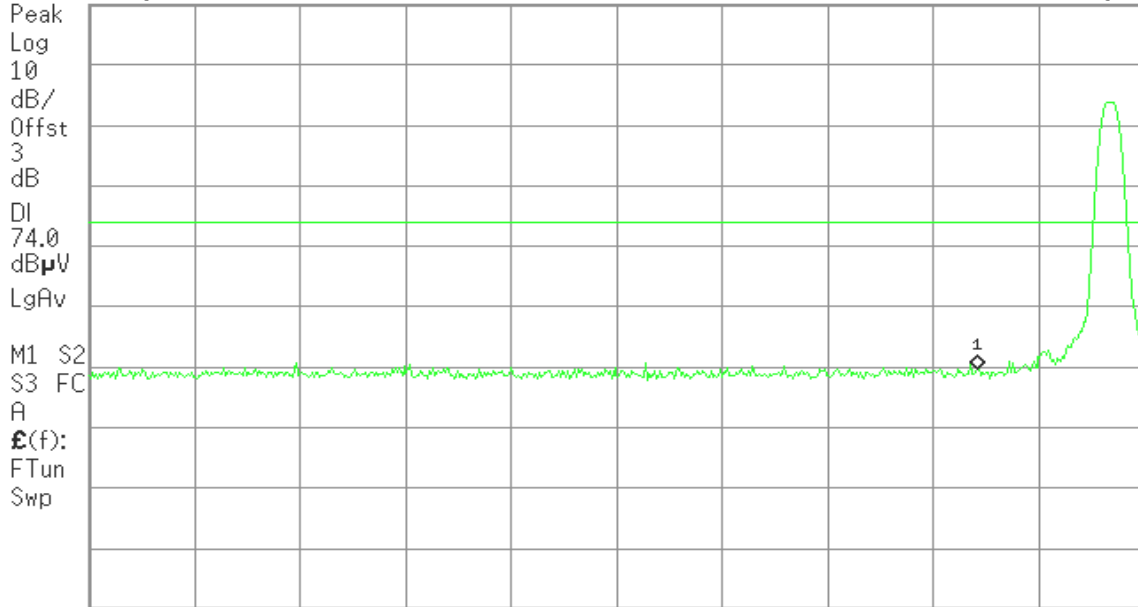

Start 2.310 00 GHz

Stop 2.405 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal


Agilent

R T

Mkr1 2.390 00 GHz
37.03 dBµV

Ref 110 dBµV

#Atten 10 dB

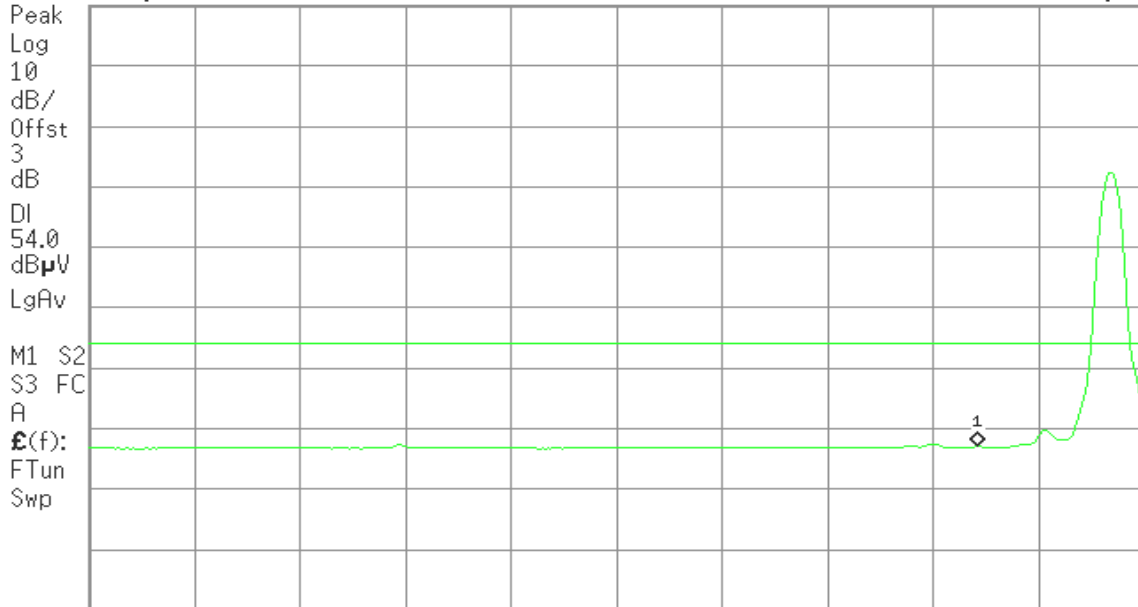

Start 2.310 00 GHz

Stop 2.405 00 GHz

#Res BW 1 MHz

#VBW 10 Hz


Sweep 7.408 s (601 pts)



Band Edges (CH High)


Detector mode: Peak

Polarity: Vertical

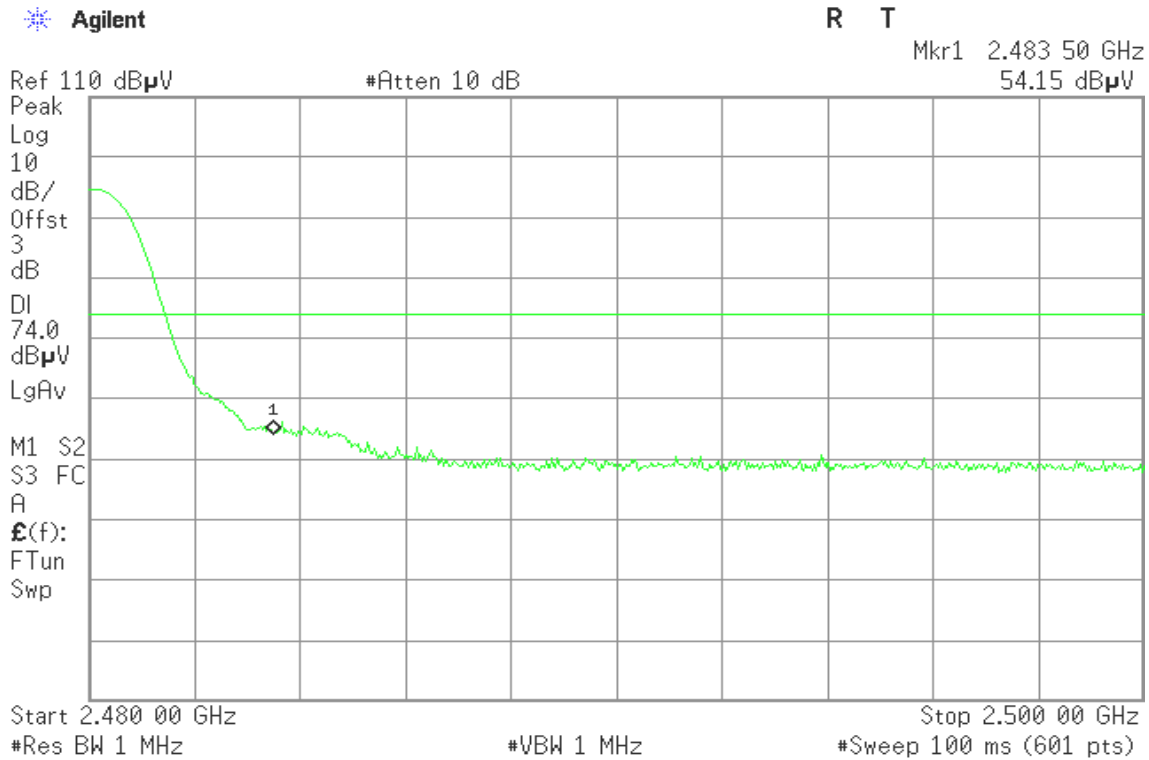

Detector mode: Average

Polarity: Vertical

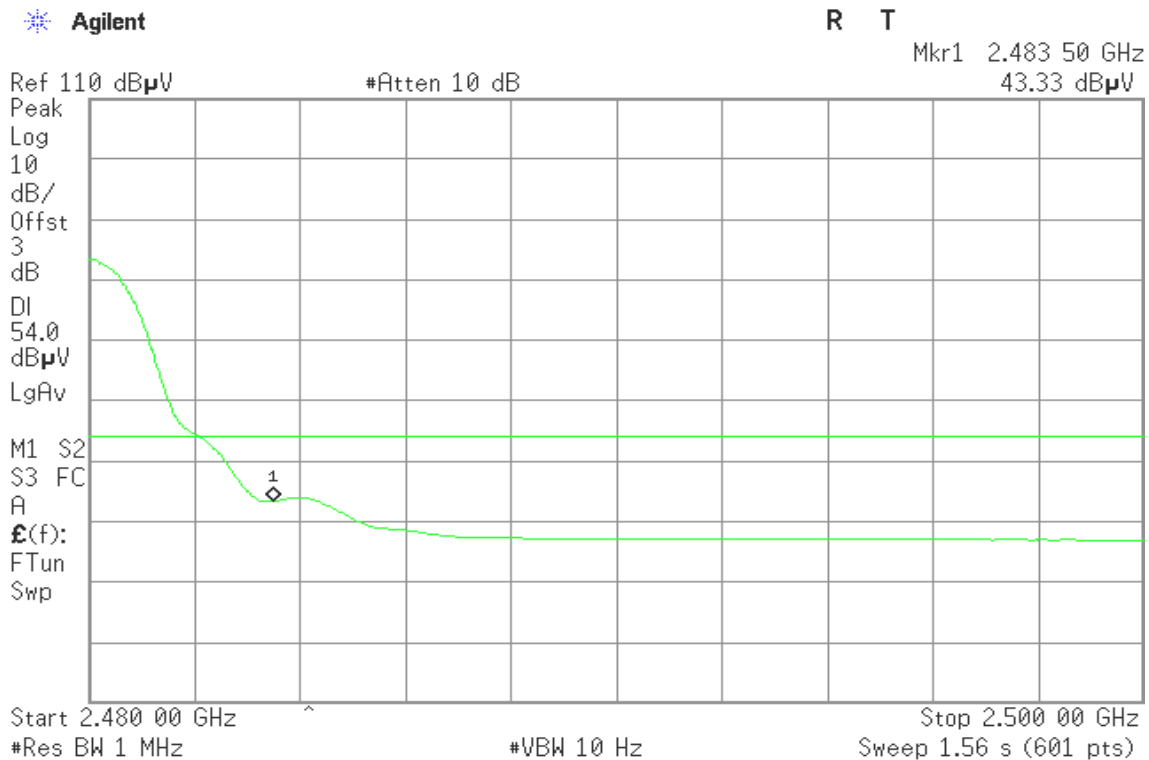



Detector mode: Peak

Polarity: Horizontal


Agilent

R T

Mkr1 2.483 50 GHz
52.05 dBµV

Ref 110 dBµV

#Atten 10 dB

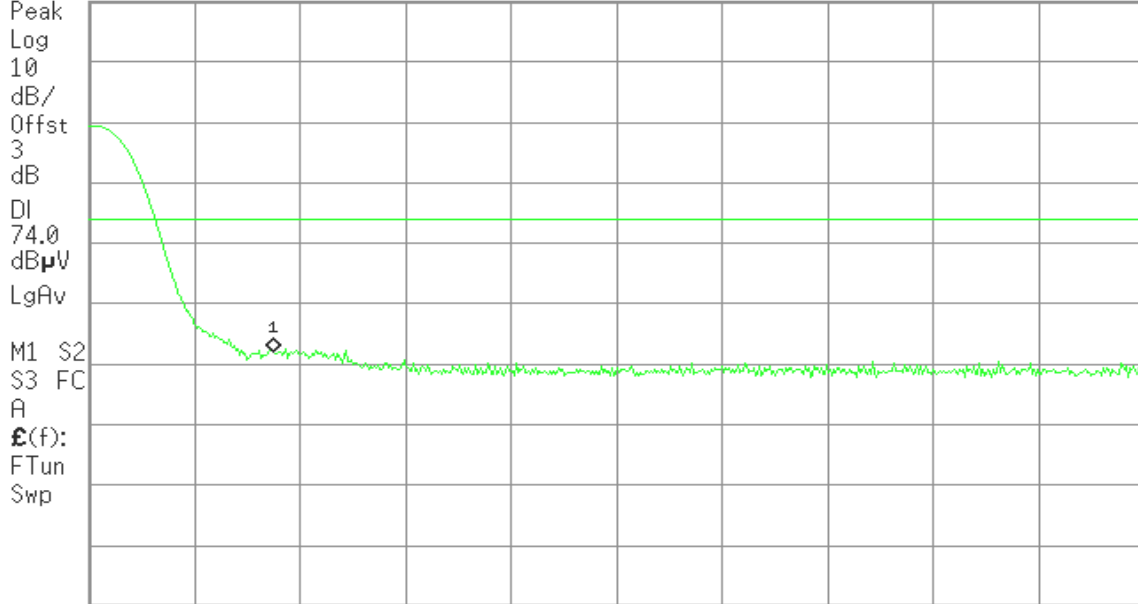

Start 2.480 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal


Agilent

R T

Mkr1 2.483 50 GHz
40.27 dBµV

Ref 110 dBµV

#Atten 10 dB

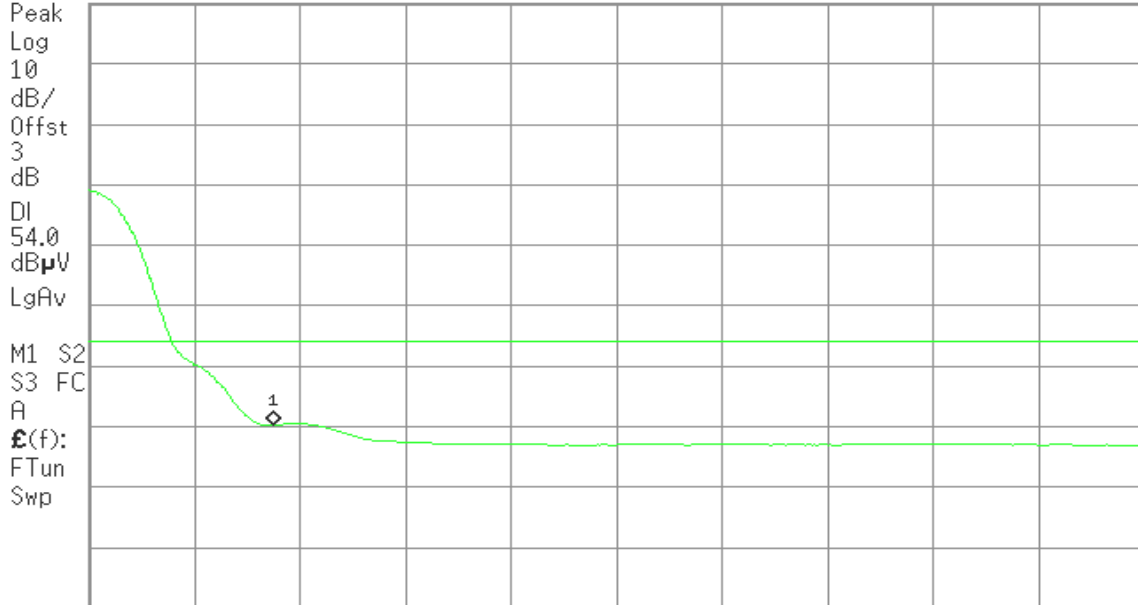

Start 2.480 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 1.56 s (601 pts)




For 8DPSK / DH5

Band Edges (CH Low)


Detector mode: Peak

Polarity: Vertical

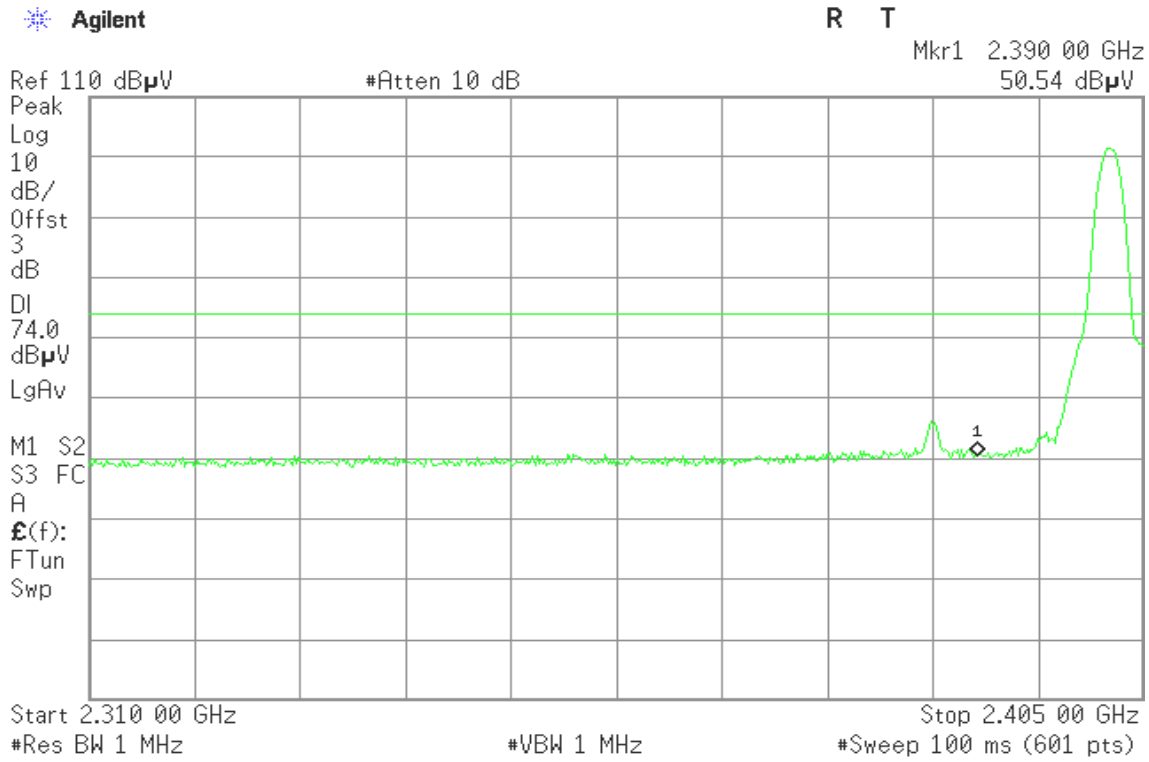

Detector mode: Average

Polarity: Vertical

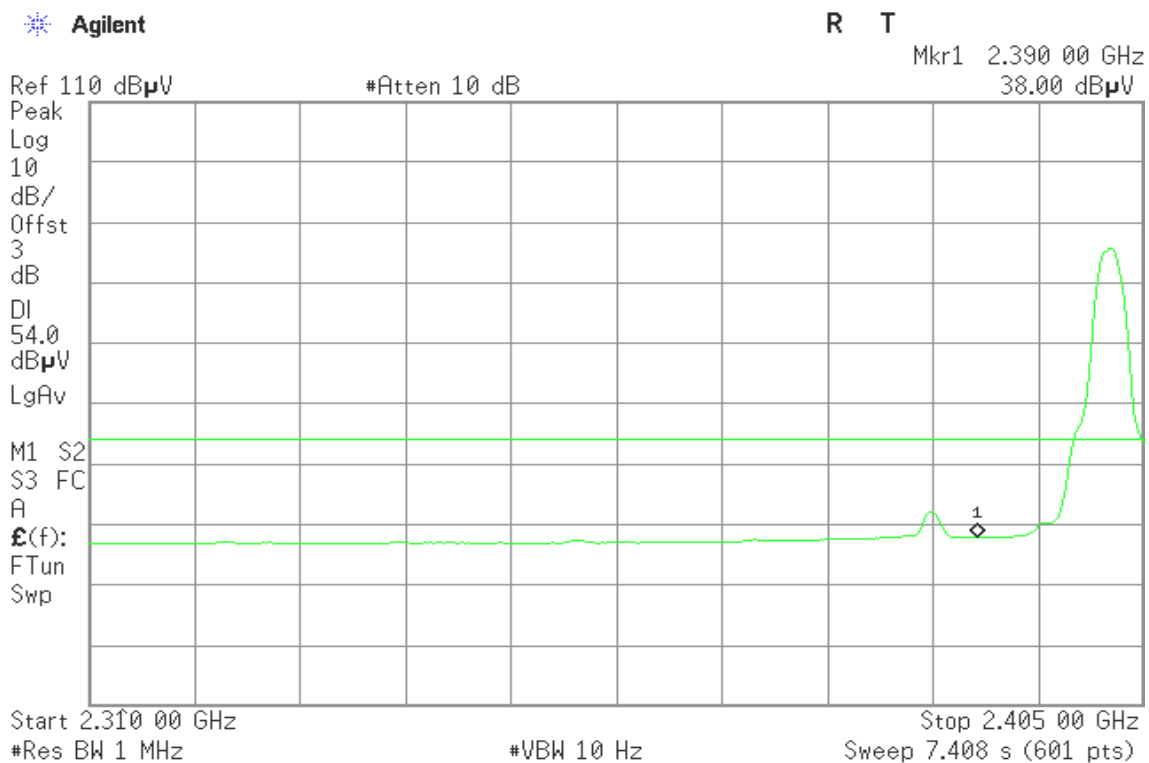



Detector mode: Peak

Polarity: Horizontal


Agilent

R T

Mkr1 2.390 00 GHz
48.95 dBµV

Ref 110 dBµV

#Atten 10 dB

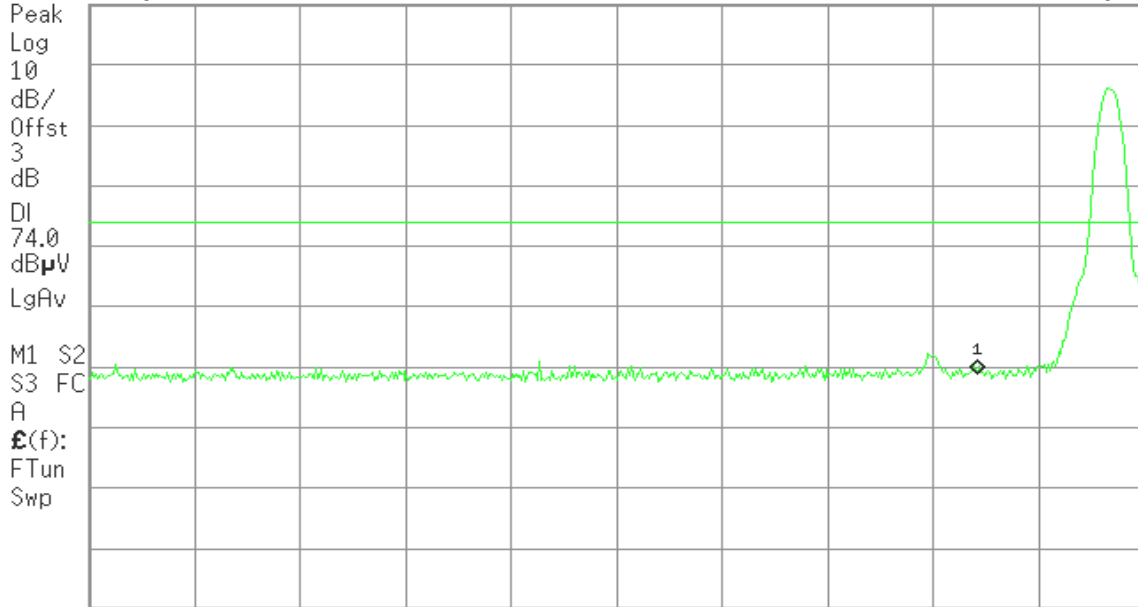

Start 2.310 00 GHz

Stop 2.405 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal

Agilent

R T

Mkr1 2.390 00 GHz
37.22 dBµV

Ref 110 dBµV

#Atten 10 dB



Start 2.310 00 GHz

Stop 2.405 00 GHz

#Res BW 1 MHz

#VBW 10 Hz


Sweep 7.408 s (601 pts)



Band Edges (CH High)


Detector mode: Peak

Polarity: Vertical

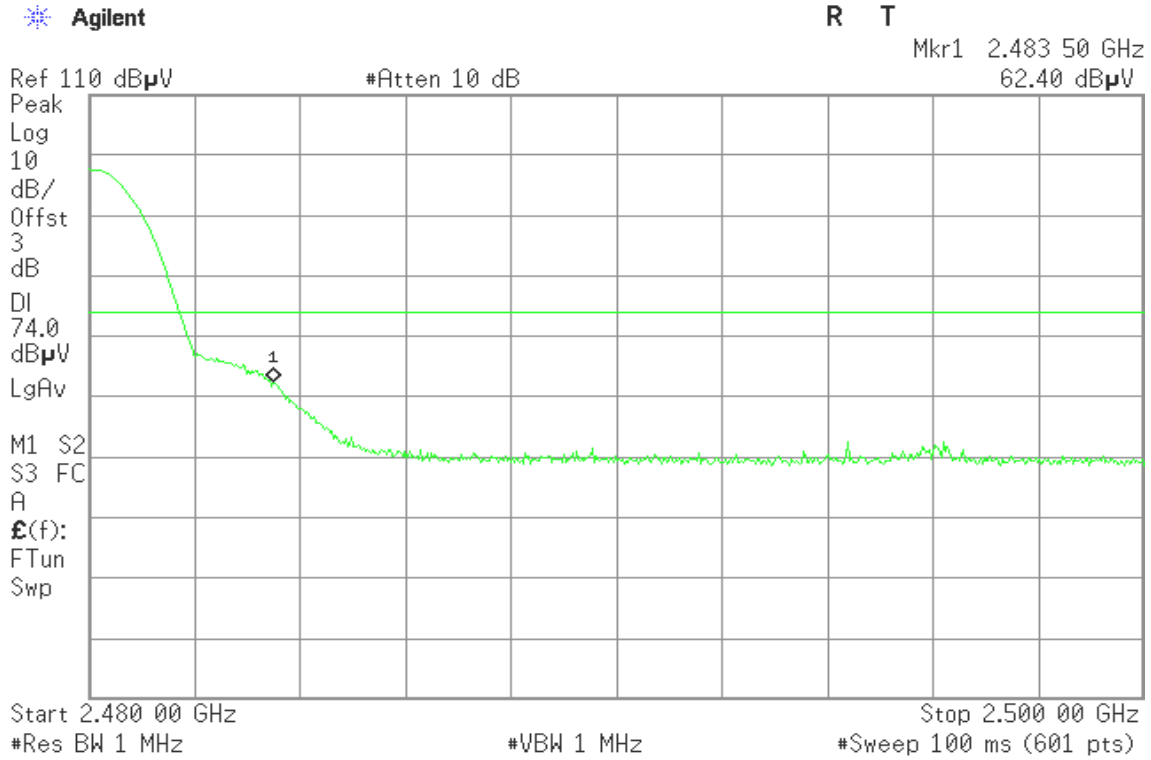

Detector mode: Average

Polarity: Vertical

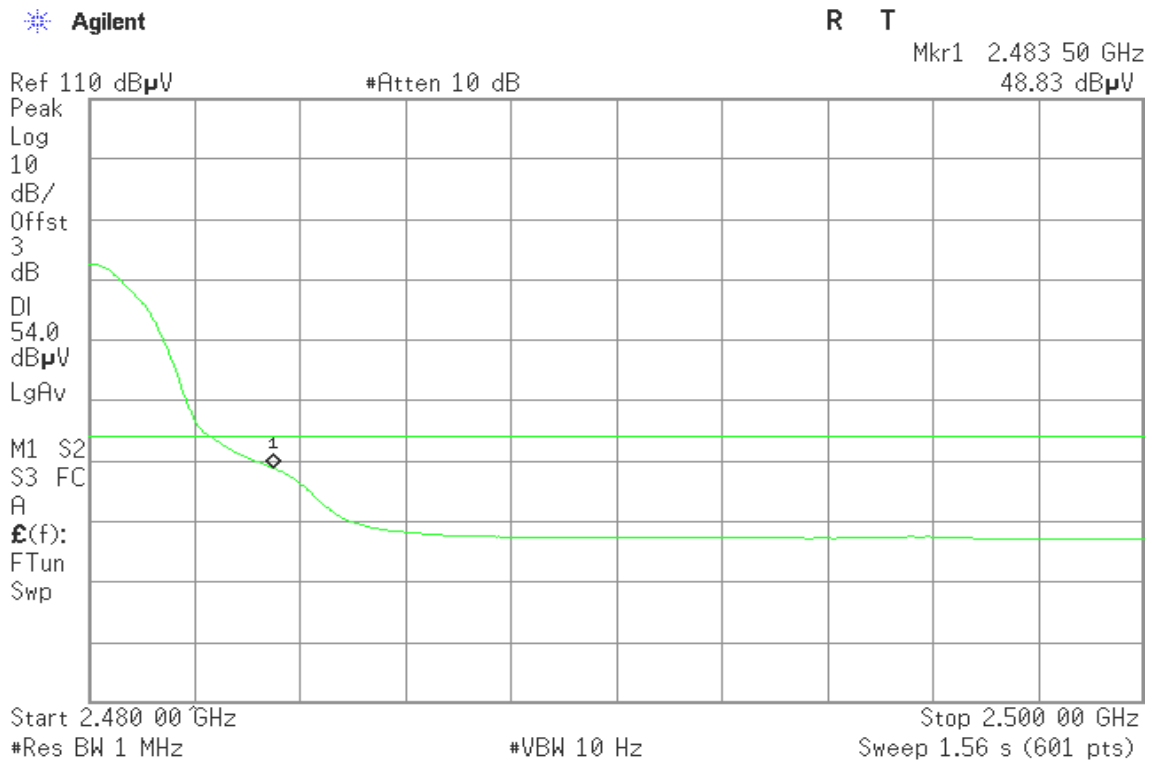




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

Mkr1 2.483 50 GHz
57.92 dBµV

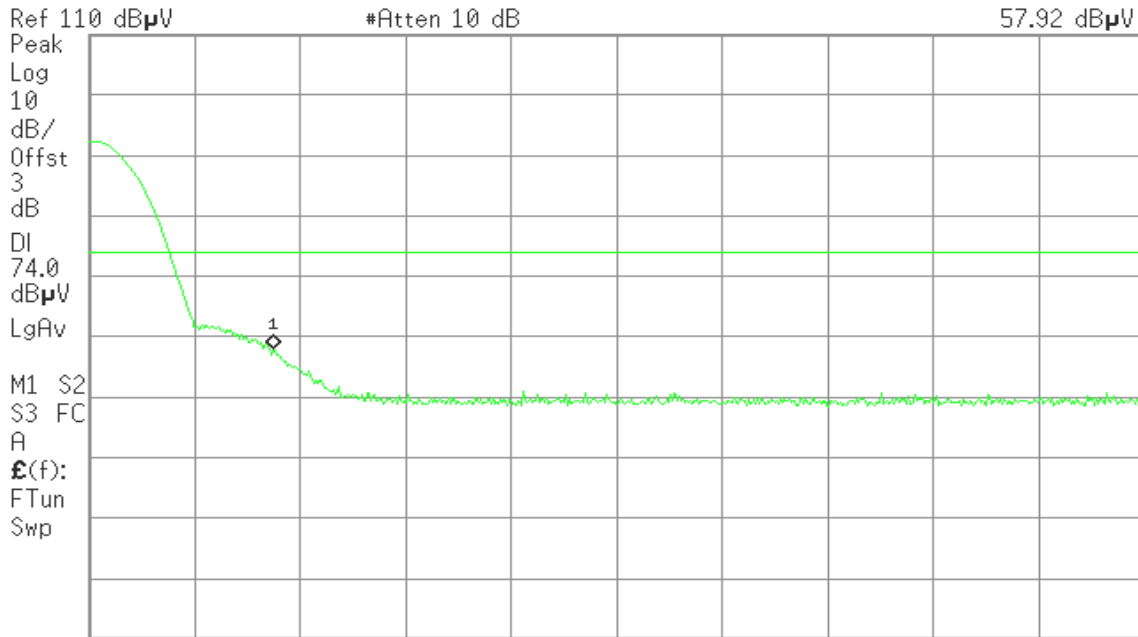

Start 2.480 00 GHz #Res BW 1 MHz #VBW 1 MHz Stop 2.500 00 GHz #Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Horizontal

Agilent

R T

Mkr1 2.483 50 GHz
44.95 dBµV

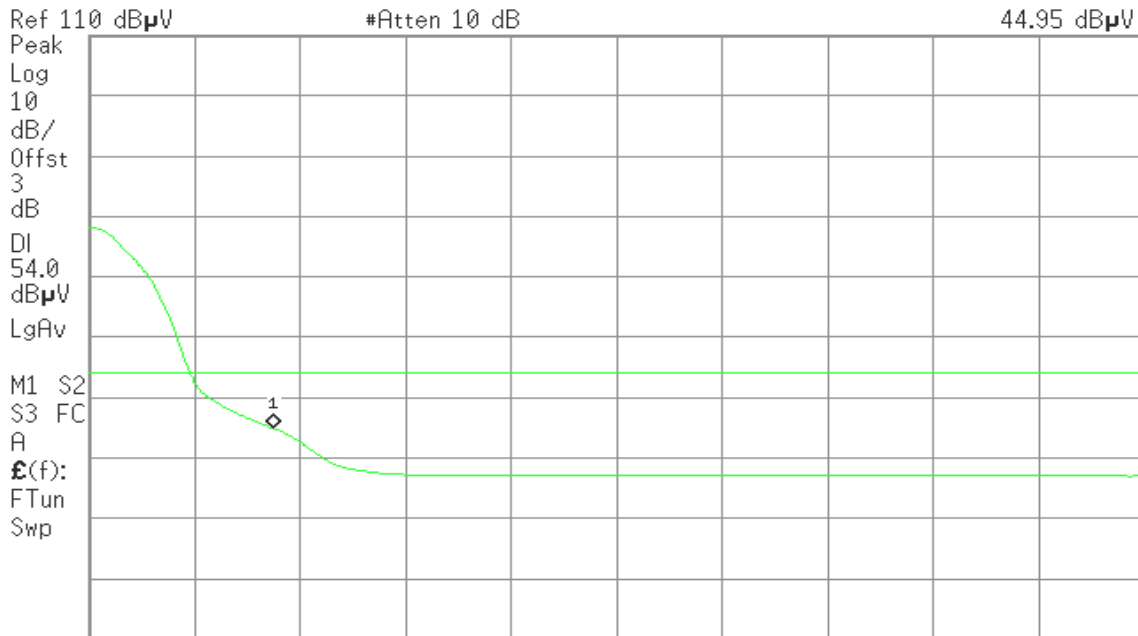


Start 2.480 00 GHz #Res BW 1 MHz #VBW 10 Hz Stop 2.500 00 GHz Sweep 1.56 s (601 pts)

7.5 FREQUENCY SEPARATION

LIMIT

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW = 30kHz, VBW = 100kHz, Span = 3MHz, Sweep = auto.
5. Max hold, mark 3 peaks of hopping channel and record the 3 peaks frequency.

TEST RESULTS

No non-compliance noted



Test Data

For GFSK / DH5

| Channel Separation (MHz) | Two-thirds of the 20 dB bandwidth | Channel Separation Limit | Result |
|---------------------------------|--|------------------------------------|---------------|
| 1.00 | 625.3 | >Two-thirds of the 20 dB bandwidth | Pass |

For 8DPSK / DH5

| Channel Separation (MHz) | Two-thirds of the 20 dB bandwidth | Channel Separation Limit | Result |
|---------------------------------|--|------------------------------------|---------------|
| 1.00 | 866.6 | >Two-thirds of the 20 dB bandwidth | Pass |



Test Plot


For GFSK / DH5

Measurement of Channel Separation

Agilent 01:41:12 Oct 16, 2009

R T

Mkr3 2.441 970 GHz
3.45 dBm

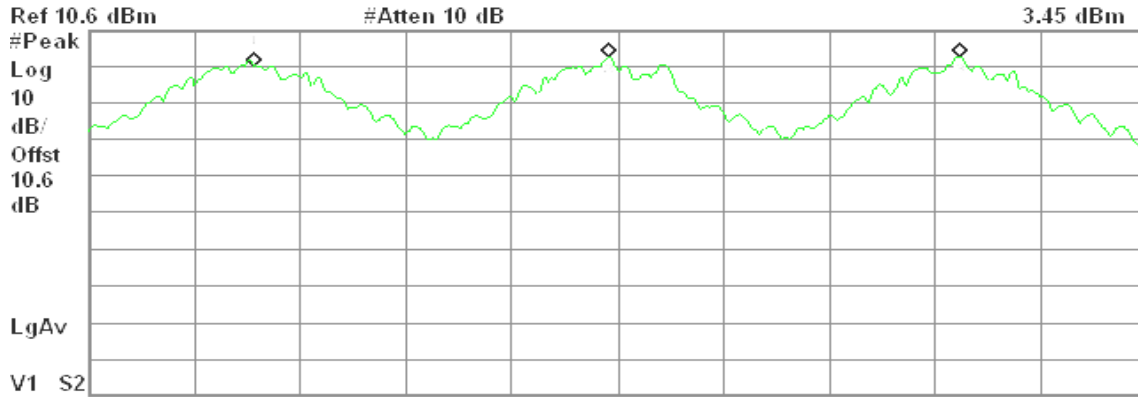

Center 2.441 000 GHz Span 3 MHz
#Res BW 30 kHz #VBW 100 kHz Sweep 3.2 ms (601 pts)


| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|---------------|-----------|
| 1 | (1) | Freq | 2.439 970 GHz | 0.83 dBm |
| 2 | (1) | Freq | 2.440 970 GHz | 3.12 dBm |
| 3 | (1) | Freq | 2.441 970 GHz | 3.45 dBm |

Measurement of 20dB Bandwidth

Agilent 01:04:34 Oct 16, 2009

R T

Δ Mkr2 938 kHz
-0.49 dB

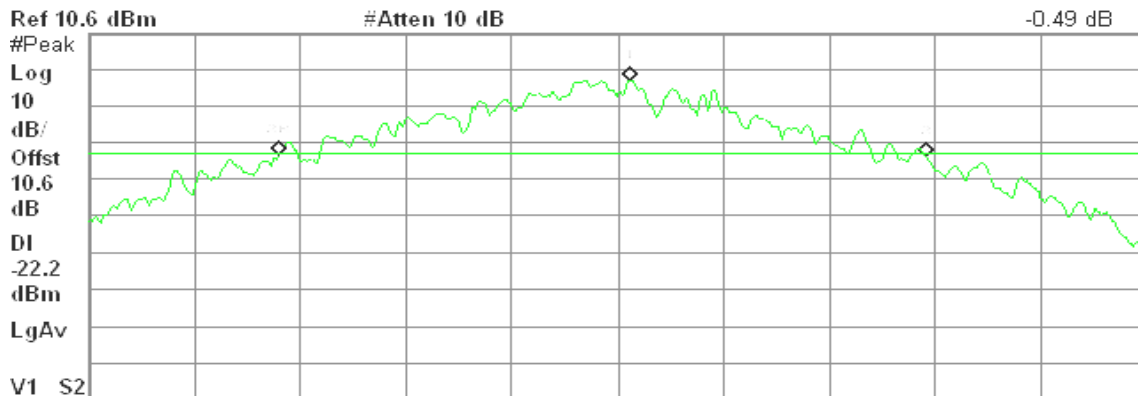

Center 2.480 000 GHz Span 1.5 MHz
#Res BW 10 kHz #VBW 30 kHz Sweep 14.36 ms (601 pts)

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|---------------|------------|
| 1 | (1) | Freq | 2.480 018 GHz | -2.23 dBm |
| 2R | (1) | Freq | 2.479 503 GHz | -22.75 dBm |
| 2Δ | (1) | Freq | 938 kHz | -0.49 dB |




For 8DPSK / DH5

Measurement of Channel Separation

Agilent 01:48:01 Oct 16, 2009

R T

Mkr3 2.441 970 GHz

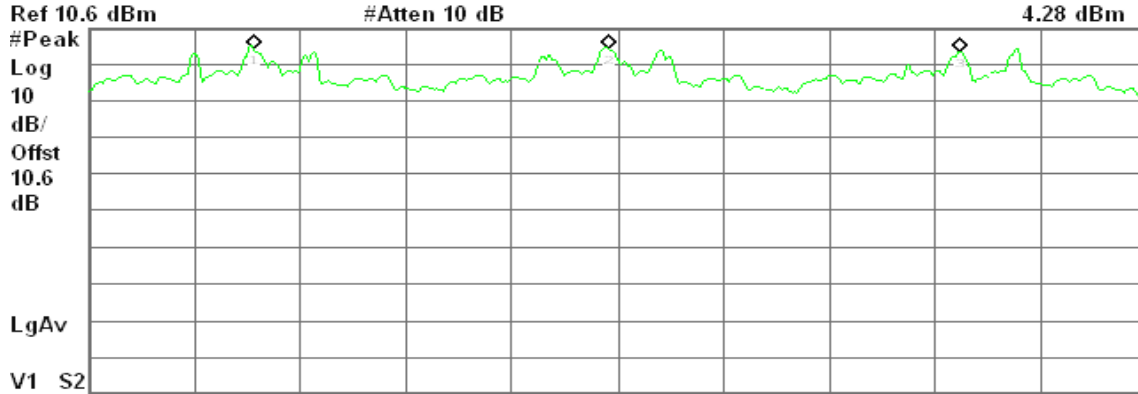

Ref 10.6 dBm #Atten 10 dB

Center 2.441 000 GHz Span 3 MHz

#Res BW 30 kHz #VBW 100 kHz Sweep 3.2 ms (601 pts)


| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|---------------|-----------|
| 1 | (1) | Freq | 2.439 970 GHz | 4.79 dBm |
| 2 | (1) | Freq | 2.440 970 GHz | 5.02 dBm |
| 3 | (1) | Freq | 2.441 970 GHz | 4.28 dBm |

Measurement of 20dB Bandwidth

Agilent 02:17:43 Oct 16, 2009

R T

Δ Mkr2 1.300 MHz

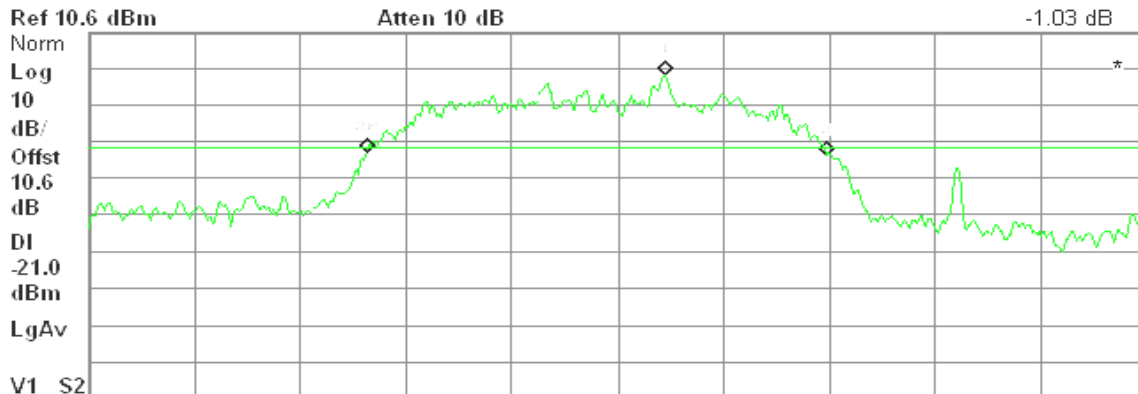

Ref 10.6 dBm Atten 10 dB

Center 2.441 000 GHz Span 3 MHz

#Res BW 10 kHz #VBW 30 kHz Sweep 28.68 ms (601 pts)

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|---------------|------------|
| 1 | (1) | Freq | 2.441 135 GHz | -1.05 dBm |
| 2R | (1) | Freq | 2.440 290 GHz | -22.25 dBm |
| 2Δ | (1) | Freq | 1.300 MHz | -1.03 dB |




7.6 NUMBER OF HOPPING FREQUENCY

LIMIT

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

Test Configuration

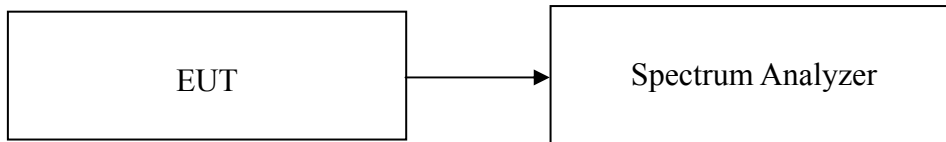

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2441.5MHz, Sweep = auto and Start=2441.5MHz, Stop = 2483.5MHz, Sweep = auto.
4. Set the spectrum analyzer as RBW, VBW=510kHz.
5. Max hold, view and count how many channel in the band.

TEST RESULTS

No non-compliance noted

Test Data

For GFSK / 8DPSK

| Result (No. of CH) | Limit (No. of CH) | Result |
|--------------------|-------------------|--------|
| 79 | >15 | PASS |



Test Plot


For GFSK

Channel Number

2.4 GHz – 2.4415 GHz

Agilent 01:22:04 Oct 16, 2009


R T

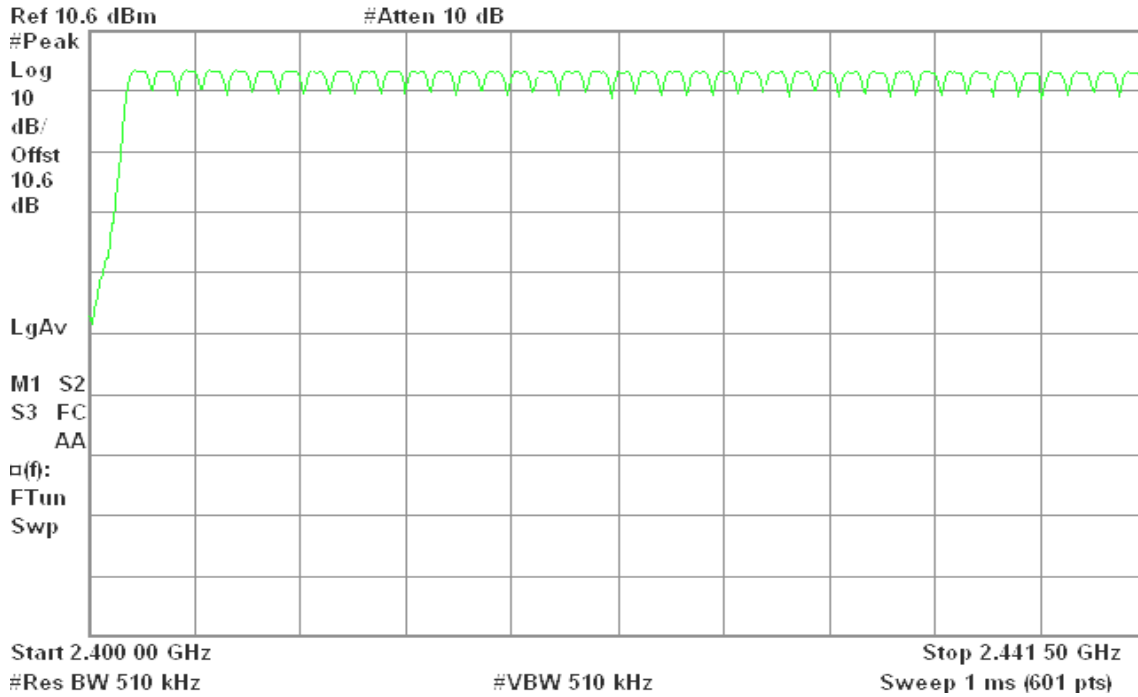

2.4415 GHz – 2.4835 GHz

Agilent 01:22:28 Oct 16, 2009

R T

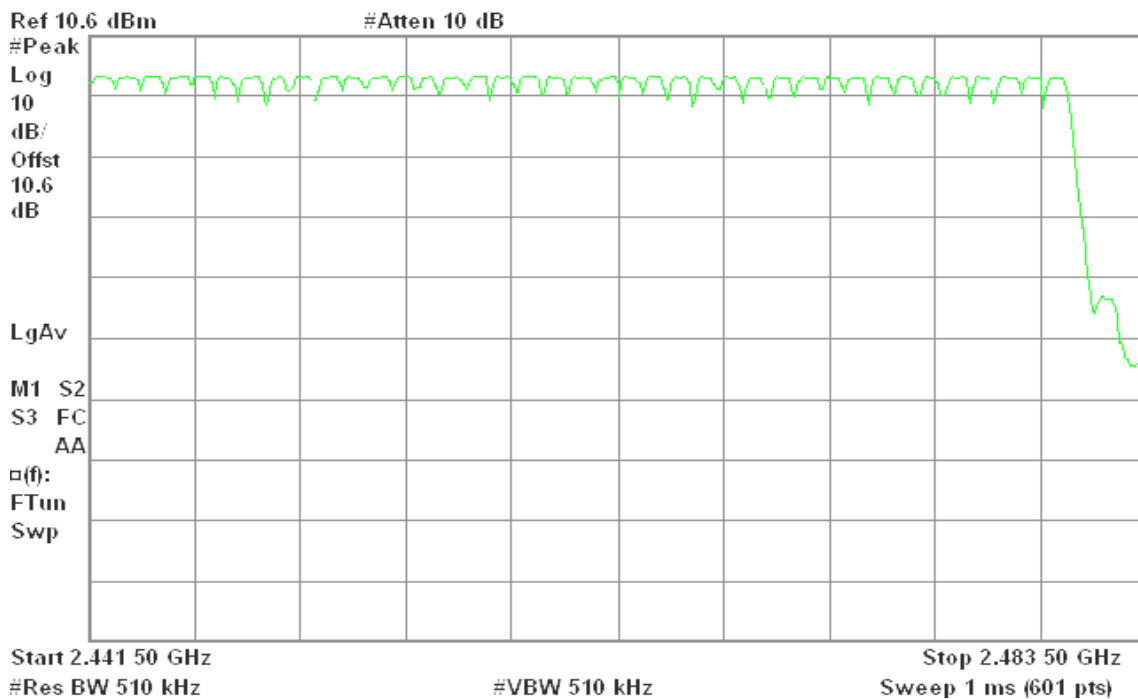




For 8DPSK

Channel Number

2.4 GHz – 2.4415 GHz

* Agilent 02:01:21 Oct 16, 2009

R T

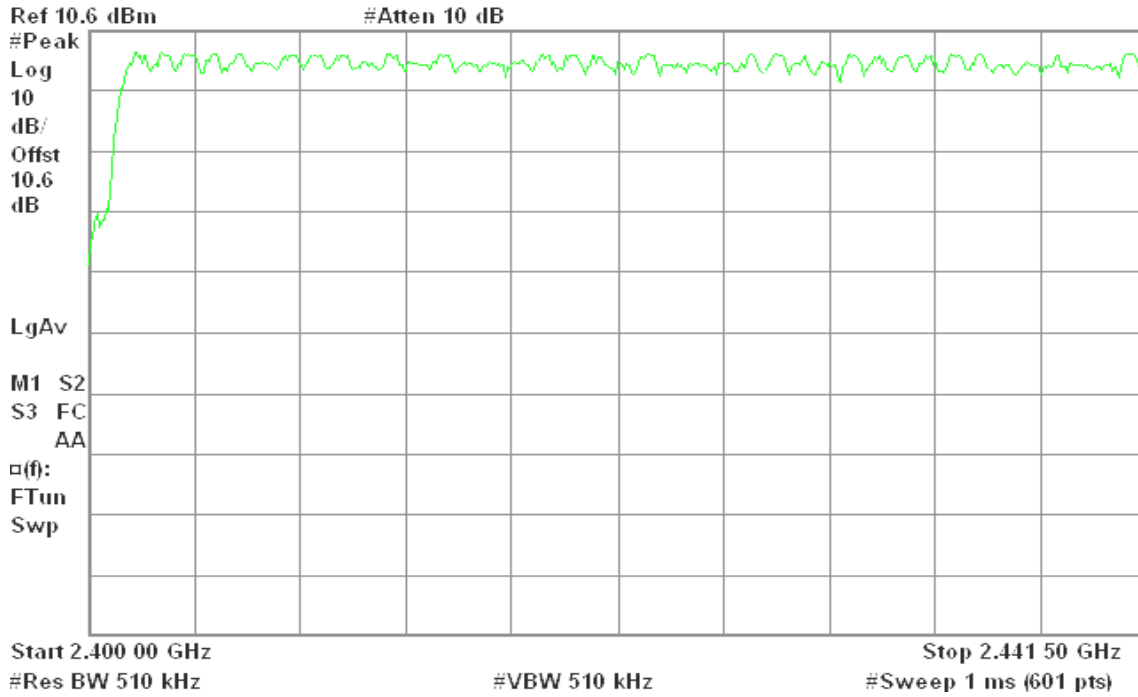

2.4415 GHz – 2.4835 GHz

* Agilent 02:02:09 Oct 16, 2009

R T






7.7 TIME OF OCCUPANCY (DWELL TIME)

LIMIT

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
5. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

No non-compliance noted



Test Data

For GFSK

DH 1

CH Low: $0.38 * (1600/2)/79 * 31.6 = 121.60$ (ms)

CH Mid: $0.40 * (1600/2)/79 * 31.6 = 128.00$ (ms)

CH High: $0.40 * (1600/2)/79 * 31.6 = 128.00$ (ms)

| CH | Pulse Time (ms) | Total of Dwell (ms) | Period Time (s) | Limit (ms) | Result |
|------|-----------------|---------------------|-----------------|------------|--------|
| Low | 0.38 | 121.60 | 31.60 | 400.00 | PASS |
| Mid | 0.40 | 128.00 | 31.60 | | PASS |
| High | 0.40 | 128.00 | 31.60 | | PASS |

DH 3

CH Low: $1.65 * (1600/4)/79 * 31.6 = 264.00$ (ms)

CH Mid: $1.65 * (1600/4)/79 * 31.6 = 264.00$ (ms)

CH High: $1.65 * (1600/4)/79 * 31.6 = 264.00$ (ms)

| CH | Pulse Time (ms) | Total of Dwell (ms) | Period Time (s) | Limit (ms) | Result |
|------|-----------------|---------------------|-----------------|------------|--------|
| Low | 1.65 | 264.00 | 31.60 | 400.00 | PASS |
| Mid | 1.65 | 264.00 | 31.60 | | PASS |
| High | 1.65 | 264.00 | 31.60 | | PASS |

DH 5

CH Low: $2.90 * (1600/6)/79 * 31.6 = 309.33$ (ms)

CH Mid: $2.90 * (1600/6)/79 * 31.6 = 309.33$ (ms)

CH High: $2.90 * (1600/6)/79 * 31.6 = 309.33$ (ms)

| CH | Pulse Time (ms) | Total of Dwell (ms) | Period Time (s) | Limit (ms) | Result |
|------|-----------------|---------------------|-----------------|------------|--------|
| Low | 2.90 | 309.33 | 31.60 | 400.00 | PASS |
| Mid | 2.90 | 309.33 | 31.60 | | PASS |
| High | 2.90 | 309.33 | 31.60 | | PASS |




Test Plot
For GFSK

DH 1

CH Low

Agilent 01:14:07 Oct 16, 2009

R T

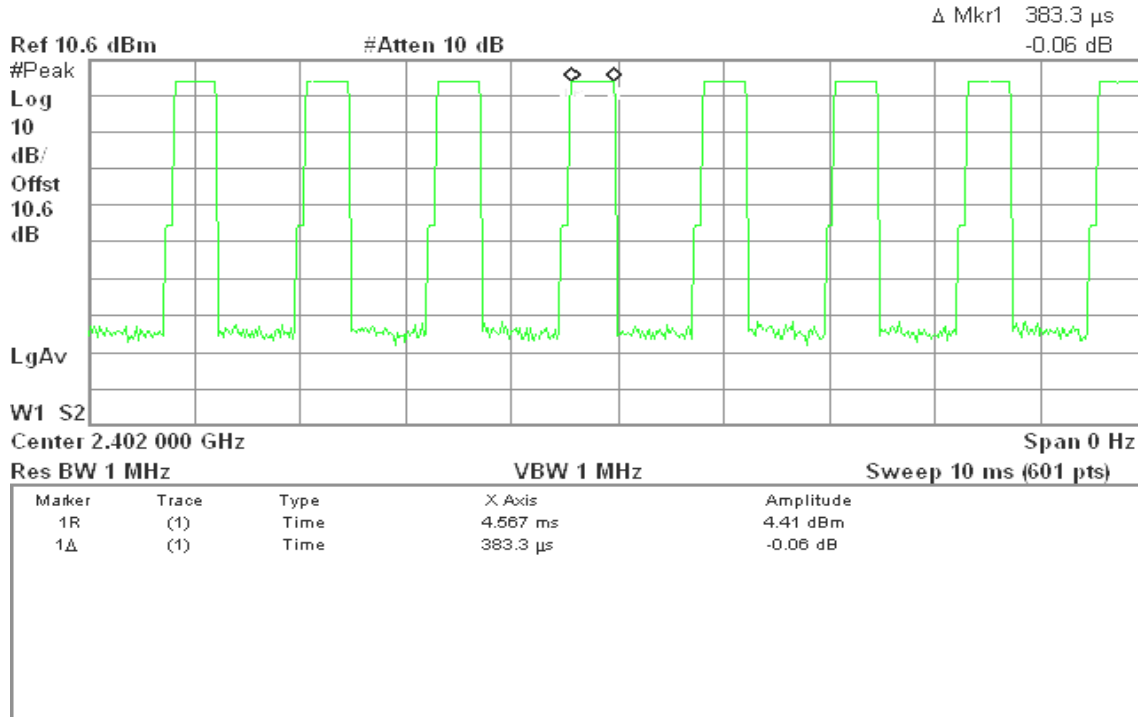

CH Mid

Agilent 01:15:10 Oct 16, 2009

R T





CH High

Agilent 01:15:49 Oct 16, 2009

R T

Δ Mkr1 400 μs
0.01 dB



Center 2.480 000 GHz Span 0 Hz
 Res BW 1 MHz VBW 1 MHz Sweep 10 ms (601 pts)

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|----------|-----------|
| 1R | (1) | Time | 4.833 ms | 4.03 dBm |
| 1Δ | (1) | Time | 400 μs | 0.01 dB |

DH 3

CH Low

Agilent 01:17:49 Oct 16, 2009

R T

Δ Mkr1 1.65 ms
0.04 dB



Center 2.402 000 GHz Span 0 Hz
 Res BW 1 MHz VBW 1 MHz Sweep 10 ms (601 pts)

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|---------|-----------|
| 1R | (1) | Time | 4.7 ms | 4.33 dBm |
| 1Δ | (1) | Time | 1.65 ms | 0.04 dB |



CH Mid

Agilent 01:18:21 Oct 16, 2009

R T

Δ Mkr1 1.65 ms
-0.05 dB



Center 2.441 000 GHz Span 0 Hz
Res BW 1 MHz VBW 1 MHz Sweep 10 ms (601 pts)

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|----------|-----------|
| 1R | (1) | Time | 4.067 ms | 5.59 dBm |
| 1Δ | (1) | Time | 1.65 ms | -0.05 dB |

CH High

Agilent 01:17:18 Oct 16, 2009

R T

Δ Mkr1 1.65 ms
-0.03 dB



Center 2.480 000 GHz Span 0 Hz
Res BW 1 MHz VBW 1 MHz Sweep 10 ms (601 pts)

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|---------|-----------|
| 1R | (1) | Time | 4.2 ms | 4.10 dBm |
| 1Δ | (1) | Time | 1.65 ms | -0.03 dB |




DH 5

CH Low

Agilent 01:19:44 Oct 16, 2009

R T

Δ Mkr1 2.9 ms
-0.24 dB

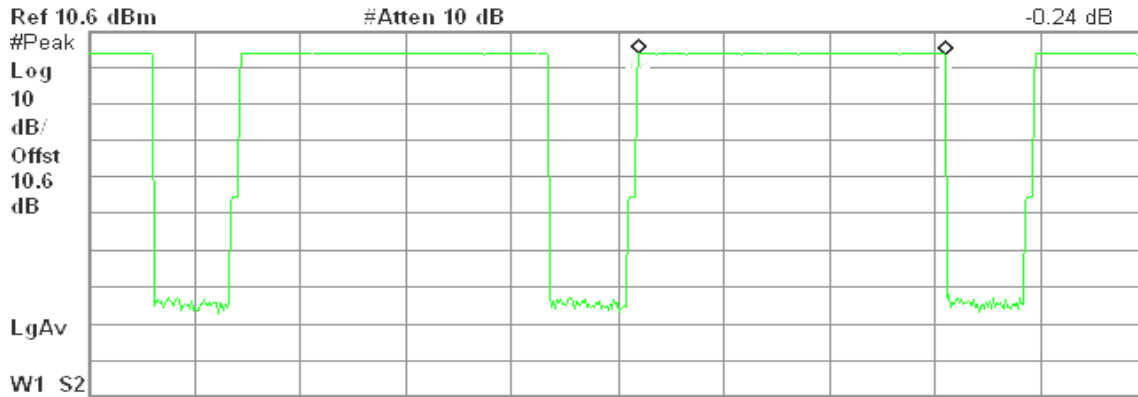

Center 2.402 000 GHz Span 0 Hz
Res BW 1 MHz VBW 1 MHz Sweep 10 ms (601 pts)


| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|--------|-----------|
| 1R | (1) | Time | 5.2 ms | 4.43 dBm |
| 1Δ | (1) | Time | 2.9 ms | -0.24 dB |

CH Mid

Agilent 01:19:12 Oct 16, 2009

R T

Δ Mkr1 2.9 ms
-0.10 dB

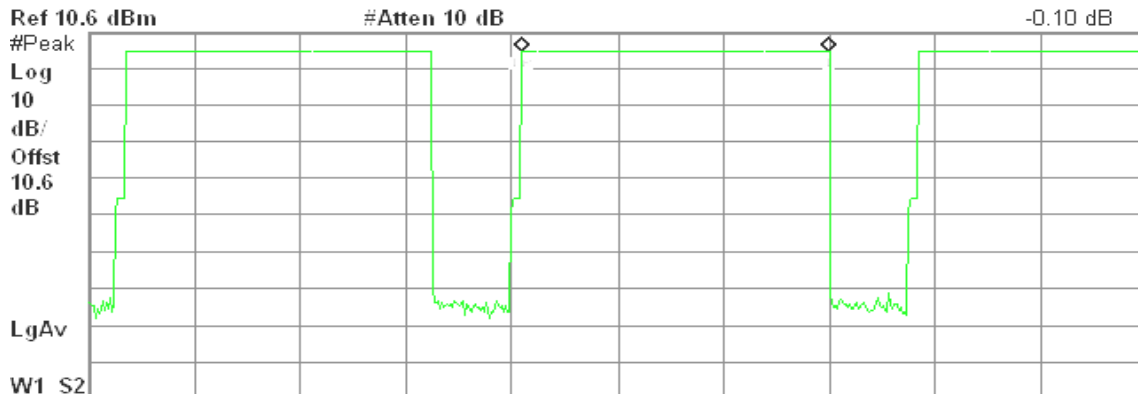

Center 2.441 000 GHz Span 0 Hz
Res BW 1 MHz VBW 1 MHz Sweep 10 ms (601 pts)

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|--------|-----------|
| 1R | (1) | Time | 4.1 ms | 5.60 dBm |
| 1Δ | (1) | Time | 2.9 ms | -0.10 dB |




CH High

Agilent 01:20:21 Oct 16, 2009

R T

Δ Mkr1 2.9 ms
-0.57 dB

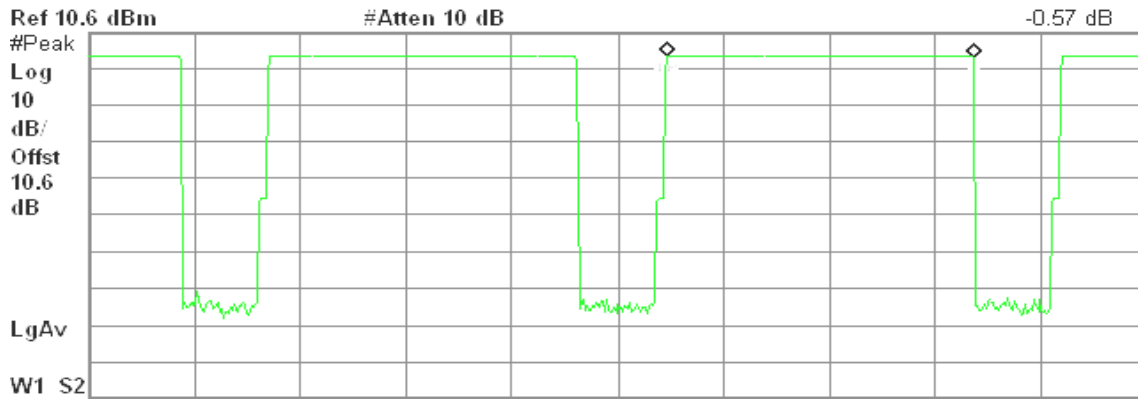

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|----------|-----------|
| 1R | (1) | Time | 5.467 ms | 4.09 dBm |
| 1Δ | (1) | Time | 2.9 ms | -0.57 dB |



Test Data

For 8DPSK

DH 1

CH Low: $0.400 * (1600/2)/79 * 31.6 = 128.00$ (ms)

CH Mid: $0.400 * (1600/2)/79 * 31.6 = 128.00$ (ms)

CH High: $0.400 * (1600/2)/79 * 31.6 = 128.00$ (ms)

| CH | Pulse Time (ms) | Total of Dwell (ms) | Period Time (s) | Limit (ms) | Result |
|------|-----------------|---------------------|-----------------|------------|--------|
| Low | 0.400 | 128.00 | 31.60 | 400.00 | PASS |
| Mid | 0.400 | 128.00 | 31.60 | | PASS |
| High | 0.400 | 128.00 | 31.60 | | PASS |

DH 3

CH Low: $1.667 * (1600/4)/79 * 31.6 = 266.720$ (ms)

CH Mid: $1.667 * (1600/4)/79 * 31.6 = 266.720$ (ms)

CH High: $1.667 * (1600/4)/79 * 31.6 = 266.720$ (ms)

| CH | Pulse Time (ms) | Total of Dwell (ms) | Period Time (s) | Limit (ms) | Result |
|------|-----------------|---------------------|-----------------|------------|--------|
| Low | 1.667 | 266.720 | 31.60 | 400.00 | PASS |
| Mid | 1.667 | 266.720 | 31.60 | | PASS |
| High | 1.667 | 266.720 | 31.60 | | PASS |

DH 5

CH Low: $2.917 * (1600/6)/79 * 31.6 = 311.147$ (ms)

CH Mid: $2.917 * (1600/6)/79 * 31.6 = 311.147$ (ms)

CH High: $2.917 * (1600/6)/79 * 31.6 = 311.147$ (ms)

| CH | Pulse Time (ms) | Total of Dwell (ms) | Period Time (s) | Limit (ms) | Result |
|------|-----------------|---------------------|-----------------|------------|--------|
| Low | 2.917 | 311.147 | 31.60 | 400.00 | PASS |
| Mid | 2.917 | 311.147 | 31.60 | | PASS |
| High | 2.917 | 311.147 | 31.60 | | PASS |



For 8DPSK


DH 1

CH Low

Agilent 02:08:20 Oct 16, 2009

R T

Δ Mkr1 400 μs
-0.10 dB

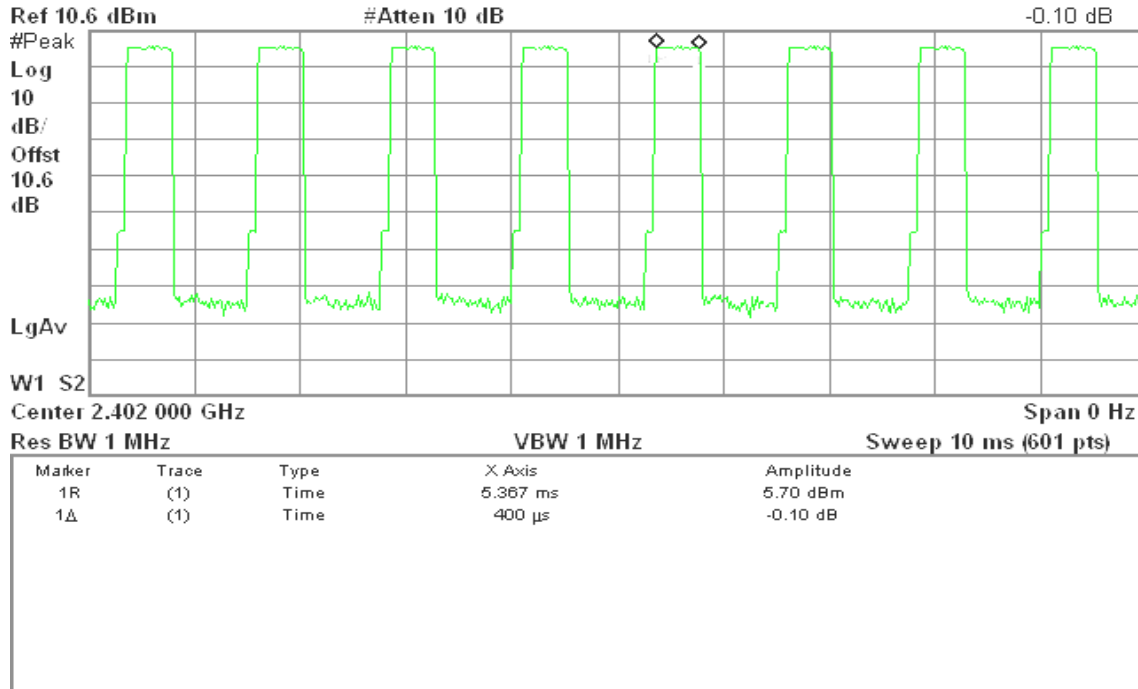


CH Mid

Agilent 02:08:57 Oct 16, 2009

R T

Δ Mkr1 400 μs
0.90 dB

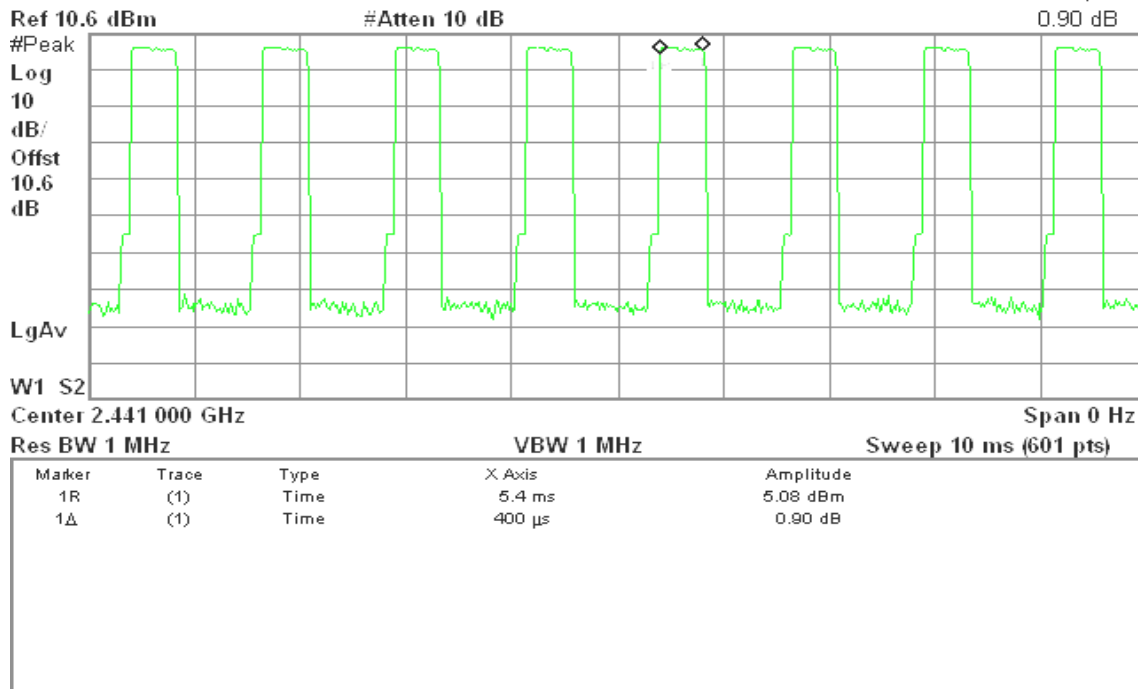



CH High

Agilent 02:09:25 Oct 16, 2009

R T

Δ Mkr1 400 μs
-0.50 dB



Center 2.480 000 GHz Res BW 1 MHz VBW 1 MHz Sweep 10 ms (601 pts) Span 0 Hz

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|----------|-----------|
| 1R | (1) | Time | 5.483 ms | 6.42 dBm |
| 1Δ | (1) | Time | 400 μs | -0.50 dB |


DH 3

CH Low

Agilent 02:07:38 Oct 16, 2009

R T

Δ Mkr1 1.667 ms
1.02 dB

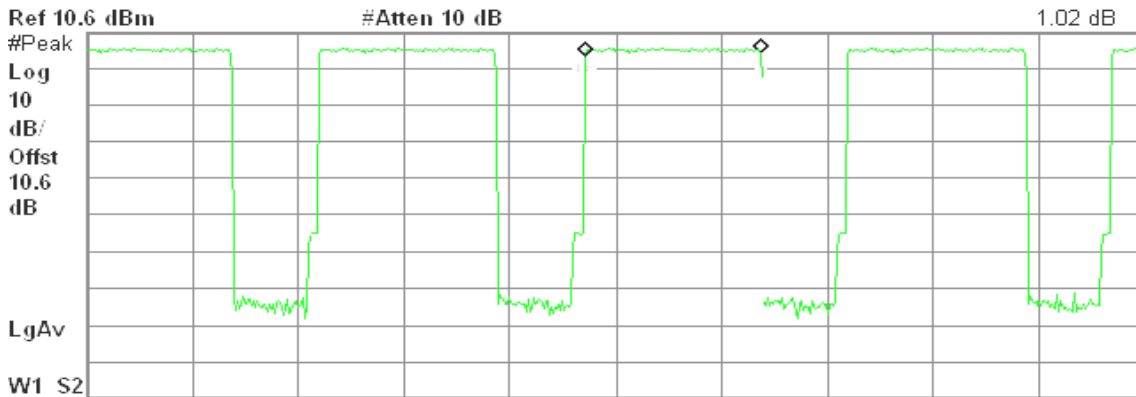

Center 2.402 000 GHz Res BW 1 MHz VBW 1 MHz Sweep 10 ms (601 pts) Span 0 Hz

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|----------|-----------|
| 1R | (1) | Time | 4.7 ms | 3.91 dBm |
| 1Δ | (1) | Time | 1.667 ms | 1.02 dB |




CH Mid

Agilent 02:07:06 Oct 16, 2009

R T

Δ Mkr1 1.667 ms
-1.49 dB

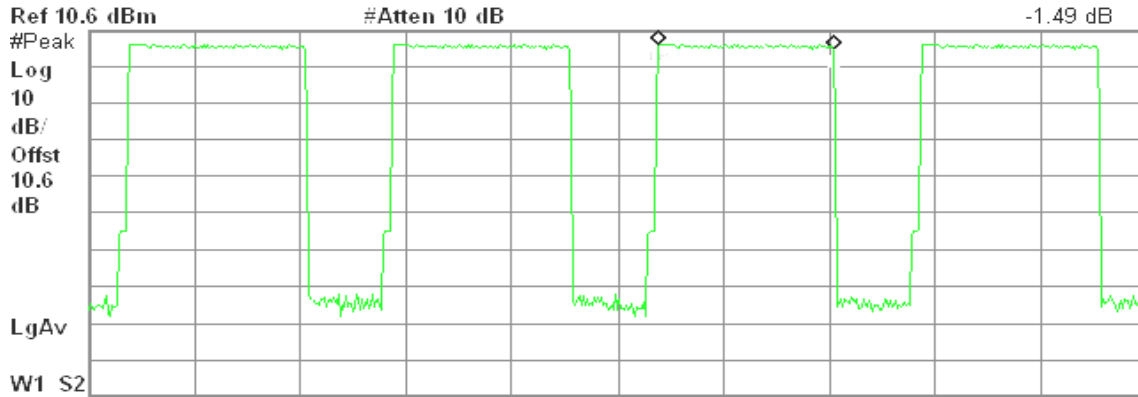

Center 2.441 000 GHz

Span 0 Hz

Res BW 1 MHz

VBW 1 MHz

Sweep 10 ms (601 pts)

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|----------|-----------|
| 1R | (1) | Time | 5.383 ms | 6.71 dBm |
| 1Δ | (1) | Time | 1.667 ms | -1.49 dB |

CH High

Agilent 02:06:18 Oct 16, 2009

R T

Δ Mkr1 1.667 ms
-1.04 dB



Start 2.480 000 GHz

Stop 2.480 000 GHz

Res BW 1 MHz

VBW 1 MHz

Sweep 10 ms (601 pts)

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|----------|-----------|
| 1R | (1) | Time | 5.483 ms | 5.91 dBm |
| 1Δ | (1) | Time | 1.667 ms | -1.04 dB |




DH 5

CH Low

Agilent 02:03:49 Oct 16, 2009


R T

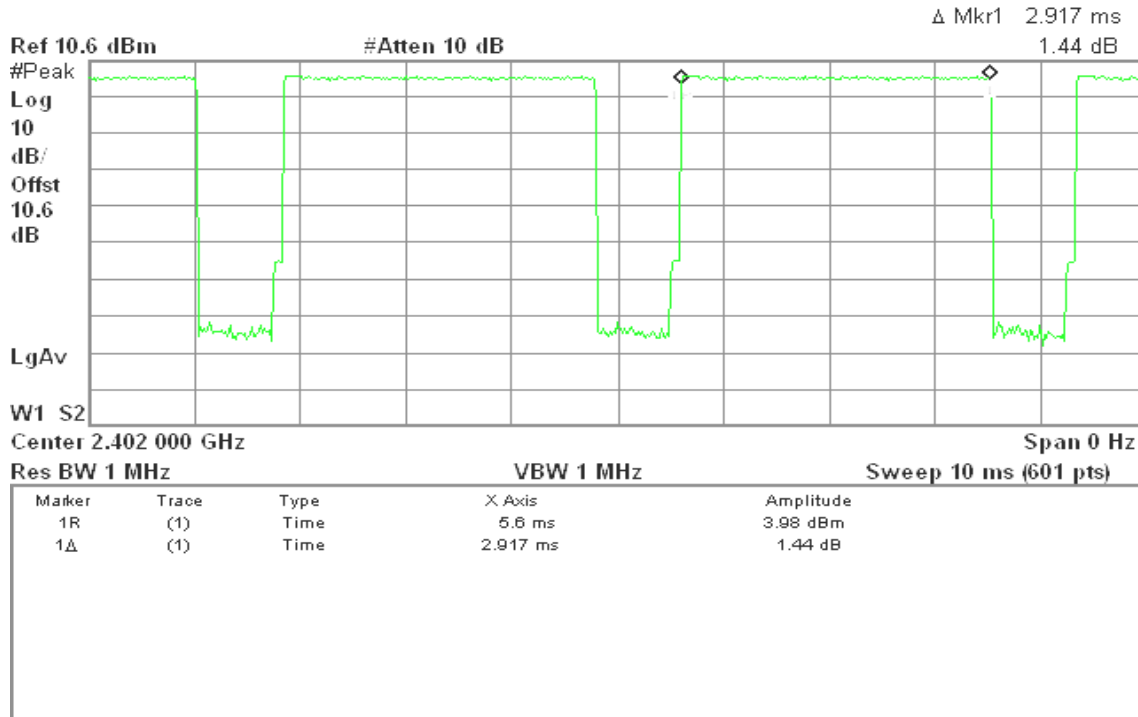

CH Mid

Agilent 02:04:40 Oct 16, 2009

R T

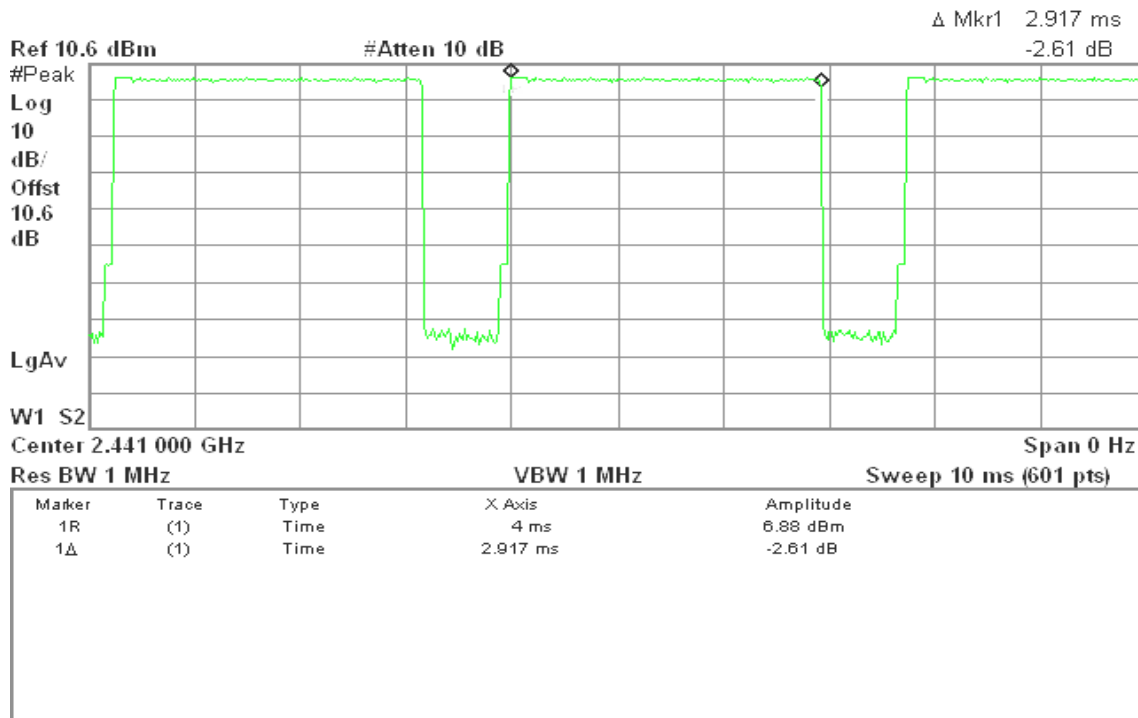



CH High

Agilent 02:05:35 Oct 16, 2009

R T

Δ Mkr1 2.917 ms
-2.10 dB



Start 2.480 000 GHz

Stop 2.480 000 GHz

Res BW 1 MHz

VBW 1 MHz

Sweep 10 ms (601 pts)

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|----------|-----------|
| 1R | (1) | Time | 4.733 ms | 6.87 dBm |
| 1Δ | (1) | Time | 2.917 ms | -2.10 dB |




7.8 SPURIOUS EMISSIONS

7.8.1 Conducted Measurement

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted




Test Plot

For GFSK / DH5

CH Low

Agilent 01:34:55 Oct 16, 2009


R T

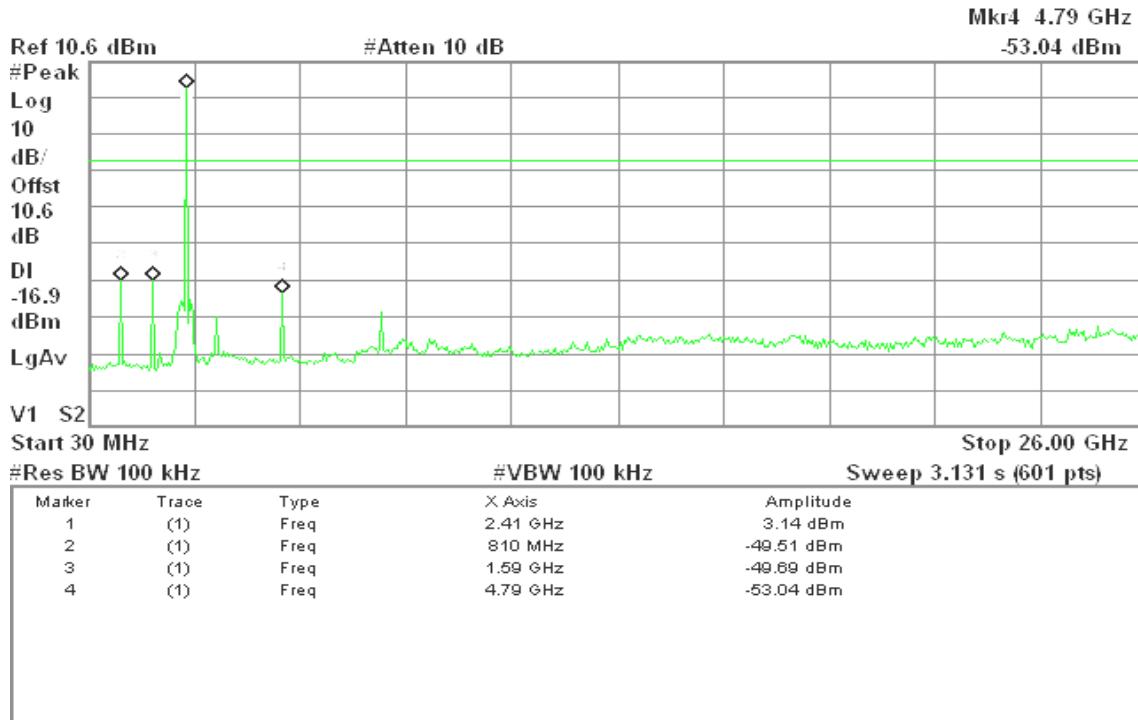

CH Mid

Agilent 01:33:18 Oct 16, 2009

R T

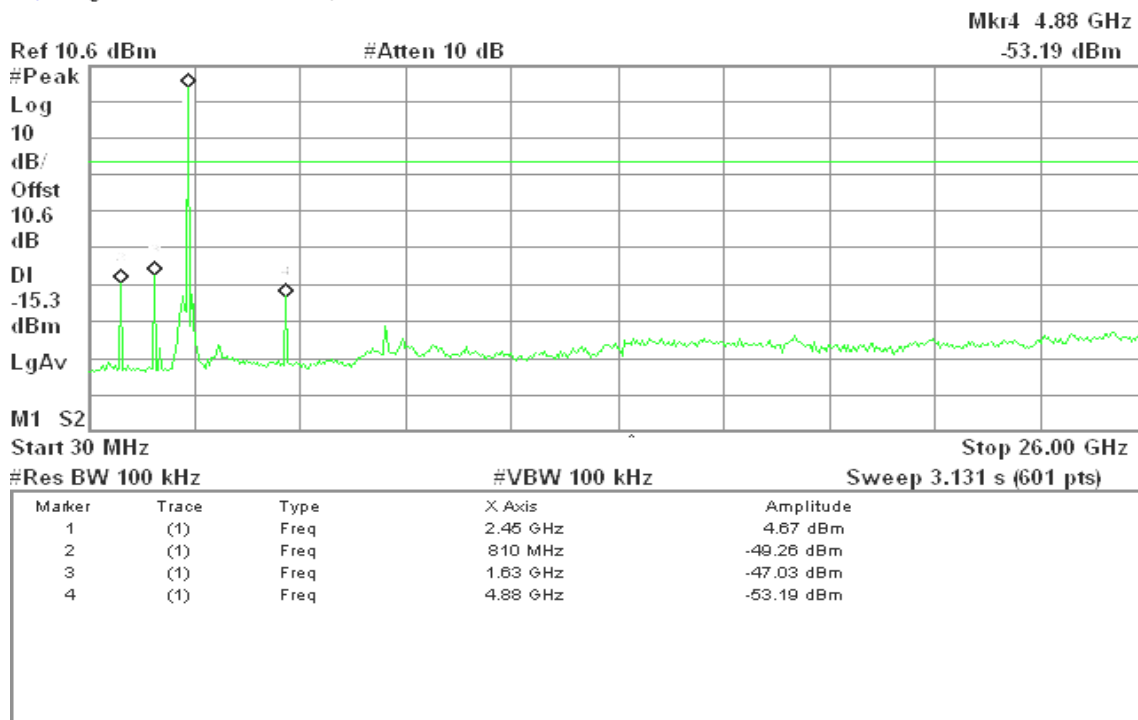




CH High

Agilent 01:35:43 Oct 16, 2009

R T

Mkr4 4.96 GHz

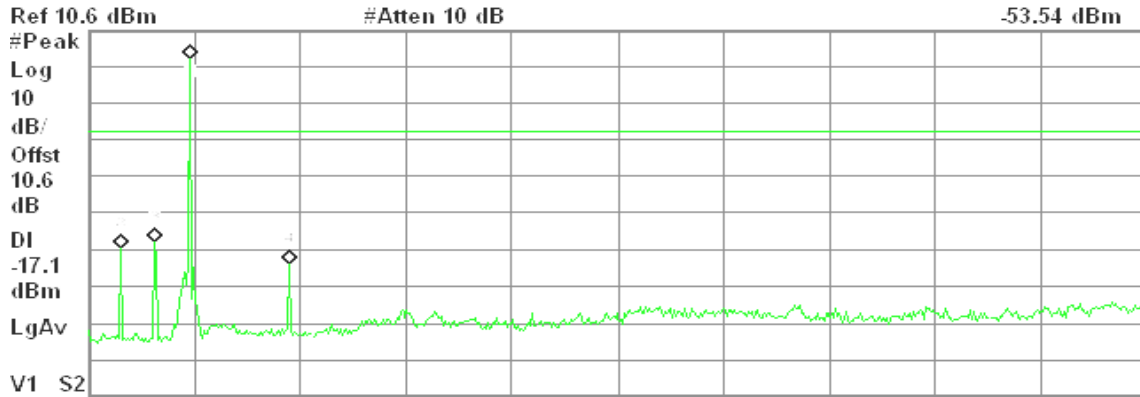

Start 30 MHz #Res BW 100 kHz #VBW 100 kHz Stop 26.00 GHz Sweep 3.131 s (601 pts)

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|----------|------------|
| 1 | (1) | Freq | 2.50 GHz | 2.89 dBm |
| 2 | (1) | Freq | 810 MHz | -49.11 dBm |
| 3 | (1) | Freq | 1.63 GHz | -47.46 dBm |
| 4 | (1) | Freq | 4.96 GHz | -53.54 dBm |




For 8DPSK / DH5

CH Low

Agilent 01:51:28 Oct 16, 2009


R T

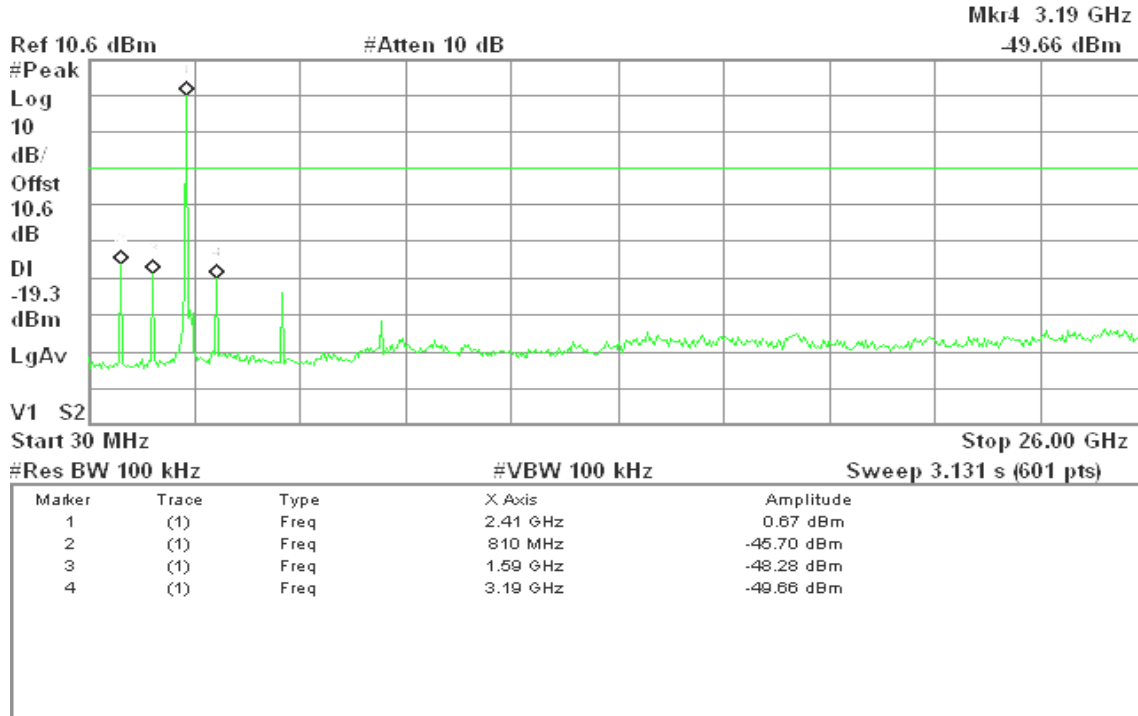

CH Mid

Agilent 01:49:54 Oct 16, 2009

R T

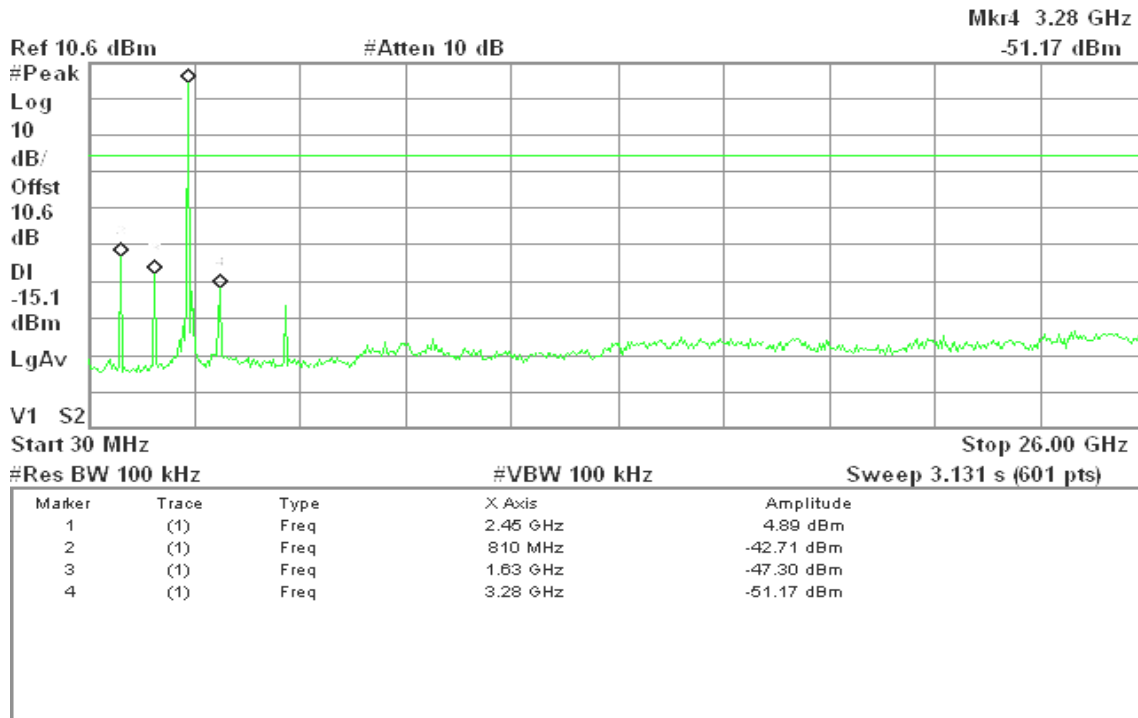




CH High

Agilent 01:50:32 Oct 16, 2009

R T

Mkr4 3.32 GHz

-58.48 dBm

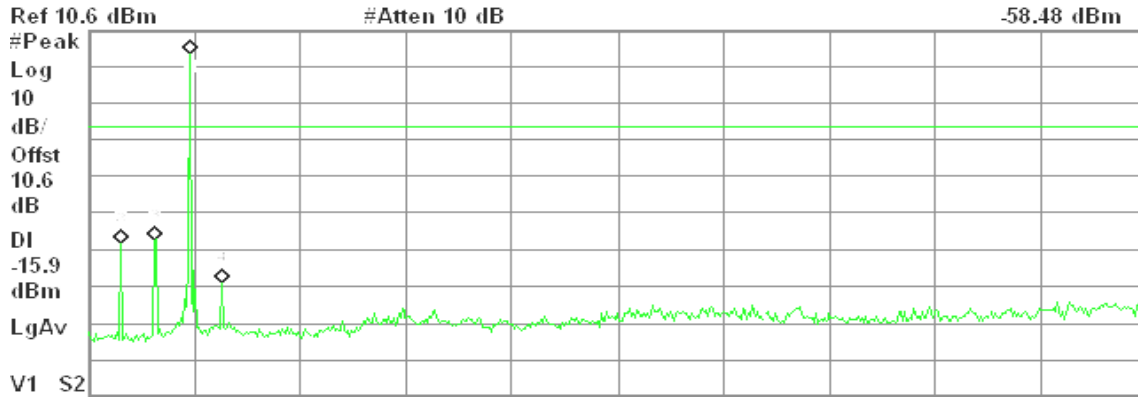

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|----------|------------|
| 1 | (1) | Freq | 2.50 GHz | 4.06 dBm |
| 2 | (1) | Freq | 810 MHz | -47.74 dBm |
| 3 | (1) | Freq | 1.63 GHz | -47.05 dBm |
| 4 | (1) | Freq | 3.32 GHz | -58.48 dBm |



7.8.2 Radiated Emissions

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength ($\mu\text{V}/\text{m}$) | Measurement Distance (m) |
|-----------------|---|--------------------------|
| 30-88 | 100* | 3 |
| 88-216 | 150* | 3 |
| 216-960 | 200* | 3 |
| Above 960 | 500 | 3 |


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.


| Frequency (MHz) | Field Strength ($\mu\text{V}/\text{m}$ at 3-meter) | Field Strength (dB $\mu\text{V}/\text{m}$ at 3-meter) |
|-----------------|---|---|
| 30-88 | 100 | 40 |
| 88-216 | 150 | 43.5 |
| 216-960 | 200 | 46 |
| Above 960 | 500 | 54 |

Test Configuration

Below 1 GHz

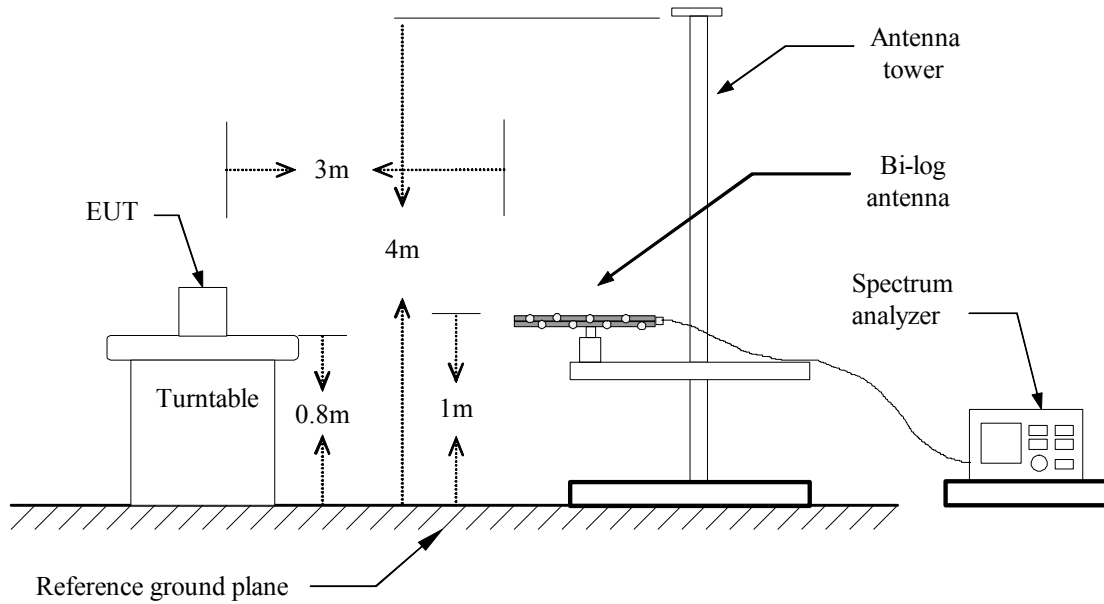

Above 1 GHz

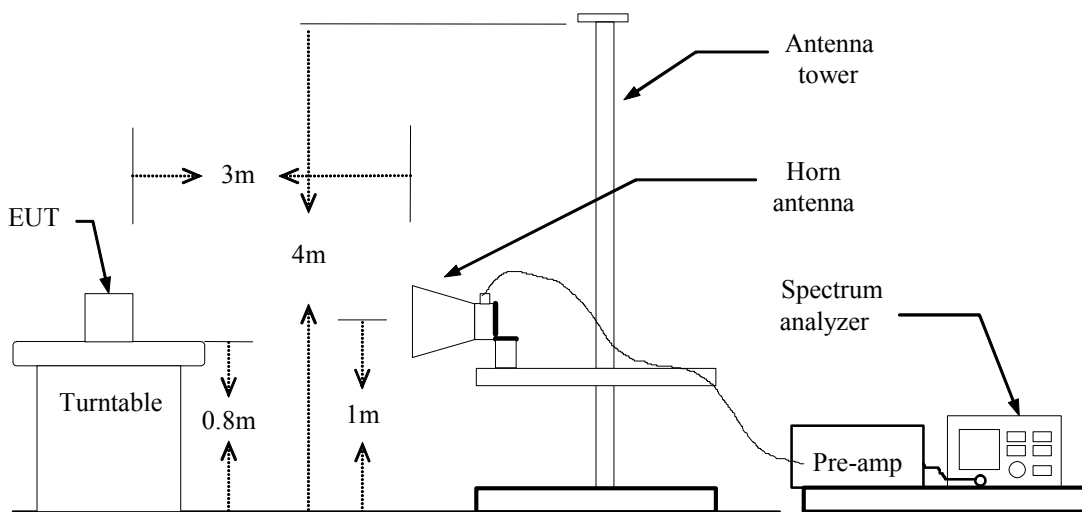



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.



Below 1 GHz

Operation Mode: Normal Link

Test Date: October 15, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|----------------|--------------------------|-----------------|----------------|-------------|--------|
| 72.03 | V | 50.67 | -14.58 | 36.09 | 40.00 | -3.91 | QP |
| 130.23 | V | 41.21 | -9.51 | 31.70 | 43.50 | -11.80 | Peak |
| 165.80 | V | 43.49 | -10.62 | 32.87 | 43.50 | -10.63 | Peak |
| 497.22 | V | 38.02 | -4.25 | 33.77 | 46.00 | -12.23 | Peak |
| 563.50 | V | 35.80 | -3.29 | 32.52 | 46.00 | -13.48 | Peak |
| 801.15 | V | 34.51 | 0.05 | 34.57 | 46.00 | -11.43 | Peak |
| 72.03 | H | 47.32 | -14.58 | 32.74 | 40.00 | -7.26 | Peak |
| 120.53 | H | 40.31 | -9.37 | 30.94 | 43.50 | -12.56 | Peak |
| 165.80 | H | 40.68 | -10.62 | 30.06 | 43.50 | -13.44 | Peak |
| 251.48 | H | 38.89 | -10.37 | 28.52 | 46.00 | -17.48 | Peak |
| 497.22 | H | 32.26 | -4.25 | 28.02 | 46.00 | -17.98 | Peak |
| 912.70 | H | 33.73 | 1.17 | 34.90 | 46.00 | -11.10 | Peak |

Remark:

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
2. Radiated emissions measured were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).



Above 1 GHz

Operation Mode: TX / GFSK / DH5 / CH Low

Test Date: October 15, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1603.33 | V | 54.98 | --- | -6.04 | 48.94 | --- | 74.00 | 54.00 | -5.06 | Peak |
| 4800.00 | V | 54.79 | 50.67 | 1.04 | 55.83 | 51.71 | 74.00 | 54.00 | -2.29 | AVG |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 1603.33 | H | 54.30 | --- | -6.04 | 48.26 | --- | 74.00 | 54.00 | -5.74 | Peak |
| 4800.00 | H | 57.68 | 51.74 | 1.04 | 58.72 | 52.78 | 74.00 | 54.00 | -1.22 | AVG |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / GFSK / DH5 / CH Mid

Test Date: October 15, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1626.67 | V | 56.22 | --- | -5.82 | 50.40 | --- | 74.00 | 54.00 | -3.60 | Peak |
| 4883.33 | V | 53.78 | 45.99 | 1.02 | 54.80 | 47.01 | 74.00 | 54.00 | -6.99 | AVG |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 1626.67 | H | 54.72 | --- | -5.82 | 48.91 | --- | 74.00 | 54.00 | -5.09 | Peak |
| 4883.33 | H | 55.31 | 50.87 | 1.02 | 56.34 | 51.89 | 74.00 | 54.00 | -2.11 | AVG |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / GFSK / DH5 / CH High

Test Date: October 15, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1653.33 | V | 57.12 | --- | -5.56 | 51.56 | --- | 74.00 | 54.00 | -2.44 | Peak |
| 4958.33 | V | 53.55 | 46.39 | 1.00 | 54.55 | 47.39 | 74.00 | 54.00 | -6.61 | AVG |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 1533.33 | H | 52.20 | --- | -6.71 | 45.49 | --- | 74.00 | 54.00 | -8.51 | Peak |
| 4958.33 | H | 59.48 | 51.45 | 1.00 | 60.48 | 52.45 | 74.00 | 54.00 | -1.55 | AVG |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / 8DPSK / DH5 / CH Low

Test Date: October 15, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1603.33 | V | 55.97 | --- | -6.04 | 49.93 | --- | 74.00 | 54.00 | -4.07 | Peak |
| 3200.00 | V | 54.38 | 43.53 | -0.21 | 54.17 | 43.32 | 74.00 | 54.00 | -10.68 | AVG |
| 4000.00 | V | 50.69 | --- | 0.52 | 51.21 | --- | 74.00 | 54.00 | -2.79 | Peak |
| 4800.00 | V | 55.38 | 48.57 | 1.04 | 56.42 | 49.61 | 74.00 | 54.00 | -4.39 | AVG |
| N/A | | | | | | | | | | |
| 1600.00 | H | 53.69 | --- | -6.07 | 47.61 | --- | 74.00 | 54.00 | -6.39 | Peak |
| 3200.00 | H | 54.25 | 48.14 | -0.21 | 54.04 | 47.93 | 74.00 | 54.00 | -6.07 | AVG |
| 4000.00 | H | 51.38 | --- | 0.52 | 51.90 | --- | 74.00 | 54.00 | -2.10 | Peak |
| 4808.33 | H | 59.13 | 51.47 | 1.04 | 60.17 | 52.51 | 74.00 | 54.00 | -1.49 | AVG |
| N/A | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / 8DPSK / DH5 / CH Mid

Test Date: October 15, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1626.67 | V | 57.33 | --- | -5.82 | 51.51 | --- | 74.00 | 54.00 | -2.49 | Peak |
| 3258.33 | V | 51.26 | --- | -0.14 | 51.12 | --- | 74.00 | 54.00 | -2.88 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 1626.67 | H | 53.92 | --- | -5.82 | 48.10 | --- | 74.00 | 54.00 | -5.90 | Peak |
| 3258.33 | H | 50.66 | --- | -0.14 | 50.52 | --- | 74.00 | 54.00 | -3.48 | Peak |
| 4883.33 | H | 56.58 | 47.50 | 1.02 | 57.61 | 48.52 | 74.00 | 54.00 | -5.48 | AVG |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / 8DPSK / DH5 / CH High

Test Date: October 15, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1653.33 | V | 59.82 | 55.72 | -5.56 | 54.26 | 50.16 | 74.00 | 54.00 | -3.84 | AVG |
| 3308.33 | V | 49.52 | --- | -0.08 | 49.43 | --- | 74.00 | 54.00 | -4.57 | Peak |
| 4958.33 | V | 51.71 | 45.08 | 1.00 | 52.71 | 46.08 | 74.00 | 54.00 | -7.92 | AVG |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 1653.33 | H | 53.72 | --- | -5.56 | 48.16 | --- | 74.00 | 54.00 | -5.84 | Peak |
| 3308.33 | H | 49.63 | --- | -0.08 | 49.55 | --- | 74.00 | 54.00 | -4.45 | Peak |
| 4958.33 | H | 58.01 | 50.59 | 1.00 | 59.01 | 51.59 | 74.00 | 54.00 | -2.41 | AVG |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



7.8.3 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| Frequency Range (MHz) | Limits (dBμV) | |
|-----------------------|---------------|-----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56* | 56 to 46* |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

Operation Mode: Normal Link

Test Date: September 10, 2009

Temperature: 25°C

Tested by: Brian Chang

Humidity: 58% RH

| Freq. (MHz) | QP Reading (dBuV) | AV Reading (dBuV) | Corr. factor (dB) | QP Result (dBuV) | AV Result (dBuV) | QP Limit (dBuV) | AV Limit (dBuV) | QP Margin (dB) | AV Margin (dB) | Note |
|-------------|-------------------|-------------------|-------------------|------------------|------------------|-----------------|-----------------|----------------|----------------|------|
| 0.220 | 43.86 | -- | 0.06 | 43.92 | -- | 62.83 | -- | -18.91 | -- | L1 |
| 0.393 | 45.41 | -- | 0.06 | 45.47 | -- | 57.99 | -- | -12.52 | -- | L1 |
| 0.471 | 51.03 | 31.02 | 0.07 | 51.10 | 31.09 | 56.49 | 46.49 | -5.39 | -15.40 | L1 |
| 0.518 | 50.13 | 32.32 | 0.08 | 50.21 | 32.40 | 56.00 | 46.00 | -5.79 | -13.60 | L1 |
| 0.579 | 46.90 | 28.06 | 0.08 | 46.98 | 28.14 | 56.00 | 46.00 | -9.02 | -17.86 | L1 |
| 2.237 | 44.40 | -- | 0.17 | 44.57 | -- | 56.00 | -- | -11.43 | -- | L1 |
| 0.396 | 39.52 | -- | 0.07 | 39.59 | -- | 57.95 | -- | -18.36 | -- | L2 |
| 0.479 | 45.42 | -- | 0.08 | 45.50 | -- | 56.36 | -- | -10.86 | -- | L2 |
| 0.502 | 44.31 | -- | 0.08 | 44.39 | -- | 56.00 | -- | -11.61 | -- | L2 |
| 0.968 | 45.37 | -- | 0.11 | 45.48 | -- | 56.00 | -- | -10.52 | -- | L2 |
| 2.396 | 40.52 | -- | 0.17 | 40.69 | -- | 56.00 | -- | -15.31 | -- | L2 |
| 8.501 | 37.34 | -- | 0.44 | 37.78 | -- | 60.00 | -- | -22.22 | -- | L2 |


Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)




Test Plots

Conducted emissions (Line 1)

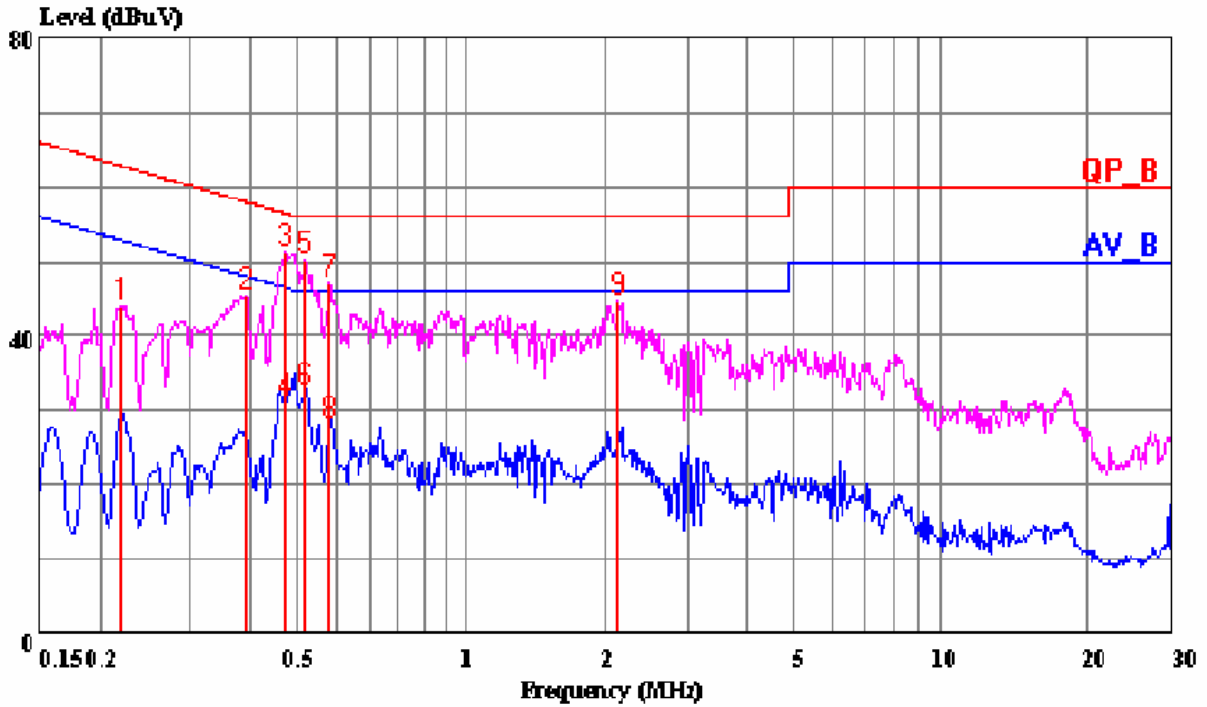

Conducted emissions (Line 2)

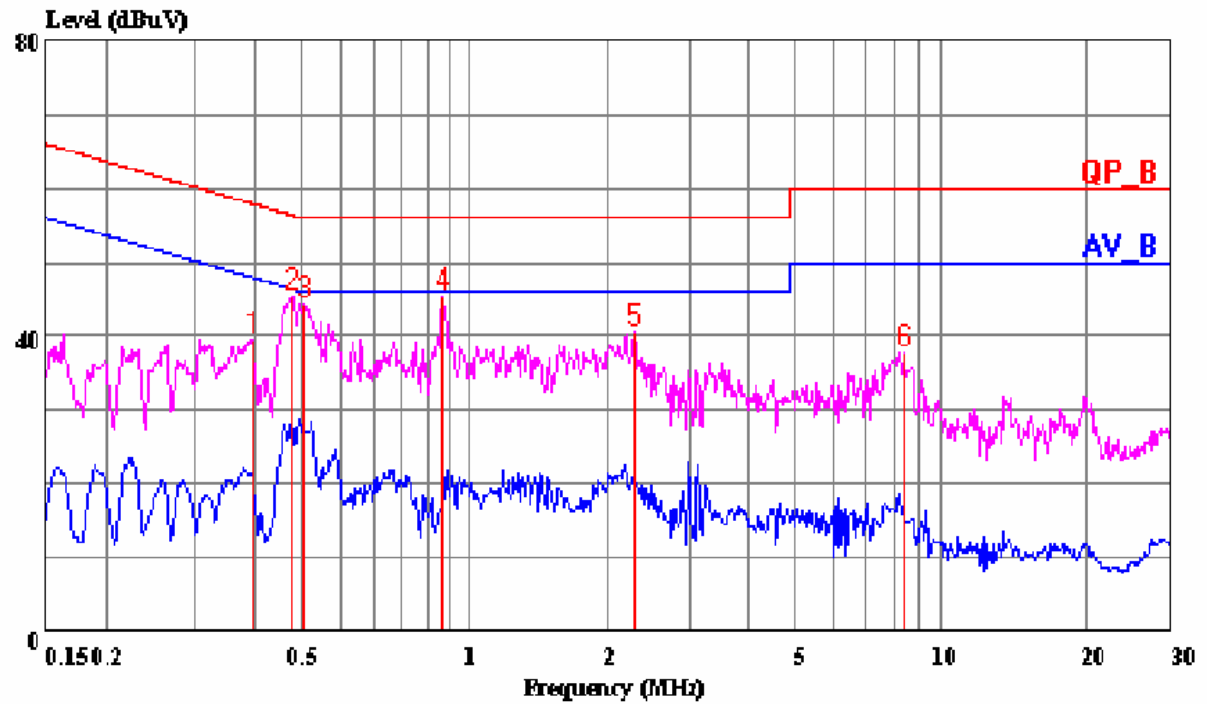



APPENDIX I RADIO FREQUENCY EXPOSURE

LIMIT

According to §15.247(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this chapter.

EUT Specification

| | |
|-----------------------------------|---|
| EUT | Portable Data Collector |
| Frequency band (Operating) | <input type="checkbox"/> WLAN: 2.412GHz ~ 2.462GHz <input type="checkbox"/> WLAN: 5.18GHz ~ 5.32GHz / 5.50GHz ~ 5.70GHz <input type="checkbox"/> WLAN: 5.745GHz ~ 5.825GHz <input checked="" type="checkbox"/> Others: <u>Bluetooth: 2.402GHz ~ 2.480GHz</u> |
| Device category | <input checked="" type="checkbox"/> Portable (<20cm separation) <input type="checkbox"/> Mobile (>20cm separation) <input type="checkbox"/> Others _____ |
| Exposure classification | <input type="checkbox"/> Occupational/Controlled exposure ($S = 5mW/cm^2$) <input checked="" type="checkbox"/> General Population/Uncontrolled exposure ($S = 1mW/cm^2$) |
| Antenna diversity | <input checked="" type="checkbox"/> Single antenna <input type="checkbox"/> Multiple antennas <input type="checkbox"/> Tx diversity <input type="checkbox"/> Rx diversity <input type="checkbox"/> Tx/Rx diversity |
| Max. output power | 6.93 dBm (4.9317mW) |
| Antenna gain (Max) | 1.5 dBi (Numeric gain: 1.41) |
| Evaluation applied | <input type="checkbox"/> MPE Evaluation <input type="checkbox"/> SAR Evaluation <input checked="" type="checkbox"/> N/A* |

Remark:

1. The maximum output power is 6.93dBm (4.9317mW) at 2480MHz (with 1.41 numeric antenna gain.)
2. DTS device is not subject to routine RF evaluation; MPE estimate is used to justify the compliance.
3. For mobile or fixed location transmitters, no SAR consideration applied. The maximum power density is $1.0 mW/cm^2$ even if the calculation indicates that the power density would be larger.

TEST RESULTS

No non-compliance noted.

(SAR evaluation is not required for the PORTABLE device while its maximum output power is lower than the general population low threshold: $60/f_{(GHz)} = 60/2.441 = 24.58mW$)