

## TEST REPORT

ACCORDING TO: FCC CFR 47 PART 15 Subpart C, section 15.225 and subpart B

FOR:

**On Track Innovations Ltd.**

**Card reader**

**Model:Saturn 6500**

This report is in conformity with ISO/ IEC 17025. The A2LA logo endorsement applies only to the test methods and the standards that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.  
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

## Table of contents

|     |                                                                           |    |
|-----|---------------------------------------------------------------------------|----|
| 1   | Applicant information .....                                               | 3  |
| 2   | Equipment under test attributes .....                                     | 3  |
| 3   | Manufacturer information .....                                            | 3  |
| 4   | Test details .....                                                        | 3  |
| 5   | Tests summary .....                                                       | 4  |
| 6   | EUT description .....                                                     | 5  |
| 6.1 | General information .....                                                 | 5  |
| 6.2 | Ports and lines .....                                                     | 5  |
| 6.3 | Support and test equipment .....                                          | 5  |
| 6.4 | Operating frequencies .....                                               | 5  |
| 6.5 | Test configuration .....                                                  | 6  |
| 6.6 | Transmitter characteristics .....                                         | 7  |
| 7   | Transmitter tests according to 47CFR part 15 subpart C requirements ..... | 8  |
| 7.1 | In band radiated emissions .....                                          | 8  |
| 7.2 | Out of band radiated emissions .....                                      | 12 |
| 7.3 | Frequency stability test .....                                            | 17 |
| 7.4 | Conducted emissions .....                                                 | 19 |
| 8   | Emission tests according to 47CFR part 15 subpart B requirements .....    | 25 |
| 8.1 | Conducted emissions .....                                                 | 25 |
| 8.2 | Radiated emission measurements .....                                      | 31 |
| 9   | APPENDIX A Test facility description .....                                | 35 |
| 10  | APPENDIX B Specification references .....                                 | 35 |
| 11  | APPENDIX C Test equipment and ancillaries used for tests .....            | 36 |
| 12  | APPENDIX D Test equipment correction factors .....                        | 38 |
| 13  | APPENDIX E Measurement uncertainties .....                                | 50 |
| 14  | APPENDIX F Abbreviations and acronyms .....                               | 51 |

## 1 Applicant information

**Client name:** On Track Innovations Ltd.  
**Address:** P.O.B. 32, ZHR Industrial Zone, Rosh Pina 12000, Israel  
**Telephone:** +972 4686 8000  
**Fax:** +972 4693 8887  
**E-mail:** h\_itay@otiglobal.com  
**Contact name:** Mr. Hemy Itay

## 2 Equipment under test attributes

**Product name:** Card reader  
**Product type:** Transceiver  
**Model(s):** Saturn 6500  
**Serial number:** 6580000CDV1.0  
**Part number:** 10065800  
**Receipt date** 9/27/2006

## 3 Manufacturer information

**Manufacturer name:** On Track Innovations Ltd.  
**Address:** P.O.B. 32, ZHR Industrial Zone, Rosh Pina, Index 12000, Israel  
**Telephone:** +972 4686 8000  
**Fax:** +972 4693 8887  
**E-Mail:** h\_itay@otiglobal.com  
**Contact name:** Mr. Hemy Itay

## 4 Test details

**Project ID:** 17417  
**Location:** Hermon Laboratories Ltd. P.O.Box 23, Binyamina 30550, Israel  
**Test started:** 9/27/2006  
**Test completed:** 12/24/2006  
**Test specification(s):** FCC Part 15, subpart C, §15.225; subpart B, §15.107, §15.109

## 5 Tests summary

| Test                                                   | Status |
|--------------------------------------------------------|--------|
| <b>Transmitter characteristics</b>                     |        |
| Sections 15.225(a) (b) (c), In band radiated emissions | Pass   |
| Sections 15.225(d), Out of band radiated emissions     | Pass   |
| Section 15.225(e), Frequency stability                 | Pass   |
| Section 15.207(a), Conducted emission                  | Pass   |
| <b>Unintentional emissions</b>                         |        |
| Section 15.107, Conducted emission at AC power port    | Pass   |
| Section 15.109, Radiated emission                      | Pass   |

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.  
The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

|                     | Name and Title                              | Date              | Signature                                                                             |
|---------------------|---------------------------------------------|-------------------|---------------------------------------------------------------------------------------|
| <b>Tested by:</b>   | Mr. P. Kagan, test engineer                 | December 24, 2006 |   |
| <b>Reviewed by:</b> | Mrs. M. Cherniavsky, certification engineer | January 7, 2007   |  |
| <b>Approved by:</b> | Mr. M. Nikishin, EMC and Radio group leader | January 8, 2007   |  |

## 6 EUT description

### 6.1 General information

The product is a smart card reader designed for contactless (proximity transceiver 13.56 MHz) and contact (magnetic card) payment and loyalty applications. The device is powered from mains via AC/DC adapter.

### 6.2 Ports and lines

| Port type | Port description | Connected     |                              | Connector type | Qty. | Cable type | Cable length | Indoor / outdoor |
|-----------|------------------|---------------|------------------------------|----------------|------|------------|--------------|------------------|
|           |                  | From          | To                           |                |      |            |              |                  |
| Signal    | 12 VDC+data      | EUT           | Connector                    | RS232+DC       | 1    | shielded   | 0.8 m        | Indoor           |
| Signal    | RS232            | Connector     | Laptop via RS232/USB adapter | D-type 9 pin   | 1    | shielded   | 2 m          | Indoor           |
| Power     | 12 VDC           | Connector     | AC/DC adapter                | DC jack        | 1    | Unshielded | 1.5 m        | Indoor           |
| Power     | AC mains         | AC/DC adapter | AC mains                     | IEC 60320      | 1    | Unshielded | 1 m          | Indoor           |


### 6.3 Support and test equipment

| Description   | Manufacturer | Model number     | Serial number |
|---------------|--------------|------------------|---------------|
| Laptop        | Dell         | D420             | NA            |
| AC/DC adapter | NA           | 4824-1207        | NA            |
| Mouse         | Microsoft    | Optical USB 1.1A | 5618          |

### 6.4 Operating frequencies

| Source        | Frequency, MHz |    |
|---------------|----------------|----|
| Radio portion | 13.56          |    |
| Digital clock | 4              | 24 |

## 6.5 Test configuration

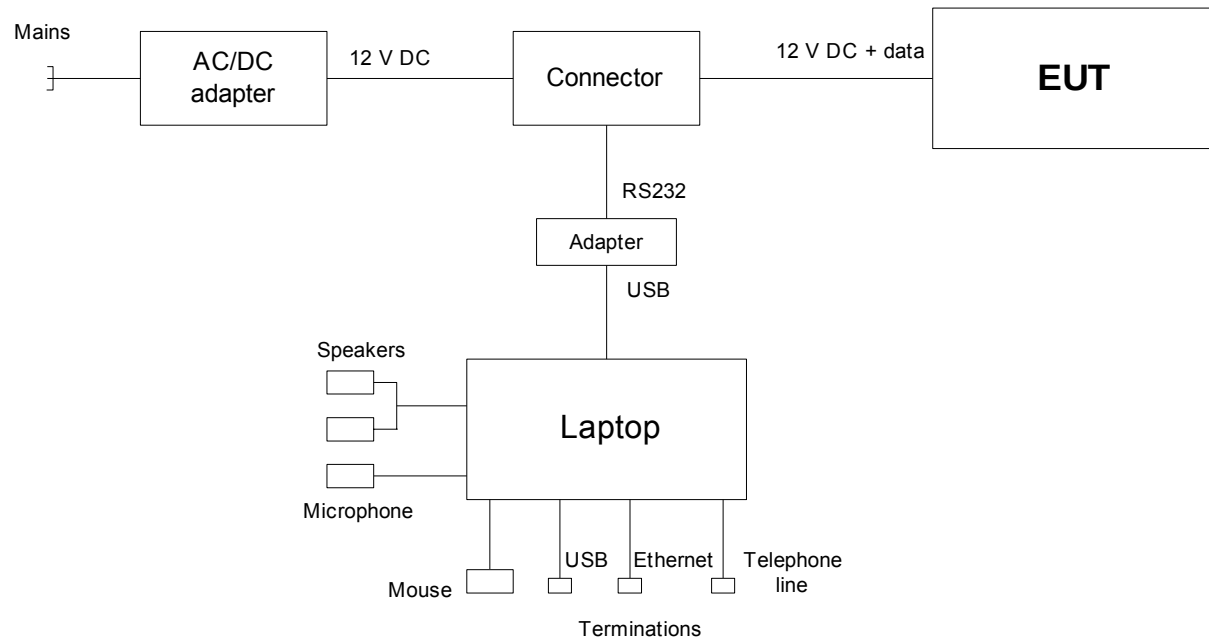

## 6.6 Transmitter characteristics

|                                                 |                                                                                                          |                                                           |              |                                                               |       |
|-------------------------------------------------|----------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|--------------|---------------------------------------------------------------|-------|
| <b>Type of equipment</b>                        |                                                                                                          |                                                           |              |                                                               |       |
| <b>V</b>                                        | Stand-alone (Equipment with or without its own control provisions)                                       |                                                           |              |                                                               |       |
|                                                 | Combined equipment (Equipment where the radio part is fully integrated within another type of equipment) |                                                           |              |                                                               |       |
|                                                 | Plug-in card (Equipment intended for a variety of host systems)                                          |                                                           |              |                                                               |       |
| <b>Intended use</b>                             |                                                                                                          | <b>Condition of use</b>                                   |              |                                                               |       |
|                                                 | Fixed                                                                                                    | Always at a distance more than 2 m from all people        |              |                                                               |       |
| <b>V</b>                                        | mobile                                                                                                   | Always at a distance more than 20 cm from all people      |              |                                                               |       |
|                                                 | portable                                                                                                 | May operate at a distance closer than 20 cm to human body |              |                                                               |       |
| <b>Assigned frequency range</b>                 |                                                                                                          | 13.56 MHz                                                 |              |                                                               |       |
| <b>Operating frequency range</b>                |                                                                                                          | 13.56 MHz                                                 |              |                                                               |       |
| <b>Maximum field strength</b>                   |                                                                                                          | at 3 m test distance                                      |              | 81 dB(μV/m)                                                   |       |
| <b>Is transmitter output power variable?</b>    |                                                                                                          | <b>V</b>                                                  | No           |                                                               |       |
|                                                 |                                                                                                          |                                                           | Yes          | continuous variable                                           |       |
|                                                 |                                                                                                          | stepped variable with stepsize                            |              |                                                               |       |
|                                                 |                                                                                                          | minimum RF power                                          |              |                                                               |       |
|                                                 |                                                                                                          | maximum RF power                                          |              |                                                               |       |
| <b>Antenna connection</b>                       |                                                                                                          |                                                           |              |                                                               |       |
| <b>V</b>                                        | unique coupling                                                                                          | standard connector                                        | Integral     | with temporary RF connector<br>without temporary RF connector |       |
| <b>Antenna/s technical characteristics</b>      |                                                                                                          |                                                           |              |                                                               |       |
| Type                                            | Manufacturer                                                                                             |                                                           | Model number |                                                               | Gain  |
| Loop                                            | On Track Innovations                                                                                     |                                                           | NA           |                                                               | NA    |
| <b>Type of modulation</b>                       |                                                                                                          |                                                           | ASK          |                                                               |       |
| <b>Type of multiplexing</b>                     |                                                                                                          |                                                           | TDMA         |                                                               |       |
| <b>Transmitter duty cycle supplied for test</b> |                                                                                                          |                                                           | 100%         |                                                               |       |
| <b>Transmitter power source</b>                 |                                                                                                          |                                                           |              |                                                               |       |
|                                                 | Battery                                                                                                  | Nominal rated voltage                                     |              | Battery type                                                  |       |
|                                                 | DC                                                                                                       | Nominal rated voltage                                     |              |                                                               |       |
| <b>V</b>                                        | AC mains                                                                                                 | Nominal rated voltage                                     | 120 V        | Frequency                                                     | 60 Hz |

|                            |                               |                                                               |                              |
|----------------------------|-------------------------------|---------------------------------------------------------------|------------------------------|
| <b>Test specification:</b> |                               | <b>Sections 15.225(a) (b) (c), In band radiated emissions</b> |                              |
| <b>Test procedure:</b>     |                               | ANSI C63.4, Sections 5.3 and 13.1.4                           |                              |
| <b>Test mode:</b>          | Compliance                    | <b>Verdict:</b>                                               | <b>PASS</b>                  |
| <b>Date &amp; Time:</b>    | 12/12/2006 9:15:00 AM         |                                                               |                              |
| <b>Temperature:</b> 22°C   | <b>Air Pressure:</b> 1010 hPa | <b>Relative Humidity:</b> 48 %                                | <b>Power Supply:</b> 120 VAC |
| <b>Remarks:</b>            |                               |                                                               |                              |

## 7 Transmitter tests according to 47CFR part 15 subpart C requirements

### 7.1 In band radiated emissions

#### 7.1.1 General

This test was performed to measure field strength of fundamental emission and modulation products from the EUT within the assigned band. Specification test limits are given in Table 7.1.1.

Table 7.1.1 Radiated emission limits

| Frequency,<br>MHz      | Field strength at 30 m distance* |             | Field strength at 3 m distance* |              |
|------------------------|----------------------------------|-------------|---------------------------------|--------------|
|                        | μV/m                             | dB(μV/m)    | μV/m                            | dB(μV/m)**   |
| 13.110 – 13.410        | 106                              | 40.5        | 10600                           | 80.5         |
| 13.410 – 13.553        | 334                              | 50.5        | 33400                           | 90.5         |
| <b>13.553 – 13.567</b> | <b>15848</b>                     | <b>84.0</b> | <b>1584800</b>                  | <b>124.0</b> |
| 13.567 – 13.710        | 334                              | 50.5        | 33400                           | 90.5         |
| 13.710 – 14.010        | 106                              | 40.5        | 10600                           | 80.5         |

\*- The limit is provided in quasi peak values.

\*\* - The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log (S_1/S_2),$$

where  $S_1$  and  $S_2$  – standard defined and test distance respectively in meters.

#### 7.1.2 Test procedure

7.1.2.1 The EUT was set up as shown in Figure 7.1.1 energized and the performance check was conducted.


7.1.2.2 The specified frequency range was investigated with loop antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna was rotated around its vertical axis and the measuring antenna polarization was switched from vertical to horizontal.

7.1.2.3 The worst test results (the lowest margins) were recorded in Table 7.1.2 and shown in the associated plots.



|                            |                               |                                                               |                              |
|----------------------------|-------------------------------|---------------------------------------------------------------|------------------------------|
| <b>Test specification:</b> |                               | <b>Sections 15.225(a) (b) (c), In band radiated emissions</b> |                              |
| <b>Test procedure:</b>     |                               | ANSI C63.4, Sections 5.3 and 13.1.4                           |                              |
| <b>Test mode:</b>          |                               | Compliance                                                    | <b>Verdict:</b> PASS         |
| <b>Date &amp; Time:</b>    |                               | 12/12/2006 9:15:00 AM                                         |                              |
| <b>Temperature:</b> 22°C   | <b>Air Pressure:</b> 1010 hPa | <b>Relative Humidity:</b> 48 %                                | <b>Power Supply:</b> 120 VAC |
| <b>Remarks:</b>            |                               |                                                               |                              |

Figure 7.1.1 Setup for in band radiated emission measurements

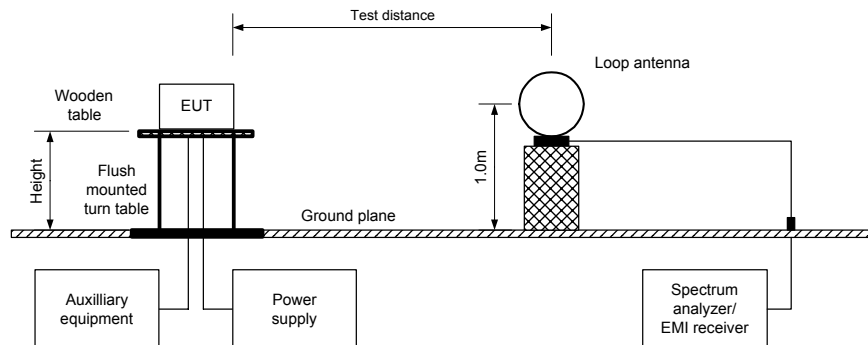

|                            |                               |                                                               |                              |
|----------------------------|-------------------------------|---------------------------------------------------------------|------------------------------|
| <b>Test specification:</b> |                               | <b>Sections 15.225(a) (b) (c), In band radiated emissions</b> |                              |
| <b>Test procedure:</b>     |                               | ANSI C63.4, Sections 5.3 and 13.1.4                           |                              |
| <b>Test mode:</b>          | Compliance                    | <b>Verdict:</b>                                               | <b>PASS</b>                  |
| <b>Date &amp; Time:</b>    | 12/12/2006 9:15:00 AM         |                                                               |                              |
| <b>Temperature:</b> 22°C   | <b>Air Pressure:</b> 1010 hPa | <b>Relative Humidity:</b> 48 %                                | <b>Power Supply:</b> 120 VAC |
| <b>Remarks:</b>            |                               |                                                               |                              |

Table 7.1.2 In band radiated emission test results

TEST DISTANCE: 3 m  
EUT POSITION: Typical (Vertical)  
MODULATION: ASK  
MODULATING SIGNAL: ID code  
TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
INVESTIGATED FREQUENCY RANGE: 13.553 – 13.567 MHz  
RESOLUTION BANDWIDTH: 9.0 kHz  
VIDEO BANDWIDTH: 30.0 kHz  
TEST DISTANCE: 3 m

| Frequency, MHz | Peak emission, dB(μV/m) | Quasi-peak                  |                 |             | Antenna polarization | Azimuth**, degrees | Verdict |
|----------------|-------------------------|-----------------------------|-----------------|-------------|----------------------|--------------------|---------|
|                |                         | Measured emission, dB(μV/m) | Limit, dB(μV/m) | Margin, dB* |                      |                    |         |
| 13.56          | 81.00                   | 80.8                        | 124             | -43.2       | V                    | 4                  | Pass    |

\*- Margin = Measured emission - specification limit.

\*\*-. EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used


|         |         |         |         |         |         |         |         |
|---------|---------|---------|---------|---------|---------|---------|---------|
| HL 0446 | HL 0521 | HL 0569 | HL 0589 | HL 0593 | HL 0594 | HL 0604 | HL 0784 |
| HL 0813 | HL 1424 | HL 1430 | HL 1552 | HL 1848 | HL 1947 | HL 1984 | HL 2009 |
| HL 2259 |         |         |         |         |         |         |         |

Full description is given in Appendix A.

Plot 7.1.1.1 In band radiated emission test results

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
DETECTOR: Peak hold

10:04:53 DEC 24, 2006

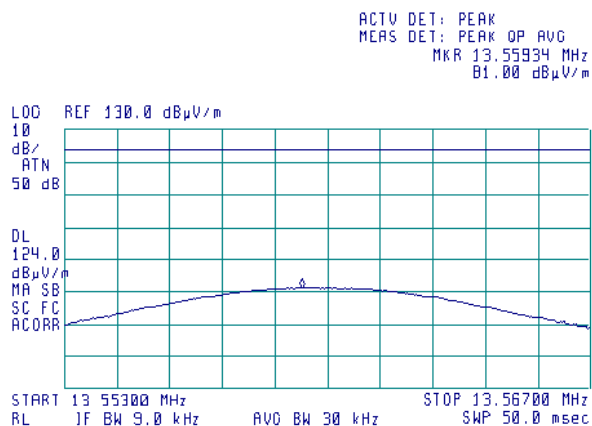


|                            |                               |                                                               |                              |
|----------------------------|-------------------------------|---------------------------------------------------------------|------------------------------|
| <b>Test specification:</b> |                               | <b>Sections 15.225(a) (b) (c), In band radiated emissions</b> |                              |
| <b>Test procedure:</b>     |                               | ANSI C63.4, Sections 5.3 and 13.1.4                           |                              |
| <b>Test mode:</b>          | Compliance                    | <b>Verdict:</b>                                               | <b>PASS</b>                  |
| <b>Date &amp; Time:</b>    | 12/12/2006 9:15:00 AM         |                                                               |                              |
| <b>Temperature:</b> 22°C   | <b>Air Pressure:</b> 1010 hPa | <b>Relative Humidity:</b> 48 %                                | <b>Power Supply:</b> 120 VAC |
| <b>Remarks:</b>            |                               |                                                               |                              |

**Plot 7.1.2 In band radiated emission test results, low band edge**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
DETECTOR: Peak hold


10:10:16 DEC 24, 2006

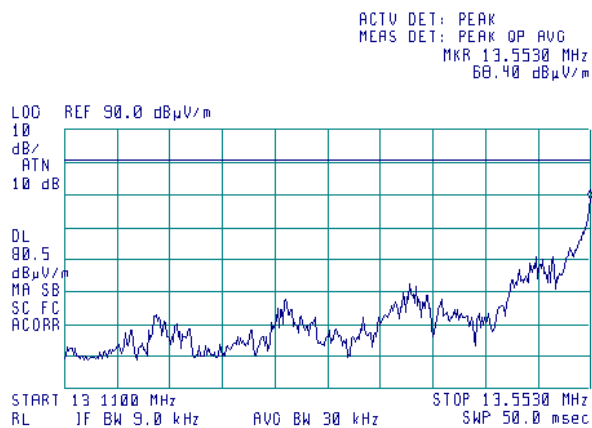

**Plot 7.1.3 In band radiated emission test results, high band edge**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
DETECTOR: Peak hold

10:14:28 DEC 24, 2006

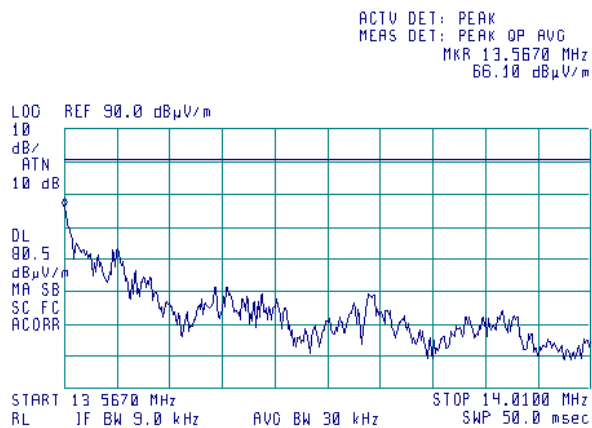

|                            |                                                           |                                |                              |
|----------------------------|-----------------------------------------------------------|--------------------------------|------------------------------|
| <b>Test specification:</b> | <b>Sections 15.225(d), Out of band radiated emissions</b> |                                |                              |
| <b>Test procedure:</b>     | ANSI C63.4, Sections 5.3 and 13.1.4                       |                                |                              |
| <b>Test mode:</b>          | Compliance                                                | <b>Verdict:</b>                | <b>PASS</b>                  |
| <b>Date &amp; Time:</b>    | 12/8/2006 12:37:02 PM                                     |                                |                              |
| <b>Temperature:</b> 22°C   | <b>Air Pressure:</b> 1011 hPa                             | <b>Relative Humidity:</b> 43 % | <b>Power Supply:</b> 120 VAC |
| <b>Remarks:</b>            |                                                           |                                |                              |

## 7.2 Out of band radiated emissions

### 7.2.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Radiated emission limits

| Frequency, MHz | Field strength at 3 m within restricted bands, dB(μV/m)*** |                 |                 |
|----------------|------------------------------------------------------------|-----------------|-----------------|
|                | Peak                                                       | Quasi Peak      | Average         |
| 0.009 – 0.090  | 148.5 – 128.5                                              | NA              | 128.5 – 108.5** |
| 0.090 – 0.110  | NA                                                         | 108.5 – 106.8** | NA              |
| 0.110 – 0.490  | 126.8 – 113.8                                              | NA              | 106.8 – 93.8**  |
| 0.490 – 1.705  | NA                                                         | 73.8 – 63.0**   | NA              |
| 1.705 – 30.0*  |                                                            | 69.5**          |                 |
| 30 – 88        |                                                            | 40.0            |                 |
| 88 – 216       |                                                            | 43.5            |                 |
| 216 – 960      |                                                            | 46.0            |                 |
| 960 – 1000     |                                                            | 54.0            |                 |

\*- The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

\*\* - The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S2} = \text{Lim}_{S1} + 40 \log (S_1/S_2),$$

where  $S_1$  and  $S_2$  – standard defined and test distance respectively in meters.

\*\*\* - The limit decreases linearly with the logarithm of frequency.

### 7.2.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and the performance check was conducted.

7.2.2.2 The specified frequency range was investigated with loop antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna was rotated around its vertical axis and the measuring antenna polarization was switched from vertical to horizontal.

7.2.2.3 The worst test results (the lowest margins) were recorded in Table 7.2.2 and shown in the associated plots.

### 7.2.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.2.3.1 The EUT was set up as shown in Figure 7.2.2, energized and the performance check was conducted.

7.2.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.2.3.3 The worst test results (the lowest margins) were recorded in Table 7.2.2 and shown in the associated plots.

|                     |                                                    |                         |                       |
|---------------------|----------------------------------------------------|-------------------------|-----------------------|
| Test specification: | Sections 15.225(d), Out of band radiated emissions |                         |                       |
| Test procedure:     | ANSI C63.4, Sections 5.3 and 13.1.4                |                         |                       |
| Test mode:          | Compliance                                         | Verdict: PASS           |                       |
| Date & Time:        | 12/8/2006 12:37:02 PM                              |                         |                       |
| Temperature: 22°C   | Air Pressure: 1011 hPa                             | Relative Humidity: 43 % | Power Supply: 120 VAC |
| Remarks:            |                                                    |                         |                       |

Figure 7.2.1 Radiated emissions below 30 MHz test set up


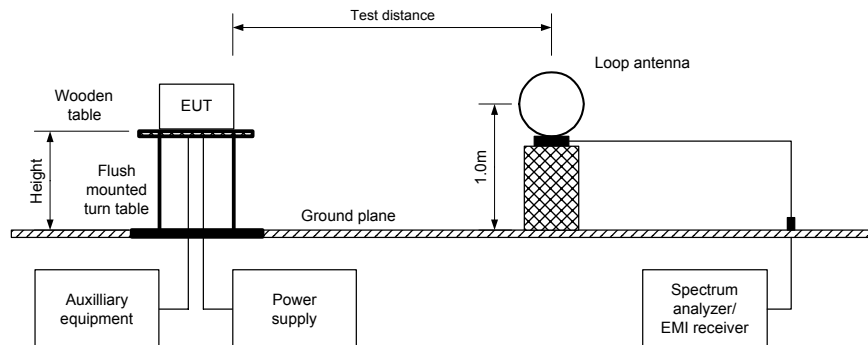


Figure 7.2.2 Radiated emissions above 30 MHz test set up



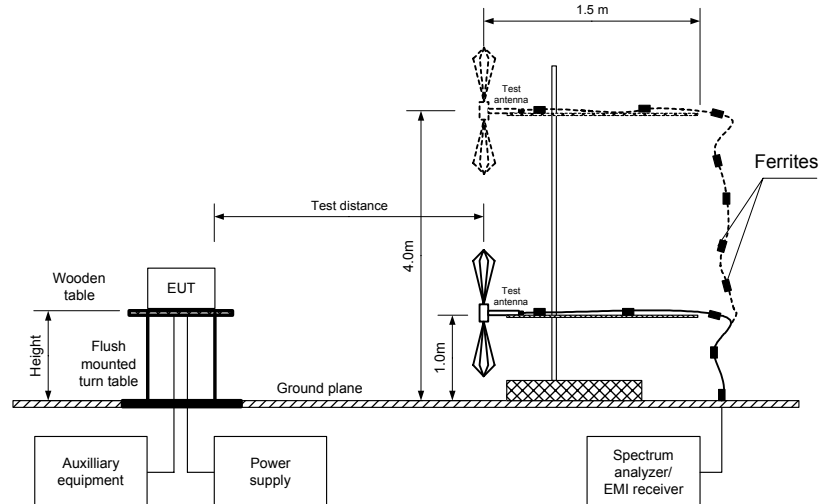

|                            |                               |                                                           |                              |
|----------------------------|-------------------------------|-----------------------------------------------------------|------------------------------|
| <b>Test specification:</b> |                               | <b>Sections 15.225(d), Out of band radiated emissions</b> |                              |
| <b>Test procedure:</b>     |                               | ANSI C63.4, Sections 5.3 and 13.1.4                       |                              |
| <b>Test mode:</b>          | Compliance                    | <b>Verdict:</b>                                           | <b>PASS</b>                  |
| <b>Date &amp; Time:</b>    | 12/8/2006 12:37:02 PM         |                                                           |                              |
| <b>Temperature:</b> 22°C   | <b>Air Pressure:</b> 1011 hPa | <b>Relative Humidity:</b> 43 %                            | <b>Power Supply:</b> 120 VAC |
| <b>Remarks:</b>            |                               |                                                           |                              |

Table 7.2.2 Out of band radiated emissions test results

EUT POSITION: Typical  
 MODULATION: ASK  
 MODULATING SIGNAL: ID code  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
 INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz  
 RESOLUTION BANDWIDTH: 1 kHz (9 kHz – 150 kHz)  
 9.0 kHz (150 kHz – 30 MHz)  
 120 kHz (30 MHz – 1000 MHz)  
 VIDEO BANDWIDTH: ≥ Resolution bandwidth  
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)  
 Biconical (30 MHz – 200 MHz)  
 Log periodic (200 MHz – 1000 MHz)  
 Biconilog (30 MHz – 1000 MHz)

TEST DISTANCE: 10 m

| Frequency, MHz | Peak emission, dB(μV/m) | Quasi-peak                  |                 |             | Antenna polarization | Antenna height, m | Turn-table position**, degrees | Verdict |
|----------------|-------------------------|-----------------------------|-----------------|-------------|----------------------|-------------------|--------------------------------|---------|
|                |                         | Measured emission, dB(μV/m) | Limit, dB(μV/m) | Margin, dB* |                      |                   |                                |         |
| 365.315000     | 24.25                   | 22.10                       | 35.50           | -13.40      | V                    | 1                 | 180                            | Pass    |
| 431.983500     | 32.93                   | 29.56                       | 35.50           | -5.94       | V                    | 1                 | 180                            |         |
| 499.395000     | 22.94                   | 20.37                       | 35.50           | -15.13      | V                    | 1                 | 180                            |         |
| 566.045000     | 32.49                   | 28.36                       | 35.50           | -7.14       | V                    | 1                 | 180                            |         |
| 699.079600     | 30.11                   | 25.94                       | 35.50           | -9.56       | V                    | 1                 | 180                            |         |

TEST DISTANCE: 3 m

| Frequency, MHz | Peak emission, dB(μV/m) | Quasi-peak                  |                 |             | Antenna polarization | Antenna height, m | Turn-table position**, degrees | Verdict |
|----------------|-------------------------|-----------------------------|-----------------|-------------|----------------------|-------------------|--------------------------------|---------|
|                |                         | Measured emission, dB(μV/m) | Limit, dB(μV/m) | Margin, dB* |                      |                   |                                |         |
| 97.700000      | 38.70                   | 34.90                       | 43.50           | -8.60       | H                    | 2.8               | 3                              | Pass    |

\*- Margin = Measured emission - specification limit.

\*\*-. EUT front panel refer to 0 degrees position of turntable.

#### Reference numbers of test equipment used


|         |         |         |         |         |         |         |         |
|---------|---------|---------|---------|---------|---------|---------|---------|
| HL 0446 | HL 0521 | HL 0569 | HL 0589 | HL 0593 | HL 0594 | HL 0604 | HL 0813 |
| HL 1424 | HL 1430 | HL 1552 | HL 1848 | HL 1947 | HL 1984 | HL 2009 | HL 2697 |

Full description is given in Appendix A.

|                            |                                                           |                                |                              |
|----------------------------|-----------------------------------------------------------|--------------------------------|------------------------------|
| <b>Test specification:</b> | <b>Sections 15.225(d), Out of band radiated emissions</b> |                                |                              |
| <b>Test procedure:</b>     | ANSI C63.4, Sections 5.3 and 13.1.4                       |                                |                              |
| <b>Test mode:</b>          | Compliance                                                | <b>Verdict:</b>                | <b>PASS</b>                  |
| <b>Date &amp; Time:</b>    | 12/8/2006 12:37:02 PM                                     |                                |                              |
| <b>Temperature:</b> 22°C   | <b>Air Pressure:</b> 1011 hPa                             | <b>Relative Humidity:</b> 43 % | <b>Power Supply:</b> 120 VAC |
| <b>Remarks:</b>            |                                                           |                                |                              |


**Plot 7.2.1 Radiated emission measurements from 9 to 150 kHz**

TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical  
DETECTOR: Peak hold

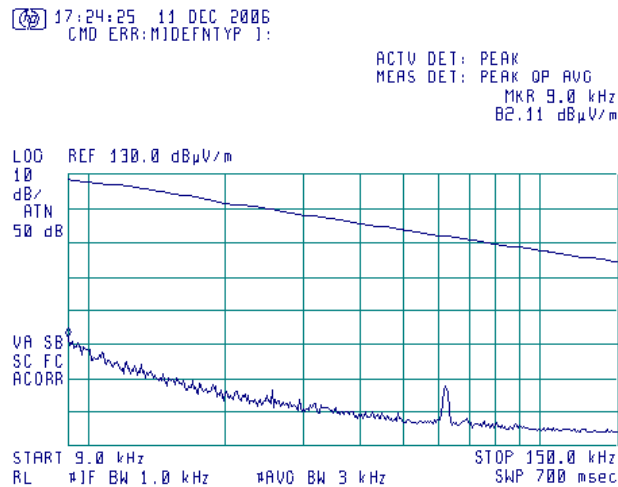

**Plot 7.2.2 Radiated emission measurements from 0.15 to 30 MHz**

TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical  
DETECTOR: Peak hold

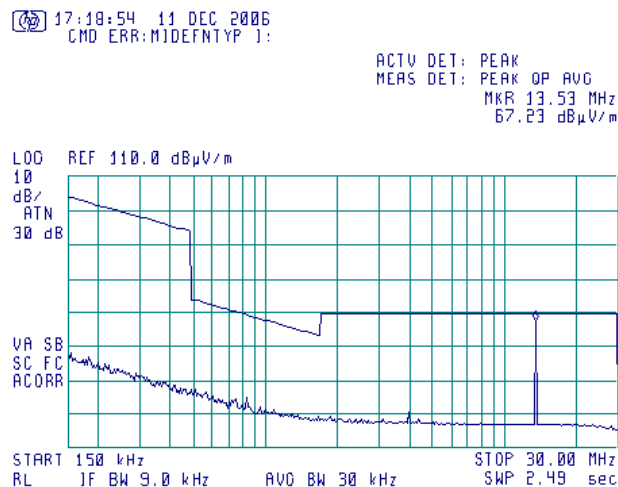


|                     |                                                    |                         |                       |
|---------------------|----------------------------------------------------|-------------------------|-----------------------|
| Test specification: | Sections 15.225(d), Out of band radiated emissions |                         |                       |
| Test procedure:     | ANSI C63.4, Sections 5.3 and 13.1.4                |                         |                       |
| Test mode:          | Compliance                                         | Verdict: PASS           |                       |
| Date & Time:        | 12/8/2006 12:37:02 PM                              |                         |                       |
| Temperature: 22°C   | Air Pressure: 1011 hPa                             | Relative Humidity: 43 % | Power Supply: 120 VAC |
| Remarks:            |                                                    |                         |                       |

**Plot 7.2.3 Radiated emission measurements from 30 to 1000 MHz**

TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical  
DETECTOR: Peak hold


13:48:22 08 DEC 2006

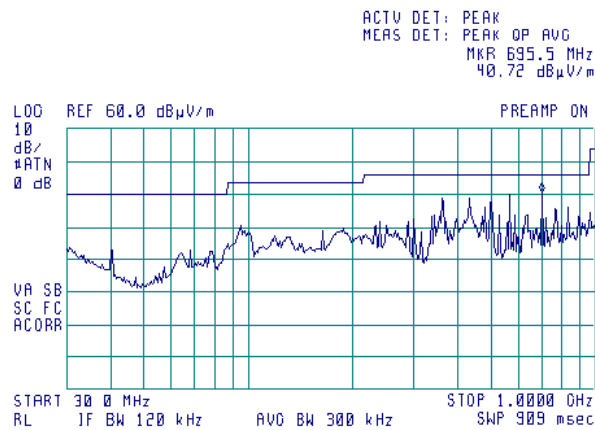

**Plot 7.2.4 Radiated emission measurements from 30 to 1000 MHz**

TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal  
DETECTOR: Peak hold

13:56:05 08 DEC 2006

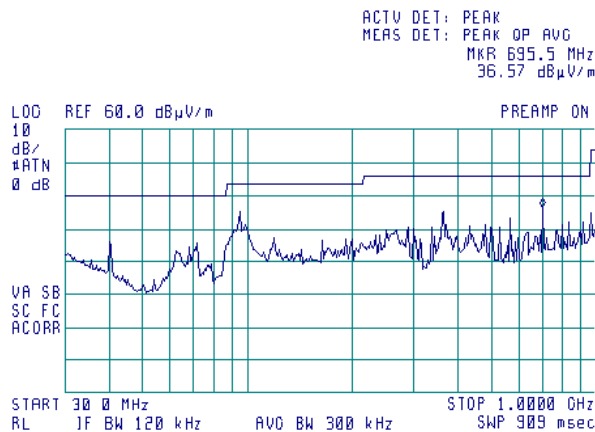



|                            |                               |                                               |                              |
|----------------------------|-------------------------------|-----------------------------------------------|------------------------------|
| <b>Test specification:</b> |                               | <b>Section 15.225(e), Frequency stability</b> |                              |
| <b>Test procedure:</b>     |                               | ANSI C63.4, Section 13.1.6                    |                              |
| <b>Test mode:</b>          |                               | Compliance                                    | <b>Verdict:</b> PASS         |
| <b>Date &amp; Time:</b>    |                               | 12/17/2006 12:02:36 PM                        |                              |
| <b>Temperature:</b> 21°C   | <b>Air Pressure:</b> 1012 hPa | <b>Relative Humidity:</b> 39 %                | <b>Power Supply:</b> 120 VAC |
| <b>Remarks:</b>            |                               |                                               |                              |

## 7.3 Frequency stability test

### 7.3.1 General

This test was performed to measure frequency stability of transmitter RF carrier. Specification test limits are given in Table 7.3.1.


Table 7.3.1 Frequency stability limits

| Assigned frequency, MHz | Maximum allowed frequency displacement |      |
|-------------------------|----------------------------------------|------|
|                         | %                                      | Hz   |
| 13.560                  | ± 0.01 %                               | 1356 |

### 7.3.2 Test procedure

- 7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and its proper operation was checked.
- 7.3.2.2 The EUT power was turned off. Temperature within test chamber was set to the required one and a period of time sufficient to stabilize all of the oscillator circuit components was allowed.
- 7.3.2.3 The EUT was powered on and carrier frequency was measured at start up moment and then after 2, 5 and 10 minutes. The EUT was powered off.
- 7.3.2.4 The above procedure was repeated at the rest of the test temperatures and voltages as provided in Table 7.3.2.
- 7.3.2.5 Frequency displacement was calculated and compared with the limit as provided in Table 7.3.2.

Figure 7.3.1 Frequency stability test setup

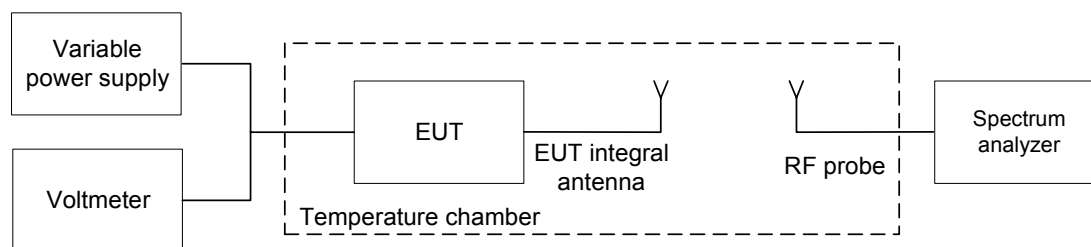



|                            |                               |                                               |                              |
|----------------------------|-------------------------------|-----------------------------------------------|------------------------------|
| <b>Test specification:</b> |                               | <b>Section 15.225(e), Frequency stability</b> |                              |
| <b>Test procedure:</b>     |                               | ANSI C63.4, Section 13.1.6                    |                              |
| <b>Test mode:</b>          | Compliance                    | <b>Verdict:</b>                               | <b>PASS</b>                  |
| <b>Date &amp; Time:</b>    | 12/17/2006 12:02:36 PM        |                                               |                              |
| <b>Temperature:</b> 21°C   | <b>Air Pressure:</b> 1012 hPa | <b>Relative Humidity:</b> 39 %                | <b>Power Supply:</b> 120 VAC |
| <b>Remarks:</b>            |                               |                                               |                              |

Table 7.3.2 Frequency stability test results

OPERATING FREQUENCY: 13.560 MHz  
 NOMINAL POWER VOLTAGE: 120 VAC  
 TEMPERATURE STABILIZATION PERIOD: 20 min  
 POWER DURING TEMPERATURE TRANSITION: Off  
 SPECTRUM ANALYZER MODE: Counter  
 RESOLUTION BANDWIDTH: 100 Hz  
 VIDEO BANDWIDTH: 3000 Hz  
 MODULATION: Unmodulated

| Temperature,<br>°C | Voltage,<br>V | Frequency, MHz |                     |                     |                      | Max frequency drift, Hz |          | Limit,<br>Hz | Margin,<br>Hz | Verdict |
|--------------------|---------------|----------------|---------------------|---------------------|----------------------|-------------------------|----------|--------------|---------------|---------|
|                    |               | Start up       | 2 <sup>nd</sup> min | 5 <sup>th</sup> min | 10 <sup>th</sup> min | Positive                | Negative |              |               |         |
| -20                | nominal       | 13.599684      | 13.599711           | 13.599718           | 13.599717            | 51                      | 0        | 1356         | 1305          | Pass    |
| 20                 | nominal +15%  | 13.599701      | 13.599679           | 13.599668           | 13.599666            | 35                      | 0        |              | 1321          |         |
| 20                 | nominal       | 13.599688      | 13.599674           | 13.599669           | 13.599666*           | 22                      | 0        |              | 1334          |         |
| 20                 | nominal -15%  | 13.599698      | 13.599676           | 13.599670           | 13.599666            | 32                      | 0        |              | 1324          |         |
| 50                 | nominal       | 13.599673      | 13.599676           | 13.599692           | 13.599714            | 48                      | 0        |              | 1308          |         |

\* - Reference frequency

#### Reference numbers of test equipment used

|         |         |         |         |         |  |  |  |
|---------|---------|---------|---------|---------|--|--|--|
| HL 0337 | HL 0495 | HL 0892 | HL 2004 | HL 3001 |  |  |  |
|---------|---------|---------|---------|---------|--|--|--|

Full description is given in Appendix A.

|                            |                               |                                              |                              |
|----------------------------|-------------------------------|----------------------------------------------|------------------------------|
| <b>Test specification:</b> |                               | <b>Section 15.207(a), Conducted emission</b> |                              |
| <b>Test procedure:</b>     |                               | ANSI C63.4, Section 13.1.3                   |                              |
| <b>Test mode:</b>          |                               | Compliance                                   | <b>Verdict:</b> PASS         |
| <b>Date &amp; Time:</b>    |                               | 12/19/2006 1:09:11 PM                        |                              |
| <b>Temperature:</b> 22 °C  | <b>Air Pressure:</b> 1007 hPa | <b>Relative Humidity:</b> 42 %               | <b>Power Supply:</b> 120 VAC |
| <b>Remarks:</b>            |                               |                                              |                              |

## 7.4 Conducted emissions

### 7.4.1 General

This test was performed to measure common mode conducted emissions at the power port. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Limits for conducted emissions

| Frequency,<br>MHz | Class B limit, dB(μV) |          |
|-------------------|-----------------------|----------|
|                   | QP                    | AVRG     |
| 0.15 - 0.5        | 66 - 56*              | 56 - 46* |
| 0.5 - 5.0         | 56                    | 46       |
| 5.0 - 30          | 60                    | 50       |

\* The limit decreases linearly with the logarithm of frequency.

### 7.4.2 Test procedure

**7.4.2.1** The EUT was set up as shown in Figure 7.4.1, energized and the performance check was conducted.


**7.4.2.2** The measurements were performed at power terminals with the LISN, connected to a spectrum analyzer in the frequency range referred to in Table 7.4.2, Table 7.4.3. Unused coaxial connector of the LISN was terminated with 50 Ohm. Quasi-peak and average detectors were used throughout the testing.

**7.4.2.3** The position of the device cables was varied to determine maximum emission level.

**7.4.2.4** The worst test results (the lowest margins) were recorded in Table 7.4.2, Table 7.4.3 and shown in the associated plots.

|                            |                               |                                              |                              |
|----------------------------|-------------------------------|----------------------------------------------|------------------------------|
| <b>Test specification:</b> |                               | <b>Section 15.207(a), Conducted emission</b> |                              |
| <b>Test procedure:</b>     |                               | ANSI C63.4, Section 13.1.3                   |                              |
| <b>Test mode:</b>          |                               | Compliance                                   | <b>Verdict:</b> PASS         |
| <b>Date &amp; Time:</b>    |                               | 12/19/2006 1:09:11 PM                        |                              |
| <b>Temperature:</b> 22 °C  | <b>Air Pressure:</b> 1007 hPa | <b>Relative Humidity:</b> 42 %               | <b>Power Supply:</b> 120 VAC |
| <b>Remarks:</b>            |                               |                                              |                              |

Figure 7.4.1 Setup for conducted emission measurements, table-top equipment

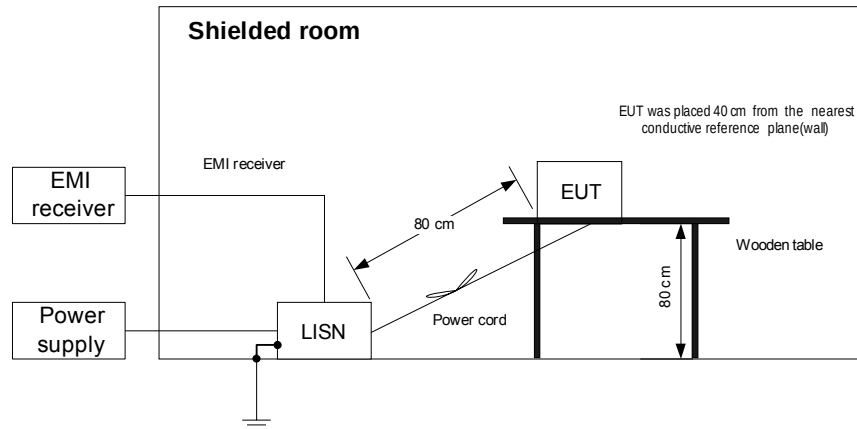



|                            |                               |                                              |                              |
|----------------------------|-------------------------------|----------------------------------------------|------------------------------|
| <b>Test specification:</b> |                               | <b>Section 15.207(a), Conducted emission</b> |                              |
| <b>Test procedure:</b>     |                               | ANSI C63.4, Section 13.1.3                   |                              |
| <b>Test mode:</b>          | Compliance                    | <b>Verdict:</b>                              | <b>PASS</b>                  |
| <b>Date &amp; Time:</b>    | 12/19/2006 1:09:11 PM         |                                              |                              |
| <b>Temperature:</b> 22 °C  | <b>Air Pressure:</b> 1007 hPa | <b>Relative Humidity:</b> 42 %               | <b>Power Supply:</b> 120 VAC |
| <b>Remarks:</b>            |                               |                                              |                              |

Table 7.4.2 Conducted emission test results at the EUT power ports

LINE: AC mains  
 EUT OPERATING MODE: Transmit  
 EUT SET UP: TABLE-TOP  
 TEST SITE: SHIELDED ROOM  
 DETECTORS USED: PEAK / QUASI-PEAK / AVERAGE  
 FREQUENCY RANGE: 150 kHz - 30 MHz  
 RESOLUTION BANDWIDTH: 9 kHz

| Frequency,<br>MHz | Peak<br>emission,<br>dB(μV) | Quasi-peak                      |                  |                | Average                         |                  |                | Line ID | Verdict |
|-------------------|-----------------------------|---------------------------------|------------------|----------------|---------------------------------|------------------|----------------|---------|---------|
|                   |                             | Measured<br>emission,<br>dB(μV) | Limit,<br>dB(μV) | Margin,<br>dB* | Measured<br>emission,<br>dB(μV) | Limit,<br>dB(μV) | Margin,<br>dB* |         |         |
| 0.169035          | 56.13                       | 49.73                           | 65.07            | -15.34         | 18.47                           | 55.07            | -36.60         | L1      | Pass    |
| 0.187323          | 55.38                       | 49.01                           | 64.18            | -15.17         | 17.86                           | 54.18            | -36.32         |         |         |
| 0.213941          | 54.81                       | 48.42                           | 63.12            | -14.70         | 17.29                           | 53.12            | -35.83         |         |         |
| 0.251249          | 53.94                       | 47.29                           | 61.75            | -14.46         | 16.23                           | 51.75            | -35.52         |         |         |
| 0.290741          | 53.21                       | 46.58                           | 60.55            | -13.97         | 15.40                           | 50.55            | -35.15         |         |         |
| 0.324577          | 52.65                       | 45.69                           | 59.63            | -13.94         | 14.74                           | 49.63            | -34.89         |         |         |
| 0.393473          | 51.49                       | 44.10                           | 57.99            | -13.89         | 14.17                           | 47.99            | -33.82         |         |         |
| 0.432949          | 50.37                       | 43.14                           | 57.25            | -14.11         | 12.44                           | 47.25            | -34.81         |         |         |
| 0.475612          | 49.41                       | 42.06                           | 56.46            | -14.40         | 11.64                           | 46.46            | -34.82         | L2      | Pass    |
| 0.155322          | 57.18                       | 50.43                           | 65.74            | -15.31         | 19.82                           | 55.74            | -35.92         |         |         |
| 0.174768          | 56.58                       | 49.64                           | 64.79            | -15.15         | 18.44                           | 54.79            | -36.35         |         |         |
| 0.205336          | 55.78                       | 48.74                           | 63.45            | -14.71         | 17.77                           | 53.45            | -35.68         |         |         |
| 0.249369          | 54.81                       | 47.56                           | 61.81            | -14.25         | 16.63                           | 51.81            | -35.18         |         |         |
| 0.317540          | 53.57                       | 45.99                           | 59.80            | -13.81         | 15.19                           | 49.80            | -34.61         |         |         |
| 0.353754          | 53.10                       | 45.31                           | 58.93            | -13.62         | 14.39                           | 48.93            | -34.54         |         |         |
| 0.399732          | 52.44                       | 44.46                           | 57.87            | -13.41         | 13.38                           | 47.87            | -34.49         |         |         |
| 0.438605          | 51.82                       | 43.56                           | 57.15            | -13.59         | 12.74                           | 47.15            | -34.41         |         |         |
| 0.472149          | 51.33                       | 42.89                           | 56.52            | -13.63         | 11.97                           | 46.52            | -34.55         |         |         |
| 0.543294          | 49.30                       | 40.79                           | 56.00            | -15.21         | 10.18                           | 46.00            | -35.82         |         |         |

\*- Margin = Measured emission - specification limit.



|                            |  |                                              |  |                                |                              |
|----------------------------|--|----------------------------------------------|--|--------------------------------|------------------------------|
| <b>Test specification:</b> |  | <b>Section 15.207(a), Conducted emission</b> |  |                                |                              |
| <b>Test procedure:</b>     |  | ANSI C63.4, Section 13.1.3                   |  |                                |                              |
| <b>Test mode:</b>          |  | Compliance                                   |  | <b>Verdict:</b> PASS           |                              |
| <b>Date &amp; Time:</b>    |  | 12/19/2006 1:09:11 PM                        |  |                                |                              |
| <b>Temperature:</b> 22 °C  |  | <b>Air Pressure:</b> 1007 hPa                |  | <b>Relative Humidity:</b> 42 % | <b>Power Supply:</b> 120 VAC |
| <b>Remarks:</b>            |  |                                              |  |                                |                              |

Table 7.4.3 Conducted emission test results at the laptop power ports

LINE: AC mains  
 EUT OPERATING MODE: Transmit  
 EUT SET UP: TABLE-TOP  
 TEST SITE: SHIELDED ROOM  
 DETECTORS USED: PEAK / QUASI-PEAK / AVERAGE  
 FREQUENCY RANGE: 150 kHz - 30 MHz  
 RESOLUTION BANDWIDTH: 9 kHz

| Frequency, MHz | Peak emission, dB(μV) | Quasi-peak                |               |             | Average                   |               |             | Line ID | Verdict |
|----------------|-----------------------|---------------------------|---------------|-------------|---------------------------|---------------|-------------|---------|---------|
|                |                       | Measured emission, dB(μV) | Limit, dB(μV) | Margin, dB* | Measured emission, dB(μV) | Limit, dB(μV) | Margin, dB* |         |         |
| 0.197805       | 52.79                 | 52.16                     | 63.74         | -11.58      | 42.60                     | 53.74         | -11.14      | L1      | Pass    |
| 0.247223       | 45.02                 | 26.51                     | 61.87         | -35.36      | 8.29                      | 51.87         | -43.58      |         |         |
| 0.263282       | 47.46                 | 43.47                     | 61.39         | -17.92      | 33.82                     | 51.39         | -17.57      |         |         |
| 0.330086       | 42.61                 | 38.30                     | 59.50         | -21.20      | 28.82                     | 49.50         | -20.68      |         |         |
| 0.156429       | 58.88                 | 43.73                     | 65.69         | -21.96      | 15.79                     | 55.69         | -39.90      | L2      | Pass    |
| 0.192674       | 49.60                 | 45.07                     | 63.94         | -18.87      | 35.99                     | 53.94         | -17.95      |         |         |
| 0.197644       | 52.57                 | 51.88                     | 63.74         | -11.86      | 42.77                     | 53.74         | -10.97      |         |         |
| 0.267625       | 44.02                 | 36.85                     | 61.25         | -24.40      | 28.37                     | 51.25         | -22.88      |         |         |
| 0.332557       | 39.68                 | 33.29                     | 59.44         | -26.15      | 25.44                     | 49.44         | -24.00      |         |         |

\*- Margin = Measured emission - specification limit.

## Reference numbers of test equipment used


|         |         |         |         |         |         |  |  |
|---------|---------|---------|---------|---------|---------|--|--|
| HL 0163 | HL 0447 | HL 0787 | HL 1430 | HL 1502 | HL 1510 |  |  |
|---------|---------|---------|---------|---------|---------|--|--|

Full description is given in Appendix A.

|                                                                  |                               |                                |                              |
|------------------------------------------------------------------|-------------------------------|--------------------------------|------------------------------|
| <b>Test specification:</b> Section 15.207(a), Conducted emission |                               |                                |                              |
| <b>Test procedure:</b> ANSI C63.4, Section 13.1.3                |                               |                                |                              |
| <b>Test mode:</b> Compliance                                     |                               | <b>Verdict:</b> PASS           |                              |
| <b>Date &amp; Time:</b> 12/19/2006 1:09:11 PM                    |                               |                                |                              |
| <b>Temperature:</b> 22 °C                                        | <b>Air Pressure:</b> 1007 hPa | <b>Relative Humidity:</b> 42 % | <b>Power Supply:</b> 120 VAC |
| <b>Remarks:</b>                                                  |                               |                                |                              |


Plot 7.4.1 Conducted emission measurements at the EUT power ports

LINE: L1  
EUT OPERATING MODE: Transmit  
LIMIT: QUASI-PEAK, AVERAGE  
DETECTOR: PEAK

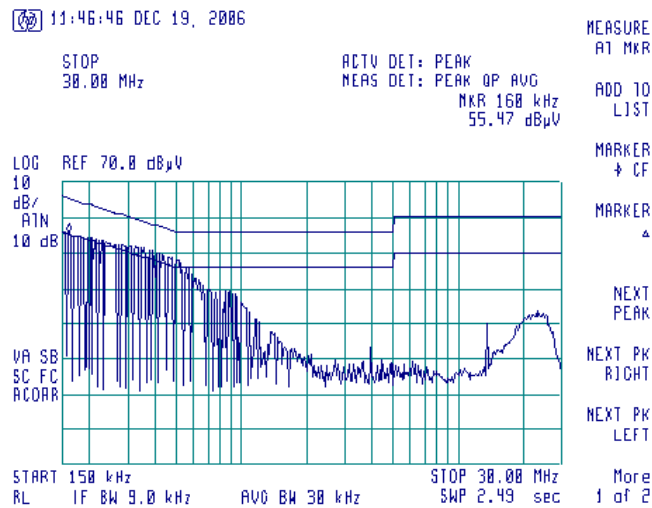

Plot 7.4.2 Conducted emission measurements at the EUT power ports

LINE: L2  
EUT OPERATING MODE: Transmit  
LIMIT: QUASI-PEAK, AVERAGE  
DETECTOR: PEAK

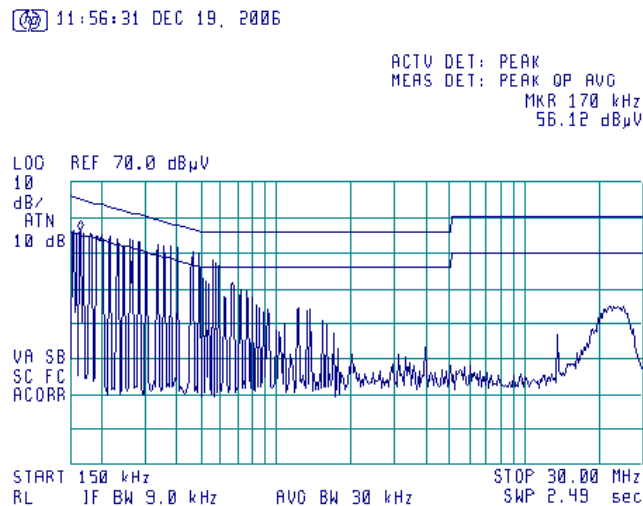




|                            |  |                                              |                                |
|----------------------------|--|----------------------------------------------|--------------------------------|
| <b>Test specification:</b> |  | <b>Section 15.207(a), Conducted emission</b> |                                |
| <b>Test procedure:</b>     |  | ANSI C63.4, Section 13.1.3                   |                                |
| <b>Test mode:</b>          |  | Compliance                                   | <b>Verdict:</b> PASS           |
| <b>Date &amp; Time:</b>    |  | 12/19/2006 1:09:11 PM                        |                                |
| <b>Temperature:</b> 22 °C  |  | <b>Air Pressure:</b> 1007 hPa                | <b>Relative Humidity:</b> 42 % |
| <b>Remarks:</b>            |  | <b>Power Supply:</b> 120 VAC                 |                                |

**Plot 7.4.3 Conducted emission measurements at the laptop power ports**


LINE: L1  
EUT OPERATING MODE: Transmit  
LIMIT: QUASI-PEAK, AVERAGE  
DETECTOR: PEAK

12:10:08 DEC 19, 2006

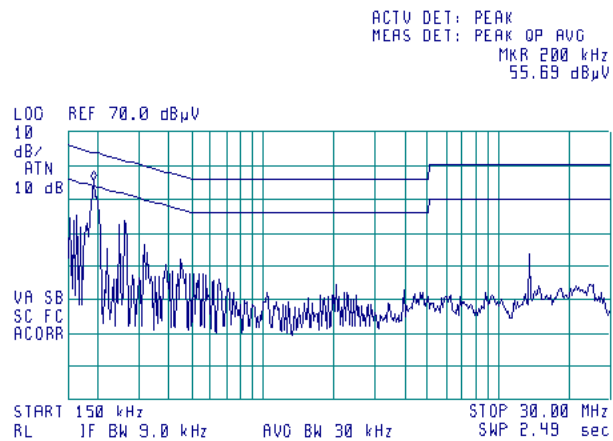**Plot 7.4.4 Conducted emission measurements at the laptop power ports**

LINE: L2  
EUT OPERATING MODE: Transmit  
LIMIT: QUASI-PEAK, AVERAGE  
DETECTOR: PEAK

12:13:57 DEC 19, 2006

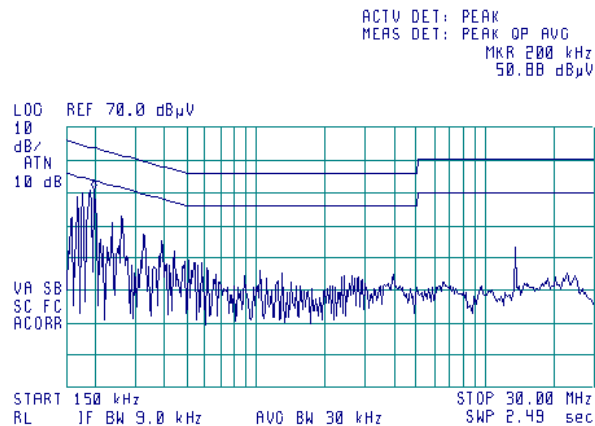



|                            |                               |                                                            |                              |
|----------------------------|-------------------------------|------------------------------------------------------------|------------------------------|
| <b>Test specification:</b> |                               | <b>Section 15.107, Conducted emission at AC power port</b> |                              |
| <b>Test procedure:</b>     |                               | ANSI C63.4, Sections 11.5 and 12.1.3                       |                              |
| <b>Test mode:</b>          | Compliance                    | <b>Verdict:</b>                                            | <b>PASS</b>                  |
| <b>Date &amp; Time:</b>    | 12/19/2006 1:28:10 PM         |                                                            |                              |
| <b>Temperature:</b> 22 °C  | <b>Air Pressure:</b> 1007 hPa | <b>Relative Humidity:</b> 42 %                             | <b>Power Supply:</b> 120 VAC |
| <b>Remarks:</b>            |                               |                                                            |                              |

## 8 Emission tests according to 47CFR part 15 subpart B requirements

### 8.1 Conducted emissions

#### 8.1.1 General

This test was performed to measure common mode conducted emissions at the mains power port. Specification test limits are given in Table 8.1.1.

Table 8.1.1 Limits for conducted emissions

| Frequency,<br>MHz | Class B limit, dB(μV) |          | Class A limit, dB(μV) |      |
|-------------------|-----------------------|----------|-----------------------|------|
|                   | QP                    | AVRG     | QP                    | AVRG |
| 0.15 - 0.5        | 66 - 56*              | 56 - 46* | 79                    | 66   |
| 0.5 - 5.0         | 56                    | 46       | 73                    | 60   |
| 5.0 - 30          | 60                    | 50       | 73                    | 60   |

\* The limit decreases linearly with the logarithm of frequency.

#### 8.1.2 Test procedure

8.1.2.1 The EUT was set up as shown in Figure 8.1.1, energized and the performance check was conducted.


8.1.2.2 The measurements were performed at power terminals with the LISN, connected to a spectrum analyzer in the frequency range referred to in Table 8.1.2. Unused coaxial connector of the LISN was terminated with 50 Ohm. Quasi-peak and average detectors were used throughout the testing.

8.1.2.3 The position of the device cables was varied to determine maximum emission level.

8.1.2.4 The worst test results (the lowest margins) were recorded in Table 8.1.2 and shown in the associated plots.

|                            |                               |                                                            |                              |
|----------------------------|-------------------------------|------------------------------------------------------------|------------------------------|
| <b>Test specification:</b> |                               | <b>Section 15.107, Conducted emission at AC power port</b> |                              |
| <b>Test procedure:</b>     |                               | ANSI C63.4, Sections 11.5 and 12.1.3                       |                              |
| <b>Test mode:</b>          |                               | Compliance                                                 | <b>Verdict:</b> PASS         |
| <b>Date &amp; Time:</b>    |                               | 12/19/2006 1:28:10 PM                                      |                              |
| <b>Temperature:</b> 22 °C  | <b>Air Pressure:</b> 1007 hPa | <b>Relative Humidity:</b> 42 %                             | <b>Power Supply:</b> 120 VAC |
| <b>Remarks:</b>            |                               |                                                            |                              |

Figure 8.1.1 Setup for conducted emission measurements, table-top equipment

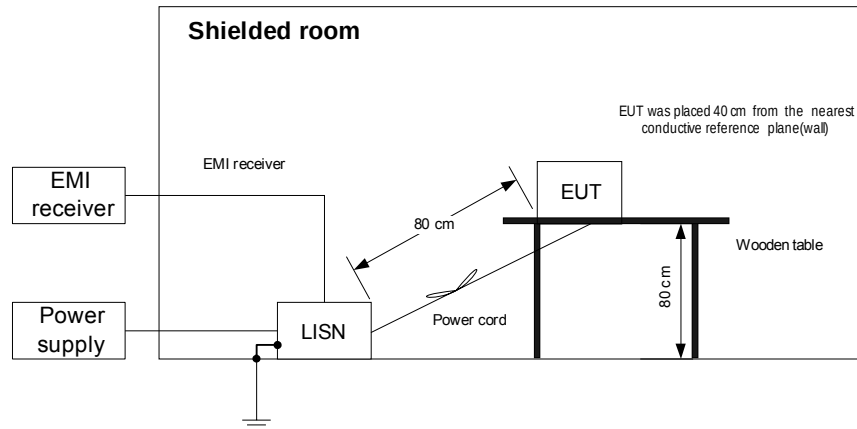



|                            |                               |                                                            |                              |
|----------------------------|-------------------------------|------------------------------------------------------------|------------------------------|
| <b>Test specification:</b> |                               | <b>Section 15.107, Conducted emission at AC power port</b> |                              |
| <b>Test procedure:</b>     |                               | ANSI C63.4, Sections 11.5 and 12.1.3                       |                              |
| <b>Test mode:</b>          | Compliance                    | <b>Verdict:</b>                                            | <b>PASS</b>                  |
| <b>Date &amp; Time:</b>    | 12/19/2006 1:28:10 PM         |                                                            |                              |
| <b>Temperature:</b> 22 °C  | <b>Air Pressure:</b> 1007 hPa | <b>Relative Humidity:</b> 42 %                             | <b>Power Supply:</b> 120 VAC |
| <b>Remarks:</b>            |                               |                                                            |                              |

Table 8.1.2 Conducted emission test results at the EUT power ports

LINE: AC mains  
 LIMIT: Class B  
 EUT OPERATING MODE: Receive  
 EUT SET UP: TABLE-TOP  
 TEST SITE: SHIELDED ROOM  
 DETECTORS USED: PEAK / QUASI-PEAK / AVERAGE  
 FREQUENCY RANGE: 150 kHz - 30 MHz  
 RESOLUTION BANDWIDTH: 9 kHz

| Frequency, MHz | Peak emission, dB(μV) | Quasi-peak                |               |             | Average                   |               |             | Line ID | Verdict |
|----------------|-----------------------|---------------------------|---------------|-------------|---------------------------|---------------|-------------|---------|---------|
|                |                       | Measured emission, dB(μV) | Limit, dB(μV) | Margin, dB* | Measured emission, dB(μV) | Limit, dB(μV) | Margin, dB* |         |         |
| 0.154951       | 54.00                 | 47.57                     | 65.76         | -18.19      | 16.70                     | 55.76         | -39.06      | L1      | Pass    |
| 0.238248       | 51.67                 | 45.20                     | 62.18         | -16.98      | 13.98                     | 52.18         | -38.20      |         |         |
| 0.266938       | 50.92                 | 44.33                     | 61.27         | -16.94      | 13.60                     | 51.27         | -37.67      |         |         |
| 0.344726       | 49.66                 | 42.52                     | 59.15         | -16.63      | 11.96                     | 49.15         | -37.19      |         |         |
| 0.376765       | 49.02                 | 41.81                     | 58.39         | -16.58      | 11.47                     | 48.39         | -36.92      |         |         |
| 0.437519       | 47.77                 | 40.30                     | 57.17         | -16.87      | 10.14                     | 47.17         | -37.03      |         |         |
| 0.470505       | 47.01                 | 39.62                     | 56.55         | -16.93      | 9.97                      | 46.55         | -36.58      |         |         |
| 0.157130       | 54.73                 | 47.50                     | 65.65         | -18.15      | 16.89                     | 55.65         | -38.76      | L2      | Pass    |
| 0.223378       | 52.84                 | 45.67                     | 62.75         | -17.08      | 14.81                     | 52.75         | -37.94      |         |         |
| 0.280585       | 51.60                 | 44.14                     | 60.86         | -16.72      | 13.08                     | 50.86         | -37.78      |         |         |
| 0.344424       | 50.33                 | 42.62                     | 59.16         | -16.54      | 12.24                     | 49.16         | -36.92      |         |         |
| 0.431353       | 49.19                 | 40.90                     | 57.28         | -16.38      | 10.60                     | 47.28         | -36.68      |         |         |
| 0.494588       | 48.07                 | 39.70                     | 56.10         | -16.40      | 9.36                      | 46.10         | -36.74      |         |         |
| 0.540645       | 46.94                 | 38.33                     | 56.00         | -17.67      | 8.16                      | 46.00         | -37.84      |         |         |

\*- Margin = Measured emission - specification limit.



|                     |  |                                                     |  |                         |  |
|---------------------|--|-----------------------------------------------------|--|-------------------------|--|
| Test specification: |  | Section 15.107, Conducted emission at AC power port |  |                         |  |
| Test procedure:     |  | ANSI C63.4, Sections 11.5 and 12.1.3                |  |                         |  |
| Test mode:          |  | Compliance                                          |  | Verdict: PASS           |  |
| Date & Time:        |  | 12/19/2006 1:28:10 PM                               |  |                         |  |
| Temperature: 22 °C  |  | Air Pressure: 1007 hPa                              |  | Relative Humidity: 42 % |  |
|                     |  |                                                     |  | Power Supply: 120 VAC   |  |
| Remarks:            |  |                                                     |  |                         |  |

Table 8.1.3 Conducted emission test results at the laptop power ports

LINE: AC mains  
 LIMIT: Class B  
 EUT OPERATING MODE: Receive  
 EUT SET UP: TABLE-TOP  
 TEST SITE: SHIELDED ROOM  
 DETECTORS USED: PEAK / QUASI-PEAK / AVERAGE  
 FREQUENCY RANGE: 150 kHz - 30 MHz  
 RESOLUTION BANDWIDTH: 9 kHz

| Frequency, MHz | Peak emission, dB(μV) | Quasi-peak                |               |             | Average                   |               |             | Line ID | Verdict |
|----------------|-----------------------|---------------------------|---------------|-------------|---------------------------|---------------|-------------|---------|---------|
|                |                       | Measured emission, dB(μV) | Limit, dB(μV) | Margin, dB* | Measured emission, dB(μV) | Limit, dB(μV) | Margin, dB* |         |         |
| 0.193269       | 55.10                 | 46.72                     | 63.91         | -17.19      | 37.35                     | 53.91         | -16.56      | L1      | Pass    |
| 0.219214       | 49.96                 | 32.87                     | 62.91         | -30.04      | 7.02                      | 52.91         | -45.89      |         |         |
| 0.394011       | 40.05                 | 36.84                     | 57.98         | -21.14      | 27.40                     | 47.98         | -20.58      |         |         |
| 0.159696       | 57.31                 | 39.93                     | 65.53         | -25.60      | 12.96                     | 55.53         | -42.57      |         |         |
| 0.197615       | 55.45                 | 51.92                     | 63.75         | -11.83      | 42.70                     | 53.75         | -11.05      | L2      | Pass    |
| 0.263378       | 43.67                 | 42.33                     | 61.38         | -19.05      | 33.77                     | 51.38         | -17.61      |         |         |

\*- Margin = Measured emission - specification limit

## Reference numbers of test equipment used

|         |         |         |         |         |         |  |  |
|---------|---------|---------|---------|---------|---------|--|--|
| HL 0163 | HL 0447 | HL 0787 | HL 1430 | HL 1502 | HL 1510 |  |  |
|---------|---------|---------|---------|---------|---------|--|--|


Full description is given in Appendix A.

|                            |                               |                                                            |                              |
|----------------------------|-------------------------------|------------------------------------------------------------|------------------------------|
| <b>Test specification:</b> |                               | <b>Section 15.107, Conducted emission at AC power port</b> |                              |
| <b>Test procedure:</b>     |                               | ANSI C63.4, Sections 11.5 and 12.1.3                       |                              |
| <b>Test mode:</b>          |                               | Compliance                                                 | <b>Verdict:</b> PASS         |
| <b>Date &amp; Time:</b>    |                               | 12/19/2006 1:28:10 PM                                      |                              |
| <b>Temperature:</b> 22 °C  | <b>Air Pressure:</b> 1007 hPa | <b>Relative Humidity:</b> 42 %                             | <b>Power Supply:</b> 120 VAC |
| <b>Remarks:</b>            |                               |                                                            |                              |

**Plot 8.1.1 Conducted emission measurements at the EUT power ports**

LINE: L1  
LIMIT: Class B  
EUT OPERATING MODE: Receive  
LIMIT: QUASI-PEAK, AVERAGE  
DETECTOR: PEAK


12:27:17 DEC 19, 2006

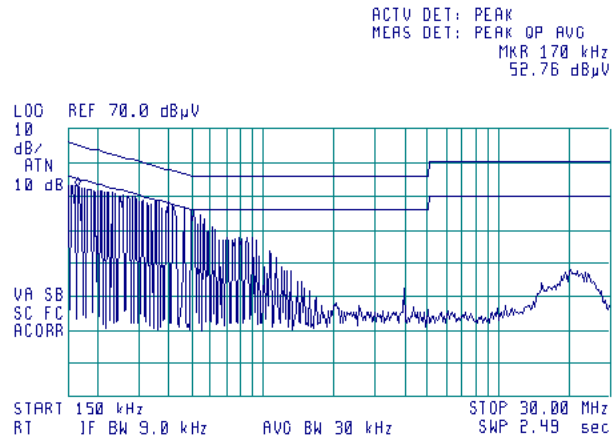

**Plot 8.1.2 Conducted emission measurements at the EUT power ports**

LINE: L2  
LIMIT: Class B  
EUT OPERATING MODE: Receive  
LIMIT: QUASI-PEAK, AVERAGE  
DETECTOR: PEAK


12:33:07 DEC 19, 2006

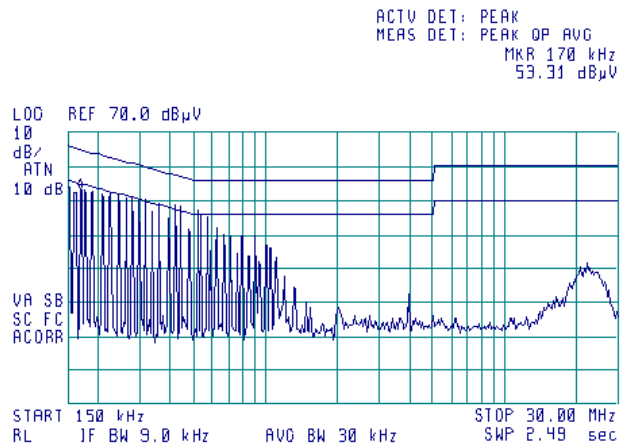

|                            |                               |                                                            |                              |
|----------------------------|-------------------------------|------------------------------------------------------------|------------------------------|
| <b>Test specification:</b> |                               | <b>Section 15.107, Conducted emission at AC power port</b> |                              |
| <b>Test procedure:</b>     |                               | ANSI C63.4, Sections 11.5 and 12.1.3                       |                              |
| <b>Test mode:</b>          | Compliance                    | <b>Verdict:</b>                                            | <b>PASS</b>                  |
| <b>Date &amp; Time:</b>    | 12/19/2006 1:28:10 PM         |                                                            |                              |
| <b>Temperature:</b> 22 °C  | <b>Air Pressure:</b> 1007 hPa | <b>Relative Humidity:</b> 42 %                             | <b>Power Supply:</b> 120 VAC |
| <b>Remarks:</b>            |                               |                                                            |                              |


**Plot 8.1.3 Conducted emission measurements at the laptop power ports**

LINE: L1  
LIMIT: Class B  
EUT OPERATING MODE: Receive  
LIMIT: QUASI-PEAK, AVERAGE  
DETECTOR: PEAK

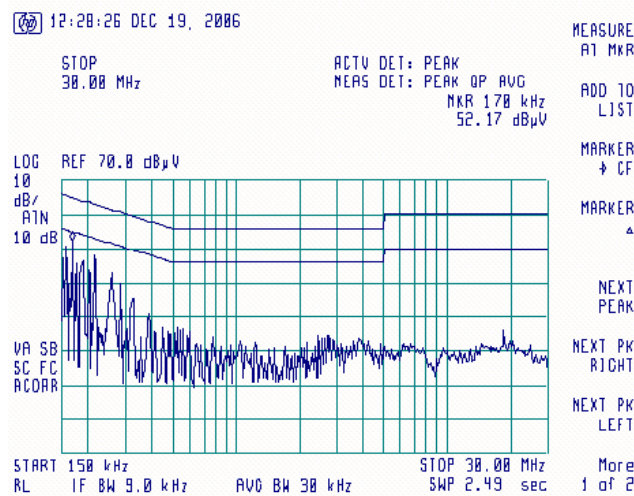

**Plot 8.1.4 Conducted emission measurements at the laptop power ports**

LINE: L2  
LIMIT: Class B  
EUT OPERATING MODE: Receive  
LIMIT: QUASI-PEAK, AVERAGE  
DETECTOR: PEAK

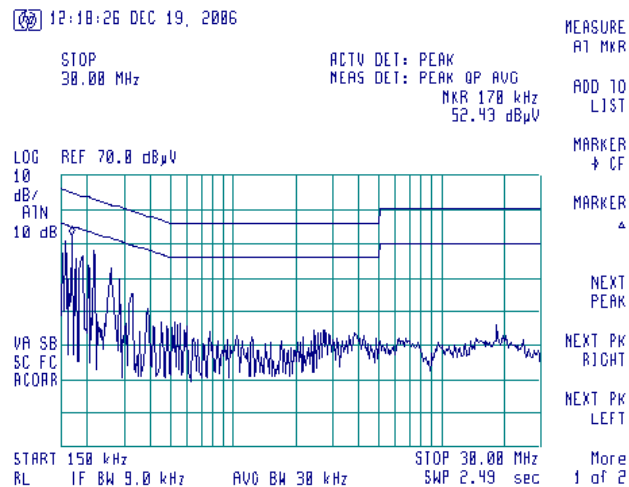

|                            |                               |                                          |                              |
|----------------------------|-------------------------------|------------------------------------------|------------------------------|
| <b>Test specification:</b> |                               | <b>Section 15.109, Radiated emission</b> |                              |
| <b>Test procedure:</b>     |                               | ANSI C63.4, Sections 11.6 and 12.1.4     |                              |
| <b>Test mode:</b>          | Compliance                    | <b>Verdict:</b>                          | <b>PASS</b>                  |
| <b>Date &amp; Time:</b>    | 12/8/2006 12:42:22 PM         |                                          |                              |
| <b>Temperature:</b> 22°C   | <b>Air Pressure:</b> 1011 hPa | <b>Relative Humidity:</b> 43 %           | <b>Power Supply:</b> 120 VAC |
| <b>Remarks:</b>            |                               |                                          |                              |

## 8.2 Radiated emission measurements

### 8.2.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.2.1.

Table 8.2.1 Radiated emission test limits

| Frequency,<br>MHz | Class B limit, dB(μV/m) |              | Class A limit, dB(μV/m) |              |
|-------------------|-------------------------|--------------|-------------------------|--------------|
|                   | 10 m distance           | 3 m distance | 10 m distance           | 3 m distance |
| 30 - 88           | 29.5*                   | 40.0         | 39.0                    | 49.5*        |
| 88 - 216          | 33.0*                   | 43.5         | 43.5                    | 54.0*        |
| 216 - 960         | 35.5*                   | 46.0         | 46.4                    | 56.9*        |
| Above 960         | 43.5*                   | 54.0         | 49.5                    | 60.0*        |

\* The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows:  $\text{Lim}_{S_2} = \text{Lim}_{S_1} + 20 \log (S_1/S_2)$ , where  $S_1$  and  $S_2$  – standard defined and test distance respectively in meters.

### 8.2.2 Test procedure for measurements in semi-anechoic chamber

**8.2.2.1** The EUT was set up as shown in Figure 8.2.1, energized and the performance check was conducted.

**8.2.2.2** The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.

**8.2.2.3** The worst test results (the lowest margins) were recorded in Table 8.2.2 and shown in the associated plots.

### 8.2.3 Test procedure for measurements at OATS

**8.2.3.1** The EUT was set up as shown in Figure 8.2.1 and associated photograph/s, energized and the performance check was conducted.

**8.2.3.2** Preliminary measurements were performed in the anechoic chamber at 3 m test distance. The specified frequency range was investigated with biconical and log periodic antennas connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed, its polarization was switched from vertical to horizontal and the EUT cables position was varied.

**8.2.3.3** The EUT was set up as shown in Figure 8.2.2, energized and the performance check was conducted.

**8.2.3.4** Final measurements were performed at the open area test site at 10 m test distance. The EUT wires and cables were arranged to produce maximum emission as it was found during preliminary measurements. The frequencies yield the worst test results (the lowest margins) during preliminary testing were investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m and its polarization was changed from vertical to horizontal. At frequencies where high ambient noise was encountered, the final measurements were taken in the anechoic chamber at 3 m distance.

**8.2.3.5** The worst test results (the lowest margins) were recorded in Table 8.2.2 and shown in the associated plots.

|                                                              |                               |                                |                              |
|--------------------------------------------------------------|-------------------------------|--------------------------------|------------------------------|
| <b>Test specification:</b> Section 15.109, Radiated emission |                               |                                |                              |
| <b>Test procedure:</b> ANSI C63.4, Sections 11.6 and 12.1.4  |                               |                                |                              |
| <b>Test mode:</b> Compliance                                 |                               | <b>Verdict:</b> PASS           |                              |
| <b>Date &amp; Time:</b> 12/8/2006 12:42:22 PM                |                               |                                |                              |
| <b>Temperature:</b> 22°C                                     | <b>Air Pressure:</b> 1011 hPa | <b>Relative Humidity:</b> 43 % | <b>Power Supply:</b> 120 VAC |
| <b>Remarks:</b>                                              |                               |                                |                              |

Figure 8.2.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment


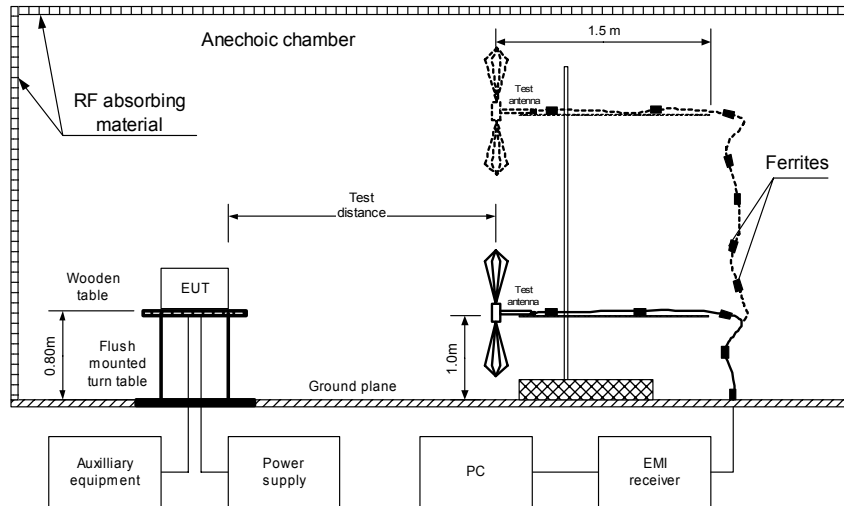


Figure 8.2.2 Setup for radiated emission measurements at OATS, table-top equipment





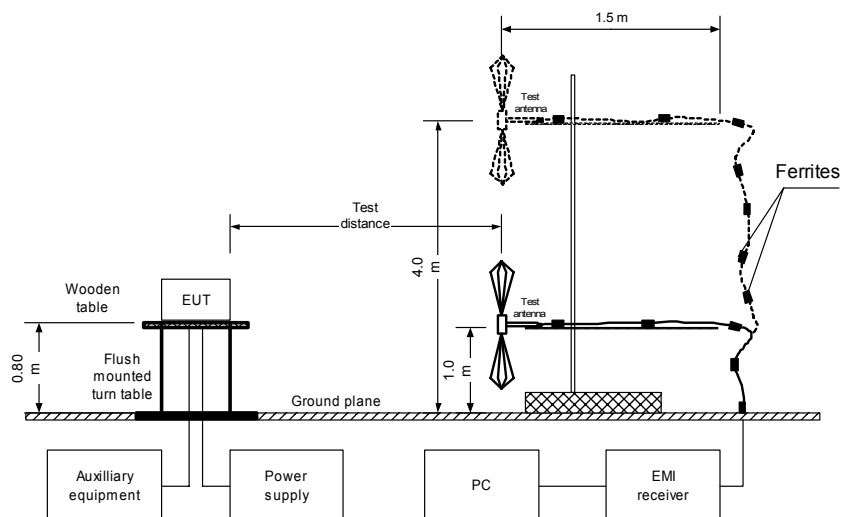

|                            |                                          |                                |                              |
|----------------------------|------------------------------------------|--------------------------------|------------------------------|
| <b>Test specification:</b> | <b>Section 15.109, Radiated emission</b> |                                |                              |
| <b>Test procedure:</b>     | ANSI C63.4, Sections 11.6 and 12.1.4     |                                |                              |
| <b>Test mode:</b>          | Compliance                               | <b>Verdict:</b>                | <b>PASS</b>                  |
| <b>Date &amp; Time:</b>    | 12/8/2006 12:42:22 PM                    |                                |                              |
| <b>Temperature:</b> 22°C   | <b>Air Pressure:</b> 1011 hPa            | <b>Relative Humidity:</b> 43 % | <b>Power Supply:</b> 120 VAC |
| <b>Remarks:</b>            |                                          |                                |                              |

Table 8.2.2 Radiated emission test results

EUT SET UP: TABLE-TOP  
LIMIT: Class B  
EUT OPERATING MODE: Receive  
TEST SITE: OATS  
TEST DISTANCE: 10 m  
DETECTORS USED: PEAK / QUASI-PEAK  
FREQUENCY RANGE: 30 MHz – 1000 MHz  
RESOLUTION BANDWIDTH: 120 kHz

| Frequency, MHz | Peak emission, dB(μV/m) | Quasi-peak                  |                 |             | Antenna polarization | Antenna height, m | Turn-table position**, degrees | Verdict |
|----------------|-------------------------|-----------------------------|-----------------|-------------|----------------------|-------------------|--------------------------------|---------|
|                |                         | Measured emission, dB(μV/m) | Limit, dB(μV/m) | Margin, dB* |                      |                   |                                |         |
| 365.315000     | 24.25                   | 22.10                       | -13.40          | 35.50       | V                    | 1                 | 180                            | Pass    |
| 431.983500     | 32.93                   | 29.56                       | -5.94           | 35.50       | V                    | 1                 | 180                            |         |
| 499.395000     | 22.94                   | 20.37                       | -15.13          | 35.50       | V                    | 1                 | 180                            |         |
| 566.045000     | 32.49                   | 28.36                       | -7.14           | 35.50       | V                    | 1                 | 180                            |         |
| 699.079600     | 30.11                   | 25.94                       | -9.56           | 35.50       | V                    | 1                 | 180                            |         |

Table 8.2.3 Radiated emission test results

EUT SET UP: TABLE-TOP  
LIMIT: Class B  
EUT OPERATING MODE: Receive  
TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
DETECTORS USED: PEAK / QUASI-PEAK  
FREQUENCY RANGE: 30 MHz – 1000 MHz  
RESOLUTION BANDWIDTH: 120 kHz

| Frequency, MHz | Peak emission, dB(μV/m) | Quasi-peak                  |                 |             | Antenna polarization | Antenna height, m | Turn-table position**, degrees | Verdict |
|----------------|-------------------------|-----------------------------|-----------------|-------------|----------------------|-------------------|--------------------------------|---------|
|                |                         | Measured emission, dB(μV/m) | Limit, dB(μV/m) | Margin, dB* |                      |                   |                                |         |
| 97.700000      | 38.70                   | 34.90                       | 43.50           | -8.60       | H                    | 2.8               | 3                              | Pass    |

\*- Margin = Measured emission - specification limit.

\*\*-. EUT front panel refer to 0 degrees position of turntable.

## Reference numbers of test equipment used

|         |         |         |         |         |         |         |         |
|---------|---------|---------|---------|---------|---------|---------|---------|
| HL 0521 | HL 0569 | HL 0589 | HL 0593 | HL 0594 | HL 0604 | HL 0813 | HL 1424 |
| HL 1430 | HL 1552 | HL 1848 | HL 1947 | HL 1984 | HL 2009 | HL 2697 |         |


Full description is given in Appendix A.

|                     |                                      |                         |                       |
|---------------------|--------------------------------------|-------------------------|-----------------------|
| Test specification: | Section 15.109, Radiated emission    |                         |                       |
| Test procedure:     | ANSI C63.4, Sections 11.6 and 12.1.4 |                         |                       |
| Test mode:          | Compliance                           | Verdict: PASS           |                       |
| Date & Time:        | 12/8/2006 12:42:22 PM                |                         |                       |
| Temperature: 22°C   | Air Pressure: 1011 hPa               | Relative Humidity: 43 % | Power Supply: 120 VAC |
| Remarks:            |                                      |                         |                       |

**Plot 8.2.1 Radiated emission measurements in 30 - 1000 MHz range, vertical antenna polarization**

TEST SITE: Anechoic chamber  
LIMIT: Class B  
TEST DISTANCE: 3 m  
EUT OPERATING MODE: Receive


13:48:22 08 DEC 2006

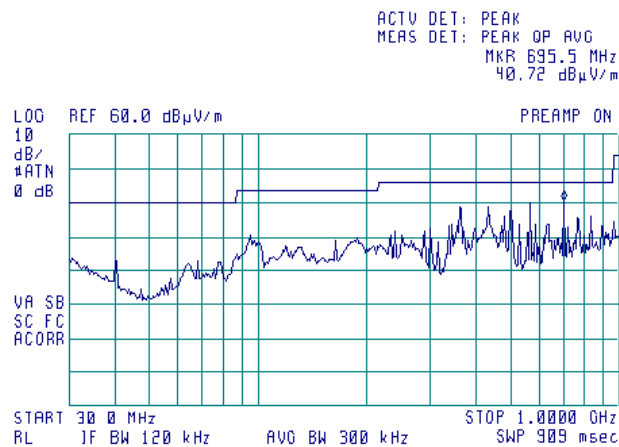

**Plot 8.2.2 Radiated emission measurements in 30 - 1000 MHz range, horizontal antenna polarization**

TEST SITE: Anechoic chamber  
LIMIT: Class B  
TEST DISTANCE: 3 m  
EUT OPERATING MODE: Receive

13:56:05 08 DEC 2006

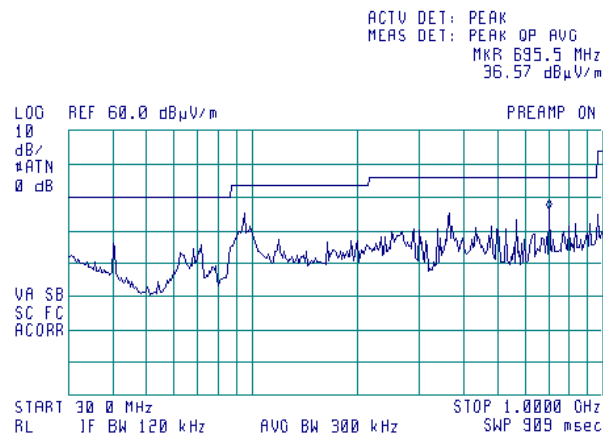

## 9 APPENDIX A Test facility description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility. Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47) and by Industry Canada for electromagnetic emissions (file numbers IC 2186-1 for OATS and IC 2186-2 for anechoic chamber), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, C-845 for conducted emissions site), assessed by TNO Certification EP&S (Netherlands) for a number of EMC, telecommunications, environmental, safety standards, and by AMTAC (UK) for safety of medical devices. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01) and approved by Israel Ministry of environmental protection, radiation hazards department (Permit number 1158).

Address: P.O. Box 23, Binyamina 30500, Israel.  
Telephone: +972 4628 8001  
Fax: +972 4628 8277  
e-mail: mail@hermonlabs.com  
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

## 10 APPENDIX B Specification references

|                     |                                                                                                                                                                      |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 47CFR part 15: 2006 | Radio Frequency Devices.                                                                                                                                             |
| ANSI C63.2: 1996    | American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications.                                            |
| ANSI C63.4: 2003    | American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz. |

## 11 APPENDIX C Test equipment and ancillaries used for tests

| HL No | Description                                                           | Manufacturer               | Model               | Ser. No.                          | Last Cal. | Due Cal.  |
|-------|-----------------------------------------------------------------------|----------------------------|---------------------|-----------------------------------|-----------|-----------|
| 0163  | LISN FCC/VDE/50 Ohm/50 uH + 5 Ohm, MIL-STD-461E, CISPR 16-1           | Electro-Metrics            | ANS 25/2            | 1314                              | 01-Oct-06 | 01-Oct-07 |
| 0337  | Probe Set, Hand held, 5 probes                                        | Electro-Metrics            | EHFP-30             | 238                               | 08-Jun-06 | 08-Jun-07 |
| 0446  | Antenna, Loop, Active, 10 kHz - 30 MHz                                | EMCO                       | 6502                | 2857                              | 28-Jun-06 | 28-Jun-07 |
| 0447  | LISN, 16/2, 300V RMS, 50 Ohm/50 uH + 5 Ohm, STD CISPR 16-1            | HL                         | LISN 16 - 1         | 066                               | 03-Nov-06 | 03-Nov-07 |
| 0495  | Autotransformer 0-255V, 10A                                           | Variac                     | EMPL01              | 495                               | 09-Mar-06 | 09-Mar-07 |
| 0521  | EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz | Hewlett Packard            | 8546A               | 3617A<br>00319,<br>3448A002<br>53 | 26-Sep-06 | 26-Sep-07 |
| 0569  | Antenna, Log Periodic, 200 - 1000 MHz                                 | Electro-Metrics            | LPA 25/30           | 1953                              | 10-Jan-06 | 10-Jan-07 |
| 0589  | Cable Coaxial, GORE A2P01POL118, 2.3 m                                | HL                         | GORE-3              | 176                               | 02-Dec-06 | 02-Dec-07 |
| 0593  | Antenna Mast, 1-4 m Pneumatic                                         | Madgesh                    | AM-F1               | 101                               | 02-Feb-06 | 02-Feb-07 |
| 0594  | Turn Table FOR ANECHOIC CHAMBER flush mount d=1.2 m Pneumatic         | HL                         | TT-WDC1             | 102                               | 26-Jan-06 | 26-Jan-07 |
| 0604  | Antenna BiconiLog Log-Periodic/T Bow-TIE 26 - 2000 MHz                | EMCO                       | 3141                | 9611-1011                         | 10-Jan-06 | 10-Jan-07 |
| 0784  | Antenna X-WING BILOG 20 MHz - 2 GHz                                   | Schaffner-Chase EMC        | CBL6140 A           | 1120                              | 10-Jan-06 | 10-Jan-07 |
| 0787  | Transient Limiter 9 kHz-200 MHz                                       | Hewlett Packard            | 11947A              | 3107A018<br>77                    | 21-Nov-06 | 21-Nov-07 |
| 0813  | Cable Coax, RG-214, 12 m, N-type connectors                           | HL                         | C214-12             | 149                               | 02-Dec-06 | 02-Dec-07 |
| 0892  | Multimeter Digital                                                    | Tabor Electronics          | DM 4021             | 232757                            | 20-Jul-06 | 20-Jul-07 |
| 1424  | Spectrum Analyzer, 30 Hz- 40 GHz                                      | Agilent Technologies       | 8564EC              | 3946A002<br>19                    | 30-Aug-06 | 30-Aug-07 |
| 1430  | EMI Receiver, 9 kHz - 2.9 GHz, System: HL1431, HL1432                 | Agilent Technologies       | 8542E               | 3807A002<br>62,3705A0<br>0217     | 01-Sep-06 | 01-Sep-07 |
| 1502  | Cable RF, 6 m, BNC/BNC                                                | Belden                     | M17/167<br>MIL-C-17 | 1502                              | 27-Nov-06 | 27-Nov-07 |
| 1510  | Cable RF, 8 m, BNC/BNC                                                | Belden                     | M17/167<br>MIL-C-17 | 1510                              | 02-Dec-06 | 02-Dec-07 |
| 1552  | Cable RF, 8 m                                                         | Alpha Wire                 | RG-214              | 1552                              | 02-Dec-06 | 02-Dec-07 |
| 1848  | Antenna mast 4m/6m with polarity control                              | Sh. I. Machines            | AM-5                | 1                                 | 18-Apr-06 | 18-Apr-07 |
| 1947  | Cable 18GHz, 6.5 m, blue                                              | Rhophase Microwave Limited | NPS-1803A-6500-NPS  | T4974                             | 17-Oct-06 | 17-Oct-07 |
| 1984  | Antenna, Double-Ridged Waveguide Horn, 1-18 GHz, 300 W, N-type        | EMC Test Systems           | 3115                | 9911-5964                         | 03-Mar-06 | 03-Mar-07 |
| 2004  | Cable RF, 3 m, BNC/BNC                                                | Alpha Wire                 | RG 58               | 2004                              | 11-Sep-06 | 11-Sep-07 |
| 2009  | Cable RF, 8 m                                                         | Alpha Wire                 | RG-214              | C-56                              | 02-Dec-06 | 02-Dec-07 |



| HL No | Description                  | Manufacturer                                              | Model     | Ser. No.   | Last Cal. | Due Cal.  |
|-------|------------------------------|-----------------------------------------------------------|-----------|------------|-----------|-----------|
| 2259  | Amplifier Low Noise 2-20 GHz | Sophia Wireless                                           | LNA0220-C | 0223       | 05-Nov-06 | 05-Nov-07 |
| 2697  | Antenna, 30 MHz - 3.0 GHz,   | Sunol Sciences.<br>Corp.<br>Pleasanton,<br>California USA | JB3       | A022805    | 10-Jan-06 | 10-Jan-07 |
| 3001  | EMC Analyzer, 9 kHz to 3 GHz | Agilent Technologies                                      | E7402A    | US39440180 | 22-Nov-06 | 22-Nov-07 |

## 12 APPENDIX D Test equipment correction factors

**Correction factor**  
**Line impedance stabilization network**  
**Model ANS-25/2, Electro-Metrics, HL 0163**

| Frequency, kHz | Correction factor, dB |
|----------------|-----------------------|
| 10             | 4.9                   |
| 15             | 2.86                  |
| 20             | 1.83                  |
| 25             | 1.25                  |
| 30             | 0.91                  |
| 35             | 0.69                  |
| 40             | 0.53                  |
| 50             | 0.35                  |
| 60             | 0.25                  |
| 70             | 0.18                  |
| 80             | 0.14                  |
| 90             | 0.11                  |
| 100            | 0.09                  |
| 125            | 0.06                  |
| 150            | 0.04                  |

The correction factor in dB is to be added to meter readings of an interference analyzer or a spectrum analyzer.

**Correction factor**  
**Line impedance stabilization network**  
**Model LISN 16 - 1**  
**Hermon Laboratories**

| Frequency, kHz | Correction factor, dB |
|----------------|-----------------------|
| 10             | 4.9                   |
| 15             | 2.86                  |
| 20             | 1.83                  |
| 25             | 1.25                  |
| 30             | 0.91                  |
| 35             | 0.69                  |
| 40             | 0.53                  |
| 50             | 0.35                  |
| 60             | 0.25                  |
| 70             | 0.18                  |
| 80             | 0.14                  |
| 90             | 0.11                  |
| 100            | 0.09                  |
| 125            | 0.06                  |
| 150            | 0.04                  |

The correction factor in dB is to be added to meter readings of an interference analyzer or a spectrum analyzer.

**Antenna factor  
Active loop antenna  
Model 6502, S/N 2857, HL 0446**

| Frequency,<br>MHz | Magnetic antenna factor,<br>dB | Electric antenna factor,<br>dB |
|-------------------|--------------------------------|--------------------------------|
| 0.009             | -32.8                          | 18.7                           |
| 0.010             | -33.8                          | 17.7                           |
| 0.020             | -38.3                          | 13.2                           |
| 0.050             | -41.1                          | 10.4                           |
| 0.075             | -41.3                          | 10.2                           |
| 0.100             | -41.6                          | 9.9                            |
| 0.150             | -41.7                          | 9.8                            |
| 0.250             | -41.6                          | 9.9                            |
| 0.500             | -41.8                          | 9.8                            |
| 0.750             | -41.9                          | 9.7                            |
| 1.000             | -41.4                          | 10.1                           |
| 2.000             | -41.5                          | 10.0                           |
| 3.000             | -41.4                          | 10.2                           |
| 4.000             | -41.4                          | 10.1                           |
| 5.000             | -41.5                          | 10.1                           |
| 10.000            | -41.9                          | 9.6                            |
| 15.000            | -41.9                          | 9.6                            |
| 20.000            | -42.2                          | 9.3                            |
| 25.000            | -42.8                          | 8.7                            |
| 30.000            | -44.0                          | 7.5                            |

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field intensity in dB( $\mu$ V/m).

**Antenna factor**  
**Biconilog antenna EMCO Model 3141**  
**Ser.No.1011, HL 0604**

| Frequency, MHz | Antenna Factor, dB(1/m) | Frequency, MHz | Antenna Factor, dB(1/m) |
|----------------|-------------------------|----------------|-------------------------|
| 26             | 7.8                     | 940            | 24.0                    |
| 28             | 7.8                     | 960            | 24.1                    |
| 30             | 7.8                     | 980            | 24.5                    |
| 40             | 7.2                     | 1000           | 24.9                    |
| 60             | 7.1                     | 1020           | 25.0                    |
| 70             | 8.5                     | 1040           | 25.2                    |
| 80             | 9.4                     | 1060           | 25.4                    |
| 90             | 9.8                     | 1080           | 25.6                    |
| 100            | 9.7                     | 1100           | 25.7                    |
| 110            | 9.3                     | 1120           | 26.0                    |
| 120            | 8.8                     | 1140           | 26.4                    |
| 130            | 8.7                     | 1160           | 27.0                    |
| 140            | 9.2                     | 1180           | 27.0                    |
| 150            | 9.8                     | 1200           | 26.7                    |
| 160            | 10.2                    | 1220           | 26.5                    |
| 170            | 10.4                    | 1240           | 26.5                    |
| 180            | 10.4                    | 1260           | 26.5                    |
| 190            | 10.3                    | 1280           | 26.6                    |
| 200            | 10.6                    | 1300           | 27.0                    |
| 220            | 11.6                    | 1320           | 27.8                    |
| 240            | 12.4                    | 1340           | 28.3                    |
| 260            | 12.8                    | 1360           | 28.2                    |
| 280            | 13.7                    | 1380           | 27.9                    |
| 300            | 14.7                    | 1400           | 27.9                    |
| 320            | 15.2                    | 1420           | 27.9                    |
| 340            | 15.4                    | 1440           | 27.8                    |
| 360            | 16.1                    | 1460           | 27.8                    |
| 380            | 16.4                    | 1480           | 28.0                    |
| 400            | 16.6                    | 1500           | 28.5                    |
| 420            | 16.7                    | 1520           | 28.9                    |
| 440            | 17.0                    | 1540           | 29.6                    |
| 460            | 17.7                    | 1560           | 29.8                    |
| 480            | 18.1                    | 1580           | 29.6                    |
| 500            | 18.5                    | 1600           | 29.5                    |
| 520            | 19.1                    | 1620           | 29.3                    |
| 540            | 19.5                    | 1640           | 29.2                    |
| 560            | 19.8                    | 1660           | 29.4                    |
| 580            | 20.6                    | 1680           | 29.6                    |
| 600            | 21.3                    | 1700           | 29.8                    |
| 620            | 21.5                    | 1720           | 30.3                    |
| 640            | 21.2                    | 1740           | 30.8                    |
| 660            | 21.4                    | 1760           | 31.1                    |
| 680            | 21.9                    | 1780           | 31.0                    |
| 700            | 22.2                    | 1800           | 30.9                    |
| 720            | 22.2                    | 1820           | 30.7                    |
| 740            | 22.1                    | 1840           | 30.6                    |
| 760            | 22.3                    | 1860           | 30.6                    |
| 780            | 22.6                    | 1880           | 30.6                    |
| 800            | 22.7                    | 1900           | 30.6                    |
| 820            | 22.9                    | 1920           | 30.7                    |
| 840            | 23.1                    | 1940           | 30.9                    |
| 860            | 23.4                    | 1960           | 31.2                    |
| 880            | 23.8                    | 1980           | 31.6                    |
| 900            | 24.1                    | 2000           | 32.0                    |
| 920            | 24.1                    |                |                         |

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field intensity in dB( $\mu$ V/m).



Antenna factor  
Biconilog antenna  
CHASE Model CBL6140A  
Serial no: 1120, HL 0784

| Frequency, MHz | Antenna factor, dB |
|----------------|--------------------|
| 30.0           | 4.3                |
| 35.0           | 7.3                |
| 40.0           | 8.8                |
| 45.0           | 9.3                |
| 50.0           | 9.6                |
| 60.0           | 9.9                |
| 70.0           | 9.2                |
| 80.0           | 7.6                |
| 90.0           | 7.6                |
| 100.0          | 8.8                |
| 120.0          | 7.2                |
| 125.0          | 7.5                |
| 140.0          | 7.7                |
| 150.0          | 7.9                |
| 160.0          | 11.4               |
| 175.0          | 8.6                |
| 180.0          | 8.8                |
| 200.0          | 9.8                |
| 250.0          | 12.5               |
| 300.0          | 12.2               |
| 350.0          | 14.8               |
| 400.0          | 16.1               |
| 450.0          | 16.5               |
| 500.0          | 17.6               |
| 550.0          | 18.3               |
| 600.0          | 18.5               |
| 650.0          | 19.8               |
| 700.0          | 20.1               |
| 750.0          | 20.8               |
| 800.0          | 21.2               |
| 850.0          | 22.0               |
| 900.0          | 22.2               |
| 950.0          | 23.2               |
| 1000.0         | 23.8               |

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field intensity in dB( $\mu$ V/m).

**Antenna factor**  
**Double-ridged wave guide horn antenna**  
**Model 3115, S/N 9911-5964, HL1984**

| Frequency,<br>MHz | Antenna factor,<br>dB(1/m) |
|-------------------|----------------------------|
| 1000.0            | 24.7                       |
| 1500.0            | 25.7                       |
| 2000.0            | 27.6                       |
| 2500.0            | 28.9                       |
| 3000.0            | 31.2                       |
| 3500.0            | 32.0                       |
| 4000.0            | 32.5                       |
| 4500.0            | 32.7                       |
| 5000.0            | 33.6                       |
| 5500.0            | 35.1                       |
| 6000.0            | 35.4                       |
| 6500.0            | 34.9                       |
| 7000.0            | 36.1                       |
| 7500.0            | 37.8                       |
| 8000.0            | 38.0                       |
| 8500.0            | 38.1                       |
| 9000.0            | 39.1                       |
| 9500.0            | 38.3                       |
| 10000.0           | 38.6                       |
| 10500.0           | 38.2                       |
| 11000.0           | 38.7                       |
| 11500.0           | 39.5                       |
| 12000.0           | 40.0                       |
| 12500.0           | 40.4                       |
| 13000.0           | 40.5                       |
| 13500.0           | 41.1                       |
| 14000.0           | 41.6                       |
| 14500.0           | 41.7                       |
| 15000.0           | 38.7                       |
| 15500.0           | 38.2                       |
| 16000.0           | 38.8                       |
| 16500.0           | 40.5                       |
| 17000.0           | 42.5                       |
| 17500.0           | 45.9                       |
| 18000.0           | 49.4                       |

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field intensity in dB( $\mu$ V/m).

Antenna calibration  
Sunol Sciences Inc., model JB3, serial number A022805, HL 2697

| Frequency, MHz | ACF, dB | Gain, dBi | Num gain | Frequency, MHz | ACF, dB | Gain, dBi | Num gain | Frequency, MHz | ACF, dB | Gain, dBi | Num gain | Frequency, MHz | ACF, dB | Gain, dBi | Num gain | Frequency, MHz | ACF, dB | Gain, dBi | Num gain |
|----------------|---------|-----------|----------|----------------|---------|-----------|----------|----------------|---------|-----------|----------|----------------|---------|-----------|----------|----------------|---------|-----------|----------|
| 30             | 22.2    | -22.5     | 0.01     | 520            | 19.7    | 6.3       | 4.27     | 1215           | 24.9    | 7.0       | 5.05     | 1810           | 28.3    | 7.1       | 5.08     | 2405           | 30.9    | 6.9       | 4.93     |
| 35             | 18.5    | -17.4     | 0.02     | 525            | 19.7    | 6.5       | 4.42     | 1220           | 24.9    | 7.0       | 4.99     | 1815           | 28.5    | 6.9       | 4.91     | 2410           | 30.9    | 6.9       | 4.89     |
| 40             | 14.7    | -12.5     | 0.06     | 530            | 19.6    | 6.6       | 4.57     | 1225           | 25.1    | 6.9       | 4.91     | 1820           | 28.6    | 6.8       | 4.74     | 2415           | 31.0    | 6.9       | 4.85     |
| 45             | 11.3    | -8.1      | 0.16     | 535            | 19.7    | 6.5       | 4.48     | 1230           | 25.2    | 6.8       | 4.92     | 1825           | 28.7    | 6.8       | 4.76     | 2420           | 31.0    | 6.8       | 4.82     |
| 45             | 11.3    | -8.1      | 0.16     | 640            | 19.9    | 6.4       | 4.40     | 1235           | 25.1    | 7.0       | 4.96     | 1830           | 28.7    | 6.8       | 4.76     | 2425           | 31.1    | 6.8       | 4.81     |
| 50             | 8.9     | -4.7      | 0.34     | 645            | 19.9    | 6.5       | 4.45     | 1240           | 25.0    | 7.1       | 5.09     | 1835           | 28.7    | 6.7       | 4.72     | 2430           | 31.0    | 6.9       | 4.87     |
| 55             | 7.9     | -2.8      | 0.52     | 650            | 19.9    | 6.5       | 4.51     | 1245           | 25.0    | 7.1       | 5.12     | 1840           | 28.8    | 6.7       | 4.69     | 2435           | 31.0    | 6.9       | 4.88     |
| 60             | 7.8     | -2.1      | 0.62     | 655            | 19.9    | 6.6       | 4.60     | 1250           | 25.0    | 7.1       | 5.15     | 1845           | 28.6    | 6.9       | 4.90     | 2440           | 31.2    | 6.8       | 4.74     |
| 65             | 8.5     | -2.0      | 0.63     | 660            | 19.9    | 6.7       | 4.69     | 1255           | 25.0    | 7.2       | 5.25     | 1850           | 28.4    | 7.1       | 5.12     | 2445           | 31.1    | 6.9       | 4.91     |
| 70             | 9.0     | -1.9      | 0.64     | 665            | 19.9    | 6.7       | 4.70     | 1260           | 24.9    | 7.3       | 5.36     | 1855           | 28.5    | 7.0       | 5.07     | 2450           | 31.0    | 7.0       | 4.96     |
| 75             | 8.8     | -1.1      | 0.78     | 670            | 20.0    | 6.7       | 4.71     | 1265           | 25.0    | 7.3       | 5.31     | 1860           | 28.6    | 7.0       | 5.01     | 2455           | 31.0    | 7.0       | 5.01     |
| 80             | 8.4     | -0.2      | 0.97     | 675            | 20.1    | 6.7       | 4.71     | 1270           | 25.1    | 7.2       | 5.26     | 1865           | 28.5    | 7.1       | 5.17     | 2460           | 30.9    | 7.2       | 5.19     |
| 85             | 8.0     | 0.8       | 1.20     | 680            | 20.1    | 6.7       | 4.71     | 1275           | 25.3    | 7.0       | 5.05     | 1870           | 28.4    | 7.3       | 5.33     | 2465           | 31.1    | 6.9       | 4.96     |
| 90             | 8.2     | 1.1       | 1.29     | 685            | 20.2    | 6.8       | 4.79     | 1280           | 25.5    | 6.8       | 4.94     | 1875           | 28.4    | 7.2       | 5.28     | 2470           | 31.3    | 6.8       | 4.76     |
| 95             | 9.2     | 0.5       | 1.13     | 690            | 20.1    | 6.9       | 4.88     | 1285           | 25.4    | 7.0       | 4.97     | 1880           | 28.5    | 7.2       | 5.22     | 2475           | 31.4    | 6.7       | 4.69     |
| 100            | 10.6    | -0.4      | 0.92     | 695            | 20.2    | 6.8       | 4.82     | 1290           | 25.3    | 7.1       | 5.10     | 1885           | 28.5    | 7.2       | 5.22     | 2480           | 31.3    | 6.8       | 4.79     |
| 110            | 12.6    | -1.6      | 0.70     | 705            | 20.4    | 6.8       | 4.75     | 1300           | 25.2    | 7.3       | 5.33     | 1895           | 28.6    | 7.2       | 5.24     | 2490           | 31.1    | 7.0       | 4.99     |
| 115            | 13.3    | -1.9      | 0.65     | 710            | 20.5    | 6.8       | 4.75     | 1305           | 25.3    | 7.2       | 5.21     | 1900           | 28.6    | 7.2       | 5.27     | 2495           | 31.2    | 7.0       | 4.99     |
| 120            | 13.9    | -2.1      | 0.62     | 715            | 20.5    | 6.8       | 4.80     | 1310           | 25.4    | 7.1       | 5.09     | 1905           | 28.5    | 7.3       | 5.36     | 2500           | 30.9    | 7.2       | 5.27     |
| 125            | 14.2    | -2.0      | 0.63     | 720            | 20.5    | 6.9       | 4.85     | 1315           | 25.4    | 7.2       | 5.23     | 1910           | 28.5    | 7.4       | 5.45     | 2505           | 31.1    | 7.1       | 5.15     |
| 130            | 14.2    | -1.7      | 0.68     | 725            | 20.6    | 6.8       | 4.81     | 1320           | 25.3    | 7.3       | 5.36     | 1915           | 28.5    | 7.3       | 5.38     | 2510           | 31.0    | 7.2       | 5.22     |
| 135            | 13.8    | -1.0      | 0.79     | 730            | 20.7    | 6.8       | 4.77     | 1325           | 25.5    | 7.2       | 5.21     | 1920           | 28.6    | 7.3       | 5.31     | 2515           | 31.0    | 7.2       | 5.26     |
| 140            | 13.4    | -0.3      | 0.94     | 735            | 20.9    | 6.9       | 4.85     | 1330           | 25.6    | 7.0       | 5.06     | 1925           | 28.6    | 7.3       | 5.35     | 2520           | 31.0    | 7.0       | 5.05     |
| 145            | 12.9    | 0.8       | 1.21     | 745            | 20.6    | 6.6       | 4.59     | 1340           | 25.7    | 7.1       | 5.09     | 1935           | 28.7    | 7.2       | 5.54     | 2530           | 31.0    | 7.3       | 5.37     |
| 155            | 12.7    | 1.3       | 1.34     | 750            | 21.0    | 6.7       | 4.64     | 1345           | 25.7    | 7.1       | 5.13     | 1940           | 28.4    | 7.6       | 5.70     | 2535           | 31.2    | 7.0       | 5.08     |
| 160            | 12.7    | 1.6       | 1.44     | 755            | 21.0    | 6.8       | 4.74     | 1350           | 25.7    | 7.1       | 5.17     | 1945           | 28.5    | 7.5       | 5.59     | 2540           | 31.2    | 7.1       | 5.09     |
| 165            | 12.5    | 2.0       | 1.59     | 760            | 21.0    | 6.8       | 4.83     | 1355           | 25.8    | 7.0       | 5.06     | 1950           | 28.6    | 7.4       | 5.48     | 2545           | 31.0    | 7.3       | 5.43     |
| 170            | 12.2    | 2.6       | 1.83     | 765            | 21.1    | 6.8       | 4.73     | 1360           | 25.9    | 6.9       | 4.95     | 1955           | 28.6    | 7.5       | 5.57     | 2550           | 31.0    | 7.3       | 5.36     |
| 175            | 11.3    | 2.3       | 2.13     | 770            | 21.3    | 6.7       | 4.64     | 1365           | 26.1    | 7.0       | 4.95     | 1960           | 28.5    | 7.6       | 5.65     | 2555           | 31.1    | 7.2       | 5.30     |
| 180            | 11.6    | 3.7       | 2.36     | 775            | 21.3    | 6.7       | 4.68     | 1370           | 26.0    | 7.0       | 4.96     | 1965           | 28.7    | 7.4       | 5.47     | 2560           | 31.0    | 7.4       | 5.47     |
| 185            | 11.5    | 4.0       | 2.54     | 780            | 21.3    | 6.7       | 4.72     | 1375           | 26.0    | 7.0       | 5.01     | 1970           | 28.9    | 7.2       | 5.29     | 2565           | 30.8    | 7.6       | 5.70     |
| 190            | 11.6    | 4.2       | 2.61     | 785            | 21.3    | 6.8       | 4.77     | 1380           | 26.0    | 7.0       | 4.92     | 1975           | 28.9    | 7.2       | 5.22     | 2570           | 31.1    | 7.3       | 5.37     |
| 200            | 13.1    | 3.2       | 2.07     | 795            | 21.4    | 6.8       | 4.79     | 1390           | 26.1    | 6.9       | 4.96     | 1985           | 29.1    | 7.1       | 5.11     | 2580           | 31.6    | 6.9       | 4.87     |
| 210            | 15.6    | 5.6       | 3.66     | 805            | 21.6    | 6.7       | 4.71     | 1400           | 26.2    | 7.0       | 4.98     | 1990           | 29.3    | 7.2       | 5.09     | 2590           | 31.6    | 6.9       | 4.88     |
| 215            | 11.3    | 5.6       | 3.59     | 810            | 21.7    | 6.7       | 4.65     | 1405           | 26.1    | 7.0       | 5.02     | 2000           | 29.1    | 7.1       | 5.11     | 2595           | 31.5    | 7.0       | 4.97     |
| 220            | 11.6    | 5.5       | 3.52     | 815            | 21.7    | 6.7       | 4.72     | 1410           | 26.1    | 7.1       | 5.09     | 2005           | 29.1    | 7.1       | 5.16     | 2600           | 31.6    | 6.9       | 4.88     |
| 225            | 11.7    | 5.5       | 3.55     | 820            | 21.7    | 6.8       | 4.80     | 1415           | 26.2    | 7.0       | 5.02     | 2010           | 29.1    | 7.1       | 5.15     | 2605           | 31.3    | 7.2       | 5.30     |
| 230            | 11.9    | 5.5       | 3.57     | 825            | 21.7    | 6.8       | 4.82     | 1420           | 26.3    | 7.0       | 4.96     | 2015           | 29.2    | 7.1       | 5.13     | 2610           | 31.4    | 7.1       | 5.15     |
| 235            | 12.1    | 5.5       | 3.56     | 830            | 21.7    | 6.9       | 4.85     | 1425           | 26.2    | 7.1       | 5.10     | 2020           | 29.2    | 7.1       | 5.18     | 2615           | 31.7    | 6.9       | 4.88     |
| 240            | 12.3    | 5.5       | 3.54     | 835            | 21.8    | 6.8       | 4.82     | 1430           | 26.1    | 7.2       | 5.25     | 2025           | 29.3    | 7.1       | 5.08     | 2620           | 31.6    | 7.0       | 4.97     |
| 245            | 12.3    | 5.7       | 3.71     | 840            | 21.9    | 6.8       | 4.80     | 1435           | 26.1    | 7.2       | 5.24     | 2030           | 29.3    | 7.0       | 5.05     | 2625           | 31.4    | 7.1       | 5.17     |
| 250            | 12.3    | 5.9       | 3.88     | 845            | 21.9    | 6.8       | 4.83     | 1440           | 26.2    | 7.2       | 5.24     | 2035           | 29.3    | 7.1       | 5.07     | 2630           | 31.6    | 7.0       | 5.00     |
| 255            | 12.5    | 5.9       | 3.85     | 850            | 21.9    | 6.9       | 4.86     | 1445           | 26.3    | 7.1       | 5.11     | 2040           | 29.3    | 7.1       | 5.13     | 2635           | 31.8    | 6.8       | 4.82     |
| 260            | 12.7    | 5.8       | 3.83     | 855            | 22.0    | 6.8       | 4.80     | 1450           | 26.5    | 7.0       | 4.98     | 2045           | 29.2    | 7.2       | 5.23     | 2640           | 31.7    | 7.0       | 4.98     |
| 265            | 13.2    | 5.5       | 3.54     | 860            | 22.1    | 6.8       | 4.74     | 1455           | 26.4    | 7.1       | 5.07     | 2050           | 29.2    | 7.2       | 5.27     | 2645           | 31.7    | 6.9       | 4.93     |
| 270            | 13.7    | 5.3       | 3.27     | 865            | 22.0    | 6.9       | 4.92     | 1460           | 26.4    | 7.1       | 5.17     | 2055           | 29.3    | 7.2       | 5.21     | 2650           | 31.8    | 6.9       | 4.85     |
| 275            | 13.7    | 5.3       | 3.39     | 870            | 21.9    | 7.1       | 5.11     | 1465           | 26.4    | 7.2       | 5.19     | 2060           | 29.5    | 7.0       | 5.02     | 2655           | 31.8    | 6.9       | 4.85     |
| 280            | 13.7    | 5.4       | 3.50     | 875            | 22.0    | 7.1       | 5.08     | 1470           | 26.4    | 7.2       | 5.22     | 2065           | 29.4    | 7.1       | 5.08     | 2660           | 31.7    | 7.0       | 5.02     |
| 285            | 13.7    | 5.6       | 3.61     | 880            | 22.1    | 7.0       | 5.05     | 1475           | 26.4    | 7.1       | 5.17     | 2070           | 29.4    | 7.1       | 5.10     | 2665           | 32.0    | 6.7       | 4.71     |
| 290            | 13.7    | 5.7       | 3.72     | 885            | 22.1    | 7.0       | 5.06     | 1480           | 26.5    | 7.1       | 5.12     | 2075           | 29.5    | 7.0       | 5.01     | 2670           | 32.0    | 6.7       | 4.67     |
| 295            | 13.8    | 5.8       | 3.77     | 890            | 22.1    | 7.0       | 5.06     | 1485           | 26.5    | 7.1       | 5.14     | 2080           | 29.8    | 6.8       | 4.76     | 2675           | 31.9    | 6.8       | 4.81     |
| 300            | 13.9    | 5.8       | 3.81     | 895            | 22.2    | 7.1       | 5.09     | 1490           | 26.6    | 7.1       | 5.17     | 2085           | 29.8    | 6.9       | 4.84     | 2680           | 31.7    | 7.0       | 5.04     |
| 305            | 14.0    | 5.9       | 3.85     | 900            | 22.2    | 7.1       | 5.12     | 1495           | 26.5    | 7.2       | 5.24     | 2090           | 29.7    | 6.9       | 4.88     | 2685           | 31.9    | 6.8       | 4.83     |
| 310            | 14.1    | 5.9       | 3.88     | 905            | 22.3    | 7.1       | 5.09     | 1500           | 26.5    | 7.2       | 5.31     | 2095           | 29.8    | 6.8       | 4.78     | 2690           | 32.1    | 6.7       | 4.72     |
| 315            | 14.3    | 5.9       | 3.89     | 910            | 22.3    | 7.0       | 5.05     | 1505           | 26.5    | 7.2       | 5.27     | 2100           | 29.9    | 6.8       | 4.75     | 2695           | 32.1    | 6.7       | 4.71     |
| 320            | 14.4    | 5.9       | 3.90     | 915            | 22.4    | 7.0       | 4.99     | 1510           | 26.6    | 7.2       | 5.23     | 2105           | 29.8    | 6.8       | 4.81     | 2700           | 32.0    | 6.8       | 4.81     |
| 325            | 14.5    | 5.9       | 3.92     | 920            | 22.6    | 6.9       | 4.92     | 1515           | 26.6    | 7.2       | 5.30     | 2110           | 29.9    | 6.8       | 4.78     | 2705           | 32.0    | 6.8       | 4.80     |
| 330            | 14.6    | 5.9       | 3.93     | 925            | 22.7    | 6.9       | 4.85     | 1520           | 26.5    | 7.3       | 5.38     | 2115           | 29.9    | 6.8       | 4.76     | 2710           | 32.1    | 6.8       | 4.79     |
| 335            | 14.7    | 6.0       | 4.02     | 930            | 22.8    | 6.8       | 4.77     | 1525           | 26.6    | 7.3       | 5.37     | 2120           | 29.9    | 6.8       | 4.84     | 2715           | 32.1    | 6.7       | 4.71     |
| 340            | 14.7    | 6.2       | 4.12     | 935            | 22.8    | 6.8       | 4.83     | 1530           | 26.6    | 7.3       | 5.36     | 2125           | 29.9    | 6.9       | 4.89     | 2720           | 32.4    | 6.5       | 4.47     |
| 350            | 15.1    | 6.0       | 3.99     | 945            | 22.8    | 6.9       | 4.87     | 1540           | 26.5    | 7.4       | 5.53     | 2135           | 29.8    | 6.9       | 4.94     | 2730           | 31.9    | 7.0       | 5.05     |
| 355            | 15.3    | 5.9       | 3.88     | 950            | 22.9    | 6.9       | 4.85     | 1545           | 26.5    | 7.5       | 5.58     | 2140           | 29.8    | 7.1       | 5.08     | 2735           | 31.6    | 7.4       | 5.44     |
| 360            | 15.6    | 5.8       | 3.78     | 955            | 23.0    | 6.8       | 4.81     | 1550           | 26.5    | 7.5       | 5.63     | 2145           | 29.9    | 6.9       | 4.92     | 2740           | 31.6    | 7.1       | 5.46     |
| 365            | 15.5    | 5.9       | 3.89     | 960            | 23.1    | 6.8       | 4.77     | 1555           | 26.7    | 7.3       | 5.39     | 2150           | 29.9    | 7.0       | 4.98     | 2745           | 31.9    | 7.0       | 5.06     |
| 370            | 15.6    | 6.0       | 4.01     | 965            | 23.1    | 6.7       | 4.73     | 1560           | 26.9    | 7.1       | 5.16     | 2155           | 29.8    | 7.1       | 5.10     | 2750           | 32.0    | 6.9       | 4.94     |
| 375            | 15.6    | 6.1       | 4.03     | 970            | 23.2    | 6.7       | 4.69     | 1565           | 26.9    | 7.2       | 5.23     | 2160           | 29.8    | 7.1       | 5.09     | 2755           | 32.0    | 7.0       | 4.98     |
| 380            | 15.7    | 6.1       | 4.05     | 975            | 23.3    | 6.6       | 4.62     | 1570           | 26.9    | 7.2       | 5.30     | 2165           | 29.9    | 7.0       | 5.00     | 2760           | 32.0    | 7.0       | 5.06     |
| 385            | 15.7    | 6.2       | 4.15     | 980            | 23.5    | 6.6       | 4.54     | 1575           | 27.0    | 7.2       | 5.23     | 2170           | 29.9    | 7.1       | 5.07     | 2765           | 32.2    |           |          |

**Cable loss**  
Cable Coaxial, GORE A2P01POL118, 2.3 m, model:GORE-3, HL 0589  
+ Cable Coaxial, ANDREW PSWJ4, 6m, model: ANDREW-6, HL 1004

| No. | Frequency,<br>MHz | Cable loss,<br>dB | Tolerance<br>(Specification),<br>dB | Measurement<br>uncertainty,<br>dB |
|-----|-------------------|-------------------|-------------------------------------|-----------------------------------|
| 1   | 30                | 0.33              | ≤ 6.5                               | ±0.12                             |
| 2   | 50                | 0.40              |                                     |                                   |
| 3   | 100               | 0.57              |                                     |                                   |
| 4   | 300               | 0.97              |                                     |                                   |
| 5   | 500               | 1.25              |                                     |                                   |
| 6   | 800               | 1.59              |                                     |                                   |
| 7   | 1000              | 1.81              |                                     |                                   |
| 8   | 1200              | 1.97              |                                     |                                   |
| 9   | 1400              | 2.15              |                                     |                                   |
| 10  | 1600              | 2.28              |                                     |                                   |
| 11  | 1800              | 2.43              |                                     |                                   |
| 12  | 2000              | 2.61              |                                     |                                   |
| 13  | 2200              | 2.75              |                                     |                                   |
| 14  | 2400              | 2.89              |                                     |                                   |
| 15  | 2600              | 2.97              |                                     |                                   |
| 16  | 2800              | 3.21              | ≤ 6.5                               | ±0.12                             |
| 17  | 3000              | 3.32              |                                     |                                   |
| 18  | 3300              | 3.47              |                                     | ±0.17                             |
| 19  | 3600              | 3.62              |                                     |                                   |
| 20  | 3900              | 3.84              |                                     |                                   |
| 21  | 4200              | 3.92              |                                     |                                   |
| 22  | 4500              | 4.07              |                                     |                                   |
| 23  | 4800              | 4.36              |                                     |                                   |
| 24  | 5100              | 4.62              |                                     |                                   |
| 25  | 5400              | 4.78              |                                     |                                   |
| 26  | 5700              | 5.16              |                                     |                                   |
| 27  | 6000              | 5.67              |                                     |                                   |
| 28  | 6500              | 5.99              |                                     |                                   |

**Cable loss**  
**Cable RG-214, HL 0813**

| No. | Frequency,<br>MHz | Cable loss,<br>dB |
|-----|-------------------|-------------------|
| 1   | 10                | 0.15              |
| 2   | 20                | 0.40              |
| 3   | 30                | 0.51              |
| 4   | 40                | 0.61              |
| 5   | 50                | 0.68              |
| 6   | 60                | 0.76              |
| 7   | 70                | 0.80              |
| 8   | 80                | 0.92              |
| 9   | 90                | 0.96              |
| 10  | 100               | 0.99              |
| 11  | 200               | 1.60              |
| 12  | 300               | 1.85              |
| 13  | 400               | 2.25              |
| 14  | 500               | 2.43              |
| 15  | 600               | 2.80              |
| 16  | 700               | 3.14              |
| 17  | 800               | 3.34              |
| 18  | 900               | 3.75              |
| 19  | 1000              | 4.05              |
| 20  | 1200              | 4.41              |
| 21  | 1400              | 4.81              |
| 22  | 1600              | 5.18              |
| 23  | 1800              | 5.58              |
| 24  | 2000              | 6.09              |
| 25  | 2500              | 7.27              |
| 26  | 2900              | 8.01              |

**Cable loss**  
**Cable coaxial, 6 m, model: M17/167 MIL-C-17, HL 1502**

| Frequency,<br>MHz | Cable loss,<br>dB |
|-------------------|-------------------|
| 0.1               | 0.02              |
| 1                 | 0.07              |
| 3                 | 0.15              |
| 5                 | 0.17              |
| 10                | 0.26              |
| 30                | 0.43              |
| 50                | 0.57              |
| 80                | 0.72              |
| 100               | 0.81              |
| 300               | 1.48              |
| 500               | 2.00              |
| 800               | 2.70              |
| 1000              | 3.09              |

**Cable loss**  
**Cable M17/167 MIL-C-17, HL 1510**

| No. | Frequency,<br>MHz | Cable loss,<br>dB |
|-----|-------------------|-------------------|
| 1   | 0.1               | 0.05              |
| 2   | 1                 | 0.09              |
| 3   | 3                 | 0.16              |
| 4   | 5                 | 0.18              |
| 5   | 10                | 0.27              |
| 6   | 30                | 0.44              |
| 7   | 50                | 0.58              |
| 8   | 80                | 0.69              |
| 9   | 100               | 0.82              |
| 10  | 300               | 1.48              |
| 11  | 500               | 2.01              |
| 12  | 800               | 2.65              |
| 13  | 1000              | 3.12              |

**Cable loss**  
**RF cable 8 m, model RG-214, HL 1552**

| No. | Frequency,<br>MHz | Cable loss,<br>dB | Measurement uncertainty,<br>dB | Notes |
|-----|-------------------|-------------------|--------------------------------|-------|
| 1   | 0.010             | 0.01              | ±0.05                          |       |
| 2   | 0.1               | 0.01              |                                |       |
| 3   | 1                 | 0.03              |                                |       |
| 4   | 10                | 0.12              |                                |       |
| 5   | 20                | 0.23              |                                |       |
| 6   | 30                | 0.30              |                                |       |
| 7   | 40                | 0.32              |                                |       |
| 8   | 50                | 0.34              |                                |       |
| 9   | 60                | 0.39              |                                |       |
| 10  | 70                | 0.43              |                                |       |
| 11  | 80                | 0.48              |                                |       |
| 12  | 90                | 0.50              |                                |       |
| 13  | 100               | 0.55              |                                |       |
| 14  | 200               | 0.78              |                                |       |
| 15  | 300               | 1.04              |                                |       |
| 16  | 400               | 1.16              |                                |       |
| 17  | 500               | 1.33              |                                |       |
| 18  | 600               | 1.51              |                                |       |
| 19  | 700               | 1.65              |                                |       |
| 20  | 800               | 1.77              |                                |       |
| 21  | 900               | 1.92              |                                |       |
| 22  | 1000              | 2.04              |                                |       |
| 23  | 1200              | 2.26              |                                |       |
| 24  | 1400              | 2.49              |                                |       |
| 25  | 1600              | 2.74              |                                |       |
| 26  | 1800              | 2.94              |                                |       |
| 27  | 2000              | 3.18              |                                |       |
| 28  | 2500              | 3.65              |                                |       |
| 29  | 2900              | 4.08              |                                |       |

**Cable loss**  
**Cable 18 GHz, 6.5 m, blue, model: NPS-1803A-6500-NPS, S/N T4974, HL 1947**

| Frequency,<br>GHz | Cable loss,<br>dB |
|-------------------|-------------------|
| 0.03              | 0.30              |
| 0.05              | 0.38              |
| 0.10              | 0.53              |
| 0.20              | 0.74              |
| 0.30              | 0.91              |
| 0.40              | 1.05              |
| 0.50              | 1.18              |
| 0.60              | 1.29              |
| 0.70              | 1.40              |
| 0.80              | 1.50              |
| 0.90              | 1.59              |
| 1.00              | 1.68              |
| 1.10              | 1.77              |
| 1.20              | 1.86              |
| 1.30              | 1.94              |
| 1.40              | 2.01              |
| 1.50              | 2.08              |
| 1.60              | 2.16              |
| 1.70              | 2.22              |
| 1.80              | 2.29              |
| 1.90              | 2.36              |
| 2.00              | 2.42              |
| 2.10              | 2.48              |
| 2.20              | 2.54              |
| 2.30              | 2.60              |
| 2.40              | 2.66              |
| 2.50              | 2.71              |
| 2.60              | 2.77              |
| 2.70              | 2.83              |
| 2.80              | 2.89              |
| 2.90              | 2.95              |
| 3.10              | 3.06              |
| 3.30              | 3.17              |
| 3.50              | 3.28              |
| 3.70              | 3.39              |
| 3.90              | 3.51              |
| 4.10              | 3.62              |
| 4.30              | 3.76              |
| 4.50              | 3.87              |
| 4.70              | 4.01              |
| 4.90              | 4.10              |
| 5.10              | 4.21              |
| 5.30              | 4.31              |
| 5.50              | 4.43              |
| 5.70              | 4.56              |
| 5.90              | 4.71              |

| Frequency,<br>GHz | Cable loss,<br>dB |
|-------------------|-------------------|
| 6.10              | 4.87              |
| 6.30              | 4.95              |
| 6.50              | 4.94              |
| 6.70              | 4.88              |
| 6.90              | 4.87              |
| 7.10              | 4.83              |
| 7.30              | 4.85              |
| 7.50              | 4.86              |
| 7.70              | 4.91              |
| 7.90              | 4.96              |
| 8.10              | 5.03              |
| 8.30              | 5.08              |
| 8.50              | 5.13              |
| 8.70              | 5.21              |
| 8.90              | 5.22              |
| 9.10              | 5.34              |
| 9.30              | 5.35              |
| 9.50              | 5.52              |
| 9.70              | 5.51              |
| 9.90              | 5.66              |
| 10.10             | 5.70              |
| 10.30             | 5.78              |
| 10.50             | 5.79              |
| 10.70             | 5.82              |
| 10.90             | 5.86              |
| 11.10             | 5.94              |
| 11.30             | 6.06              |
| 11.50             | 6.21              |
| 11.70             | 6.44              |
| 11.90             | 6.61              |
| 12.10             | 6.76              |
| 12.40             | 6.68              |
| 13.00             | 6.66              |
| 13.50             | 6.81              |
| 14.00             | 6.90              |
| 14.50             | 6.90              |
| 15.00             | 6.97              |
| 15.50             | 7.17              |
| 16.00             | 7.28              |
| 16.50             | 7.27              |
| 17.00             | 7.38              |
| 17.50             | 7.68              |
| 18.00             | 7.92              |



**Cable loss**  
**RF cable 8 m, model RG-214, HL 2009**

| No. | Frequency, MHz | Cable loss, dB | Tolerance (Specification), dB | Measurement uncertainty, dB |
|-----|----------------|----------------|-------------------------------|-----------------------------|
| 1   | 1              | 0.10           | NA                            | ±0.12                       |
| 2   | 10             | 0.14           |                               |                             |
| 3   | 30             | 0.25           |                               |                             |
| 4   | 50             | 0.34           |                               |                             |
| 5   | 100            | 0.53           |                               |                             |
| 6   | 300            | 0.99           |                               |                             |
| 7   | 500            | 1.31           |                               |                             |
| 8   | 800            | 1.73           |                               |                             |
| 9   | 1000           | 1.98           |                               |                             |
| 10  | 1100           | 2.11           |                               |                             |
| 11  | 1200           | 2.21           |                               |                             |
| 12  | 1300           | 2.35           |                               |                             |
| 13  | 1400           | 2.46           |                               |                             |
| 14  | 1500           | 2.55           |                               |                             |
| 15  | 1600           | 2.68           |                               |                             |
| 16  | 1700           | 2.78           |                               |                             |
| 17  | 1800           | 2.88           |                               |                             |
| 18  | 1900           | 2.98           |                               |                             |
| 19  | 2000           | 3.09           |                               |                             |

## 13 APPENDIX E Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

| Test description                                                                                      | Expanded uncertainty                                                                                                                                                                                                                                                                                         |
|-------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Conducted emissions with LISN                                                                         | 9 kHz to 150 kHz: $\pm 3.9$ dB<br>150 kHz to 30 MHz: $\pm 3.8$ dB                                                                                                                                                                                                                                            |
| Radiated emissions at 10 m measuring distance<br>Horizontal polarization<br><br>Vertical polarization | Biconilog antenna: $\pm 5.0$ dB<br>Biconical antenna: $\pm 5.0$ dB<br>Log periodic antenna: $\pm 5.1$ dB<br>Double ridged horn antenna: $\pm 5.3$ dB<br>Biconilog antenna: $\pm 5.5$ dB<br>Biconical antenna: $\pm 5.5$ dB<br>Log periodic antenna: $\pm 5.6$ dB<br>Double ridged horn antenna: $\pm 5.8$ dB |
| Radiated emissions at 3 m measuring distance<br>Horizontal polarization<br><br>Vertical polarization  | Biconilog antenna: $\pm 5.3$ dB<br>Biconical antenna: $\pm 5.0$ dB<br>Log periodic antenna: $\pm 5.3$ dB<br>Double ridged horn antenna: $\pm 5.3$ dB<br>Biconilog antenna: $\pm 6.0$ dB<br>Biconical antenna: $\pm 5.7$ dB<br>Log periodic antenna: $\pm 6.0$ dB<br>Double ridged horn antenna: $\pm 6.0$ dB |
| Conducted emissions at RF antenna connector                                                           | 9 kHz to 2.9 GHz: $\pm 2.6$ dB<br>2.9 GHz to 6.46 GHz: $\pm 3.5$ dB<br>6.46 GHz to 13.2 GHz: $\pm 4.3$ dB<br>13.2 GHz to 22.0 GHz: $\pm 5.0$ dB<br>22.0 GHz to 26.8 GHz: $\pm 5.5$ dB<br>26.8 GHz to 40.0 GHz: $\pm 4.8$ dB                                                                                  |

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

## 14 APPENDIX F Abbreviations and acronyms

|                |                                             |
|----------------|---------------------------------------------|
| A              | ampere                                      |
| AC             | alternating current                         |
| AM             | amplitude modulation                        |
| AVRG           | average (detector)                          |
| BB             | broad band                                  |
| cm             | centimeter                                  |
| dB             | decibel                                     |
| dBm            | decibel referred to one milliwatt           |
| dB( $\mu$ V)   | decibel referred to one microvolt           |
| dB( $\mu$ V/m) | decibel referred to one microvolt per meter |
| dB( $\mu$ A)   | decibel referred to one microampere         |
| DC             | direct current                              |
| EIRP           | equivalent isotropically radiated power     |
| ERP            | effective radiated power                    |
| EUT            | equipment under test                        |
| F              | frequency                                   |
| GHz            | gigahertz                                   |
| GND            | ground                                      |
| H              | height                                      |
| HL             | Hermon laboratories                         |
| Hz             | hertz                                       |
| ITE            | information technology equipment            |
| k              | kilo                                        |
| kHz            | kilohertz                                   |
| LISN           | line impedance stabilization network        |
| LO             | local oscillator                            |
| m              | meter                                       |
| Mbps           | Mega but per second                         |
| MHz            | megahertz                                   |
| min            | minute                                      |
| mm             | millimeter                                  |
| ms             | millisecond                                 |
| $\mu$ s        | microsecond                                 |
| NA             | not applicable                              |
| NB             | narrow band                                 |
| NT             | not tested                                  |
| OATS           | open area test site                         |
| $\Omega$       | Ohm                                         |
| PM             | pulse modulation                            |
| PS             | power supply                                |
| ppm            | part per million ( $10^{-6}$ )              |
| QP             | quasi-peak                                  |
| RE             | radiated emission                           |
| RF             | radio frequency                             |
| rms            | root mean square                            |
| Rx             | receive                                     |
| s              | second                                      |
| T              | temperature                                 |
| Tx             | transmit                                    |
| V              | volt                                        |
| WB             | wideband                                    |