

# TEST REPORT

ACCORDING TO: FCC CFR 47 part 15 subpart C, section 15.225 and subpart B;  
RSS-210 issue 8 Annex 2 section A2.6, ICES-003 Issue 6:2016

FOR:

**On Track Innovations Ltd.  
Ultra-compact, multi-purpose  
NFC reader**

**Models:**

**SATURN 8700 RS232**

**SATURN 8700 USB**

**FCC ID:JNX-OTI-SAT8700**

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.  
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

## Table of contents

1	Applicant information .....	3
2	Equipment under test attributes .....	3
3	Manufacturer information .....	3
4	Test details .....	3
5	Tests summary .....	4
6	EUT description .....	5
6.1	General information .....	5
6.2	Ports and lines .....	5
6.3	Support and test equipment .....	5
6.4	Changes made in EUT .....	5
6.5	Test configuration .....	6
6.6	Transmitter characteristics .....	7
7	Transmitter tests according to 47CFR part 15 subpart C and RSS-210 Annex 2 requirements .....	8
7.1	In band radiated emissions .....	8
7.2	Out of band radiated emissions .....	13
7.3	Frequency stability test .....	18
7.4	Conducted emission measurements at AC mains input / output port .....	20
7.5	Occupied bandwidth test .....	25
7.6	Antenna requirements .....	28
8	Unintentional emissions .....	29
8.1	Conducted emissions .....	29
8.2	Radiated emission measurements .....	33
9	APPENDIX A Test equipment and ancillaries used for tests .....	39
10	APPENDIX B Measurement uncertainties .....	40
11	APPENDIX C Test laboratory description .....	41
12	APPENDIX D Specification references .....	41
13	APPENDIX E Test equipment correction factors .....	42
14	APPENDIX F Abbreviations and acronyms .....	52

## 1 Applicant information

**Client name:** On Track Innovations Ltd.  
**Address:** Z.H.R. Industrial zone, P.O. Box 32, Rosh Pina, 12000, Israel  
**Telephone:** +972 4686 8003  
**Fax:** +972 4693 8887  
**E-mail:** h\_itay@otiglobal.com  
**Contact name:** Mr. Hemi Itay

## 2 Equipment under test attributes

**Product name:** Ultra-compact, multi-purpose NFC reader  
**Product type:** RFID transceiver  
**Model(s):** SATURN 8700  
**Serial number:** S2  
**Hardware version:** V1.0  
**Software release:** S8\_V0501  
**Receipt date:** 28-Feb-16

## 3 Manufacturer information

**Manufacturer name:** On Track Innovations Ltd.  
**Address:** Z.H.R. Industrial zone, P.O. Box 32, Rosh Pina, 12000, Israel  
**Telephone:** +972 4686 8003  
**Fax:** +972 4693 8887  
**E-Mail:** h\_itay@otiglobal.com  
**Contact name:** Mr. Hemi Itay

## 4 Test details




**Project ID:** 28089  
**Location:** Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel  
**Test started:** 28-Feb-16  
**Test completed:** 21-Mar-16  
**Test specification(s):** FCC CFR 47 part 15 subpart C, §15.225 and subpart B class B;  
RSS-210 issue 8 Annex 2 section A2.6, RSS-Gen issue 4, ICES-003 issue 6:2016

## 5 Tests summary

Test	Status
<b>Transmitter characteristics</b>	
FCC Sections 15.225(a) (b) (c) / RSS-210, Section A2.6, In band radiated emissions	Pass
FCC Sections 15.225(d) / RSS-210, Section A2.6, Out of band radiated emissions	Pass
FCC Section 15.225(e) / RSS-210, Section A2.6, Frequency stability	Pass
FCC Section 15.207(a) / RSS-Gen, Section 8.8, Conducted emission	Pass
FCC Section 15.215(c) / RSS-Gen, Section 6.6, Occupied bandwidth	Pass
FCC Section 15.203/ RSS-Gen, Section 8.3, Antenna requirements	Pass
<b>Unintentional emissions</b>	
FCC Section 15.107/ ICES-003, Section 6.1, class B, Conducted emission at AC power port	Pass
FCC Section 15.109/ RSS-Gen, Section 7.1.2/ ICES-003, Section 6.2 class B, Radiated emission	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
<b>Tested by:</b>	Mrs. E. Pitt, test engineer	March 21, 2016	
<b>Reviewed by:</b>	Mrs. M. Cherniavsky, certification engineer	May 22, 2016	
<b>Approved by:</b>	Mr. M. Nikishin, EMC and Radio group manager	July 12, 2016	



## 6 EUT description

### 6.1 General information

The EUT is an outdoor ultra-compact, multi-purpose NFC reader with proximity transceiver operating at 13.56 MHz. The EUT is powered from either 12 VDC (allowed range is 8-40VDC) or 5VDC and supports RS-232 and/or USB communication.

The EUT has two basic models: SATURN 8700 RS232 and SATURN 8700 USB. The RFID transmitter is the same for both models. The USB model supports USB communication with the host and is energized by the 5V supply via the USB mini connector.

The RS232 model supports RS-232 communication with the host and uses different connector, carrying both the communication and the 8-40 VDC supply. An on board SMPS regulate the input DC supply down to 5VDC.

A combination of both models was tested in order to simulate the worst case conditions.

### 6.2 Ports and lines

Port type	Port description	Connected from	Connected to	Qty.	Cable type	Cable length	Indoor / outdoor
Signal	USB	EUT	Host Simulator	1	Shielded	1 m	Outdoor
Power + signal	DC power + RS-232	EUT	Host Simulator & AC/DC Adaptor	1	Unshielded	1.5 m	Outdoor


### 6.3 Support and test equipment

Description	Manufacturer	Model number	Serial number
AC/DC Adaptor 1 (AC / 5VDC)	Huawei	NA	NA
AC/DC Adaptor 2 (120 VAC / 12 VDC)	HYPERCOM	AD48-1200800DU	NA
Host Simulator	OTI	NA	NA

### 6.4 Changes made in EUT

No changes were implemented in the EUT during testing.

## 6.5 Test configuration

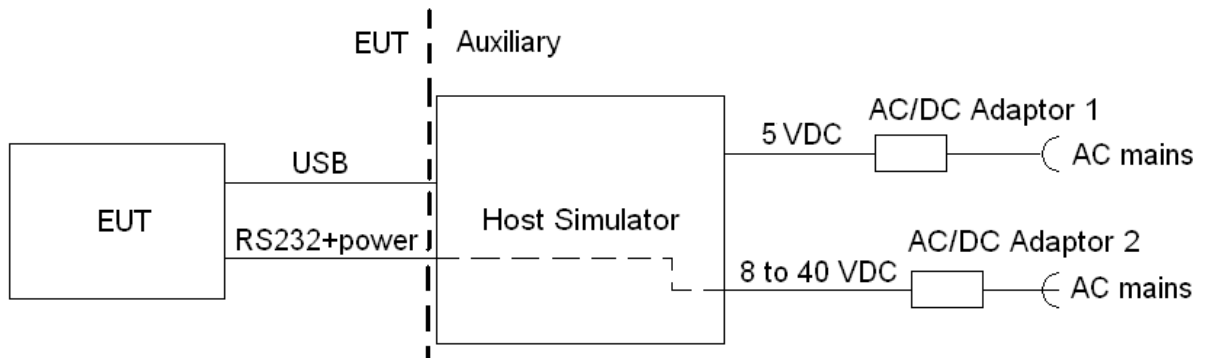



### 6.6 Transmitter characteristics

Type of equipment			
X	Stand-alone (Equipment with or without its own control provisions)		
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)		
	Plug-in card (Equipment intended for a variety of host systems)		
Intended use		Condition of use	
	fixed	Always at a distance more than 2 m from all people	
X	mobile	Always at a distance more than 20 cm from all people	
	portable	May operate at a distance closer than 20 cm to human body	
Assigned frequency range		13.110-14.010 MHz	
Operating frequency		13.56 MHz	
Is transmitter output power variable?			
	X	No	
		Yes	continuous variable
			stepped variable with stepsize
			minimum RF power dBm
			maximum RF power dBm
Antenna connection			
	unique coupling	standard connector	X integral
			X with temporary RF connector
			X without temporary RF connector
Antenna/s technical characteristics			
Type	Manufacturer	Model number	Gain
Loop	On Track Innovations	NA	NA
Type of modulation		AM	
Transmitter duty cycle supplied for test		100%	
Transmitter power source			
	Battery	Nominal rated voltage	Battery type
X	DC	Nominal rated voltage	12 VDC from 120 VAC/12 VDC adapter
	AC mains	Nominal rated voltage	Frequency



<b>Test specification:</b>	<b>Sections 15.225(a) (b) (c) / RSS-210, Section A2.6, In band radiated emissions</b>		
<b>Test procedure:</b>	ANSI C63.10 sections 6.5		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	03-Mar-16		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1007 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 12 VDC
<b>Remarks:</b>			

## 7 Transmitter tests according to 47CFR part 15 subpart C and RSS-210 Annex 2 requirements

### 7.1 In band radiated emissions

#### 7.1.1 General

This test was performed to measure field strength of fundamental emission and modulation products from the EUT within the assigned band. Specification test limits are given in Table 7.1.1.

**Table 7.1.1 Radiated emission limits**

Frequency, MHz	Field strength at 30 m distance*		Field strength at 3 m distance*	
	μV/m	dB(μV/m)	μV/m	dB(μV/m)**
13.110 – 13.410	106	40.5	10600	80.5
13.410 – 13.553	334	50.5	33400	90.5
13.553 – 13.567	15848	84.0	1584800	124.0
13.567 – 13.710	334	50.5	33400	90.5
13.710 – 14.010	106	40.5	10600	80.5

\*- The limit is provided in quasi peak values.

\*\* - The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log (S_1/S_2),$$

where  $S_1$  and  $S_2$  – standard defined and test distance respectively in meters.

#### 7.1.2 Test procedure

7.1.2.1 The EUT was set up as shown in Figure 7.1.1 energized and the performance check was conducted.

7.1.2.2 The specified frequency range was investigated with loop antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna was rotated around its vertical axis and the measuring antenna polarization was switched from vertical to horizontal.


7.1.2.3 The worst test results (the lowest margins) were recorded in Table 7.1.2 and shown in the associated plots.





<b>Test specification:</b>	<b>Sections 15.225(a) (b) (c) / RSS-210, Section A2.6, In band radiated emissions</b>		
<b>Test procedure:</b>	ANSI C63.10 sections 6.5		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	03-Mar-16		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1007 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 12 VDC
<b>Remarks:</b>			

Figure 7.1.1 Setup for in band radiated emission measurements

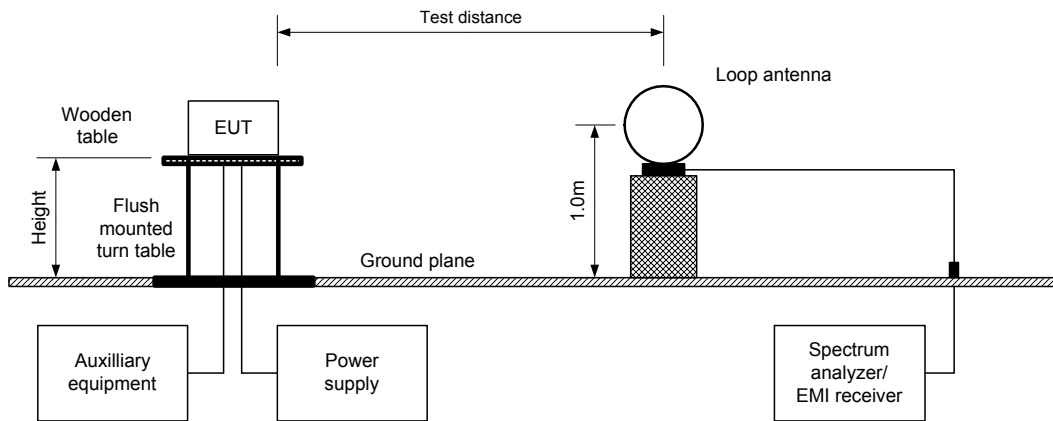



<b>Test specification:</b>	<b>Sections 15.225(a) (b) (c) / RSS-210, Section A2.6, In band radiated emissions</b>		
<b>Test procedure:</b>	ANSI C63.10 sections 6.5		
<b>Test mode:</b>	Compliance	<b>Verdict: PASS</b>	
<b>Date(s):</b>	03-Mar-16		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1007 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 12 VDC
<b>Remarks:</b>			

**Table 7.1.2 In band radiated emission test results**

TEST DISTANCE: 3 m  
 MODULATION: AM  
 MODULATING SIGNAL: PRBS  
 INVESTIGATED FREQUENCY RANGE: 13.110 – 14.010 MHz  
 RESOLUTION BANDWIDTH: 9.0 kHz  
 VIDEO BANDWIDTH: 30.0 kHz

Carrier frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Azimuth**, degrees	Verdict	
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
Unom								
13.563	76.85	76.6	124.0	-47.4	Vertical	0	Pass	
115%Unom								
13.563	76.92	76.7	124.0	-47.3	Vertical	0		
85%Unom								
13.563	76.85	76.5	124.0	-47.5	Vertical	0		

\*- Margin = Measured emission - specification limit.  
 \*\*- EUT front panel refer to 0 degrees position of turntable.

**Reference numbers of test equipment used**

HL 0446	HL 0521	HL 3623	HL 4353				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES


<b>Test specification:</b>	<b>Sections 15.225(a) (b) (c) / RSS-210, Section A2.6, In band radiated emissions</b>		
<b>Test procedure:</b>	ANSI C63.10 sections 6.5		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	03-Mar-16		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1007 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 12 VDC
<b>Remarks:</b>			

**Plot 7.1.1 Fundamental emission test result**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
DETECTOR: Peak hold  
INPUT VOLTAGE: Unom



ACTV DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 13.563 MHz  
76.49 dBµV/m

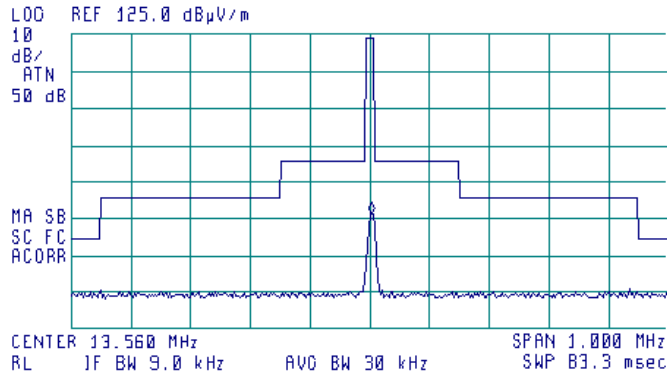


**Plot 7.1.2 Fundamental emission test result**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
DETECTOR: Peak hold  
INPUT VOLTAGE: 115%Unom



ACTV DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 13.563 MHz  
76.51 dBµV/m

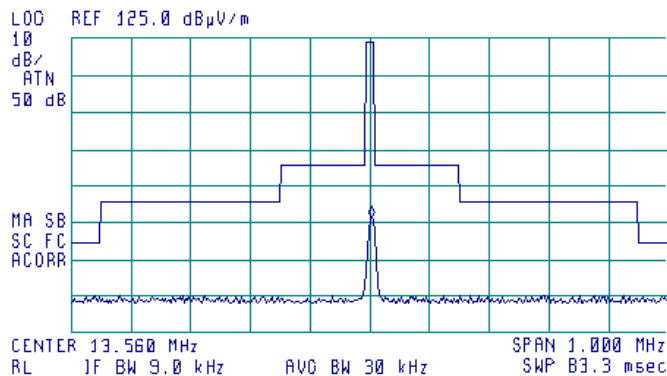



HERMON LABORATORIES


<b>Test specification:</b>	<b>Sections 15.225(a) (b) (c) / RSS-210, Section A2.6, In band radiated emissions</b>		
<b>Test procedure:</b>	ANSI C63.10 sections 6.5		
<b>Test mode:</b>	Compliance	<b>Verdict: PASS</b>	
<b>Date(s):</b>	03-Mar-16		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1007 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 12 VDC
<b>Remarks:</b>			

**Plot 7.1.3 Fundamental emission test result**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
DETECTOR: Peak hold  
INPUT VOLTAGE: 85%Unom



ACTU DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 13.563 MHz  
76.10 dBµV/m

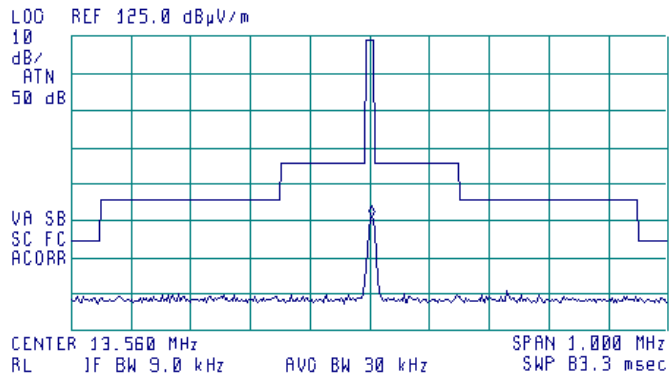



<b>Test specification:</b>	<b>Sections 15.225(d) / RSS-210, Section A2.6, Out of band radiated emissions</b>		
<b>Test procedure:</b>	ANSI C63.10 sections 6.5		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	28-Feb-16		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> hPa	<b>Relative Humidity:</b> 55 %	<b>Power Supply:</b> 12 VDC
<b>Remarks:</b>			

## 7.2 Out of band radiated emissions

### 7.2.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.2.1.

**Table 7.2.1 Radiated emission limits**

Frequency, MHz	Field strength at 3 m within restricted bands, dB(μV/m) <sup>***</sup>		
	Peak	Quasi Peak	Average
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**
0.090 – 0.110	NA	108.5 – 106.8**	NA
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**
0.490 – 1.705	NA	73.8 – 63.0**	NA
1.705 – 30.0*		69.5**	
30 – 88		40.0	
88 – 216		43.5	
216 – 960		46.0	
960 - 1000		54.0	

\*- The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

\*\* - The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log(S_1/S_2),$$

where  $S_1$  and  $S_2$  – standard defined and test distance respectively in meters.

\*\*\* - The limit decreases linearly with the logarithm of frequency.

### 7.2.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

**7.2.2.1** The EUT was set up as shown in Figure 7.2.1, energized and the performance check was conducted.

**7.2.2.2** The specified frequency range was investigated with loop antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna was rotated around its vertical axis and the measuring antenna polarization was switched from vertical to horizontal.

**7.2.2.3** The worst test results (the lowest margins) were recorded in Table 7.2.2 and shown in the associated plots.

### 7.2.3 Test procedure for spurious emission field strength measurements above 30 MHz

**7.2.3.1** The EUT was set up as shown in Figure 7.2.2, energized and the performance check was conducted.

**7.2.3.2** The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

**7.2.3.3** The worst test results (the lowest margins) were recorded in Table 7.2.2 and shown in the associated plots.



<b>Test specification:</b>	<b>Sections 15.225(d) / RSS-210, Section A2.6, Out of band radiated emissions</b>		
<b>Test procedure:</b>	ANSI C63.10 sections 6.5		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	28-Feb-16		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> hPa	<b>Relative Humidity:</b> 55 %	<b>Power Supply:</b> 12 VDC
<b>Remarks:</b>			

Figure 7.2.1 Radiated emissions below 30 MHz test set up


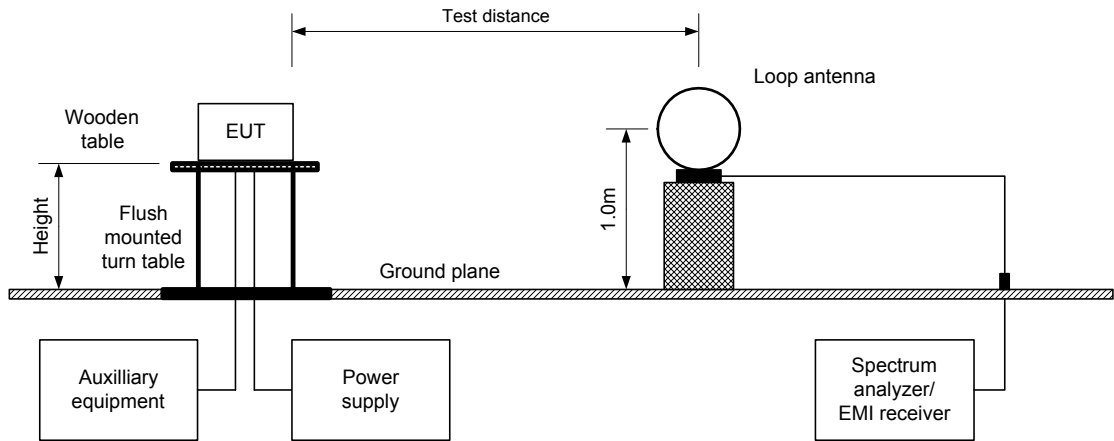


Figure 7.2.2 Radiated emissions above 30 MHz test set up



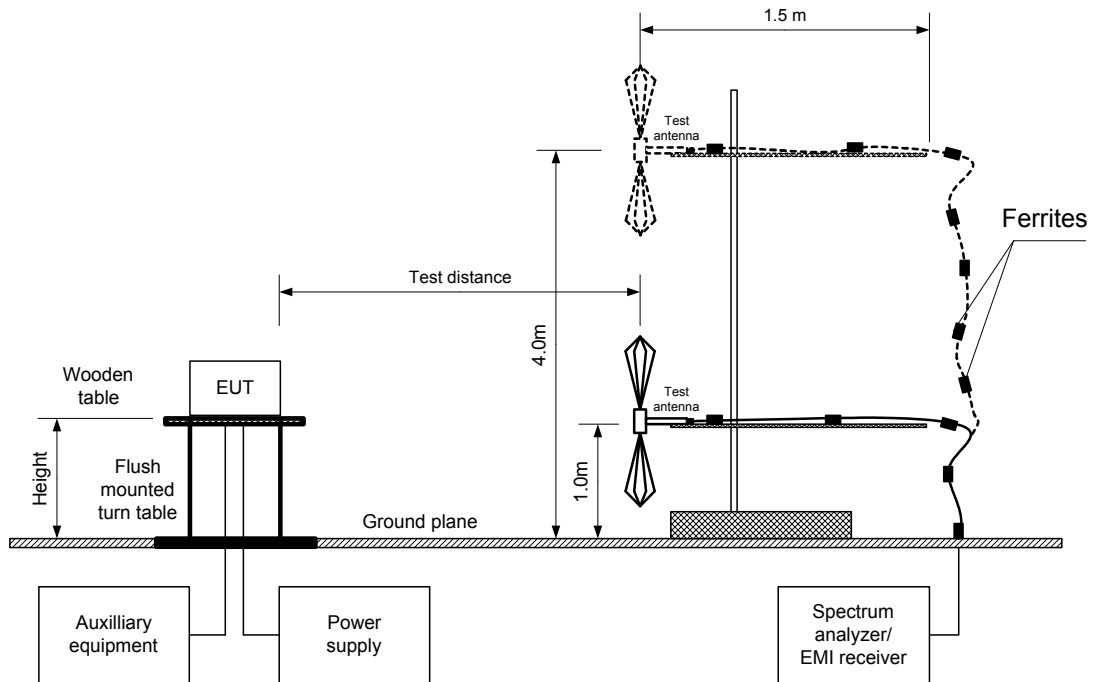

<b>Test specification:</b>	<b>Sections 15.225(d) / RSS-210, Section A2.6, Out of band radiated emissions</b>		
<b>Test procedure:</b>	ANSI C63.10 sections 6.5		
<b>Test mode:</b>	Compliance	<b>Verdict: PASS</b>	
<b>Date(s):</b>	28-Feb-16		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> hPa	<b>Relative Humidity:</b> 55 %	<b>Power Supply:</b> 12 VDC
<b>Remarks:</b>			

**Table 7.2.2 Out of band radiated emissions test results**

TEST DISTANCE: 3 m  
 EUT POSITION: Typical  
 MODULATION: AM  
 INVESTIGATED FREQUENCY RANGE: 0.009 – 1000MHz  
 RESOLUTION BANDWIDTH: 1 kHz (9 kHz – 150 kHz)  
 9.0 kHz (150 kHz – 30 MHz)  
 120 kHz (30 MHz – 1000 MHz)  
 VIDEO BANDWIDTH: ≥ Resolution bandwidth  
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)  
 Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
40.683	23.42	22.29	40.0	-17.7	V	1.0	90	Pass
461.038	31.32	28.62	46.0	-17.4	V	1.1	0	
480.002	36.51	35.11	46.0	-10.9	V	1.0	0	
911.213	35.35	28.46	46.0	-17.5	H	1.2	270	

\*- Margin = Measured emission - specification limit.  
 \*\*- EUT front panel refer to 0 degrees position of turntable.

**Reference numbers of test equipment used**

HL 0446	HL 0521	HL 0604	HL 4278	HL 4353			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES


<b>Test specification:</b>	<b>Sections 15.225(d) / RSS-210, Section A2.6, Out of band radiated emissions</b>		
<b>Test procedure:</b>	ANSI C63.10 sections 6.5		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	28-Feb-16		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> hPa	<b>Relative Humidity:</b> 55 %	<b>Power Supply:</b> 12 VDC
<b>Remarks:</b>			

**Plot 7.2.1 Radiated emission measurements from 9 to 150 kHz**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical&Horizontal  
DETECTOR: Peak hold



ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 9.5 kHz  
71.81 dBµV/m

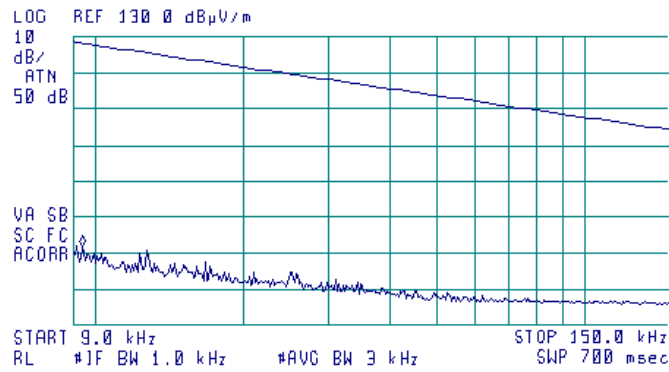


**Plot 7.2.2 Radiated emission measurements from 0.15 to 30 MHz**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical&Horizontal  
DETECTOR: Peak hold



ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 13.53 MHz  
76.66 dBµV/m

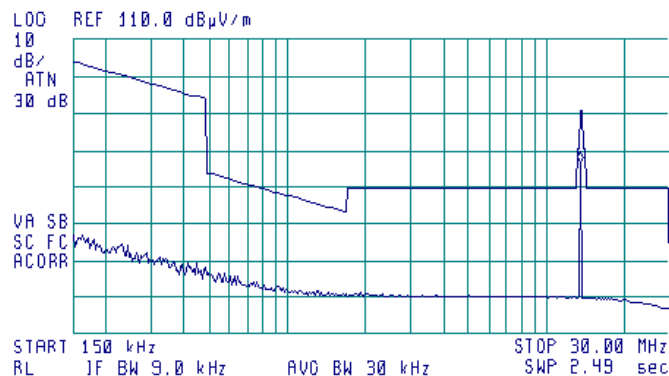






HERMON LABORATORIES

<b>Test specification:</b>		<b>Sections 15.225(d) / RSS-210, Section A2.6, Out of band radiated emissions</b>	
<b>Test procedure:</b>		ANSI C63.10 sections 6.5	
<b>Test mode:</b>		Compliance	
<b>Date(s):</b>		28-Feb-16	
<b>Temperature:</b> 23 °C		<b>Air Pressure:</b> hPa	
		<b>Relative Humidity:</b> 55 %	
		<b>Power Supply:</b> 12 VDC	
<b>Remarks:</b>			
		<b>Verdict:</b> PASS	


Plot 7.2.3 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical  
 DETECTOR: Peak hold

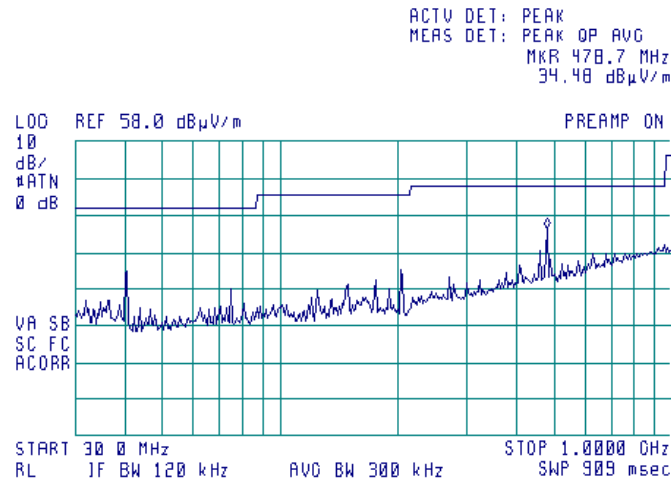

Plot 7.2.4 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Horizontal  
 DETECTOR: Peak hold

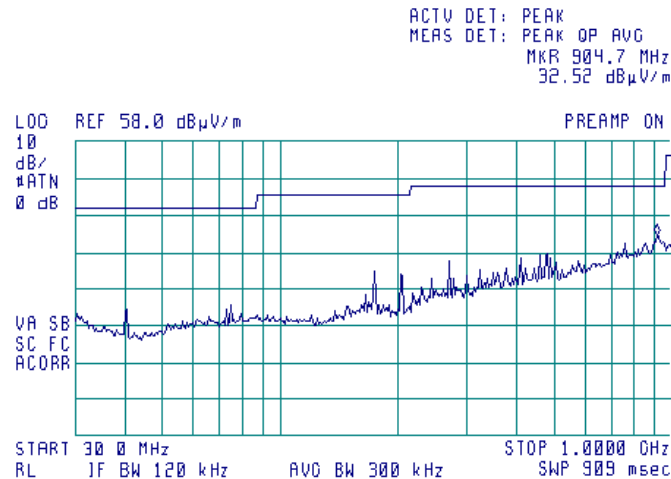



<b>Test specification:</b>	<b>Section 15.225(e) / RSS-210, Section A2.6, Frequency stability</b>		
<b>Test procedure:</b>	ANSI C63.10 sections 6.8		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	09-Mar-16		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 12 VDC
<b>Remarks:</b>			

### 7.3 Frequency stability test

#### 7.3.1 General

This test was performed to measure frequency stability of transmitter RF carrier. Specification test limits are given in Table 7.3.1.


Table 7.3.1 Frequency stability limits

Assigned frequency, MHz	Maximum allowed frequency displacement	
	%	Hz
13.560	± 0.01 %	1356

#### 7.3.2 Test procedure

- 7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and its proper operation was checked.
- 7.3.2.2 The EUT power was turned off. Temperature within test chamber was set to the required one and a period of time sufficient to stabilize all of the oscillator circuit components was allowed.
- 7.3.2.3 The EUT was powered on and carrier frequency was measured at start up moment and then after 2, 5 and 10 minutes. The EUT was powered off.
- 7.3.2.4 The above procedure was repeated at the rest of the test temperatures and voltages as provided in Table 7.3.2.
- 7.3.2.5 Frequency displacement was calculated and compared with the limit as provided in Table 7.3.2.

Figure 7.3.1 Frequency stability test setup

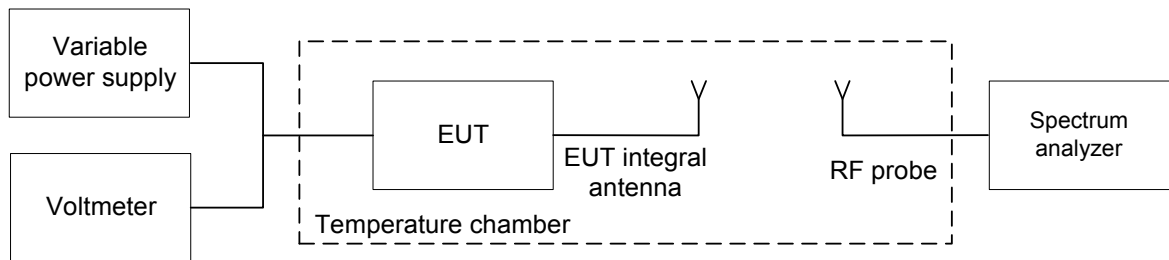



<b>Test specification:</b>		<b>Section 15.225(e) / RSS-210, Section A2.6, Frequency stability</b>	
<b>Test procedure:</b>		ANSI C63.10 sections 6.8	
<b>Test mode:</b>		Compliance	
<b>Date(s):</b>		09-Mar-16	
<b>Temperature:</b> 23 °C		<b>Air Pressure:</b> 1010 hPa	
		<b>Relative Humidity:</b> 48 %	
		<b>Power Supply:</b> 12 VDC	
<b>Remarks:</b>			
<b>Verdict: PASS</b>			

Table 7.3.2 Frequency stability test results

OPERATING FREQUENCY: 13.560 MHz  
 NOMINAL POWER VOLTAGE: 12.0 VDC  
 TEMPERATURE STABILIZATION PERIOD: 20 min  
 POWER DURING TEMPERATURE TRANSITION: Off  
 SPECTRUM ANALYZER MODE: Counter  
 RESOLUTION BANDWIDTH: 1 kHz  
 VIDEO BANDWIDTH: 3 kHz  
 MODULATION: AM

Temperature, °C	Voltage, V	Frequency, MHz				Max frequency drift, Hz		Limit, Hz	Margin, Hz	Verdict
		Start up	2 <sup>nd</sup> min	5 <sup>th</sup> min	10 <sup>th</sup> min	Negative	Positive			
-20	nominal	13.559908	13.559908	13.560033	13.559908	125	0	1356	-1231	Pass
20	nominal +15%	13.559917	13.559958	13.559958	13.559967	116	0		-1240	
20	nominal	13.560033	13.560033	13.560033	13.560033	NA	NA		-1356	
20	nominal -15%	13.559917	13.559917	13.559900	13.559900	133	0		-1223	
50	nominal	13.559992	13.559908	13.559908	13.559908	125	0		-1231	

\* - Reference frequency

**Reference numbers of test equipment used**

HL 0493	HL 1424	HL 3810					
---------	---------	---------	--	--	--	--	--

Full description is given in Appendix A.



<b>Test specification:</b>	<b>Section 15.207(a) / RSS-Gen, Section 8.8, Conducted emission</b>		
<b>Test procedure:</b>	ANSI C63.4, Section 13.1.3		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	21-Mar-16		
<b>Temperature:</b> 22 °C	<b>Air Pressure:</b> 1011 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

## 7.4 Conducted emission measurements at AC mains input / output port

### 7.4.1 General

This test was performed to measure common mode conducted emissions at the EUT power port. The specification test limits are given in Table 7.4.1.

Table 7.4.1 Limits for conducted emissions

Frequency, MHz	Class B limit, dB(μV)	
	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*
0.5 - 5.0	56	46
5.0 - 30	60	50

\* The limit decreases linearly with the logarithm of frequency.

### 7.4.2 Test procedure


7.4.2.1 The EUT was set up as shown in Figure 7.4.1 and the associated photographs, energized and the EUT performance was checked.

7.4.2.2 The measurements were performed at the EUT power terminals with the LISN, connected to the EMI receiver in the frequency range referred to in Table 7.4.2. The unused coaxial connector of the LISN was terminated with 50 Ohm.

7.4.2.3 The position of the EUT cables was varied to find the highest emission.

7.4.2.4 The worst test results with respect to the limits were recorded in Table 7.4.2 and shown in the associated plots.

Figure 7.4.1 Setup for conducted emission measurements at AC mains input port, table-top EUT

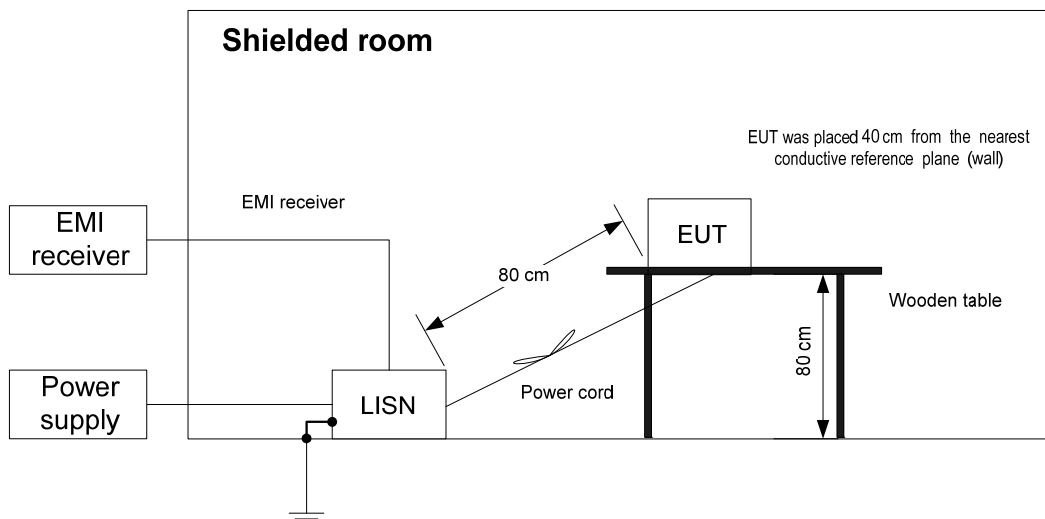



<b>Test specification:</b> Section 15.207(a) / RSS-Gen, Section 8.8, Conducted emission			
<b>Test procedure:</b> ANSI C63.4, Section 13.1.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 21-Mar-16			
<b>Temperature:</b> 22 °C	<b>Air Pressure:</b> 1011 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Table 7.4.2 Conducted emissions at AC mains port test results

LINE: AC mains  
 EUT OPERATING MODE: Transmit  
 EUT SET UP: TABLE-TOP  
 TEST SITE: SHIELDED ROOM  
 DETECTORS USED: PEAK / QUASI-PEAK / AVERAGE  
 FREQUENCY RANGE: 150 kHz - 30 MHz  
 RESOLUTION BANDWIDTH: 9 kHz

Frequency, MHz	Peak emission, dB(μV)	Quasi-peak			Average			Line ID	Verdict
		Measured emission, dB(μV)	Limit, dB(μV)	Margin, dB*	Measured emission, dB(μV)	Limit, dB(μV)	Margin, dB*		
0.393660	45.01	36.52	57.99	-21.47	11.20	47.99	-36.79	L1	Pass
0.426195	46.92	38.44	57.38	-18.94	18.36	47.38	-29.02		
0.446290	47.32	38.42	57.00	-18.58	9.33	47.00	-37.67		
0.471525	46.63	38.13	56.53	-18.40	9.13	46.53	-37.40		
0.494080	46.30	37.75	56.11	-18.36	7.61	46.11	-38.50		
0.887790	40.24	31.82	56.00	-24.18	5.63	46.00	-40.37		
0.407095	43.31	34.91	57.74	-22.83	8.13	47.74	-39.61	L2	Pass
0.428470	43.64	35.19	57.34	-22.15	18.21	47.34	-29.13		
0.441635	43.61	35.03	57.09	-22.06	6.96	47.09	-40.13		
0.490545	43.17	34.76	56.18	-21.42	4.96	46.18	-41.22		
0.535960	41.59	33.17	56.00	-22.83	8.62	46.00	-37.38		
0.822150	39.12	30.54	56.00	-25.46	10.14	46.00	-35.86		

\*- Margin = Measured emission - specification limit.

Reference numbers of test equipment used

HL 0447	HL 0787	HL 1513	HL 3612				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES


<b>Test specification:</b>		<b>Section 15.207(a) / RSS-Gen, Section 8.8, Conducted emission</b>	
<b>Test procedure:</b>		ANSI C63.4, Section 13.1.3	
<b>Test mode:</b>		Compliance	
<b>Date(s):</b>		21-Mar-16	
<b>Temperature:</b> 22 °C		<b>Air Pressure:</b> 1011 hPa	
		<b>Relative Humidity:</b> 48 %	
		<b>Power Supply:</b> 120 VAC	
<b>Remarks:</b>			
		<b>Verdict:</b> PASS	

**Plot 7.4.1 Conducted emissions at AC mains port with antenna connected**


LINE: L1  
LIMIT: QUASI-PEAK, AVERAGE  
DETECTOR: PEAK  
EUT OPERATING MODE Transmit




ACTV DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 13.53 MHz  
70.86 dBµV

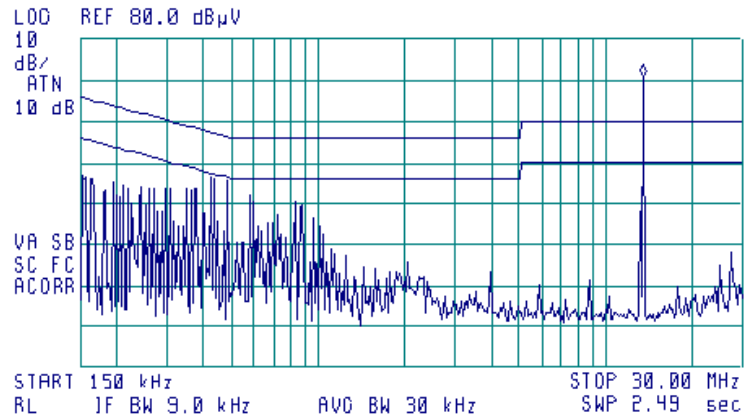

ACTV DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 13.5493 MHz  
49.32 dBµV

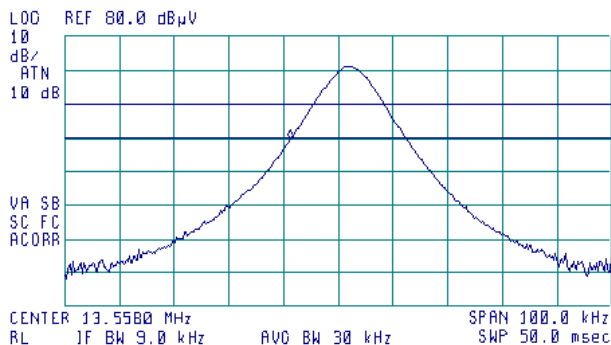

ACTV DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 13.5705 MHz  
49.34 dBµV

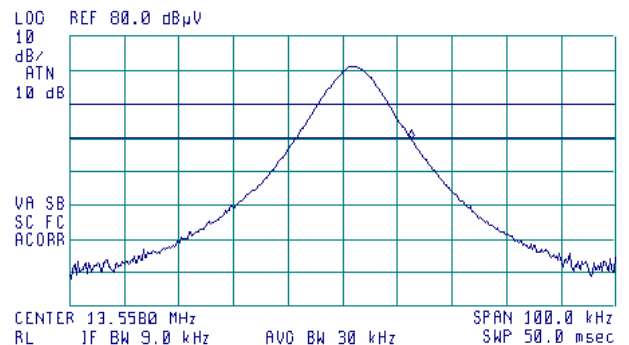

Transmitter fundamental emission band 13.11-14.01 MHz



HERMON LABORATORIES


<b>Test specification:</b>		<b>Section 15.207(a) / RSS-Gen, Section 8.8, Conducted emission</b>	
<b>Test procedure:</b>		ANSI C63.4, Section 13.1.3	
<b>Test mode:</b>		Compliance	
<b>Date(s):</b>		21-Mar-16	
<b>Temperature:</b> 22 °C		<b>Air Pressure:</b> 1011 hPa	
		<b>Relative Humidity:</b> 48 %	
		<b>Power Supply:</b> 120 VAC	
<b>Remarks:</b>			
		<b>Verdict:</b> PASS	

**Plot 7.4.2 Conducted emissions at AC mains port with antenna connected**


LINE: L2  
LIMIT: QUASI-PEAK, AVERAGE  
DETECTOR: PEAK  
EUT OPERATING MODE: Transmit




ACTV DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 13.53 MHz  
60.36 dBµV

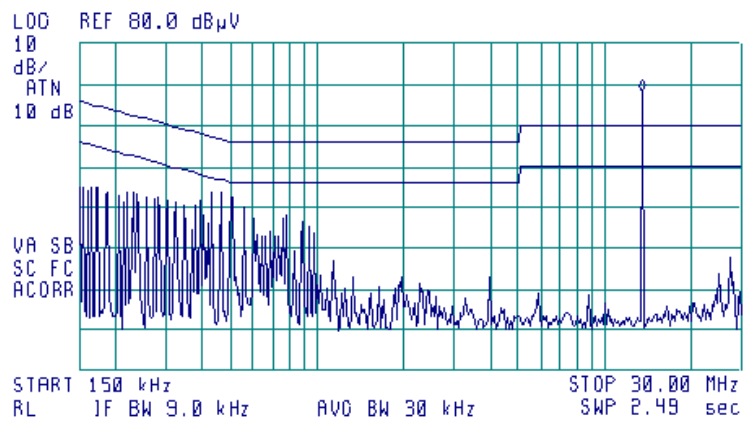

ACTV DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 13.5500 MHz  
49.77 dBµV

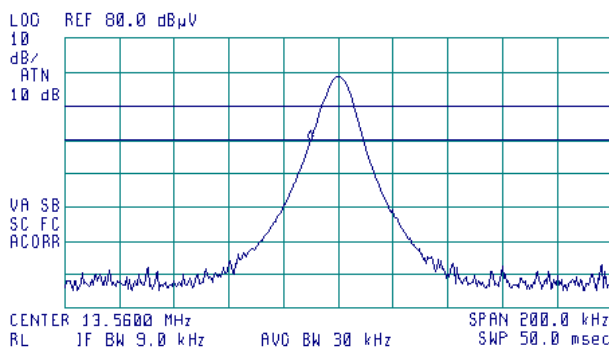

ACTV DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 13.5695 MHz  
48.77 dBµV

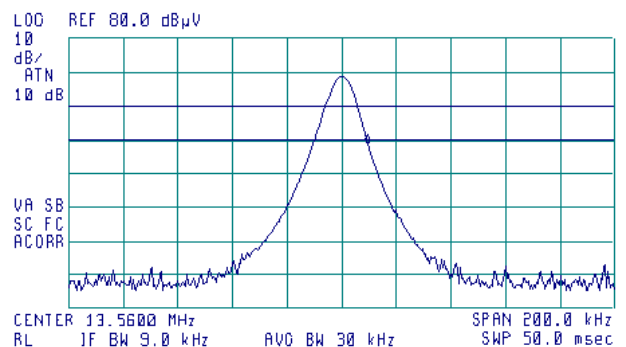


Transmitter fundamental emission band 13.11-14.01 MHz



<b>Test specification:</b> Section 15.207(a) / RSS-Gen, Section 8.8, Conducted emission			
<b>Test procedure:</b> ANSI C63.4, Section 13.1.3			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date(s):</b> 21-Mar-16			
<b>Temperature:</b> 22 °C	<b>Air Pressure:</b> 1011 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			


**Plot 7.4.3 Conducted emission measurements with dummy load in lieu of the antenna**

LINE: L1  
EUT OPERATING MODE: Transmit  
LIMIT: QUASI-PEAK, AVERAGE  
DETECTOR: PEAK

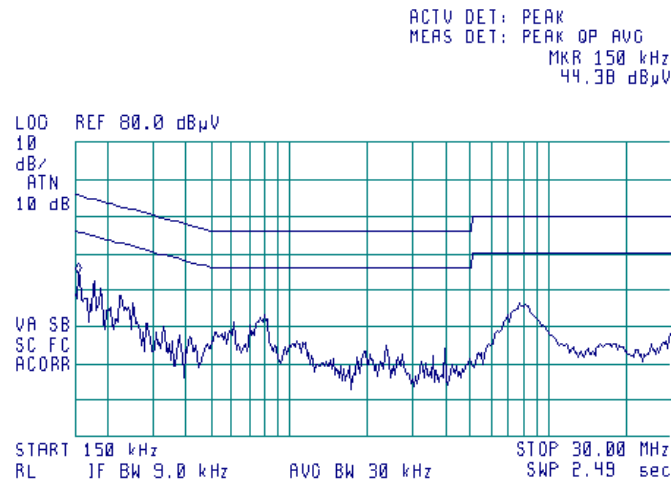

**Plot 7.4.4 Conducted emission measurements with dummy load in lieu of the antenna**

LINE: L2  
EUT OPERATING MODE: Transmit  
LIMIT: QUASI-PEAK, AVERAGE  
DETECTOR: PEAK

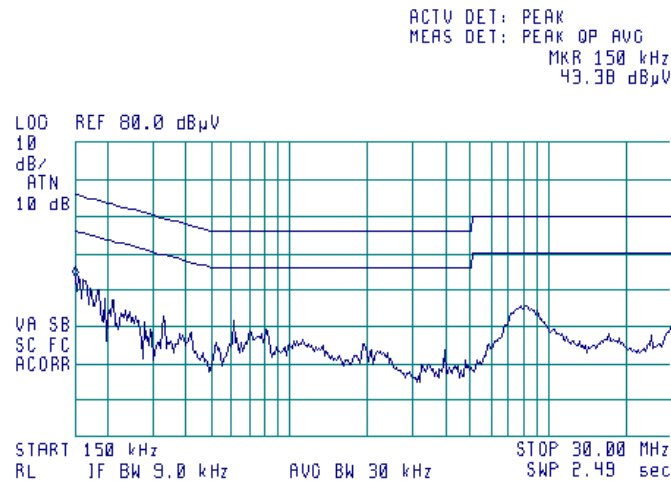





<b>Test specification:</b>		<b>Section 15.215(c) / RSS-Gen, section 6.6, Occupied bandwidth</b>	
<b>Test procedure:</b>		ANSI C63.10 section 6.9.2	
<b>Test mode:</b>		Compliance	
<b>Date(s):</b>		21-Mar-16	
<b>Temperature:</b> 22 °C		<b>Air Pressure:</b> 1011 hPa	
		<b>Relative Humidity:</b> 54 %	
		<b>Power Supply:</b> 12 VDC	
<b>Remarks:</b>			

## 7.5 Occupied bandwidth test

### 7.5.1 General

This test was performed to verify that the 20 dB bandwidth of the emissions was contained within the standard specified frequency band according to FCC §15.215 requirements. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Occupied bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc
13.553 – 13.567	20.0

\*- Modulation envelope reference points provided in terms of attenuation below modulated carrier.

### 7.5.2 Test procedure

- 7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.
- 7.5.2.2 The spectrum analyzer sweep time and bandwidth were set to capture all major modulation sidebands of emission and sweep time was set sufficiently slow to ensure peak measurements. Spectrum analyzer was set in peak hold mode and time sufficient for trace stabilization was allowed.
- 7.5.2.3 The peak of emission was measured. The transmitter occupied bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.5.2 and associated plot.
- 7.5.2.4 Modulation bandwidth was calculated by adding of the negative frequency drift to the lower measured frequency and the positive frequency drift to the higher measured frequency. The obtained modulation bandwidth was verified to be within the allowed frequency range.

Figure 7.5.1 Occupied bandwidth test setup





<b>Test specification:</b>	<b>Section 15.215(c) / RSS-Gen, section 6.6, Occupied bandwidth</b>		
<b>Test procedure:</b>	ANSI C63.10 section 6.9.2		
<b>Test mode:</b>	Compliance	<b>Verdict: PASS</b>	
<b>Date(s):</b>	21-Mar-16		
<b>Temperature:</b> 22 °C	<b>Air Pressure:</b> 1011 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 12 VDC
<b>Remarks:</b>			

Table 7.5.2 Occupied bandwidth test results

DETECTOR USED: Peak hold  
RESOLUTION BANDWIDTH: 1 kHz  
VIDEO BANDWIDTH: 3 kHz  
MODULATION ENVELOPE REFERENCE POINTS: 20 dBc  
MODULATION: AM

Band edge	Cross point frequency, MHz	Frequency drift, Hz		Modulation band edge, MHz	Assigned band edge, MHz	Verdict
		Negative	Positive			
Low	13.558666	133	NA	13.558533	13.553	Pass
High	13.561233	NA	0	13.561233	13.567	Pass

Reference numbers of test equipment used

HL 3818							
---------	--	--	--	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

<b>Test specification:</b>		<b>Section 15.215(c) / RSS-Gen, section 6.6, Occupied bandwidth</b>	
<b>Test procedure:</b>		ANSI C63.10 section 6.9.2	
<b>Test mode:</b>		Compliance	
<b>Date(s):</b>		21-Mar-16	
<b>Temperature: 22 °C</b>		<b>Air Pressure: 1011 hPa</b>	
<b>Relative Humidity: 54 %</b>		<b>Power Supply: 12 VDC</b>	
<b>Remarks:</b>			

Plot 7.5.1 Occupied bandwidth test result

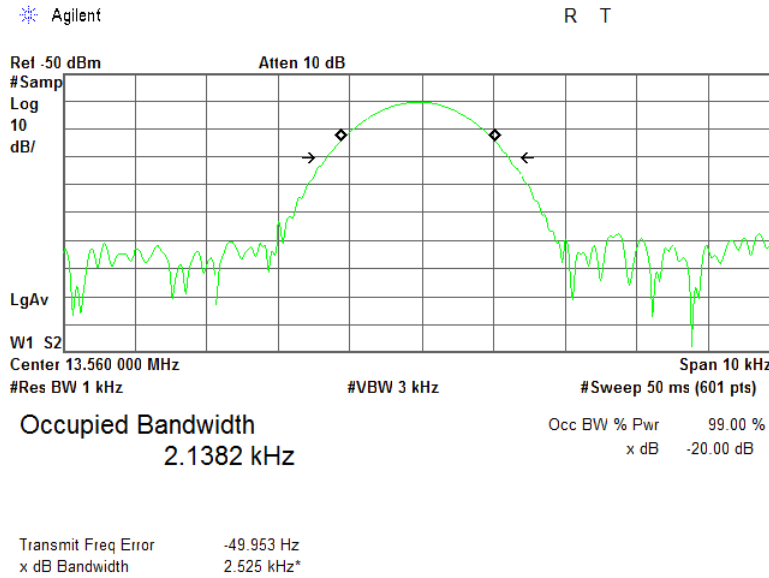

Plot 7.5.2 Occupied bandwidth test result, low and high band frequencies

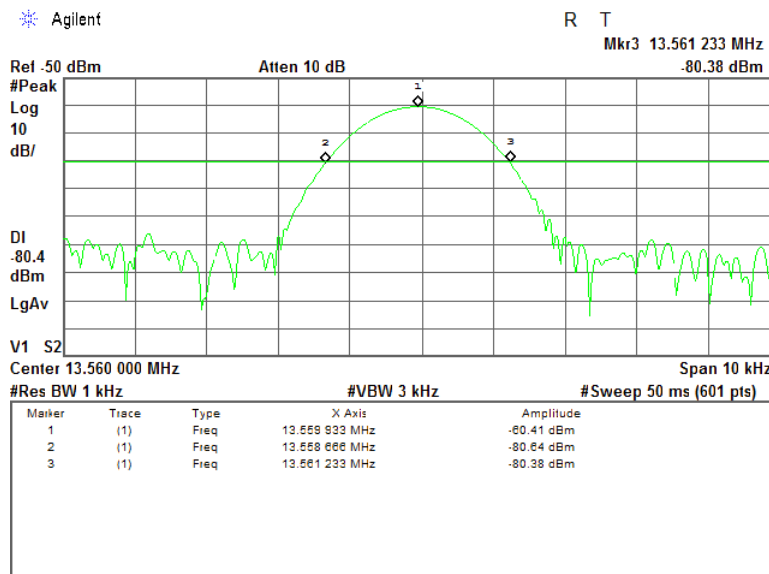



<b>Test specification:</b>	<b>FCC Section 15.203/ RSS-Gen, Section 7.1.4, Antenna requirement</b>		
<b>Test procedure:</b>	Visual inspection / supplier declaration		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	21-Mar-15		
<b>Temperature:</b> 22 °C	<b>Air Pressure:</b> 1011 hPa	<b>Relative Humidity:</b> 54 %	<b>Power Supply:</b> 12 VDC
<b>Remarks:</b>			


## 7.6 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters. The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.6.1.

**Table 7.6.1 Antenna requirements**

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

**Photograph 7.6.1 Antenna assembly**

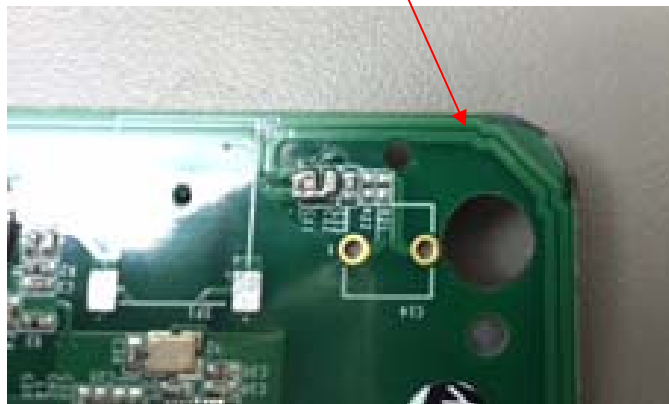



<b>Test specification:</b>	<b>Section 15.107/ ICES-003, Section 6.1, Class B, Conducted emission at AC power port</b>		
<b>Test procedure:</b>	ANSI C63.4, Sections 11.5 and 12.1.3		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	01-Mar-16		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1016 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

## 8 Unintentional emissions

### 8.1 Conducted emissions

#### 8.1.1 General

This test was performed to measure common mode conducted emissions at the mains power port. Specification test limits are given in Table 8.1.1.

**Table 8.1.1 Limits for conducted emissions**

Frequency, MHz	Class B limit, dB( $\mu$ V)		Class A limit, dB( $\mu$ V)	
	QP	AVRG	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*	79	66
0.5 - 5.0	56	46	73	60
5.0 - 30	60	50	73	60

\* The limit decreases linearly with the logarithm of frequency.


#### 8.1.2 Test procedure

- 8.1.2.1 The EUT was set up as shown in Figure 8.1.1 and associated photographs, energized and the performance check was conducted.
- 8.1.2.2 The measurements were performed at power terminals with the LISN, connected to a spectrum analyzer in the frequency range referred to in Table 8.1.2. Unused coaxial connector of the LISN was terminated with 50 Ohm. Quasi-peak and average detectors were used throughout the testing.
- 8.1.2.3 The position of the device cables was varied to determine maximum emission level.
- 8.1.2.4 The worst test results (the lowest margins) were recorded in Table 8.1.2 and shown in the associated plots.



<b>Test specification:</b>	<b>Section 15.107/ ICES-003, Section 6.1, Class B, Conducted emission at AC power port</b>		
<b>Test procedure:</b>	ANSI C63.4, Sections 11.5 and 12.1.3		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	01-Mar-16		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1016 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Figure 8.1.1 Setup for conducted emission measurements, table-top equipment

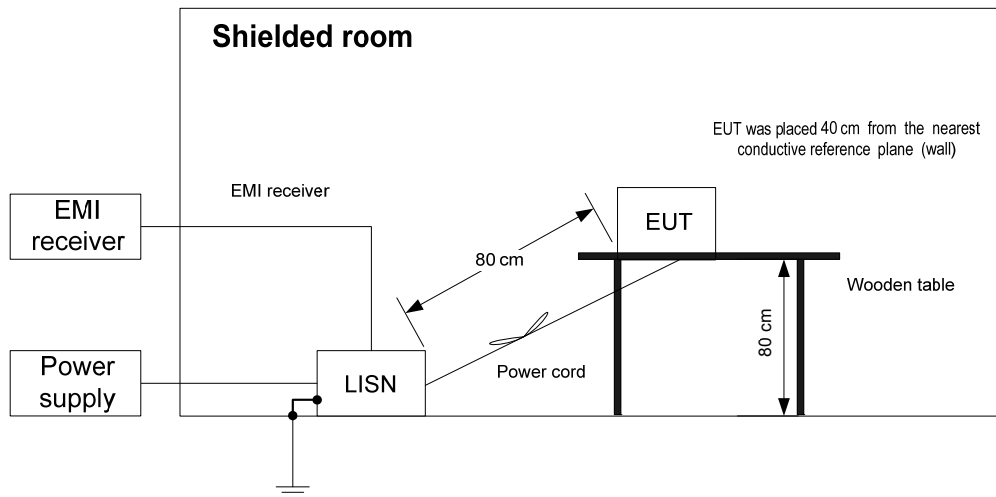

Photograph 8.1.1 Setup for conducted emission measurements





<b>Test specification:</b>	<b>Section 15.107/ ICES-003, Section 6.1, Class B, Conducted emission at AC power port</b>		
<b>Test procedure:</b>	ANSI C63.4, Sections 11.5 and 12.1.3		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	01-Mar-16		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1016 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

**Table 8.1.2 Conducted emission test results**

LINE: AC mains  
LIMIT: Class B  
EUT OPERATING MODE: Receive / Stand-by  
EUT SET UP: TABLE-TOP  
TEST SITE: SHIELDED ROOM  
DETECTORS USED: PEAK / QUASI-PEAK / AVERAGE  
FREQUENCY RANGE: 150 kHz - 30 MHz  
RESOLUTION BANDWIDTH: 9 kHz

Frequency, MHz	Peak emission, dB(µV)	Quasi-peak			Average			Line ID	Verdict
		Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*	Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*		
0.158100	45.20	40.18	65.60	-25.42	31.73	55.60	-23.87	L1	Pass
0.176265	43.20	39.14	64.72	-25.58	29.85	54.72	-24.87		
0.236395	39.09	35.15	62.25	-27.10	29.27	52.25	-22.98		
0.821675	34.10	30.01	56.00	-25.99	24.79	46.00	-21.21		
7.780515	37.02	33.73	60.00	-26.27	28.77	50.00	-21.23		
0.150248	44.29	37.18	65.99	-28.81	27.77	55.99	-28.22	L2	Pass
0.190375	38.87	34.69	64.03	-29.34	22.98	54.03	-31.05		
0.332600	33.04	29.58	59.44	-29.86	26.41	49.44	-23.03		
0.616650	32.81	29.07	56.00	-26.93	24.77	46.00	-21.23		
0.826568	30.55	26.95	56.00	-29.05	19.85	46.00	-26.15		
7.778345	36.98	33.03	60.00	-26.97	28.07	50.00	-21.93		

\*- Margin = Measured emission - specification limit.

**Reference numbers of test equipment used**

HL 0447	HL 0787	HL 1513	HL 3612				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

<b>Test specification:</b>	<b>Section 15.107/ ICES-003, Section 6.1, Class B, Conducted emission at AC power port</b>		
<b>Test procedure:</b>	ANSI C63.4, Sections 11.5 and 12.1.3		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	01-Mar-16		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1016 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			


**Plot 8.1.1 Conducted emission measurements**

LINE: L1  
LIMIT: Class B  
EUT OPERATING MODE: Receive  
LIMIT: QUASI-PEAK, AVERAGE  
DETECTOR: PEAK

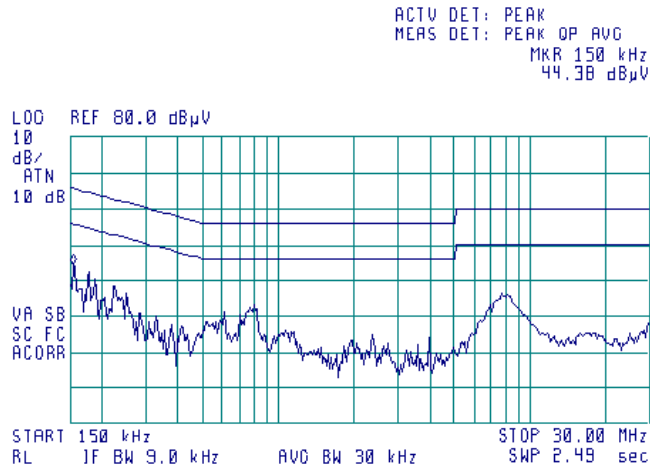

**Plot 8.1.2 Conducted emission measurements**

LINE: L2  
LIMIT: Class B  
EUT OPERATING MODE: Receive  
LIMIT: QUASI-PEAK, AVERAGE  
DETECTOR: PEAK

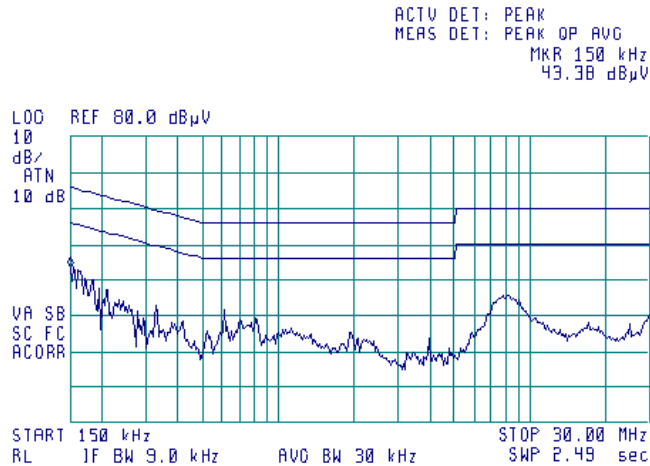





<b>Test specification:</b>	FCC Part 15, Section 109 / RSS-Gen, Section 7.1.2 / ICES-003, Radiated emission		
<b>Test procedure:</b>	ANSI C63.4, Sections 11.6 and 12.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date(s):</b>	3-Mar-16		
<b>Temperature:</b> 21 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 49 %	<b>Power Supply:</b> 12 VDC
<b>Remarks:</b>			

## 8.2 Radiated emission measurements

### 8.2.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.2.1, 8.2.2.

**Table 8.2.1 Radiated emission limits according to FCC Part 15, Section 109 and ICES-003, Section 6.2**

Frequency, MHz	Class B limit, dB(μV/m)		Class A limit, dB(μV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
960 - 5 <sup>th</sup> harmonic**	43.5*	54.0	49.5	60.0*

\* - The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows:  $Lim_{S_2} = Lim_{S_1} + 20 \log(S_1/S_2)$ , where  $S_1$  and  $S_2$  – standard defined and test distance respectively in meters.

**Table 8.2.2 Radiated emission limits according to RSS-Gen, Section 7.1.2**

Frequency, MHz	Field strength limit at 3 m test distance, dB(μV/m)
30 - 88	40.0
88 - 216	43.5
216 - 960	46.0
960 - 5 <sup>th</sup> harmonic**	54.0


\*\* - harmonic of the highest frequency the EUT generates, uses, operates or tunes to.

### 8.2.2 Test procedure


- 8.2.2.1 The EUT was set up as shown in Figure 8.2.1 and associated photographs, energized and the performance check was conducted.
- 8.2.2.2 Preliminary measurements were performed in the anechoic chamber at 3 m test distance. The specified frequency range was investigated with biconical and log periodic antennas connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed, its polarization was switched from vertical to horizontal and the EUT cables position was varied.
- 8.2.2.3 The EUT was set up as shown in Figure 8.2.2, energized and the performance check was conducted.
- 8.2.2.4 Final measurements were performed at the open area test site at 10 m test distance. The EUT wires and cables were arranged to produce maximum emission as it was found during preliminary measurements. The frequencies yield the worst test results (the lowest margins) during preliminary testing were investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m and its polarization was changed from vertical to horizontal.
- 8.2.2.5 The worst test results (the lowest margins) were recorded in Table 8.2.3 and shown in the associated plots.

<b>Test specification:</b>	FCC Part 15, Section 109 / RSS-Gen, Section 7.1.2 / ICES-003, Radiated emission		
<b>Test procedure:</b>	ANSI C63.4, Sections 11.6 and 12.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date(s):</b>	3-Mar-16	<b>Relative Humidity:</b>	49 %
<b>Temperature:</b> 21 °C	<b>Air Pressure:</b> 1006 hPa	<b>Power Supply:</b>	12 VDC
<b>Remarks:</b>			

Figure 8.2.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment

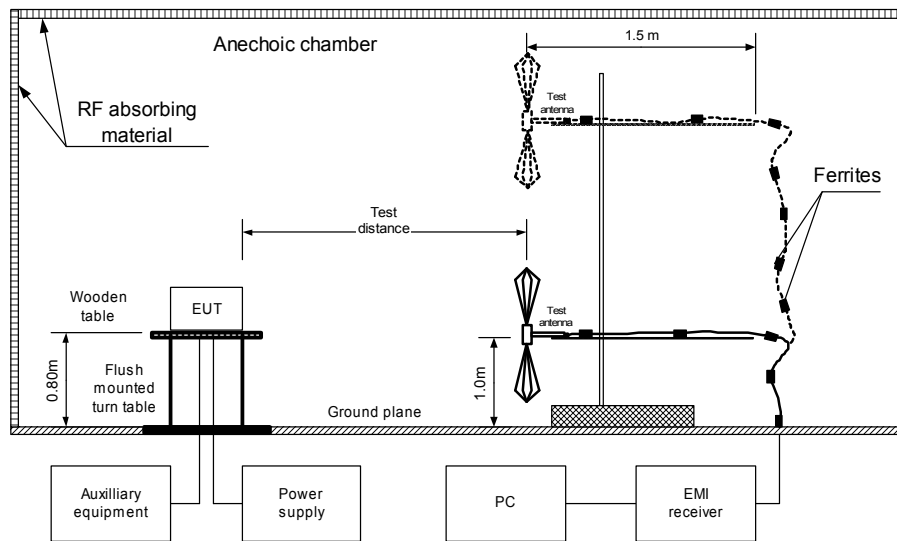


Photograph 8.2.1 Setup for radiated emission measurements

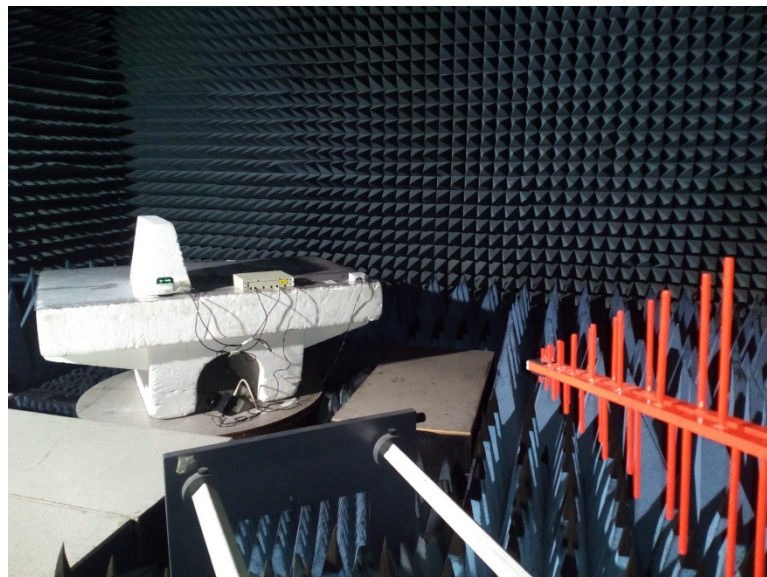



<b>Test specification:</b>	FCC Part 15, Section 109 / RSS-Gen, Section 7.1.2 / ICES-003, Radiated emission		
<b>Test procedure:</b>	ANSI C63.4, Sections 11.6 and 12.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date(s):</b>	3-Mar-16		
<b>Temperature:</b> 21 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 49 %	<b>Power Supply:</b> 12 VDC
<b>Remarks:</b>			

Figure 8.2.2 Setup for radiated emission measurements at OATS, table-top equipment

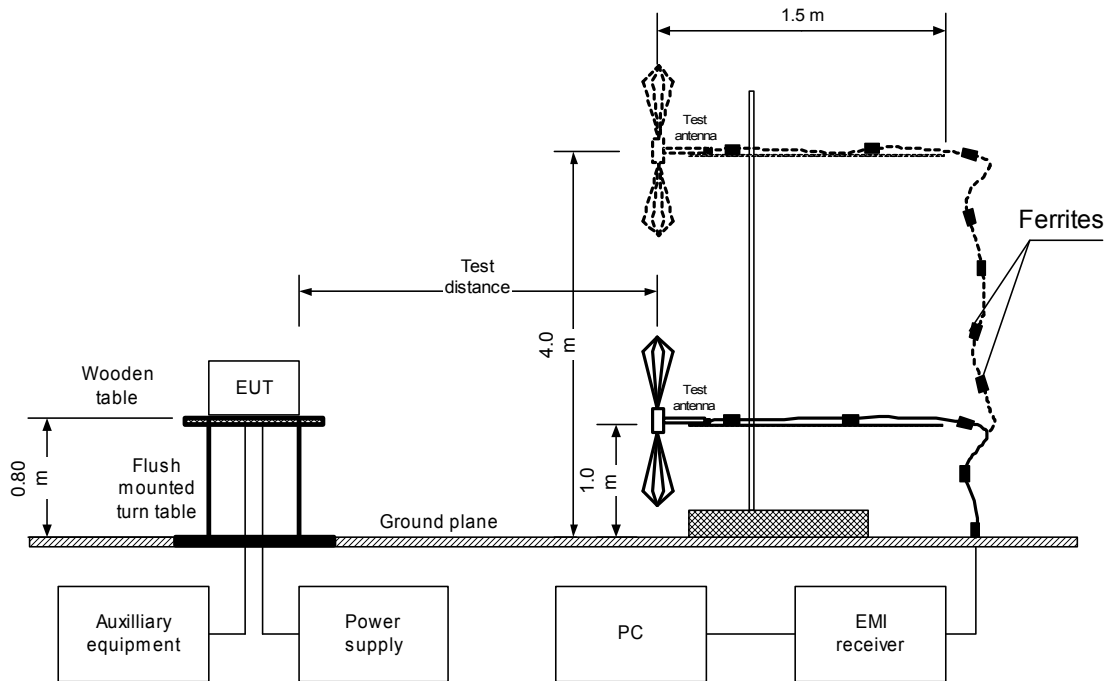



<b>Test specification:</b>	FCC Part 15, Section 109 / RSS-Gen, Section 7.1.2 / ICES-003, Radiated emission		
<b>Test procedure:</b>	ANSI C63.4, Sections 11.6 and 12.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date(s):</b>	3-Mar-16		
<b>Temperature:</b> 21 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 49 %	<b>Power Supply:</b> 12 VDC
<b>Remarks:</b>			

Photograph 8.2.2 Setup for final radiated emission measurements, general view



Photograph 8.2.3 Setup for final radiated emission measurements, EUT cabling





<b>Test specification:</b>	FCC Part 15, Section 109 / RSS-Gen, Section 7.1.2 / ICES-003, Radiated emission		
<b>Test procedure:</b>	ANSI C63.4, Sections 11.6 and 12.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date(s):</b>	3-Mar-16		
<b>Temperature:</b> 21 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 49 %	<b>Power Supply:</b> 12 VDC
<b>Remarks:</b>			

**Table 8.2.3 Radiated emission test results**

EUT SET UP: TABLE-TOP  
LIMIT: Class B  
EUT OPERATING MODE: Receive / Stand-by  
TEST SITE: OATS  
TEST DISTANCE: 10 m  
DETECTORS USED: PEAK / QUASI-PEAK  
FREQUENCY RANGE: 30 MHz – 1000 MHz  
RESOLUTION BANDWIDTH: 120 kHz

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
176.266	19.99	15.3	33.0	-14.7	Vertical	1.2	270	Pass
189.863	24.38	23.7	33.0	-6.3	Vertical	1.2	90	
203.395	23.35	21.5	33.0	-8.5	Vertical	1.2	90	

\*- Margin = Measured emission - specification limit.  
\*\*- EUT front panel refer to 0 degrees position of turntable.

**Reference numbers of test equipment used**

HL 0521	HL 0604	HL 0813	HL 1552	HL 2697	HL 2780	HL 3390	HL 4278
HL 4353	HL 4778						


Full description is given in Appendix A.



<b>Test specification:</b>	<b>FCC Part 15, Section 109 / RSS-Gen, Section 7.1.2 / ICES-003, Radiated emission</b>		
<b>Test procedure:</b>	ANSI C63.4, Sections 11.6 and 12.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	3-Mar-16	<b>Relative Humidity:</b>	49 %
<b>Temperature:</b> 21 °C	<b>Air Pressure:</b> 1006 hPa	<b>Power Supply:</b>	12 VDC
<b>Remarks:</b>			


**Plot 8.2.1 Radiated emission measurements in 30 - 1000 MHz range, vertical antenna polarization**

TEST SITE: Semi anechoic chamber  
LIMIT: Class B  
TEST DISTANCE: 3 m  
EUT OPERATING MODE: Receive / Stand-by

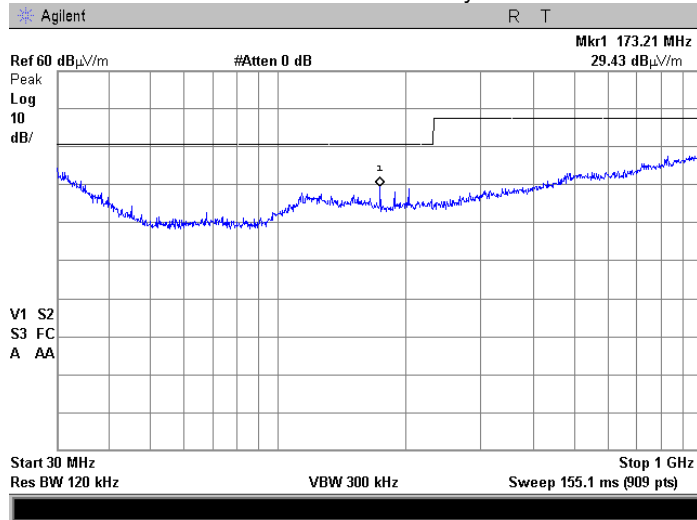

**Plot 8.2.2 Radiated emission measurements in 30 - 1000 MHz range, horizontal antenna polarization**

TEST SITE: Semi anechoic chamber  
LIMIT: Class B  
TEST DISTANCE: 3 m  
EUT OPERATING MODE: Receive / Stand-by

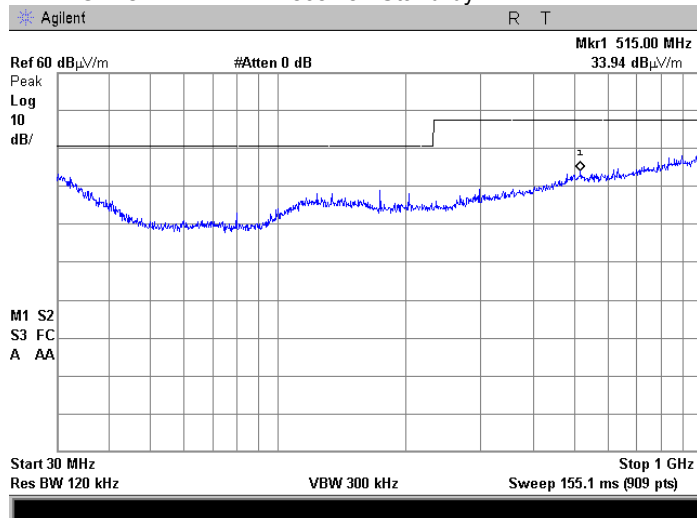



## 9 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	18-Jan-16	18-Jan-17
0447	LISN, 16/2, 300V RMS, 50 Ohm/50 uH + 5 Ohm, STD CISPR 16-1	Hermon Laboratories	LISN 16 - 1	066	13-Oct-15	13-Oct-16
0493	Temperature Chamber -45...175 deg C	Thermotron	S-1.2 Mini-Max	14016	25-May-15	25-May-16
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	27-Oct-15	27-Oct-16
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	10-May-16	10-May-17
0787	Transient Limiter 9 kHz-200 MHz	Hewlett Packard	11947A	3107A018 77	12-Oct-15	12-Oct-16
0813	Cable Coax, 12 m, N-type, up to 3.0 GHz	Hermon Laboratories	C214-12	149	07-Dec-15	07-Dec-16
1424	Spectrum Analyzer, 30 Hz- 40 GHz	Agilent Technologies	8564EC	3946A002 19	12-Apr-16	12-Apr-17
1513	Cable RF, 8 m, BNC/BNC	Belden	M17/167 MIL-C-17	1513	08-Sep-15	08-Sep-16
1552	Cable RF, 8 m	Alpha Wire	RG-214	1552	07-Dec-15	07-Dec-16
2697	Antenna, 30 MHz - 3.0 GHz	Sunol Sciences Corp. Pleasanton, California USA	JB3	A022805	15-May-16	15-May-17
2780	EMC analyzer, 100 Hz to 26.5 GHz	Agilent Technologies	E7405A	MY451024 62	08-Sep-15	08-Sep-16
3390	Microwave Cable Assembly, 26.5 GHz, 1.0 m, N type/N type	Suhner Sucoflex	104EA	3390	10-Feb-16	10-Feb-17
3612	Cable RF, 17.5 m, N type-N type	Teldor	RG-214/U	NA	07-Dec-15	07-Dec-16
3623	Cable RF, 6.0 m, N type-N type, DC-6.5 GHz	Belden	MIL C-17	NA	09-Sep-15	09-Sep-16
3810	Near-Field Probe Set, Hand held, 6 probes	EMC Test Systems	7405	9706-3927	01-Jan-16	01-Jan-17
3818	PSA Series Spectrum Analyzer, 3 Hz- 44 GHz	Agilent Technologies	E4446A	MY482502 88	03-May-16	03-May-17
4278	Test Cable , DC-18 GHz, 4.6 m, N/M - N/M	Mini-Circuits	APC-15FT-NMNM+	0755A	22-Nov-15	22-Nov-16
4353	Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M	MegaPhase	NC29-N1N1-244	12025101 003	15-Mar-16	15-Mar-17
4778	EMI Receiver, 9 kHz - 2.9 GHz, System: HL1431, HL4777	Hewlett Packard	8542E	30807A00 262, 3427A001 23	05-Nov-15	05-Nov-16

## 10 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted emissions with LISN	9 kHz to 150 kHz: $\pm 3.9$ dB 150 kHz to 30 MHz: $\pm 3.8$ dB
Radiated emissions at 10 m measuring distance Horizontal polarization  Vertical polarization	Biconilog antenna: $\pm 5.0$ dB Biconical antenna: $\pm 5.0$ dB Log periodic antenna: $\pm 5.1$ dB Double ridged horn antenna: $\pm 5.3$ dB Biconilog antenna: $\pm 5.5$ dB Biconical antenna: $\pm 5.5$ dB Log periodic antenna: $\pm 5.6$ dB Double ridged horn antenna: $\pm 5.8$ dB
Radiated emissions at 3 m measuring distance Horizontal polarization  Vertical polarization	Biconilog antenna: $\pm 5.3$ dB Biconical antenna: $\pm 5.0$ dB Log periodic antenna: $\pm 5.3$ dB Double ridged horn antenna: $\pm 5.3$ dB Biconilog antenna: $\pm 6.0$ dB Biconical antenna: $\pm 5.7$ dB Log periodic antenna: $\pm 6.0$ dB Double ridged horn antenna: $\pm 6.0$ dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: $\pm 2.6$ dB 2.9 GHz to 6.46 GHz: $\pm 3.5$ dB 6.46 GHz to 13.2 GHz: $\pm 4.3$ dB 13.2 GHz to 22.0 GHz: $\pm 5.0$ dB 22.0 GHz to 26.8 GHz: $\pm 5.5$ dB 26.8 GHz to 40.0 GHz: $\pm 4.8$ dB

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.



## 11 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions, file number IC 2186A-1 for OATS, certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is IL1001.

Address: P.O. Box 23, Binyamina 30500, Israel.  
Telephone: +972 4628 8001  
Fax: +972 4628 8277  
e-mail: mail@hermonlabs.com  
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

## 12 APPENDIX D Specification references

FCC 47CFR part 15: 2015	Radio Frequency Devices
ANSI C63.10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
ANSI C63.4: 2009	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
RSS-210 Issue 8: 2010	Low Power Licence- Exempt Radiocommunication Devices
RSS-Gen Issue 4: 2014	General Requirements and Information for the Certification of Radiocommunication Equipment
ICES-003 issue 6:2016	Information Technology Equipment (ITE) – Limits and methods of measurement



### 13 APPENDIX E Test equipment correction factors

Correction factor  
Line impedance stabilization network  
Model LISN 16 - 1  
Hermon Laboratories, HL 0447

Frequency, kHz	Correction factor, dB
10	4.9
15	2.86
20	1.83
25	1.25
30	0.91
35	0.69
40	0.53
50	0.35
60	0.25
70	0.18
80	0.14
90	0.11
100	0.09
125	0.06
150	0.04

The correction factor in dB is to be added to meter readings of an interference analyzer or a spectrum analyzer.



**Antenna factor**  
**Active loop antenna**  
**Model 6502, S/N 2857, HL 0446**

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field strength in dB( $\mu$ V/m).



**Antenna factor**  
**Biconilog antenna EMCO Model 3141**  
**Ser.No.1011, HL 0604**

Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)
26	7.8	580	20.6	1320	27.8
28	7.8	600	21.3	1340	28.3
30	7.8	620	21.5	1360	28.2
40	7.2	640	21.2	1380	27.9
60	7.1	660	21.4	1400	27.9
70	8.5	680	21.9	1420	27.9
80	9.4	700	22.2	1440	27.8
90	9.8	720	22.2	1460	27.8
100	9.7	740	22.1	1480	28.0
110	9.3	760	22.3	1500	28.5
120	8.8	780	22.6	1520	28.9
130	8.7	800	22.7	1540	29.6
140	9.2	820	22.9	1560	29.8
150	9.8	840	23.1	1580	29.6
160	10.2	860	23.4	1600	29.5
170	10.4	880	23.8	1620	29.3
180	10.4	900	24.1	1640	29.2
190	10.3	920	24.1	1660	29.4
200	10.6	940	24.0	1680	29.6
220	11.6	960	24.1	1700	29.8
240	12.4	980	24.5	1720	30.3
260	12.8	1000	24.9	1740	30.8
280	13.7	1020	25.0	1760	31.1
300	14.7	1040	25.2	1780	31.0
320	15.2	1060	25.4	1800	30.9
340	15.4	1080	25.6	1820	30.7
360	16.1	1100	25.7	1840	30.6
380	16.4	1120	26.0	1860	30.6
400	16.6	1140	26.4	1880	30.6
420	16.7	1160	27.0	1900	30.6
440	17.0	1180	27.0	1920	30.7
460	17.7	1200	26.7	1940	30.9
480	18.1	1220	26.5	1960	31.2
500	18.5	1240	26.5	1980	31.6
520	19.1	1260	26.5	2000	32.0
540	19.5	1280	26.6		
560	19.8	1300	27.0		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μV) to convert it into field strength in dB(μV/m).





**Cable loss**  
**Cable coax, RG-214, 12 m, s/n 149, HL 0813**

No.	Frequency, MHz	Cable loss, dB	Measured uncertainty, dB
1	10	0.27	±0.12
2	30	0.51	±0.12
3	50	0.70	±0.12
4	100	1.05	±0.12
5	150	1.30	±0.13
6	200	1.52	±0.13
7	250	1.71	±0.13
8	300	1.91	±0.13
9	400	2.27	±0.13
10	500	2.56	±0.13
11	600	2.85	±0.14
12	700	3.11	±0.14
13	800	3.37	±0.14
14	900	3.64	±0.14
15	1000	3.90	±0.14



**Cable loss**  
**Cable coaxial, Microwave Cable Assembly, 104EA, 18 GHz, 1.0 m**  
**Suhner Sucoflex, HL 3390**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.03	4800	0.55	9800	0.89	14900	1.07
30	0.04	4900	0.56	9900	0.89	15000	1.07
50	0.05	5000	0.57	10000	0.86	15100	1.08
100	0.07	5100	0.58	10100	0.86	15200	1.07
200	0.10	5200	0.58	10200	0.88	15300	1.09
300	0.12	5300	0.59	10300	0.92	15400	1.10
400	0.14	5400	0.59	10400	0.94	15500	1.10
500	0.16	5500	0.60	10500	0.96	15600	1.12
600	0.17	5600	0.61	10600	0.93	15700	1.15
700	0.18	5700	0.61	10700	0.89	15800	1.15
800	0.20	5800	0.63	10800	0.89	15900	1.17
900	0.21	5900	0.63	10900	0.88	16000	1.14
1000	0.23	6000	0.64	11000	0.92	16100	1.14
1100	0.24	6100	0.64	11100	0.91	16200	1.15
1200	0.25	6200	0.64	11200	0.89	16300	1.14
1300	0.27	6300	0.65	11300	0.88	16400	1.13
1400	0.28	6400	0.65	11400	0.88	16500	1.13
1500	0.28	6500	0.66	11500	0.90	16600	1.13
1600	0.30	6600	0.67	11600	0.94	16700	1.14
1700	0.31	6700	0.67	11700	0.96	16800	1.14
1800	0.32	6800	0.67	11800	0.92	16900	1.14
1900	0.33	6900	0.68	11900	0.92	17000	1.14
2000	0.34	7000	0.67	12000	0.91	17100	1.15
2100	0.35	7100	0.68	12100	0.92	17200	1.14
2200	0.35	7200	0.69	12200	0.95	17300	1.15
2300	0.36	7300	0.69	12300	0.98	17400	1.15
2400	0.37	7400	0.68	12400	0.96	17500	1.16
2500	0.39	7500	0.69	12500	0.99	17600	1.16
2600	0.40	7600	0.70	12600	0.96	17700	1.16
2700	0.41	7700	0.71	12700	0.93	17800	1.19
2800	0.42	7800	0.72	12800	0.94	17900	1.21
2900	0.42	7900	0.72	12900	0.98	18000	1.25
3000	0.43	8000	0.72	13000	0.99		
3100	0.44	8100	0.73	13100	0.99		
3200	0.45	8200	0.74	13200	0.99		
3300	0.46	8300	0.75	13300	0.99		
3400	0.46	8400	0.74	13400	1.00		
3500	0.47	8500	0.73	13500	1.02		
3600	0.47	8600	0.73	13600	1.05		
3700	0.47	8700	0.75	13700	1.03		
3800	0.49	8800	0.77	13800	1.02		
3900	0.49	8900	0.77	13900	1.03		
4000	0.50	9000	0.77	14000	1.03		
4100	0.51	9100	0.77	14100	1.05		
4200	0.52	9200	0.78	14200	1.05		
4300	0.52	9300	0.80	14300	1.04		
4400	0.53	9400	0.82	14400	1.03		
4500	0.53	9500	0.82	14600	1.06		
4600	0.54	9600	0.83	14700	1.07		
4700	0.56	9700	0.89	14800	1.08		



**Cable loss**  
**Cable coaxial, RG-214/U, N type-N type, 17 m**  
**Teldor, HL 3612**

Frequency, MHz	Cable loss, dB
0.1	0.05
0.5	0.07
1	0.10
3	0.22
5	0.29
10	0.39
30	0.68
50	0.90
100	1.27
150	1.58
200	1.80
250	2.12
300	2.36
350	2.60
400	2.82
450	2.99
500	3.23
550	3.40
600	3.56
650	3.71
700	3.90
750	4.04
800	4.23
850	4.39
900	4.55
950	4.65
1000	4.79





**Cable loss**  
**Cable coaxial, MIL C-17, N type-N type, 6 m**  
**Belden, HL 3623**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.10	2600	4.35	5300	7.67
50	0.30	2700	4.54	5400	7.79
100	0.45	2800	4.70	5500	7.89
200	0.69	2900	4.87	5600	7.94
300	0.89	3000	5.04	5700	8.01
400	1.06	3100	5.19	5800	8.12
500	1.24	3200	5.35	5900	8.19
600	1.38	3300	5.50	6000	8.30
700	1.54	3400	5.65	6100	8.35
800	1.69	3500	5.79	6200	8.45
900	1.83	3600	5.92	6300	8.55
1000	1.96	3700	6.07	6400	8.65
1100	2.14	3800	6.17	6500	8.75
1200	2.31	3900	6.30		
1300	2.38	4000	6.43		
1400	2.51	4100	6.53		
1500	2.63	4200	6.65		
1600	2.76	4300	6.75		
1700	2.90	4400	6.85		
1800	3.04	4500	7.01		
1900	3.19	4600	7.09		
2000	3.35	4700	7.20		
2100	3.51	4800	7.24		
2200	3.67	4900	7.31		
2300	3.84	5000	7.41		
2400	4.01	5100	7.48		
2500	4.18	5200	7.56		



**Cable loss**  
**Test cable, Mini-Circuits, S/N 0755A, 18 GHz, 4.6 m, N/M - N/M**  
**APC-15FT-NMNM+, HL 4278**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.24	4900	4.19	10000	6.47	15100	8.33
30	0.26	5000	4.25	10100	6.50	15200	8.35
50	0.34	5100	4.29	10200	6.52	15300	8.37
100	0.50	5200	4.32	10300	6.57	15400	8.40
200	0.72	5300	4.38	10400	6.59	15500	8.42
300	0.90	5400	4.41	10500	6.61	15600	8.46
400	1.06	5500	4.46	10600	6.64	15700	8.50
500	1.20	5600	4.51	10700	6.64	15800	8.52
600	1.32	5700	4.56	10800	6.65	15900	8.56
700	1.44	5800	4.59	10900	6.68	16000	8.61
800	1.54	5900	4.64	11000	6.68	16100	8.64
900	1.64	6000	4.69	11100	6.69	16200	8.66
1000	1.74	6100	4.72	11200	6.70	16300	8.70
1100	1.83	6200	4.77	11300	6.74	16400	8.73
1200	1.92	6300	4.80	11400	6.78	16500	8.74
1300	2.01	6400	4.83	11500	6.81	16600	8.75
1400	2.09	6500	4.89	11600	6.84	16700	8.78
1500	2.18	6600	4.90	11700	6.87	16800	8.79
1600	2.25	6700	4.95	11800	6.92	16900	8.81
1700	2.33	6800	5.01	11900	6.98	17000	8.85
1800	2.39	6900	4.99	12000	7.02	17100	8.90
1900	2.47	7000	5.04	12100	7.08	17200	8.95
2000	2.53	7100	5.11	12200	7.15	17300	8.99
2100	2.60	7200	5.14	12300	7.20	17400	9.03
2200	2.67	7300	5.21	12400	7.26	17500	9.07
2300	2.73	7400	5.29	12500	7.31	17600	9.11
2400	2.80	7500	5.33	12600	7.36	17700	9.15
2500	2.87	7600	5.38	12700	7.41	17800	9.19
2600	2.93	7700	5.46	12800	7.46	17900	9.24
2700	3.00	7800	5.52	12900	7.51	18000	9.28
2800	3.06	7900	5.58	13000	7.55		
2900	3.12	8000	5.64	13100	7.59		
3000	3.18	8100	5.69	13200	7.65		
3100	3.24	8200	5.75	13300	7.69		
3200	3.30	8300	5.80	13400	7.72		
3300	3.35	8400	5.84	13500	7.78		
3400	3.42	8500	5.90	13600	7.82		
3500	3.46	8600	5.97	13700	7.86		
3600	3.52	8700	5.99	13800	7.91		
3700	3.57	8800	6.04	13900	7.96		
3800	3.61	8900	6.10	14000	8.01		
3900	3.67	9000	6.13	14100	8.06		
4000	3.71	9100	6.17	14200	8.10		
4100	3.77	9200	6.23	14300	8.13		
4200	3.83	9300	6.27	14400	8.16		
4300	3.89	9400	6.30	14500	8.19		
4400	3.94	9500	6.35	14600	8.21		
4500	4.00	9600	6.37	14700	8.23		
4600	4.05	9700	6.40	14800	8.26		
4700	4.10	9800	6.44	14900	8.28		
4800	4.16	9900	6.45	15000	8.30		



**Cable loss**  
**Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M,**  
**NC29-N1N1-244S/N 12025101 003,**  
**HL 4353**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.20	9000	2.71
100	0.27	9500	2.81
300	0.47	10000	2.90
500	0.61	10500	2.97
1000	0.87	11000	3.06
1500	1.07	11500	3.13
2000	1.24	12000	3.20
2500	1.39	12500	3.26
3000	1.53	13000	3.34
3500	1.65	13500	3.39
4000	1.77	14000	3.47
4500	1.89	14500	3.54
5000	1.99	15000	3.62
5500	2.07	15500	3.69
6000	2.20	16000	3.76
6500	2.30	16500	3.83
7000	2.39	17000	3.86
7500	2.51	17500	3.94
8000	2.58	18000	4.02
8500	2.65		



## 14 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB( $\mu$ V)	decibel referred to one microvolt
dB( $\mu$ V/m)	decibel referred to one microvolt per meter
dB( $\mu$ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
$\mu$ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
$\Omega$	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million ( $10^{-6}$ )
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT