

## FCC DoC Test Report

**Report No.:** FC161229E05

**Test Model:** M-R0066

**Received Date:** Dec. 29, 2016

**Test Date:** Jan. 20 to 21, 2017

**Issued Date:** Feb. 03, 2017

**Applicant:** LOGITECH FAR EAST LTD.

**Address:** #2 Creation Rd. 4, Science-Based Ind. Park Hsinchu Taiwan, R.O.C.

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Lab Address:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan R.O.C.

**Test Location (1):** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan R.O.C.

**Test Location (2):** No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin  
Chu Hsien 307, Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Release Control Record .....</b>	<b>3</b>
<b>1 Certificate of Conformity .....</b>	<b>4</b>
<b>2 Summary of Test Results.....</b>	<b>5</b>
2.1 Measurement Uncertainty .....	5
2.2 Modification Record .....	5
<b>3 General Information .....</b>	<b>6</b>
3.1 Features of EUT .....	6
3.2 General Description of EUT .....	6
3.3 Operating Modes of EUT and Determination of Worst Case Operating Mode .....	7
3.4 Test Program Used and Operation Descriptions.....	8
3.5 Primary Clock Frequencies of Internal Source .....	8
3.6 Miscellaneous.....	9
<b>4 Configuration and Connections with EUT .....</b>	<b>10</b>
4.1 Connection Diagram of EUT and Peripheral Devices .....	10
4.2 Configuration of Peripheral Devices and Cable Connections .....	12
<b>5 Conducted Disturbance At Mains Ports.....</b>	<b>13</b>
5.1 Limits .....	13
5.2 Test Instruments .....	13
5.3 Test Arrangement .....	14
5.4 Supplementary Information .....	14
5.5 Test Results (Mode 1) .....	15
5.6 Test Results (Mode 2) .....	17
<b>6 Radiated Emissions up to 1 GHz .....</b>	<b>19</b>
6.1 Limits .....	19
6.2 Test Instruments .....	20
6.3 Test Arrangement .....	21
6.4 Supplementary Information .....	21
6.5 Test Results (Mode 1) .....	22
6.6 Test Results (Mode 2) .....	24
<b>7 Radiated Emissions above 1 GHz.....</b>	<b>26</b>
7.1 Limits .....	26
7.2 Test Instruments .....	27
7.3 Test Arrangement .....	28
7.4 Supplementary Information .....	28
7.5 Test Results (Mode 1) .....	29
7.6 Test Results (Mode 2) .....	31
<b>8 Pictures of Test Arrangements .....</b>	<b>33</b>

### Release Control Record

Issue No.	Description	Date Issued
FC161229E05	Original release.	Feb. 03, 2017

## 1 Certificate of Conformity

**Product:** Cordless Mouse

**Brand:** Logitech

**Test Model:** M-R0066

**Sample Status:** ENGINEERING SAMPLE

**Applicant:** LOGITECH FAR EAST LTD.

**Test Date:** Jan. 20 to 21, 2017

**Standards:** 47 CFR FCC Part 15, Subpart B, Class B  
ICES-003:2016 Issue 6, Class B  
ANSI C63.4:2014

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :** Nico Liu , **Date:** Feb. 03, 2017  
Nico Liu / Specialist

**Approved by :** Ken Lu , **Date:** Feb. 03, 2017  
Ken Lu / Manager

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart B / ICES-003:2016 Issue 6, Class B

ANSI C63.4:2014

FCC Clause	ICES-003 Clause	Test Item	Result/Remarks	Verdict
15.107	6.1	AC Power Line Conducted Emissions	Minimum passing Class B margin is -17.64 dB at 0.49766 MHz	Pass
15.109	6.2.1	Radiated Emissions up to 1 GHz	Minimum passing Class B margin is -5.49 dB at -47.82 MHz	Pass
	6.2.2	Radiated Emissions above 1 GHz	Minimum passing Class B margin is -6.20 dB at 10254.80 MHz	Pass

Note: There is no deviation to the applied test methods and requirements covered by the scope of this report.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

The listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement	Expanded Uncertainty (k=2) ( $\pm$ )	Maximum allowable uncertainty ( $\pm$ )
Conducted disturbance at mains port using AMN, 150kHz ~ 30MHz	1.83 dB	3.4 dB ( $U_{cispr}$ )
Radiated disturbance, 30MHz ~ 1GHz	3.62 dB	6.3 dB ( $U_{cispr}$ )
Radiated disturbance, 1GHz ~ 6GHz	3.87 dB	5.2 dB ( $U_{cispr}$ )

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 Features of EUT

The tests reported herein were performed according to the method specified by LOGITECH FAR EAST LTD., for detailed feature description, please refer to the manufacturer's specifications or user's manual.

#### 3.2 General Description of EUT

Product	Cordless Mouse
Brand	Logitech
Test Model	M-R0066
Sample Status	ENGINEERING SAMPLE
Operating Software	NA
Power Supply rating	DC 3.7V from battery or DC 5V from USB interface
Modulation Type	GFSK
Operating Frequency	<b>BT-LE</b> : 2402MHz ~ 2480MHz <b>GFSK</b> : 2405MHz ~ 2474MHz
Antenna Type	PCB printed antenna (Antenna gain: -2.48 dBi)
Accessory Device	NA
Data Cable Supplied	USB cable x 1 (shielded, 1.2m)

Note:

1. The EUT may have a lot of colors for marketing requirement.
2. The EUT could be supplied with a battery as the following table:

Brand	Model No.	Spec.
SYNERGY SCIENTECH CORP or Logitech	AHB572535PJT or 533-000120	3.7Vdc, 500mAh

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.3 Operating Modes of EUT and Determination of Worst Case Operating Mode

For Radiated emission test, the EUT has been pre-tested under following test modes, and test mode B was the worst case for final test.

Test Condition			
Radiated emission test			
Mode	DC	Power Source	wireless
A	3.7V	Battery	GFSK
<b>B</b>	<b>5V</b>	<b>USB Charge</b>	<b>GFSK</b>

Test modes are presented in the report as below.

Test Condition			
Conducted emission / Radiated emission tests			
Mode	DC	Power Source	wireless
1	5V	USB Charge	GFSK
2	5V	USB Charge	BT

### 3.4 Test Program Used and Operation Descriptions

For Conducted emission / Radiated emission tests (For Mode1)

- 1 Turn on the power of all equipment.
- 2 EUT link support unit A (Laptop) by Unifying Mode
- 3 Support unit A (Laptop) runs "EMC test.exe" sends "H" messages on the monitor.

For Conducted emission / Radiated emission tests (For Mode2)

- 1 Turn on the power of all equipment.
- 2 EUT link support unit A (Laptop) by Bluetooth Mode
- 3 Support unit A (Laptop) runs "EMC test.exe" sends "H" messages on the monitor.

### 3.5 Primary Clock Frequencies of Internal Source

The EUT is a 2.4GHz WLAN device. , provided by LOGITECH FAR EAST LTD., for detailed internal source, please refer to the manufacturer's specifications.



### 3.6 Miscellaneous

#### Labelling Requirements for Part 15 Devices:

➤ Verification

The specific labelling requirements for a device subject to the Verification procedure are contained in Section 15.19(a). These labelling requirements are:

If the device is subject only to Verification, include a label bearing a unique identifier (Section 2.954) and one of three compliance statements specified in Section 15.19(a). If the labeling area for the device is so small, and/or it is not practical to place the compliance statement on the device, then the statement can be placed in the user manual or product packaging (Section 15.19(a)(5)). However, the device must still be labelled with the unique identifier (Verification). Generally, devices smaller than the palm of the hand are considered too small for the compliance statement.

➤ Certification

If the device is subject to Certification: (1) Section 2.925 contains information on identification of the equipment; (2) include a label bearing an FCC Identifier (FCC ID) (Section 2.926) and (3) include the appropriate compliance statement in Section 15.19(a). If the device is considered too small and therefore it is impractical (smaller than the palm of the hand) to display the compliance statement, then the statement may be placed in the user manual or product packaging. However, the device must still be labelled with the FCC ID. If the device is unquestionably too small for the FCC ID to be readable (smaller than 4-6 points), the FCC ID may be placed in the user manual. However, it must be determined that the device itself is too small – the label area allocated to the FCC ID may not be reduced because of over crowded identification of other product and regulatory information.

An electronic display of the FCC ID (see 9. Electronic Labelling below) may be used for Certification of Section 15.212 modular transmitters and software defined radios (Section 2.944).

➤ Declaration of Conformity (DoC):

The labelling requirements for a device subject to the DoC procedure are specified in Section 15.19(b). The label should include the FCC logo along with the Trade Name and Model Number, which satisfies the unique identifier requirement of Section 2.1074 if it represents the identical equipment tested for DoC compliance. For personal computers assembled from authorized components, the following additional text must also be included: “Assembled from tested components,” “Complete system not tested.” When the device is so small and/or when it is not practical to place the required additional text on the device, the text may be placed in the user manual or pamphlet supplied to the user. However, the FCC logo, Trade Name, and Model Number must still be displayed on the device (Section 15.19(b)(3)).



Part 15 Declaration of Conformity (DoC) Label Examples

Equipment certified as software defined radio may use a means that readily displays the FCC ID on an electronic display screen, instead of labelling the device (Section 2.925 (e)).

Further information may refer to FCC KDB:784748 D01 Labelling Part 15 &18 Guidelines

#### Labelling Requirements for ICES-003 Devices:

➤ Industry Canada ICES-003 Compliance Label:


*CAN ICES-3 (\*)/NMB-3(\*)*

\* Insert either “A” or “B” but not both to identify the applicable Class of ITE.


## 4 Configuration and Connections with EUT

### 4.1 Connection Diagram of EUT and Peripheral Devices

For Conducted emission / Radiated emission Mode1 tests

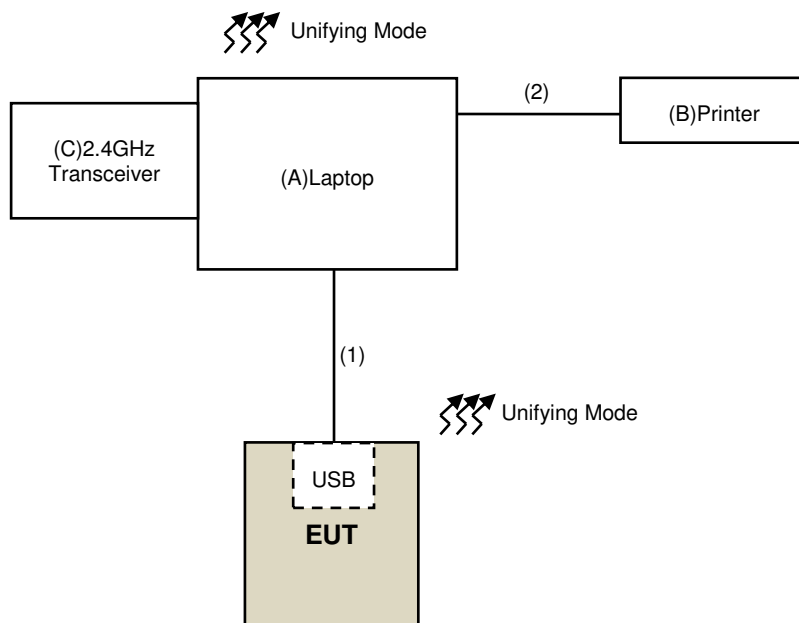

For Conducted emission / Radiated emission Mode 2 tests

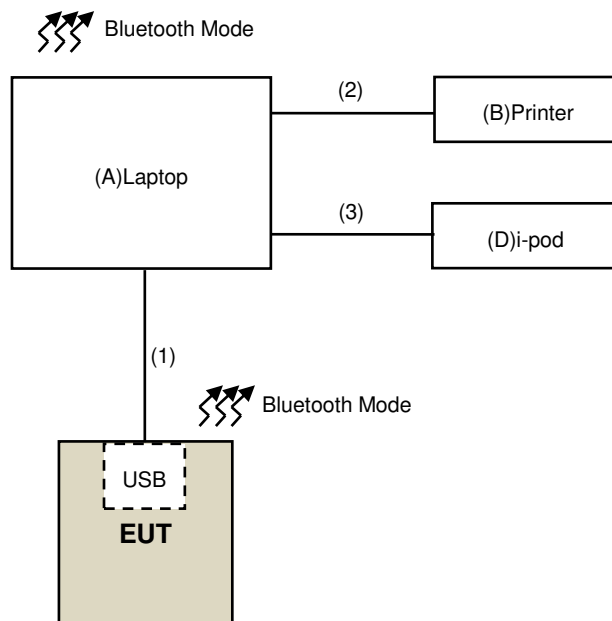



#### 4.2 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	Latitude E5440	519OP32	FCC DoC	Provided by Lab
B.	Printer	EPSON	LQ-300+II	G88Y074086	FCC DoC	Provided by Lab
C.	2.4GHz Transceiver	Logitech	C-U0007	NA	NA	Provided by Lab
D.	i-pod	Apple	MC749TA/A	CC4DMFKUDFDM	FCC DoC	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB Cable	1	1.2	Yes	0	Supplied by client
2.	USB Cable	1	1.8	Yes	0	Provided by Lab
3.	USB Cable	1	0.1	Yes	0	Provided by Lab

Note: The cores are originally attached to the cable.

## 5 Conducted Disturbance At Mains Ports

### 5.1 Limits

Frequency (MHz)	Class A (dBUV)		Class B (dBUV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

Notes: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases linearly with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

### 5.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	100287	Apr. 16, 2016	Apr. 15, 2017
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK-8127	8127-523	Oct. 11, 2016	Oct. 10, 2017
Line-Impedance Stabilization Network (for Peripheral) R&S	ESH3-Z5	848773/004	Oct. 26, 2016	Oct. 25, 2017
RF Cable	5D-FB	COACAB-001	May 24, 2016	May 23, 2017
10 dB PAD Mini-Circuits	HAT-10+	CONATT-001	Sep. 13, 2016	Sep. 12, 2017
50 ohms Terminator	50	3	Oct. 26, 2016	Oct. 25, 2017
50 ohms Terminator	N/A	EMC-04	Nov. 02, 2016	Nov. 01, 2017
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

#### Note:


1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. D.
3. Tested Date: Jan. 21, 2017

### 5.3 Test Arrangement

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The test results of conducted disturbance at mains ports are recorded of six worst margins for quasi-peak (mandatory) [and average (if necessary)] values against the limits at frequencies of interest unless the margin is 20 dB or greater.

**Note:**

The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

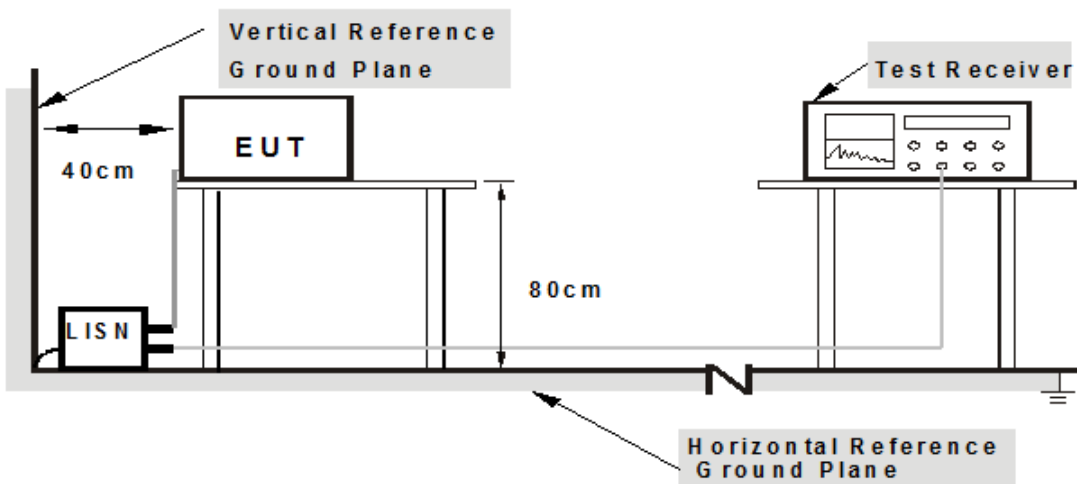

**Note: 1. Support units were connected to second LISN.**

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

### 5.4 Supplementary Information

There is not any deviation from the test standards for the test method.


### 5.5 Test Results (Mode 1)

<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function &amp; Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9kHz
<b>Input Power (system)</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	21°C, 69%RH
<b>Tested by</b>	Wythe Lin		
<b>Test Mode</b>	Mode 1		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.30	34.69	20.24	44.99	30.54	65.79	55.79	-20.80	-25.25
2	0.17734	10.29	31.74	20.10	42.03	30.39	64.61	54.61	-22.58	-24.22
3	0.23984	10.30	21.78	10.67	32.08	20.97	62.10	52.10	-30.02	-31.13
4	0.31797	10.32	16.23	3.05	26.55	13.37	59.76	49.76	-33.21	-36.39
5	0.50156	10.37	20.96	15.77	31.33	26.14	56.00	46.00	-24.67	-19.86
6	3.70703	10.49	18.17	10.72	28.66	21.21	56.00	46.00	-27.34	-24.79

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

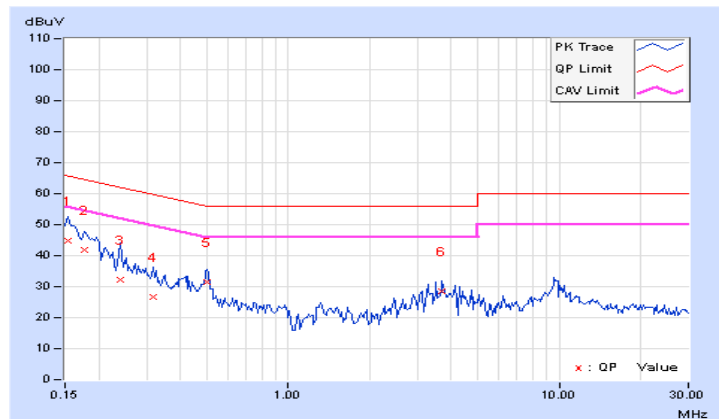


<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function &amp; Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9kHz
<b>Input Power (system)</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	21°C, 69%RH
<b>Tested by</b>	Wythe Lin		
<b>Test Mode</b>	Mode 1		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.36	35.50	20.96	45.86	31.32	66.00	56.00	-20.14	-24.68
2	0.19687	10.36	28.33	17.30	38.69	27.66	63.74	53.74	-25.05	-26.08
3	0.23594	10.37	22.75	10.43	33.12	20.80	62.24	52.24	-29.12	-31.44
4	0.27500	10.39	20.57	10.07	30.96	20.46	60.97	50.97	-30.01	-30.51
5	0.50156	10.46	22.77	17.71	33.23	28.17	56.00	46.00	-22.77	-17.83
6	3.53516	10.57	17.88	11.14	28.45	21.71	56.00	46.00	-27.55	-24.29

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

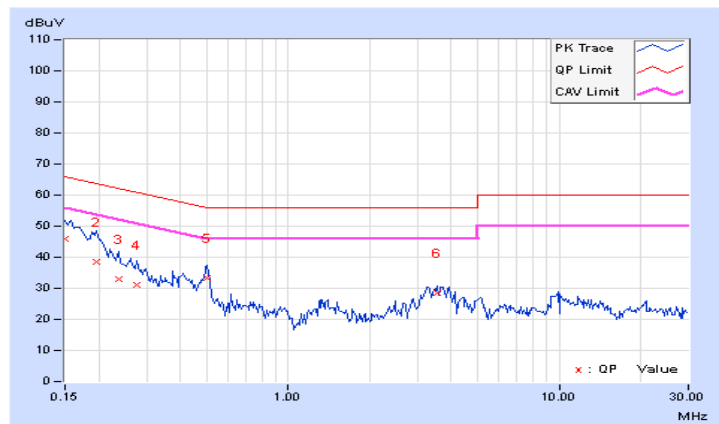




### 5.6 Test Results (Mode 2)

<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function &amp; Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9kHz
<b>Input Power (system)</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	21°C, 69%RH
<b>Tested by</b>	Wythe Lin		
<b>Test Mode</b>	Mode 2		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.30	36.21	20.94	46.51	31.24	66.00	56.00	-19.49	-24.76
2	0.18516	10.29	30.71	19.66	41.00	29.95	64.25	54.25	-23.25	-24.30
3	0.23984	10.30	22.04	10.11	32.34	20.41	62.10	52.10	-29.76	-31.69
4	0.41172	10.34	15.30	5.30	25.64	15.64	57.61	47.61	-31.97	-31.97
5	0.49766	10.37	21.05	16.12	31.42	26.49	56.04	46.04	-24.62	-19.55
6	3.89844	10.50	16.96	10.74	27.46	21.24	56.00	46.00	-28.54	-24.76

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

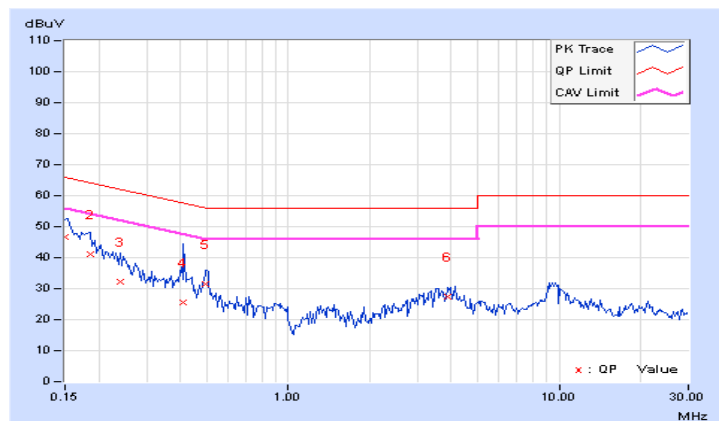


<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function &amp; Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9kHz
<b>Input Power (system)</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	21°C, 69%RH
<b>Tested by</b>	Wythe Lin		
<b>Test Mode</b>	Mode 2		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.36	35.61	21.16	45.97	31.52	66.00	56.00	-20.03	-24.48
2	0.18906	10.36	29.81	19.56	40.17	29.92	64.08	54.08	-23.91	-24.16
3	0.20859	10.36	26.08	14.63	36.44	24.99	63.26	53.26	-26.82	-28.27
4	0.24375	10.38	22.75	10.63	33.13	21.01	61.97	51.97	-28.84	-30.96
5	0.40391	10.44	15.54	7.18	25.98	17.62	57.77	47.77	-31.79	-30.15
<b>6</b>	<b>0.49766</b>	<b>10.46</b>	<b>22.84</b>	<b>17.94</b>	<b>33.30</b>	<b>28.40</b>	<b>56.04</b>	<b>46.04</b>	<b>-22.74</b>	<b>-17.64</b>

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

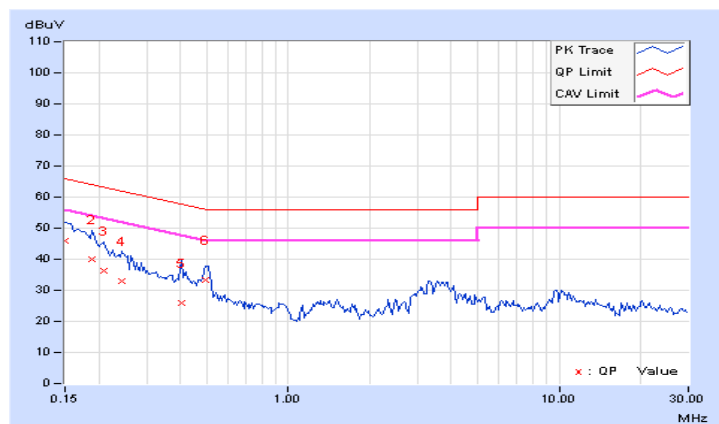

## 6 Radiated Emissions up to 1 GHz

### 6.1 Limits

Emissions radiated outside of the specified bands, shall be according to the general radiated limits as following:

Radiated Emissions Limits at 10 meters (dB $\mu$ V/m)				
Frequencies (MHz)	FCC 15B / ICES-003, Class A	FCC 15B / ICES-003, Class B	CISPR 22, Class A	CISPR 22, Class B
30-88	39	29.5	40	30
88-216	43.5	33.1		
216-230	46.4	35.6		
230-960			47	37
960-1000	49.5	43.5		

Radiated Emissions Limits at 3 meters (dB $\mu$ V/m)				
Frequencies (MHz)	FCC 15B / ICES-003, Class A	FCC 15B / ICES-003, Class B	CISPR 22, Class A	CISPR 22, Class B
30-88	49.5	40	50.5	40.5
88-216	54	43.5		
216-230	56.9	46		
230-960			57.5	47.5
960-1000	60	54		

- Notes:
1. The lower limit shall apply at the transition frequencies.
  2. Emission level (dB $\mu$ V/m) = 20 log Emission level (uV/m).
  3. QP detector shall be applied if not specified.

## 6.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY50010125	Apr. 16, 2016	Apr. 15, 2017
	N9038A	MY50010132	June 28, 2016	June 27, 2017
Pre-Amplifier Sonoma	310N	352925	Aug. 29, 2016	Aug. 28, 2017
	310N	352926	Aug. 29, 2016	Aug. 28, 2017
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-359	Dec. 28, 2016	Dec. 27, 2017
	VULB 9168	9168-358	Dec. 16, 2016	Dec. 15, 2017
Fixed attenuator Mini-Circuits	UNAT-5+	CHF-001	Sep. 9, 2016	Sep. 08, 2017
	UNAT-5+	CHF-002	Sep. 9, 2016	Sep. 08, 2017
RF Cable	8D-FB	CHFCAB-001-1 CHFCAB-001-3 CHFCAB-001-4	Sep. 22, 2016	Sep. 21, 2017
		CHFCAB-002-1 CHFCAB-002-3 CHFCAB-002-4	Sep. 22, 2016	Sep. 21, 2017
Software BVADT	ADT_Radiated_V 8.7.08	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA


### Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 10m Chamber No. F.
3. The FCC Site Registration No. is 928149.
4. The VCCI Site Registration No. is R-3252.
5. The CANADA Site Registration No. is IC 7450H-1.
6. Tested Date:Jan. 20, 2017

### 6.3 Test Arrangement

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited test facility. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is up to 1 GHz.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for quasi-peak detection (QP) at frequency up to 1GHz.

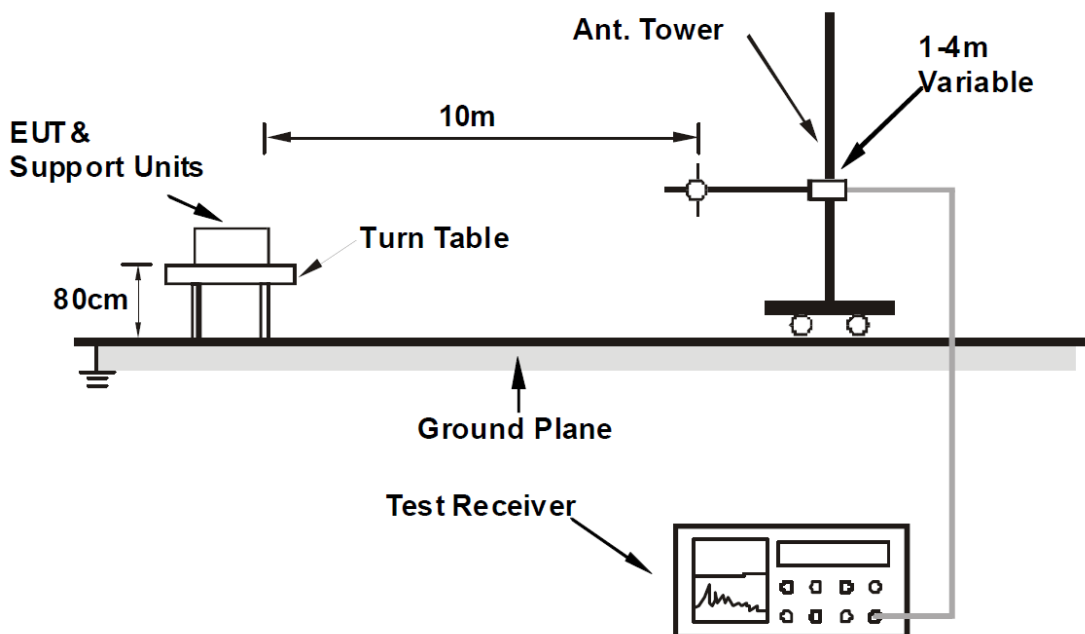

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

### 6.4 Supplementary Information

There is not any deviation from the test standards for the test method.

### 6.5 Test Results (Mode 1)


Frequency Range	30MHz ~ 1GHz	Detector Function & Bandwidth	Quasi-Peak (QP), 120kHz
Input Power	DC 5V from USB interface	Environmental Conditions	26°C, 75%RH
Tested by	Jason Huang		
Test Mode	Mode 1		

#### Antenna Polarity & Test Distance : Horizontal at 10 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	210.70	24.50 QP	30.00	-5.50	4.00 H	294	39.93	-15.43
2	279.99	25.85 QP	37.00	-11.15	4.00 H	288	37.73	-11.88
3	419.94	28.52 QP	37.00	-8.48	2.00 H	26	36.82	-8.30
4	489.88	30.50 QP	37.00	-6.50	2.00 H	295	37.20	-6.70
5	839.80	27.61 QP	37.00	-9.39	3.00 H	129	27.78	-0.17
6	958.36	28.40 QP	37.00	-8.60	3.00 H	239	26.12	2.28

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

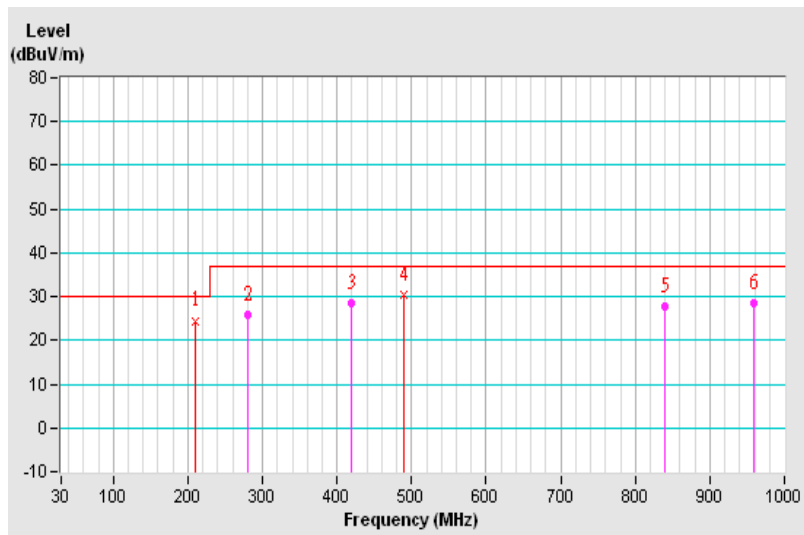


Frequency Range	30MHz ~ 1GHz	Detector Function & Bandwidth	Quasi-Peak (QP), 120kHz
Input Power	DC 5V from USB interface	Environmental Conditions	26°C, 75%RH
Tested by	Jason Huang		
Test Mode	Mode 1		

**Antenna Polarity & Test Distance : Vertical at 10 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	44.65	24.00 QP	30.00	-6.00	3.00 V	108	37.03	-13.03
2	140.41	18.92 QP	30.00	-11.08	1.00 V	281	31.83	-12.91
3	210.78	21.77 QP	30.00	-8.23	1.00 V	73	37.41	-15.64
4	419.92	26.63 QP	37.00	-10.37	4.00 V	271	34.79	-8.16
5	491.84	29.91 QP	37.00	-7.09	4.00 V	262	36.35	-6.44
6	839.76	27.78 QP	37.00	-9.22	3.00 V	348	27.35	0.43

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)  
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

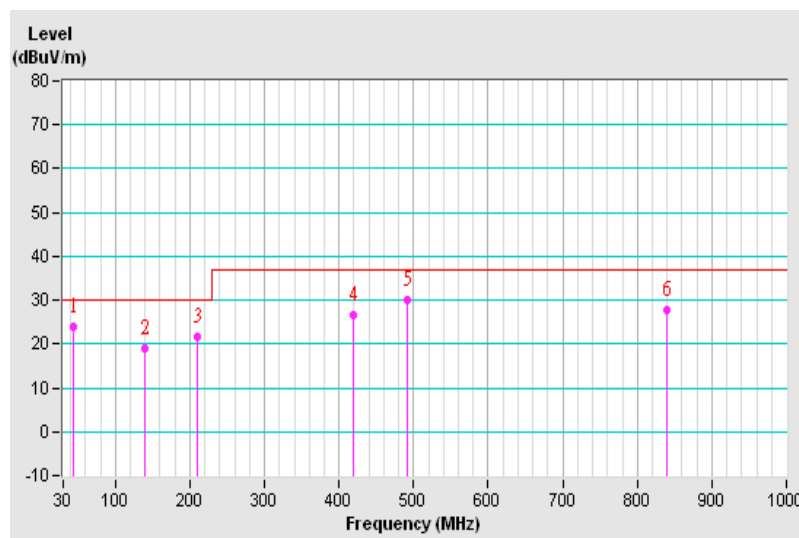

### 6.6 Test Results (Mode 2)


Frequency Range	30MHz ~ 1GHz	Detector Function & Bandwidth	Quasi-Peak (QP), 120kHz
Input Power	DC 5V from USB interface	Environmental Conditions	26°C, 75%RH
Tested by	Jason Huang		
Test Mode	Mode 2		

#### Antenna Polarity & Test Distance : Horizontal at 10 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	218.16	19.48 QP	30.00	-10.52	4.00 H	34	34.78	-15.30
2	280.50	24.50 QP	37.00	-12.50	4.00 H	111	36.37	-11.87
3	419.99	28.20 QP	37.00	-8.80	2.00 H	280	36.50	-8.30
4	489.93	29.91 QP	37.00	-7.09	4.00 H	34	36.61	-6.70
5	793.51	26.86 QP	37.00	-10.14	2.00 H	62	27.65	-0.79
6	983.10	28.27 QP	37.00	-8.73	1.00 H	260	25.59	2.68

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

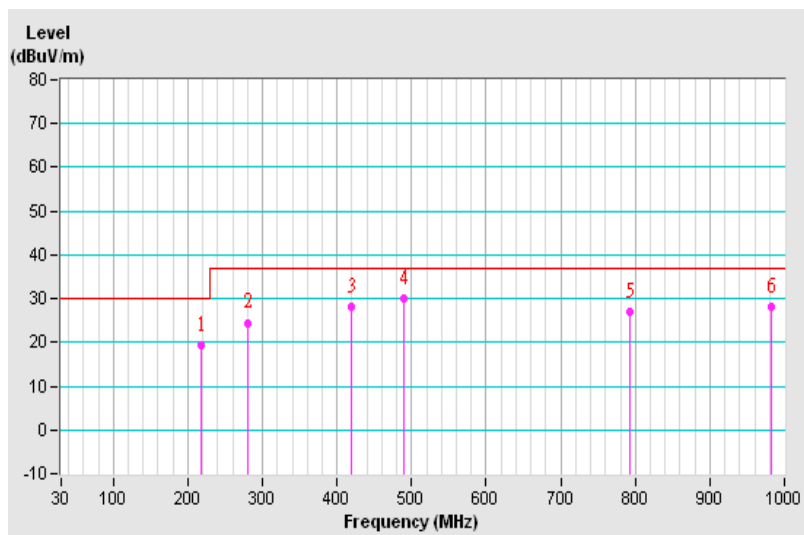




Frequency Range	30MHz ~ 1GHz	Detector Function & Bandwidth	Quasi-Peak (QP), 120kHz
Input Power	DC 5V from USB interface	Environmental Conditions	26°C, 75%RH
Tested by	Jason Huang		
Test Mode	Mode 2		

Antenna Polarity & Test Distance : Vertical at 10 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
<b>1</b>	<b>47.82</b>	<b>24.51 QP</b>	<b>30.00</b>	<b>-5.49</b>	<b>1.00 V</b>	<b>231</b>	<b>37.34</b>	<b>-12.83</b>
2	107.26	18.39 QP	30.00	-11.61	1.00 V	250	34.24	-15.85
3	140.29	18.18 QP	30.00	-11.82	1.00 V	303	31.10	-12.92
4	281.04	22.75 QP	37.00	-14.25	2.00 V	340	34.59	-11.84
5	419.96	26.26 QP	37.00	-10.74	4.00 V	298	34.42	-8.16
6	489.88	27.52 QP	37.00	-9.48	3.00 V	292	34.01	-6.49

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)  
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

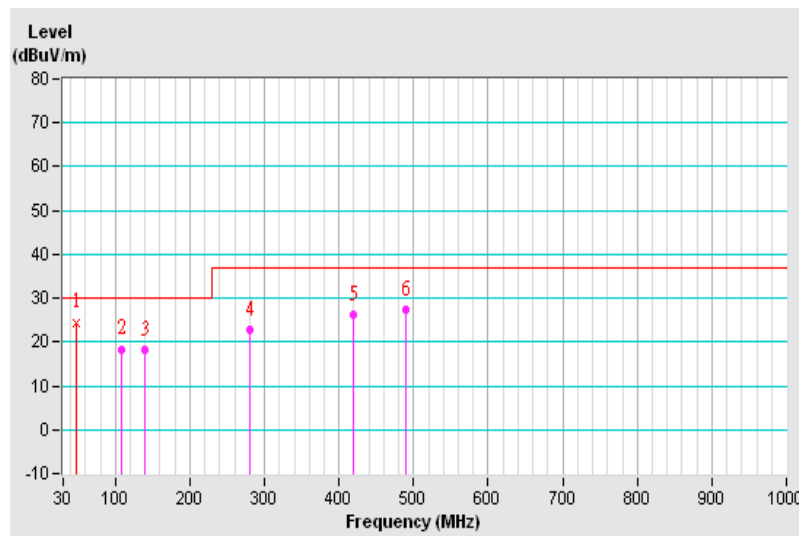

## 7 Radiated Emissions above 1 GHz

### 7.1 Limits

Emissions radiated outside of the specified bands, shall be according to the general radiated limits as following:

Radiated Emissions Limits at 10 meters (dB $\mu$ V/m)				
Frequencies (MHz)	FCC 15B / ICES-003, Class A	FCC 15B / ICES-003, Class B	CISPR 22, Class A	CISPR 22, Class B
1000-3000	Avg: 49.5	Avg: 43.5	Not defined	Not defined
Above 3000	Peak: 69.5	Peak: 63.5	Not defined	Not defined

Radiated Emissions Limits at 3 meters (dB $\mu$ V/m)				
Frequencies (MHz)	FCC 15B / ICES-003, Class A	FCC 15B / ICES-003, Class B	CISPR 22, Class A	CISPR 22, Class B
1000-3000	Avg: 60	Avg: 54	Avg: 56 Peak: 76	Avg: 50 Peak: 70
Above 3000	Peak: 80	Peak: 74	Avg: 60 Peak: 80	Avg: 54 Peak: 74

- Notes: 1. The lower limit shall apply at the transition frequencies.  
 2. Emission level (dB $\mu$ V/m) = 20 log Emission level (uV/m).  
 3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### Frequency Range (For unintentional radiators)

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5th harmonic of the highest frequency or 40GHz, whichever is lower

## 7.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY51210105	July 06, 2016	July 05, 2017
Horn_Antenna FT-RF	HA-07M18G-NF	0000320091110	Dec. 15, 2016	Dec. 14, 2017
Pre-Amplifier Agilent	8449B	3008A02578	June 22, 2016	June 21, 2017
RF Cable	104 RF cable	150406 131217 131205	Jan. 14, 2017	Jan. 13, 2018
Software BVADT	ADT_Radiated_ V8.7.08	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA


**Note:**

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. G.
3. Tested Date:Jan. 20, 2017

### 7.3 Test Arrangement

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna can be varied from one meter to four meters, the height of adjustment depends on the EUT height and the antenna 3dB beamwidth both, to detect the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The spectrum analyzer system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.

Note: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection (PK) at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1GHz.

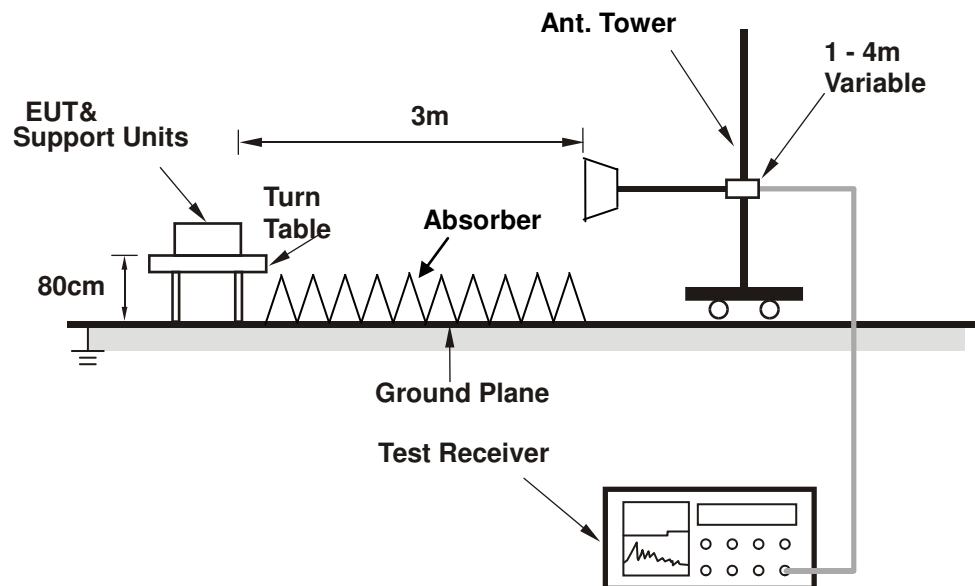

The test arrangement is in accordance with ANSI 63.4:2014. For the actual test configuration, please refer to the related item – Photographs of the Test Configuration

### 7.4 Supplementary Information

There is not any deviation from the test standards for the test method.


### 7.5 Test Results (Mode 1)

Frequency Range	1GHz ~ 18GHz	Detector Function & Resolution Bandwidth	Peak (PK) / Average (AV), 1MHz
Input Power	DC 5V from USB interface	Environmental Conditions	22°C, 67%RH
Tested by	Wythe Lin		
Test Mode	Mode 1		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1396.53	41.40 PK	74.00	-32.60	1.00 H	142	43.50	-2.10
2	1396.53	29.00 AV	54.00	-25.00	1.00 H	142	31.10	-2.10
3	1943.08	44.40 PK	74.00	-29.60	1.00 H	274	43.40	1.00
4	1943.08	31.40 AV	54.00	-22.60	1.00 H	274	30.40	1.00
5	4388.95	51.20 PK	74.00	-22.80	1.00 H	126	41.80	9.40
6	4388.95	38.10 AV	54.00	-15.90	1.00 H	126	28.70	9.40
7	5627.40	55.20 PK	74.00	-18.80	1.00 H	240	41.60	13.60
8	5627.40	42.90 AV	54.00	-11.10	1.00 H	240	29.30	13.60
9	7111.50	60.40 PK	74.00	-13.60	1.00 H	16	42.20	18.20
10	7111.50	47.20 AV	54.00	-6.80	1.00 H	16	29.00	18.20
11	9117.08	60.20 PK	74.00	-13.80	1.00 H	167	42.70	17.50
12	9117.08	47.60 AV	54.00	-6.40	1.00 H	167	30.10	17.50

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

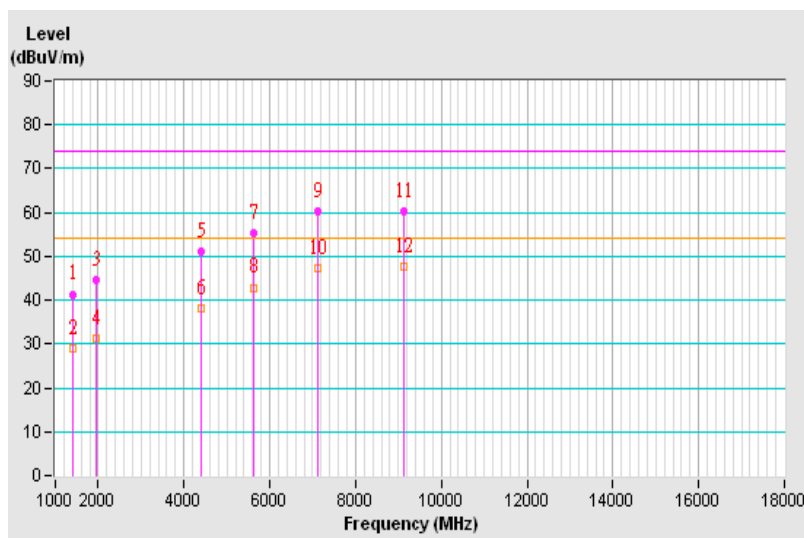


Frequency Range	1GHz ~ 18GHz	Detector Function & Resolution Bandwidth	Peak (PK) / Average (AV), 1MHz
Input Power	DC 5V from USB interface	Environmental Conditions	22°C, 67%RH
Tested by	Wythe Lin		
Test Mode	Mode 1		

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1263.08	47.20 PK	74.00	-26.80	1.00 V	179	50.40	-3.20
2	1263.08	28.30 AV	54.00	-25.70	1.00 V	179	31.50	-3.20
3	1605.20	43.00 PK	74.00	-31.00	1.00 V	156	43.80	-0.80
4	1605.20	30.30 AV	54.00	-23.70	1.00 V	156	31.10	-0.80
5	3457.35	49.00 PK	74.00	-25.00	1.00 V	112	42.80	6.20
6	3457.35	36.00 AV	54.00	-18.00	1.00 V	112	29.80	6.20
7	5580.23	54.50 PK	74.00	-19.50	1.00 V	350	41.00	13.50
8	5580.23	42.60 AV	54.00	-11.40	1.00 V	350	29.10	13.50
9	7015.87	60.20 PK	74.00	-13.80	1.00 V	164	41.80	18.40
10	7015.87	47.60 AV	54.00	-6.40	1.00 V	164	29.20	18.40
11	9058.42	60.60 PK	74.00	-13.40	1.00 V	93	43.20	17.40
12	9058.42	47.40 AV	54.00	-6.60	1.00 V	93	30.00	17.40

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

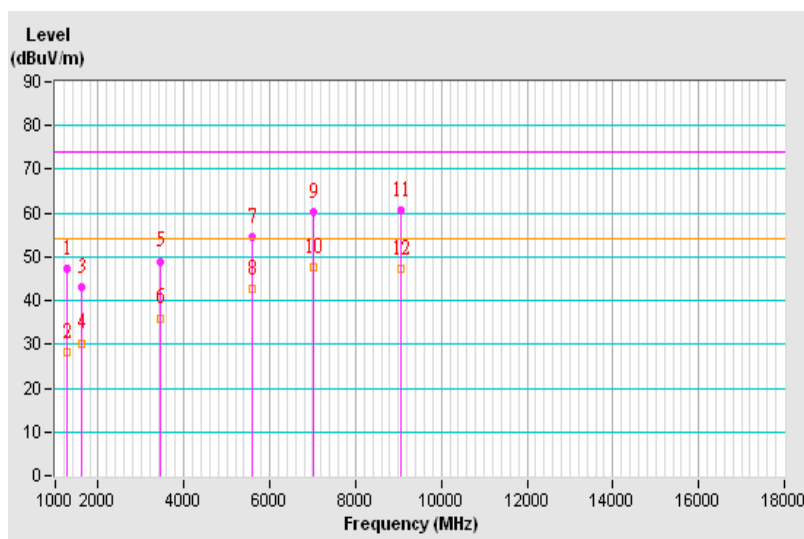

### 7.6 Test Results (Mode 2)


Frequency Range	1GHz ~ 18GHz	Detector Function & Resolution Bandwidth	Peak (PK) / Average (AV), 1MHz
Input Power	DC 5V from USB interface	Environmental Conditions	22°C, 67%RH
Tested by	Wythe Lin		
Test Mode	Mode 1		

#### Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1894.20	44.20 PK	74.00	-29.80	1.00 H	276	43.50	0.70
2	1894.20	32.00 AV	54.00	-22.00	1.00 H	276	31.30	0.70
3	3324.75	49.20 PK	74.00	-24.80	1.00 H	233	43.50	5.70
4	3324.75	35.80 AV	54.00	-18.20	1.00 H	233	30.10	5.70
5	4270.80	51.30 PK	74.00	-22.70	1.00 H	270	42.30	9.00
6	4270.80	38.70 AV	54.00	-15.30	1.00 H	270	29.70	9.00
7	7005.68	60.10 PK	74.00	-13.90	1.00 H	93	41.70	18.40
8	7005.68	47.40 AV	54.00	-6.60	1.00 H	93	29.00	18.40
9	9145.55	60.30 PK	74.00	-13.70	1.00 H	214	42.70	17.60
10	9145.55	47.60 AV	54.00	-6.40	1.00 H	214	30.00	17.60
11	10254.80	60.20 PK	74.00	-13.80	1.00 H	151	42.30	17.90
12	10254.80	47.80 AV	54.00	-6.20	1.00 H	151	29.90	17.90

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

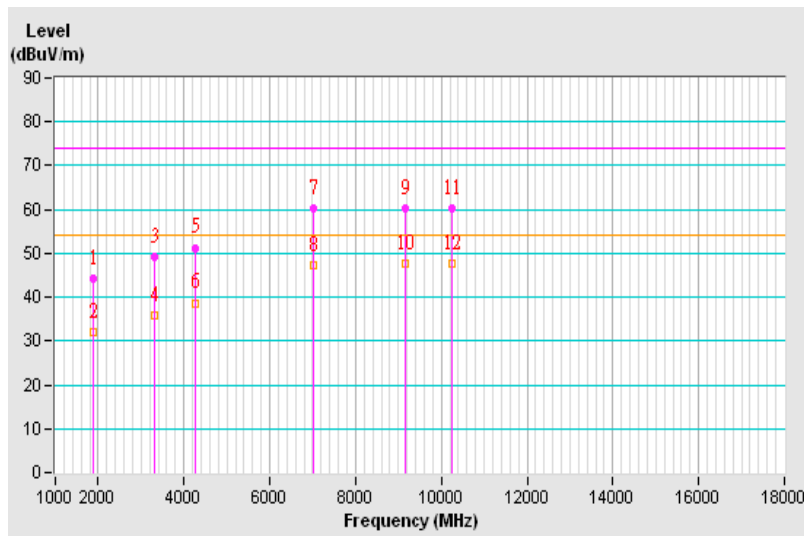


Frequency Range	1GHz ~ 18GHz	Detector Function & Resolution Bandwidth	Peak (PK) / Average (AV), 1MHz
Input Power	DC 5V from USB interface	Environmental Conditions	22°C, 67%RH
Tested by	Wythe Lin		
Test Mode	Mode 1		

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1260.53	45.70 PK	74.00	-28.30	1.00 V	187	48.90	-3.20
2	1260.53	29.70 AV	54.00	-24.30	1.00 V	187	32.90	-3.20
3	2161.53	46.20 PK	74.00	-27.80	1.00 V	250	43.50	2.70
4	2161.53	32.70 AV	54.00	-21.30	1.00 V	250	30.00	2.70
5	3423.35	49.30 PK	74.00	-24.70	1.00 V	336	43.30	6.00
6	3423.35	35.40 AV	54.00	-18.60	1.00 V	336	29.40	6.00
7	4732.35	53.80 PK	74.00	-20.20	1.00 V	222	43.40	10.40
8	4732.35	40.00 AV	54.00	-14.00	1.00 V	222	29.60	10.40
9	7057.52	59.80 PK	74.00	-14.20	1.00 V	314	41.40	18.40
10	7057.52	47.50 AV	54.00	-6.50	1.00 V	314	29.10	18.40
11	8973.85	59.90 PK	74.00	-14.10	1.00 V	187	42.70	17.20
12	8973.85	46.90 AV	54.00	-7.10	1.00 V	187	29.70	17.20

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

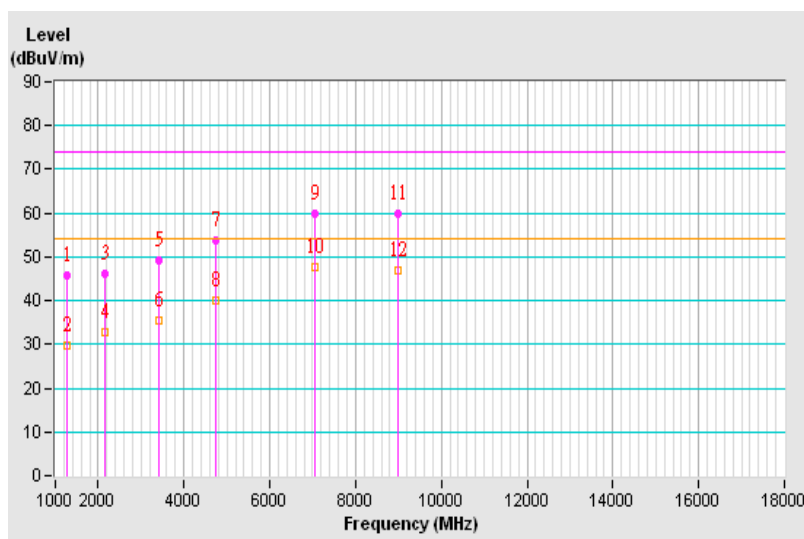



## 8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).