

# FCC TEST REPORT

**REPORT NO.:** RF960410H02

**MODEL NO.:** M-UAN141

**RECEIVED:** April 10, 2007

**TESTED:** April 12, 2007

**ISSUED:** April 17, 2007

**APPLICANT:** LOGITECH FAR EAST LTD.

**ADDRESS:** #2 Creation Rd. 4, Science-Based Ind. Park  
Hsinchu Taiwan, R.O.C.

**ISSUED BY:** Advance Data Technology Corporation

**LAB LOCATION:** No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien,  
Taiwan, R.O.C.

This test report consists of 16 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



## Table of Contents

1	CERTIFICATION .....	3
2	SUMMARY OF TEST RESULTS.....	4
2.1	MEASUREMENT UNCERTAINTY .....	4
3	GENERAL INFORMATION .....	5
3.1	GENERAL DESCRIPTION OF EUT.....	5
3.2	DESCRIPTION OF TEST MODES.....	6
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS .....	6
3.4	DESCRIPTION OF SUPPORT UNITS.....	6
4	EMISSION TEST.....	7
4.1	RADIATED EMISSION & OCCUPIED BANDWIDTH MEASUREMENT .....	7
4.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	7
4.1.2	TEST INSTRUMENT.....	8
4.1.3	TEST PROCEDURE .....	9
4.1.4	DEVIATION FROM TEST STANDARD .....	10
4.1.5	TEST SETUP (RADIATED EMISSION).....	11
4.1.6	EUT OPERATING CONDITION .....	11
4.1.7	TEST RESULT (RADIATED EMISSION).....	12
4.1.8	TEST RESULT (RADIATED EMISSION).....	13
4.1.9	TEST RESULTS (BAND EDGES MEASUREMENT) .....	14
5	INFORMATION ON THE TESTING LABORATORIES .....	15
	APPENDIX-A .....	A-1

## 1 CERTIFICATION

**PRODUCT :** Cordless Mouse  
**BRAND NAME :** Logitech  
**MODEL NO :** M-UAN141  
**TESTED:** April 12, 2007  
**APPLICANT :** LOGITECH FAR EAST LTD.  
**STANDARDS :** 47 CFR Part 15, Subpart C(Section 15.227)  
ANSI C63.4: 2003

The above equipment (Model: M-UAN141) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :** Claire Kuan , **DATE:** April 17, 2007  
( Claire Kuan )

**TECHNICAL ACCEPTANCE :** Moris Lin , **DATE:** April 17, 2007  
Responsible for RF ( Moris Lin )

**APPROVED BY :** Hank Chung , **DATE:** April 17, 2007  
( Hank Chung, Deputy Manager )

## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

<b>APPLIED STANDARD: 47 CFR Part 15, Subpart C</b>			
<b>STANDARD PARAGRAPH</b>	<b>TEST TYPE</b>	<b>RESULT</b>	<b>REMARK</b>
15.207	Conducted Emission Test	NA	Power supply is 3.0 VDC from battery
15.227 / 15.209	Radiated Emission Test	PASS	Minimum passing margin is -13.71 dB at 432.66 MHz
15.227	Band Edges Test	PASS	Meet the requirement of limit

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

<b>Measurement</b>	<b>Value</b>
Radiated emissions (30MHz-1GHz)	3.89 dB
Radiated emissions (1GHz ~18GHz)	2.21 dB
Radiated emissions (18GHz ~40GHz)	1.88 dB

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Cordless Mouse
<b>MODEL NO.</b>	M-UAN141
<b>FCC ID</b>	JNZMUAN141
<b>POWER SUPPLY</b>	3.0 VDC from batteries
<b>MODULATION TYPE</b>	FSK
<b>CARRIER FREQUENCY OF EACH CHANNEL</b>	27.045 MHz, 27.195MHz
<b>NUMBER OF CHANNEL</b>	2
<b>ANTENNA TYPE</b>	Loop antenna
<b>DATA CABLE</b>	NA
<b>I/O PORTS</b>	NA
<b>ASSOCIATED DEVICES</b>	NA

**NOTE:**

1. The EUT is the transmitter part of Cordless Mouse.
2. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

### 3.2 DESCRIPTION OF TEST MODES

There are two channels have been pre-tested in our facility as following:

Pre-test Mode	Frequency
1	<b>27.045MHz</b>
2	27.195MHz

**NOTE:** 27.045MHz, the worst case was chosen for final test and its data was recorded in this report.

### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is the transmitter part of a Cordless Mouse. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**47 CFR Part 15, Subpart C (Section 15.227)**

**ANSI C63.4-2003**

All tests have been performed and recorded as per the above standards.

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit.

## 4 EMISSION TEST

### 4.1 RADIATED EMISSION & OCCUPIED BANDWIDTH MEASUREMENT

#### 4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

According to 15.227 the field strength of emissions from intentional radiators operated under these frequencies bands shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dBuV/m)	
	Peak	Average
26.96-27.28	100	80

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.1.2 TEST INSTRUMENT

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Spectrum Analyzer	FSP 40	100036	Dec. 21, 2007
HP Pre_Amplifier	8449B	3008A01922	Sep. 18, 2007
ROHDE & SCHWARZ Test Receiver	ESCS30	100375	Sep. 20, 2007
CHASE Broadband Antenna	VULB9168	138	Dec. 11, 2007
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 27, 2007
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 05, 2008
SCHWARZBECK Biconical Antenna	VHBA9123	459	Jun. 08, 2009
SCHWARZBECK Periodic Antenna	UPA6108	1148	Jun. 08, 2009
R&S Loop Antenna	HFH2-Z2	881058/15	Nov. 29, 2007
RF Switches (ARNITSU)	CS-201	1565157	NA
RF CABLE (Chaintek)	SF102	22054-2	Nov. 14, 2007
RF Cable(RICHTEC)	9913-30M N-N Cable	STCCAB-30M-1 GHz	Jul. 15, 2007
Software	ADT_Radiated_V 5.14	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA
CHANCE MOST Turn Table	TT-100	0203	NA

- Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Biconical and Periodic Antenna) and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, HP preamplifier (model: 8449B) and Spectrum Analyzer (model: R3271A) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in ADT Open Site No. C.
4. The FCC Site Registration No. is 656396.
5. The VCCI Site Registration No. is R-1626.
6. The CANADA Site Registration No. is IC 4824A-3.
7. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4.
8. Loop antenna was used for all emissions below 30 MHz.



### 4.1.3 TEST PROCEDURE

#### Part 1 – Radiated Emission

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meters open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

#### NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.


#### Part 2 –Band edges

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 10kHz with suitable frequency range from 26.96 ~ 27.28 MHz. The band edges was measured and recorded.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.5 TEST SETUP (RADIATED EMISSION)

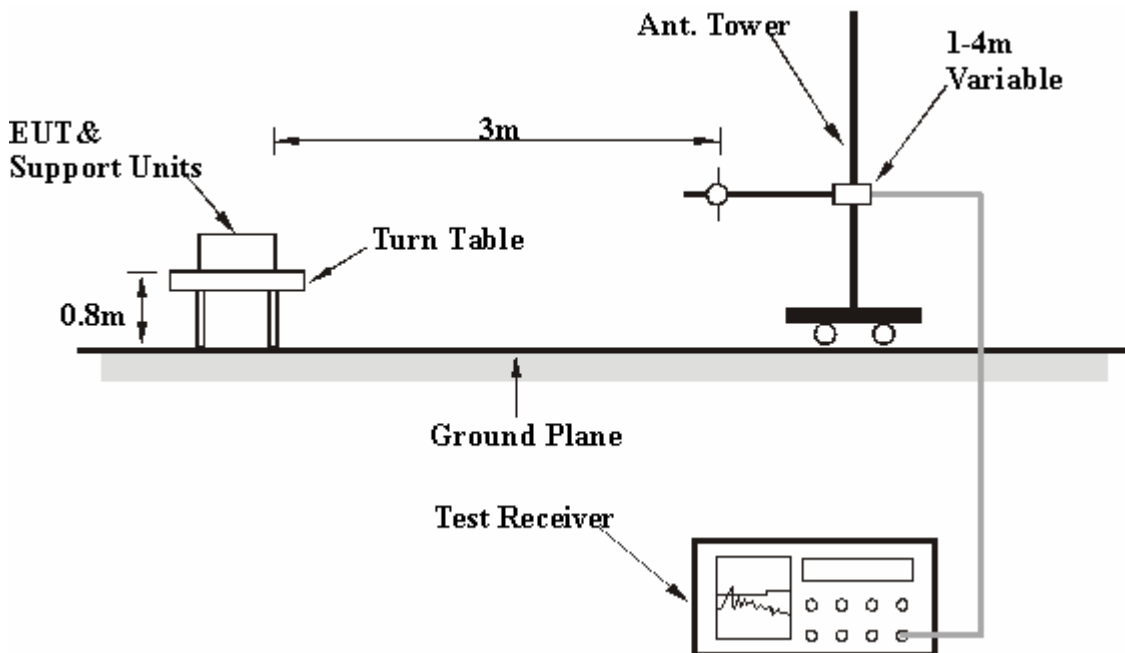

For the actual test configuration, please refer to the related item in this test report - Photographs of the Test Configuration.

#### 4.1.6 EUT OPERATING CONDITION

Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.

#### 4.1.7 TEST RESULT (RADIATED EMISSION)

<b>FREQUENCY RANGE</b>	30 ~ 1000 MHz	<b>INPUT POWER</b>	3.0 VDC
<b>ENVIRONMENTAL CONDITIONS</b>	18 deg. C, 72 % RH, 960 hPa	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Quasi-Peak / 120 kHz
<b>TEST BY</b>	Moris Lin		

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	121.69	25.23 QP	43.50	-18.27	1.42 H	95	13.27	11.96
2	189.29	29.03 QP	43.50	-14.47	1.26 H	274	16.69	12.34
3	216.33	25.61 QP	46.00	-20.39	1.37 H	287	13.30	12.31
4	243.44	31.28 QP	46.00	-14.72	1.05 H	257	17.79	13.49
5	324.67	14.78 QP	46.00	-31.22	1.95 H	54	-2.32	17.10
6	432.66	32.29 QP	46.00	-13.71	1.85 H	294	12.32	19.97
7	446.18	29.92 QP	46.00	-16.08	1.87 H	302	9.55	20.37

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	81.12	24.01 QP	40.00	-15.99	1.00 V	87	14.06	9.95
2	121.69	24.96 QP	43.50	-18.54	1.00 V	313	13.00	11.96
3	148.77	17.83 QP	43.50	-25.67	1.00 V	302	4.09	13.74
4	175.77	18.53 QP	43.50	-24.97	1.16 V	209	5.30	13.23
5	189.29	20.58 QP	43.50	-22.92	1.08 V	225	8.24	12.34
6	216.33	18.41 QP	46.00	-27.59	1.35 V	159	6.10	12.31
7	324.19	20.71 QP	46.00	-25.29	1.57 V	221	3.61	17.10
8	432.66	29.25 QP	46.00	-16.75	1.74 V	217	9.28	19.97

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

### 4.1.8 TEST RESULT (RADIATED EMISSION)


<b>FREQUENCY RANGE</b>	Below 30 MHz	<b>INPUT POWER</b>	3.0 VDC
<b>ENVIRONMENTAL CONDITIONS</b>	18 deg. C, 72 % RH, 960 hPa	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak / Average 9 kHz
<b>TEST BY</b>	Moris Lin		

LOOP ANTENNA TEST DISTANCE: AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*27.045	51.19 PK	100.00	-48.81	1.5	81	50.07	1.12
2	*27.045	34.13 AV	80.00	-45.87	1.5	81	33.01	1.12


- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

### 4.1.9 TEST RESULTS (BAND EDGES MEASUREMENT)

#### 27.045MHz

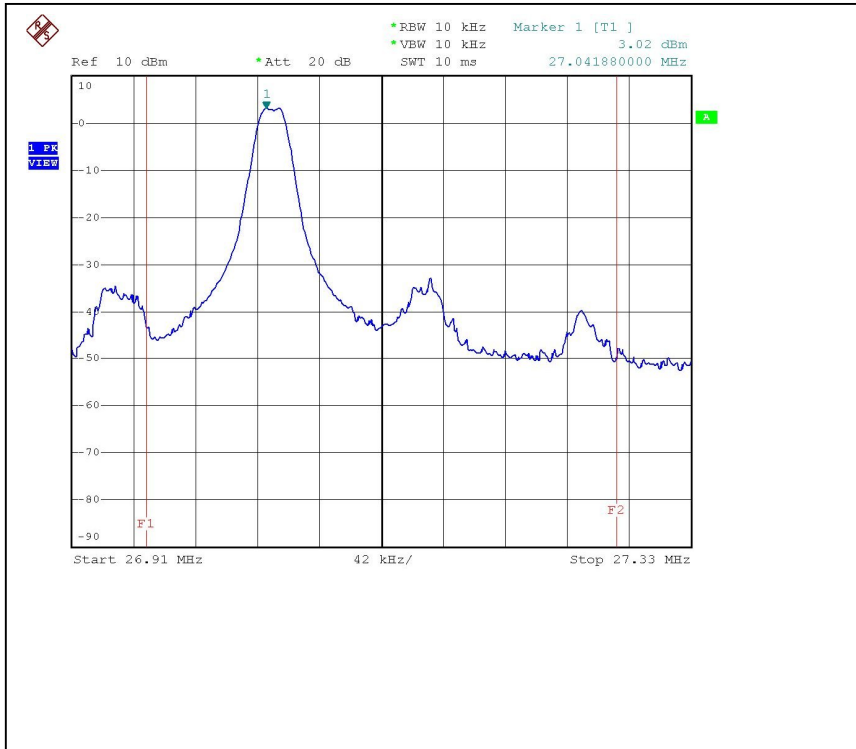

#### 27.195MHz

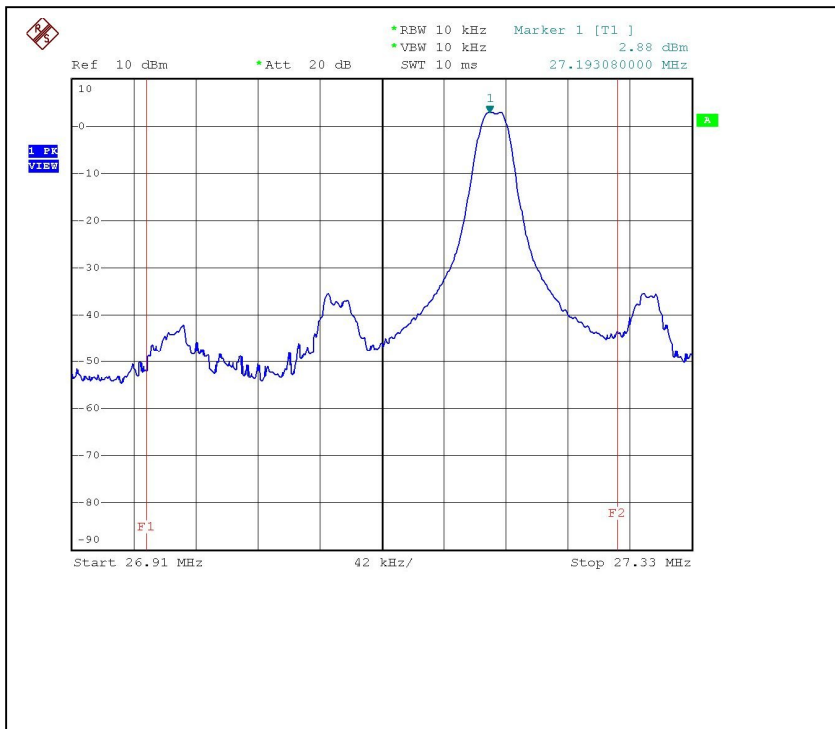

## 5 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

<b>USA</b>	FCC, UL, A2LA
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>Norway</b>	NEMKO
<b>Canada</b>	INDUSTRY CANADA, CSA
<b>R.O.C.</b>	CNLA, BSMI, NCC
<b>Netherlands</b>	Telefication
<b>Singapore</b>	PSB, GOST-ASIA (MOU)
<b>Russia</b>	CERTIS (MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: [www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml).

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26052943

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab:**

Tel: 886-3-3183232

Fax: 886-3-3185050

**Email:** [service@adt.com.tw](mailto:service@adt.com.tw)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.

## **APPENDIX-A**

### **MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.