



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

Applicant's company	LOGITECH FAR EAST LTD.
Applicant Address	#2 Creation Rd. 4, Science-Based Ind. Park Hsinchu Taiwan, R.O.C.
FCC ID	JNZN0006
Manufacturer's company	LOGITECH FAR EAST LTD.
Manufacturer Address	#2 Creation Rd. 4, Science-Based Ind. Park Hsinchu Taiwan, R.O.C.

Product Name	Remote controller
Brand Name	Logitech
Model Name	N-R0006
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2405 ~ 2474MHz
Received Date	Jun. 28, 2012
Final Test Date	Jul. 21, 2012
Submission Type	Original Equipment

### Statement

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009** and **47 CFR FCC Part 15 Subpart C** and KDB 558074 – 20120118 & KDB662911 D01-20110404.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE</b> .....	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT</b> .....	<b>2</b>
<b>3. GENERAL INFORMATION</b> .....	<b>3</b>
3.1. Product Details .....	3
3.2. Accessories .....	3
3.3. Table for Filed Antenna .....	4
3.4. Table for Carrier Frequencies .....	4
3.5. Table for Test Modes .....	5
3.6. Table for Testing Locations.....	6
3.7. Table for Supporting Units .....	6
3.8. Table for Parameters of Test Software Setting .....	7
3.9. Test Configurations.....	8
<b>4. TEST RESULT</b> .....	<b>11</b>
4.1. AC Power Line Conducted Emissions Measurement .....	11
4.2. Peak Output Power Measurement .....	15
4.3. Average Output Power Measurement.....	17
4.4. Power Spectral Density Measurement.....	19
4.5. 6dB Spectrum Bandwidth Measurement .....	22
4.6. Radiated Emissions Measurement.....	24
4.7. Band Edge Emissions Measurement.....	33
4.8. Antenna Requirements .....	36
<b>5. LIST OF MEASURING EQUIPMENTS</b> .....	<b>37</b>
<b>6. TEST LOCATION</b> .....	<b>39</b>
<b>7. TAF CERTIFICATE OF ACCREDITATION</b> .....	<b>40</b>
<b>APPENDIX A. PHOTOGRAPHS OF EUT</b> .....	<b>A1 ~ A17</b>
<b>APPENDIX B. TEST PHOTOS</b> .....	<b>B1 ~ B5</b>
<b>APPENDIX C. RF EXPOSURE REPORT</b> .....	<b>C1 ~ C2</b>




## History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR271316	Rev. 01	Initial issue of report	Jul. 27, 2012

## 1. CERTIFICATE OF COMPLIANCE

**Product Name** : Remote controller  
**Brand Name** : Logitech  
**Model Name** : N-R0006  
**Applicant** : LOGITECH FAR EAST LTD.  
**Test Rule Part(s)** : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jun. 28, 2012 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Jordan Hsiao

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	11.39 dB
4.2	15.247(b)(3)	Peak Output Power	Complies	23.41 dB
4.3	-	Average Output Power	-	-
4.4	15.247(e)	Power Spectral Density	Complies	17.91 dB
4.5	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.6	15.247(d)	Radiated Emissions	Complies	4.26 dB
4.7	15.247(d)	Band Edge Emissions	Complies	7.15 dB
4.8	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Peak Output Power	±0.8dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
6dB Spectrum Bandwidth	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

### 3. GENERAL INFORMATION

#### 3.1. Product Details


Items	Description
Power Type	From power adapter
Modulation	GFSK
Frequency Range	2405 ~ 2474MHz
Channel Number	24
Channel Space	3MHz
Channel Band Width (99%)	2.77 MHz
Peak Output Power	6.59 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

#### 3.2. Accessories

Power	Brand	Model	Rating
Adapter	Logitech	KSAS0060510100VUD	INPUT:100-240V,50/60Hz, 0.18A OUTPUT: 5.1V, 1.0A
Others			
USB Cable			
pedestal			

### 3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	-	-	Printed Antenna	NA	3.31

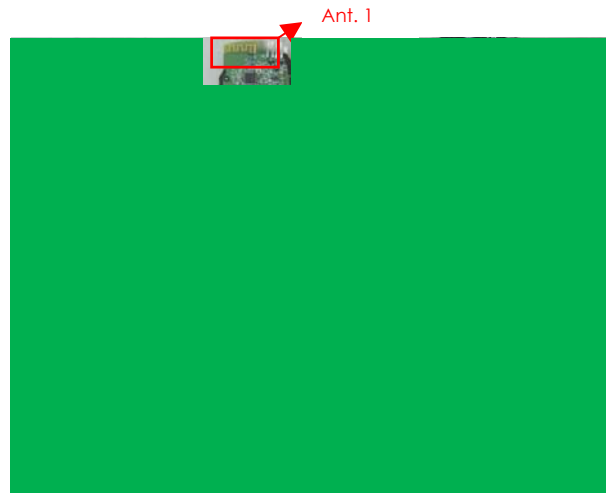

### 3.4. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency
2405 ~ 2474MHz	1	2405 MHz
	2	2408 MHz
	:	:
	14	2444 MHz
	:	:
	23	2471 MHz
	24	2474 MHz

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Modulation	Channel	Antenna
AC Power Line Conducted Emissions	GFSK	-	-
Peak Output Power Average Output Power Power Spectral Density	GFSK	1/12/24	1
6dB Spectrum Bandwidth	GFSK	1/12/24	1
Radiated Emissions 9kHz~1GHz	GFSK	-	-
Radiated Emissions 1GHz~10 <sup>th</sup> Harmonic	GFSK	1/12/24	1
Band Edge Emissions	GFSK	1/12/24	1

The following test modes were performed for Conducted Emissions test:

Mode 1: Remote controller+ USB cable.

Mode 2: Remote controller+ Charging cradle+ AC adapter.

Mode 1 generated the worst case, so it was selected to perform test and its test result was written in the report.

The following test modes were performed for Radiated Emission test:

**For 30MHz~1GHz:**

Mode 1: Remote controller.

Mode 2: Remote controller+ USB cable.

Mode 3: Remote controller+ Charging cradle+ AC adapter.

Mode 1 generated the worst case, so it was selected to perform test and its test result was written in the report.

**For above1 GHz:**

Mode 1: Place EUT in X axis

Mode 2: Place EUT in Y axis

Mode 3: Place EUT in Z axis

Mode 2 generated the worst case, so it was selected to perform test and its test result was written in the report.



### 3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

### 3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1330	E2K4965AGNM
Notebook	DELL	E6220	-
Mouse	Logitech M90	M-U0026	DoC
EARPHONES	E-books	E-EPC040	-

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### Power Parameters


Test Software Version	Radio Test Suite V 0.1.2.3		
Frequency	2405 MHz	2444 MHz	2474 MHz
GFSK	Default	Default	Default

### 3.9. Test Configurations

#### 3.9.1. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

Test Mode: Mode 1

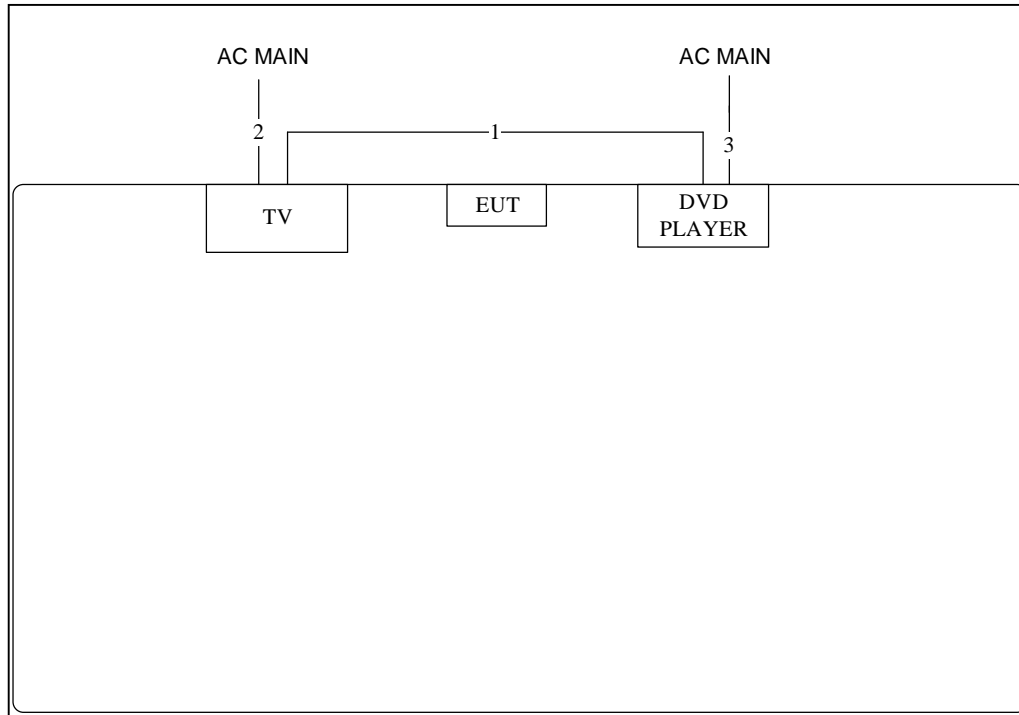

Item	Connection	Shield	Length
1	HDMI cable	Yes	1.2M
2	Power cable	No	1.8M
3	Power cable	No	1.8M


Test Configuration: Above 1GHz

Test Mode: Mode 2



### 3.9.2. AC Power Line Conduction Emissions Test Configuration

Test Mode: Mode 1

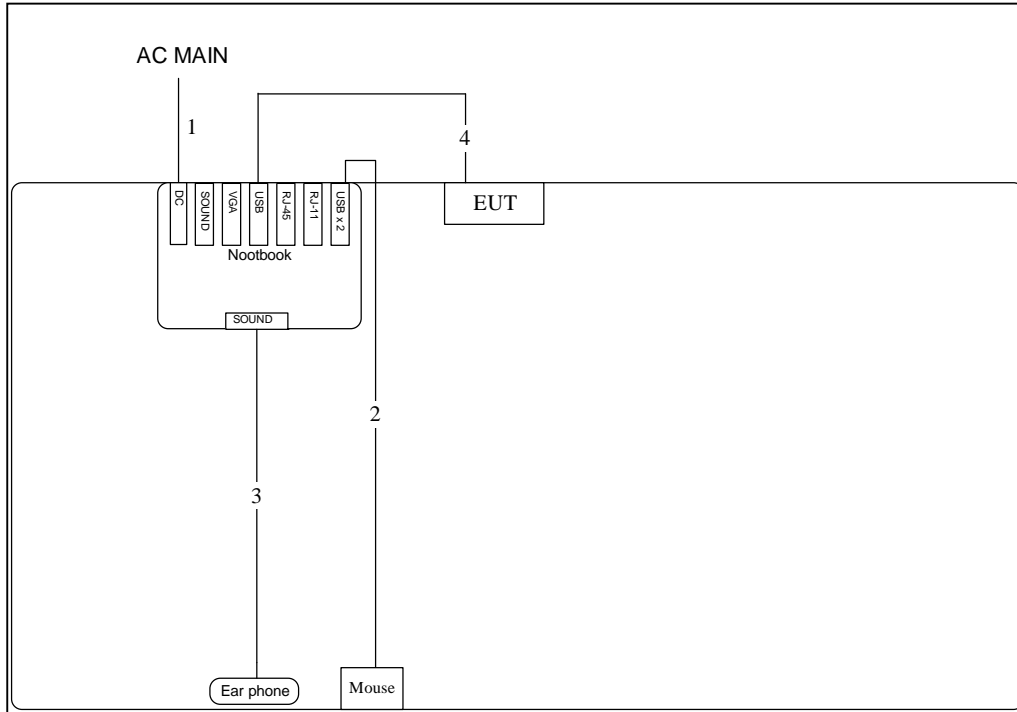

Item	Connection	Shield	Length
1	Power cable	No	2.6M
2	USB cable	No	1.8M
3	Earphone cable	No	1.1M
4	USB cable	No	0.6M

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

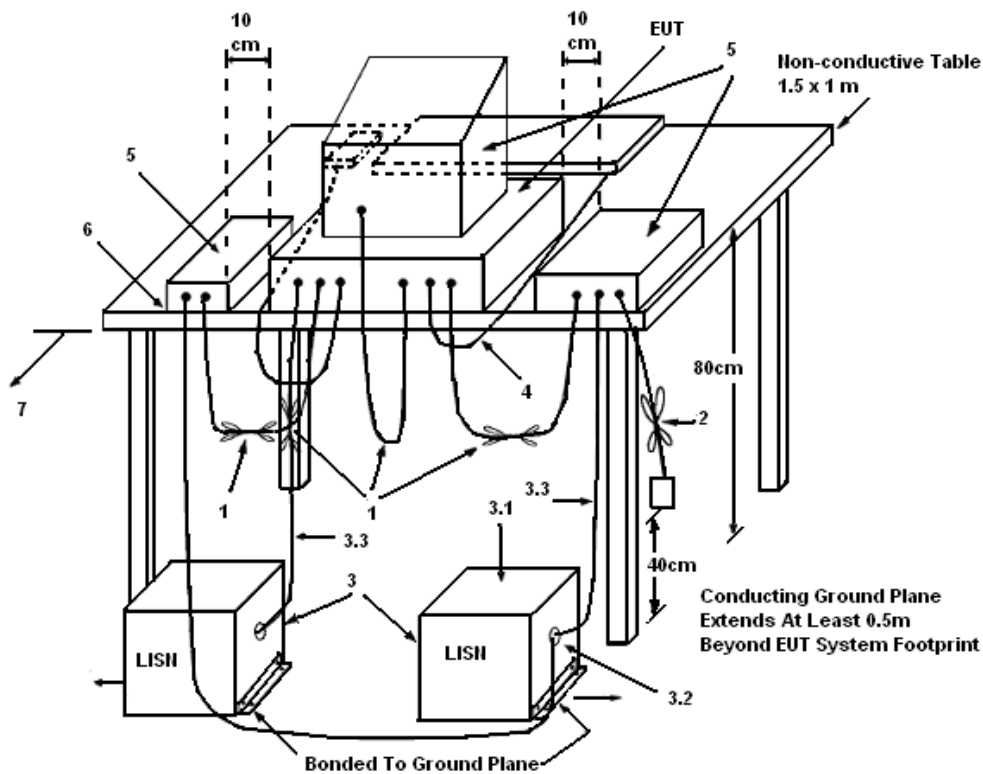

#### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation

There is no deviation with the original standard.


#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

#### 4.1.7. Results of AC Power Line Conducted Emissions Measurement

Test Mode: Mode 1


Temperature	22°C	Humidity	56.2%
Test Engineer	Kane Liu	Phase	Line
Configuration	GFSK		

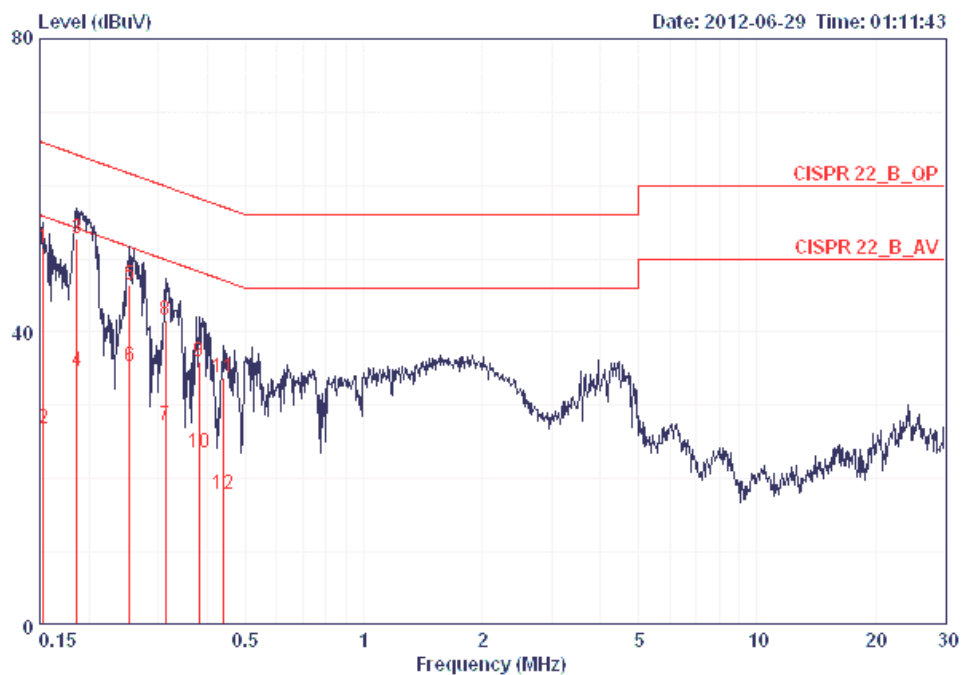

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.15321	51.51	-14.31	65.82	51.25	0.06	0.20	QP
2	0.15321	26.87	-28.95	55.82	26.61	0.06	0.20	AVERAGE
3	0.18640	52.80	-11.39	64.20	52.55	0.05	0.20	QP
4	0.18640	34.57	-19.62	54.20	34.32	0.05	0.20	AVERAGE
5	0.25345	46.43	-15.22	61.64	46.19	0.04	0.20	QP
6	0.25345	35.41	-16.24	51.64	35.17	0.04	0.20	AVERAGE
7	0.31328	27.19	-22.69	49.88	26.97	0.02	0.20	AVERAGE
8	0.31328	41.54	-18.34	59.88	41.32	0.02	0.20	QP
9	0.38113	35.90	-22.35	58.25	35.69	0.01	0.20	QP
10	0.38113	23.49	-24.76	48.25	23.28	0.01	0.20	AVERAGE
11	0.43974	33.89	-23.18	57.07	33.67	0.02	0.20	QP
12	0.43974	17.94	-29.13	47.07	17.72	0.02	0.20	AVERAGE



Temperature	22°C	Humidity	56.2%
Test Engineer	Kane Liu	Phase	Neutral
Configuration	GFSK		

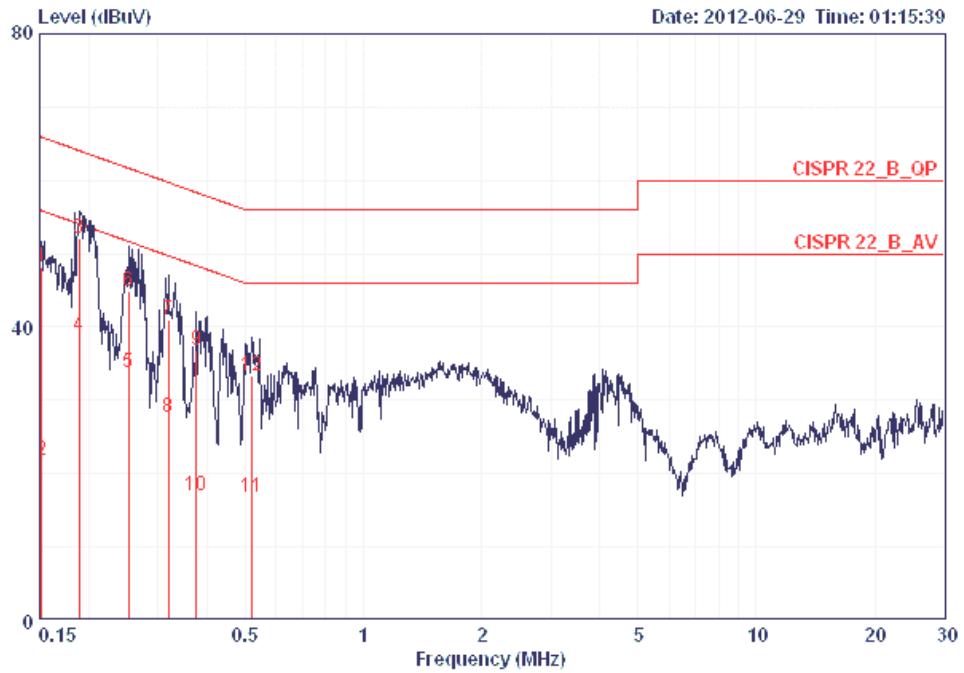

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15160	48.11	-17.80	65.91	47.85	0.06	0.20	QP
2	0.15160	21.78	-34.13	55.91	21.52	0.06	0.20	AVERAGE
3	0.18938	52.01	-12.05	64.06	51.76	0.05	0.20	QP
4	0.18938	38.72	-15.34	54.06	38.47	0.05	0.20	AVERAGE
5	0.25211	33.77	-17.92	51.69	33.52	0.05	0.20	AVERAGE
6	0.25211	44.99	-16.70	61.69	44.74	0.05	0.20	QP
7	0.31830	41.01	-18.74	59.75	40.76	0.05	0.20	QP
8	0.31830	27.74	-22.01	49.75	27.49	0.05	0.20	AVERAGE
9	0.37512	36.81	-21.58	58.39	36.56	0.05	0.20	QP
10	0.37512	17.03	-31.36	48.39	16.78	0.05	0.20	AVERAGE
11	0.51824	16.73	-29.27	46.00	16.47	0.06	0.20	AVERAGE
12	0.51824	33.33	-22.67	56.00	33.07	0.06	0.20	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. Peak Output Power Measurement

### 4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the peak power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Peak

### 4.2.3. Test Procedures

Spectrum Parameter	Setting
RF Output Power Method	<input checked="" type="checkbox"/> ANSI C63.10 clause 6.10.2.1 (a) power meter method
RF Output Power Method	<input type="checkbox"/> ANSI C63.10 clause 6.10.2.1 (b) channel integration method
RF Output Power Method	<input type="checkbox"/> ANSI C63.10 clause 6.10.3.1 Method 1 - spectral trace averaging
RF Output Power Method	<input type="checkbox"/> ANSI C63.10 clause 6.10.3.2 Method 2 - zero-span mode with trace averaging

### 4.2.4. Test Setup Layout



### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of Peak Output Power

Temperature	23°C	Humidity	61%
Test Engineer	Benson Peng	Configurations	GFSK
Test Date	Jul. 23, 2012		

#### Configuration / Ant. 1

Channel	Frequency	Total Conducted Peak Power (dBm)	Max. Limit (dBm)	Result
1	2405 MHz	6.59	30.00	Complies
14	2444 MHz	6.56	30.00	Complies
24	2474 MHz	6.53	30.00	Complies

### 4.3. Average Output Power Measurement

#### 4.3.1. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

#### 4.3.2. Test Procedures

Spectrum Parameter	Setting
RF Output Power Method	<input checked="" type="checkbox"/> ANSI C63.10 clause 6.10.2.1 (a) power meter method
RF Output Power Method	<input type="checkbox"/> ANSI C63.10 clause 6.10.2.1 (b) channel integration method
RF Output Power Method	<input type="checkbox"/> ANSI C63.10 clause 6.10.3.1 Method 1 - spectral trace averaging
RF Output Power Method	<input type="checkbox"/> ANSI C63.10 clause 6.10.3.2 Method 2 - zero-span mode with trace averaging

#### 4.3.3. Test Setup Layout

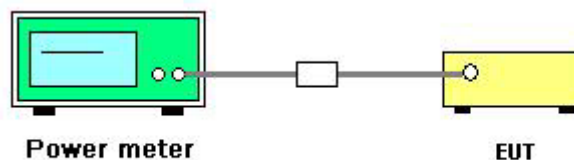

#### 4.3.4. Test Deviation

There is no deviation with the original standard.

#### 4.3.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

Note: Average output power is only for Maximum Permissible Exposure use.

#### 4.3.6. Test Result of Average Output Power

Temperature	23°C	Humidity	61%
Test Engineer	Benson Peng	Configurations	GFSK
Test Date	Jul. 23, 2012		

#### Configuration / Ant. 1

Channel	Frequency	Average Conducted Power (dBm)
1	2405 MHz	6.05
14	2444 MHz	6.03
24	2474 MHz	6.00

## 4.4. Power Spectral Density Measurement

### 4.4.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the analyzer span to 5-30% greater than the EBW.
RB	100 kHz
VB	300 kHz
Detector	RMS
Trace	Single Sweep
Sweep Time	$\geq 10 \times (\text{number of measurement points in sweep}) \times (\text{transmission symbol period})$ .

### 4.4.3. Test Procedures

1. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
2. Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$  (use of a greater number of measurement points than this minimum requirement is recommended).
3. Use the peak marker function to determine the maximum level in any 100 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent level in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where:  $\text{BWCF} = 10\log(3 \text{ kHz}/100 \text{ kHz} = -15.2 \text{ dB})$ .
5. The resulting PSD level must be  $\leq 8 \text{ dBm}$ .

#### 4.4.4. Test Setup Layout

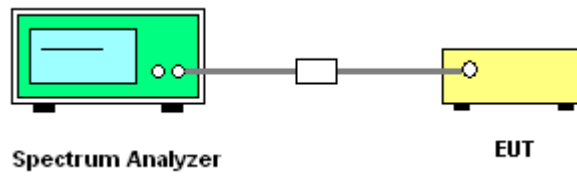

#### 4.4.5. Test Deviation

There is no deviation with the original standard.

#### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


#### 4.4.7. Test Result of Power Spectral Density

Temperature	23°C	Humidity	61%
Test Engineer	Benson Peng	Configurations	GFSK
Test Date	Jul. 23, 2012		

#### Configuration / Ant. 1

Channel	Frequency	Power Density (dBm/100kHz)	BWCF factor (100KHz to 3KHz)	Power Density (dBm/3kHz)	Single Port. Limit (dBm/3kHz)	Result
1	2405 MHz	5.32	-15.23	-9.91	8.00	Complies
14	2444 MHz	5.29	-15.23	-9.94	8.00	Complies
24	2474 MHz	5.17	-15.23	-10.06	8.00	Complies

#### Power Density Plot on Configuration / Ant. 1 / 2405 MHz

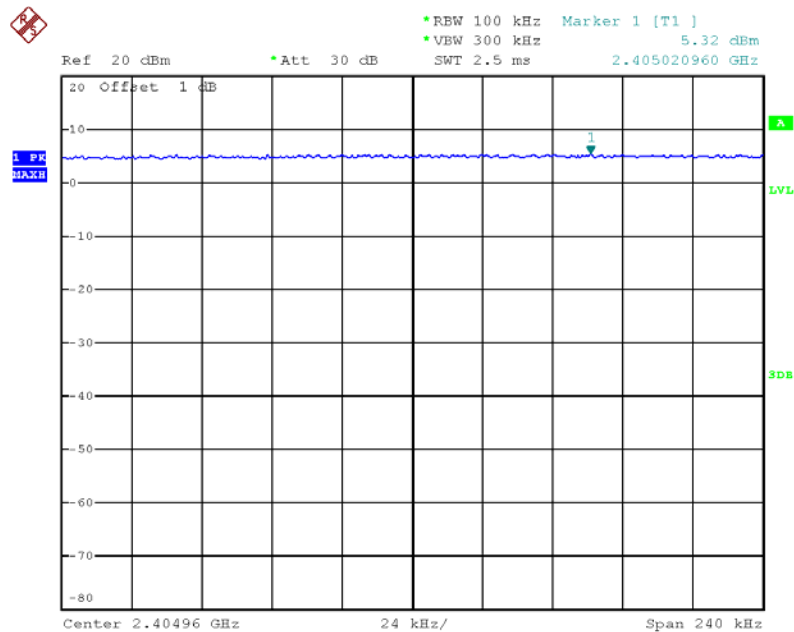

Date: 23.JUL.2012 14:46:42



## 4.5. 6dB Spectrum Bandwidth Measurement

### 4.5.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

### 4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	1-5 % of the emission bandwidth (EBW)
VB	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB 558074 Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 5.1.1 EBW Measurement Procedure
3. Multiple antenna systems was performed in accordance with KDB 662911 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

### 4.5.4. Test Setup Layout

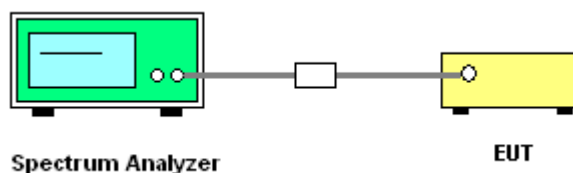

### 4.5.5. Test Deviation

There is no deviation with the original standard.

### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


4.5.7. Test Result of 6dB Spectrum Bandwidth

Temperature	23°C	Humidity	61%
Test Engineer	Benson Peng	Configurations	GFSK

Configuration / Ant. 1

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2405 MHz	0.84	2.77	500	Complies
14	2444 MHz	0.83	2.08	500	Complies
24	2474 MHz	0.83	2.09	500	Complies

6 dB Bandwidth Plot on Configuration / Ant. 1 / 2444 MHz

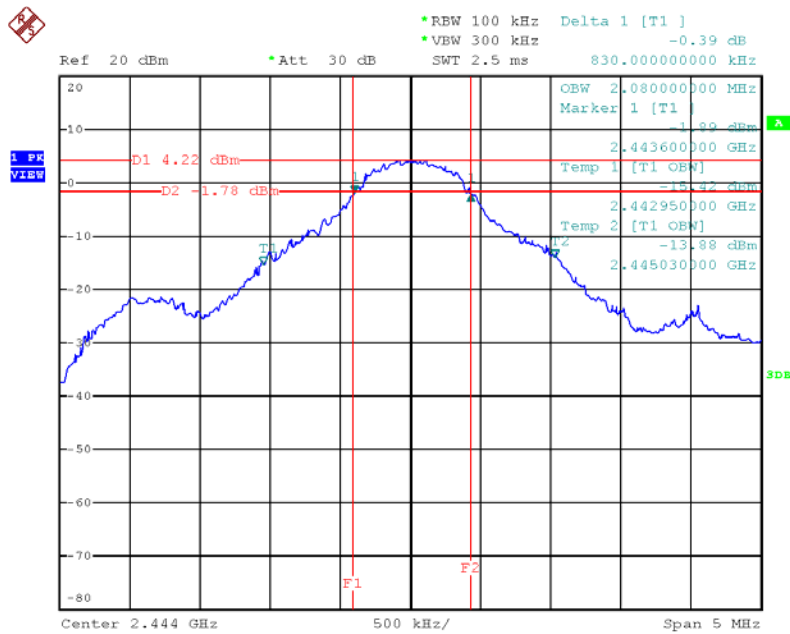

Date: 23.JUL.2012 14:40:53

## 4.6. Radiated Emissions Measurement

### 4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

#### 4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.6.4. Test Setup Layout

For radiated emissions below 1GHz

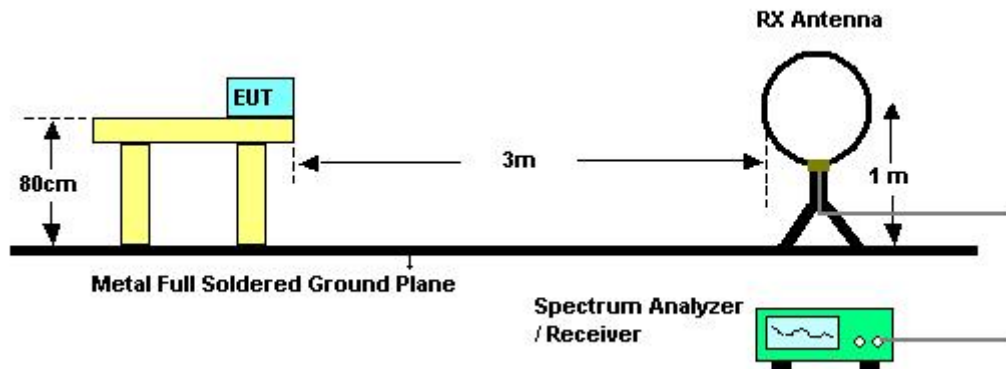

For radiated emissions above 1GHz

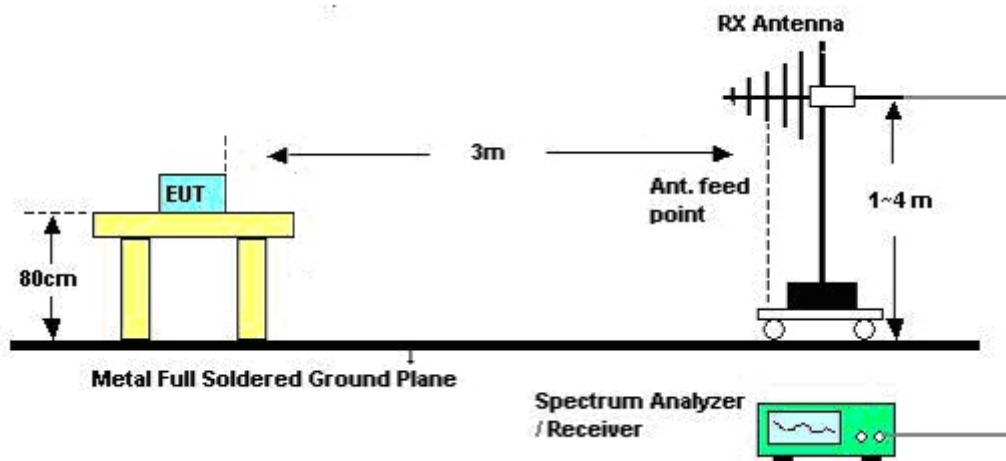

#### 4.6.5. Test Deviation

There is no deviation with the original standard.

#### 4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	21°C	Humidity	56.4%
Test Engineer	Denis Su	Configurations	GFSK
Test Date	Jul. 21, 2012		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	21°C	Humidity	56.4%
Test Engineer	Denis Su	Configurations	GFSK
Test Mode	Mode 1		

Horizontal

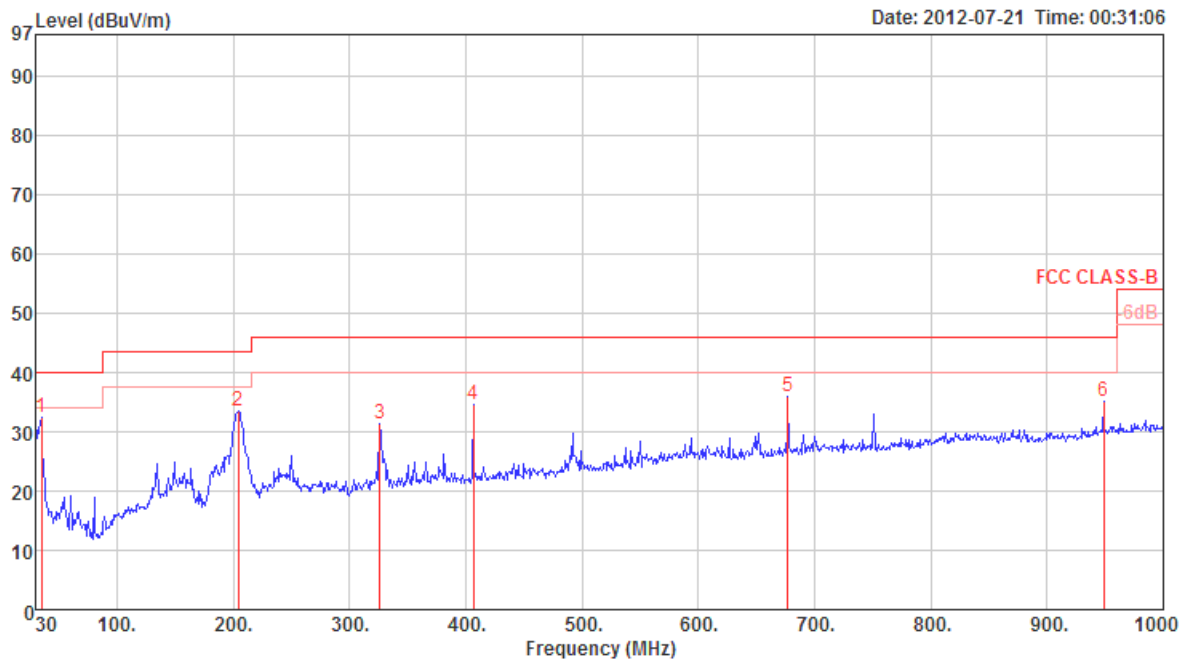

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	Pol/Phase	T/Pos	A/Pos	Aux
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor			deg	cm	dB
1 p	34.85	32.41	40.00	-7.59	42.59	0.92	28.00	16.90	Peak	HORIZONTAL	0	400	0.00
2	204.60	33.52	43.50	-9.98	48.11	2.13	27.21	10.49	Peak	HORIZONTAL	0	400	0.00
3	325.85	31.39	46.00	-14.61	41.09	2.66	26.94	14.58	Peak	HORIZONTAL	0	400	0.00
4	406.36	34.55	46.00	-11.45	42.49	3.02	27.53	16.57	Peak	HORIZONTAL	0	400	0.00
5	676.99	35.88	46.00	-10.12	39.32	4.04	27.30	19.82	Peak	HORIZONTAL	0	400	0.00
6	948.59	35.17	46.00	-10.83	34.95	4.85	26.52	21.89	Peak	HORIZONTAL	0	400	0.00

*Vertical*

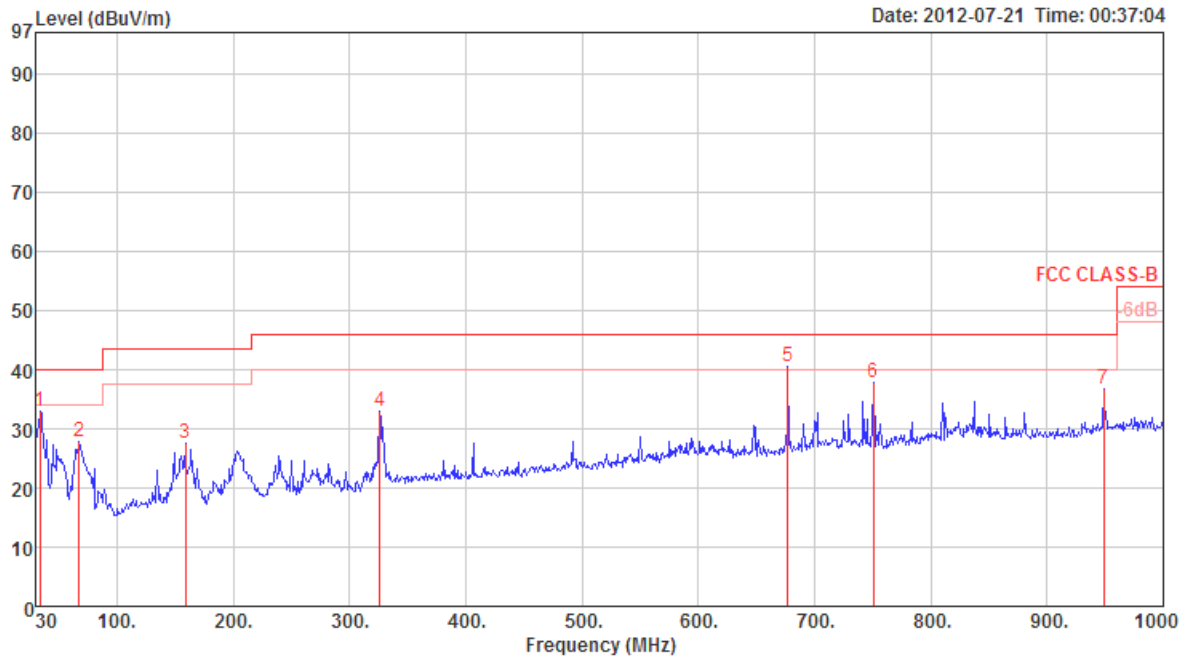

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Pol/Phase	T/Pos	A/Pos	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m			deg	cm	dB
1	33.88	32.94	40.00	-7.06	42.53	0.90	27.99	17.50	Peak	VERTICAL	0	100	0.00
2	67.83	27.78	40.00	-12.22	47.66	1.25	27.95	6.82	Peak	VERTICAL	0	100	0.00
3	159.01	27.43	43.50	-16.07	42.32	1.87	27.42	10.66	Peak	VERTICAL	0	100	0.00
4	325.85	32.88	46.00	-13.12	42.58	2.66	26.94	14.58	Peak	VERTICAL	0	100	0.00
5 p	676.99	40.47	46.00	-5.53	43.91	4.04	27.30	19.82	Peak	VERTICAL	0	100	0.00
6	750.71	37.82	46.00	-8.18	40.52	4.21	27.12	20.21	Peak	VERTICAL	0	100	0.00
7	948.59	36.86	46.00	-9.14	36.64	4.85	26.52	21.89	Peak	VERTICAL	0	100	0.00

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



4.6.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

Temperature	21°C	Humidity	56.4%
Test Engineer	Denis Su	Configurations	CH 1 / Ant. 1
Test Date	Jul. 20, 2012	Test Mode	Mode 2

*Horizontal*

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Pol/Phase	T/Pos	A/Pos	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m			deg	cm	dB
1	4811.54	41.07	74.00	-32.93	39.05	4.20	34.70	32.52	Peak	HORIZONTAL	97	100	0.00
2	4812.00	30.09	54.00	-23.91	28.07	4.20	34.70	32.52	Average	HORIZONTAL	97	100	0.00
3 a	7215.98	37.53	54.00	-16.47	30.25	5.32	34.91	36.87	Average	HORIZONTAL	218	100	0.00
4 p	7216.08	48.98	74.00	-25.02	41.70	5.32	34.91	36.87	Peak	HORIZONTAL	218	100	0.00

*Vertical*

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Pol/Phase	T/Pos	A/Pos	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m			deg	cm	dB
1	4809.70	44.80	74.00	-29.20	42.78	4.20	34.70	32.52	Peak	VERTICAL	270	100	0.00
2	4812.08	36.36	54.00	-17.64	34.34	4.20	34.70	32.52	Average	VERTICAL	270	119	0.00
3 p	7214.14	50.43	74.00	-23.57	43.15	5.32	34.91	36.87	Peak	VERTICAL	348	100	0.00
4 a	7214.14	39.32	54.00	-14.68	32.04	5.32	34.91	36.87	Average	VERTICAL	348	100	0.00

Temperature	21°C	Humidity	56.4%
Test Engineer	Denis Su	Configurations	CH 14 / Ant. 1
Test Date	Jul. 20, 2012	Test Mode	Mode 2

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Pol/Phase	T/Pos	A/Pos	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m			deg	cm	dB
1	4885.98	33.67	54.00	-20.33	31.43	4.22	34.67	32.69	Average	HORIZONTAL	92	100	0.00
2	4886.10	43.68	74.00	-30.32	41.44	4.22	34.67	32.69	Peak	HORIZONTAL	92	100	0.00
3 p	7331.46	50.33	74.00	-23.67	42.93	5.35	34.94	36.99	Peak	HORIZONTAL	168	100	0.00
4 a	7332.98	38.02	54.00	-15.98	30.60	5.35	34.94	37.01	Average	HORIZONTAL	168	100	0.00

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Pol/Phase	T/Pos	A/Pos	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m			deg	cm	dB
1 p	4887.46	45.66	74.00	-28.34	43.42	4.22	34.67	32.69	Peak	VERTICAL	270	112	0.00
2	4887.98	36.27	54.00	-17.73	34.03	4.22	34.67	32.69	Average	VERTICAL	270	112	0.00
3 a	7332.32	49.74	54.00	-4.26	42.34	5.35	34.94	36.99	Average	VERTICAL	267	100	0.00
4	7333.00	38.31	54.00	-15.69	30.89	5.35	34.94	37.01	Average	VERTICAL	267	100	0.00

Temperature	21°C	Humidity	56.4%
Test Engineer	Denis Su	Configurations	CH 24 / Ant. 1
Test Date	Jul. 20, 2012	Test Mode	Mode 2

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Pol/Phase	T/Pos	A/Pos	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m			deg	cm	dB
1	4946.10	34.45	54.00	-19.55	32.06	4.23	34.64	32.80	Average	HORIZONTAL	159	100	0.00
2	4946.24	43.52	74.00	-30.48	41.13	4.23	34.64	32.80	Peak	HORIZONTAL	159	100	0.00
3 p	7421.94	48.12	74.00	-25.88	40.60	5.37	34.97	37.12	Peak	HORIZONTAL	154	100	0.00
4 a	7422.98	35.44	54.00	-18.56	27.92	5.37	34.97	37.12	Average	HORIZONTAL	154	100	0.00

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Pol/Phase	T/Pos	A/Pos	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m			deg	cm	dB
1	4947.48	44.27	74.00	-29.73	41.88	4.23	34.64	32.80	Peak	VERTICAL	270	100	0.00
2	4948.08	33.45	54.00	-20.55	31.06	4.23	34.64	32.80	Average	VERTICAL	270	100	0.00
3 p	7420.70	47.66	74.00	-26.34	40.14	5.37	34.97	37.12	Peak	VERTICAL	257	100	0.00
4 a	7421.10	36.50	54.00	-17.50	28.98	5.37	34.97	37.12	Average	VERTICAL	257	100	0.00

### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.7. Band Edge Emissions Measurement

### 4.7.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 KHz / 300 KHz for Peak

### 4.7.3. Test Procedures

- The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.

### 4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

### 4.7.5. Test Deviation

There is no deviation with the original standard.

### 4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	21°C	Humidity	56.4%
Test Engineer	Denis Su	Configurations	CH 1, 14, 24 / Ant. 1
Test Date	Jul. 20, 2012	Test Mode	Mode 2

##### Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Pol/Phase	T/Pos	A/Pos	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m			deg	cm	dB
1	2372.80	56.76	74.00	-17.24	25.97	2.90	0.00	27.89	Peak	VERTICAL	265	100	0.00
2	2373.00	46.85	54.00	-7.15	16.06	2.90	0.00	27.89	Average	VERTICAL	265	100	0.00
3 p	2404.80	103.39			72.63	2.92	0.00	27.84	Peak	VERTICAL	265	100	0.00
4 a	2405.00	101.63			70.87	2.92	0.00	27.84	Average	VERTICAL	265	100	0.00

Item 3, 4 are the fundamental frequency at 2405 MHz.

##### Channel 14

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Pol/Phase	T/Pos	A/Pos	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m			deg	cm	dB
1	2385.50	54.66	74.00	-19.34	23.88	2.91	0.00	27.87	Peak	VERTICAL	219	100	0.00
2	2390.00	42.82	54.00	-11.18	12.04	2.91	0.00	27.87	Average	VERTICAL	219	100	0.00
3 p	2444.00	103.46			72.74	2.94	0.00	27.78	Peak	VERTICAL	219	100	0.00
4 a	2444.00	101.78			71.06	2.94	0.00	27.78	Average	VERTICAL	219	100	0.00
5	2483.50	42.94	54.00	-11.06	12.25	2.96	0.00	27.73	Average	VERTICAL	219	100	0.00
6	2484.70	53.99	74.00	-20.01	23.30	2.96	0.00	27.73	Peak	VERTICAL	219	219	0.00

Item 3, 4 are the fundamental frequency at 2444 MHz.

##### Channel 24

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Pol/Phase	T/Pos	A/Pos	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m			deg	cm	dB
1 a	2474.00	102.68			71.99	2.96	0.00	27.73	Average	HORIZONTAL	194	126	0.00
2 p	2474.40	103.52			72.83	2.96	0.00	27.73	Peak	HORIZONTAL	194	126	0.00
3	2483.50	45.07	54.00	-8.93	14.38	2.96	0.00	27.73	Average	HORIZONTAL	194	126	0.00
4	2484.70	56.60	74.00	-17.40	25.91	2.96	0.00	27.73	Peak	HORIZONTAL	194	126	0.00

Item 1, 2 are the fundamental frequency at 2474 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


For Emission not in Restricted Band

Plot on Configuration / Ant. 1 / 2405 MHz

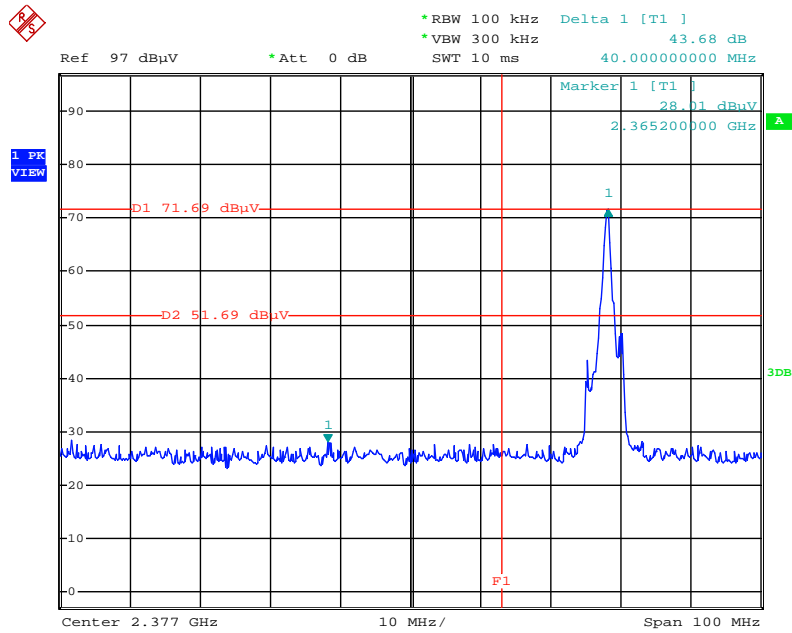

Date: 21.JUL.2012 00:13:01

Plot on Configuration / Ant. 1 / 2474 MHz

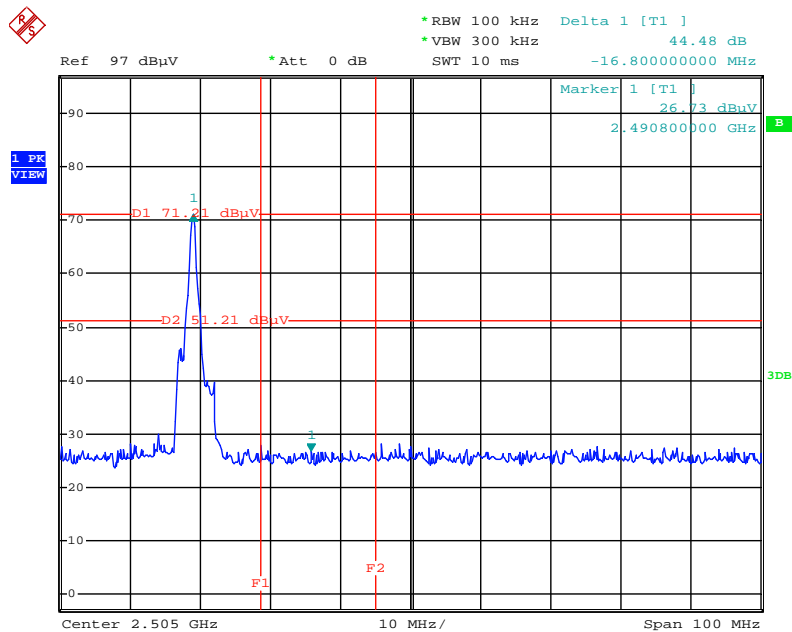

Date: 21.JUL.2012 00:15:58

## 4.8. Antenna Requirements

### 4.8.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.8.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Sep. 14, 2011	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 14, 2011	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127-478	9K ~ 30MHz	Nov. 30, 2011	Conduction (CO01-CB)
PULSE LIMITER	R&S	ESH3-Z2	100430	9K-30MHz	Feb. 03, 2012	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	0.15MHz~30MHz	Dec. 4, 2011	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Jan. 11, 2012	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 25, 2011	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 22, 2011	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 29, 2011	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9KHz~40GHz	Nov. 03, 2011	Radiation (05CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9KHz ~ 2.75GHz	Mar. 20, 2012	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Sep. 09, 2010*	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N/A	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N/A	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz – 26.5 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz – 26.5 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9KHz~40GHz	Sep. 26, 2011	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	May 20, 2012	Conducted (TH01-CB)
Thermo-Hygro Meter	N/A	HC 520	#1	15~70 degree	Nov. 02, 2011	Conducted (TH01-CB)
Signal Generator	R&S	SMR40	100302	10MHz-40GHz	Nov. 22, 2011	Conducted (TH01-CB)
RF Power Divider	HP	11636A	00306	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
RF Power Splitter	Anaren	44100	1839	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
RF Power Splitter	Anaren	42100	17930	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Signal generator	R&S	SMU200A	102782	10MHz-40GHz	Jun. 07, 2012	Conducted (TH01-CB)
Horn Antenna	COM-POWER	AH-118	071187	1GHz – 18GHz	Mar. 18, 2012	Conducted (TH01-CB)
Horn Antenna	COM-POWER	AH-118	071042	1GHz – 18GHz	Nov. 01, 2011	Radiation (05CH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-12	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-13	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Nov. 01, 2011	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Nov. 01, 2011	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

Note: "\*" Calibration Interval of instruments listed above is two years.

## 6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

## 7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-110702

財團法人全國認證基金會  
Taiwan Accreditation Foundation

### Certificate of Accreditation

This is to certify that

**Sporton International Inc.**  
**EMC & Wireless Communications Laboratory**  
No.52, Hwa Ya 1st Road, Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

**is accredited in respect of laboratory**

<b>Accreditation Criteria</b>	: ISO/IEC 17025:2005
<b>Accreditation Number</b>	: 1190
<b>Originally Accredited</b>	: December 15, 2003
<b>Effective Period</b>	: January 10, 2010 to January 09, 2013
<b>Accredited Scope</b>	: Testing Field, see described in the Appendix
<b>Specific Accreditation Program</b>	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities

  
Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date : July 02, 2011

P1, total 22 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix