



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	LOGITECH FAR EAST LTD.
Applicant Address	#2 Creation Rd. 4, Science-Based Ind. Park Hsinchu Taiwan, R.O.C.
FCC ID	JNZOR0004
Manufacturer's company	LOGITECH FAR EAST LTD.
Manufacturer Address	#2 Creation Rd. 4, Science-Based Ind. Park Hsinchu Taiwan, R.O.C.

Product Name	RF Transceiver
Brand Name	Logitech
Model Name	O-R0004
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Jul. 13, 2012
Final Test Date	Dec. 17, 2012
Submission Type	Original Equipment

Statement

Test result included is only for the Bluetooth part of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Testing Laboratory
1190

Table of Contents

1. CERTIFICATE OF COMPLIANCE.....	1
2. SUMMARY OF THE TEST RESULT.....	2
3. GENERAL INFORMATION.....	3
3.1. Product Details	3
3.2. Accessories	3
3.3. Table for Filed Antenna	4
3.4. Table for Carrier Frequencies.....	4
3.5. Table for Test Modes.....	5
3.6. Table for Testing Locations.....	6
3.7. Table for Supporting Units	6
3.8. Table for Parameters of Test Software Setting.....	6
3.9. Test Configurations	7
4. TEST RESULT.....	10
4.1. AC Power Line Conducted Emissions Measurement.....	10
4.2. Maximum Peak Output Power Measurement	14
4.3. Average Output Power Measurement	16
4.4. Hopping Channel Separation Measurement.....	18
4.5. Number of Hopping Frequency Measurement.....	28
4.6. Dwell Time Measurement	31
4.7. Radiated Emissions Measurement.....	43
4.8. Band Edge Emissions Measurement.....	52
4.9. Antenna Requirements.....	56
5. LIST OF MEASURING EQUIPMENTS	57
6. TEST LOCATION.....	60
APPENDIX A. PHOTOGRAPHS OF EUT.....	A1 ~ A17
APPENDIX B. TEST PHOTOS	B1 ~ B5

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR271312AC	Rev. 01	Initial issue of report	Jan. 04, 2013
FR271312AC	Rev. 02	Modified the product name to "RF Transceiver" from "Harmony Hub".	Feb. 26, 2013



1. CERTIFICATE OF COMPLIANCE

Product Name : RF Transceiver
Brand Name : Logitech
Model Name : O-R0004
Applicant : LOGITECH FAR EAST LTD.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jul. 13, 2012 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads 'Sam Chen' is written over a horizontal line.

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	11.60 dB
4.2	15.247(b)(1)	Peak Output Power	Complies	13.49 dB
4.3	-	Average Output Power	-	-
4.4	15.247(a)(1)	Hopping Channel Separation	Complies	-
4.5	15.247(b)(1)	Number of Hopping Frequency	Complies	-
4.6	15.247(a)(1)	Dwell Time	Complies	-
4.7	15.247(d)	Radiated Emissions	Complies	17.34 dB
4.8	15.247(d)	Band Edge Emissions	Complies	1.72 dB
4.9	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Peak Output Power	±0.8dB	Confidence levels of 95%
Hopping Channel Separation	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Power Type	Power Adapter
Modulation	FHSS (GFSK / $\pi/4$ -DQPSK / 8DPSK)
Data Rate (Mbps)	GFSK: 1 ; $\pi/4$ -QPSK: 2 ; 8DPSK: 3
Frequency Range	2400 ~ 2483.5MHz
Channel Number	79
Channel Band Width (99%)	For Bluetooth 2.1 + EDR : 1.1880 MHz For Bluetooth 1.0 : 0.8880 MHz
Conducted Output Power	For Bluetooth 2.1 + EDR : 5.98 dBm For Bluetooth 1.0: 7.51 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

3.2. Accessories


Power	Brand Holder	Model	Rating
Adapter 1	Logitech	AD631MC	I/P: 100-240V~50/60Hz 0.13A O/P: 5.15V,1A
Adapter 2	Logitech	KSAS0060510100D5D	I/P: 100-240V~50/60Hz 0.18A O/P: 5.1V,1.0A
Others			
USB Cable: Shielded, 0.65m			
IR Cable*2: Non-shielded, 2.6m			

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Remark
1	--	--	PIFA	N/A	2.5	TX/RX

Note: The EUT has one antennas.

Ant. 1 could transmit/receive simultaneously.

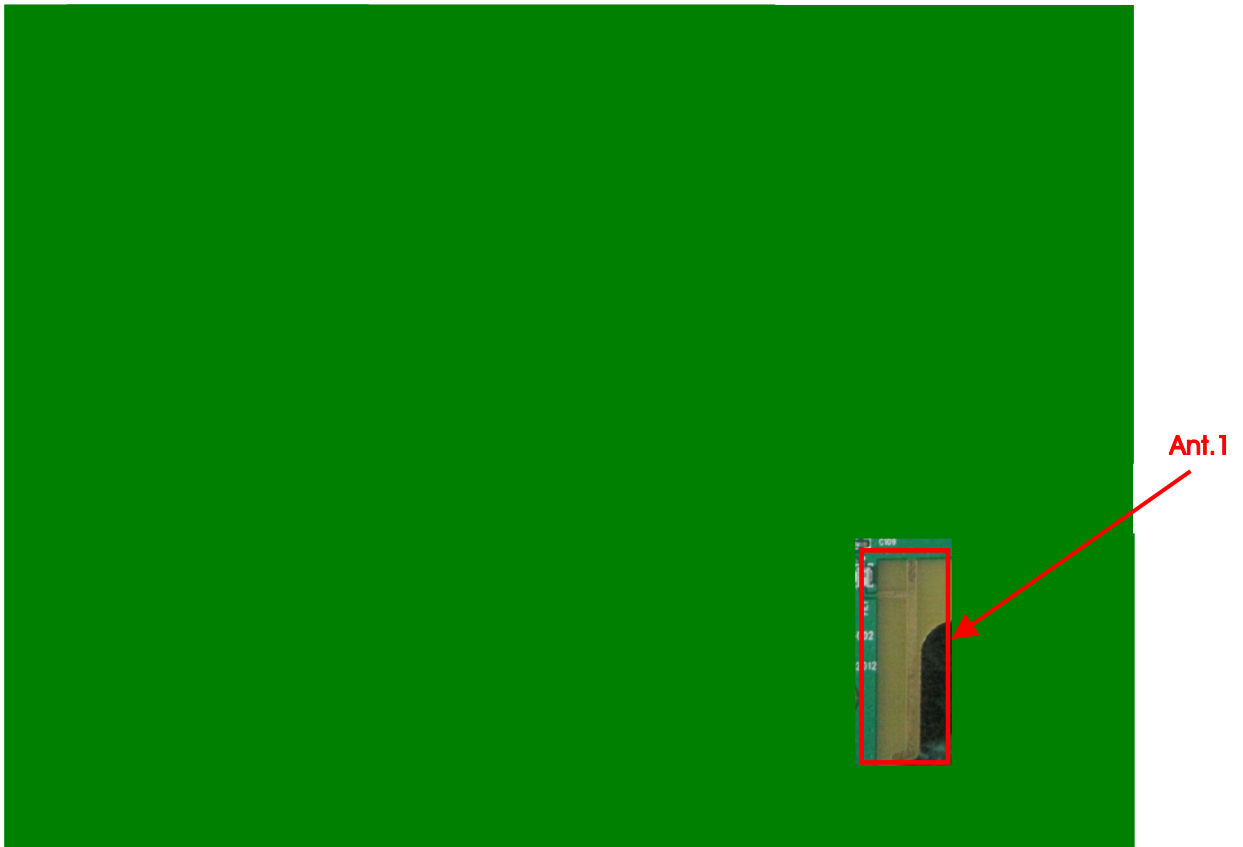

3.4. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	0	2402 MHz	40	2442 MHz
	1	2403 MHz	:	:
	:	:	77	2479 MHz
	38	2440 MHz	78	2480 MHz
	39	2441 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Conducted Emissions	CTX	-	-	-
Peak Output Power	GFSK	1 Mbps	0/39/78	1
	8DPSK	3 Mbps		
Average Output Power	GFSK	1 Mbps	0/39/78	1
	8DPSK	3 Mbps		
Hopping Channel Separation	GFSK	1 Mbps	0~1/39~40/77~78	1
	8DPSK	3 Mbps		
Number of Hopping Frequency	GFSK	1 Mbps	0~78	1
	8DPSK	3 Mbps		
Dwell Time	DH1/DH3/DH5	1 Mbps	0/39/78	1
	3DH1/3DH3/3DH5	3Mbps		
Radiated Emissions Below 1GHz	CTX	-	-	-
Radiated Emissions Above 1GHz	8DPSK	3 Mbps	0/39/78	1
Band Edge Emissions	8DPSK	3 Mbps	0/39/78	1

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1: USB Mode

For Radiated Emission test:

Mode 1: USB Mode

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC);

Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6220	E2KWM3945ABG

3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of Bluetooth


Test Software Version	DOS		
Frequency	2402 MHz	2441 MHz	2480 MHz
3DH5	Default	Default	Default
DH5	Default	Default	Default

During the test, "DOS" under WIN XP was executed the test program to control the EUT continuously transmit RF signal.

3.9. Test Configurations


3.9.1. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

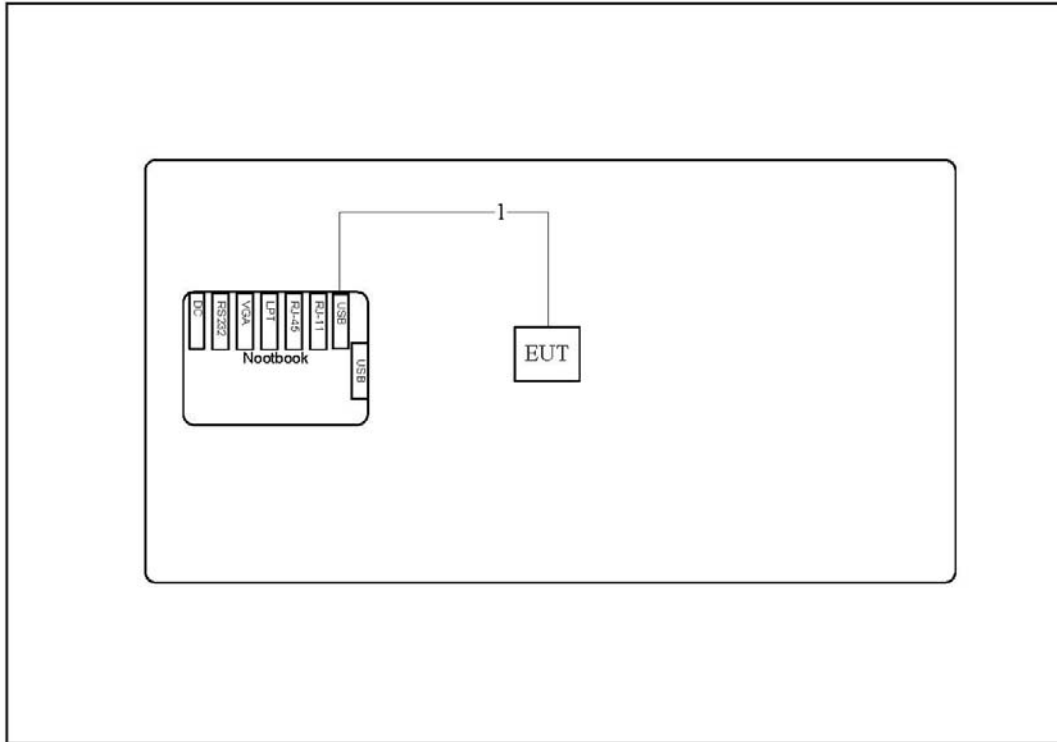


Item	Connection	Shield	Length
1	USB cable	No	0,68m

Test Configuration: Above 1GHz

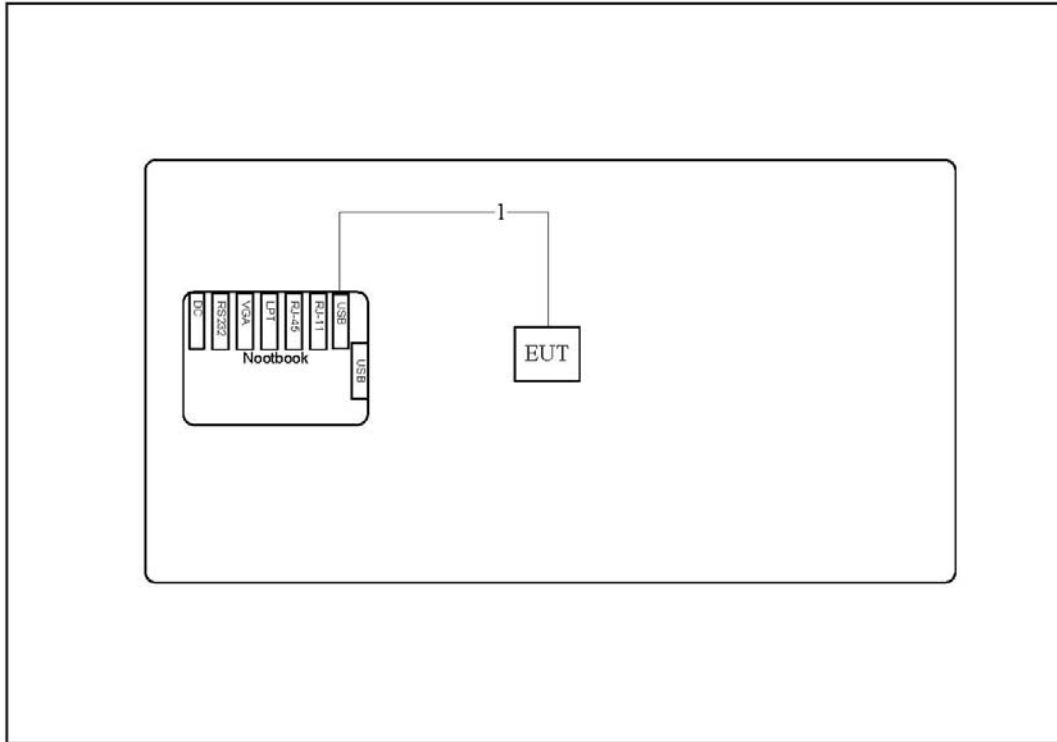

Item	Connection	Shield	Length
1	USB cable	No	0.68m

3.9.2. AC Power Line Conduction Emissions Test Configuration

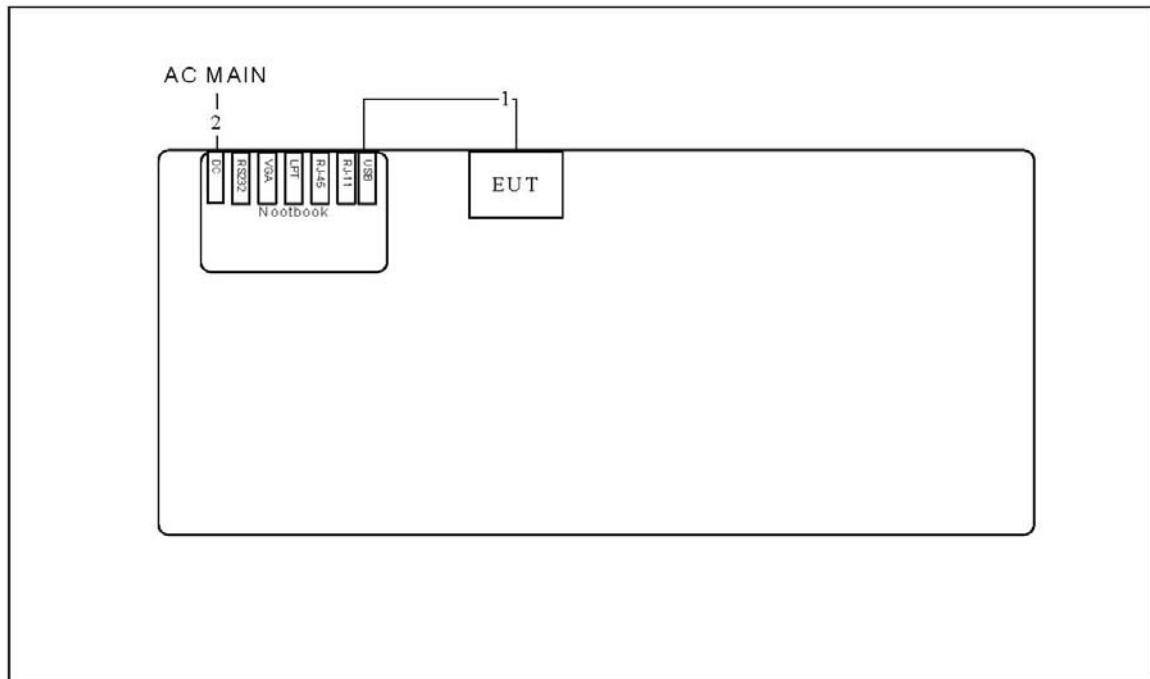

Item	Connection	Shield	Length
1	Power cable	No	1.8m
2	RJ-45 cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For a Low-power Radio-frequency Device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

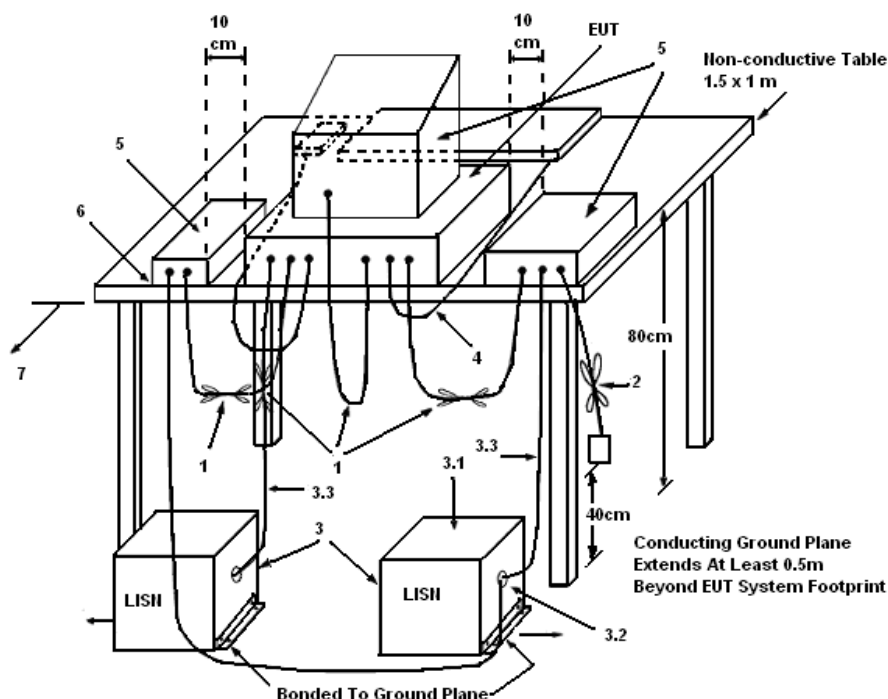

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	20°C	Humidity	63%
Test Engineer	Simon Yang	Phase	Line
Configuration	CTX		

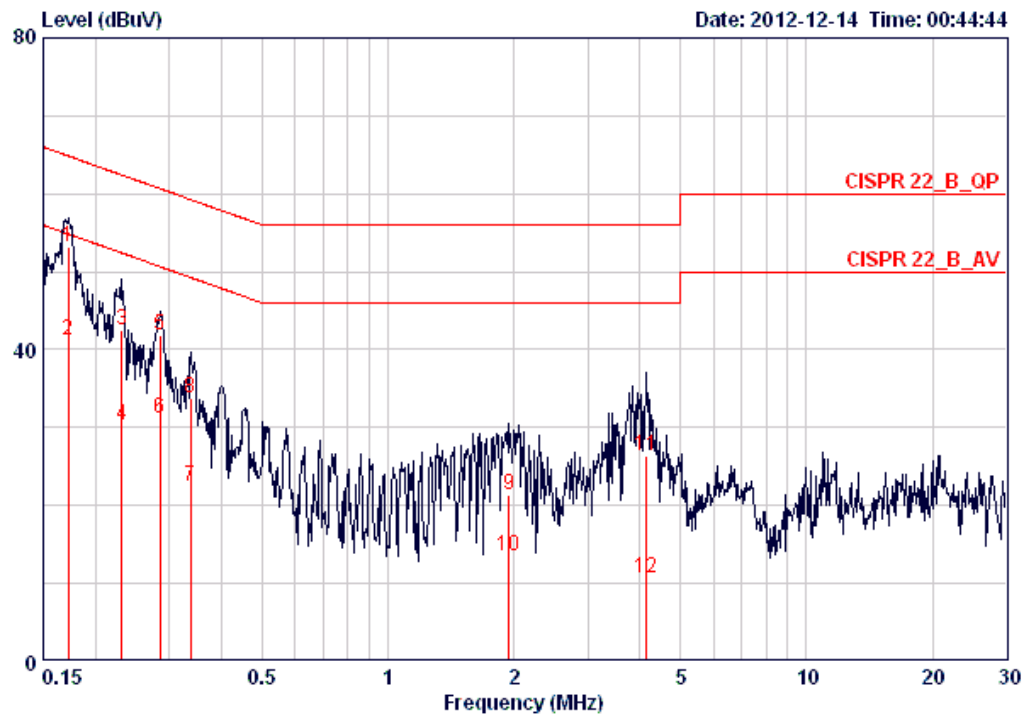

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.17215	53.26	-11.60	64.86	53.26	0.00	0.00	LINE	QP
2	0.17215	41.13	-13.73	54.86	41.13	0.00	0.00	LINE	AVERAGE
3	0.23162	42.52	-19.87	62.39	42.52	0.00	0.00	LINE	QP
4	0.23162	30.25	-22.14	52.39	30.25	0.00	0.00	LINE	AVERAGE
5	0.28478	41.82	-18.86	60.68	41.82	0.00	0.00	LINE	QP
6	0.28478	31.17	-19.51	50.68	31.17	0.00	0.00	LINE	AVERAGE
7	0.33740	22.43	-26.84	49.27	22.43	0.00	0.00	LINE	AVERAGE
8	0.33740	33.78	-25.49	59.27	33.78	0.00	0.00	LINE	QP
9	1.949	21.41	-34.59	56.00	21.41	0.00	0.00	LINE	QP
10	1.949	13.48	-32.52	46.00	13.48	0.00	0.00	LINE	AVERAGE
11	4.136	26.45	-29.55	56.00	26.45	0.00	0.00	LINE	QP
12	4.136	10.60	-35.40	46.00	10.60	0.00	0.00	LINE	AVERAGE

Temperature	20°C	Humidity	63%
Test Engineer	Sky Wu	Phase	Neutral
Configuration	CTX		

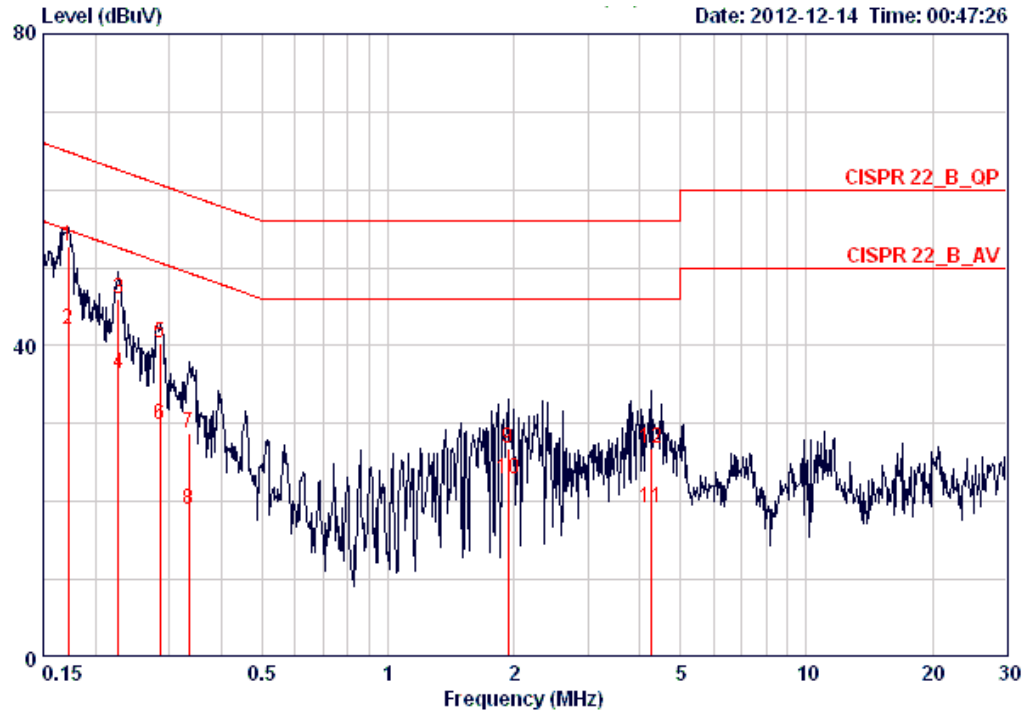

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.17215	52.69	-12.17	64.86	52.69	0.00	0.00	NEUTRAL	QP
2	0.17215	42.04	-12.82	54.86	42.04	0.00	0.00	NEUTRAL	AVERAGE
3	0.22676	45.91	-16.66	62.57	45.91	0.00	0.00	NEUTRAL	QP
4	0.22676	36.36	-16.21	52.57	36.36	0.00	0.00	NEUTRAL	AVERAGE
5	0.28478	40.43	-20.25	60.68	40.43	0.00	0.00	NEUTRAL	QP
6	0.28478	29.89	-20.79	50.68	29.89	0.00	0.00	NEUTRAL	AVERAGE
7	0.33385	28.72	-30.63	59.35	28.72	0.00	0.00	NEUTRAL	QP
8	0.33385	18.98	-30.37	49.35	18.98	0.00	0.00	NEUTRAL	AVERAGE
9	1.939	26.81	-29.19	56.00	26.81	0.00	0.00	NEUTRAL	QP
10	1.939	22.91	-23.09	46.00	22.91	0.00	0.00	NEUTRAL	AVERAGE
11	4.269	19.08	-26.92	46.00	19.08	0.00	0.00	NEUTRAL	AVERAGE
12	4.269	26.86	-29.14	56.00	26.86	0.00	0.00	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss

4.2. Maximum Peak Output Power Measurement

4.2.1. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, the limit for peak output power is 1Watt (30dBm). For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts (21dBm). The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Filter No.	Auto
Measurement time	0.135 s ~ 26 s
Used Peak Sensor	MA2411B

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the peak power value.
3. Repeat above procedures on all channels needed to be tested.

4.2.4. Test Setup Layout

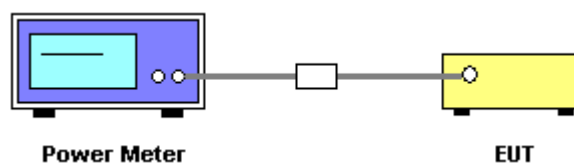

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Peak Output Power

Temperature	25°C	Humidity	63%
Test Engineer	Robert Chang	Configurations	8DPSK / 3DH5
Test Date	Nov. 15, 2012		

For Bluetooth 2.1+EDR

Channel	Frequency	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Result
0	2402 MHz	1.13	0.0013	21.00	Complies
39	2441 MHz	4.38	0.0027	21.00	Complies
78	2480 MHz	5.98	0.0040	21.00	Complies

Temperature	25°C	Humidity	63%
Test Engineer	Robert Chang	Configurations	GFSK / 1DH5
Test Date	Nov. 15, 2012		

For Bluetooth 1.0

Channel	Frequency	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Result
0	2402 MHz	3.06	0.0020	21.00	Complies
39	2441 MHz	6.14	0.0041	21.00	Complies
78	2480 MHz	7.51	0.0056	21.00	Complies

4.3. Average Output Power Measurement

4.3.1. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

4.3.2. Test Procedures

Spectrum Parameter	Setting
RF Output Power Method	<input checked="" type="checkbox"/> ANSI C63.10 clause 6.10.2.1 (a) power meter method
RF Output Power Method	<input type="checkbox"/> ANSI C63.10 clause 6.10.2.1 (b) channel integration method
RF Output Power Method	<input type="checkbox"/> ANSI C63.10 clause 6.10.3.1 Method 1 - spectral trace averaging
RF Output Power Method	<input type="checkbox"/> ANSI C63.10 clause 6.10.3.2 Method 2 - zero-span mode with trace averaging

4.3.3. Test Setup Layout

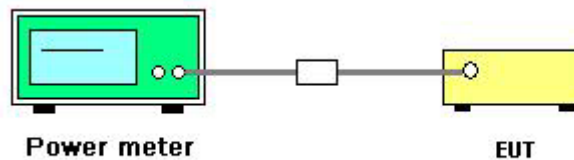

4.3.4. Test Deviation

There is no deviation with the original standard.

4.3.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.6. Test Result of Average Output Power

Temperature	25°C	Humidity	63%
Test Engineer	Robert Chang	Configurations	GFSK / 3DH5
Test Date	Nov. 15, 2012		

For Bluetooth 2.1+EDR

Channel	Frequency	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
0	2402 MHz	-3.70	0.0004	30.00	1.0000	Complies
39	2441 MHz	0.06	0.0010	30.00	1.0000	Complies
78	2480 MHz	1.83	0.0015	30.00	1.0000	Complies

Temperature	25°C	Humidity	63%
Test Engineer	Robert Chang	Configurations	GFSK / 1DH5
Test Date	Nov. 15, 2012		

For Bluetooth 1.0

Channel	Frequency	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
0	2402 MHz	0.80	0.0012	30.00	1.0000	Complies
39	2441 MHz	4.46	0.0028	30.00	1.0000	Complies
78	2480 MHz	5.99	0.0040	30.00	1.0000	Complies

4.4. Hopping Channel Separation Measurement

4.4.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilized for 20 dB bandwidth measurement.
3. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were utilized for channel separation measurement.

4.4.4. Test Setup Layout

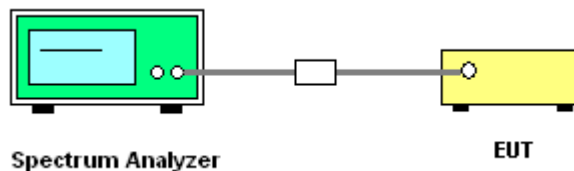

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Hopping Channel Separation

Temperature	25°C	Humidity	63%
Test Engineer	Robert Chang	Configurations	GFSK / 3DH5

For Bluetooth 2.1+EDR

Frequency	20dB Bandwidth (MHz)	99% Occupied BW (MHz)	Channel Separation (MHz)	Two-Thirds of 20dB Bandwidth (MHz)	Result
2402 MHz	1.3040	1.1880	1.00	0.869	Complies
2441 MHz	1.2840	1.1760	1.00	0.856	Complies
2480 MHz	1.2760	1.1680	1.00	0.851	Complies


Temperature	25°C	Humidity	63%
Test Engineer	Robert Chang	Configurations	GFSK / 1DH5

For Bluetooth 1.0

Frequency	20dB Bandwidth (MHz)	99% Occupied BW (MHz)	Channel Separation (MHz)	Two-Thirds of 20dB Bandwidth (MHz)	Result
2402 MHz	0.9560	0.8880	1.00	0.637	Complies
2441 MHz	0.9560	0.8560	1.00	0.637	Complies
2480 MHz	0.9560	0.8560	1.00	0.637	Complies


For Bluetooth 2.1+EDR

20 dB Bandwidth Plot on Channel 0 / 2402 MHz / 3DH5

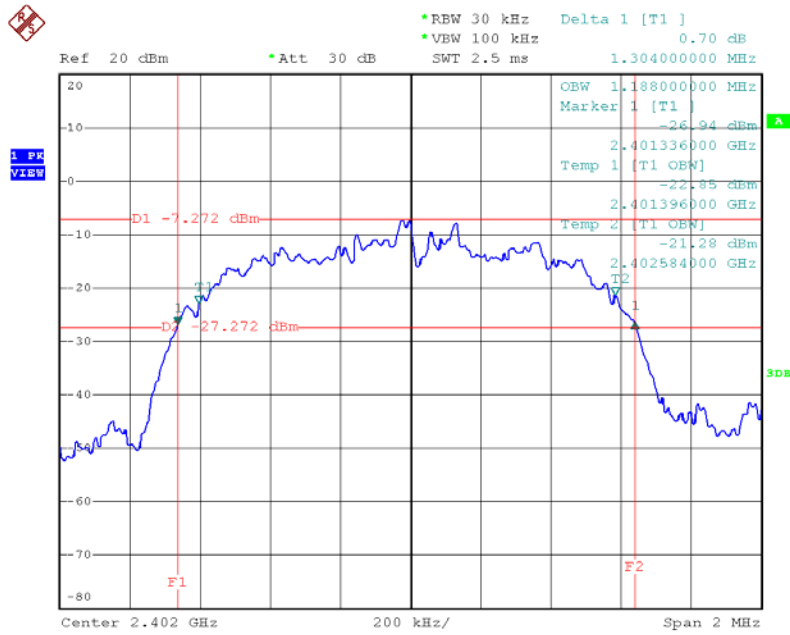


Date: 15.NOV.2012 12:03:26

20 dB Bandwidth Plot on Channel 39 / 2441 MHz / 3DH5

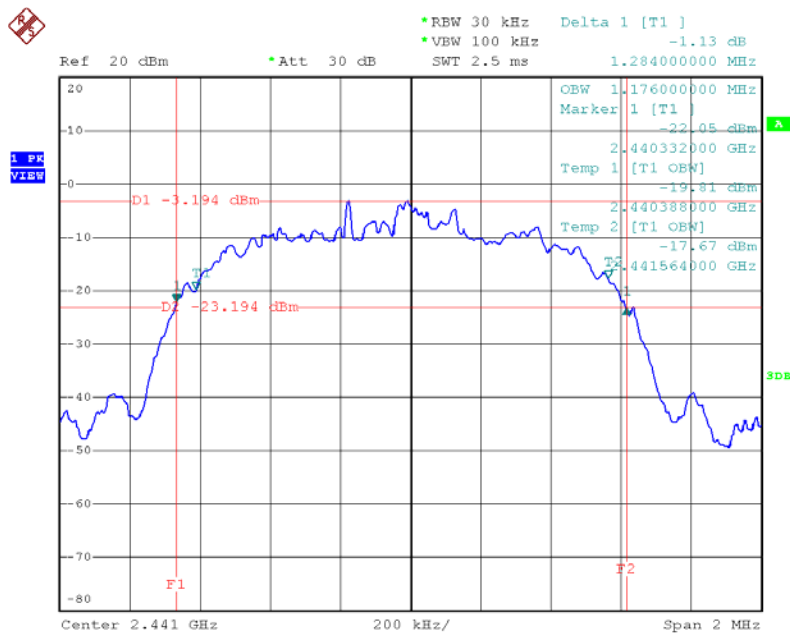

Date: 15.NOV.2012 12:02:36


20 dB Bandwidth Plot on Channel 78 / 2480 MHz / 3DH5

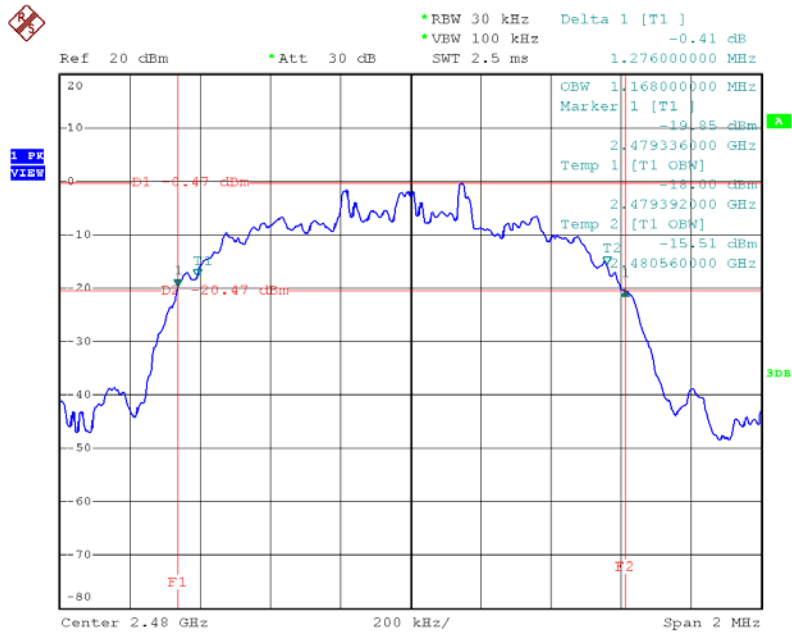

Date: 15.NOV.2012 12:01:29


For Bluetooth 1.0

20 dB Bandwidth Plot on Channel 0 / 2402 MHz / 1DH5

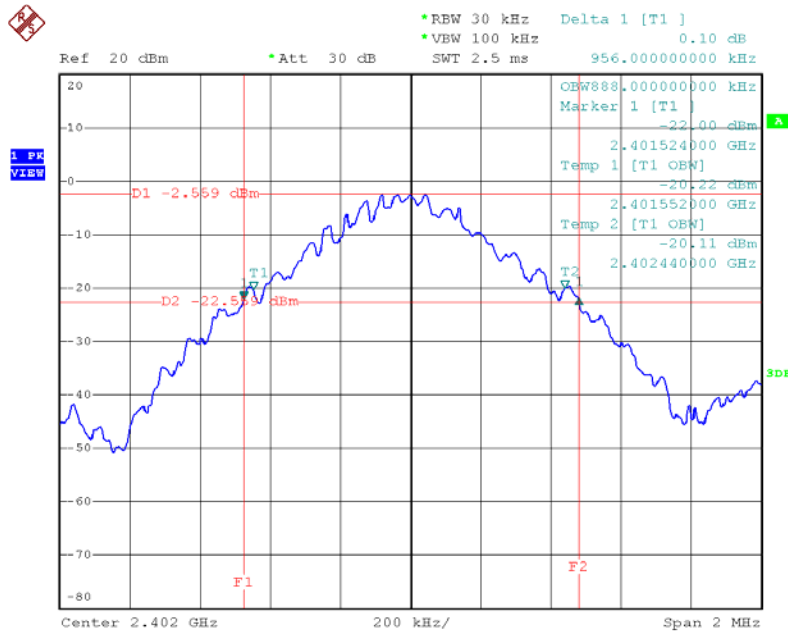


Date: 15.NOV.2012 11:58:49

20 dB Bandwidth Plot on Channel 39 / 2441 MHz / 1DH5

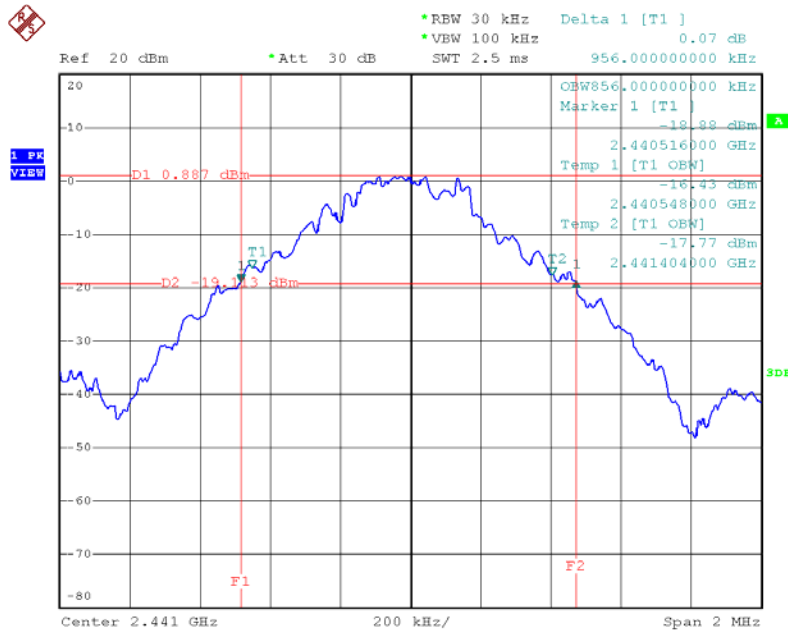

Date: 15.NOV.2012 11:57:31


20 dB Bandwidth Plot on Channel 78 / 2480 MHz / 1DH5

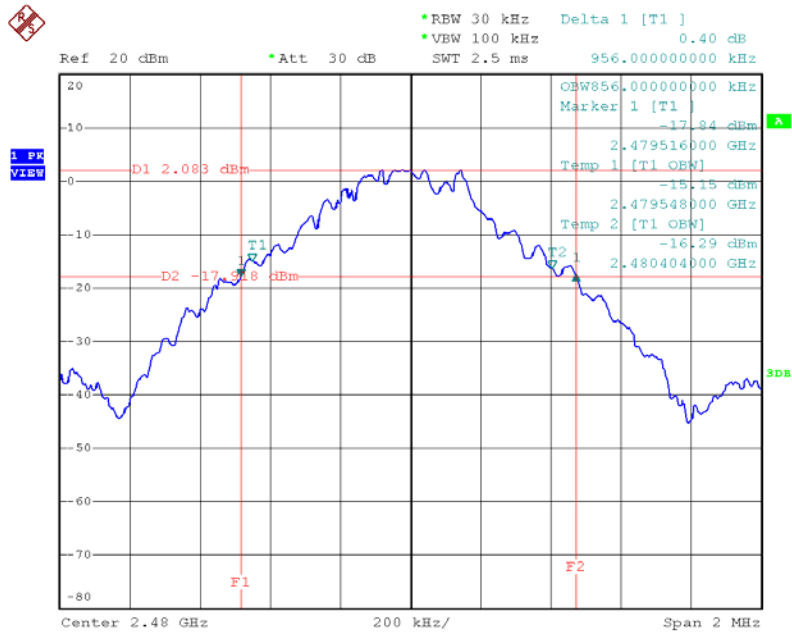

Date: 15.NOV.2012 12:00:17


For Bluetooth 2.1+EDR

Channel Separation Plot on Channel 0~1 / 2402 MHz ~ 2403 MHz / 3DH5

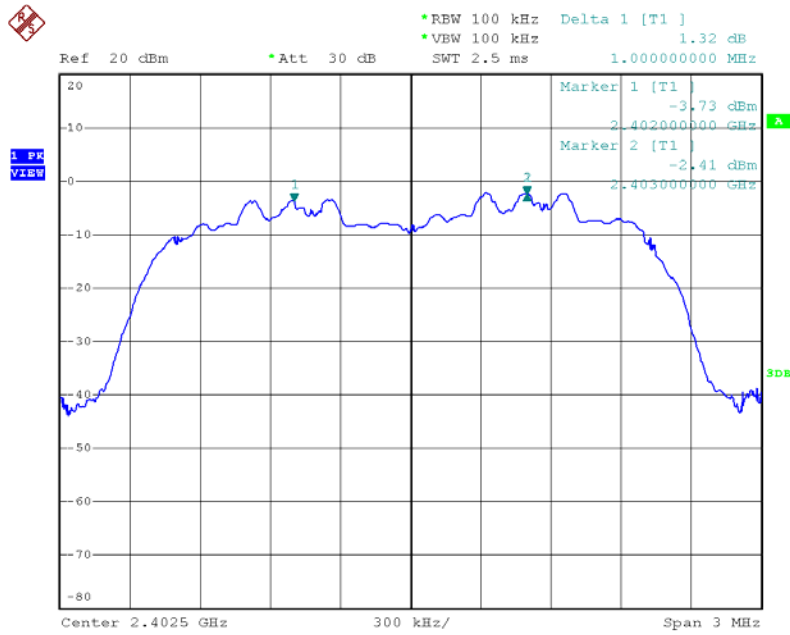


Date: 15.NOV.2012 14:10:26

Channel Separation Plot on Channel 39~40 / 2441 MHz ~ 2442 MHz / 3DH5

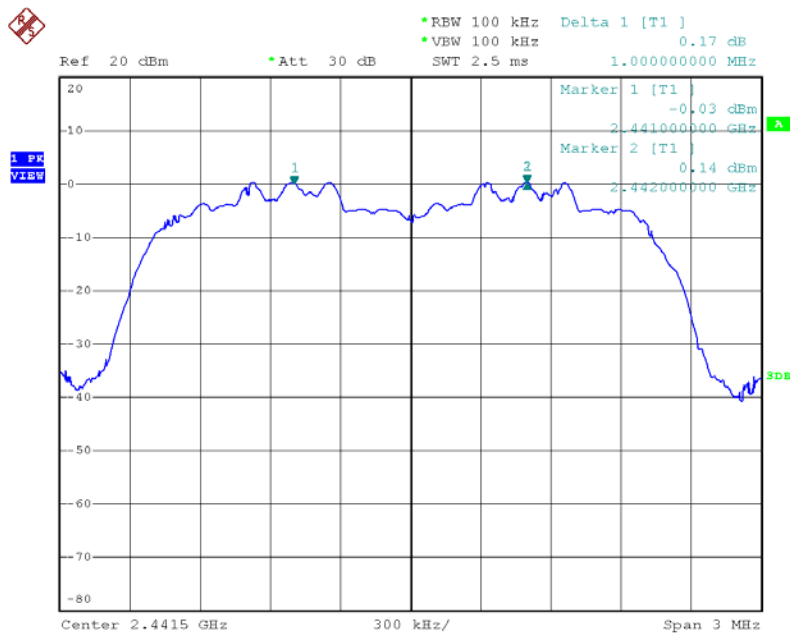

Date: 15.NOV.2012 14:08:19


Channel Separation Plot on Channel 77~78 / 2479 MHz ~ 2480 MHz / 3DH5

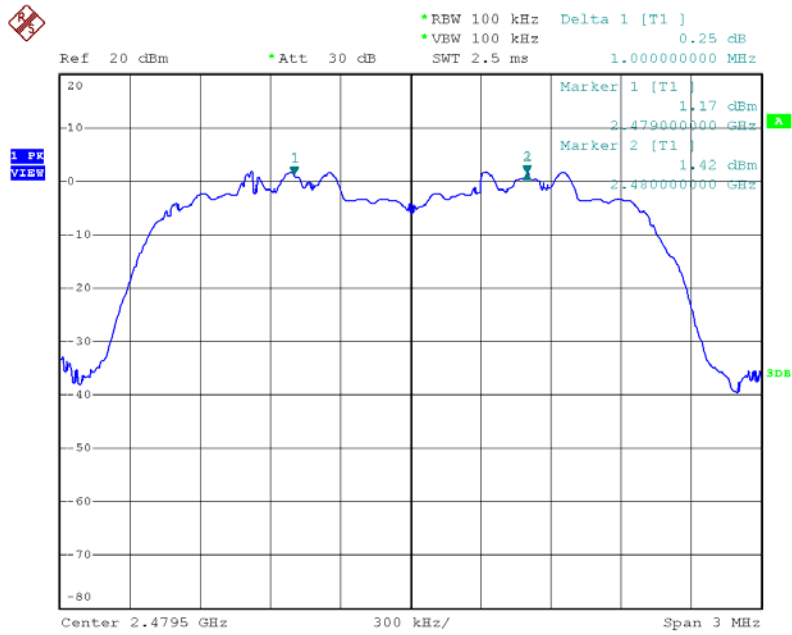

Date: 15.NOV.2012 14:06:27


For Bluetooth 1.0

Channel Separation Plot on Channel 0~1 / 2402 MHz ~ 2403 MHz / 1DH5

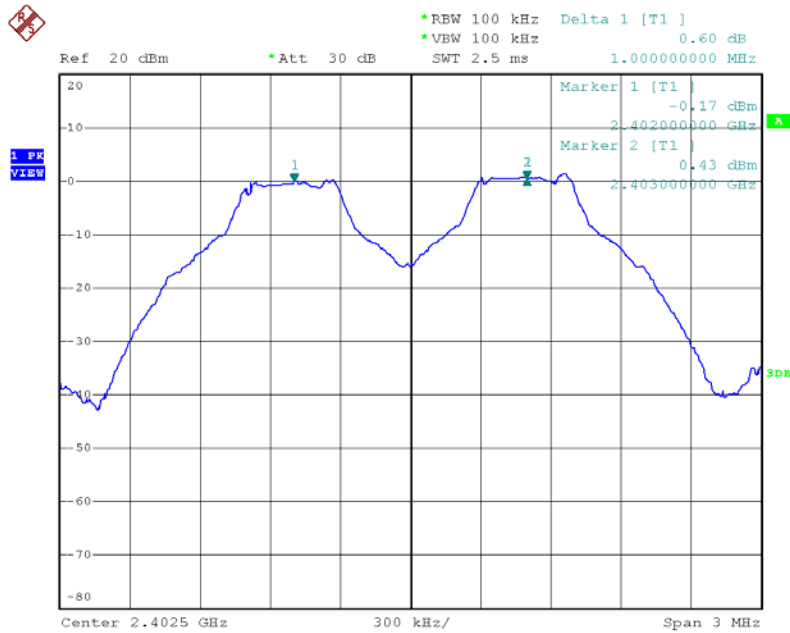


Date: 15.NOV.2012 14:00:22

Channel Separation Plot on Channel 39~40 / 2441 MHz ~ 2442 MHz / 1DH5

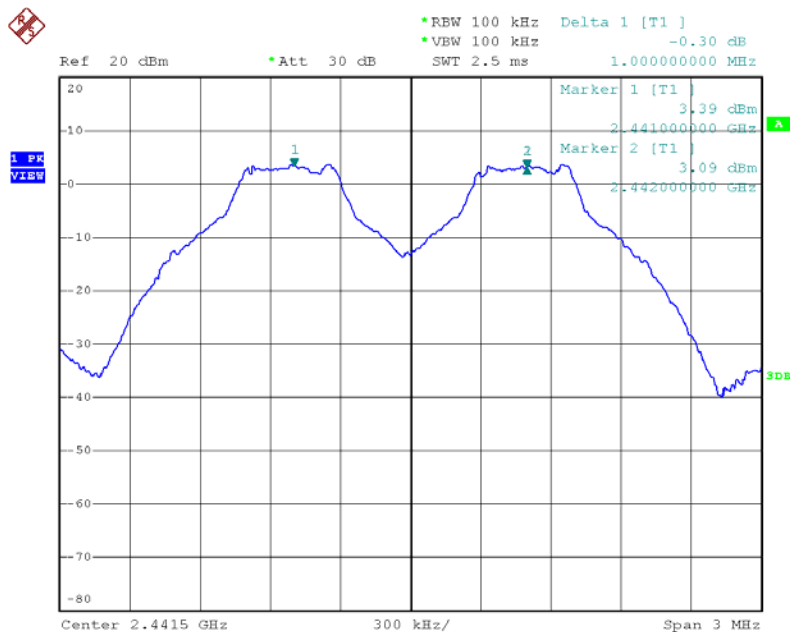

Date: 15.NOV.2012 14:02:27

Channel Separation Plot on Channel 77~78 / 2479 MHz ~ 2480 MHz / 1DH5

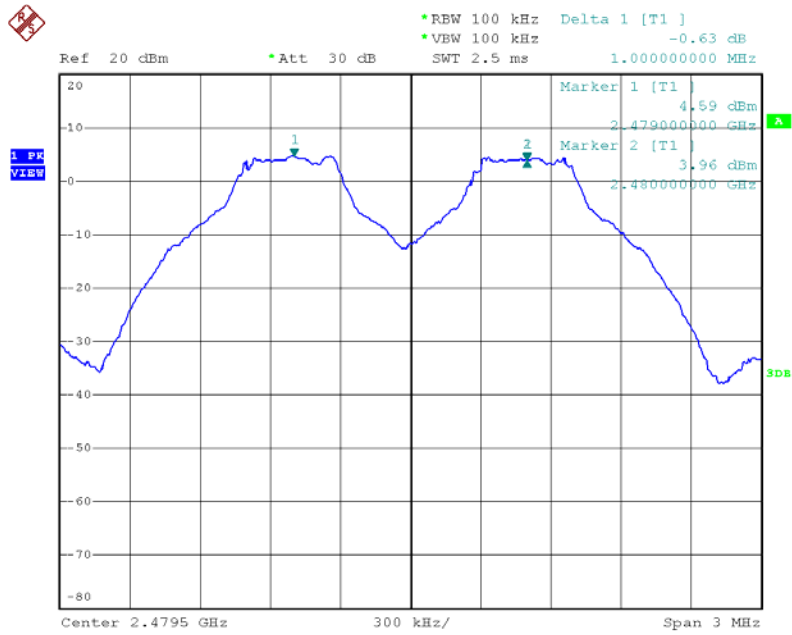

Date: 15.NOV.2012 14:03:59

4.5. Number of Hopping Frequency Measurement

4.5.1. Limit

At least 15 hopping frequencies, and should be equally spaced.

4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were utilized.
3. Observe frequency hopping in 2400MHz~2483.5MHz, there are at least 75 non-overlapping channels.

4.5.4. Test Setup Layout

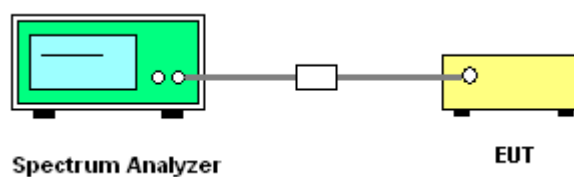

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Number of Hopping Frequency

Temperature	25°C	Humidity	63%
Test Engineer	Robert Chang	Configurations	GFSK / 3DH5

For Bluetooth 2.1 +EDR

Modulation Type	Channel No.	Frequency (MHz)	Hopping Ch. (Channels)	Min. Limit (Channels)	Test Result
8DPSK	0 ~ 78	2402 ~ 2480	79	15	Complies


Temperature	25°C	Humidity	63%
Test Engineer	Robert Chang	Configurations	GFSK / 1DH5

For Bluetooth 1.0

Modulation Type	Channel No.	Frequency (MHz)	Hopping Ch. (Channels)	Min. Limit (Channels)	Test Result
GFSK	0 ~ 78	2402 ~ 2480	79	15	Complies

For Bluetooth 2.1+EDR


Number of Hopping Channel Plot on Channel 0~78 / 2402 MHz ~ 2480 MHz / 3DH5

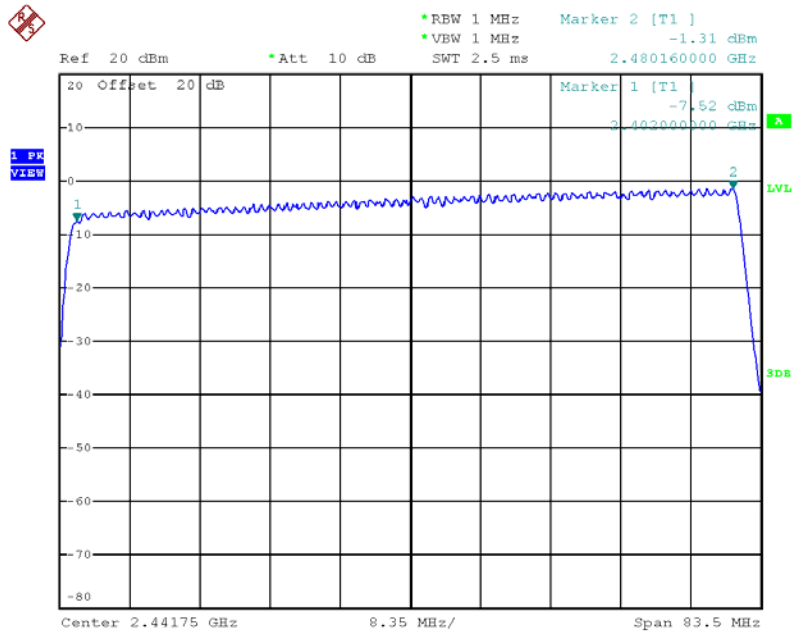

Date: 6.DEC.2012 17:51:20

For Bluetooth 1.0

Number of Hopping Channel Plot on Channel 0~78 / 2402 MHz ~ 2480 MHz / 1DH5

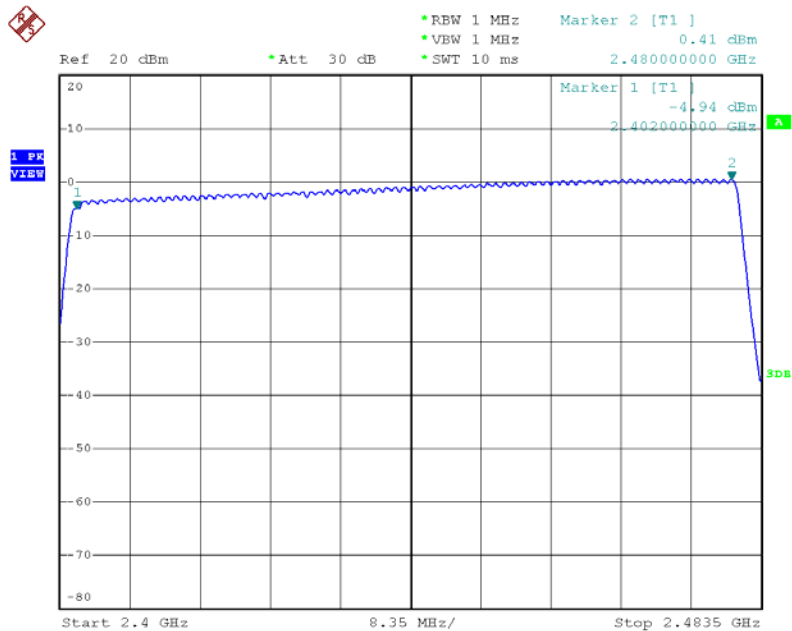

Date: 15.NOV.2012 12:23:57

4.6. Dwell Time Measurement

4.6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.6.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	0 MHz
RB	1000 kHz
VB	1000 kHz
Detector	Peak
Trace	Single Trigger

4.6.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 1000kHz.
3. Use a video trigger with the trigger level set to enable triggering only on full pulses.
4. Sweep Time is more than once pulse time.
5. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
6. Measure the maximum time duration of one single pulse.
7. Set the EUT for 3DH5, 3DH3 and 3DH1 packet transmitting.
8. Measure the maximum time duration of one single pulse.

4.6.4. Test Setup Layout

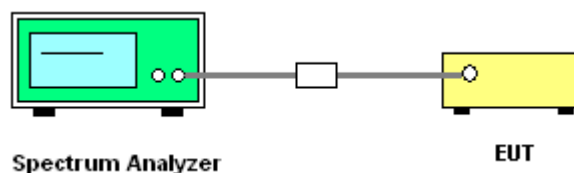

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Dwell Time

Temperature	20°C	Humidity	65%
Test Engineer	Robert Chang	Configurations	Bluetooth / 3DH5 / 3DH3/ 3DH1

For Bluetooth 2.1 +EDR

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
3DH5	2402 MHz	2.9180	0.3113	0.4000	Complies
3DH3	2402 MHz	1.6580	0.2653	0.4000	Complies
3DH1	2402 MHz	0.4080	0.1306	0.4000	Complies
3DH5	2441 MHz	2.9180	0.3113	0.4000	Complies
3DH3	2441 MHz	1.6580	0.2653	0.4000	Complies
3DH1	2441 MHz	0.4080	0.1306	0.4000	Complies
3DH5	2480 MHz	2.8980	0.3091	0.4000	Complies
3DH3	2480 MHz	1.6580	0.2653	0.4000	Complies
3DH1	2480 MHz	0.4080	0.1306	0.4000	Complies

Temperature	20°C	Humidity	65%
Test Engineer	Robert Chang	Configurations	Bluetooth / DH5 / DH3/ DH1

For Bluetooth 1.0

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
DH5	2402 MHz	2.9200	0.3115	0.4000	Complies
DH3	2402 MHz	1.6700	0.2672	0.4000	Complies
DH1	2402 MHz	0.4120	0.1318	0.4000	Complies
DH5	2441 MHz	2.9120	0.3106	0.4000	Complies
DH3	2441 MHz	1.6720	0.2675	0.4000	Complies
DH1	2441 MHz	0.4160	0.1331	0.4000	Complies
DH5	2480 MHz	2.9160	0.3110	0.4000	Complies
DH3	2480 MHz	1.6660	0.2666	0.4000	Complies
DH1	2480 MHz	0.4200	0.1344	0.4000	Complies

Remark:


Dwell Time = 79(channels) x 0.4(s) x average hopping channel x package transfer time (us)

79 channels come from the Hopping Channel number.

Average Hopping Channel = hops / sweep time


For Bluetooth 2.1+EDR

Single Pulse Plot on Channel 0 / 3DH1 / 2402 MHz

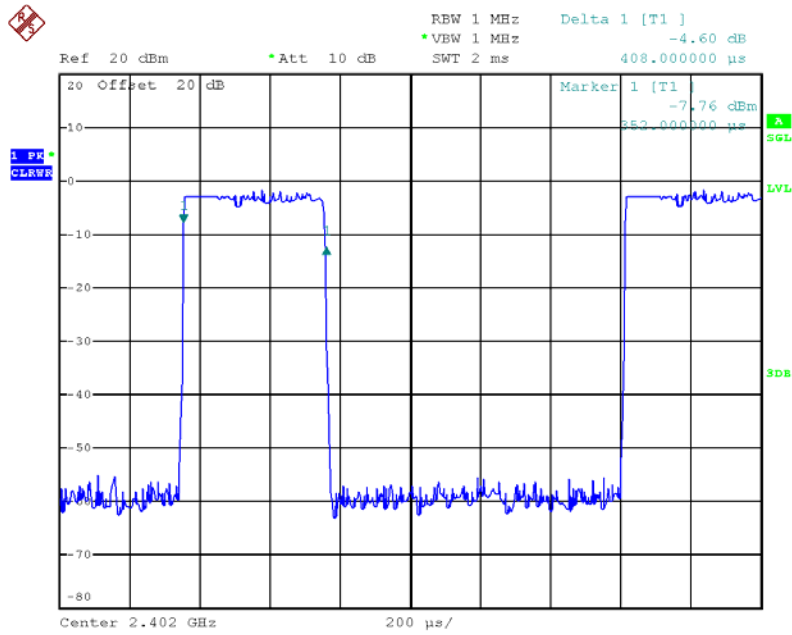


Date: 6.DEC.2012 17:35:50

Single Pulse Plot on Channel 39 / 3DH1 / 2441 MHz

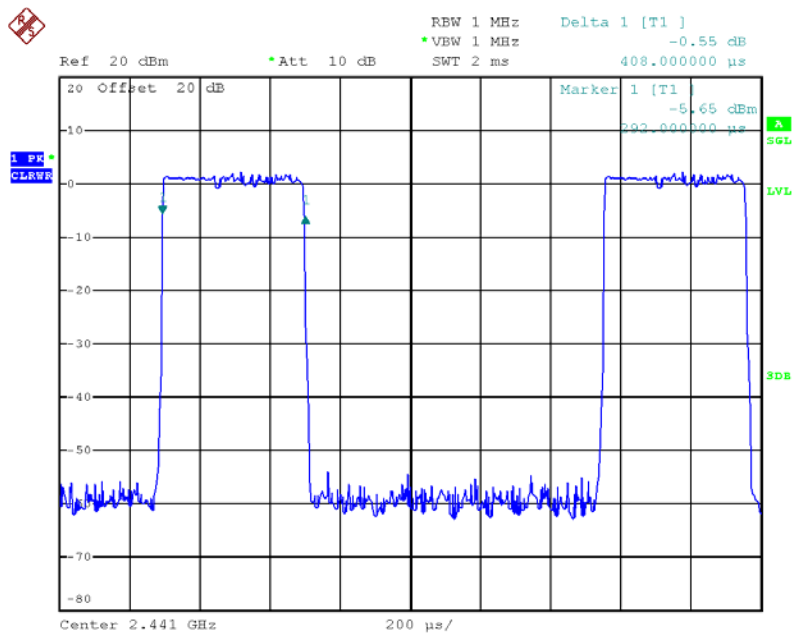


Date: 6.DEC.2012 17:36:43

Single Pulse Plot on Channel 78 / 3DH1 / 2480 MHz

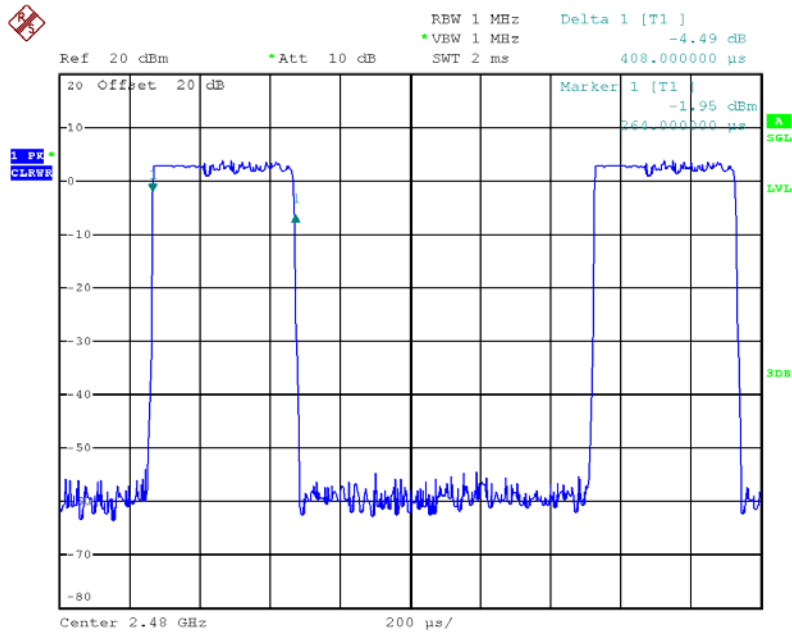


Date: 6.DEC.2012 17:37:29

Single Pulse Plot on Channel 0 / 3DH3 / 2402 MHz

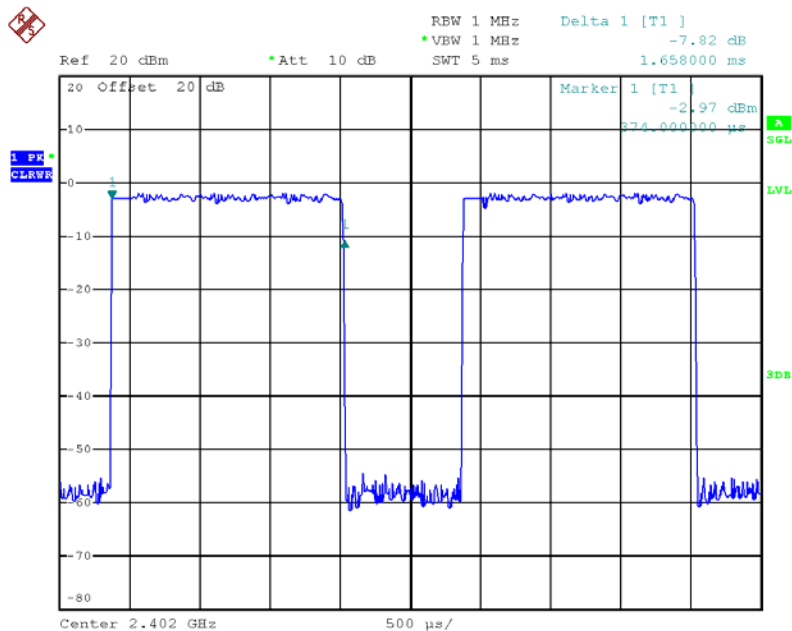


Date: 6.DEC.2012 17:40:26

Single Pulse Plot on Channel 39 / 3DH3 / 2441 MHz

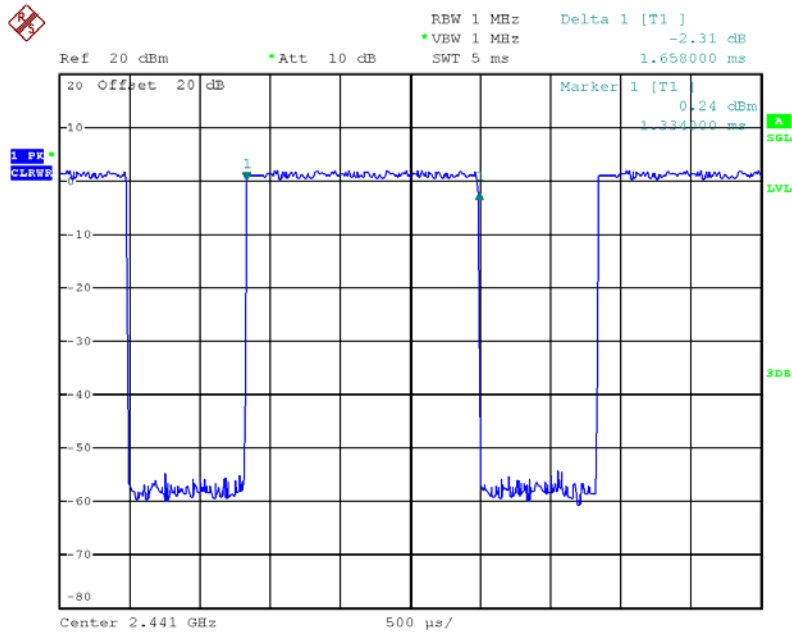


Date: 6.DEC.2012 17:39:28

Single Pulse Plot on Channel 78 / 3DH3 / 2480 MHz

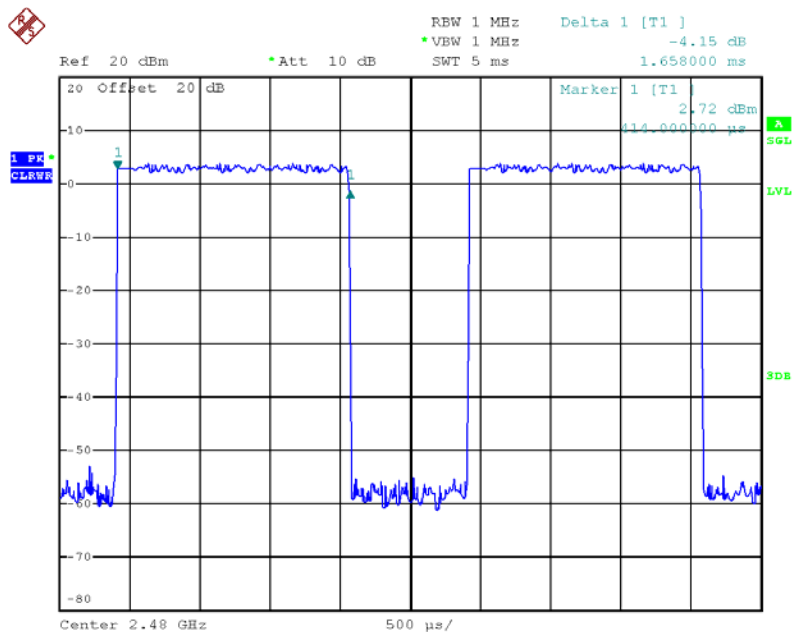


Date: 6.DEC.2012 17:38:29

Single Pulse Plot on Channel 0 / 3DH5 / 2402 MHz

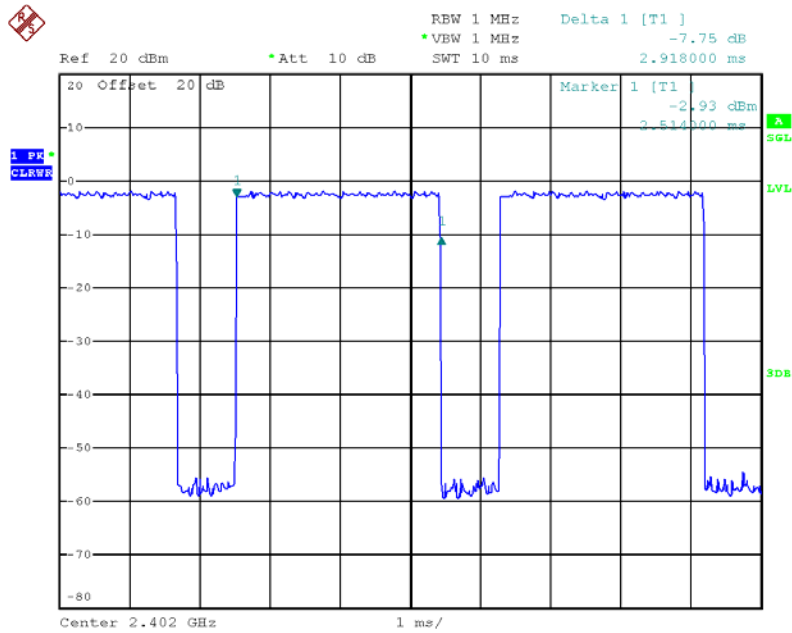


Date: 6.DEC.2012 17:41:15

Single Pulse Plot on Channel 39 / 3DH5 / 2441 MHz

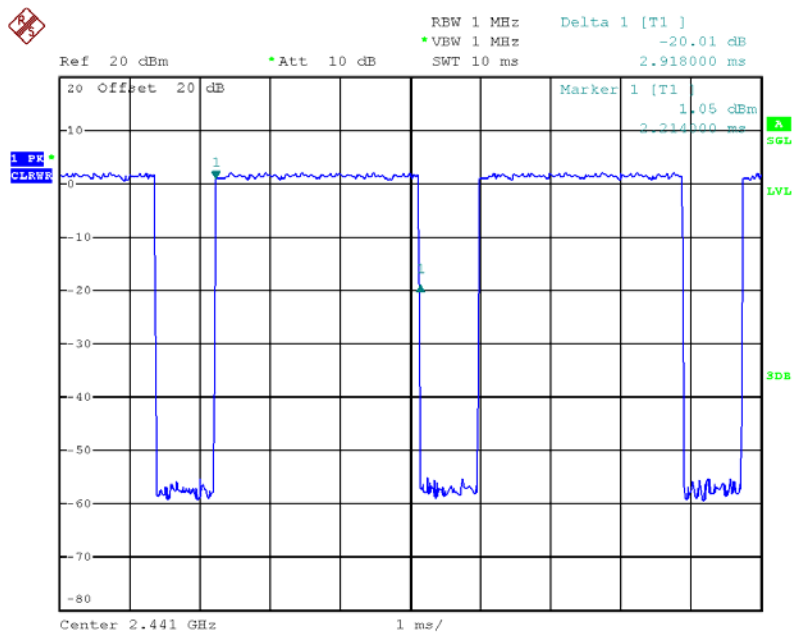

Date: 6.DEC.2012 17:42:07


Single Pulse Plot on Channel 78 / 3DH5 / 2480 MHz

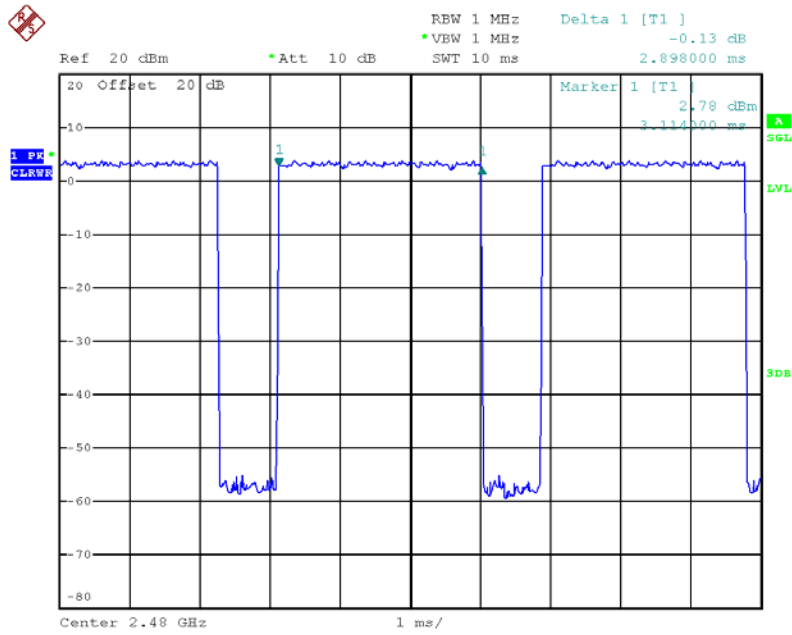

Date: 6.DEC.2012 17:42:57


For Bluetooth 1.0

Single Pulse Plot on Channel 0 / 1DH1 / 2402 MHz

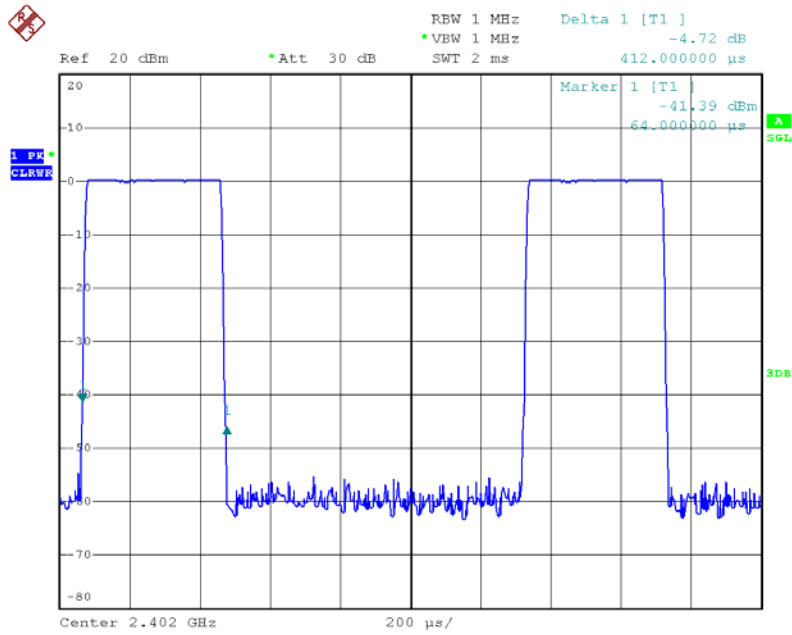


Date: 15.NOV.2012 12:11:00

Single Pulse Plot on Channel 39 / 1DH1 / 2441 MHz

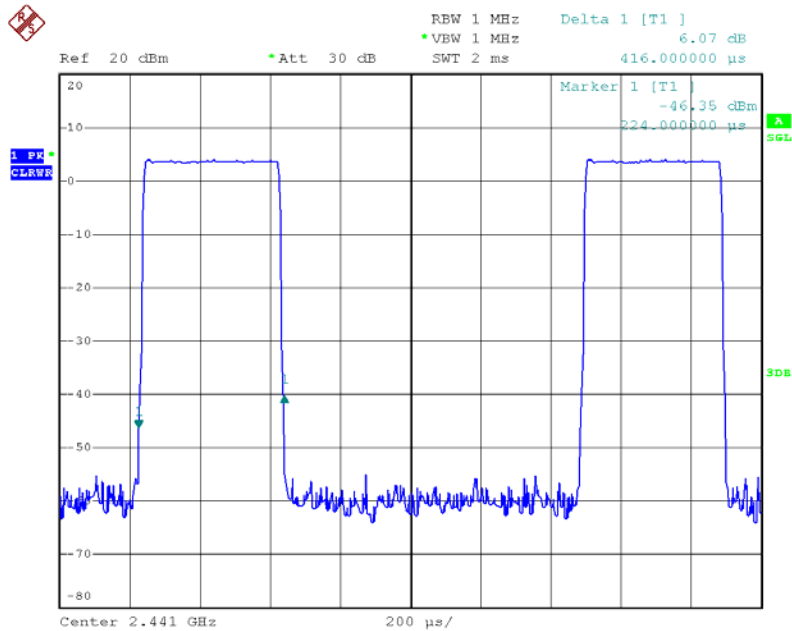


Date: 15.NOV.2012 12:14:32

Single Pulse Plot on Channel 78 / 1DH1 / 2480 MHz

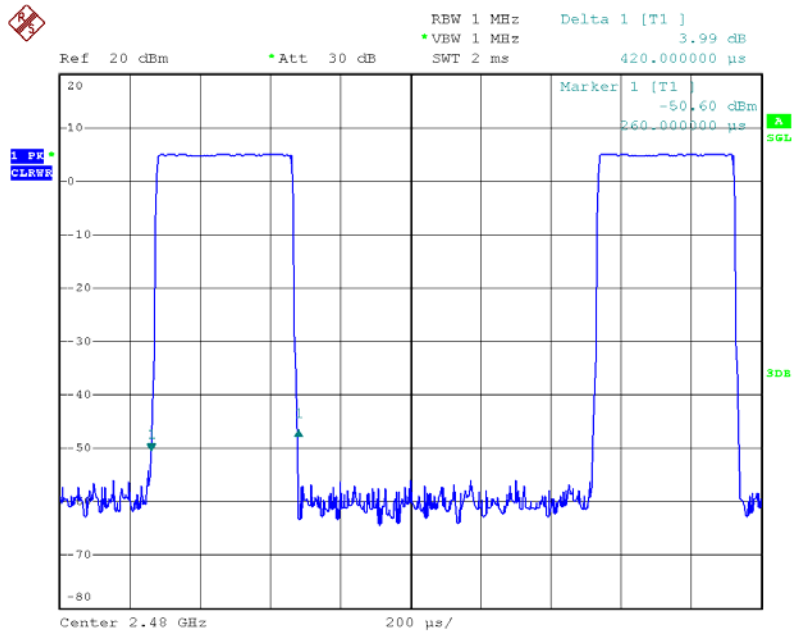


Date: 15.NOV.2012 12:18:14

Single Pulse Plot on Channel 0 / 1DH3 / 2402 MHz

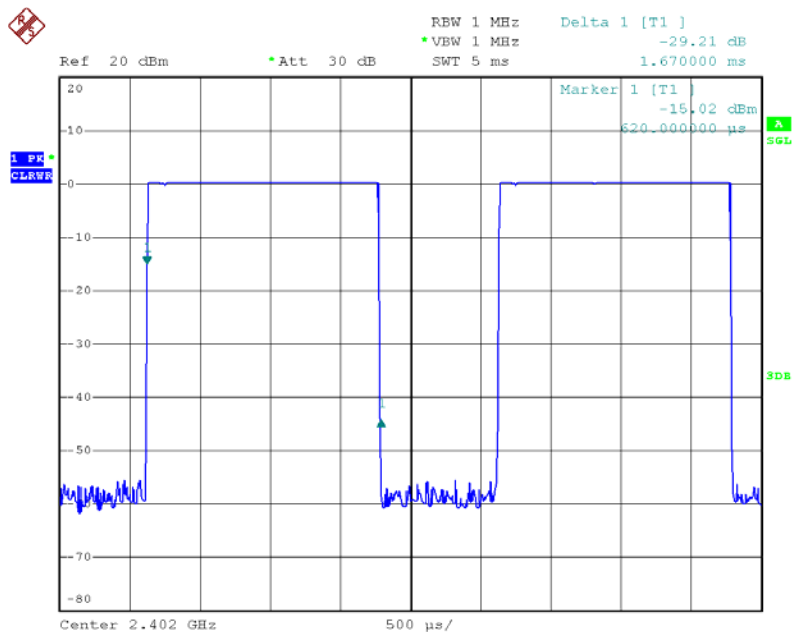


Date: 15.NOV.2012 12:09:49

Single Pulse Plot on Channel 39 / 1DH3 / 2441 MHz

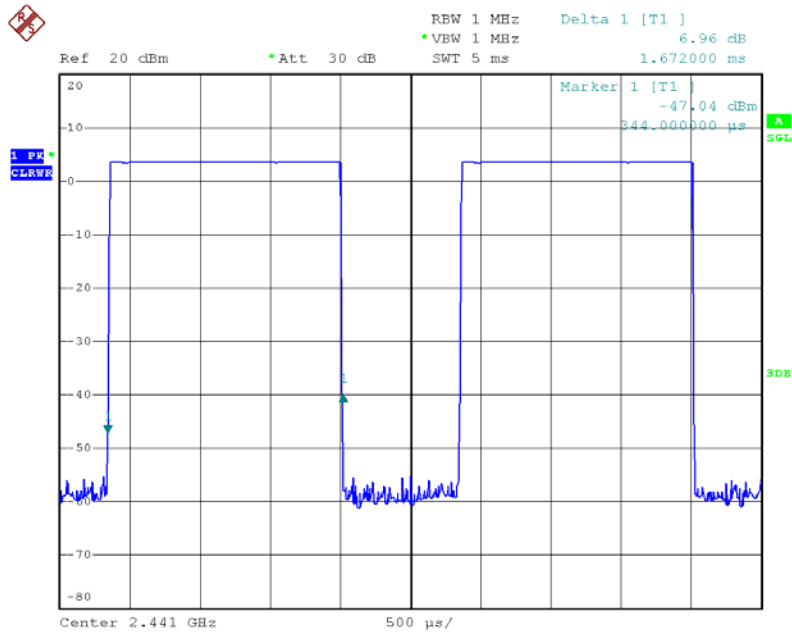


Date: 15.NOV.2012 12:13:09

Single Pulse Plot on Channel 78 / 1DH3 / 2480 MHz

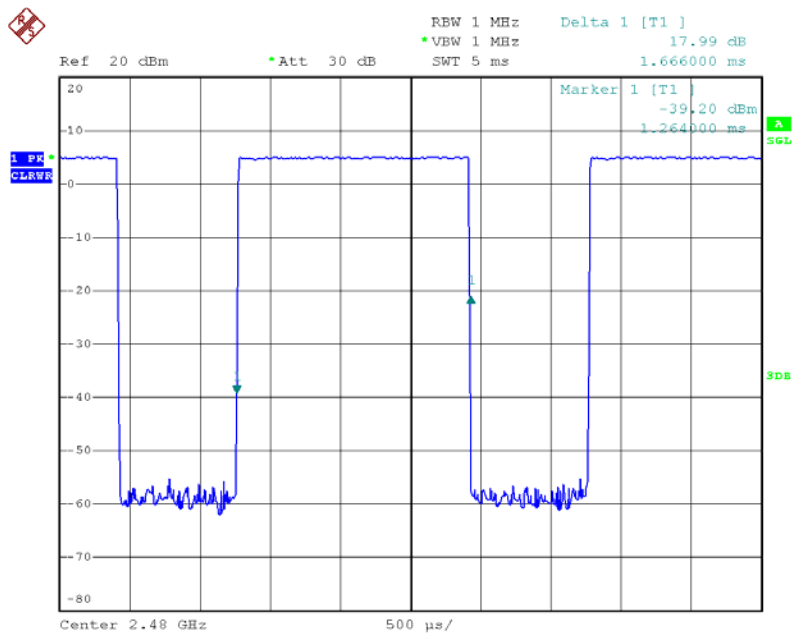


Date: 15.NOV.2012 12:17:17

Single Pulse Plot on Channel 0 / 1DH5 / 2402 MHz

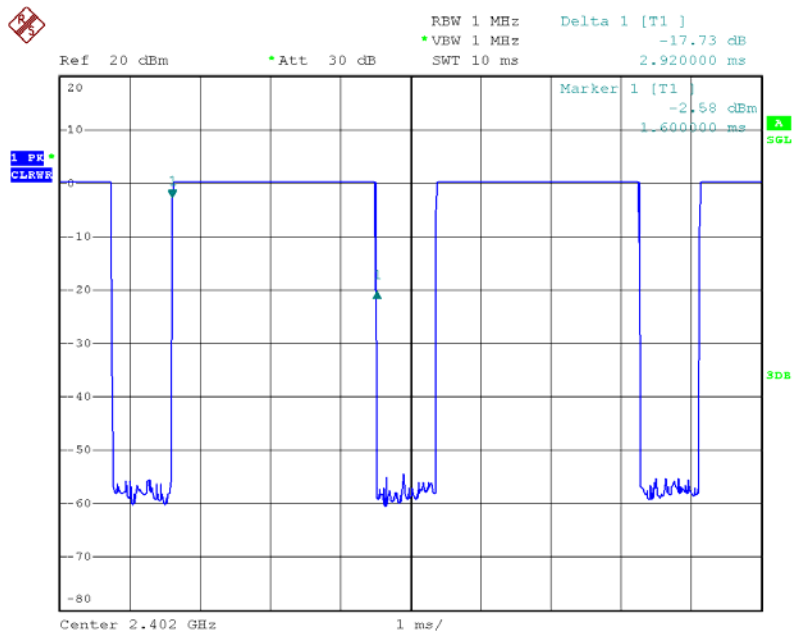


Date: 15.NOV.2012 12:08:05

Single Pulse Plot on Channel 39 / 1DH5 / 2441 MHz

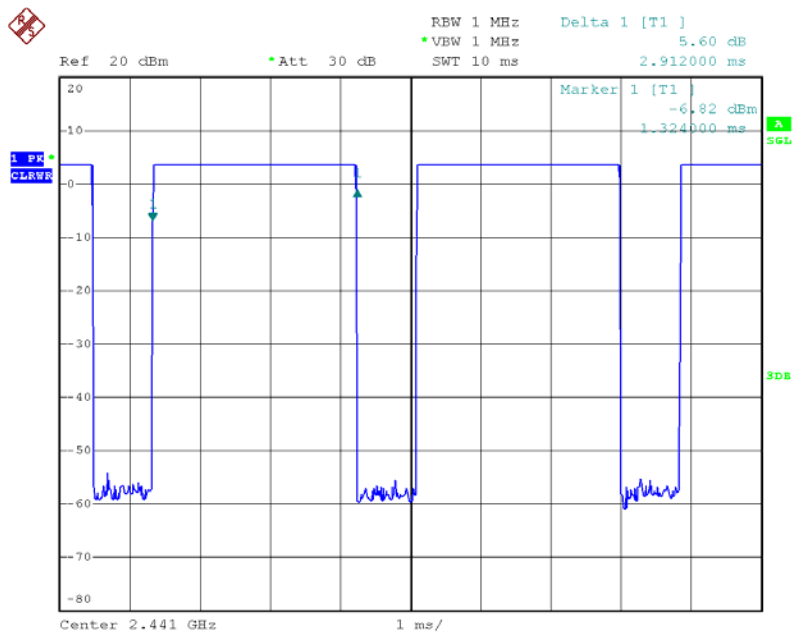

Date: 15.NOV.2012 12:12:16

Single Pulse Plot on Channel 78 / 1DH5 / 2480 MHz

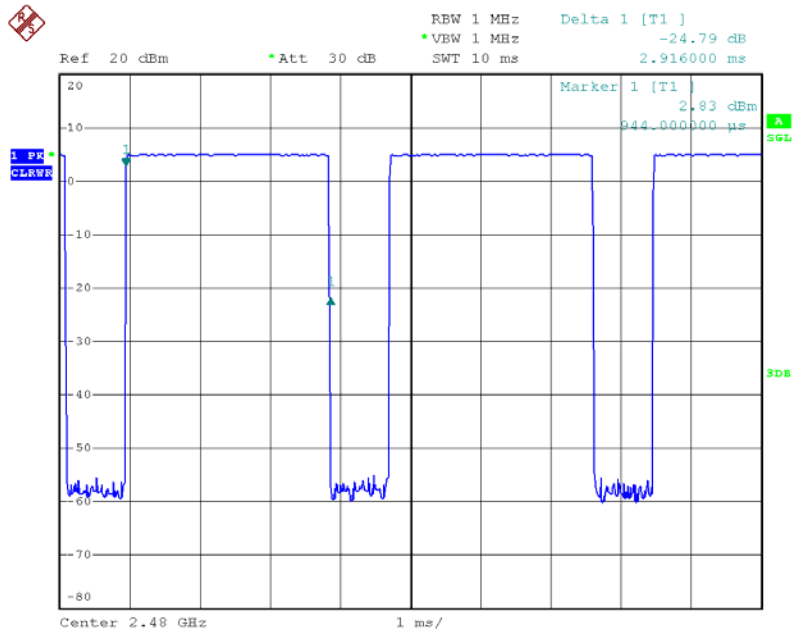

Date: 15.NOV.2012 12:15:59

4.7. Radiated Emissions Measurement

4.7.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 3MHz for peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.7.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.7.4. Test Setup Layout

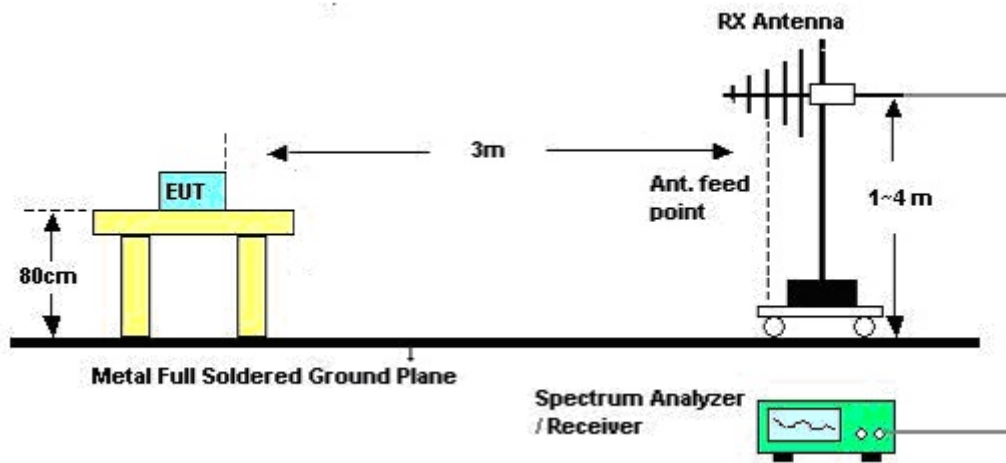

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	24.5°C	Humidity	57%
Test Engineer	Satoshi Yang	Configurations	CTX

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.7.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	24.5°C	Humidity	57%
Test Engineer	Satoshi Yang	Configurations	CTX

Horizontal

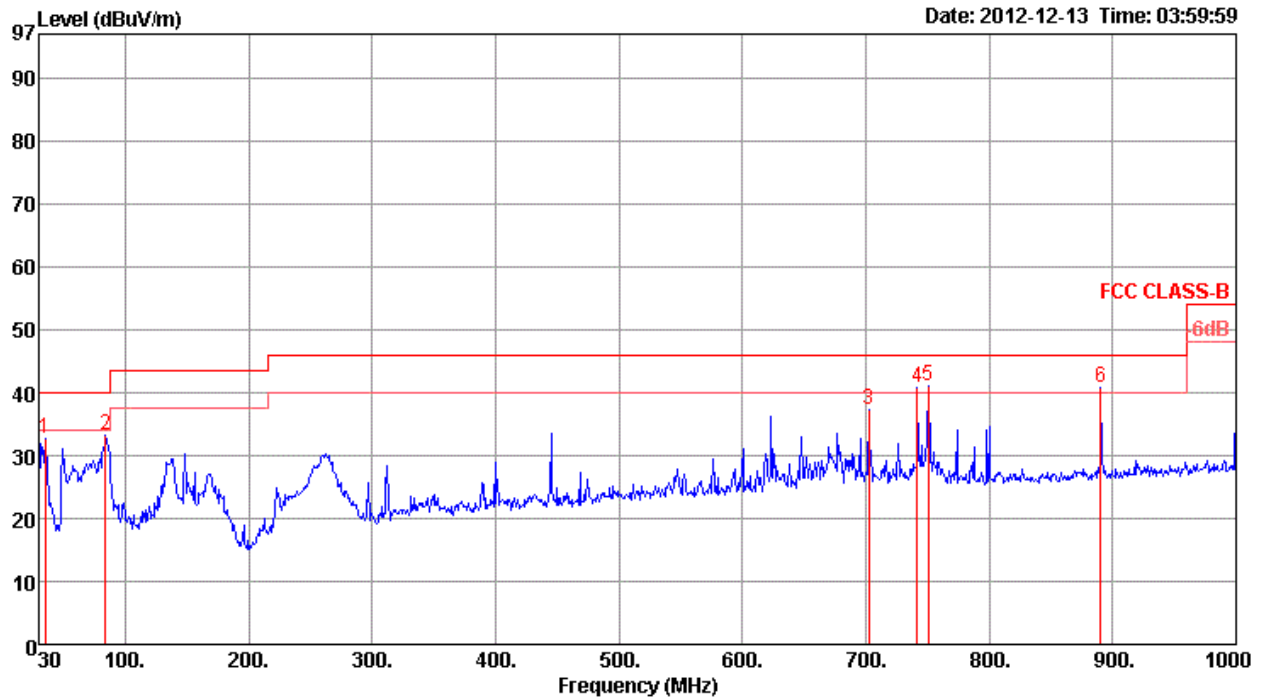

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	34.85	32.76	40.00	-7.24	43.98	0.50	16.08	27.80	Peak	124	0 HORIZONTAL
2	84.32	33.36	40.00	-6.64	52.03	1.10	7.89	27.66	Peak	124	0 HORIZONTAL
3	702.21	37.18	46.00	-8.82	42.76	3.31	19.10	27.99	Peak	124	0 HORIZONTAL
4	741.98	40.79	46.00	-5.21	45.78	3.47	19.37	27.83	Peak	124	0 HORIZONTAL
5	750.71	41.19	46.00	-4.81	46.06	3.50	19.43	27.80	Peak	124	0 HORIZONTAL
6	890.39	40.73	46.00	-5.27	44.13	3.56	20.46	27.42	Peak	124	0 HORIZONTAL

Vertical

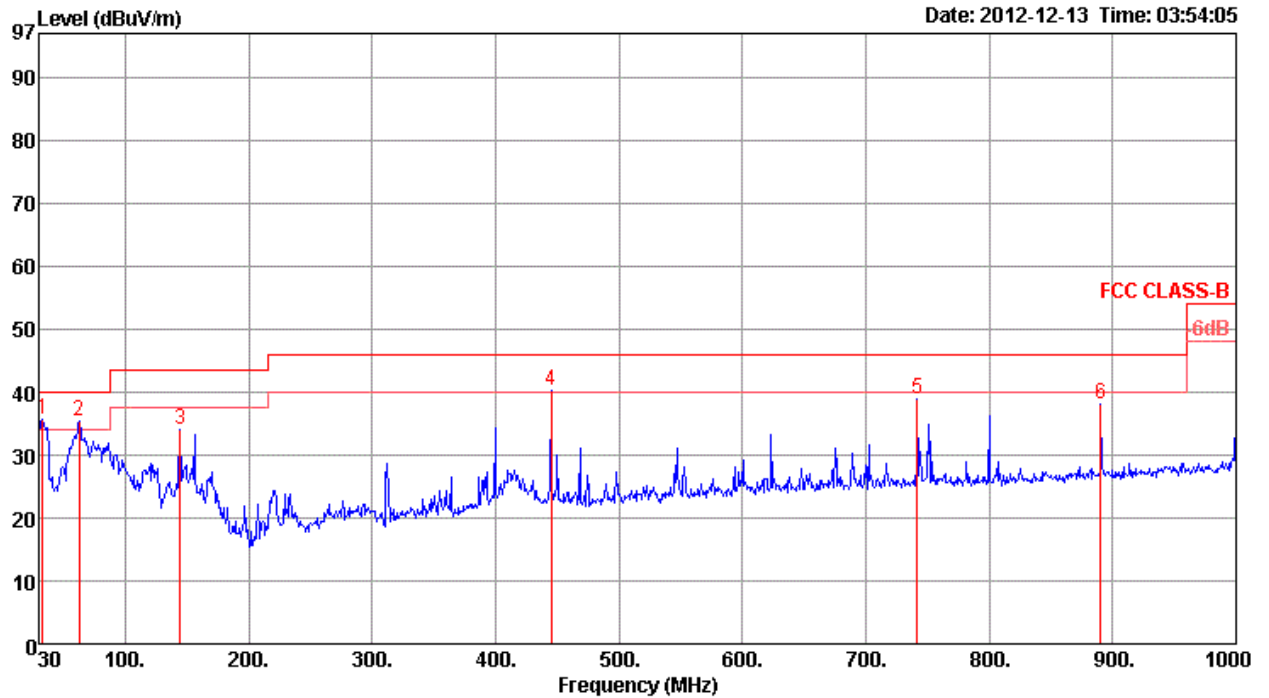

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	32.91	35.73	40.00	-4.27	45.88	0.50	17.15	27.80 Peak	400	0	VERTICAL
2	62.98	35.45	40.00	-4.55	55.61	0.86	6.73	27.75 Peak	400	0	VERTICAL
3	144.46	34.01	43.50	-9.49	47.85	1.42	12.12	27.38 Peak	400	0	VERTICAL
4	445.16	40.31	46.00	-5.69	48.80	2.57	16.77	27.83 Peak	400	0	VERTICAL
5	741.98	39.00	46.00	-7.00	43.99	3.47	19.37	27.83 Peak	400	0	VERTICAL
6	890.39	38.03	46.00	-7.97	41.43	3.56	20.46	27.42 Peak	400	0	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBUV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.7.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	25.6°C	Humidity	56%
Test Engineer	Kenneth Huang	Configurations	8DPSK / 3DH5 / Channel 0
Test Date	Nov. 13, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4803.96	31.78	54.00	-22.22	30.51	3.29	33.02	35.04	Average	101	181	HORIZONTAL
2	4804.06	45.49	74.00	-28.51	44.22	3.29	33.02	35.04	Peak	101	181	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	7205.25	46.56	74.00	-27.44	42.16	4.05	35.75	35.40	Peak	100	342	VERTICAL
2	7205.65	31.21	54.00	-22.79	26.81	4.05	35.75	35.40	Average	100	342	VERTICAL

Temperature	25.6°C	Humidity	56%
Test Engineer	Kenneth Huang	Configurations	8DPSK / 3DH5 / Channel 39
Test Date	Nov. 13, 2012		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	PoI/Phase
1	4881.93	35.36	54.00	-18.64	33.90	3.33	33.16	35.03	Average	100	180	VERTICAL
2	4882.04	47.77	74.00	-26.23	46.31	3.33	33.16	35.03	Peak	100	180	VERTICAL
3	7323.43	45.61	74.00	-28.39	40.99	4.06	35.96	35.40	Peak	100	43	VERTICAL
4	7323.57	32.42	54.00	-21.58	27.80	4.06	35.96	35.40	Average	100	43	VERTICAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	PoI/Phase
1	4881.64	45.57	74.00	-28.43	44.11	3.33	33.16	35.03	Peak	100	214	HORIZONTAL
2	4881.93	33.08	54.00	-20.92	31.62	3.33	33.16	35.03	Average	100	214	HORIZONTAL
3	7322.25	32.47	54.00	-21.53	27.85	4.06	35.96	35.40	Average	100	56	HORIZONTAL
4	7323.66	45.57	74.00	-28.43	40.95	4.06	35.96	35.40	Peak	100	56	HORIZONTAL

Temperature	25.6°C	Humidity	56%
Test Engineer	Kenneth Huang	Configurations	8DPSK / 3DH5 / Channel 78
Test Date	Nov. 13, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4959.83	47.13	74.00	-26.87	45.44	3.37	33.33	35.01	Peak	100	213	HORIZONTAL
2	4959.99	34.48	54.00	-19.52	32.79	3.37	33.33	35.01	Average	100	213	HORIZONTAL
3	7439.79	45.19	74.00	-28.81	40.32	4.07	36.20	35.40	Peak	100	84	HORIZONTAL
4	7440.72	32.01	54.00	-21.99	27.14	4.07	36.20	35.40	Average	100	84	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4959.77	48.46	74.00	-25.54	46.77	3.37	33.33	35.01	Peak	100	352	VERTICAL
2	4959.99	36.66	54.00	-17.34	34.97	3.37	33.33	35.01	Average	100	352	VERTICAL
3	7440.57	31.93	54.00	-22.07	27.06	4.07	36.20	35.40	Average	100	90	VERTICAL
4	7440.86	44.90	74.00	-29.10	40.03	4.07	36.20	35.40	Peak	100	90	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.8. Band Edge Emissions Measurement

4.8.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.8.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 KHz / 300KHz for Peak

4.8.3. Test Procedures

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.8.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.8.5. Test Deviation

There is no deviation with the original standard.

4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.8.7. Test Result of Band Edge and Fundamental Emissions

Temperature	25.6°C	Humidity	56%
Test Engineer	Kenneth Huang	Configurations	8DPSK / 3DH5 / Channel 0, 39, 78
Test Date	Nov. 13, 2012		

Channel 0

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2387.12	57.84	74.00	-16.16	27.46	2.21	28.17	0.00	Peak	100	156	VERTICAL
2	2390.00	45.03	54.00	-8.97	14.64	2.22	28.17	0.00	Average	100	156	VERTICAL
3	2402.00	84.39			53.96	2.22	28.21	0.00	Average	100	156	VERTICAL
4	2402.16	97.22			66.79	2.22	28.21	0.00	Peak	100	156	VERTICAL

Channel 39

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.68	57.27	74.00	-16.73	26.89	2.21	28.17	0.00	Peak	100	158	HORIZONTAL
2	2390.00	46.47	54.00	-7.53	16.08	2.22	28.17	0.00	Average	100	158	HORIZONTAL
3	2441.00	85.57			55.04	2.24	28.29	0.00	Average	100	158	HORIZONTAL
4	2441.00	97.60			67.07	2.24	28.29	0.00	Peak	100	158	HORIZONTAL
5	2483.50	46.89	54.00	-7.11	16.26	2.26	28.37	0.00	Average	100	158	HORIZONTAL
6	2491.19	57.56	74.00	-16.44	26.89	2.26	28.41	0.00	Peak	100	158	HORIZONTAL

Channel 78

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2480.00	87.54			56.90	2.26	28.38	0.00	Average	100	182	HORIZONTAL
2	2480.16	100.34			69.70	2.26	28.38	0.00	Peak	100	182	HORIZONTAL
3	2483.50	52.28	54.00	-1.72	21.64	2.26	28.38	0.00	Average	100	182	HORIZONTAL
4	2483.50	59.99	74.00	-14.01	29.35	2.26	28.38	0.00	Peak	100	182	HORIZONTAL


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


For Emission not in Restricted Band

Plot on Configuration For Bluetooth 2.1 + EDR (Reference Level)

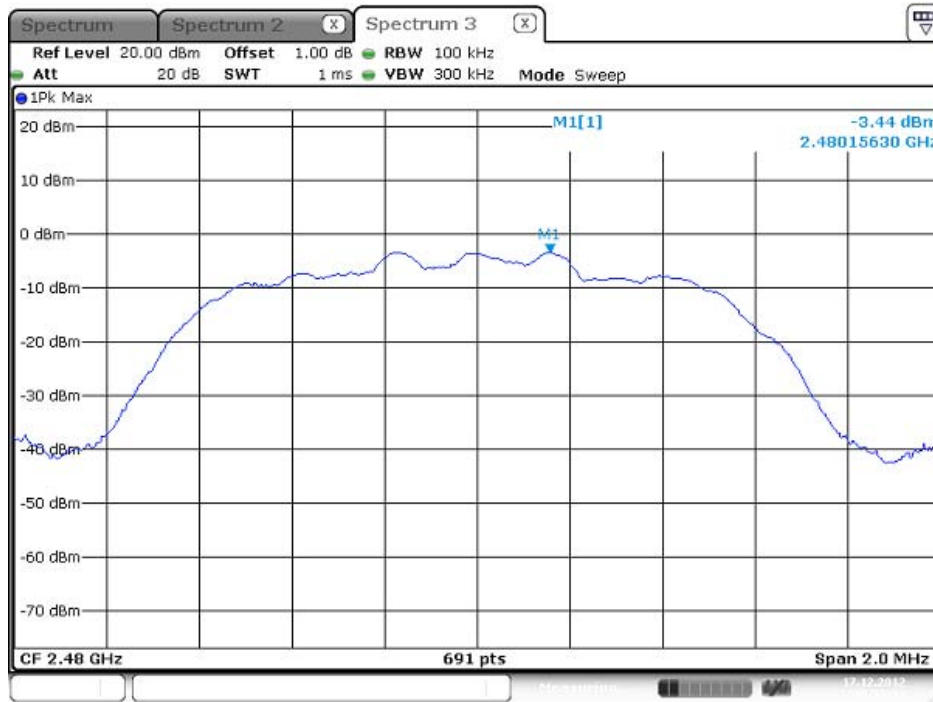


Date: 17.DEC.2012 19:21:31

Plot on Configuration For Bluetooth 2.1 + EDR / 2402 MHz (down 30dBc)

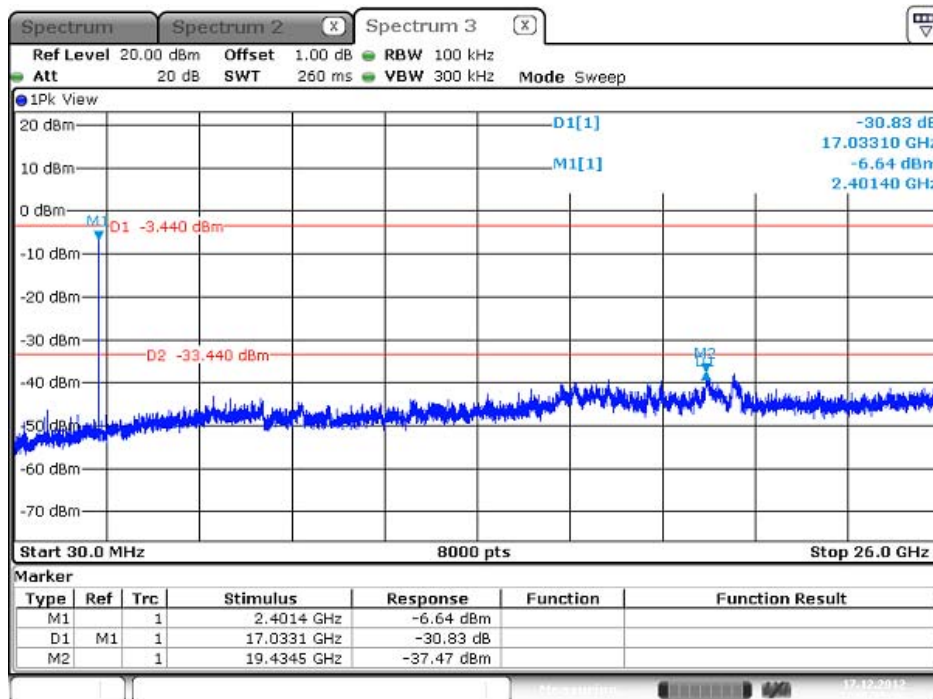


Date: 17.DEC.2012 19:25:10

Plot on Configuration For Bluetooth 2.1 + EDR / 2440 MHz (down 30dBc)

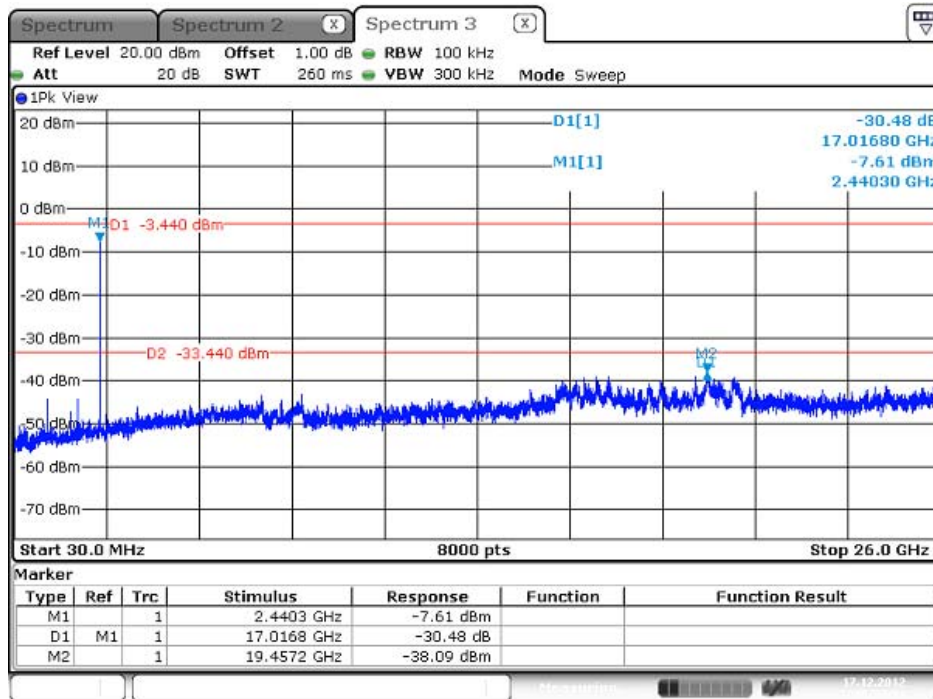

Plot on Configuration For Bluetooth 2.1 + EDR / 2480 MHz (down 30dBc)

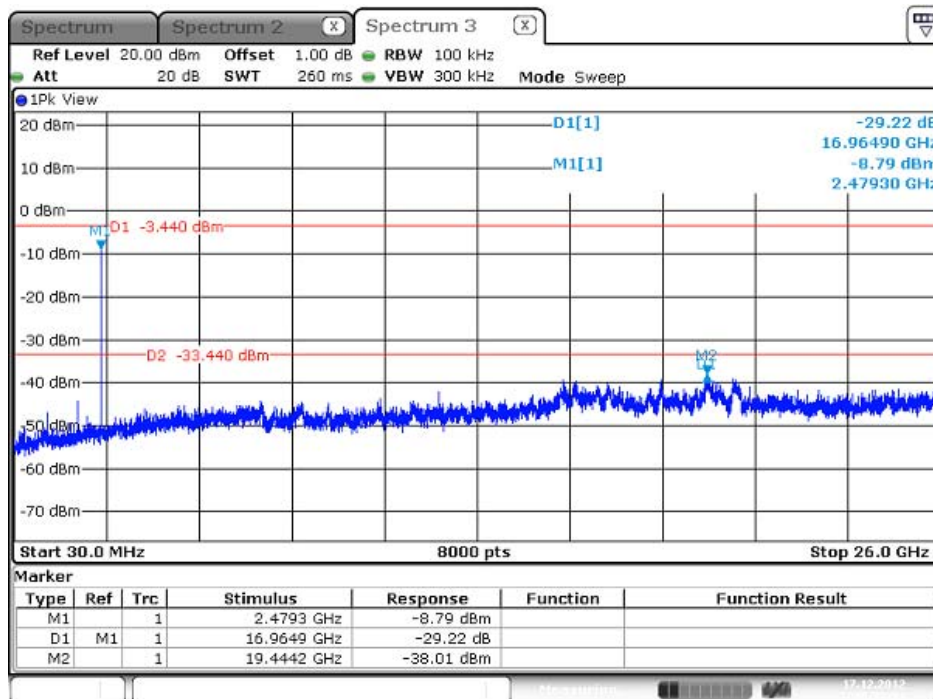

4.9. Antenna Requirements

4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further,

4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report, antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Sep. 14, 2012	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	4083	150kHz ~ 100MHz	Nov. 14, 2012	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127-478	9K ~ 30MHz	Jun. 22, 2012	Conduction (CO01-CB)
PULSE LIMITER	R&S	ESH3-Z2	100430	9K~30MHz	Feb. 03, 2012	Conduction (CO01-CB)
COND Cable	Woken	Cable	1	0.15MHz~30MHz	Dec. 04, 2011	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Jan. 11, 2012	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 27, 2011	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 23, 2011	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 23, 2011	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Jul. 31, 2012	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9KHz~40GHz	Nov. 16, 2012	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9KHz ~ 2.75GHz	Mar. 20, 2012	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 18, 2011	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz - 26.5 GHz	Nov. 18, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz - 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz - 26.5 GHz	Nov. 18, 2011	Radiation (03CH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-2	N/A	1 GHz – 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 18, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 18, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9KHz~40GHz	Oct. 08, 2012	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 05, 2012	Conducted (TH01-CB)
Signal Generator	R&S	SMR40	100302	10MHz-40GHz	Nov. 27, 2011	Conducted (TH01-CB)
Signal Generator	R&S	SMR40	100302	10MHz-40GHz	Nov. 27, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	2 Way	0120A02056002D	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	3 Way	MDC2366	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	4 Way	0120A04056002D	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
Signal generator	R&S	SMU200A	102782	10MHz-40GHz	Sep. 26, 2012	Conducted (TH01-CB)
Horn Antenna	COM-POWER	AH-118	071187	1GHz – 18GHz	May. 09, 2012	Conducted (TH01-CB)
Horn Antenna	COM-POWER	AH-118	071042	1GHz – 18GHz	Dec. 06, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 19, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 19, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 19, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 19, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 19, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Nov. 28, 2012	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Nov. 27, 2012	Conducted (TH01-CB)
Mixer	OML	M19HW/A	U91113-1	40 ~ 60 GHz	Mar. 23, 2011*	Radiation (TH01-CB)
Mixer	OML	M15HW/A	V91113-1	50 ~ 75 GHz	Mar. 23, 2011*	Radiation (TH01-CB)
Diplexer	OML	DPL313B	N/A	40~200GHz	N.C.R	Radiation (TH01-CB)
Mixer	OML	M12HW/A	E91113-1	60 ~ 90 GHz	Mar. 23, 2011*	Radiation (TH01-CB)
Mixer	OML	M08HW/A	F91113-1	90 ~ 140 GHz	Mar. 23, 2011*	Radiation (TH01-CB)
Mixer	OML	M05HW/A	G91113-1	140 ~ 220 GHz	N.C.R	Radiation (TH01-CB)
Standard Horn Antenna	Custom Microwave	HO19R	U91113-A	40 ~ 60 GHz	N.C.R	Radiation (TH01-CB)
Standard Horn Antenna	Custom Microwave	HO15R	V91113-A	50 ~ 75 GHz	N.C.R	Radiation (TH01-CB)
Standard Horn Antenna	Custom Microwave	HO12R	E91113-A	60 ~ 90 GHz	N.C.R	Radiation (TH01-CB)
Standard Horn Antenna	Custom Microwave	HO08R	F91113-A	90 ~ 140 GHz	N.C.R	Radiation (TH01-CB)
Standard Horn Antenna	Custom Microwave	HO05R	G91113-A	140 ~ 220 GHz	N.C.R	Radiation (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

Note: "*" Calibration Interval of instruments listed above is two years.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085