



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	LOGITECH FAR EAST LTD.
Applicant Address	#2 Creation Rd. 4, Science-Based Ind. Park Hsinchu Taiwan, R.O.C.
FCC ID	JNZOR0004
Manufacturer's company	LOGITECH FAR EAST LTD.
Manufacturer Address	#2 Creation Rd. 4, Science-Based Ind. Park Hsinchu Taiwan, R.O.C.

Product Name	RF Transceiver
Brand Name	Logitech
Model Name	O-R0004
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.249
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Jul. 13, 2012
Final Test Date	Dec. 14, 2012
Submission Type	Original Equipment

Statement

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Testing Laboratory
1190

Table of Contents

1. CERTIFICATE OF COMPLIANCE.....	3
2. SUMMARY OF THE TEST RESULT.....	4
3. GENERAL INFORMATION.....	5
3.1. Product Details	5
3.2. Accessories	5
3.3. Table for Filed Antenna	6
3.4. Table for Carrier Frequencies.....	6
3.5. Table for Test Modes.....	7
3.6. Table for Testing Locations.....	7
3.7. Table for Supporting Units	7
3.8. Test Configurations	8
4. TEST RESULT.....	11
4.1. AC Power Line Conducted Emissions Measurement.....	11
4.2. Field Strength of Fundamental Emissions Measurement.....	15
4.3. 20dB Spectrum Bandwidth Measurement	18
4.4. Radiated Emissions Measurement.....	21
4.5. Band Edge Emissions Measurement.....	30
4.6. Antenna Requirements.....	32
5. LIST OF MEASURING EQUIPMENTS	33
6. TEST LOCATION.....	36
APPENDIX A. PHOTOGRAPHS OF EUT.....	A1 ~ A17
APPENDIX B. TEST PHOTOS	B1 ~ B6

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR271312AB	Rev. 01	Initial issue of report	Jan. 04, 2013
FR271312AB	Rev. 02	Modified the product name to "RF Transceiver" from "Harmony Hub".	Feb. 26, 2013



1. CERTIFICATE OF COMPLIANCE

Product Name : RF Transceiver
Brand Name : Logitech
Model Name : O-R0004
Applicant : LOGITECH FAR EAST LTD.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.249

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jul. 13, 2012 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads 'Sam Chen' is written over a horizontal line.

Reviewed By:

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	11.60 dB
4.2	15.249(a)	Field Strength of Fundamental Emissions	Complies	7.52 dB
4.3	15.215(c)	20dB Spectrum Bandwidth	Complies	-
4.4	15.249(a)/(d)	Radiated Emissions	Complies	4.66 dB
4.5	15.249(d)	Band Edge Emissions	Complies	7.52dB
4.6	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Field Strength of Fundamental Emissions	±0.8dB	Confidence levels of 95%
20dB Spectrum Bandwidth	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Power Type	Power Adapter
Modulation	GFSK
Frequency Range	2400 ~ 2483.5MHz
Channel Number	24
Channel Band Width (99%)	1.92 MHz
Max. Field Strength	86.48 dBuV/m
Carrier Frequencies	Please refer to section 3.3
Antenna	Integrate Antenna (Without any antenna connector)

3.2. Accessories


Power	Brand Holder	Model	Rating
Adapter 1	Logitech	AD631MC	I/P: 100-240V~50/60Hz 0.13A O/P: 5.15V,1A
Adapter 2	Logitech	KSAS0060510100D5D	I/P: 100-240V~50/60Hz 0.18A O/P: 5.1V,1.0A
Others			
USB Cable: Shielded, 0.65m			
IR Cable*2: Non-shielded, 2.6m			

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Remark
1	--	--	PIFA	N/A	4.6	TX / RX Ant.

Note: The EUT has one antennas.

Ant. 1 could transmit/receive simultaneously.

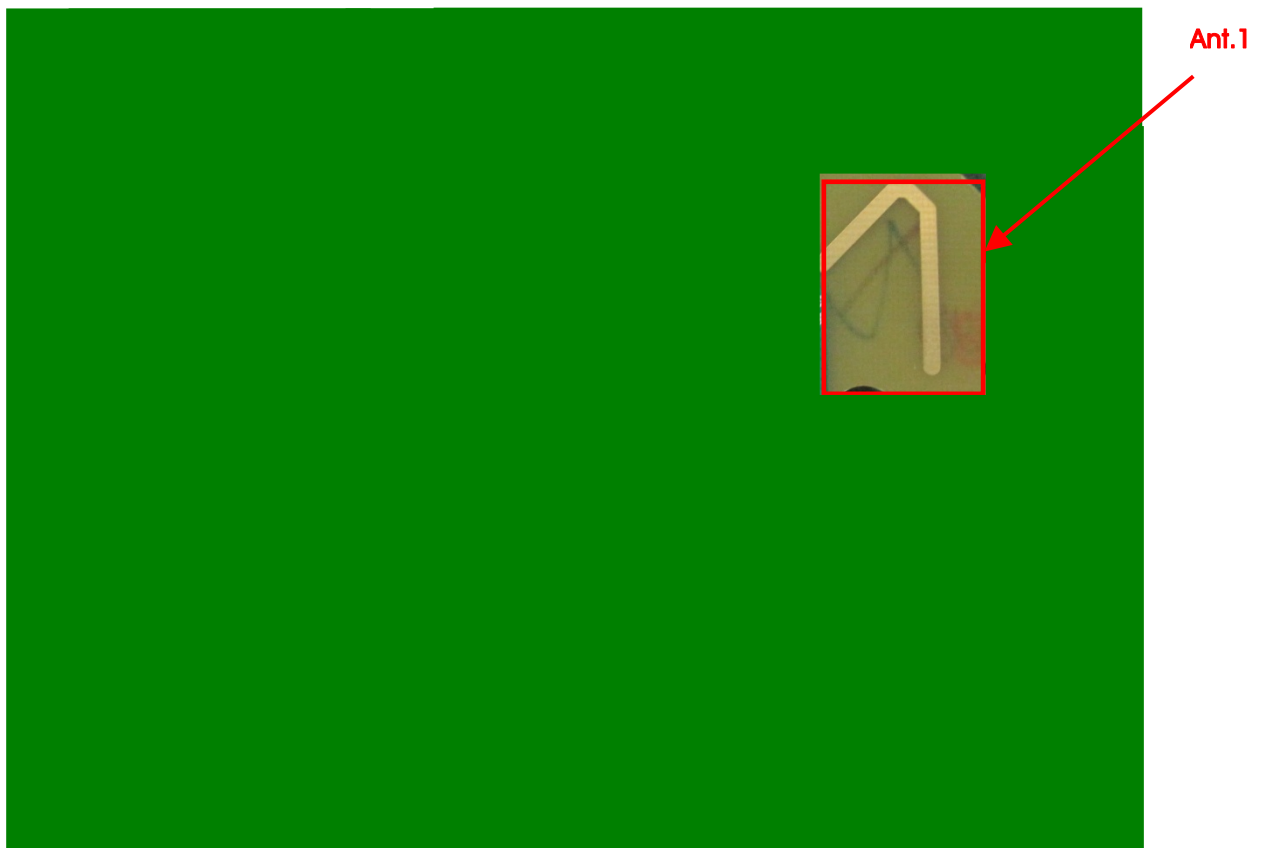

3.4. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400 ~ 2483.5MHz	1	2405 MHz	13	2441 MHz
	2	2408 MHz	14	2444 MHz
	3	2411 MHz	15	2447 MHz
	4	2414 MHz	16	2450 MHz
	5	2417 MHz	17	2453 MHz
	6	2420 MHz	18	2456 MHz
	7	2423 MHz	19	2459 MHz
	8	2426 MHz	20	2462 MHz
	9	2429 MHz	21	2465 MHz
	10	2432 MHz	22	2468 MHz
	11	2435 MHz	23	2471 MHz
	12	2438 MHz	24	2474 MHz

3.5. Table for Test Modes

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Channel	Antenna
AC Power Line Conducted Emissions	CTX	-	-
Field Strength of Fundamental Emissions 20dB Spectrum Bandwidth	CTX	1/14/24	1
Radiated Emissions 30MHz ~ 1GHz	CTX	-	-
Radiated Emissions 1GHz~10 th Harmonic	CTX	1/14/24	1
Band Edge Emissions	CTX	1/14/24	1

Note: CTX=continuously transmitting

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1: USB Mode

For Radiated Emission test:

Mode 1: USB Mode

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC);

Please refer section 6 for Test Site Address.


3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6220	E2KWM3945ABG

3.8. Test Configurations


3.8.1. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

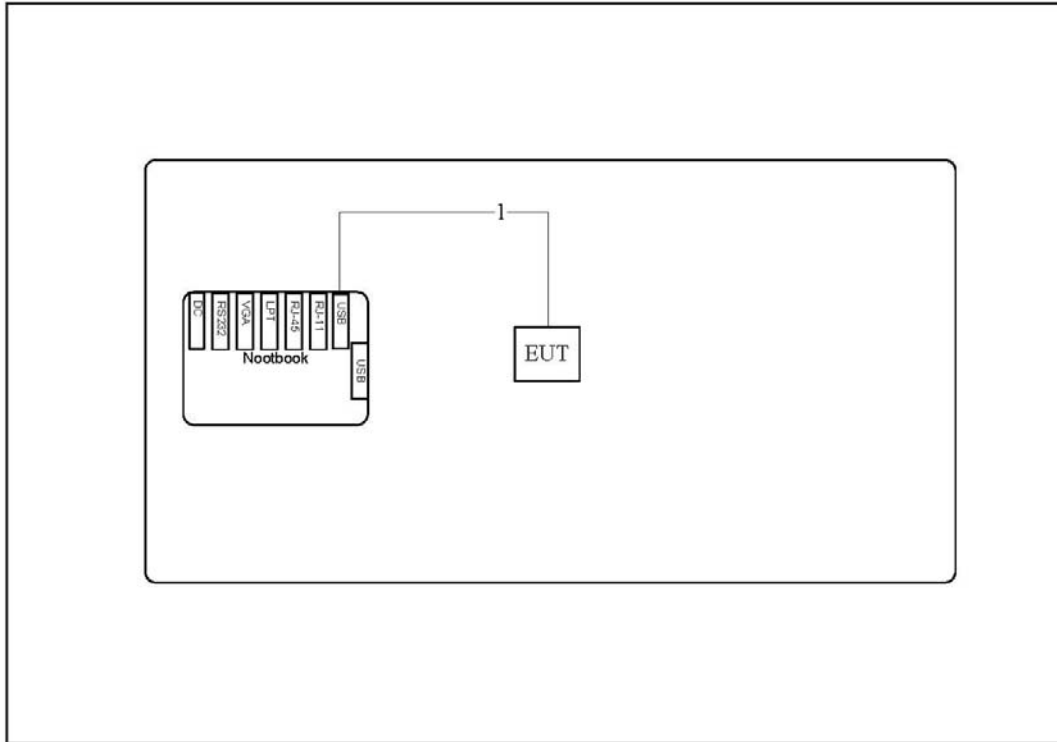


Item	Connection	Shield	Length
1	USB cable	No	0.68m

Test Configuration: Above 1GHz

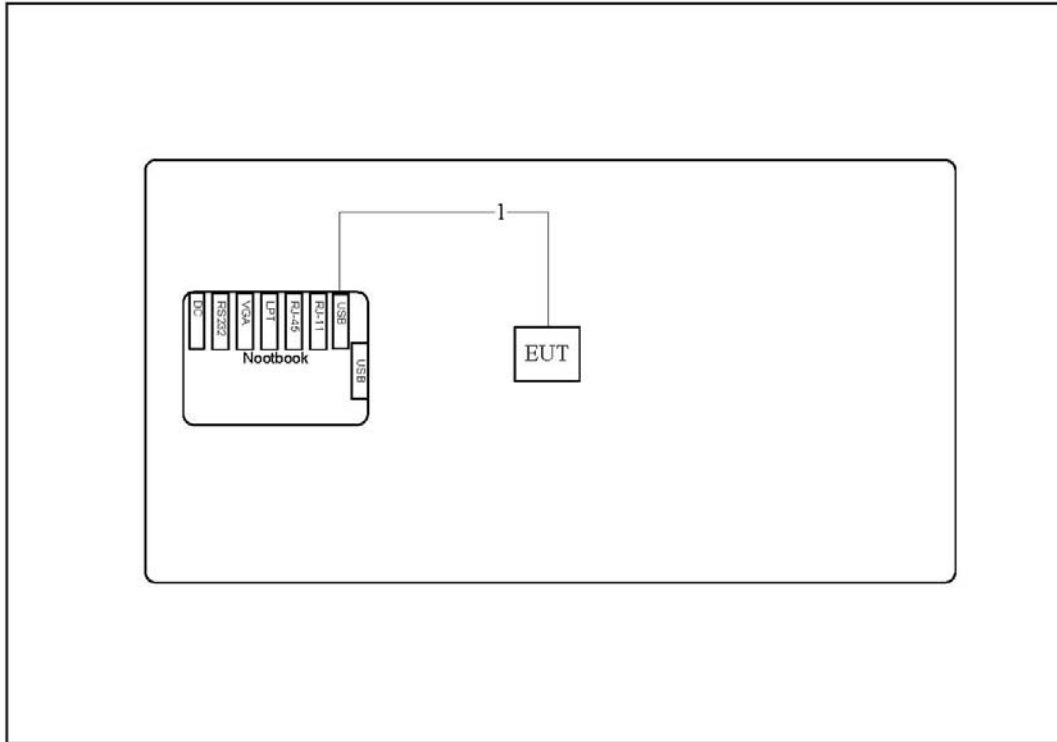

Item	Connection	Shield	Length
1	USB cable	No	0.68m

3.8.2. AC Power Line Conduction Emissions Test Configuration

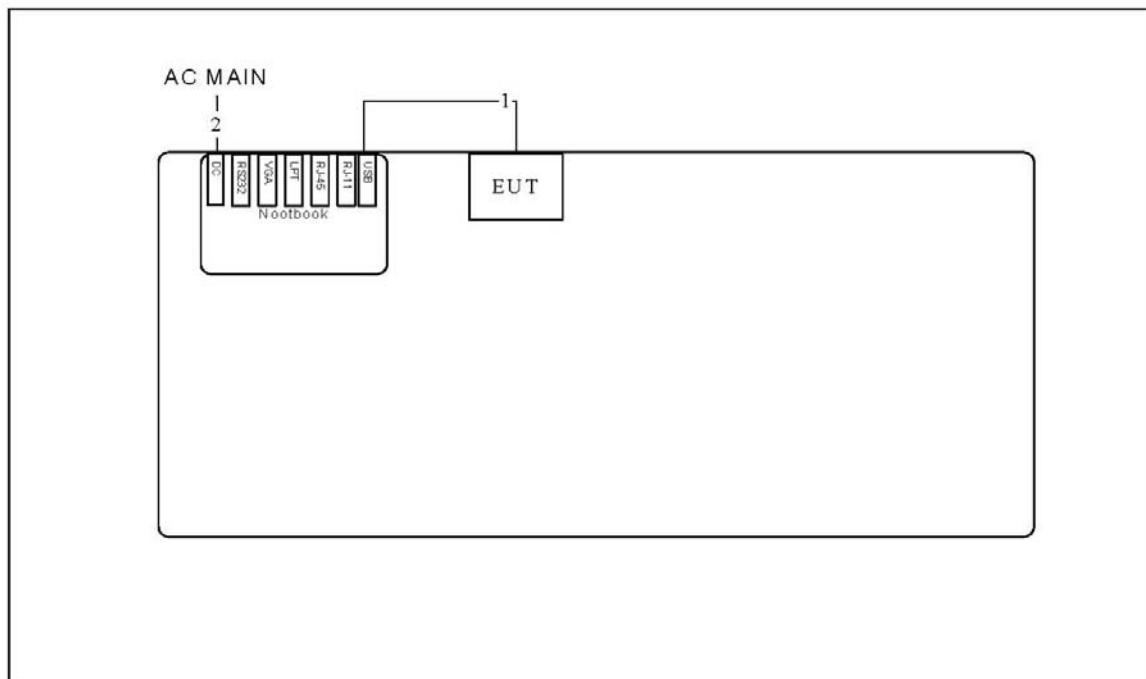

Item	Connection	Shield	Length
1	Power cable	No	1.8m
2	RJ-45 cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

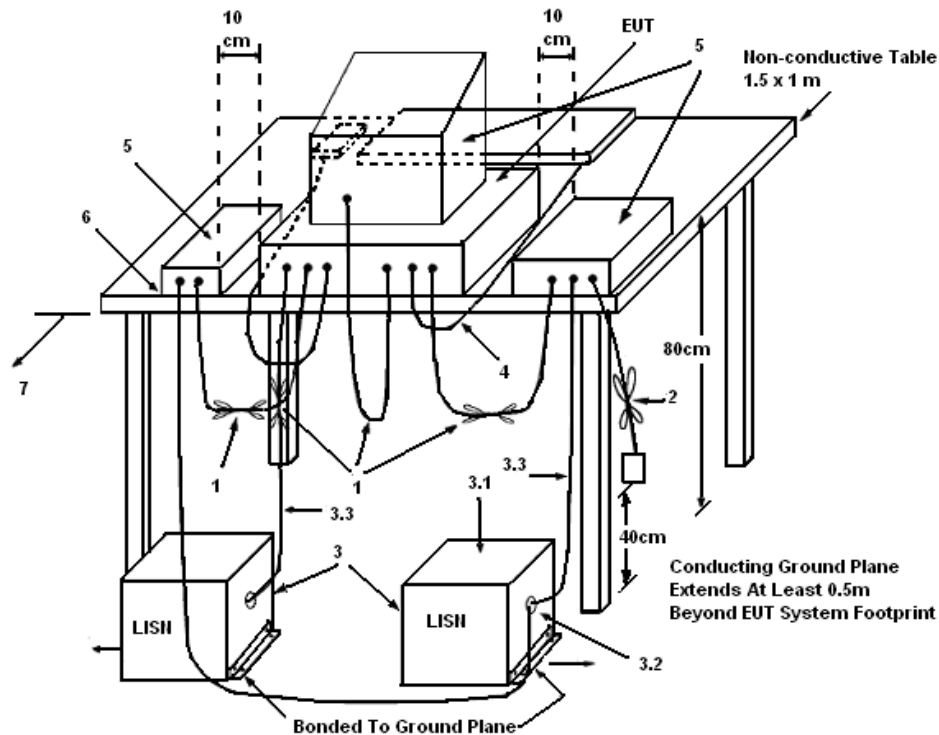

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	20°C	Humidity	63%
Test Engineer	Simon Yang	Phase	Line
Configuration	CTX		

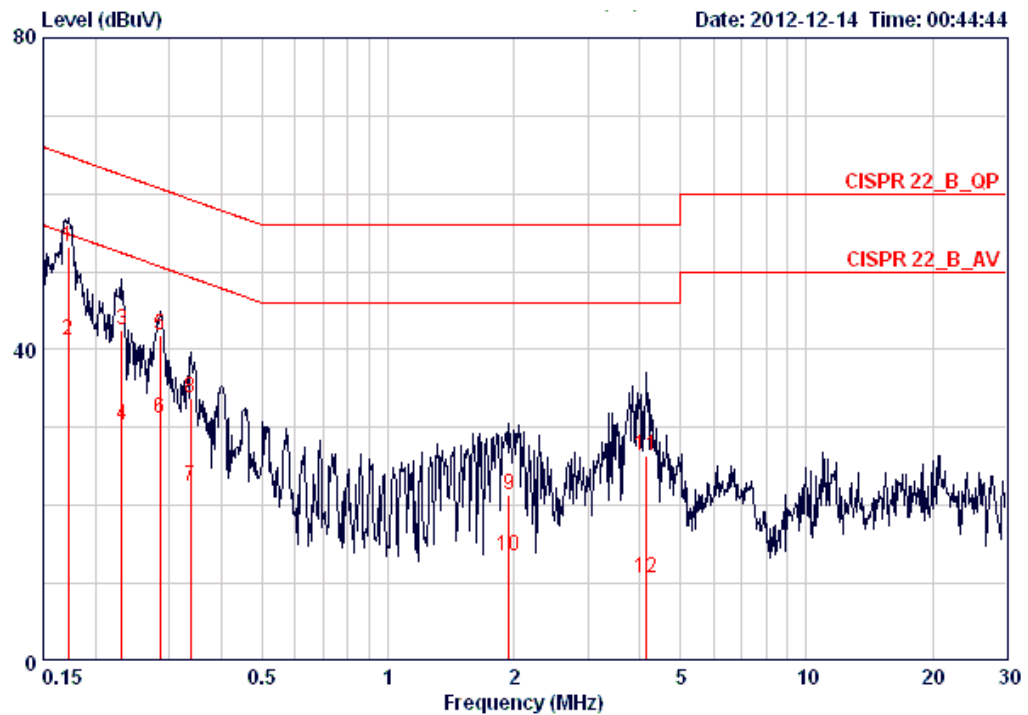

	Over	Limit	Read	LISN	Cable			Remark
Freq	Level	Limit	Line	Level	Factor	Loss	Pol/Phase	
MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.17215	53.26	-11.60	64.86	53.26	0.00	0.00	LINE QP
2	0.17215	41.13	-13.73	54.86	41.13	0.00	0.00	LINE AVERAGE
3	0.23162	42.52	-19.87	62.39	42.52	0.00	0.00	LINE QP
4	0.23162	30.25	-22.14	52.39	30.25	0.00	0.00	LINE AVERAGE
5	0.28478	41.82	-18.86	60.68	41.82	0.00	0.00	LINE QP
6	0.28478	31.17	-19.51	50.68	31.17	0.00	0.00	LINE AVERAGE
7	0.33740	22.43	-26.84	49.27	22.43	0.00	0.00	LINE AVERAGE
8	0.33740	33.78	-25.49	59.27	33.78	0.00	0.00	LINE QP
9	1.949	21.41	-34.59	56.00	21.41	0.00	0.00	LINE QP
10	1.949	13.48	-32.52	46.00	13.48	0.00	0.00	LINE AVERAGE
11	4.136	26.45	-29.55	56.00	26.45	0.00	0.00	LINE QP
12	4.136	10.60	-35.40	46.00	10.60	0.00	0.00	LINE AVERAGE

Temperature	20°C	Humidity	63%
Test Engineer	Sky Wu	Phase	Neutral
Configuration	CTX		

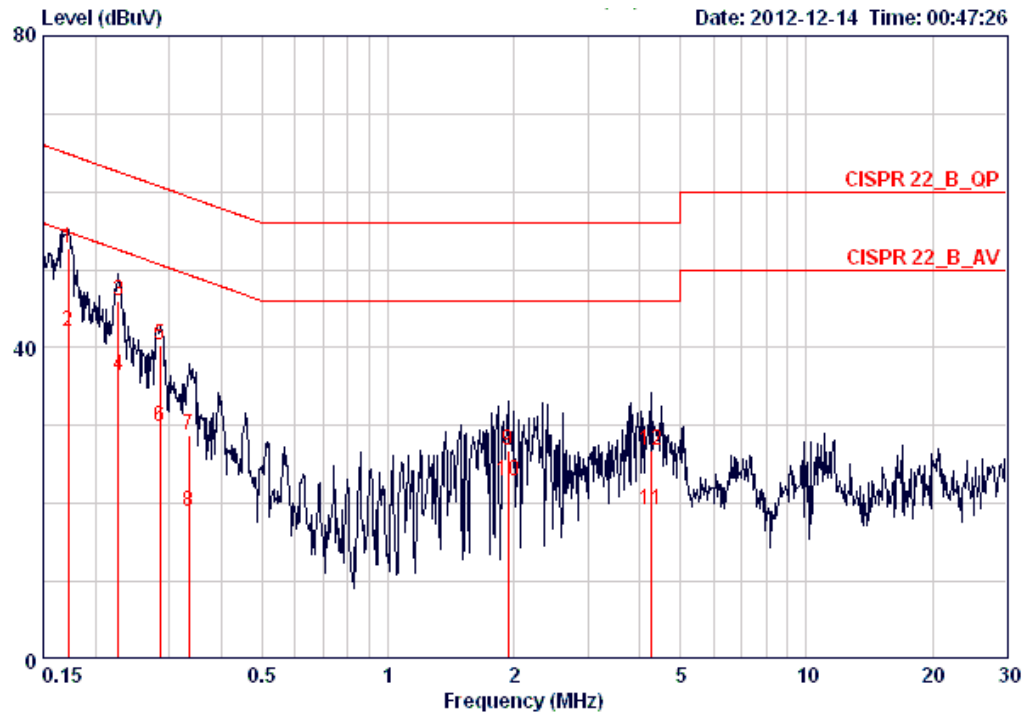

	Freq	Level	Over	Limit	Read	LISN	Cable		
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Pol/Phase	Remark
			dB	dBuV	dBuV	dB	dB		
1	0.17215	52.69	-12.17	64.86	52.69	0.00	0.00	NEUTRAL	QP
2	0.17215	42.04	-12.82	54.86	42.04	0.00	0.00	NEUTRAL	AVERAGE
3	0.22676	45.91	-16.66	62.57	45.91	0.00	0.00	NEUTRAL	QP
4	0.22676	36.36	-16.21	52.57	36.36	0.00	0.00	NEUTRAL	AVERAGE
5	0.28478	40.43	-20.25	60.68	40.43	0.00	0.00	NEUTRAL	QP
6	0.28478	29.89	-20.79	50.68	29.89	0.00	0.00	NEUTRAL	AVERAGE
7	0.33385	28.72	-30.63	59.35	28.72	0.00	0.00	NEUTRAL	QP
8	0.33385	18.98	-30.37	49.35	18.98	0.00	0.00	NEUTRAL	AVERAGE
9	1.939	26.81	-29.19	56.00	26.81	0.00	0.00	NEUTRAL	QP
10	1.939	22.91	-23.09	46.00	22.91	0.00	0.00	NEUTRAL	AVERAGE
11	4.269	19.08	-26.92	46.00	19.08	0.00	0.00	NEUTRAL	AVERAGE
12	4.269	26.86	-29.14	56.00	26.86	0.00	0.00	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss

4.2. Field Strength of Fundamental Emissions Measurement

4.2.1. Limit

The field strength of fundamental emissions within these bands specified at a distance of 3 meters (measurement instrumentation employing an average detector) shall comply with the following table.

Frequency Band (MHz)	Fundamental Emissions Limit (dBuV/m) at 3m
2400-2483.5	94 (Average)
	114 (Peak)

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Power Meter Parameter	Setting
RB	1 MHz Peak / 3MHz Peak
VB	1 MHz Peak / 10Hz Average
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.2.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. For Fundamental emissions, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

4.2.4. Test Setup Layout

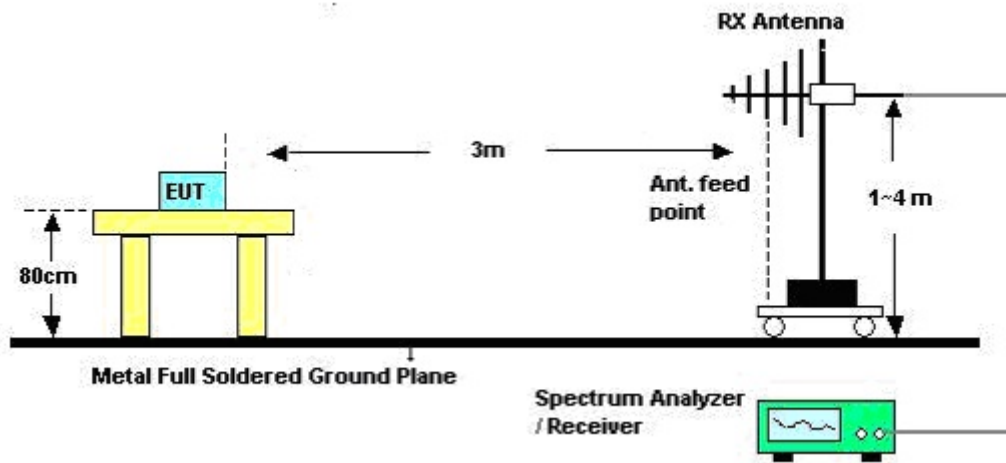

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Field Strength of Fundamental Emissions

Temperature	20°C	Humidity	63%
Test Engineer	Benson Peng	Configurations	Channel 1/14/24
Test Date	Dec. 08, 2012		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	2404.69	104.69	114.00	-9.31	73.93	2.92	0.00	27.84	Peak	37	100	HORIZONTAL
2 a	2404.69	86.48	94.00	-7.52	55.72	2.92	0.00	27.84	Average	37	100	HORIZONTAL

Channel 14

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	2444.32	103.47	114.00	-10.53	72.75	2.94	0.00	27.78	Peak	33	103	HORIZONTAL
2 a	2444.32	85.26	94.00	-8.74	54.54	2.94	0.00	27.78	Average	33	103	HORIZONTAL

Channel 24

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	2473.68	103.93	114.00	-10.07	73.24	2.96	0.00	27.73	Peak	339	100	HORIZONTAL
2 a	2473.68	85.72	94.00	-8.28	55.03	2.96	0.00	27.73	Average	339	100	HORIZONTAL

Note:

$$\text{Emission level (dBuV/m)} = 20 \log \text{Emission level (uV/m)}$$

$$\text{Corrected Reading: Antenna Factor} + \text{Cable Loss} + \text{Read Level} - \text{Preamp Factor} = \text{Level}$$

4.3. 20dB Spectrum Bandwidth Measurement

4.3.1. Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (2400 ~ 2483.5MHz).

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.

4.3.4. Test Setup Layout

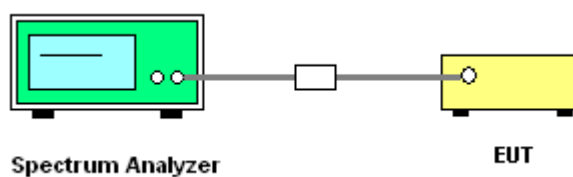

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of 20dB Spectrum Bandwidth

Temperature	20°C	Humidity	63%
Test Engineer	Benson Peng	Configurations	Channel 1/14/24


Frequency	20dB BW (MHz)	99% OBW (MHz)	Frequency range (MHz) $f_L > 2400\text{MHz}$	Frequency range (MHz) $f_H < 2483.5\text{MHz}$	Test Result
2405 MHz	2.12	1.91	2403.9500	-	Complies
2444 MHz	2.22	1.92	-	-	Complies
2474 MHz	2.14	1.91	-	2475.0700	Complies

20 dB/99% Bandwidth Plot on 2405 MHz

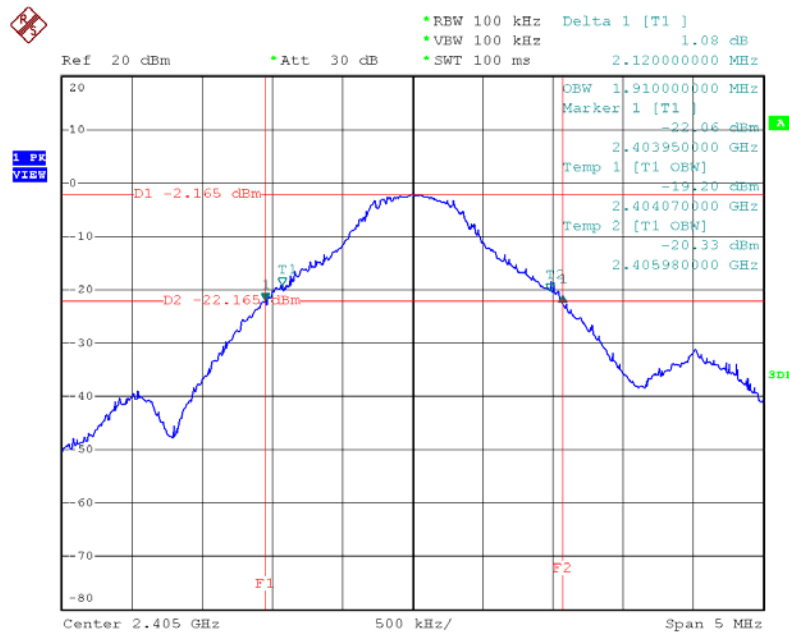


Date: 15.NOV.2012 15:27:04

20 dB/99% Bandwidth Plot on 2444 MHz

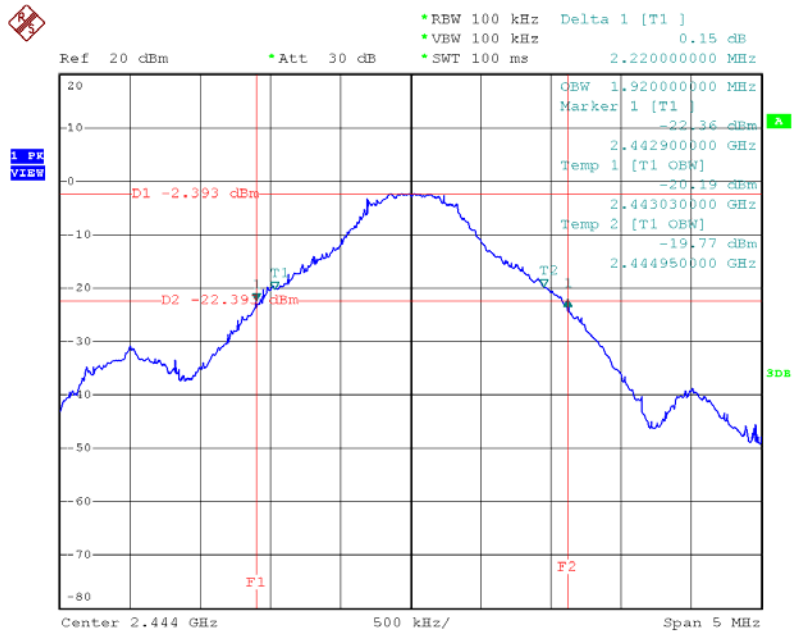

Date: 15.NOV.2012 15:28:47

20 dB/99% Bandwidth Plot on 2474 MHz

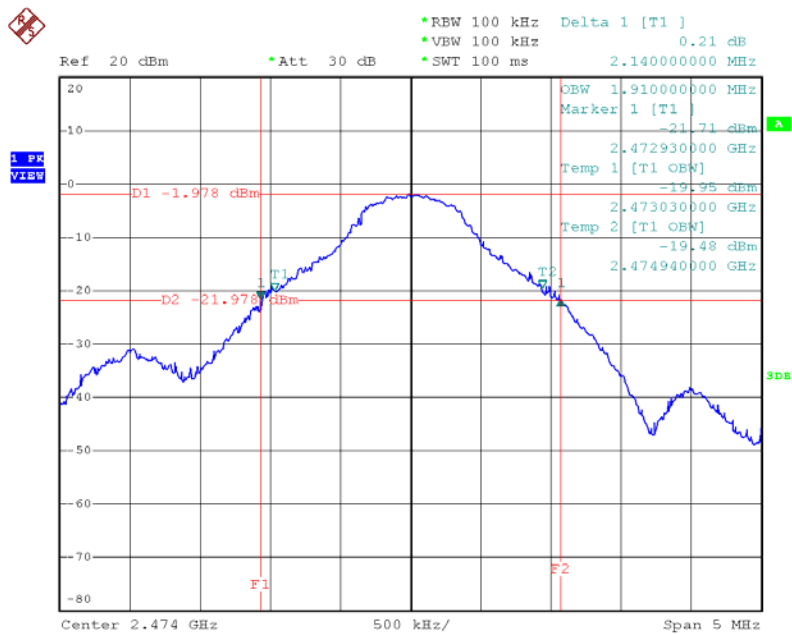

Date: 15.NOV.2012 15:32:24

4.4. Radiated Emissions Measurement

4.4.1. Limit

Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer and receiver.


Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.4.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.4.4. Test Setup Layout

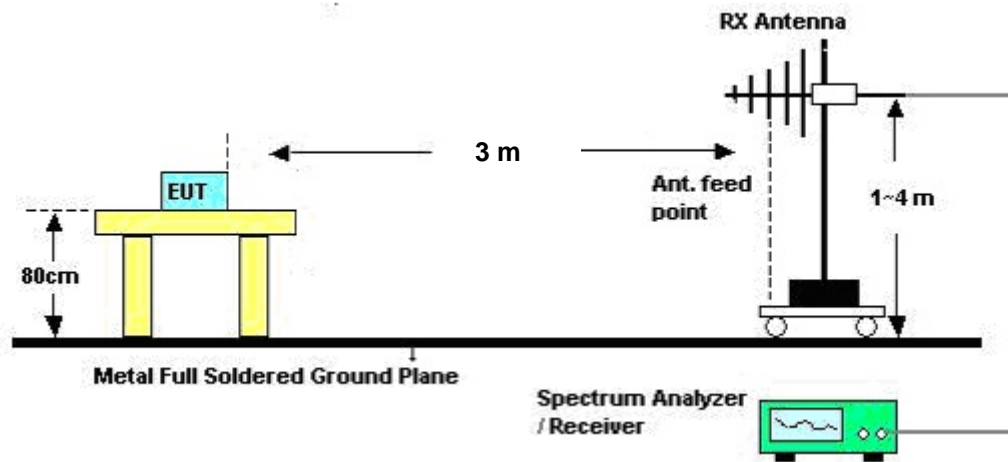

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	24.5°C	Humidity	57%
Test Engineer	Satoshi Yang	Configurations	CTX

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.4.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	24.5°C	Humidity	57%
Test Engineer	Satoshi Yang	Configurations	CTX

Horizontal

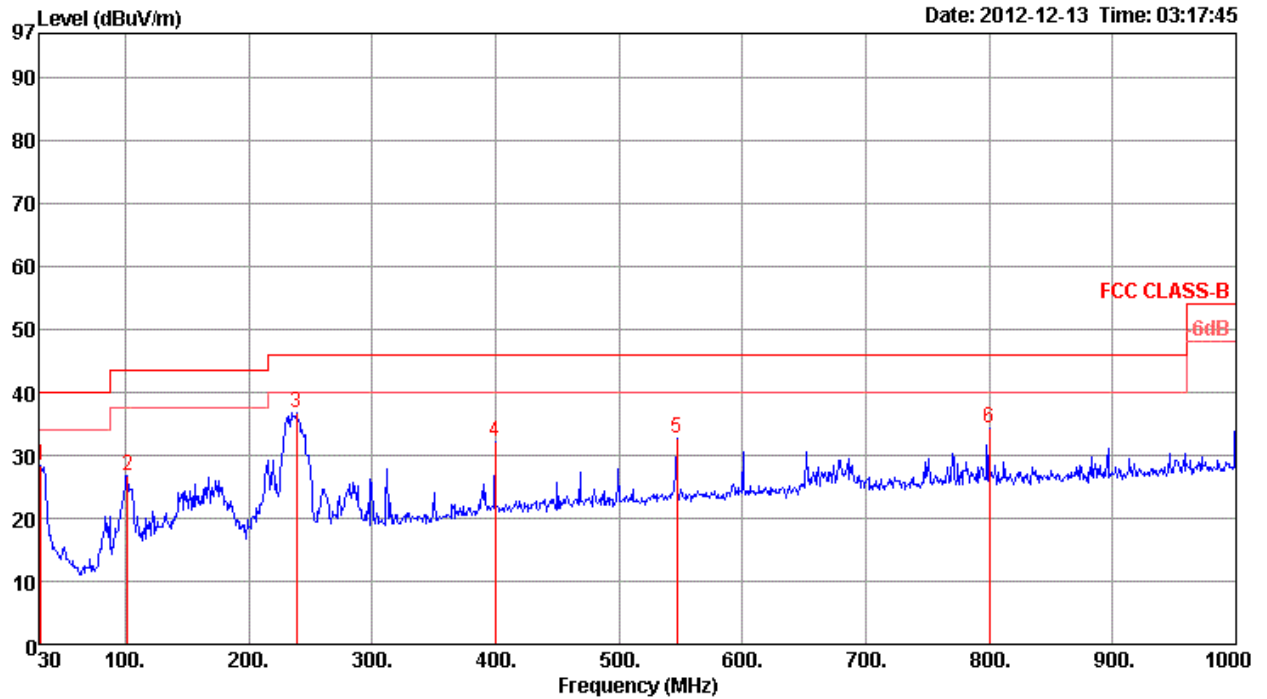

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	31.94	28.36	40.00	-11.64	37.97	0.50	17.69	27.80 Peak	124	0	HORIZONTAL
2	101.78	26.82	43.50	-16.68	42.07	1.20	11.14	27.59 Peak	124	0	HORIZONTAL
3	238.55	36.85	46.00	-9.15	50.11	1.85	11.91	27.02 Peak	124	0	HORIZONTAL
4	399.57	32.10	46.00	-13.90	41.34	2.30	16.06	27.60 Peak	124	0	HORIZONTAL
5	547.01	32.77	46.00	-13.23	39.92	2.79	18.16	28.10 Peak	124	0	HORIZONTAL
6	800.18	34.38	46.00	-11.62	38.91	3.30	19.77	27.60 Peak	124	0	HORIZONTAL

Vertical

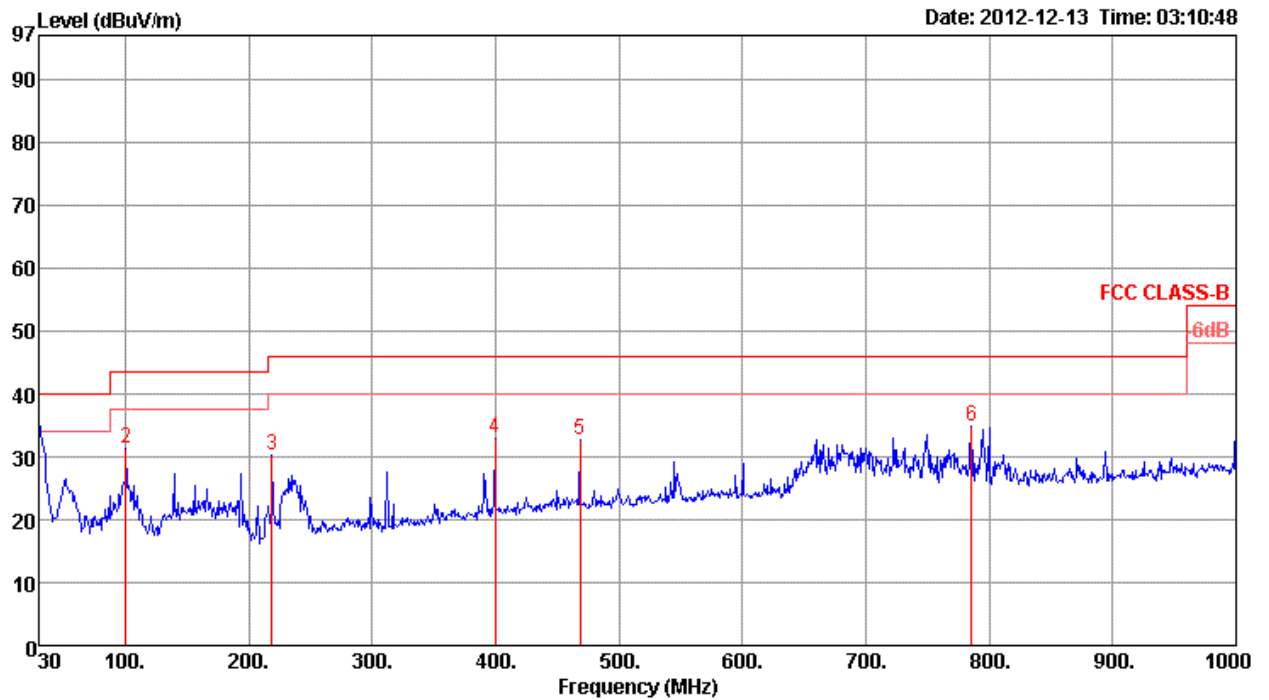

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	30.00	35.34	40.00	-4.66	43.88	0.50	18.76	27.80 Peak	400	0	VERTICAL
2	100.81	31.27	43.50	-12.23	46.61	1.20	11.06	27.60 Peak	400	0	VERTICAL
3	219.15	30.31	46.00	-15.69	45.11	1.78	10.48	27.06 Peak	400	0	VERTICAL
4	399.57	33.08	46.00	-12.92	42.32	2.30	16.06	27.60 Peak	400	0	VERTICAL
5	468.44	32.66	46.00	-13.34	40.83	2.64	17.13	27.94 Peak	400	0	VERTICAL
6	785.63	34.96	46.00	-11.04	39.59	3.36	19.67	27.66 Peak	400	0	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.4.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	20°C	Humidity	63%
Test Engineer	Kenneth Huang	Configurations	Channel 1
Test Date	Dec. 04, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	4802.39	41.99	74.00	-32.01	39.97	4.20	34.70	32.52	Peak	147	100	HORIZONTAL
2 a	4802.39	23.78	54.00	-30.22	21.76	4.20	34.70	32.52	Average	147	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	4804.47	43.51	74.00	-30.49	41.49	4.20	34.70	32.52	Peak	222	100	VERTICAL
2 a	4804.47	25.30	54.00	-28.70	23.28	4.20	34.70	32.52	Average	222	100	VERTICAL



Temperature	20°C	Humidity	63%
Test Engineer	Kenneth Huang	Configurations	Channel 14
Test Date	Dec. 04, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4879.74	44.66	74.00	-29.34	42.45	4.22	34.67	32.66	Peak	50	100	HORIZONTAL
2	4879.74	26.45	54.00	-27.55	24.24	4.22	34.67	32.66	Average	50	100	HORIZONTAL
3 p	7320.09	50.23	74.00	-23.77	42.83	5.35	34.94	36.99	Peak	320	100	HORIZONTAL
4 a	7320.09	32.02	54.00	-21.98	24.62	5.35	34.94	36.99	Average	320	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4879.14	47.26	74.00	-26.74	45.05	4.22	34.67	32.66	Peak	90	100	VERTICAL
2	4879.14	29.05	54.00	-24.95	26.84	4.22	34.67	32.66	Average	90	100	VERTICAL
3 p	7322.45	49.74	74.00	-24.26	42.34	5.35	34.94	36.99	Peak	258	100	VERTICAL
4 a	7322.45	31.53	54.00	-22.47	24.13	5.35	34.94	36.99	Average	258	100	VERTICAL



Temperature	20°C	Humidity	63%
Test Engineer	Kenneth Huang	Configurations	Channel 24
Test Date	Dec. 04, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4960.78	44.22	74.00	-29.78	41.80	4.23	34.64	32.83	Peak	357	100	HORIZONTAL
2	4960.78	24.01	54.00	-29.99	21.59	4.23	34.64	32.83	Average	357	100	HORIZONTAL
3 p	7442.32	49.20	74.00	-24.80	41.67	5.37	34.98	37.14	Peak	294	100	HORIZONTAL
4 a	7442.32	30.99	54.00	-23.01	23.46	5.37	34.98	37.14	Average	294	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4961.06	44.28	74.00	-29.72	41.86	4.23	34.64	32.83	Peak	332	100	VERTICAL
2	4961.06	26.07	54.00	-27.93	23.65	4.23	34.64	32.83	Average	332	100	VERTICAL
3 p	7442.11	48.48	74.00	-25.52	40.95	5.37	34.98	37.14	Peak	3	100	VERTICAL
4 a	7442.11	30.27	54.00	-23.73	22.74	5.37	34.98	37.14	Average	3	100	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5. Band Edge Emissions Measurement

4.5.1. Limit

Band edge emissions radiated outside of the specified frequency bands shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average

4.5.3. Test Procedures

1. The test procedure is the same as section 4.2.3, only the frequency range investigated is limited to 2MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.2.4.

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Band Edge and Fundamental Emissions

Temperature	20°C	Humidity	63%
Test Engineer	Satoshi Yang	Configurations	Channel 1/14/24
Test Date	Dec. 08, 2012		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	2404.69	104.69	114.00	-9.31	73.93	2.92	0.00	27.84	Peak	37	100	HORIZONTAL
2 a	2404.69	86.48	94.00	-7.52	55.72	2.92	0.00	27.84	Average	37	100	HORIZONTAL

Channel 14

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	2444.32	103.47	114.00	-10.53	72.75	2.94	0.00	27.78	Peak	33	103	HORIZONTAL
2 a	2444.32	85.26	94.00	-8.74	54.54	2.94	0.00	27.78	Average	33	103	HORIZONTAL

Channel 24

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1 p	2473.68	103.93	114.00	-10.07	73.24	2.96	0.00	27.73	Peak	339	100	HORIZONTAL
2 a	2473.68	85.72	94.00	-8.28	55.03	2.96	0.00	27.73	Average	339	100	HORIZONTAL

Note:

$$\text{Emission level (dBuV/m)} = 20 \log \text{Emission level (uV/m)}.$$

$$\text{Corrected Reading: Antenna Factor} + \text{Cable Loss} + \text{Read Level} - \text{Preamp Factor} = \text{Level}.$$

4.6. Antenna Requirements

4.6.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further,

4.6.2. Antenna Connector Construction

Please refer to section 3.3 in this test report, antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Sep. 14, 2012	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	4083	150kHz ~ 100MHz	Nov. 14, 2012	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127-478	9K ~ 30MHz	Jun. 22, 2012	Conduction (CO01-CB)
PULSE LIMITER	R&S	ESH3-Z2	100430	9K~30MHz	Feb. 03, 2012	Conduction (CO01-CB)
COND Cable	Woken	Cable	1	0.15MHz~30MHz	Dec. 04, 2011	Conduction (CO01-CB)
COND Cable	Woken	Cable	1	0.15MHz~30MHz	Dec. 04, 2012	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Jan. 11, 2012	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 27, 2011	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 23, 2011	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 27, 2011	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2011	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Jul. 31, 2012	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9KHz~40GHz	Nov. 16, 2012	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9KHz ~ 2.75GHz	Mar. 20, 2012	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 18, 2011	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz - 26.5 GHz	Nov. 18, 2011	Radiation (03CH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-1	N/A	1 GHz – 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz – 26.5 GHz	Nov. 18, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz – 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 18, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 18, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9KHz~40GHz	Oct. 08, 2012	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 05, 2012	Conducted (TH01-CB)
Signal Generator	R&S	SMR40	100302	10MHz-40GHz	Nov. 27, 2011	Conducted (TH01-CB)
Signal Generator	R&S	SMR40	100302	10MHz-40GHz	Nov. 27, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	2 Way	0120A02056002D	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	3 Way	MDC2366	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	4 Way	0120A04056002D	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
Signal generator	R&S	SMU200A	102782	10MHz-40GHz	Sep. 26, 2012	Conducted (TH01-CB)
Horn Antenna	COM-POWER	AH-118	071187	1GHz – 18GHz	May. 09, 2012	Conducted (TH01-CB)
Horn Antenna	COM-POWER	AH-118	071042	1GHz – 18GHz	Dec. 06, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 19, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 19, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 19, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 19, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 19, 2011	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Nov. 28, 2012	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Nov. 27, 2012	Conducted (TH01-CB)
Mixer	OML	M19HW/A	U91113-1	40 ~ 60 GHz	Mar. 23, 2011*	Radiation (TH01-CB)
Mixer	OML	M15HW/A	V91113-1	50 ~ 75 GHz	Mar. 23, 2011*	Radiation (TH01-CB)
Diplexer	OML	DPL313B	N/A	40~200GHz	N.C.R	Radiation (TH01-CB)
Mixer	OML	M12HW/A	E91113-1	60 ~ 90 GHz	Mar. 23, 2011*	Radiation (TH01-CB)
Mixer	OML	M08HW/A	F91113-1	90 ~ 140 GHz	Mar. 23, 2011*	Radiation (TH01-CB)
Mixer	OML	M05HW/A	G91113-1	140 ~ 220 GHz	N.C.R	Radiation (TH01-CB)
Standard Horn Antenna	Custom Microwave	HO19R	U91113-A	40 ~ 60 GHz	N.C.R	Radiation (TH01-CB)
Standard Horn Antenna	Custom Microwave	HO15R	V91113-A	50 ~ 75 GHz	N.C.R	Radiation (TH01-CB)
Standard Horn Antenna	Custom Microwave	HO12R	E91113-A	60 ~ 90 GHz	N.C.R	Radiation (TH01-CB)
Standard Horn Antenna	Custom Microwave	HO08R	F91113-A	90 ~ 140 GHz	N.C.R	Radiation (TH01-CB)
Standard Horn Antenna	Custom Microwave	HO05R	G91113-A	140 ~ 220 GHz	N.C.R	Radiation (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

Note: "*" Calibration Interval of instruments listed above is two years.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085