



SAR EVALUATION REPORT

Applicant Name:

Logitech Far East Ltd.

No. 2, Creation Road IV Science-Based Industrial Park

Hsin-Chu,

Taiwan

Date of Testing:

07/17/17 - 07/19/17

Test Site/Location:

PCTEST Lab, Columbia, MD, USA

Document Serial No.:

1M1707180225-01-R2.JNZ

FCC ID:

JNZS00157

APPLICANT:

LOGITECH

DUT Type:

Portable Speaker

Application Type:

Certification

FCC Rule Part(s):

CFR §2.1093

Model:

S-00157

Serial Number:


Pre-Production [S/N: 212]

Equipment Class	Band & Mode	Tx Frequency	SAR	
			1 gm Body W/kg	10 gm Extremity (W/kg)
DTS	2.4 GHz WLAN	2412 - 2462 MHz	0.21	0.57
NII	U-NII-1	5180 - 5240 MHz	0.66	0.72
NII	U-NII-2A	5260 - 5320 MHz	N/A	N/A
NII	U-NII-2C	5500 - 5720 MHz	0.55	0.75
NII	U-NII-3	5745 - 5825 MHz	1.08	1.27
DSS/DTS	Bluetooth	2402 - 2480 MHz	< 0.1	< 0.1
Simultaneous SAR per KDB 690783 D01v01r03:			1.09	1.29

Note: This revised Test Report (S/N: 1M1707180225-01-R2.JNZ) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.



This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.7 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.


Randy Ortanez
President





The SAR Tick is an initiative of the Mobile Manufacturers Forum (MMF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MMF. Further details can be obtained by emailing: sartick@mmfai.info.

FCC ID: JNZS00157		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1707180225-01-R2.JNZ	Test Dates: 07/17/17 - 07/19/17	DUT Type: Portable Speaker		Page 1 of 27

T A B L E O F C O N T E N T S

1	DEVICE UNDER TEST	3
2	INTRODUCTION	7
3	DOSIMETRIC ASSESSMENT	8
4	TEST CONFIGURATION POSITIONS.....	9
5	RF EXPOSURE LIMITS	10
6	FCC MEASUREMENT PROCEDURES.....	11
7	RF CONDUCTED POWERS	13
8	SYSTEM VERIFICATION.....	15
9	SAR DATA SUMMARY	17
10	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	19
11	SAR MEASUREMENT VARIABILITY	22
12	EQUIPMENT LIST	23
13	MEASUREMENT UNCERTAINTIES.....	24
14	CONCLUSION.....	25
15	REFERENCES	26
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES		
APPENDIX D: SAR TISSUE SPECIFICATIONS		
APPENDIX E: SAR SYSTEM VALIDATION		
APPENDIX F: DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS		

FCC ID: JNZS00157		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1707180225-01-R2.JNZ	Test Dates: 07/17/17 - 07/19/17	DUT Type: Portable Speaker	Page 2 of 27	

1 DEVICE UNDER TEST

1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
2.4 GHz WLAN	Data	2412 - 2462 MHz
U-NII-1	Data	5180 - 5240 MHz
U-NII-2A	Data	5260 - 5320 MHz
U-NII-2C	Data	5500 - 5720 MHz
U-NII-3	Data	5745 - 5825 MHz
Bluetooth	Data	2402 - 2480 MHz



1.2 Power Reduction for SAR

There is no power reduction used for any band/mode implemented in this device for SAR purposes.

1.3 Nominal and Maximum Output Power Specifications



This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

Mode / Band		Modulated Average - Single Tx Chain		
		Ch. 1-5	Ch. 6	Ch. 7-11
IEEE 802.11b (2.4 GHz)	Maximum	21.0		
	Nominal	20.5		
IEEE 802.11g (2.4 GHz)	Maximum	19.5	21.5	19.75
	Nominal	19.0	21.0	19.25
IEEE 802.11n (2.4 GHz)	Maximum	18.75	22.0	19.5
	Nominal	18.25	21.5	19.0

FCC ID: JNZS00157		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1707180225-01-R2.JNZ	Test Dates: 07/17/17 - 07/19/17	DUT Type: Portable Speaker	Page 3 of 27	

Mode / Band		Modulated Average - Single Tx Chain (dBm)					
		20 MHz Bandwidth			40 MHz Bandwidth		
IEEE 802.11a U-NII-1 (5 GHz)	Channels	36-44	48				
	Maximum	15.5	16.0				
	Nominal	15.0	15.5				
IEEE 802.11a U-NII-2A (5 GHz)	Channels	52-56	60	64			
	Maximum	15.5	16.25	16.5			
	Nominal	15.0	15.75	16.0			
IEEE 802.11a U-NII-2C (5 GHz)	Channels	100-112	116	120-144			
	Maximum	16.5	17.0	16.0			
	Nominal	16.0	16.5	15.5			
IEEE 802.11a U-NII-3 (5 GHz)	Channels	149-165					
	Maximum	16.75					
	Nominal	16.25					
IEEE 802.11n U-NII-1 (5 GHz)	Channels	36-40	44-48		38	46	
	Maximum	15.75	15.5		14.5	17.5	
	Nominal	15.25	15.0		14.0	17.0	
IEEE 802.11n U-NII-2A (5 GHz)	Channels	52-56	60	64	54	62	
	Maximum	15.5	16.0	16.75	17.25	15.0	
	Nominal	15.0	15.5	16.25	16.75	14.5	
IEEE 802.11n U-NII-2C (5 GHz)	Channels	100-112	116	120-144	102	110	118-142
	Maximum	16.0	17.0	15.0	14.25	17.5	17.0
	Nominal	15.5	16.5	14.5	13.75	17.0	16.5
IEEE 802.11n U-NII-3 (5 GHz)	Channels	149-153	157-165		151-159		
	Maximum	17.5	17.75		18.75		
	Nominal	17.0	17.25		18.25		

Mode / Band		Modulated Average (dBm)
Bluetooth	Maximum	3.5
	Nominal	3.0
Bluetooth LE	Maximum	8.5
	Nominal	8.0

FCC ID: JNZS00157		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1707180225-01-R2.JNZ	Test Dates: 07/17/17 - 07/19/17	DUT Type: Portable Speaker		Page 4 of 27

1.4 DUT Antenna Locations

A diagram showing the location of the device antennas can be found in Appendix F.

Table 1-1
Device Edges/Sides for SAR Testing

Mode	Top	Bottom	Side
2.4 GHz WLAN	No	No	Yes
5 GHz WLAN	No	No	Yes
Bluetooth	Yes	No	Yes

Note:

1. Particular DUT edges were not required to be evaluated for SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D0701r02. The distances between the transmit antennas and the edges of the device are included in the filing.
2. This device is a cylinder with flat top and bottom faces. Please see section 4.3 for more details about SAR Test Setup

1.5 Simultaneous Transmission Capabilities



According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06 4.3.2 procedures.

Table 1-2
Simultaneous Transmission Scenarios

No.	Capable Transmit Configuration	Body	Extremity	Notes
1	2.4 GHz WI-FI Chain0 + 2.4 GHz Bluetooth	Yes	Yes	
2	5 GHz WI-FI Chain0 + 2.4 GHz Bluetooth	Yes	Yes	
3	2.4 GHz WI-FI Chain1 + 2.4 GHz Bluetooth	Yes	Yes	
4	5 GHz WI-FI Chain1 + 2.4 GHz Bluetooth	Yes	Yes	
5	2.4 GHz WI-FI Chain0 + 2.4 GHz WI-FI Chain1	No	No	
6	5 GHz WI-FI Chain0 + 2.4 GHz WI-FI Chain1	No	No	
7	2.4 GHz WI-FI Chain0 + 5 GHz WI-FI Chain1	No	No	
8	5 GHz WI-FI Chain0 + 5 GHz WI-FI Chain1	No	No	

1. 2.4 GHz WLAN and 5 GHz WLAN share the same antenna path and cannot transmit simultaneously.

FCC ID: JNZS00157		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1707180225-01-R2.JNZ	Test Dates: 07/17/17 - 07/19/17	DUT Type: Portable Speaker		Page 5 of 27

1.6 Miscellaneous SAR Test Considerations



(A) WIFI/BT

Since U-NII-1 band has a higher maximum output power than U-NII-2A band and the highest reported SAR for U-NII-1 is less than 1.2 W/kg, SAR is not required for U-NII-2A band according to FCC KDB Publication 248227 D01v02r02.

This device supports two WLAN antennas which share the same transmission path (Chain0 and Chain1). They are identical and share the same powers and targets and cannot transmit simultaneously.

1.7 Guidance Applied

- FCC KDB Publication 248227 D01v02r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v06 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 941225 D07v01r02 (UMPC Mini Tablet)

FCC ID: JNZS00157		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1707180225-01-R2.JNZ	Test Dates: 07/17/17 - 07/19/17	DUT Type: Portable Speaker		Page 6 of 27

2 INTRODUCTION

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

2.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 2-1).

Equation 2-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$



SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: JNZS00157		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1707180225-01-R2.JNZ	Test Dates: 07/17/17 - 07/19/17	DUT Type: Portable Speaker		Page 7 of 27

3 DOSIMETRIC ASSESSMENT

3.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 3-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 3-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 3-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.






Figure 3-1
Sample SAR Area Scan

Table 3-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{\text{zoomTV}}, \Delta y_{\text{zoom}}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
			$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	$\Delta z_{\text{zoom}}(n>1)^*$	
≤2 GHz	≤15	≤8	≤5	≤4	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥30
2-3 GHz	≤12	≤5	≤5	≤4	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥30
3-4 GHz	≤12	≤5	≤4	≤3	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥28
4-5 GHz	≤10	≤4	≤3	≤2.5	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥25
5-6 GHz	≤10	≤4	≤2	≤2	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥22

*Also compliant to IEEE 1528-2013 Table 6

FCC ID: JNZS00157		SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1M1707180225-01-R2.JNZ	Test Dates: 07/17/17 - 07/19/17	DUT Type: Portable Speaker			Page 8 of 27

4 TEST CONFIGURATION POSITIONS

4.1 Device Holder



The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

4.2 SAR Testing for UMPC Mini-Tablet Devices per KDB Publication 941225 D07v01r02

Per FCC guidance, procedures from FCC KDB Publication 941225 D07v01r02 were followed when testing this device. Per FCC KDB Publication 941225 D07v01r02, the top surface (BT) and side of the device (BT & WLAN) should be tested for SAR compliance at 0mm for 10g-SAR (Extremity) and at 10mm for 1g-SAR (Body). The SAR Exclusion Threshold in KDB 941225 D07v01r02 of all surfaces and side edges with a transmitting antenna located at ≤ 25 mm from that surface or edge can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent device surface is used to determine if SAR testing is required for the adjacent surface, with the adjacent surface positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

4.3 SAR Test Positioning Based on Form Factor

This device is a cylinder with flat top and bottom faces. When testing the curved side of the device, the device was positioned under the phantom with the long side parallel to the bottom of the phantom. The worst case orientation of the device in this position for SAR testing was determined for each band, mode, and antenna. SAR test setup photos can be found in Appendix F.

FCC ID: JNZS00157		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1707180225-01-R2.JNZ	Test Dates: 07/17/17 - 07/19/17	DUT Type: Portable Speaker		Page 9 of 27

5 RF EXPOSURE LIMITS

5.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.



5.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 5-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: JNZS00157		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1707180225-01-R2.JNZ	Test Dates: 07/17/17 - 07/19/17	DUT Type: Portable Speaker		Page 10 of 27

6 FCC MEASUREMENT PROCEDURES

6.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

6.2 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r02 for more details.

6.2.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.



A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

6.2.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg.

6.2.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. Each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

FCC ID: JNZS00157		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1707180225-01-R2.JNZ	Test Dates: 07/17/17 - 07/19/17	DUT Type: Portable Speaker		Page 11 of 27

6.2.4 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

6.2.5 OFDM Transmission Mode and SAR Test Channel Selection

When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.



6.2.6 Initial Test Configuration Procedure

For OFDM, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order IEEE 802.11 mode. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements (See Section 6.2.5).

6.2.7 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg, no additional SAR tests for the subsequent test configurations are required.

FCC ID: JNZS00157		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1707180225-01-R2.JNZ	Test Dates: 07/17/17 - 07/19/17	DUT Type: Portable Speaker		Page 12 of 27

7 RF CONDUCTED POWERS

7.1 WLAN Conducted Powers

Table 7-1
2.4 GHz Average RF Power



2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	20.60	19.14	18.30
2437	6	20.65	21.18	21.55
2462	11	20.69	19.31	19.16

Table 7-2
5 GHz Average RF Power

5GHz (40MHz) Conducted Power [dBm]		
Freq [MHz]	Channel	IEEE Transmission Mode
		802.11n
		Average
5190	38	13.99
5230	46	16.95
5270	54	16.77
5310	62	14.55
5510	102	13.73
5550	110	17.04
5670	134	16.51
5755	151	18.27
5795	159	18.30

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported.
- The bolded data rate and channel above were tested for SAR.

FCC ID: JNZS00157		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1707180225-01-R2.JNZ	Test Dates: 07/17/17 - 07/19/17	DUT Type: Portable Speaker		Page 13 of 27

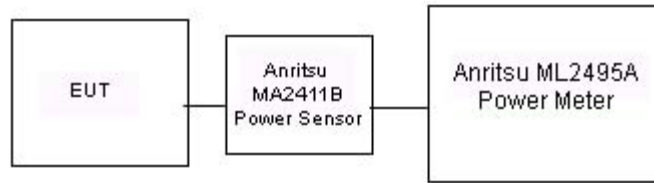


Figure 7-1
Power Measurement Setup for Bandwidths < 50 MHz

7.2 Bluetooth LE Conducted Powers



Table 7-3
Bluetooth LE Average RF Power

Frequency [MHz]	Data Rate [Mbps]	Channel No.	Bluetooth Mode	Average Conducted Power	
				[dBm]	[mW]
2402	1.0	0	LE	7.02	5.035
2440	1.0	19	LE	7.82	6.053
2480	1.0	39	LE	8.38	6.887

Note: The bolded data rates and channel above were tested for SAR.



Figure 7-2
Power Measurement Setup

FCC ID: JNZS00157		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1707180225-01-R2.JNZ	Test Dates: 07/17/17 - 07/19/17	DUT Type: Portable Speaker		Page 14 of 27



8 SYSTEM VERIFICATION

8.1 Tissue Verification

Table 8-1
Measured Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
07/17/2017	2450B	23.5	2400	1.885	52.067	1.902	52.767	-0.89%	-1.33%
			2450	1.944	51.893	1.950	52.700	-0.31%	-1.53%
			2500	2.018	51.682	2.021	52.636	-0.15%	-1.81%
07/19/2017	2450B	21.7	2400	1.968	52.026	1.902	52.767	3.47%	-1.40%
			2450	2.033	51.829	1.950	52.700	4.26%	-1.65%
			2500	2.108	51.639	2.021	52.636	4.30%	-1.89%
07/17/2017	5200B-5800B	21.0	5180	5.361	47.846	5.276	49.041	1.61%	-2.44%
			5200	5.393	47.833	5.299	49.014	1.77%	-2.41%
			5220	5.432	47.797	5.323	48.987	2.05%	-2.43%
			5240	5.457	47.730	5.346	48.960	2.08%	-2.51%
			5260	5.477	47.704	5.369	48.933	2.01%	-2.51%
			5280	5.509	47.663	5.393	48.906	2.15%	-2.54%
			5300	5.520	47.603	5.416	48.879	1.92%	-2.61%
			5320	5.553	47.604	5.439	48.851	2.10%	-2.55%
			5500	5.803	47.304	5.650	48.607	2.71%	-2.68%
			5520	5.840	47.231	5.673	48.580	2.94%	-2.78%
			5540	5.854	47.232	5.696	48.553	2.77%	-2.72%
			5560	5.876	47.146	5.720	48.526	2.73%	-2.84%
			5580	5.915	47.137	5.743	48.499	2.99%	-2.81%
			5600	5.955	47.069	5.766	48.471	3.28%	-2.89%
			5620	5.969	47.042	5.790	48.444	3.09%	-2.89%
			5640	6.012	47.027	5.813	48.417	3.42%	-2.87%
			5660	6.026	47.017	5.837	48.390	3.24%	-2.84%
			5680	6.048	46.965	5.860	48.363	3.21%	-2.89%
			5700	6.088	46.880	5.883	48.336	3.48%	-3.01%
			5745	6.154	46.831	5.936	48.275	3.67%	-2.99%
			5765	6.161	46.860	5.959	48.248	3.39%	-2.88%
			5785	6.215	46.803	5.982	48.220	3.90%	-2.94%
			5800	6.230	46.770	6.000	48.200	3.83%	-2.97%
			5805	6.234	46.763	6.006	48.193	3.80%	-2.97%
			5825	6.266	46.692	6.029	48.166	3.93%	-3.06%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

FCC ID: JNZS00157		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1707180225-01-R2.JNZ	Test Dates: 07/17/17 - 07/19/17	DUT Type: Portable Speaker		Page 15 of 27

8.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.

Table 8-2
System Verification Results – 1g

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR _{1g} (W/kg)	1 W Target SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation _{1g} (%)
K	2450	BODY	07/17/2017	20.8	22.0	0.100	797	7406	5.010	50.700	50.100	-1.18%
K	2450	BODY	07/19/2017	22.9	21.7	0.100	797	7406	5.220	50.700	52.200	2.96%
D	5250	BODY	07/17/2017	22.1	21.0	0.050	1123	3589	3.790	75.900	75.800	-0.13%
D	5600	BODY	07/17/2017	22.1	21.0	0.050	1123	3589	4.000	78.900	80.000	1.39%
D	5750	BODY	07/17/2017	22.1	21.0	0.050	1123	3589	3.640	76.300	72.800	-4.59%

Table 8-3
System Verification Results – 10g

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR _{10g} (W/kg)	1 W Target SAR _{10g} (W/kg)	1 W Normalized SAR _{10g} (W/kg)	Deviation _{10g} (%)
K	2450	BODY	07/17/2017	20.8	22.0	0.100	797	7406	2.280	24.200	22.800	-5.79%
D	5250	BODY	07/17/2017	22.1	21.0	0.050	1123	3589	1.050	21.300	21.000	-1.41%
D	5600	BODY	07/17/2017	22.1	21.0	0.050	1123	3589	1.100	22.100	22.000	-0.45%
D	5750	BODY	07/17/2017	22.1	21.0	0.050	1123	3589	1.000	21.300	20.000	-6.10%

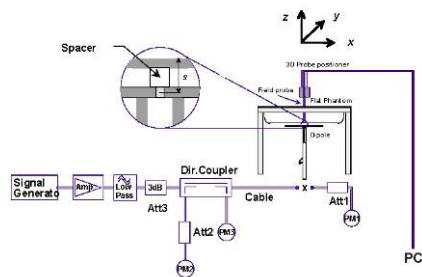




Figure 8-1
System Verification Setup Diagram



Figure 8-2
System Verification Setup Photo

FCC ID: JNZS00157		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1707180225-01-R2.JNZ	Test Dates: 07/17/17 - 07/19/17	DUT Type: Portable Speaker		Page 16 of 27

9

SAR DATA SUMMARY

9.1 Standalone Body SAR Data

Table 9-1
WLAN Body SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Position	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
2462	11	802.11b	DSSS	22	21.00	20.69	0.19	10 mm	Chain0	212	1	side	99.5	0.199	0.133	1.074	1.005	0.144	
2462	11	802.11b	DSSS	22	21.00	20.69	-0.15	10 mm	Chain1	212	1	side	99.5	0.283	0.198	1.074	1.005	0.214	A1
5230	46	802.11n	OFDM	40	17.50	16.95	0.00	10 mm	Chain0	212	13.5	side	96.7	0.750	0.386	1.135	1.034	0.453	
5230	46	802.11n	OFDM	40	17.50	16.95	-0.05	10 mm	Chain1	212	13.5	side	96.7	1.211	0.561	1.135	1.034	0.658	
5550	110	802.11n	OFDM	40	17.50	17.04	-0.05	10 mm	Chain0	212	13.5	side	96.7	1.013	0.454	1.112	1.034	0.522	
5550	110	802.11n	OFDM	40	17.50	17.04	0.04	10 mm	Chain1	212	13.5	side	96.7	1.061	0.481	1.112	1.034	0.553	
5795	159	802.11n	OFDM	40	18.75	18.30	0.02	10 mm	Chain0	212	13.5	side	96.7	1.412	0.685	1.109	1.034	0.785	
5755	151	802.11n	OFDM	40	18.75	18.27	0.01	10 mm	Chain1	212	13.5	side	96.7	1.972	0.932	1.117	1.034	1.076	A2
5795	159	802.11n	OFDM	40	18.75	18.30	0.13	10 mm	Chain1	212	13.5	side	96.7	1.531	0.739	1.109	1.034	0.847	
5755	151	802.11n	OFDM	40	18.75	18.27	-0.05	10 mm	Chain1	212	13.5	side	96.7	1.831	0.922	1.117	1.034	1.065	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

Note: Blue entry represent variability data.

Table 9-2
Bluetooth Body SAR

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Position	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Factor)	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)			(W/kg)	
2480	39	Bluetooth LE	FHSS	8.5	8.38	0.14	10 mm	212	1	top	61.4	0.006	1.028	1.629	0.010	
2480	39	Bluetooth LE	FHSS	8.5	8.38	-0.15	10 mm	212	1	side	61.4	0.008	1.028	1.629	0.013	A3
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram									

9.2 Standalone Extremity SAR Data

Table 9-3
WLAN Extremity SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Position	Duty Cycle (%)	Peak SAR of Area Scan	SAR (10g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (10g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
2462	11	802.11b	DSSS	22	21.00	20.69	0.11	0 mm	Chain0	212	1	side	99.5	0.711	0.214	1.074	1.005	0.231	
2462	11	802.11b	DSSS	22	21.00	20.69	0.15	0 mm	Chain1	212	1	side	99.5	1.621	0.524	1.074	1.005	0.566	A4
5230	46	802.11n	OFDM	40	17.50	16.95	0.01	0 mm	Chain0	212	13.5	side	96.7	4.011	0.601	1.135	1.034	0.705	
5230	46	802.11n	OFDM	40	17.50	16.95	0.08	0 mm	Chain1	212	13.5	side	96.7	3.650	0.616	1.135	1.034	0.723	
5550	110	802.11n	OFDM	40	17.50	17.04	-0.05	0 mm	Chain0	212	13.5	side	96.7	4.201	0.654	1.112	1.034	0.752	
5550	110	802.11n	OFDM	40	17.50	17.04	0.03	0 mm	Chain1	212	13.5	side	96.7	2.822	0.475	1.112	1.034	0.546	
5755	151	802.11n	OFDM	40	18.75	18.27	-0.01	0 mm	Chain0	212	13.5	side	96.7	5.960	1.100	1.117	1.034	1.270	A5
5795	159	802.11n	OFDM	40	18.75	18.30	0.03	0 mm	Chain0	212	13.5	side	96.7	6.389	1.020	1.109	1.034	1.170	
5795	159	802.11n	OFDM	40	18.75	18.30	0.07	0 mm	Chain1	212	13.5	side	96.7	3.414	0.616	1.109	1.034	0.706	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Extremity 4.0 W/kg (mW/g) averaged over 10 grams											



FCC ID: JNZS00157		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1707180225-01-R2.JNZ	Test Dates: 07/17/17 - 07/19/17	DUT Type: Portable Speaker		Page 17 of 27

Table 9-4
Bluetooth Extremity SAR

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Position	Duty Cycle (%)	SAR (10g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Factor)	Reported SAR (10g)	Plot #
MHz	Ch.											(W/kg)			(W/kg)	
2480	39	Bluetooth LE	FHSS	8.5	8.38	0.10	0 mm	212	1	top	61.4	0.006	1.028	1.629	0.010	
2480	39	Bluetooth LE	FHSS	8.5	8.38	-0.14	0 mm	212	1	side	61.4	0.012	1.028	1.629	0.020	A6
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Extremity 4.0 W/kg (mW/g) averaged over 10 grams									

9.3 SAR Test Notes

General Notes:



1. The test data reported are the worst-case SAR values according to test procedures specified in FCC KDB Publication 941225 D07v01r02 and FCC KDB Publication 447498 D01v06.
2. Batteries are fully charged at the beginning of the SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
6. Per FCC KDB 865664 D01v01r04, variability SAR tests were performed when the measured SAR results for a frequency band were greater than or equal to 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 11 for variability analysis.
7. FCC KDB Publication 941225 D07v01r02, SAR tests are required for the top surface (BT) and side of the device (BT & WLAN) with the device touching the phantom (0mm) for 10g SAR and at 10 mm for 1g SAR. The SAR Exclusion Threshold in FCC KDB 941225 D07v01r02 was applied to determine SAR test exclusion for adjacent edge configurations.

WLAN Notes:

1. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 6.2.4 for more information.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg. See Section 6.2.5 for more information.
3. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg and 10g average SAR is ≤ 2.0 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported 1g SAR result was ≤ 1.20 W/kg and 10g SAR was ≤ 3.0 W/kg or all test channels were measured.
4. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated EMC test reports.

Bluetooth Note:

Per October 2016 TCB Workshop Notes, the reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated EMC test reports.

FCC ID: JNZS00157		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1707180225-01-R2.JNZ	Test Dates: 07/17/17 - 07/19/17	DUT Type: Portable Speaker		Page 18 of 27

10 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

10.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to devices with built-in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

10.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB Publication 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is ≤ 1.6 W/kg. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1-g or 10-g SAR.

10.3 Body SAR Simultaneous Transmission Analysis

Table 10-1
Simultaneous Transmission Scenario (Bluetooth + 2.4 GHz WLAN Chain0 at 1.0 cm)

Exposure Condition	Bluetooth SAR (W/kg)	2.4 GHz WLAN Chain0 SAR (W/kg)	Σ SAR (W/kg)
1g Body SAR	0.013	0.144	0.157

Table 10-2
Simultaneous Transmission Scenario (Bluetooth + 2.4 GHz WLAN Chain1 at 1.0 cm)

Exposure Condition	Bluetooth SAR (W/kg)	2.4 GHz WLAN Chain1 SAR (W/kg)	Σ SAR (W/kg)
1g Body SAR	0.013	0.214	0.227

Table 10-3
Simultaneous Transmission Scenario (Bluetooth + 5 GHz WLAN Chain0 at 1.0 cm)

Exposure Condition	Bluetooth SAR (W/kg)	5 GHz WLAN Chain0 SAR (W/kg)	Σ SAR (W/kg)
1g Body SAR	0.013	0.785	0.798



FCC ID: JNZS00157		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1707180225-01-R2.JNZ	Test Dates: 07/17/17 - 07/19/17	DUT Type: Portable Speaker	Page 19 of 27	

Table 10-4
Simultaneous Transmission Scenario (Bluetooth + 5 GHz WLAN Chain1 at 1.0 cm)

Exposure Condition	Bluetooth SAR (W/kg)	5 GHz WLAN Chain1 SAR (W/kg)	Σ SAR (W/kg)
1g Body SAR	0.013	1.076	1.089

10.4 Extremity SAR Simultaneous Transmission Analysis

Table 10-5
Simultaneous Transmission Scenario (Bluetooth + 2.4 GHz WLAN Chain0 at 0.0 cm)

Exposure Condition	Bluetooth SAR (W/kg)	2.4 GHz WLAN Chain0 SAR (W/kg)	Σ SAR (W/kg)
10g Extremity SAR	0.020	0.231	0.251

Table 10-6
Simultaneous Transmission Scenario (Bluetooth + 2.4 GHz WLAN Chain1 at 0.0 cm)



Exposure Condition	Bluetooth SAR (W/kg)	2.4 GHz WLAN Chain1 SAR (W/kg)	Σ SAR (W/kg)
10g Extremity SAR	0.020	0.566	0.586

Table 10-7
Simultaneous Transmission Scenario (Bluetooth + 5 GHz WLAN Chain0 at 0.0 cm)

Exposure Condition	Bluetooth SAR (W/kg)	5 GHz WLAN Chain0 SAR (W/kg)	Σ SAR (W/kg)
10g Extremity SAR	0.020	1.270	1.290



Table 10-8
Simultaneous Transmission Scenario (Bluetooth + 5 GHz WLAN Chain1 at 0.0 cm)

Exposure Condition	Bluetooth SAR (W/kg)	5 GHz WLAN Chain1 SAR (W/kg)	Σ SAR (W/kg)
10g Extremity SAR	0.020	0.723	0.743

FCC ID: JNZS00157	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1707180225-01-R2.JNZ	Test Dates: 07/17/17 - 07/19/17	DUT Type: Portable Speaker		Page 20 of 27

10.5 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528-2013 Section 6.3.4.1.2.

FCC ID: JNZS00157		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1707180225-01-R2.JNZ	Test Dates: 07/17/17 - 07/19/17	DUT Type: Portable Speaker	Page 21 of 27	

11 SAR MEASUREMENT VARIABILITY

11.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:



- 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

Table 11-1
Body SAR Measurement Variability Results

BODY VARIABILITY RESULTS														
Band	FREQUENCY		Mode	Service	Data Rate (Mbps)	Position	Spacing	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.						(W/kg)	(W/kg)		(W/kg)		(W/kg)	
5750	5755.00	151	802.11n, 40 MHz Bandwidth	OFDM, Chain1	13.5	side	10 mm	0.932	0.922	1.01	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram							

11.2 Measurement Uncertainty



The measured SAR was < 1.5 W/kg for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

FCC ID: JNZS00157		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1707180225-01-R2.JNZ	Test Dates: 07/17/17 - 07/19/17	DUT Type: Portable Speaker		Page 22 of 27

12 EQUIPMENT LIST



Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	E8257D	(250kHz-20GHz) Signal Generator	3/22/2017	Annual	3/22/2018	MY45470194
Agilent	8594A	(9kHz-2.9GHz) Spectrum Analyzer	N/A	N/A	N/A	3051A00187
Agilent	E4438C	ESG Vector Signal Generator	3/24/2017	Biennial	3/24/2019	MY42082385
Agilent	N9020A	MXA Signal Analyzer	10/28/2016	Annual	10/28/2017	US46470561
Agilent	N5182A	MXG Vector Signal Generator	10/27/2016	Annual	10/27/2017	MY47420603
Agilent	8753ES	S-Parameter Network Analyzer	10/26/2016	Annual	10/26/2017	US39170118
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433971
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433972
Anritsu	ML2495A	Power Meter	10/16/2015	Biennial	10/16/2017	941001
Anritsu	MA2411B	Pulse Power Sensor	8/18/2016	Annual	8/18/2017	1126066
Anritsu	MA2411B	Pulse Power Sensor	2/10/2017	Annual	2/10/2018	1207364
Anritsu	MA24106A	USB Power Sensor	6/7/2017	Annual	6/7/2018	1231535
Anritsu	MA24106A	USB Power Sensor	6/7/2017	Annual	6/7/2018	1231538
COMTech	AR85729-5	Solid State Amplifier	CBT	N/A	CBT	M155A00-009
Control Company	4040	Therm./Clock/Humidity Monitor	3/31/2017	Biennial	3/31/2019	170232394
Control Company	4352	Ultra Long Stem Thermometer	3/8/2016	Biennial	3/8/2018	160261694
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/1/2017	Annual	6/1/2018	MY53401181
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
MiniCircuits	SLP-2400+	Low Pass Filter	CBT	N/A	CBT	R8979500903
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1226
Mitutoyo	CD-6"CSX	Digital Caliper	3/2/2016	Biennial	3/2/2018	13264162
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	N/A	CBT	N/A
Narda	BW-S3W2	Attenuator (3dB)	CBT	N/A	CBT	120
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	NC-100	Torque Wrench	3/8/2017	Annual	3/8/2018	N/A
SPEAG	D2450V2	2450 MHz SAR Dipole	9/13/2016	Annual	9/13/2017	797
SPEAG	D5GHZV2	5 GHz SAR Dipole	3/9/2017	Annual	3/9/2018	1123
SPEAG	DAE4	Dasy Data Acquisition Electronics	4/11/2017	Annual	4/11/2018	1407
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/16/2017	Annual	1/16/2018	1466
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/10/2017	Annual	5/10/2018	1070
SPEAG	EX3DV4	SAR Probe	1/13/2017	Annual	1/13/2018	3589
SPEAG	EX3DV4	SAR Probe	4/18/2017	Annual	4/18/2018	7406

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

FCC ID: JNZS00157		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1707180225-01-R2.JNZ	Test Dates: 07/17/17 - 07/19/17	DUT Type: Portable Speaker		Page 23 of 27

13 MEASUREMENT UNCERTAINTIES

a	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System								
Probe Calibration	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	2.0	R	1.73	1.0	1.0	1.2	1.2	∞
Linearity	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	0.25	R	1.73	1.0	1.0	0.1	0.1	∞
Readout Electronics	0.3	N	1	1.0	1.0	0.3	0.3	∞
Response Time	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions - Noise	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
RF Ambient Conditions - Reflections	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	6.7	R	1.73	1.0	1.0	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Test Sample Related								
Test Sample Positioning	2.7	N	1	1.0	1.0	2.7	2.7	35
Device Holder Uncertainty	1.67	N	1	1.0	1.0	1.7	1.7	5
Output Power Variation - SAR drift measurement	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
SAR Scaling	0.0	R	1.73	1.0	1.0	0.0	0.0	∞
Phantom & Tissue Parameters								
Phantom Uncertainty (Shape & Thickness tolerances)	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	4.2	N	1	0.78	0.71	3.3	3.0	10
Liquid Permittivity - measurement uncertainty	4.1	N	1	0.23	0.26	1.0	1.1	10
Liquid Conductivity - Temperature Uncertainty	3.4	R	1.73	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	0.6	R	1.73	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Combined Standard Uncertainty (k=1)	RSS					11.5	11.3	60
Expanded Uncertainty (95% CONFIDENCE LEVEL)	k=2					23.0	22.6	



FCC ID: JNZS00157		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1707180225-01-R2.JNZ	Test Dates: 07/17/17 - 07/19/17	DUT Type: Portable Speaker		Page 24 of 27

14 CONCLUSION

14.1 Measurement Conclusion



The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]



FCC ID: JNZS00157		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1707180225-01-R2.JNZ	Test Dates: 07/17/17 - 07/19/17	DUT Type: Portable Speaker		Page 25 of 27

15 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

FCC ID: JNZS00157		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1707180225-01-R2.JNZ	Test Dates: 07/17/17 - 07/19/17	DUT Type: Portable Speaker		Page 26 of 27

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: JNZS00157		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1707180225-01-R2.JNZ	Test Dates: 07/17/17 - 07/19/17	DUT Type: Portable Speaker		Page 27 of 27