

Data Sheet

CUSTOMER: Wistron

CUSTOMER P/N : 025.9028F.0001

MODEL NAME: Coily

AWAN P/N: AVP6Y-100000




B2-F, No. 207-1, Sec.3, Beixin Rd., Xindian
Dist., New Taipei City 231, Taiwan, R.O.C
TEL : 886-2-8913-1939
FAX : 886-2-8913-2538
<http://www.awan-ant.com>

1. Specification


Antenna Physical Type	PCB Antenna	
Antenna Radiation Type	PIFA	
Connector Type	I-PEX Connector for 1.13 cable	
Cable Type	OD 1.13 RF Cable	
Impedance	50Ω	
Polarization	Linear	
Frequency	2.40 ~ 2.50 GHz	
	5.15 ~ 5.85 GHz	
VSWR	2.40 ~ 2.50 GHz	2.0 Max
	5.15 ~ 5.85 GHz	
Peak gain(dBi)	2.40 ~ 2.50 GHz	2.08 dBi(Max)
	5.150 GHz ~ 5.250 GHz	3.44 dBi(Max)
	5.250 GHz ~ 5.350 GHz	3.44 dBi(Max)
	5.470 GHz ~ 5.725 GHz	3.10 dBi(Max)
	5.725 GHz ~ 5.850 GHz	2.41 dBi(Max)
Cable length	150 mm, Black	

2. Drawing

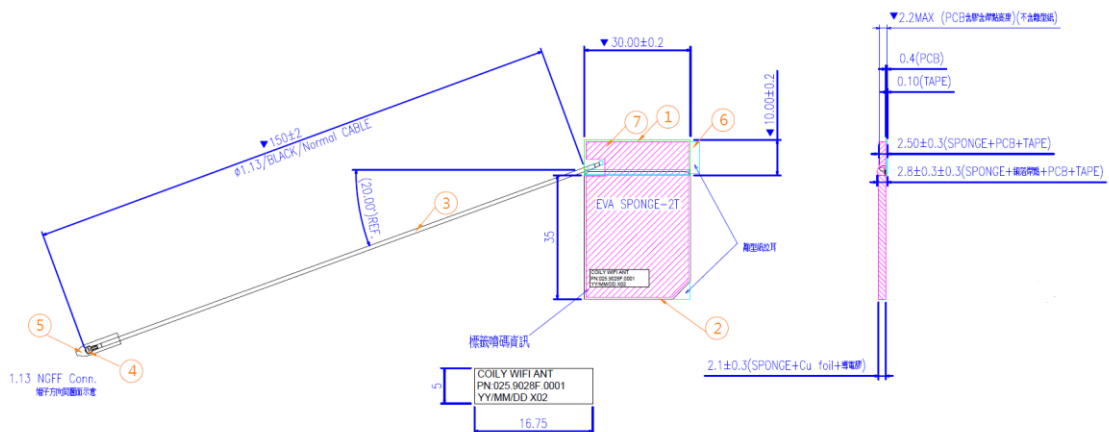


4. Setup photo

please see another confidential document

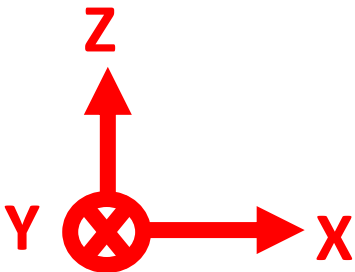


5. Antenna Characteristics


5.1. VSWR

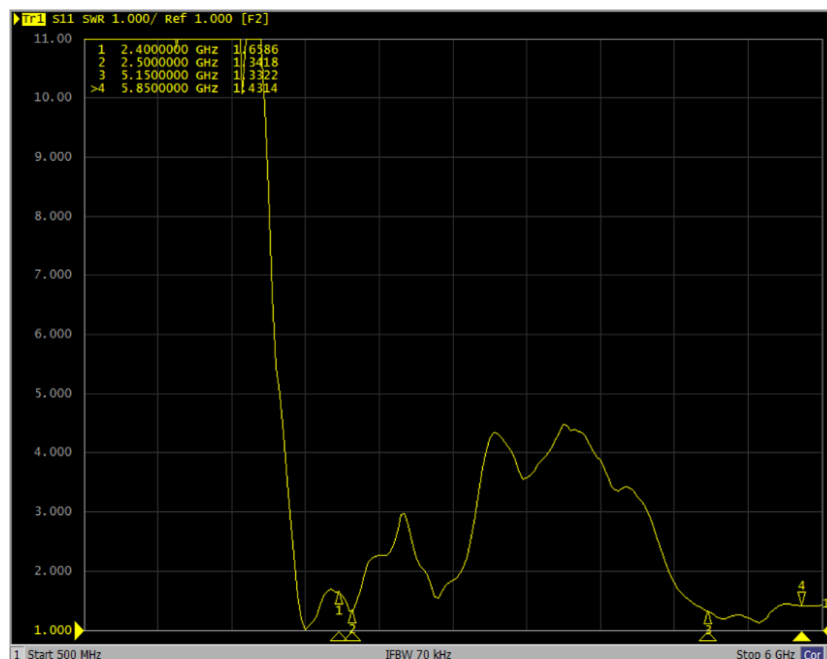

5.2. Average Gain

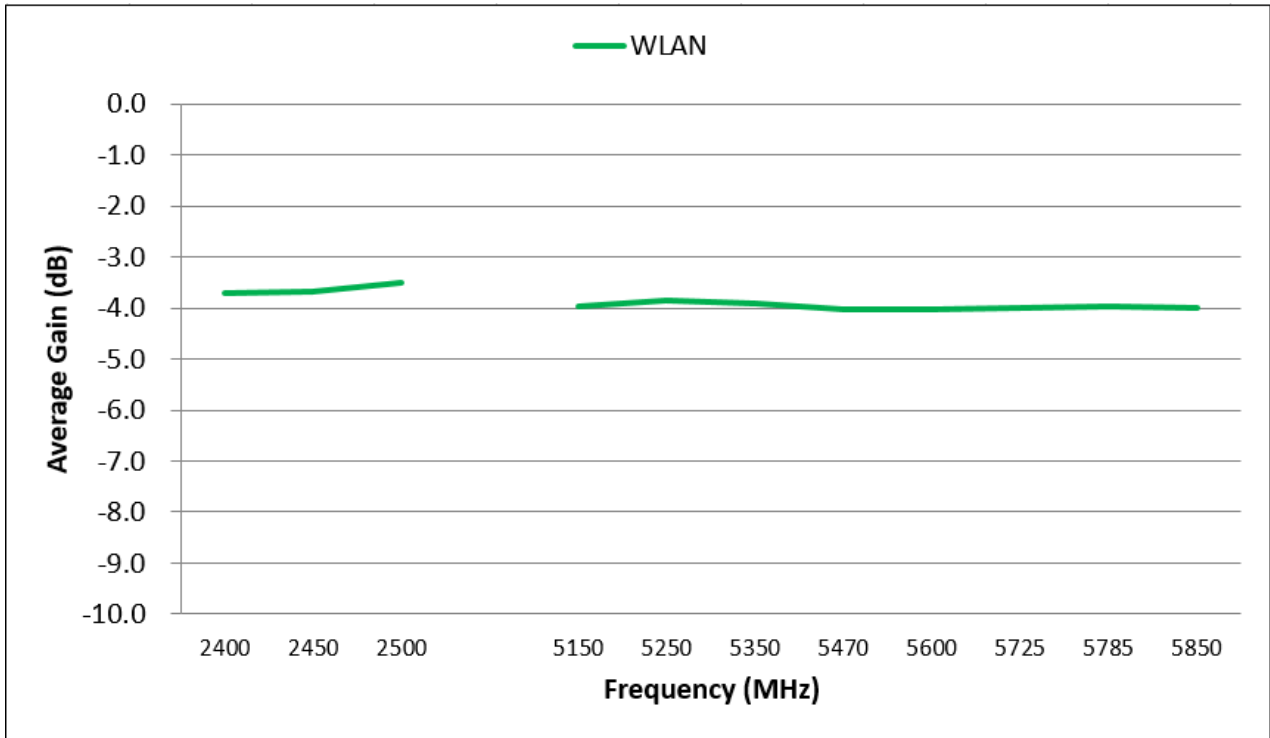

5.3. Peak Gain

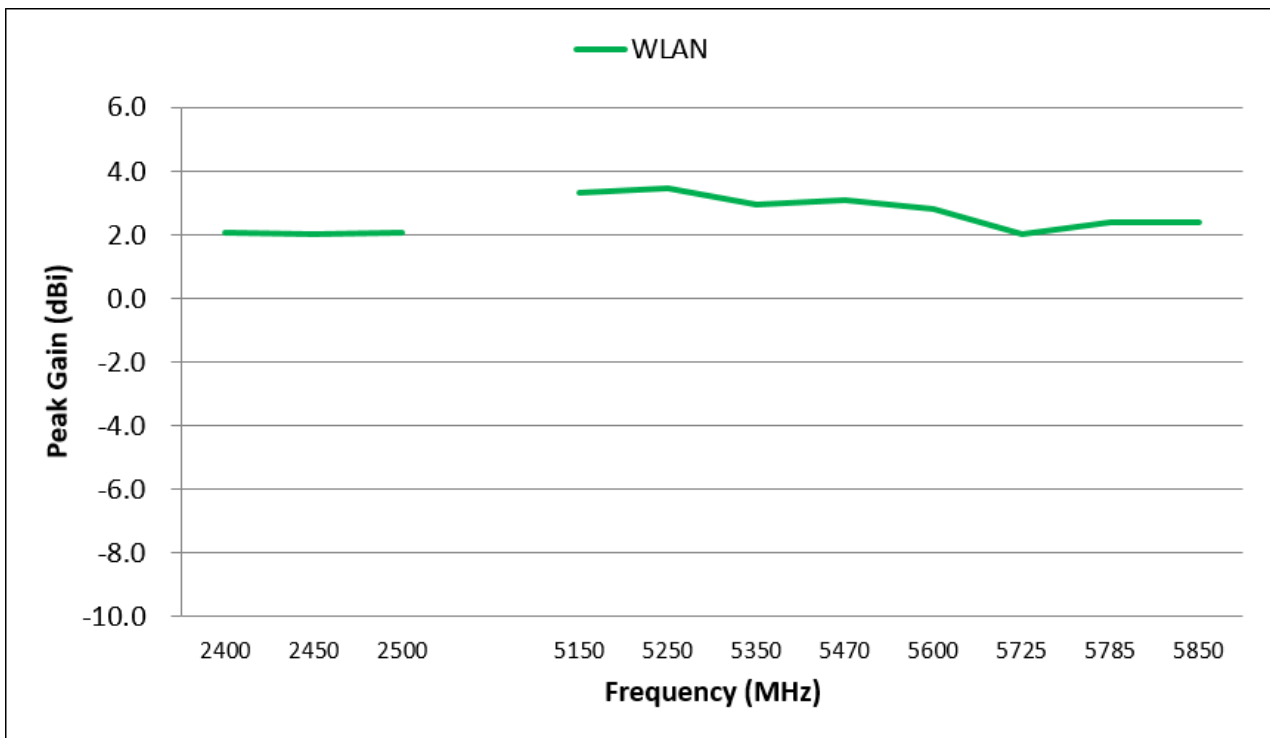

5.4. Peak Gain and Efficiency

Frequency(MHz)	Peak Gain(dBi)	Efficiency(dB)	Efficiency(%)
2400	2.08	-3.70	42.66
2450	2.00	-3.67	42.95
2500	2.07	-3.51	44.57
5150	3.30	-3.96	40.18
5250	3.44	-3.86	41.11
5350	2.94	-3.92	40.55
5470	3.10	-4.03	39.54
5600	2.80	-4.03	39.54
5725	2.04	-3.99	39.90
5785	2.41	-3.97	40.09
5850	2.41	-4.00	39.81

6. Antenna Radiation Patterns

