



A D T

FCC TEST REPORT

REPORT NO.: RF990810E01

MODEL NO.: Y-R0018

FCC ID: JNZYR0018

RECEIVED: Aug. 10, 2010

TESTED: Aug. 11, 2010

ISSUED: Aug. 17, 2010

APPLICANT: LOGITECH FAR EAST LTD.

ADDRESS: #2 Creation Rd. 4, Science-Based Ind. Park
Hsinchu Taiwan, R.O.C.

ISSUED BY : Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS : No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

This test report consists of 31 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by any government agencies. The test results in the report only apply to the tested sample.



Table of Contents

1	CERTIFICATION	3
2	SUMMARY OF TEST RESULTS	4
2.1	MEASUREMENT UNCERTAINTY.....	4
3	GENERAL INFORMATION	5
3.1	GENERAL DESCRIPTION OF EUT	5
3.2	DESCRIPTION OF TEST MODES	7
3.2.1	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	9
3.4	DESCRIPTION OF SUPPORT UNITS.....	10
3.5	CONFIGURATION OF SYSTEM UNDER TEST.....	10
4	TEST PROCEDURES AND RESULTS	11
4.1	CONDUCTED EMISSION MEASUREMENT	11
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	11
4.1.2	TEST INSTRUMENTS.....	11
4.1.3	TEST PROCEDURES	12
4.1.4	TEST SETUP	12
4.1.5	EUT OPERATING CONDITIONS	13
4.1.6	TEST RESULTS	14
4.2	RADIATED EMISSION MEASUREMENT	16
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	16
4.2.2	TEST INSTRUMENTS.....	17
4.2.3	TEST PROCEDURES	18
4.2.4	DEVIATION FROM TEST STANDARD	18
4.2.5	TEST SETUP	19
4.2.6	EUT OPERATING CONDITIONS	19
4.2.7	TEST RESULTS	20
4.3	CONDUCTED - OUT BAND MEASUREMENT	27
4.3.1	LIMITS OF CONDUCTED - OUT BAND MEASUREMENT.....	27
4.3.2	TEST INSTRUMENTS.....	27
4.3.3	TEST PROCEDURE.....	27
4.3.4	DEVIATION FROM TEST STANDARD	27
4.3.5	EUT OPERATING CONDITION.....	27
4.3.6	TEST RESULTS	28
5	INFORMATION ON THE TESTING LABORATORIES	30
6	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	31



A D T

1 CERTIFICATION

PRODUCT : 2.4GHz Cordless Keyboard
BRAND NAME : Logitech
MODEL NO. : Y-R0018
TESTED : Aug. 11, 2010
TEST SAMPLE : R&D SAMPLE
APPLICANT : LOGITECH FAR EAST LTD.
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.249)
ANSI C63.4-2003

The above equipment (Model: Y-R0018) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Carol Liao , **DATE:** Aug. 17, 2010
(Carol Liao, Specialist)

TECHNICAL ACCEPTANCE : Hank Chung , **DATE:** Aug. 17, 2010
(Hank Chung, Deputy Manager)

APPROVED BY : May Chen , **DATE:** Aug. 17, 2010
(May Chen, Deputy Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Paragraph	Test Type	Result	Remark
15.207	Conducted Emission Test	PASS	Meet the requirement of limit. Minimum passing margin is -14.88dB at 0.162MHz
15.249	Radiated Emission Test	PASS	Meet the requirement of limit. Minimum passing margin is -4.5dB at 2400.00MHz
15.249	Conducted - Out Band Measurement	PASS	Meet the requirement of limit

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.45 dB
Radiated emissions (30MHz-1GHz)	3.3 dB
Radiated emissions (1GHz -18GHz)	2.19 dB
Radiated emissions (18GHz -40GHz)	2.56 dB

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	2.4GHz Cordless Keyboard
MODEL NO.	Y-R0018
FCC ID	JNZYR0018
POWER SUPPLY	DC 3.7V from battery or DC 8V from power adapter
MODULATION TYPE	GFSK
OPERATING FREQUENCY	2405MHz ~ 2474MHz
NUMBER OF CHANNEL	12
ANTENNA TYPE	Custom inverted F PCB printed antenna, with 1dBi antenna gain
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	Battery x 1, Adapter x 1

NOTE:

- The EUT must be supplied with a power adapter or battery as following table:

ADAPTER	
BRAND	Logitech
MANUFACTURY	PI ELECTRONICS
MODEL	L-LD4-0
INPUT POWER	AC 100~240V, 50/60Hz, 0.25A
OUTPUT POWER	DC 8V, 500mA 1.8 m unshielded without core.
BATTERY	
BRAND	Logitech
MODEL	R-IG7
OUTPUT POWER	DC 3.7V, 930mAh

2. For radiated test , The EUT was pre-tested under the following modes:

Test Mode	Description
Mode A	EUT + Battery + Adapter
Mode B	EUT + Battery

From the above modes, the worse case was found in **Mode B**. Therefore only the test data of the mode was recorded in this report.

3. For radiated test , The EUT was pre-tested under the following modes:

Test Mode	Description
Mode A	X-Y plane
Mode B	Z-X plane
Mode C	Z-Y plane

From the above modes, the Radiated emission worst case was found in **Mode A**. Therefore only the test data of the mode was recorded in this report.

4. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Twelve channels are provided to this EUT.

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
1	2405	4	2417	7	2441	10	2465
2	2408	5	2432	8	2444	11	2471
3	2414	6	2435	9	2462	12	2474

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE < 1G	RE [≥] 1G	BE	
1	√	-	-	-	EUT + Battery + Adapter
2	-	√	√	√	EUT + Battery

Where **PLC**: Power Line Conducted Emission

RE < 1G: Radiated Emission below 1GHz

RE [≥] 1G: Radiated Emission above 1GHz

BE: Conducted Out-Band Emission Measurement

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
1 to 12	1	GFSK

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
1 to 12	1	GFSK



RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
1 to 12	1, 8, 12	GFSK

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
1 to 12	1, 12	GFSK

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE ³ 1G	27deg. C, 77%RH, 1012 hPa	DC 3.7V from battery	Frank Liu
RE<1G	27deg. C, 77%RH, 1012 hPa	DC 3.7V from battery	Frank Liu
PLC	25deg. C, 60%RH, 1012 hPa	DC 3.7V from battery	Max Tseng



A D T

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:


47 CFR Part 15, Subpart C (Section 15.249)
ANSI C63.4: 2003

All tests have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit.

3.5 CONFIGURATION OF SYSTEM UNDER TEST

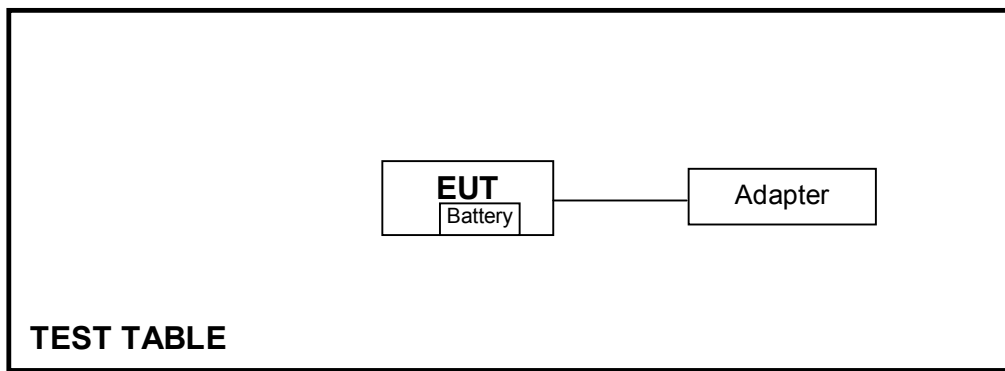



4 TEST PROCEDURES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	100287	Mar. 01, 2010	Feb. 28, 2011
Line-Impedance Stabilization Network (for EUT)	NSLK 8127	8127-523	Sep. 23, 2009	Sep. 22, 2010
Line-Impedance Stabilization Network (for Peripheral)	ENV-216	100072	June 11, 2010	June 10, 2011
RF Cable (JYBAO)	5DFB	COACAB-001	Dec. 14, 2009	Dec. 13, 2010
50 ohms Terminator	50	3	Oct. 28, 2009	Oct. 27, 2010
Software	BV ADT_Cond_V7.3.7	NA	NA	NA


Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.

4.1.3 TEST PROCEDURES

- a. The EUT/HOST was placed 0.4 meters from the conducting wall of the shielded room with EUT/HOST being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT/HOST were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 TEST SETUP

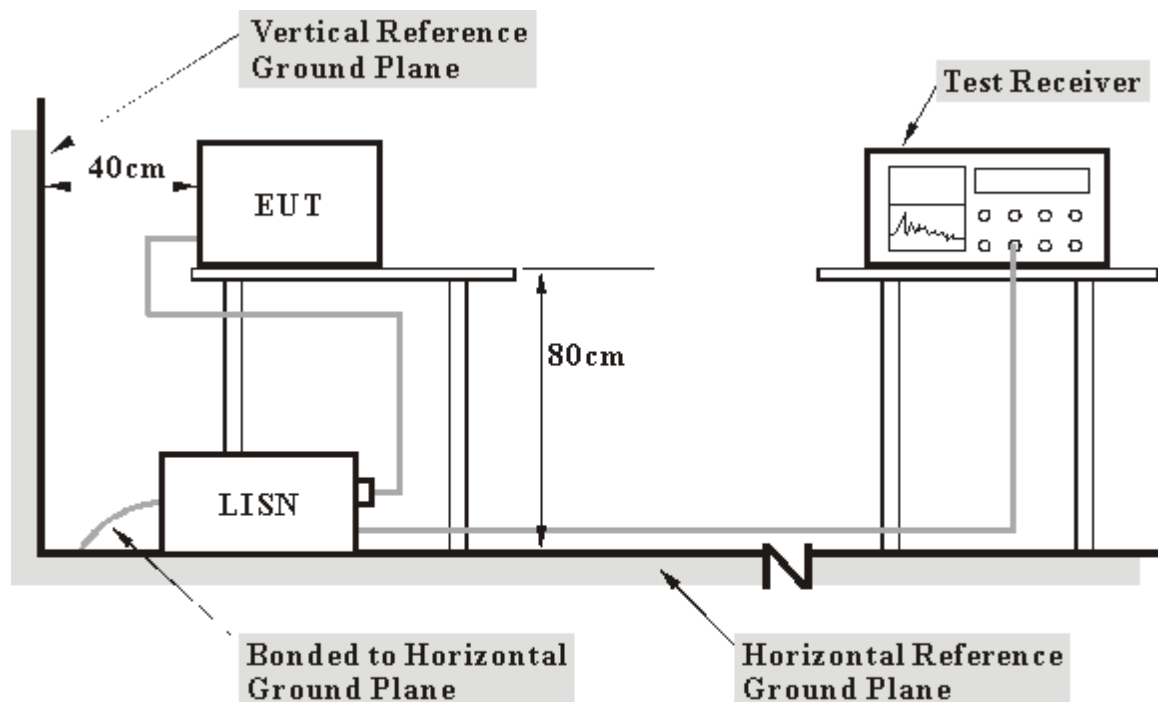

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.1.5 EUT OPERATING CONDITIONS


Set the EUT under transmission / receiver condition continuously at specific channel frequency.

4.1.6 TEST RESULTS

PHASE	Line (L)	6DB BANDWIDTH	9 kHz
--------------	----------	----------------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.166	0.04	49.13	-	49.17	-	65.18	55.18	-16.01	-
2	0.197	0.04	43.00	-	43.04	-	63.74	53.74	-20.70	-
3	0.295	0.04	41.15	-	41.19	-	60.40	50.40	-19.20	-
4	0.466	0.07	32.94	-	33.01	-	56.58	46.58	-23.57	-
5	0.892	0.18	28.69	-	28.87	-	56.00	46.00	-27.13	-
6	1.426	0.22	21.62	-	21.84	-	56.00	46.00	-34.16	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

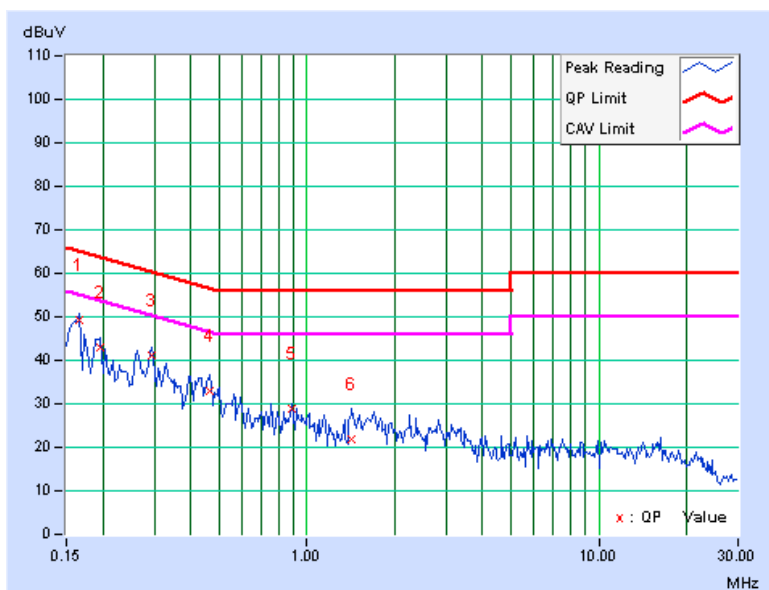

PHASE	Neutral (N)	6DB BANDWIDTH	9 kHz
--------------	-------------	----------------------	-------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor (dB)	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.05	50.45	-	50.50	-	65.38	55.38	-14.88	-
2	0.189	0.05	45.03	-	45.08	-	64.08	54.08	-19.00	-
3	0.295	0.05	44.24	-	44.29	-	60.40	50.40	-16.10	-
4	0.400	0.06	32.00	-	32.06	-	57.85	47.85	-25.79	-
5	2.617	0.23	27.55	-	27.78	-	56.00	46.00	-28.22	-
6	4.387	0.24	27.77	-	28.01	-	56.00	46.00	-27.99	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

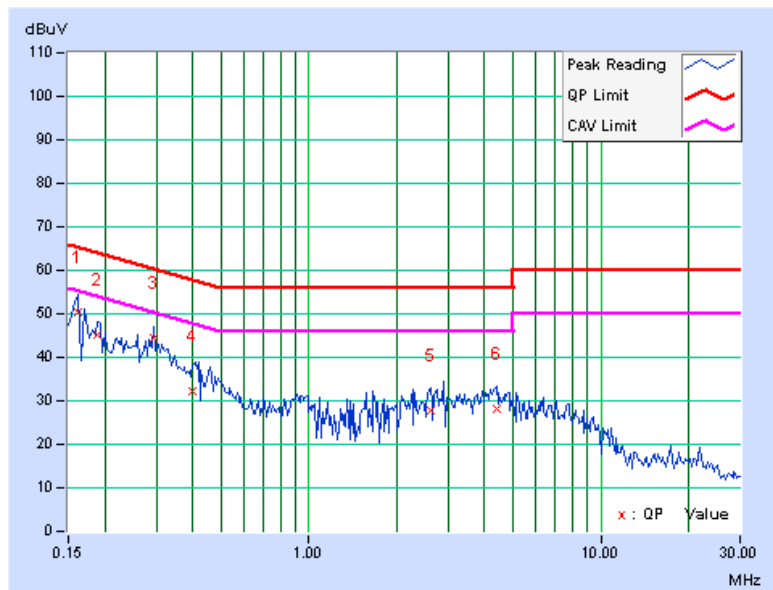

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

According to 15.249 the field strength of emissions from intentional radiators operated under these frequencies bands shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dBuV/m)	
	Peak	Average
2400 ~ 2483.5	114	94
	Field Strength of Harmonics (dBuV/m)	
	74	54

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250253	Aug. 02, 2010	Aug. 01, 2011
Agilent Pre-Selector	N9039A	MY46520311	Aug. 17, 2009	Aug. 16, 2010
Agilent Signal Generator	N5181A	MY49060517	July 14, 2010	July 13, 2011
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-03	Nov. 18, 2009	Nov. 17, 2010
Agilent Pre-Amplifier	8449B	3008A02578	July 05, 2010	July 04, 2011
Miteq Pre-Amplifier	AFS33-1800265 0-30-8P-44	881786	NA	NA
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-360	Sep. 30, 2009	Sep. 29, 2010
AISI Horn_Antenna	AIH.8018	0000320091110	Nov. 16, 2009	Nov. 15, 2010
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Sep. 30, 2009	Sep. 29, 2010
RF CABLE	NA	RF104-201 RF104-203 RF104-204	Dec. 24, 2009	Dec. 23, 2010
RF Cable	NA	CHGCAB_001	NA	NA
Software	ADT_Radiated_ V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.

3. The test was performed in 966 Chamber No. G.

4. The FCC Site Registration No. is 966073.

5. The VCCI Site Registration No. is G-137.

6. The CANADA Site Registration No. is IC 7450H-2.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

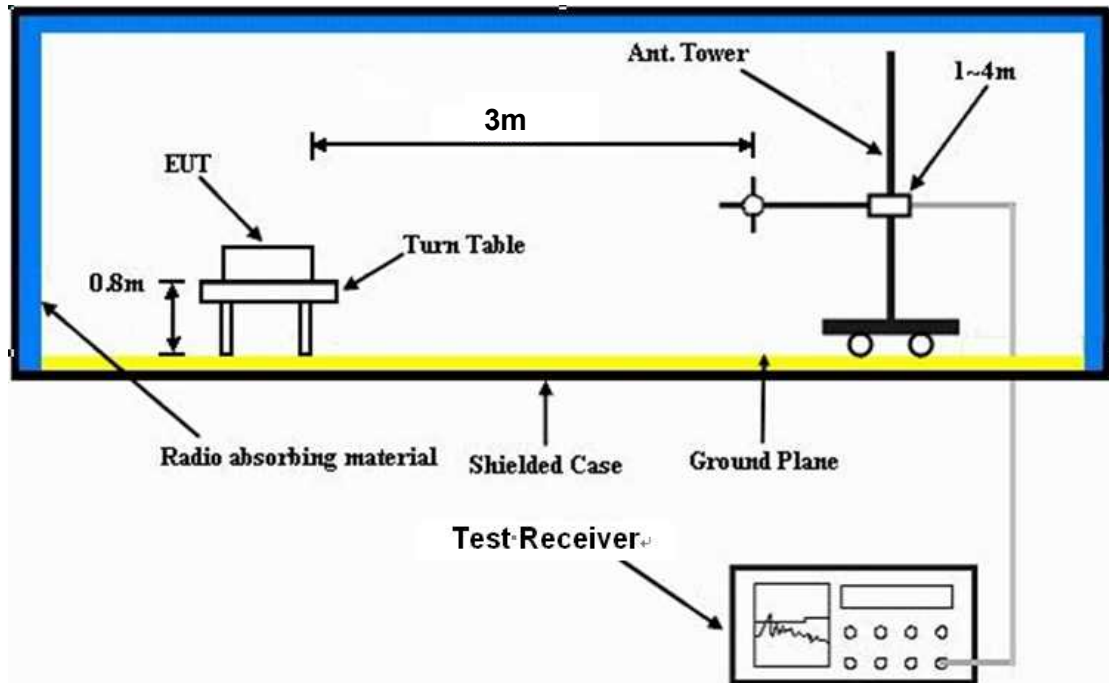

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Set the EUT under transmission / receiver condition continuously at specific channel frequency.



4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	DC 3.7V from battery	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	22deg. C, 69%RH 1012 hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	59.96	12.1 QP	40.0	-27.9	1.00 H	215	-3.27	15.33
2	136.46	10.7 QP	43.5	-32.8	1.50 H	130	-4.48	15.17
3	142.50	11.6 QP	43.5	-31.9	1.50 H	244	-3.74	15.37
4	173.41	8.1 QP	43.5	-35.5	2.00 H	339	-6.13	14.18
5	203.49	7.5 QP	43.5	-36.0	2.00 H	228	-4.67	12.13
6	229.07	9.2 QP	46.0	-36.9	2.00 H	360	-4.24	13.39
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	41.25	23.4 QP	40.0	-16.6	1.00 V	130	7.47	15.95
2	59.96	18.6 QP	40.0	-21.4	2.00 V	304	3.28	15.33
3	101.05	12.1 QP	43.5	-31.4	2.00 V	25	0.91	11.15
4	140.61	22.3 QP	43.5	-21.2	1.00 V	21	6.95	15.39
5	187.27	16.7 QP	43.5	-26.8	1.00 V	0	3.94	12.74
6	197.57	18.8 QP	43.5	-24.7	1.00 V	210	6.70	12.11

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



ABOVE 1GHz DATA

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	DC 3.7V from battery	DETECTOR FUNCTION	Peak (PK)
ENVIRONMENTAL CONDITIONS	27deg. C, 77%RH 1012 hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2400.00	69.5 PK	74.0	-4.5	1.00 H	105	37.81	31.69
2	2400.00	29.5 AV	54.0	-24.5	1.00 H	105	-2.19	31.69
3	*2405.00	101.2 PK	114.0	-12.8	1.00 H	105	69.53	31.71
4	*2405.00	61.2 AV	94.0	-32.8	1.00 H	105	29.53	31.71
5	4810.00	54.6 PK	74.0	-19.4	1.10 H	220	15.68	38.92
6	4810.00	14.6 AV	54.0	-39.4	1.10 H	220	-24.32	38.92
7	7215.00	54.7 PK	74.0	-19.3	1.14 H	213	7.99	46.71
8	7215.00	14.7 AV	54.0	-39.3	1.14 H	213	-32.01	46.71
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2400.00	62.8 PK	74.0	-11.2	1.00 V	118	31.08	31.69
2	2400.00	22.8 AV	54.0	-31.2	1.00 V	118	-8.92	31.69
3	*2405.00	96.4 PK	114.0	-17.7	1.00 V	118	64.64	31.71
4	*2405.00	56.4 AV	94.0	-37.7	1.00 V	118	24.64	31.71
5	4810.00	56.4 PK	74.0	-17.6	1.06 V	293	17.48	38.92
6	4810.00	16.4 AV	54.0	-37.6	1.06 V	293	-22.52	38.92
7	7215.00	54.6 PK	74.0	-19.4	1.02 V	27	7.89	46.71
8	7215.00	14.6 AV	54.0	-39.4	1.02 V	27	-32.11	46.71

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency
 6. The average value of fundamental frequency is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula:
 $20 \log (\text{Duty cycle}) = 20 \log (0.216 \text{ ms} / 20.9 \text{ ms}) = -39.7 \text{ dB}$
Please see page 19 for plotted duty.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 8	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	DC 3.7V from battery	DETECTOR FUNCTION	Peak (PK)
ENVIRONMENTAL CONDITIONS	27deg. C, 77%RH 1012 hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2444.00	102.3 PK	114.0	-11.7	1.00 H	247	70.46	31.84
2	*2444.00	62.3 AV	94.0	-31.7	1.00 H	247	30.46	31.84
3	4888.00	54.7 PK	74.0	-19.3	1.13 H	231	15.51	39.19
4	4888.00	14.7 AV	54.0	-39.3	1.13 H	231	-24.49	39.19
5	7332.00	54.6 PK	74.0	-19.4	1.06 H	254	7.98	46.62
6	7332.00	14.6 AV	54.0	-39.4	1.06 H	254	-32.02	46.62

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2444.00	97.4 PK	114.0	-16.6	1.00 V	113	65.56	31.84
2	*2444.00	57.4 AV	94.0	-36.6	1.00 V	113	25.56	31.84
3	4888.00	56.5 PK	74.0	-17.5	1.06 V	284	17.31	39.19
4	4888.00	16.5 AV	54.0	-37.5	1.06 V	284	-22.69	39.19
5	7332.00	54.2 PK	74.0	-19.8	1.04 V	30	7.58	46.62
6	7332.00	14.2 AV	54.0	-39.8	1.04 V	30	-32.42	46.62

- REMARKS:**
- Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 - Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 - The other emission levels were very low against the limit.
 - Margin value = Emission level – Limit value.
 - * * : Fundamental frequency
 - The average value of fundamental frequency is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula:
 $20 \log (\text{Duty cycle}) = 20 \log (0.216 \text{ ms} / 20.9 \text{ ms}) = -39.7 \text{ dB}$
 Please see page 19 for plotted duty.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 12	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	DC 3.7V from battery	DETECTOR FUNCTION	Peak (PK)
ENVIRONMENTAL CONDITIONS	27deg. C, 77%RH 1012 hPa	TESTED BY	Frank Liu



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2474.00	103.4 PK	114.0	-10.6	1.00 H	123	71.47	31.93
2	*2474.00	63.4 AV	94.0	-30.6	1.00 H	123	31.47	31.93
3	2483.50	65.9 PK	74.0	-8.1	1.00 H	123	33.97	31.97
4	2483.50	25.9 AV	54.0	-28.1	1.00 H	123	-6.03	31.97
5	4948.00	54.4 PK	74.0	-19.6	1.06 H	287	15.02	39.38
6	4948.00	14.4 AV	54.0	-39.6	1.06 H	287	-24.98	39.38
7	7422.00	54.8 PK	74.0	-19.2	1.07 H	243	8.23	46.57
8	7422.00	14.8 AV	54.0	-39.2	1.07 H	243	-31.77	46.57

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M


NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2474.00	98.4 PK	114.0	-15.6	1.00 V	123	66.47	31.93
2	*2474.00	58.4 AV	94.0	-35.6	1.00 V	123	26.47	31.93
3	2483.50	60.9 PK	74.0	-13.1	1.00 V	123	28.93	31.97
4	2483.50	20.9 AV	54.0	-33.1	1.00 V	123	-11.07	31.97
5	4948.00	56.1 PK	74.0	-17.9	1.06 V	287	16.72	39.38
6	4948.00	16.1 AV	54.0	-37.9	1.06 V	287	-23.28	39.38
7	7422.00	54.1 PK	74.0	-19.9	1.01 V	29	7.53	46.57
8	7422.00	14.1 AV	54.0	-39.9	1.01 V	29	-32.47	46.57

- REMARKS:**
- Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 - Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 - The other emission levels were very low against the limit.
 - Margin value = Emission level – Limit value.
 - “ * ” : Fundamental frequency
 - The average value of fundamental frequency is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula:
 $20 \log (\text{Duty cycle}) = 20 \log (0.216 \text{ ms} / 20.9 \text{ ms}) = -39.7 \text{ dB}$
Please see page 19 for plotted duty.

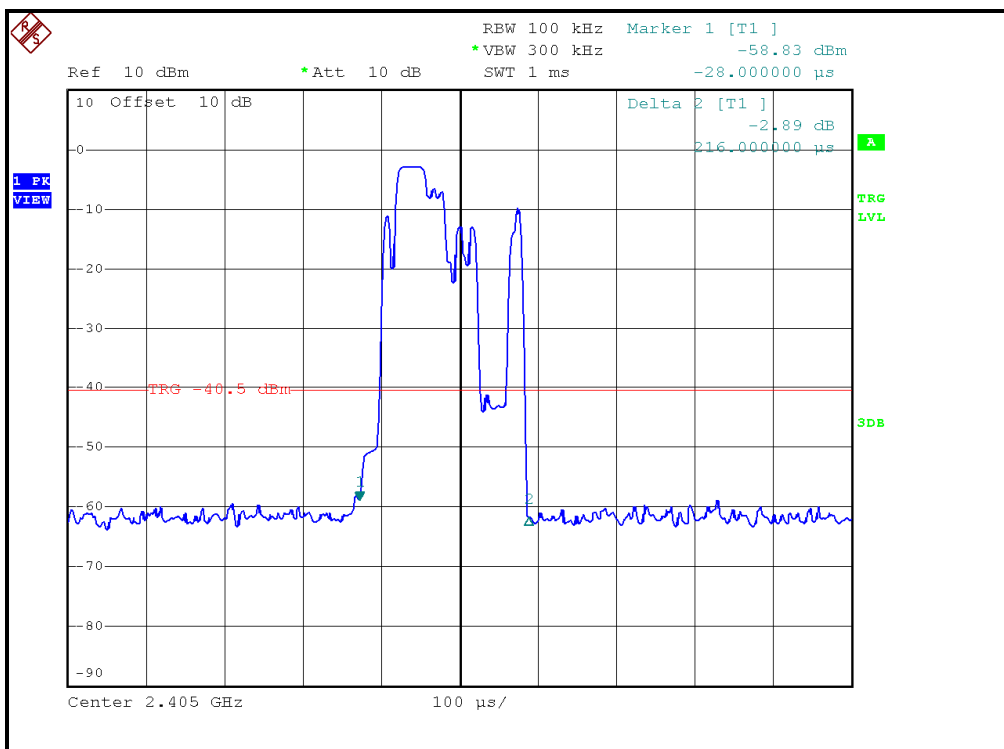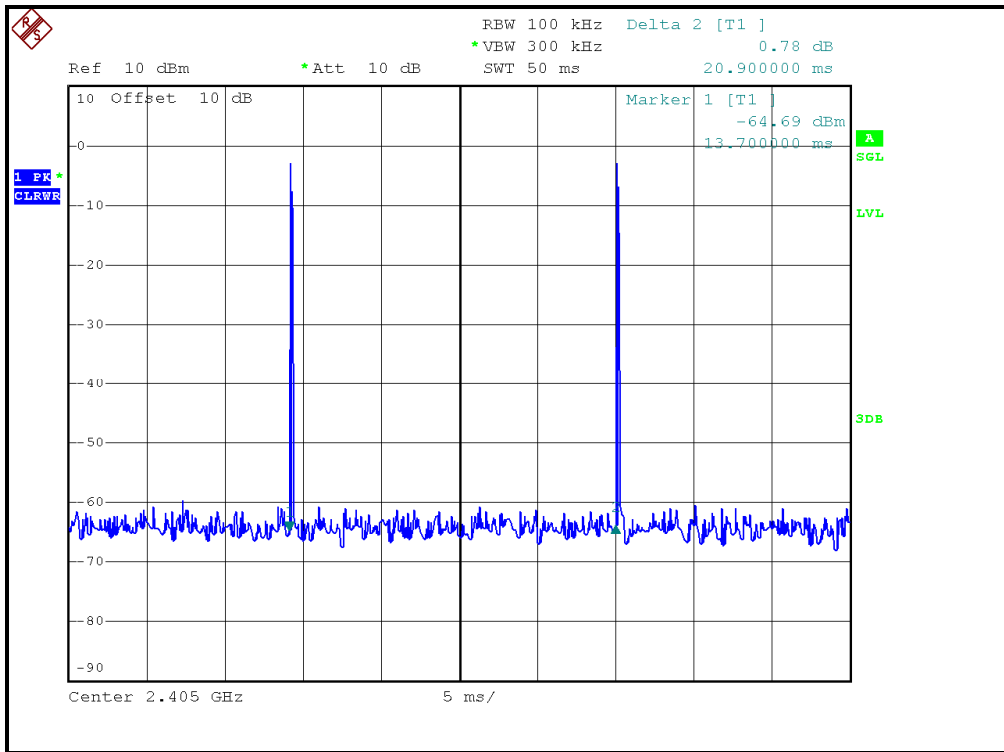


$$20 \log (\text{Duty cycle}) = 20 \log (0.216 \text{ ms} / 20.9 \text{ ms}) = -39.7 \text{ dB}$$

RESTRICTED BANDEDGE (CH1, HORIZONTAL)

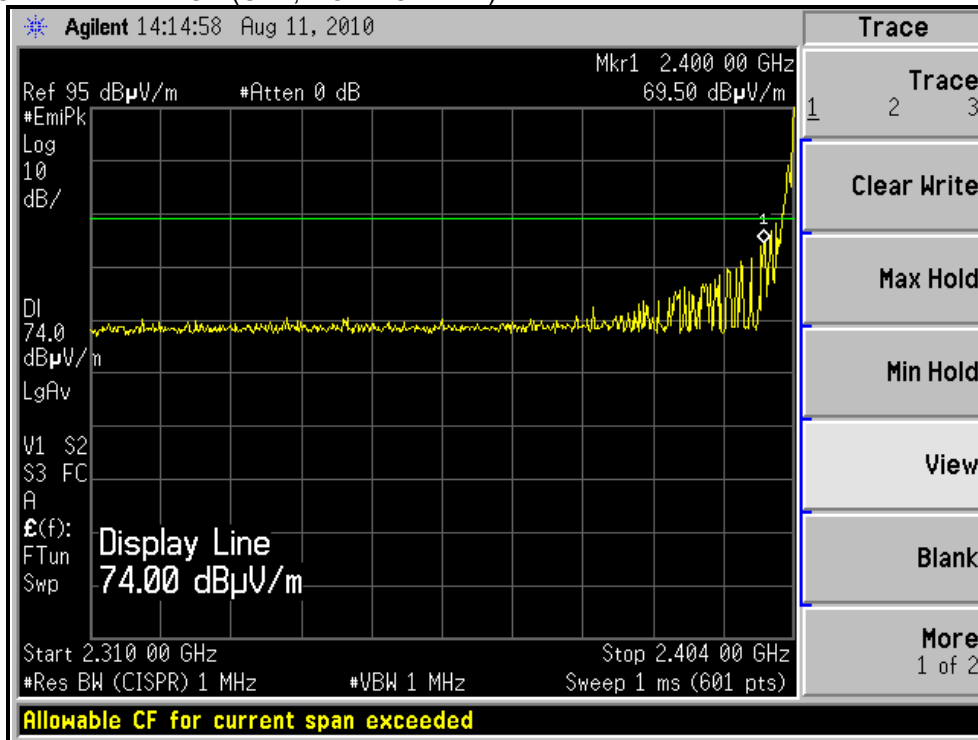


RESTRICTED BANDEDGE (CH1, VERTICAL)

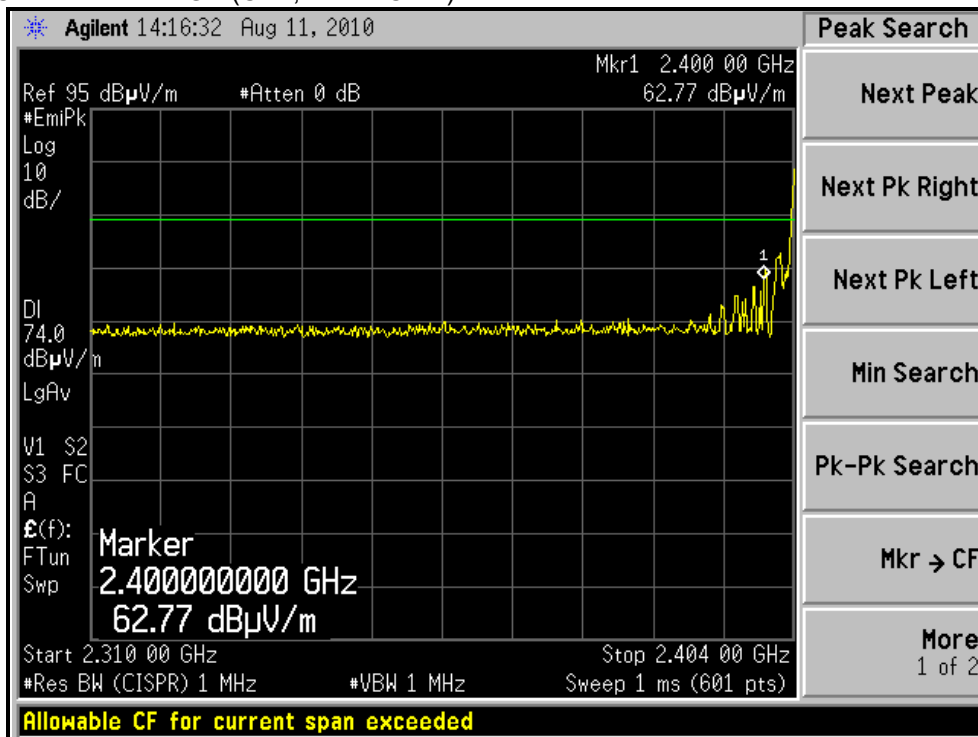


* The average value of fundamental frequency is: Average = Peak value + 20log(Duty cycle). And it meets the requirement of limit.

RESTRICTED BANDEDGE (CH12, HORIZONTAL)

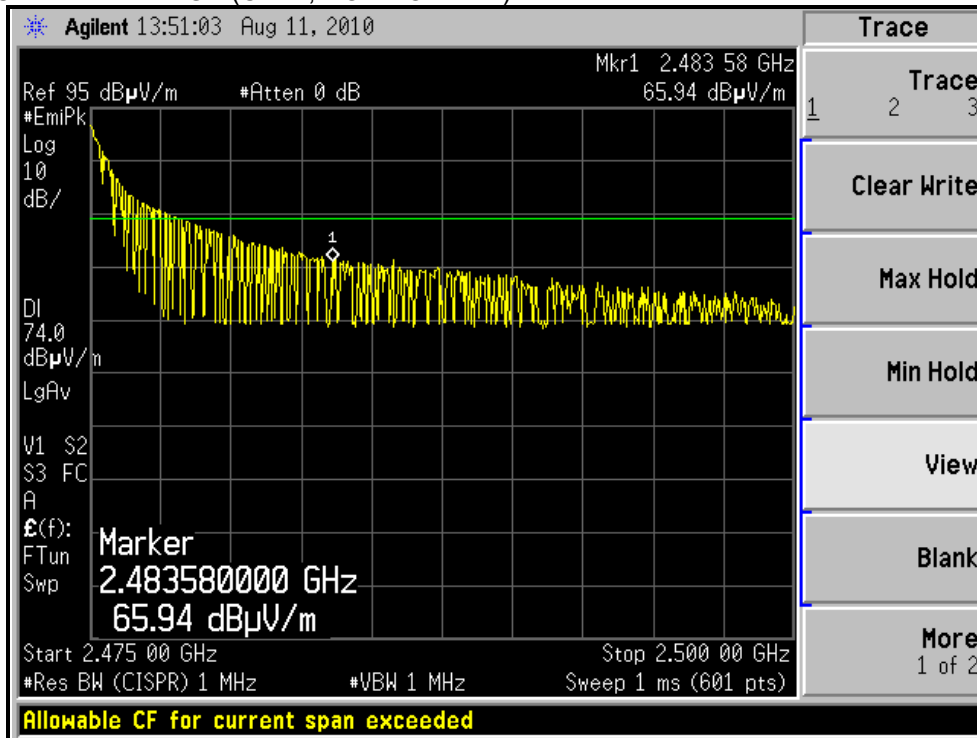

RESTRICTED BANDEDGE (CH12, VERTICAL)

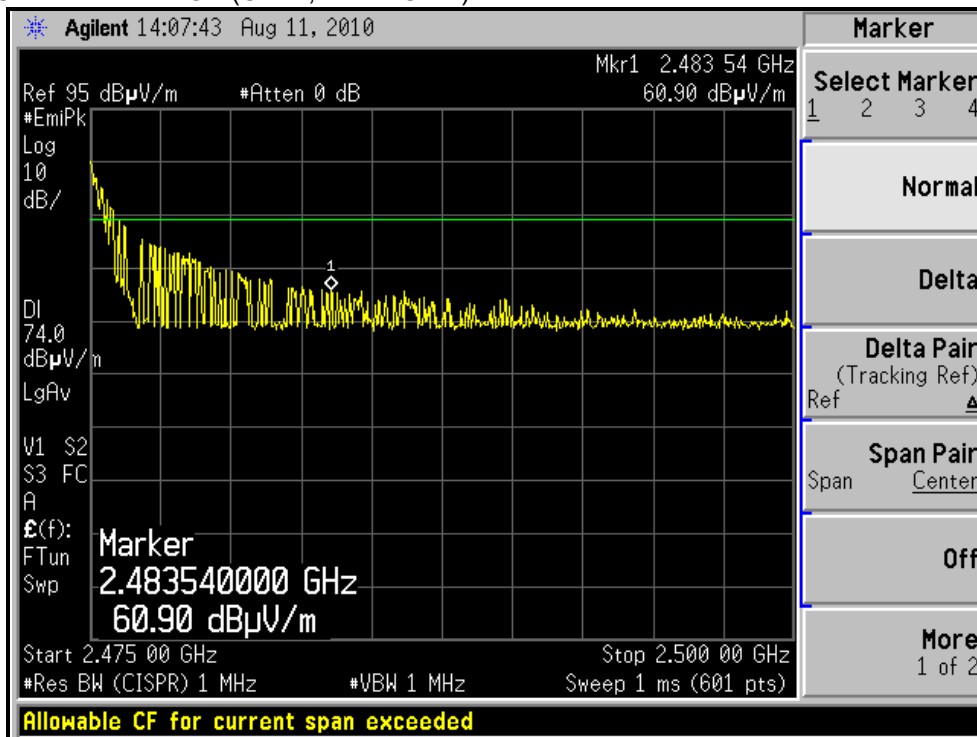

* The average value of fundamental frequency is: Average = Peak value + 20log(Duty cycle). And it meets the requirement of limit.



4.3 CONDUCTED - OUT BAND MEASUREMENT

4.3.1 LIMITS OF CONDUCTED - OUT BAND MEASUREMENT

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 18, 2009	Dec. 17, 2010

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 300 KHz with suitable frequency span from band edge. The band edges was measured and recorded.

4.3.4 DEVIATION FROM TEST STANDARD



No deviation

4.3.5 EUT OPERATING CONDITION



The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.3.6 TEST RESULTS

Emissions radiated outside of the specified frequency bands, please refer below pages for met the requirement of the general radiated emission limits in § 15.209. CH1

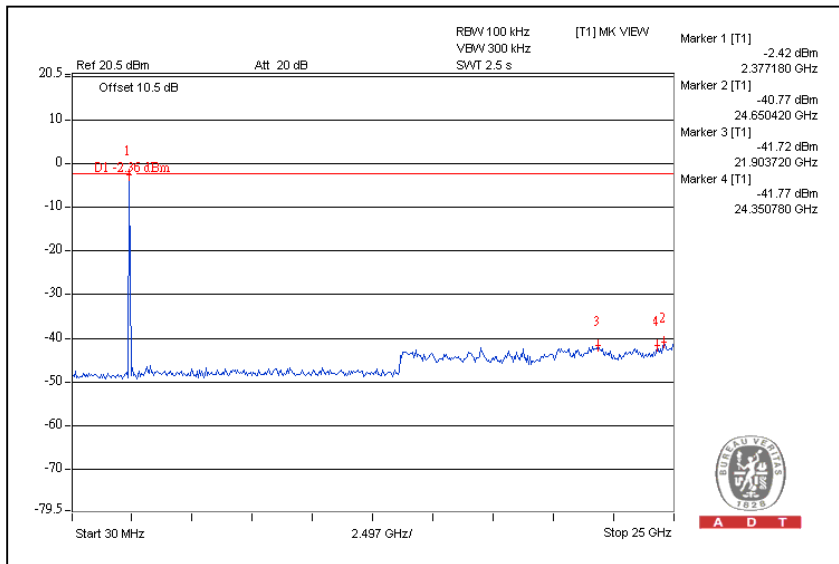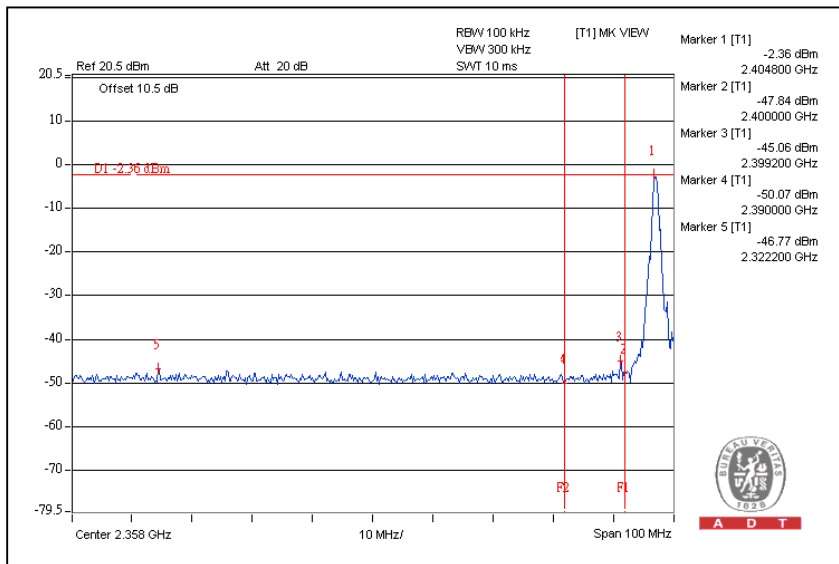

CH12

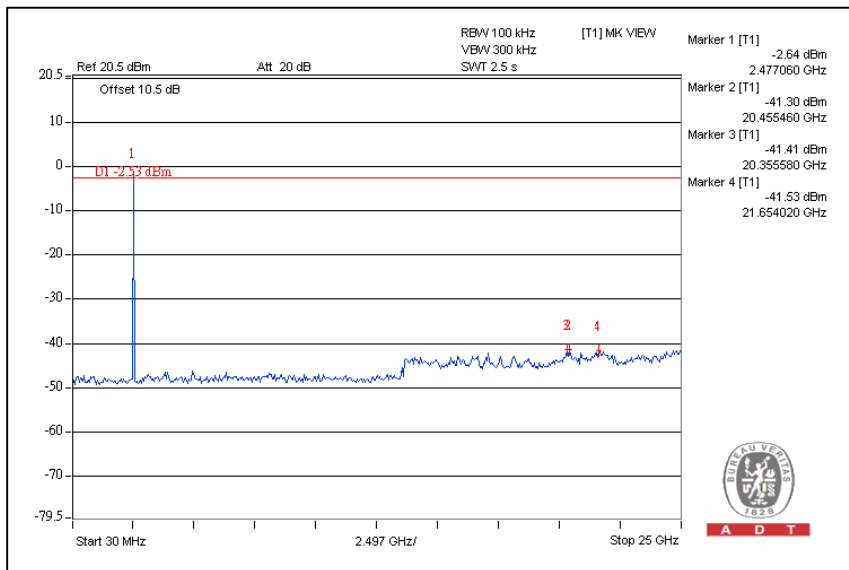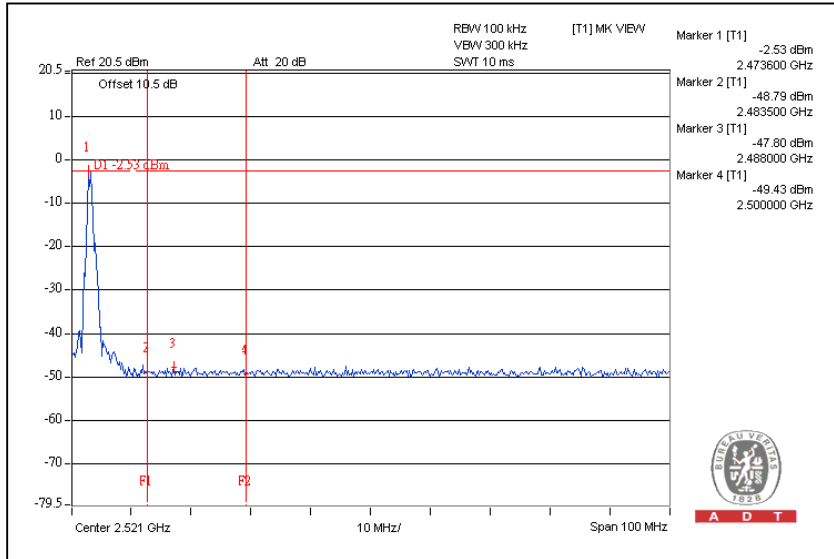



A D T

5 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025:

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Email: service@adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--- END ---