

TEST REPORT

Report number : JPD-TR-16080-0

Issue date : October 18, 2016

The device, as described herewith, was tested pursuant to applicable test procedure and complies with the requirements of;

FCC Part15 Subpart C

The test results are traceable to the international or national standards.

Applicant	: KYOCERA Corporation
-----------	-----------------------

Equipment under test (EUT)	: Mobile Phone
----------------------------	----------------

Model number	: CA55
--------------	--------

FCC ID	: JOYCA55
--------	-----------

Date of test	: August 8, 22, 23, 24, 25, 26, 2016
--------------	--------------------------------------

Test place	: TÜV SÜD Zacta Ltd. Yonezawa Testing Center 4149-7 Hachimanpara 5-chome Yonezawa-shi Yamagata 992-1128 Japan Phone: +81-238-28-2880 Fax: +81-238-28-2888
------------	--

Test results	: Complied
--------------	------------

The results in this report are applicable only to the equipment tested.

This report shall not be re-produced except in full without the written approval of TÜV SÜD Zacta Ltd.

This test report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Tested by : Taiki Watanabe Kazunori Saito
Taiki Watanabe Kazunori Saito

Approved by : Hiroaki Suzuki
Hiroaki Suzuki
Lab Manager of RF Lab



Table of contents

	Page
1. Summary of Test	4
1.1 Purpose of test.....	4
1.2 Standards	4
1.3 List of applied test to the EUT	4
1.4 Modification to the EUT by laboratory.....	4
2. Equipment Under Test	5
2.1 General Description of equipment.....	5
2.2 EUT information	5
2.3 Variation of the family model(s).....	6
2.4 Operating channels and frequencies	6
2.5 Operating mode	6
2.6 Operating flow	7
3. Configuration of equipment	8
3.1 Equipment(s) used.....	8
3.2 Cable(s) used	8
3.3 System configuration	8
4. 6dB Bandwidth	9
4.1 Measurement procedure.....	9
4.2 Limit.....	9
4.3 Measurement result.....	9
4.4 Trace data	10
5. Maximum conducted (average) output power	13
5.1 Measurement procedure.....	13
5.2 Limit.....	13
5.3 Measurement result.....	13
5.4 Trace data	15
6. Band Edge Compliance of RF Conducted Emissions.....	18
6.1 Measurement procedure.....	18
6.2 Limit.....	18
6.3 Measurement result.....	19
6.4 Trace data	20
7. Spurious emissions - Conducted -	23
7.1 Measurement procedure.....	23
7.2 Limit.....	23
7.3 Measurement result.....	23
8. Spurious Emissions - Radiated -	33
8.1 Measurement procedure	33
8.2 Calculation method.....	34
8.3 Limit.....	34
8.4 Test data.....	35
9. Restricted Band of Operation.....	57
9.1 Measurement procedure	57
9.2 Limit.....	57



Zacta

9.3 Measurement Result.....	58
9.4 Test data.....	58
10. Transmitter Power Spectral Density.....	65
10.1 Measurement procedure.....	65
10.2 Limit.....	65
10.3 Measurement result.....	65
11. AC Power Line Conducted Emissions.....	70
11.1 Measurement procedure	70
11.2 Calculation method.....	70
11.3 Limit.....	71
11.4 Test data.....	71
12. Antenna requirement	72
13. Uncertainty of measurement.....	73
14. Laboratory description	74
Appendix A. Test equipment	75
Appendix B. Duty Cycle.....	76

1. Summary of Test

1.1 Purpose of test

It is the original test in order to verify conformance to FCC Part 15 Subpart C.

1.2 Standards

CFR47 FCC Part 15 Subpart C

1.2.1 Test Methods

ANSI C63.10-2013, KDB 558074 D01 DTS Meas Guidance v03r05

1.2.2 Deviation from standards

None

1.3 List of applied test to the EUT

Test items Section	Test items	Condition	Result
15.247(a)(2)	6dB Bandwidth	Conducted	PASS
15.247(b)(3)	Maximum conducted (average) output power	Conducted	PASS
15.247(d) 15.205 15.209	Band Edge Compliance of RF Conducted Emissions	Conducted	PASS
15.247(d) 15.205 15.209	Spurious Emissions	Conducted Radiated	PASS
15.247(d) 15.205 15.209	Restricted Bands of Operation	Radiated	PASS
15.247(e)	Transmitter Power Spectral Density	Conducted	PASS
15.207	AC Power Line Conducted Emissions	Conducted	PASS

1.3.1 Test set up

Table-Top

1.4 Modification to the EUT by laboratory

None

2. Equipment Under Test

2.1 General Description of equipment

EUT is the Mobile Phone.

2.2 EUT information

Applicant	: KYOCERA Corporation Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa, Japan Phone: +81-45-943-6253 Fax: +81-45-943-6314
Equipment under test	: Mobile Phone
Trade name	: Kyocera
Model number	: CA55
Serial number	: N/A
EUT condition	: Pre-Production
Power ratings	: Battery: DC 3.8V
Size	: (W) 72.3 × (D) 9.4 × (H) 145.3 mm
Environment	: Indoor and Outdoor use
Terminal limitation	: -20°C to 60°C
RF Specification Protocol	: IEEE802.11b, IEEE802.11g, IEEE802.11n (HT20)
Frequency range	: IEEE802.11b /11g/11n (HT20): 2412MHz-2462MHz
Number of RF Channels	: 11 Channels
Modulation type	: IEEE802.11b: DSSS (DBPSK, DQPSK, CCK) IEEE802.11g / n (HT20) : OFDM (BPSK, QPSK, 16QAM, 64QAM)
Data rate	: IEEE802.11b: 1, 2, 5.5, 11Mbps IEEE802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps IEEE802.11n (HT20 LGI): 6.5, 13, 19.5, 26, 39, 52, 58.5, 65Mbps IEEE802.11n (HT20 SGI): 7.2, 14.4, 21.7, 28.9, 43.3, 57.8, 65, 72.2Mbps
Channel separation	: 5MHz
Output power	: 24.491mW (IEEE802.11b) 17.219mW (IEEE802.11g) 17.298mW (IEEE802.11n: HT20)
Antenna type	: Internal antenna
Antenna gain	: 3.6dBi

2.3 Variation of the family model(s)

Not applicable

2.4 Operating channels and frequencies

Channel	Frequency [MHz]
1	2412
2	2417
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452
10	2457
11	2462

2.5 Operating mode

The EUT had been tested under operating condition.

There are three channels have been tested as following:

Tested Channel	Frequency [MHz]
Low	2412
Middle	2437
High	2462

The pre-test has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates.

Tested Channel	Modulation Type	Data Rate
Low, Middle, High	IEEE802.11b: DSSS	1Mbps
Low, Middle, High	IEEE802.11g: OFDM	6Mbps
Low, Middle, High	IEEE802.11n (HT20 LGI): OFDM	MCS0 (6.5Mbps)

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in X axis and the worst case recorded.



Zacta

2.6 Operating flow

[Tx mode]

i) Test program setup to the DM tool

ii) Select a Test mode

[IEEE802.11b, IEEE802.11g, IEEE802.11n (HT20)]

Operating frequency: Channel Low: 2412MHz, Channel Middle: 2437MHz, Channel High: 2462MHz

iii) Start test mode

[Rx mode]

i) Test program setup to the DM tool

ii) Select a Test mode

[IEEE802.11b, IEEE802.11g, IEEE802.11n (HT20)]

Operating frequency: Channel Low: 2412MHz, Channel Middle: 2437MHz, Channel High: 2462MHz

iii) Start test mode

3. Configuration of equipment

3.1 Equipment(s) used

No.	Equipment	Company	Model No.	Serial No.	FCC ID / DoC	Comment
1	Mobile Phone	KYOCERA	CA55	N/A	JOYCA55	EUT
2	AC Adapter	au	N/A	N/A	N/A	*


*: AC power line Conducted Emission Test.

3.2 Cable(s) used

No.	Cable	Length[m]	Shield	Connector	Comment
a	Micro USB cable(for AC Adapter)	1.0	Yes	Metal	*

*: AC power line Conducted Emission Test.

3.3 System configuration

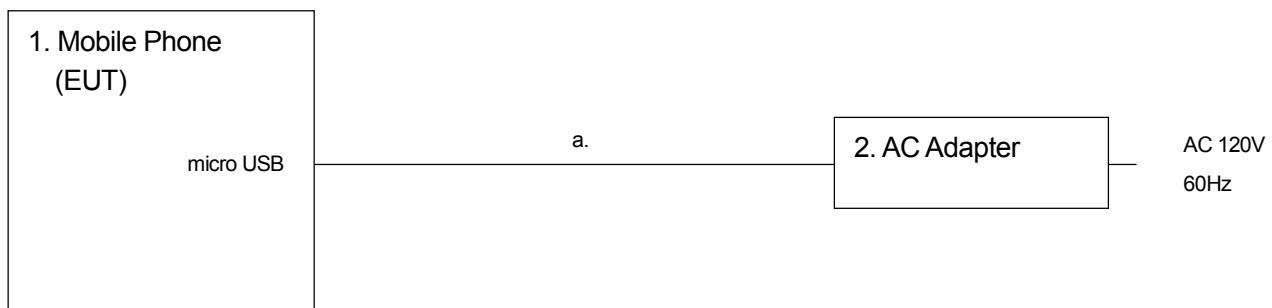

Note1: Numbers assigned to equipment or cables on this diagram correspond to the list in “3.1 Equipment(s) used” and “3.2 Cable(s) used”.

4. 6dB Bandwidth

4.1 Measurement procedure


[FCC 15.247(a)(2), KDB 558074 D01 v03r05, Section 8.2]

The bandwidth at 6dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) RBW = 100kHz.
- b) VBW \geq 3 x RBW.
- c) Sweep time = auto-couple.
- d) Detector = peak.
- e) Trace mode = max hold.

- Test configuration

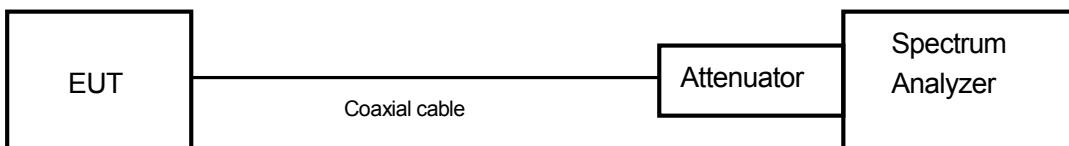

4.2 Limit

The minimum permissible 6dB bandwidth is 500kHz.

4.3 Measurement result

Date : August 8, 2016
 Temperature : 24.2 [°C]
 Humidity : 50.2 [%]
 Test place : Shielded room No.4

Test engineer :


Kazunori Saito

[IEEE802.11b, IEEE802.11g, IEEE802.11n (HT20)]


Channel	Frequency [MHz]	6dB bandwidth [MHz]		
		IEEE802.11b	IEEE802.11g	IEEE802.11n (HT20)
Low	2412	10.063	16.415	17.612
Middle	2437	10.075	16.459	17.636
High	2462	10.065	16.409	17.608

4.4 Trace data [IEEE802.11b]


Channel Low

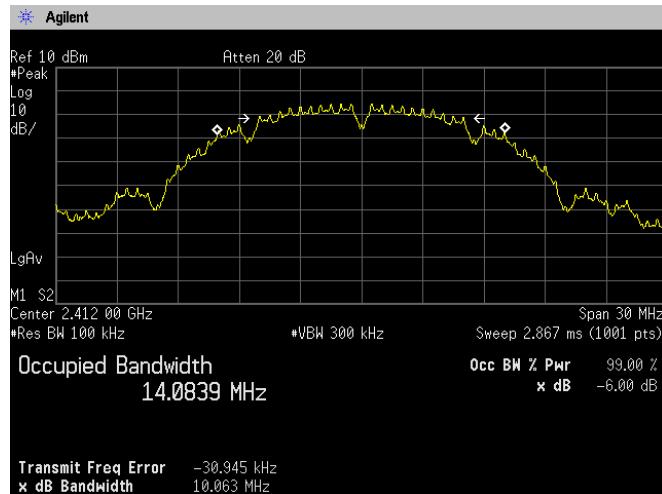




Channel Middle

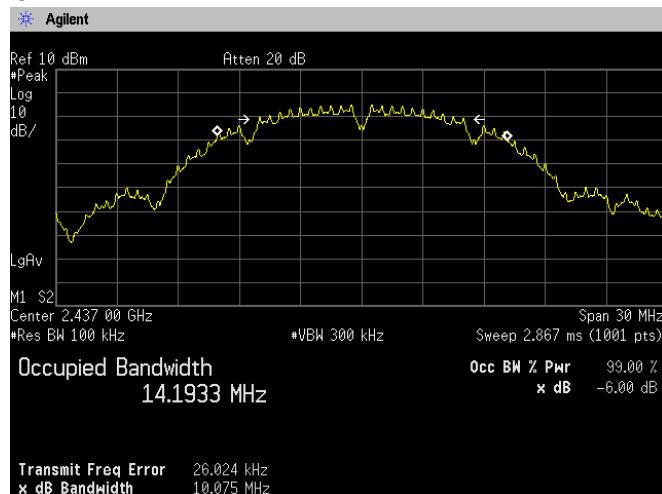

Channel High

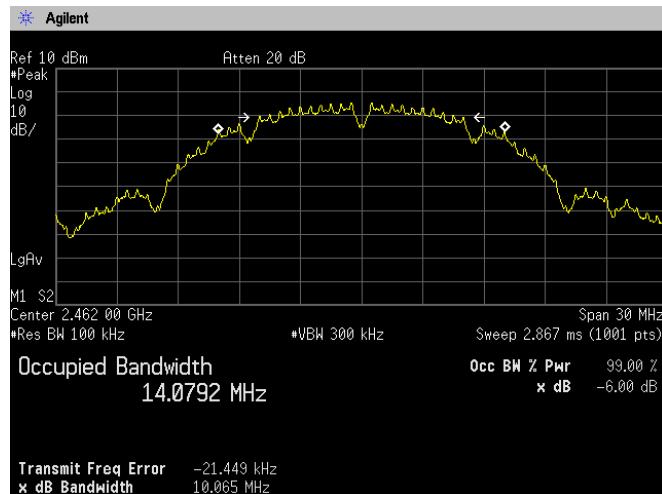

[IEEE802.11g]

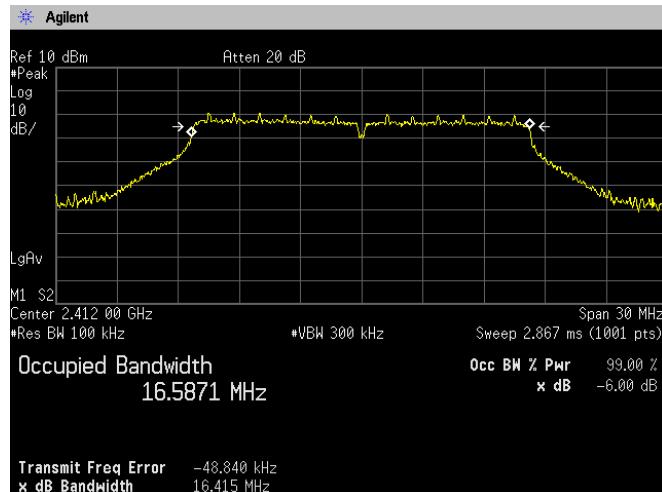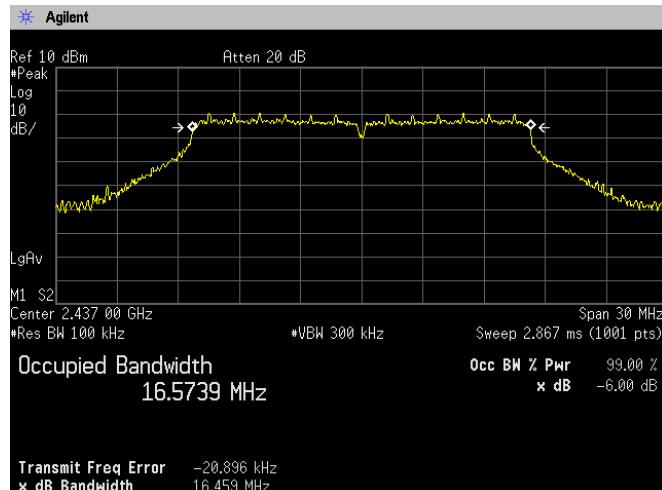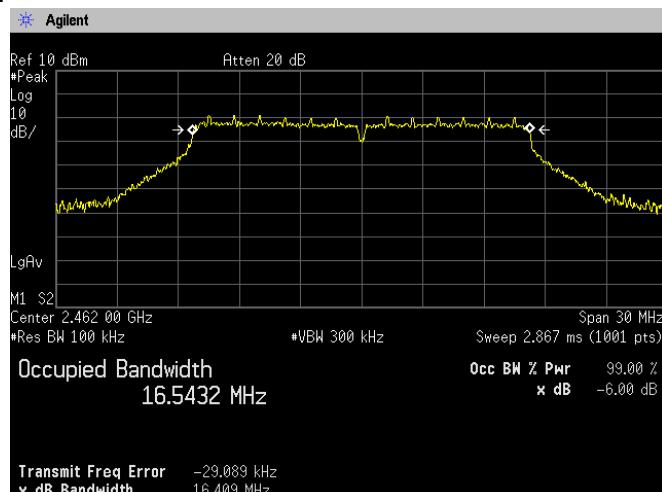
Channel Low**Channel Middle****Channel High**




Zacta

[IEEE802.11n (HT20)]


Channel Low

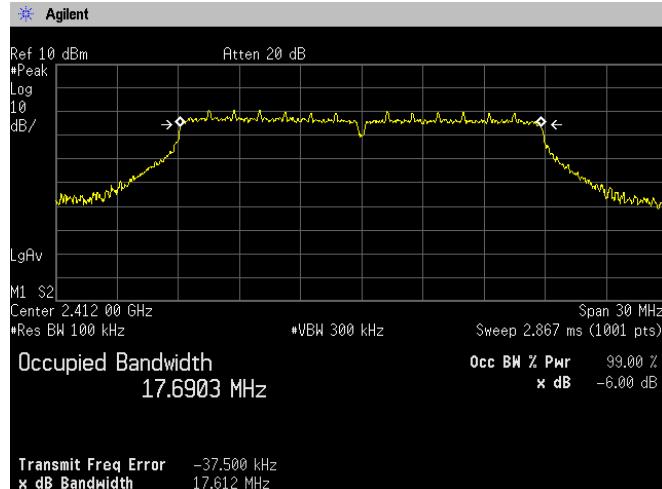

Channel Middle

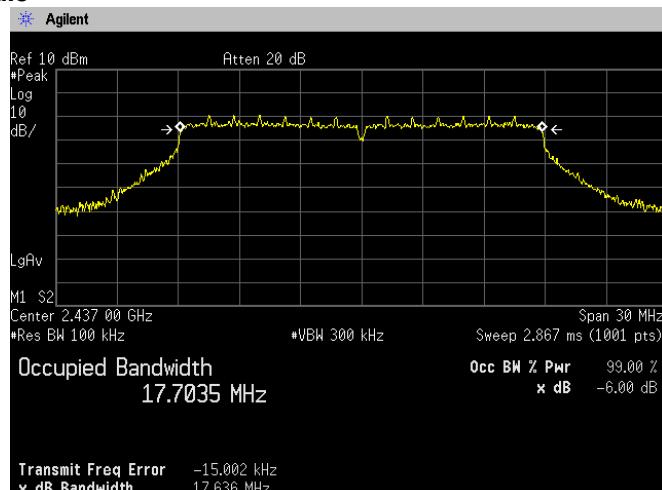

Channel High

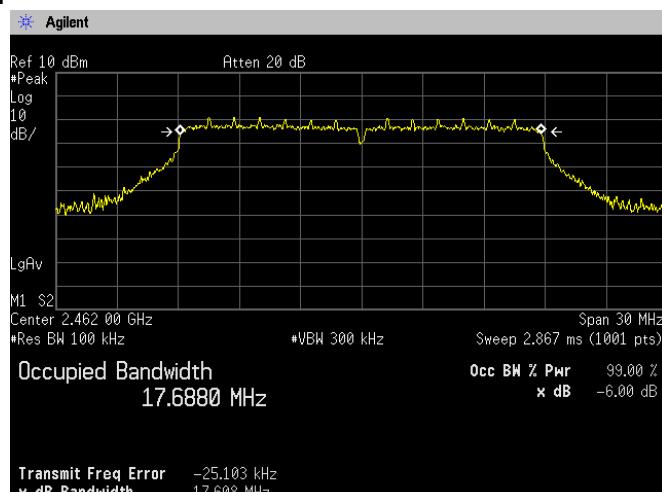

5. Maximum conducted (average) output power

5.1 Measurement procedure


[FCC 15.247(b)(3), KDB 558074 D01 v03r05, Section 9.2.2.1]

The peak power is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) RBW = 1-5% of the DTS bandwidth not to exceed 1MHz.
- b) VBW \geq 3 x RBW.
- c) Span \geq 1.5 times the DTS bandwidth.
- d) Sweep time = auto-couple.
- e) Detector = RMS.
- f) Trace mode = Clear/Write, Single, 100 count
- g) Points \geq 2 x Span / RBW

- Test configuration

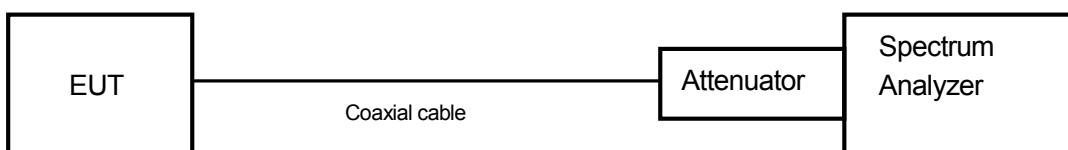

5.2 Limit

1W (1000mW) or less

5.3 Measurement result

Date	:	August 8, 2016
Temperature	:	24.2 [°C]
Humidity	:	50.2 [%]
Test place	:	Shielded room No.4

Test engineer :

Kazunori Saito

**[IEEE802.11b]
Battery Full**

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Output Power (mW)	Limit (mW)	Result
Low	2412	3.37	10.52	13.89	24.491	≤1000	PASS
Middle	2437	2.93	10.52	13.45	22.131	≤1000	PASS
High	2462	3.27	10.52	13.79	23.933	≤1000	PASS

**[IEEE802.11g]
Battery Full**

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Output Power (mW)	Limit (mW)	Result
Low	2412.00	1.03	10.52	11.55	14.289	≤1000	PASS
Middle	2437.00	1.30	10.52	11.82	15.205	≤1000	PASS
High	2462.00	1.84	10.52	12.36	17.219	≤1000	PASS

[IEEE802.11n (HT20)]
Battery Full

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Output Power (mW)	Limit (mW)	Result
Low	2412.00	1.52	10.52	12.04	15.996	≤1000	PASS
Middle	2437.00	1.80	10.52	12.32	17.061	≤1000	PASS
High	2462.00	1.86	10.52	12.38	17.298	≤1000	PASS

Calculation;

$$\text{Reading (dBm)} + \text{Factor (dB)} = \text{Level (dBm)}$$


$$10\log P = \text{Level (dBm)}$$

$$P = 10^{(\text{Maximum Peak Output Power} / 10)} \text{ (mW)}$$

5.4 Trace data

[IEEE802.11b]


[Battery Full]
Channel Low

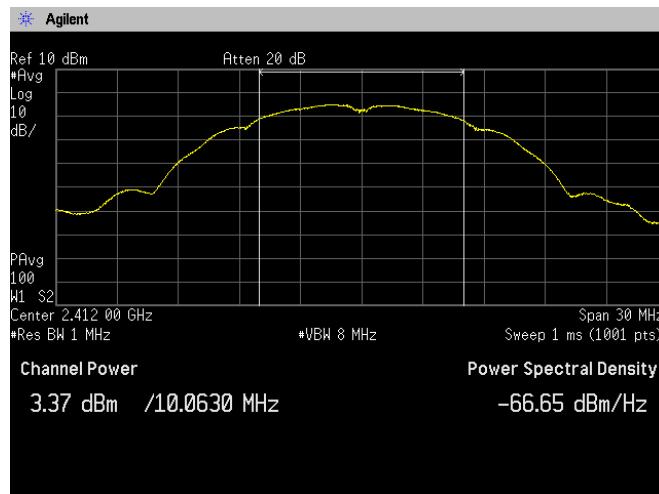


Channel Middle




Channel High

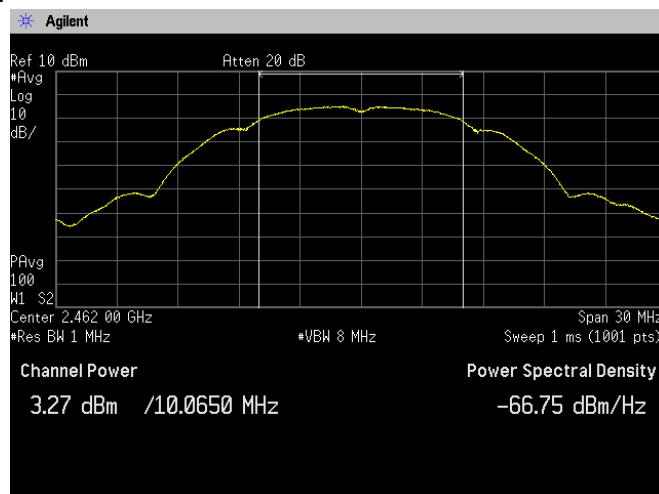


[IEEE802.11g]
[Battery Full]
Channel Low

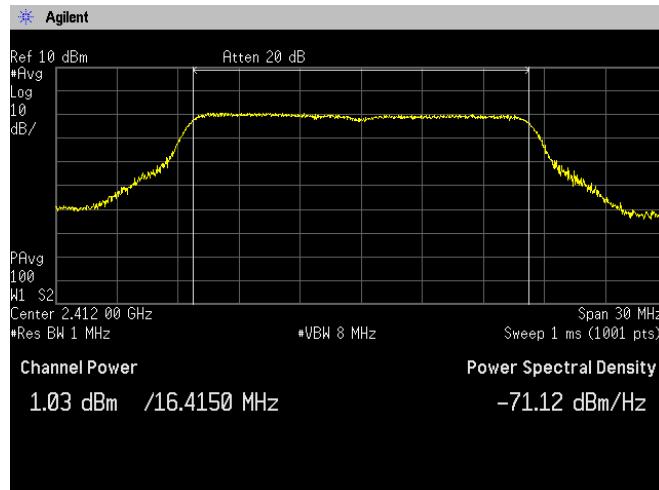


Channel Middle

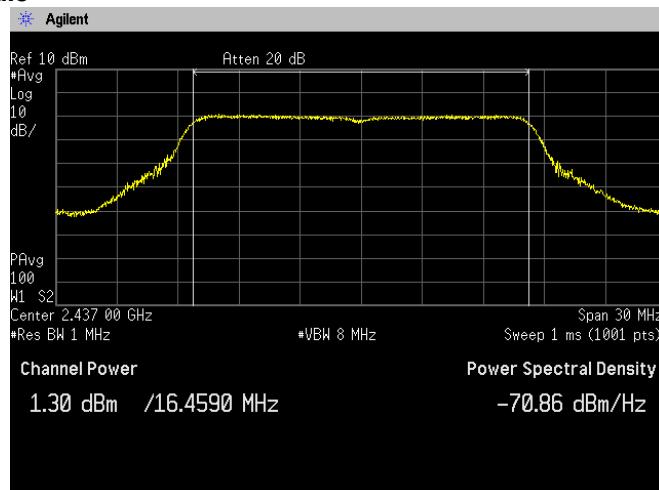


Channel High

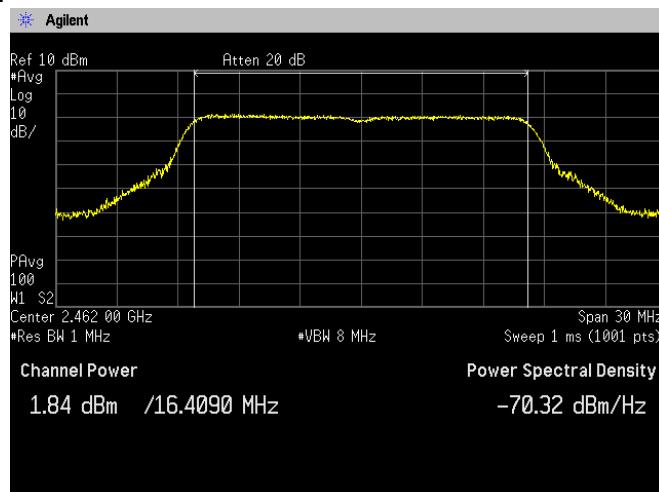


[IEEE802.11n (HT20)]
 [Battery Full]
 Channel Low

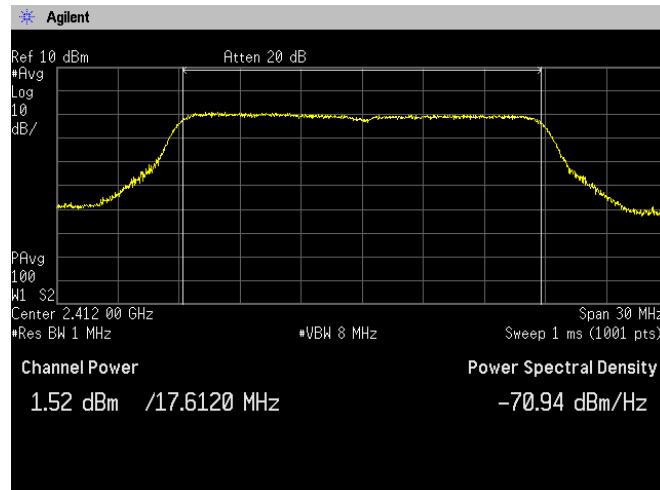

Channel Middle

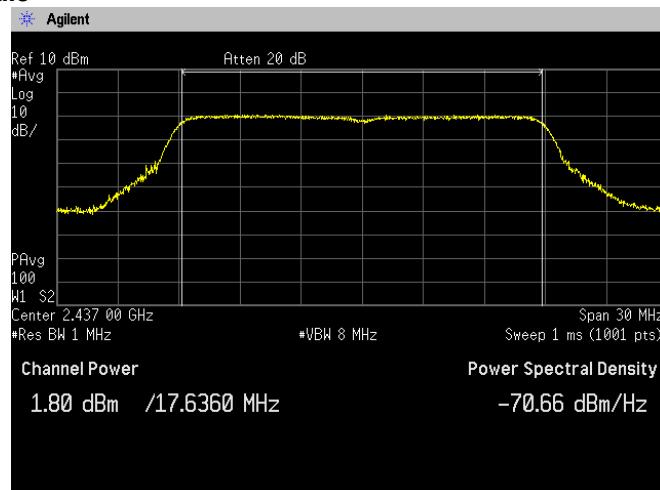

Channel High

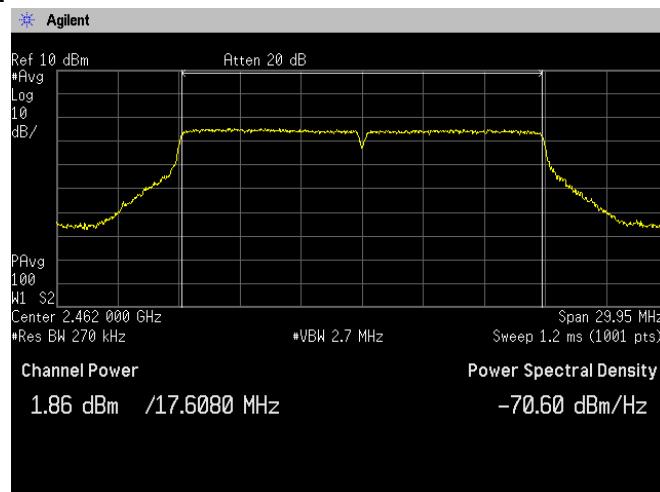

6. Band Edge Compliance of RF Conducted Emissions

6.1 Measurement procedure


[FCC 15.247(d), KDB 558074 D01 v03r05, Section 11.0]

The Band Edge is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) Span = Arbitrary setting. (Setting suitable for measurement.)
- b) RBW = 100kHz.
- c) VBW \geq 3 x RBW
- d) Sweep time = auto-couple.
- e) Detector = peak.
- f) Trace mode = max hold.

- Test configuration

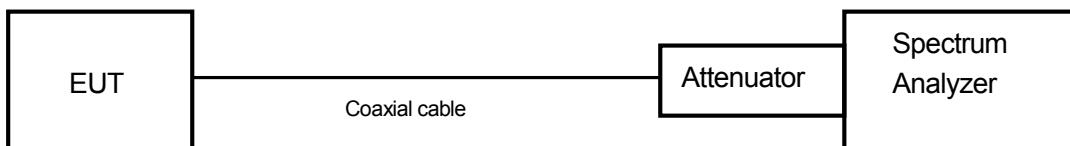

6.2 Limit

In any 100kHz bandwidth outside the frequency band the radio frequency power that is produced by the intentional radiator shall be at least 30dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

6.3 Measurement result

Date : August 8, 2016
 Temperature : 24.2 [°C]
 Humidity : 50.2 [%]
 Test place : Shielded room No.4

Test engineer :

Kazunori Saito

[IEEE802.11b]

Channel	Frequency (MHz)	RF Power Level (dBm)	Band-edge Frequency (MHz)	Band-edge Level (dBm)	Difference Level (dBm)	Limit (dBm)	Result
Low	2412.00	-5.44	2400.00	-42.71	37.27	At least 20dB below from peak of RF	PASS
High	2462.00	-4.85	2486.22	-66.14	61.29	At least 20dB below from peak of RF	PASS

[IEEE802.11g]


Channel	Frequency (MHz)	RF Power Level (dBm)	Band-edge Frequency (MHz)	Band-edge Level (dBm)	Difference Level (dBm)	Limit (dBm)	Result
Low	2412.00	-9.35	2399.76	-42.91	33.56	At least 20dB below from peak of RF	PASS
High	2462.00	-8.89	2483.58	-52.15	43.26	At least 20dB below from peak of RF	PASS

[IEEE802.11n (HT20)]


Channel	Frequency (MHz)	RF Power Level (dBm)	Band-edge Frequency (MHz)	Band-edge Level (dBm)	Difference Level (dBm)	Limit (dBm)	Result
Low	2412.00	-9.22	2400.00	-42.06	32.84	At least 30dB below from peak of RF	PASS
High	2462.00	-8.89	2483.50	-50.80	41.91	At least 30dB below from peak of RF	PASS

6.4 Trace data [IEEE802.11b]

Channel Low

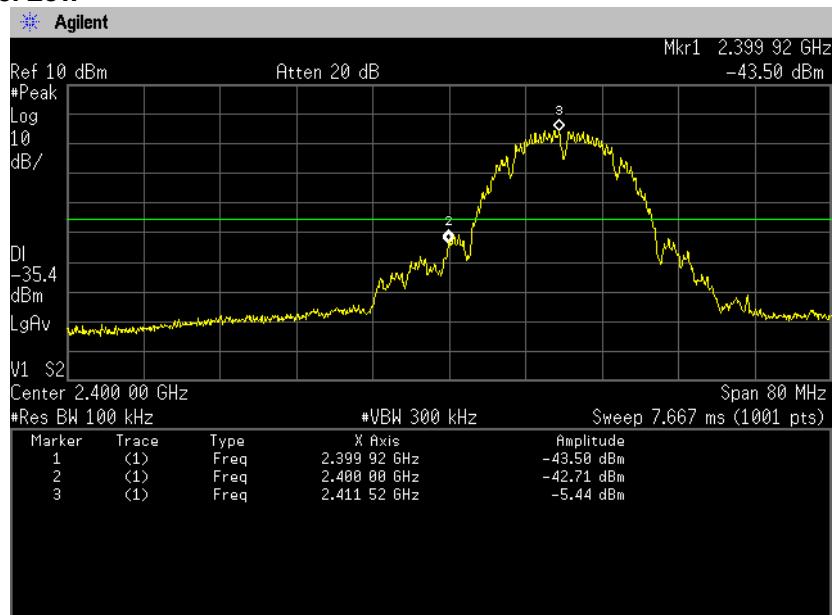


Channel High

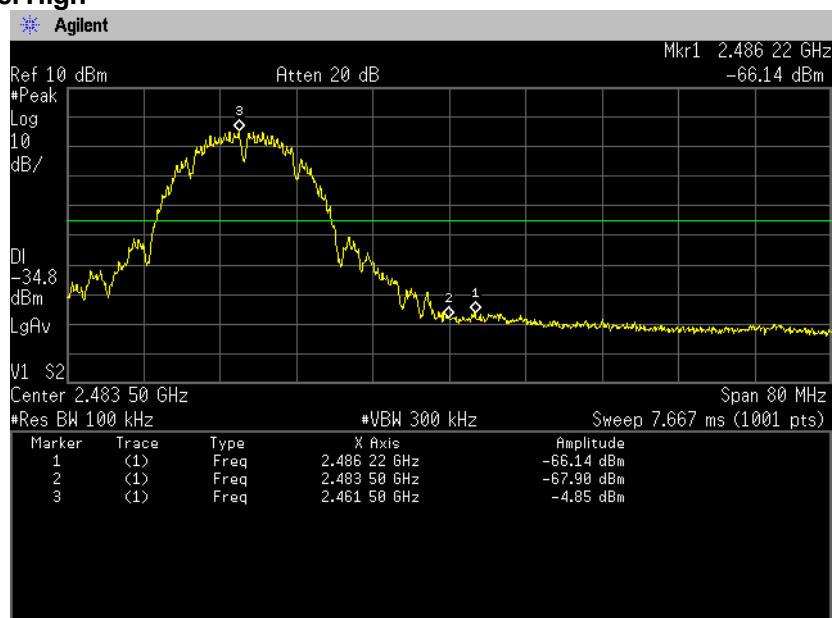


[IEEE802.11g]

Channel Low

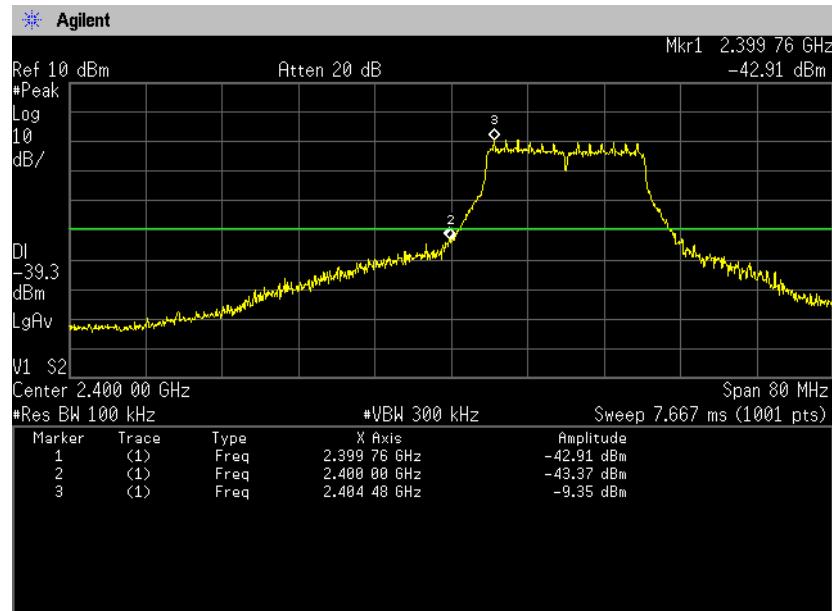


Channel High

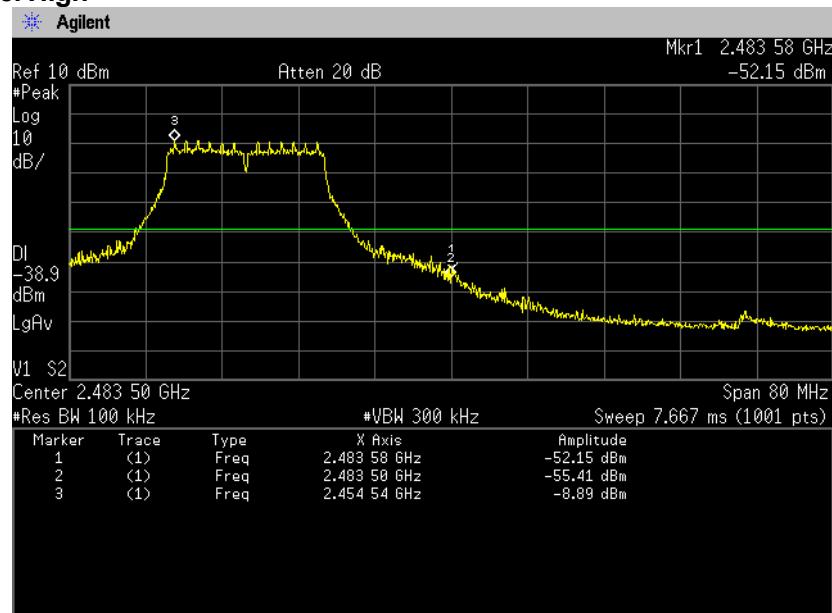


[IEEE802.11n (HT20)]

Channel Low

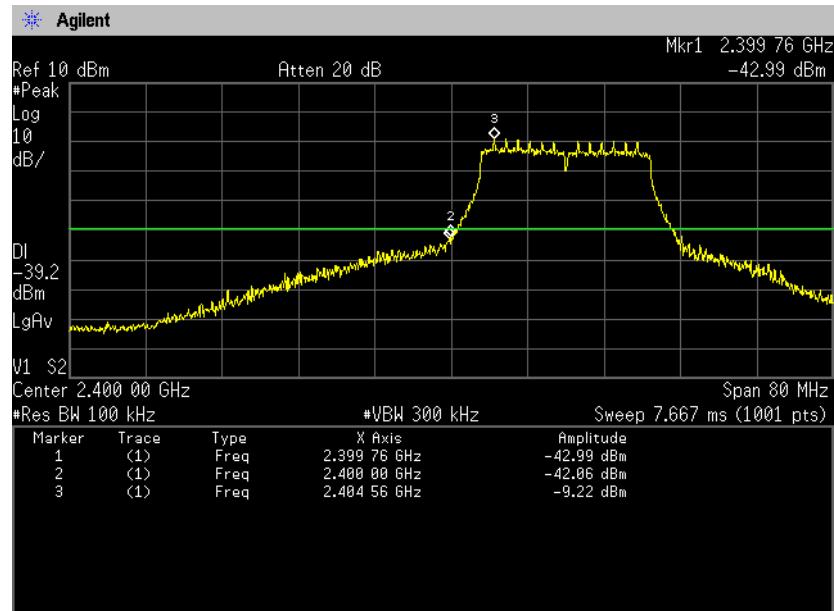

Channel High

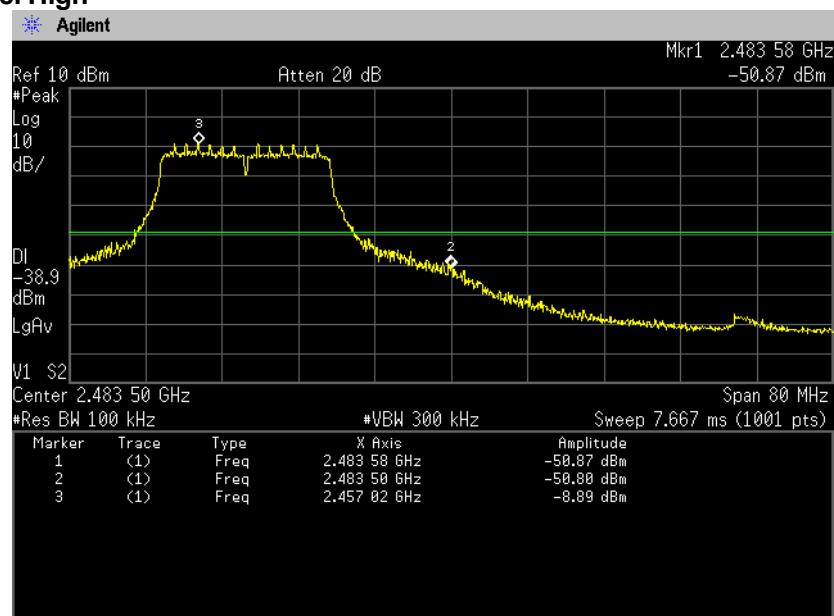

7. Spurious emissions - Conducted -

7.1 Measurement procedure


[FCC 15.247(d), KDB 558074 D01 v03r05, Section 11.0]

The spurious emissions (Conducted) are measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) Span = wide enough to fully capture the emission being measured.
- b) RBW = 100 kHz.
- c) VBW \geq RBW.
- d) Sweep time = auto-couple.
- e) Detector = peak.
- f) Trace mode = max hold.

- Test configuration

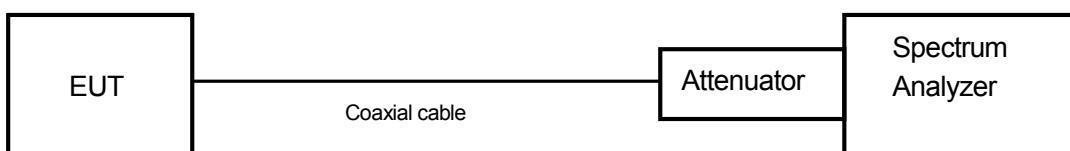

7.2 Limit

In any 100kHz bandwidth outside the frequency band the radio frequency power that is produced by the intentional radiator shall be at least 30dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

7.3 Measurement result

Date	:	August 8, 2016		
Temperature	:	24.2 [°C]		
Humidity	:	50.2 [%]	Test engineer :	
Test place	:	Shielded room No.4		Kazunori Saito

[IEEE802.11b, IEEE802.11g, IEEE802.11n (HT20)]


Channel	Frequency [MHz]	Limit [dB]	Results Chart	Result
Low	2412	At least 30dB below from peak of RF	See the trace Data	PASS
Middle	2437	At least 30dB below from peak of RF	See the trace Data	PASS
High	2462	At least 30dB below from peak of RF	See the trace Data	PASS

7.4 Trace data


[IEEE802.11b]

Channel Low


30MHz-1GHz

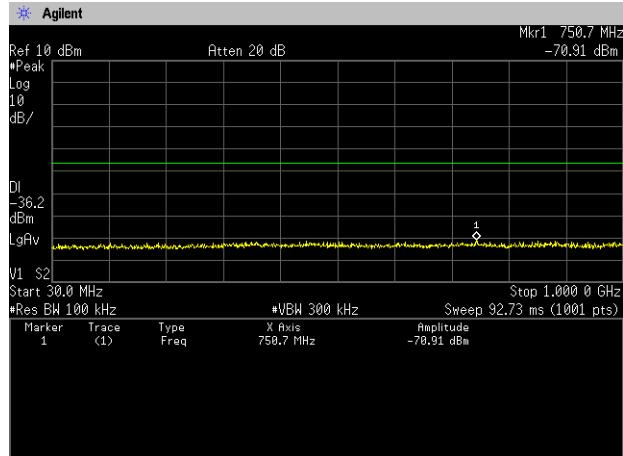


1GHz-5GHz

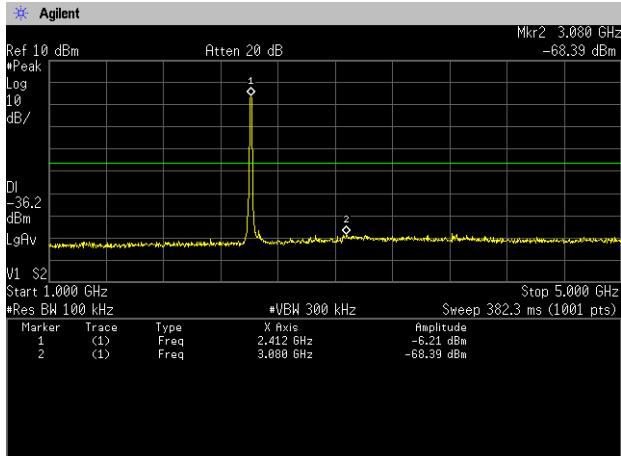


5GHz-10GHz

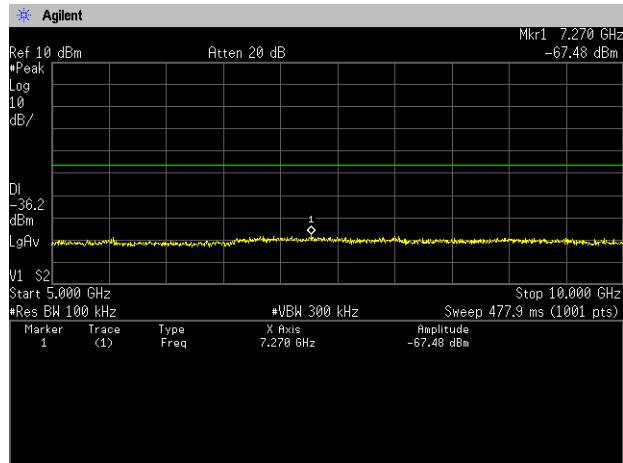


10GHz-15GHz

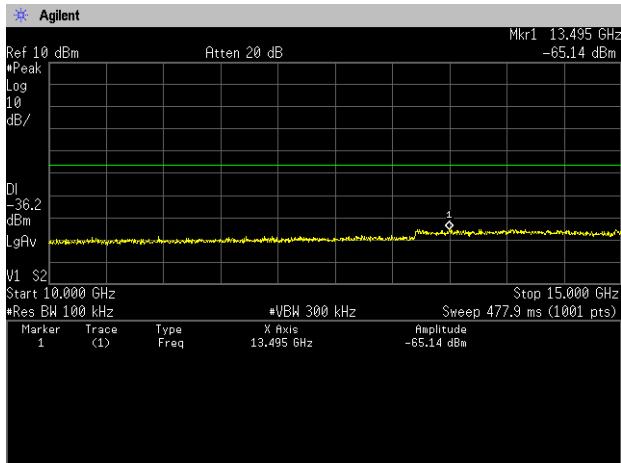


15GHz-20GHz

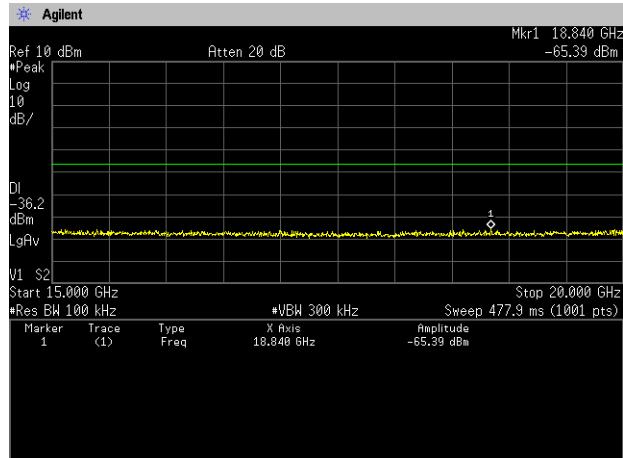


20GHz-25GHz

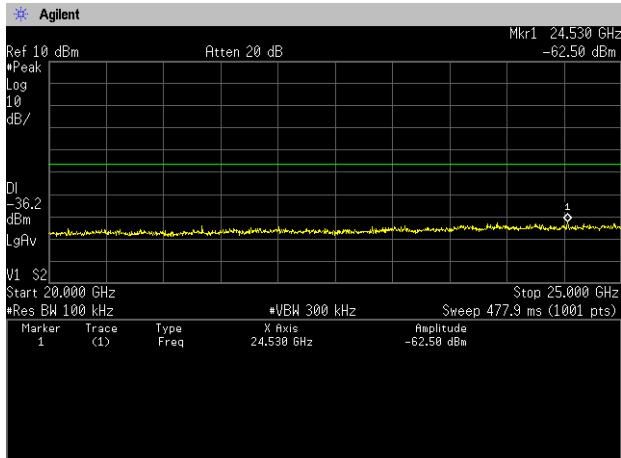


Channel Middle 30MHz-1GHz

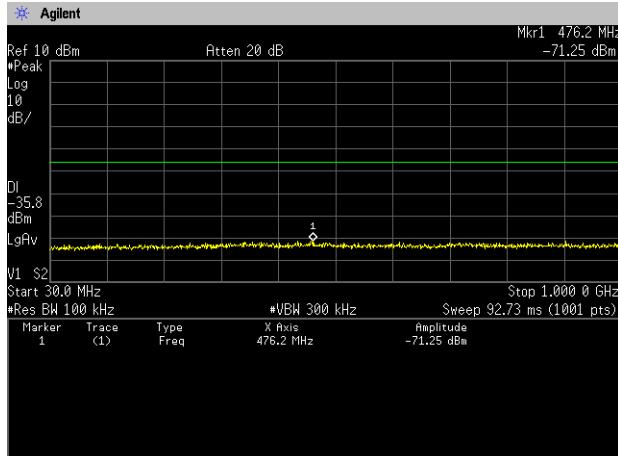


1GHz-5GHz

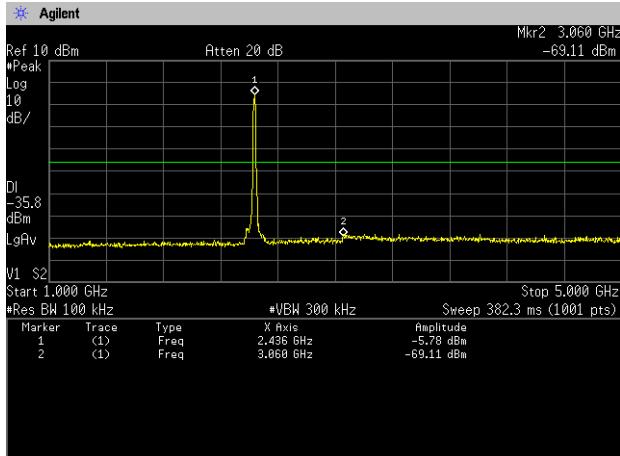


5GHz-10GHz

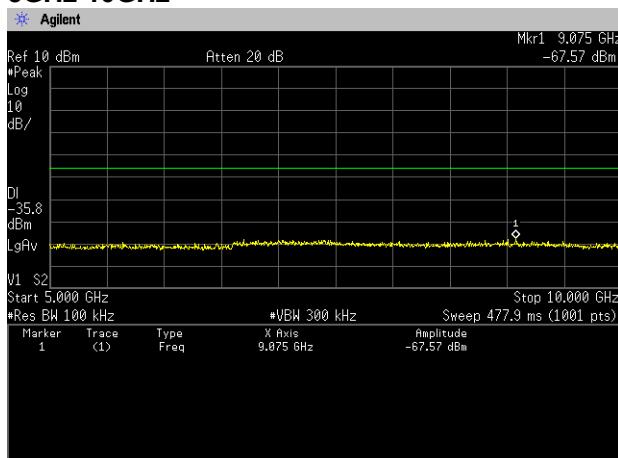


10GHz-15GHz

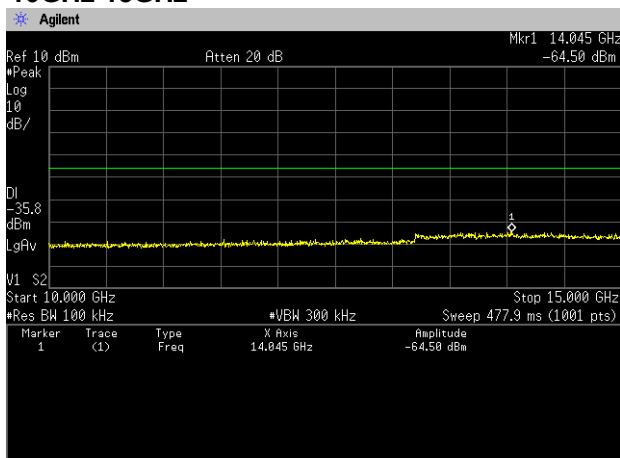


15GHz-20GHz

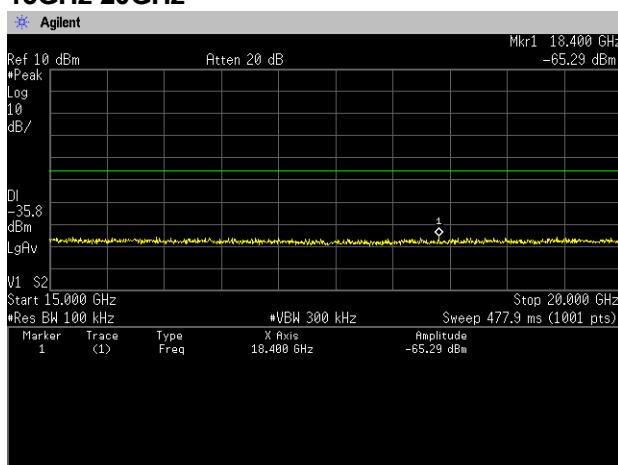


20GHz-25GHz

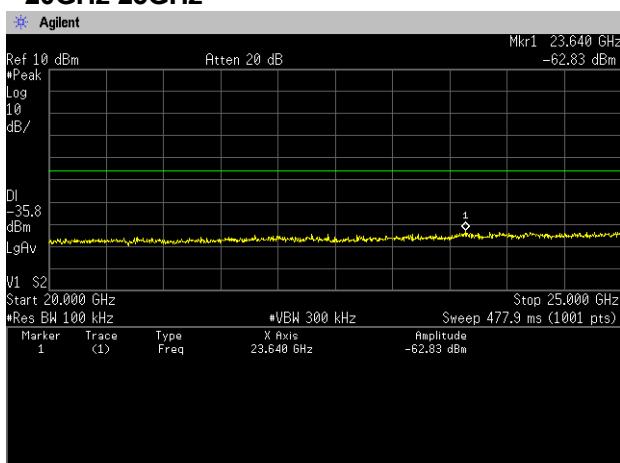


Channel High 30MHz-1GHz

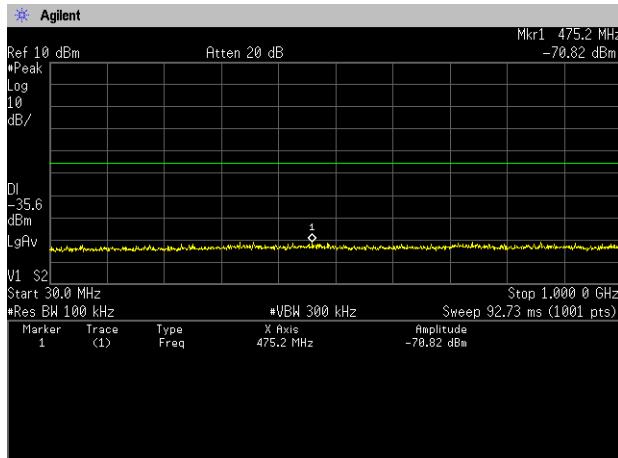


1GHz-5GHz

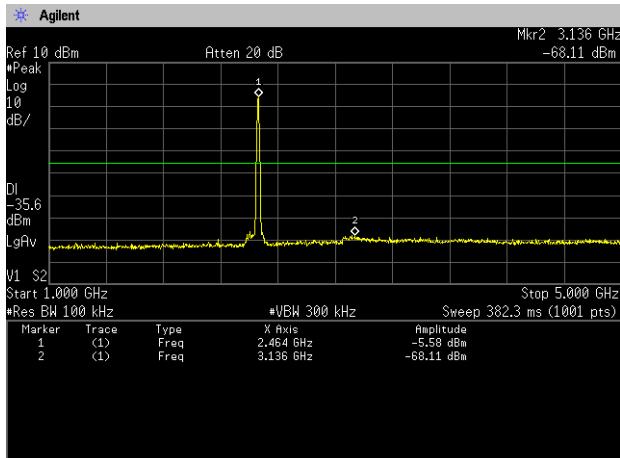


5GHz-10GHz

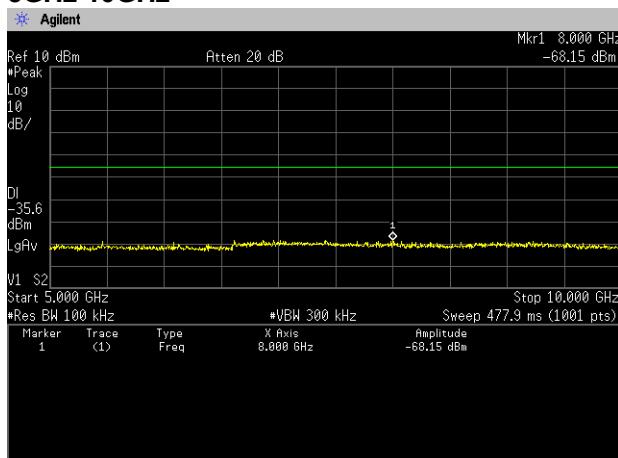


10GHz-15GHz

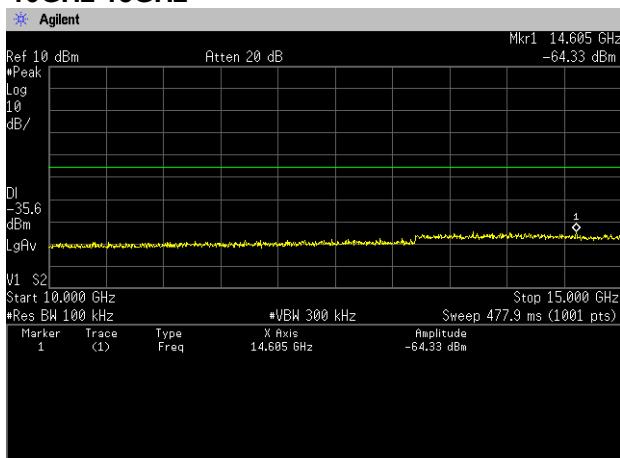







15GHz-20GHz

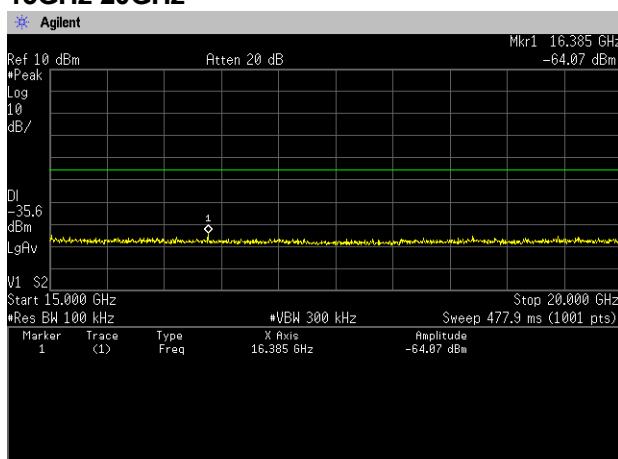


20GHz-25GHz

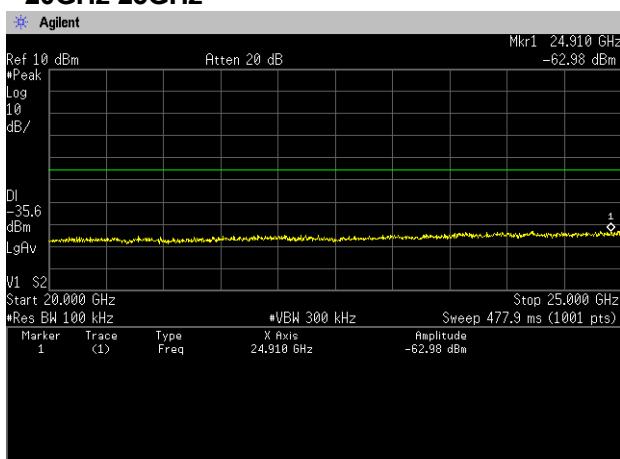


[IEEE802.11g]
Channel Low
30MHz-1GHz

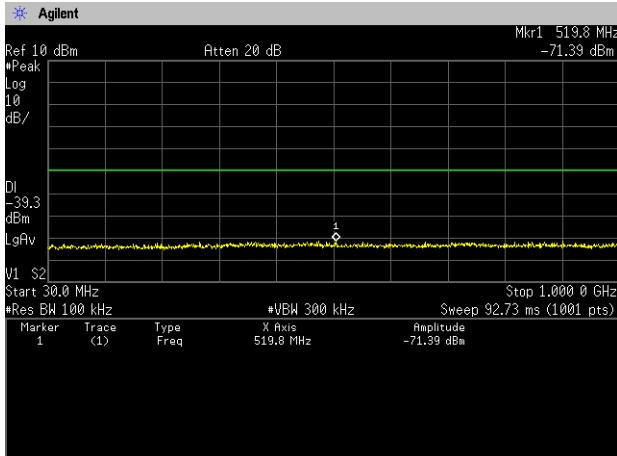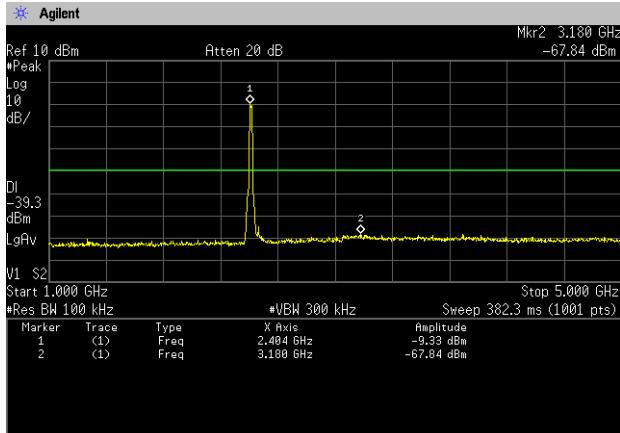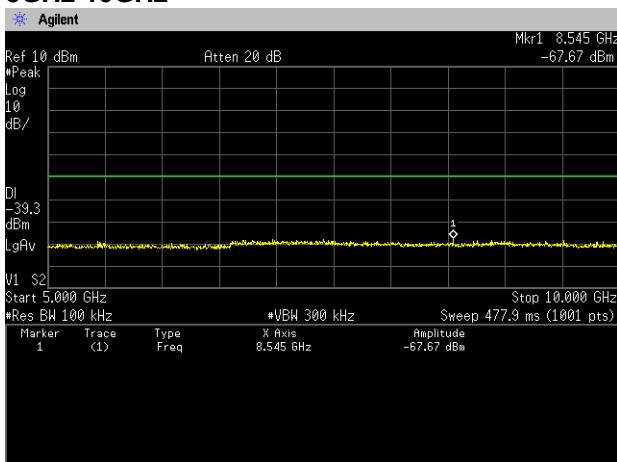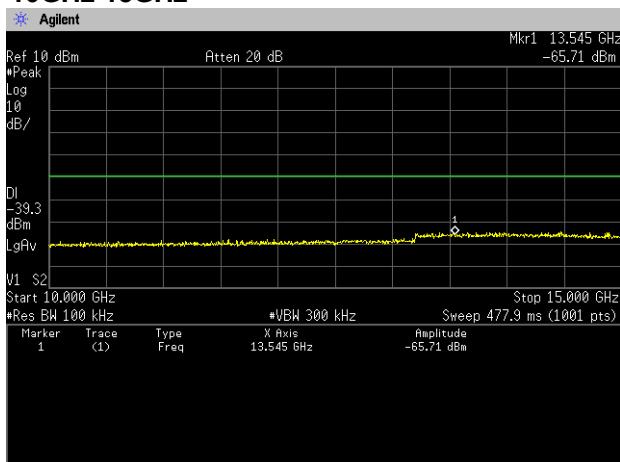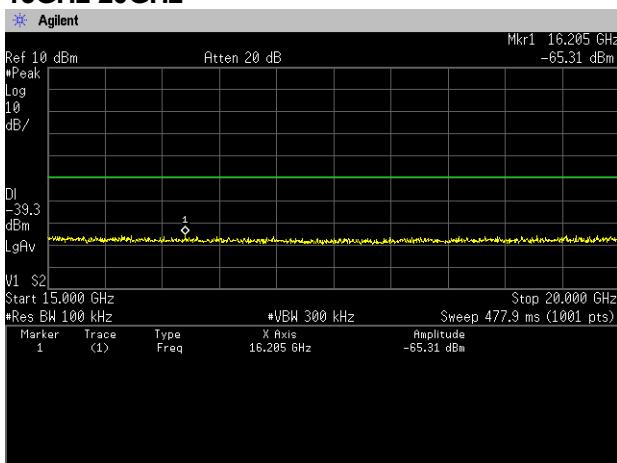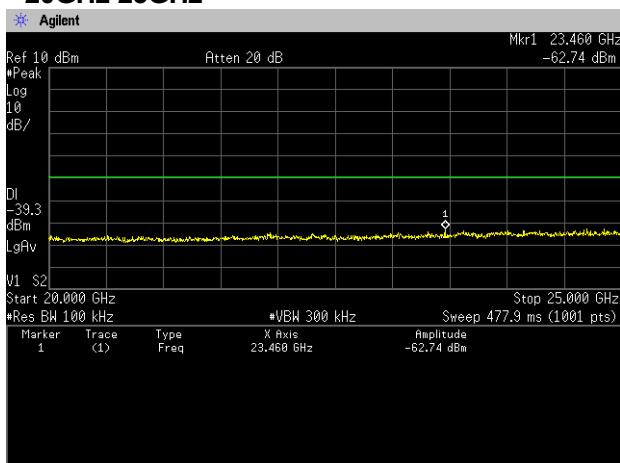**1GHz-5GHz****5GHz-10GHz****10GHz-15GHz****15GHz-20GHz****20GHz-25GHz**


Channel Middle 30MHz-1GHz

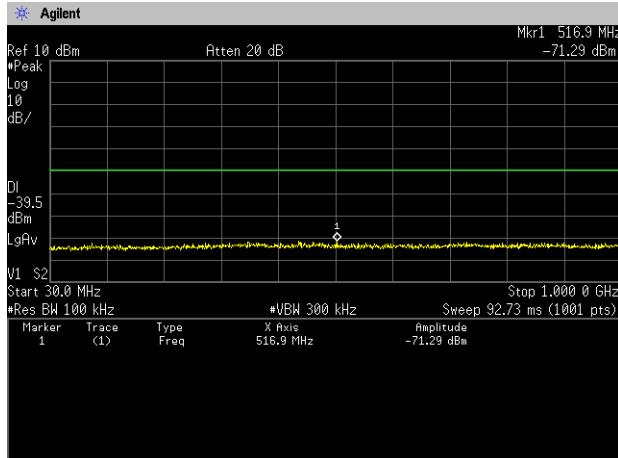


1GHz-5GHz

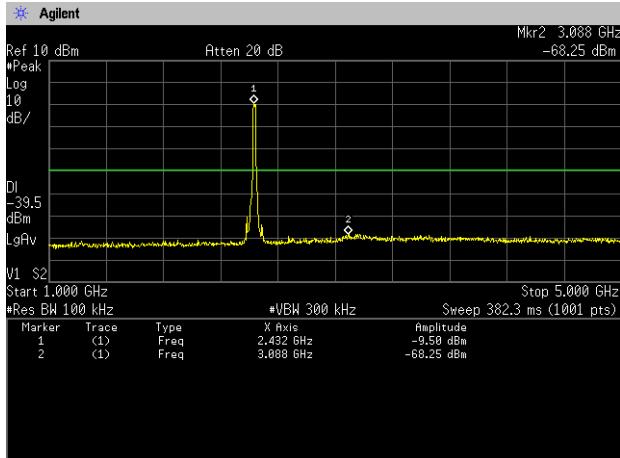


5GHz-10GHz

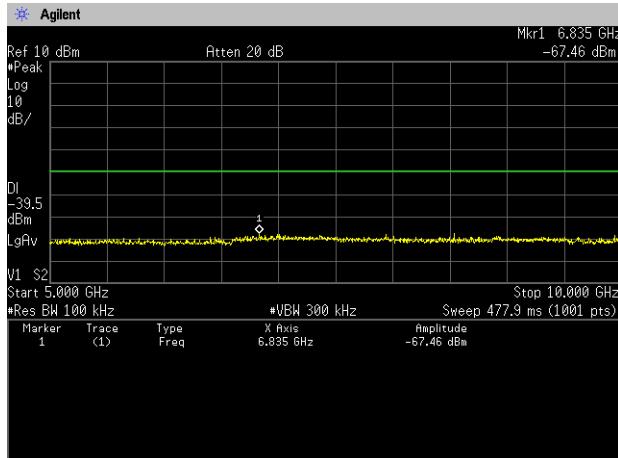


10GHz-15GHz

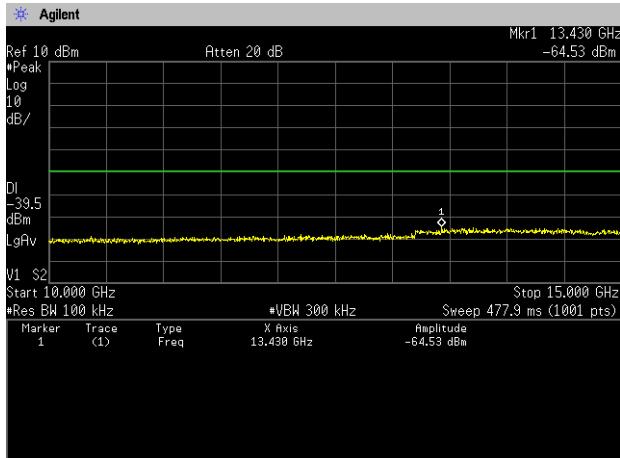


15GHz-20GHz

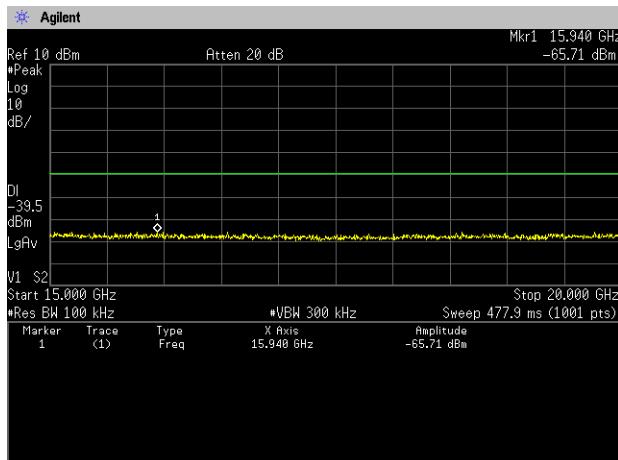


20GHz-25GHz

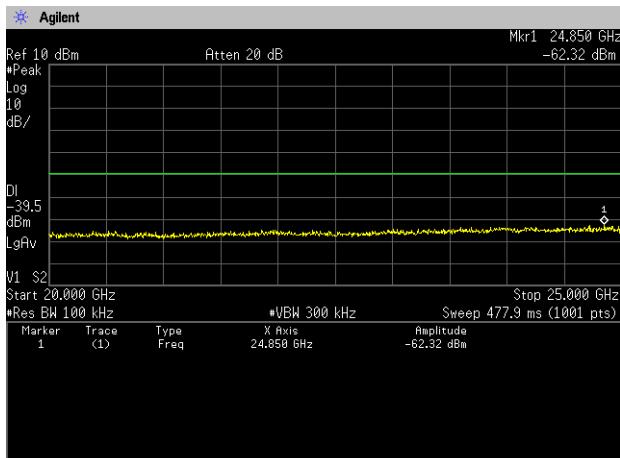


Channel High 30MHz-1GHz

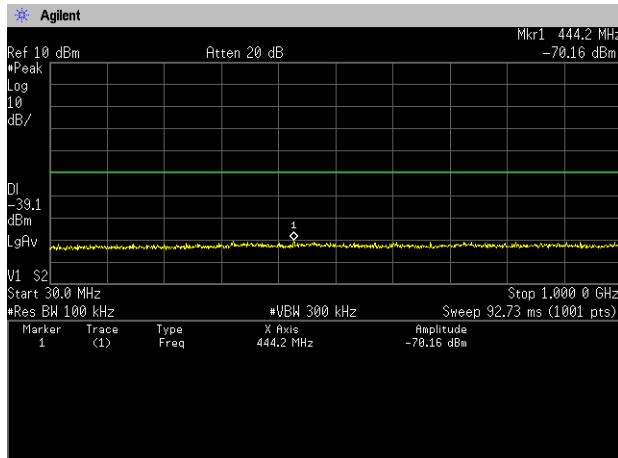


1GHz-5GHz

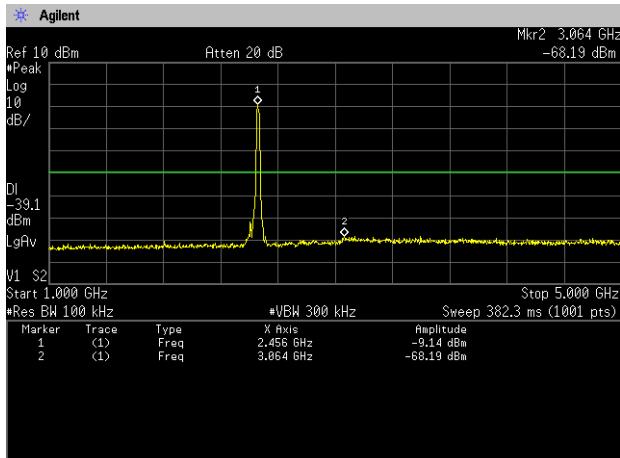


5GHz-10GHz

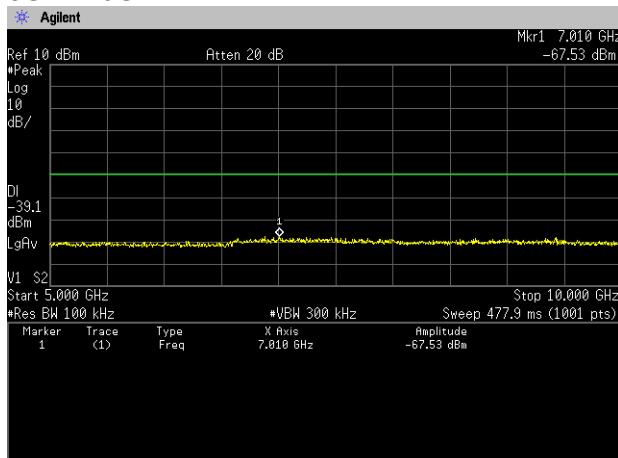


10GHz-15GHz

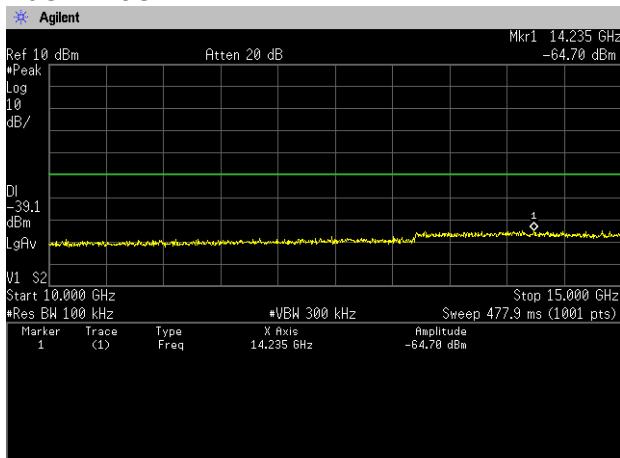

15GHz-20GHz

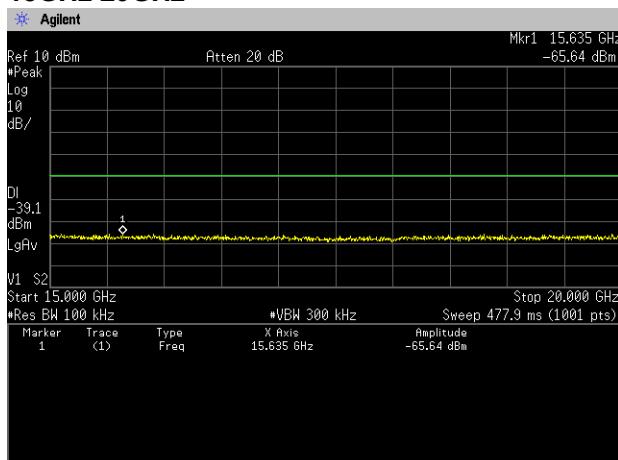


20GHz-25GHz

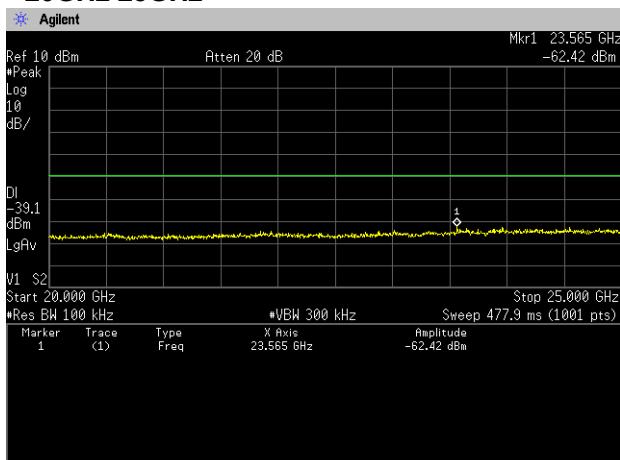




Zacta


[IEEE802.11n (HT20)]

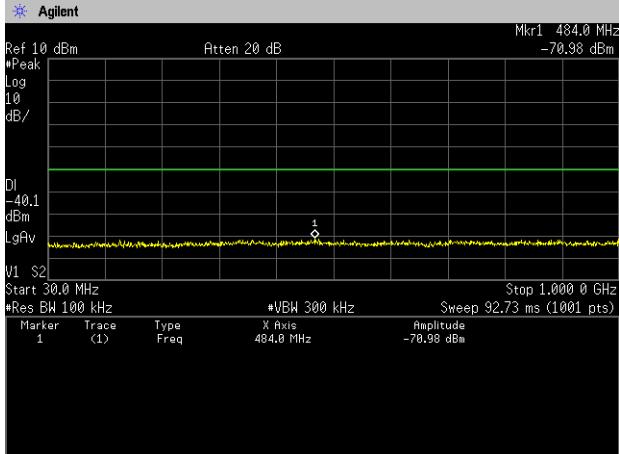Channel Low
30MHz-1GHz


1GHz-5GHz

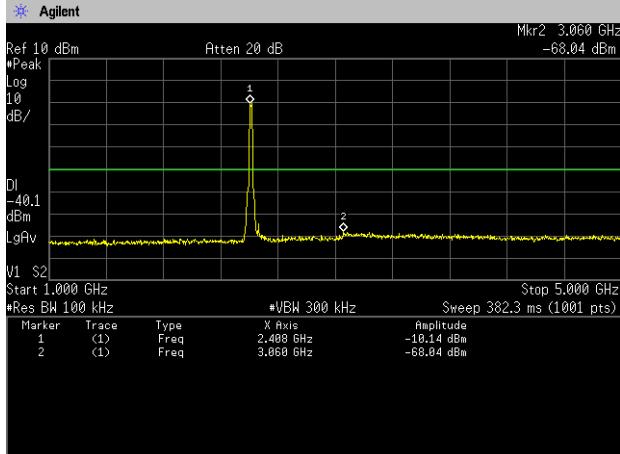


5GHz-10GHz

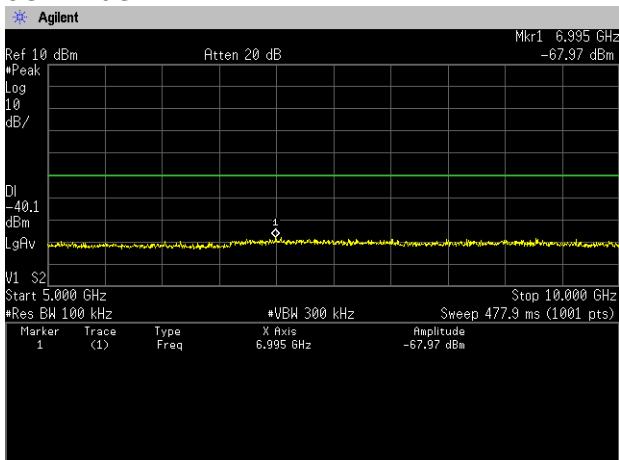


10GHz-15GHz

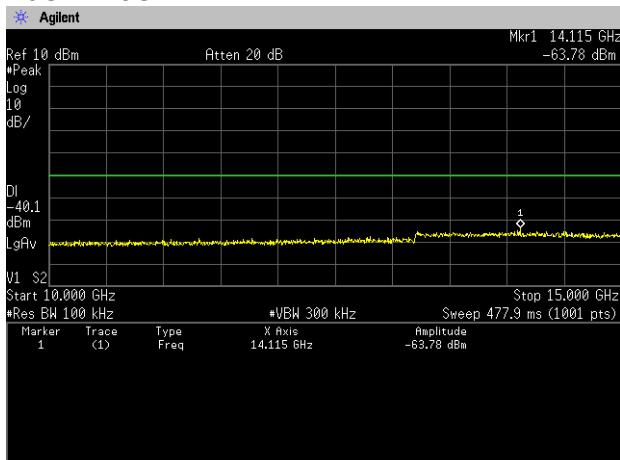


15GHz-20GHz

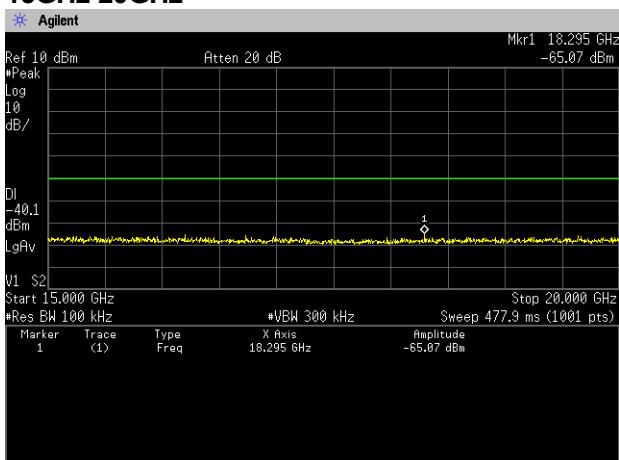


20GHz-25GHz

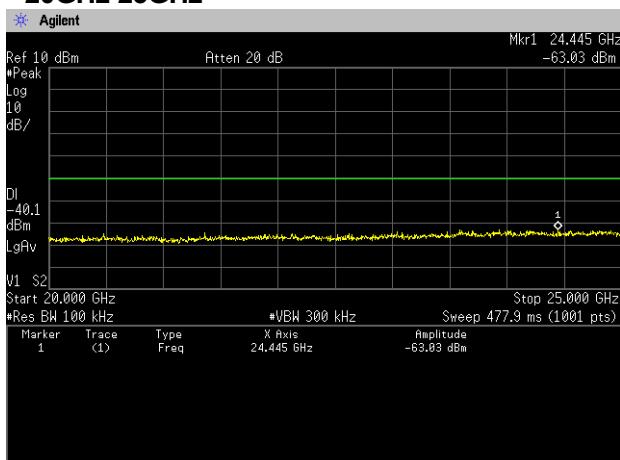


Channel Middle 30MHz-1GHz

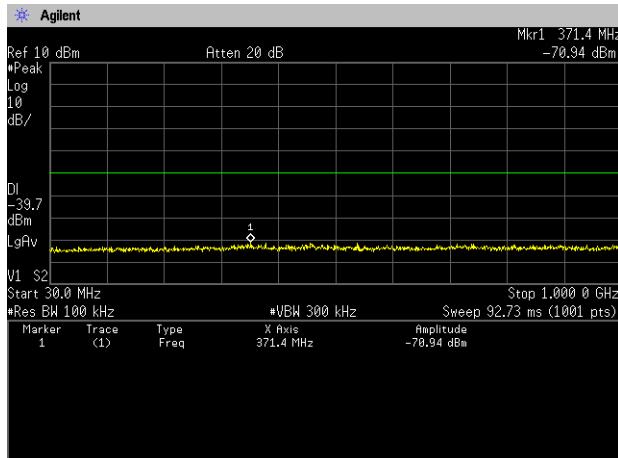


1GHz-5GHz

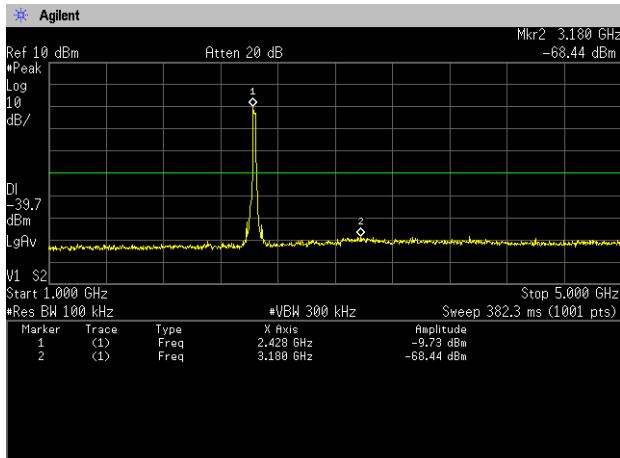


5GHz-10GHz

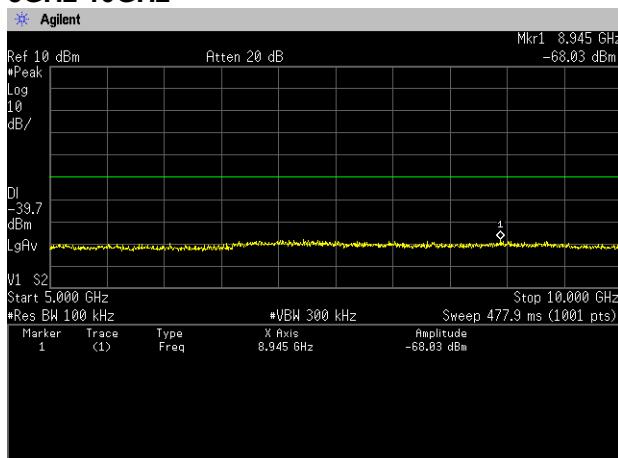


10GHz-15GHz

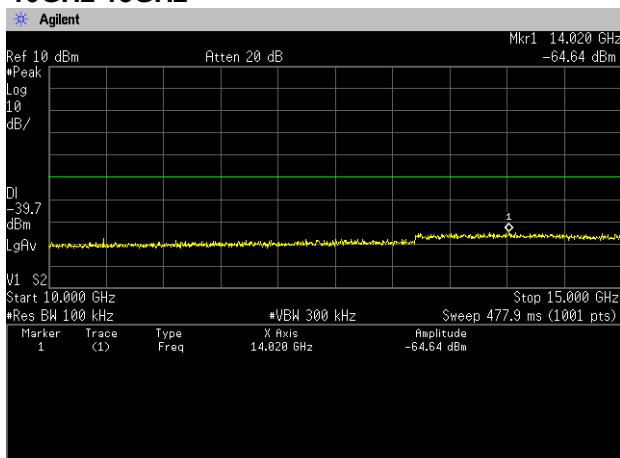


15GHz-20GHz

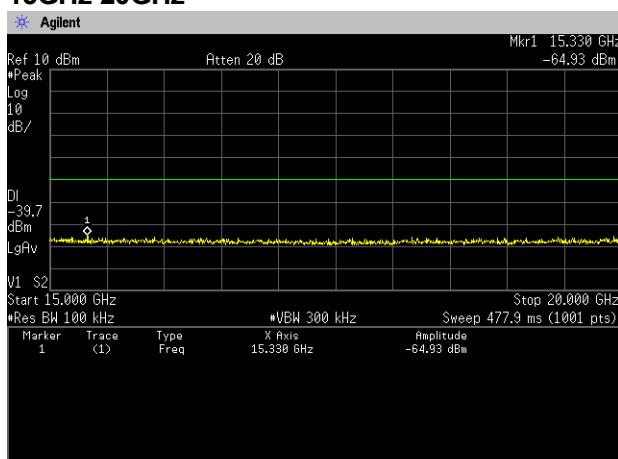


20GHz-25GHz

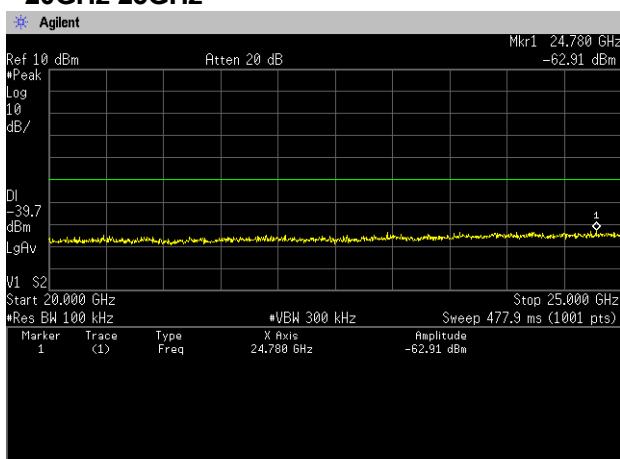


Channel High 30MHz-1GHz

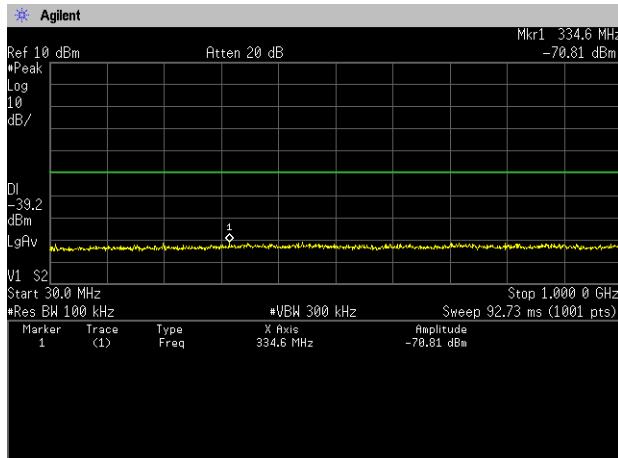


1GHz-5GHz

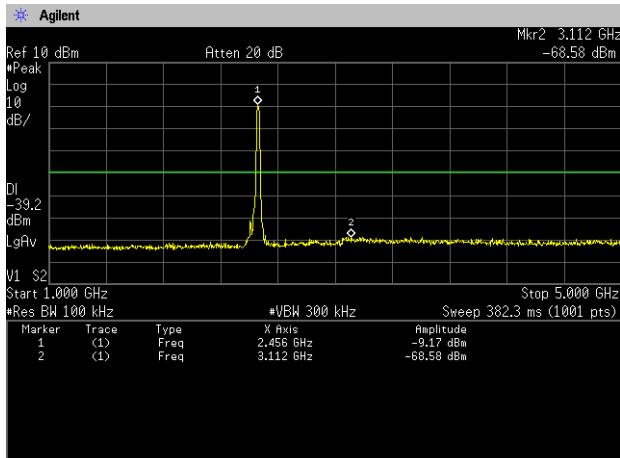


5GHz-10GHz

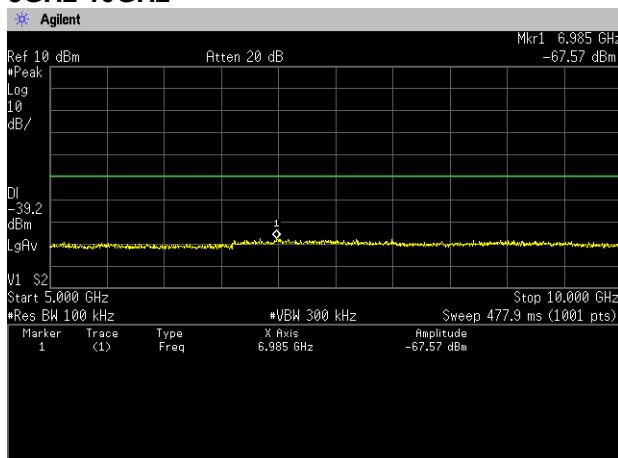


10GHz-15GHz

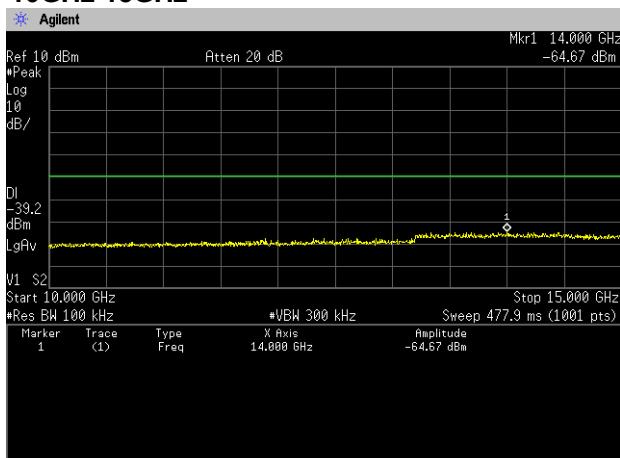

15GHz-20GHz

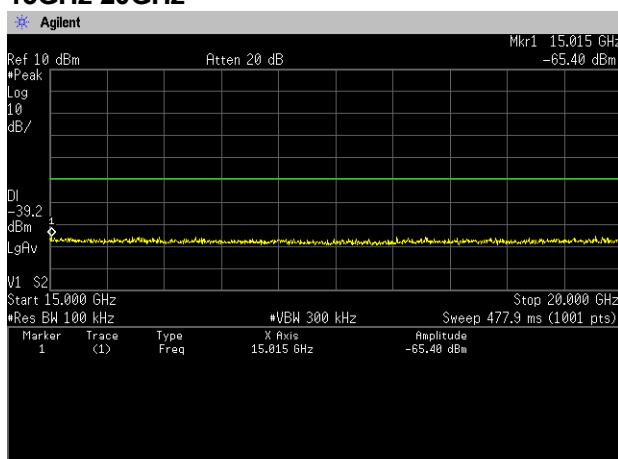

20GHz-25GHz

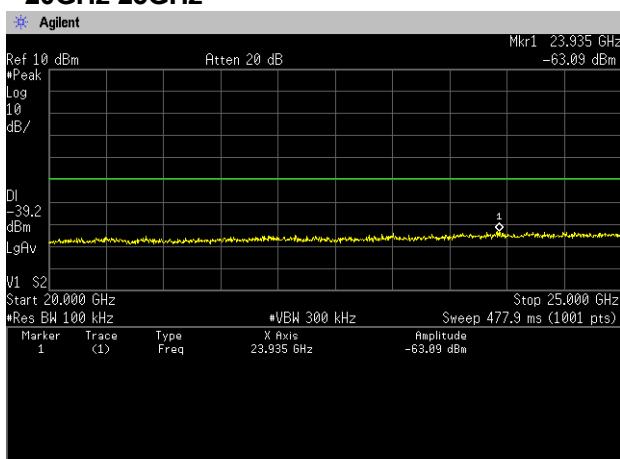

8. Spurious Emissions - Radiated -

8.1 Measurement procedure

[FCC 15.247(d), 15.205, 15.209, KDB 558074 D01 v03r05, Section 12.1]

Test was applied by following conditions.

Test method	:	ANSI C63.10
Frequency range	:	9kHz to 25GHz
Test place	:	3m Semi-anechoic chamber
EUT was placed on	:	Styrofoam table / (W)1.0m × (D)1.0m × (H)0.8m (below 1GHz) Styrofoam table / (W)1.0m × (D)1.0m ×(H)1.5m (above 1GHz)
Antenna distance	:	3m
Test receiver setting	:	Below 1GHz
- Detector	:	Average (9kHz-90kHz, 110kHz-490kHz), Quasi-peak
- Bandwidth	:	200Hz, 120kHz
Spectrum analyzer setting	:	Above 1GHz
- Peak	:	RBW=1MHz, VBW=3MHz, Span=0Hz, Sweep=auto
- Average	:	RBW=1MHz, VBW=10Hz, Span=0Hz, Sweep=auto Display mode=Linear

Average Measurement Setting [VBW]

Mode	Duty Cycle (%)	T _{on} (us)	T _{off} (us)	Determined VBW Setting
IEEE802.11b	99.11	1024	8	10Hz (Duty Cycle \geq 98%)
IEEE802.11g	99.27	1360	10	10Hz (Duty Cycle \geq 98%)
IEEE802.11n(HT20)	99.22	1276	10	10Hz (Duty Cycle \geq 98%)


Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site.

Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

Radiated emission measurements are performed at 3m distance with the broadband antenna (Loop antenna, TRILOG antenna and Double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1m to 4m and stopped at height producing the maximum emission. As for the Loop antenna, it is positioned with its plane vertical, and the center of the Loop antenna is 1m above the ground plane.

The EUT is Placed on a turntable, which is 0.8m/1.5m above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. The test results represent the worst case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation. Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.

- Test configuration

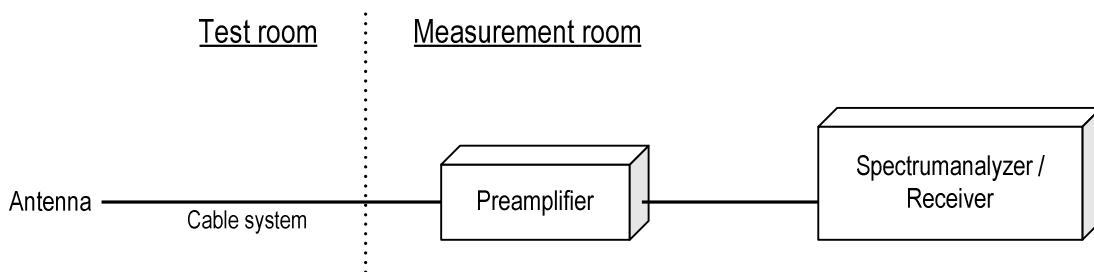

8.2 Calculation method

[9kHz to 150kHz]

Emission level = Reading + (Ant. factor + Cable system loss)

Margin = Limit – Emission level

[150kHz to 25GHz]

Emission level = Reading + (Ant. factor + Cable system loss –Amp. Gain)

Margin = Limit – Emission level

Example:

Limit @ 4824.0MHz : 74.0dBuV/m (Peak Limit)

S.A Reading = 49.5dBuV Cable system loss = 8.4dB

Result = 49.5 + 8.4 = 45.1dBuV/m

Margin = 74.0 - 45.1 = 16.1dB

8.3 Limit

Frequency [MHz]	Field strength		Distance [m]
	[uV/m]	[dBuV/m]	
0.009-0.490	2400 / F [kHz]	20logE [uV/m]	300
0.490-1.705	24000 / F [kHz]	20logE [uV/m]	30
1.705-30	30	29.5	30
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level [dBuV/m] = 20log Emission [uV/m]
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition modulation.

8.4 Test data


Date	:	August 22, 2016		
Temperature	:	20.3 [°C]	Test engineer	
Humidity	:	60.3 [%]		Taiki Watanabe
Test place	:	3m Semi-anechoic chamber		
Date	:	August 23, 2016		
Temperature	:	20.6 [°C]	Test engineer	
Humidity	:	70.1 [%]		Taiki Watanabe
Test place	:	3m Semi-anechoic chamber		
Date	:	August 24, 2016		
Temperature	:	23.3 [°C]	Test engineer	
Humidity	:	71.3 [%]		Taiki Watanabe
Test place	:	3m Semi-anechoic chamber		
Date	:	August 25, 2016		
Temperature	:	20.2 [°C]	Test engineer	
Humidity	:	69.3 [%]		Taiki Watanabe
Test place	:	3m Semi-anechoic chamber		

11.4.1 Transmission mode

[11b]

**Channel Low
BELOW 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

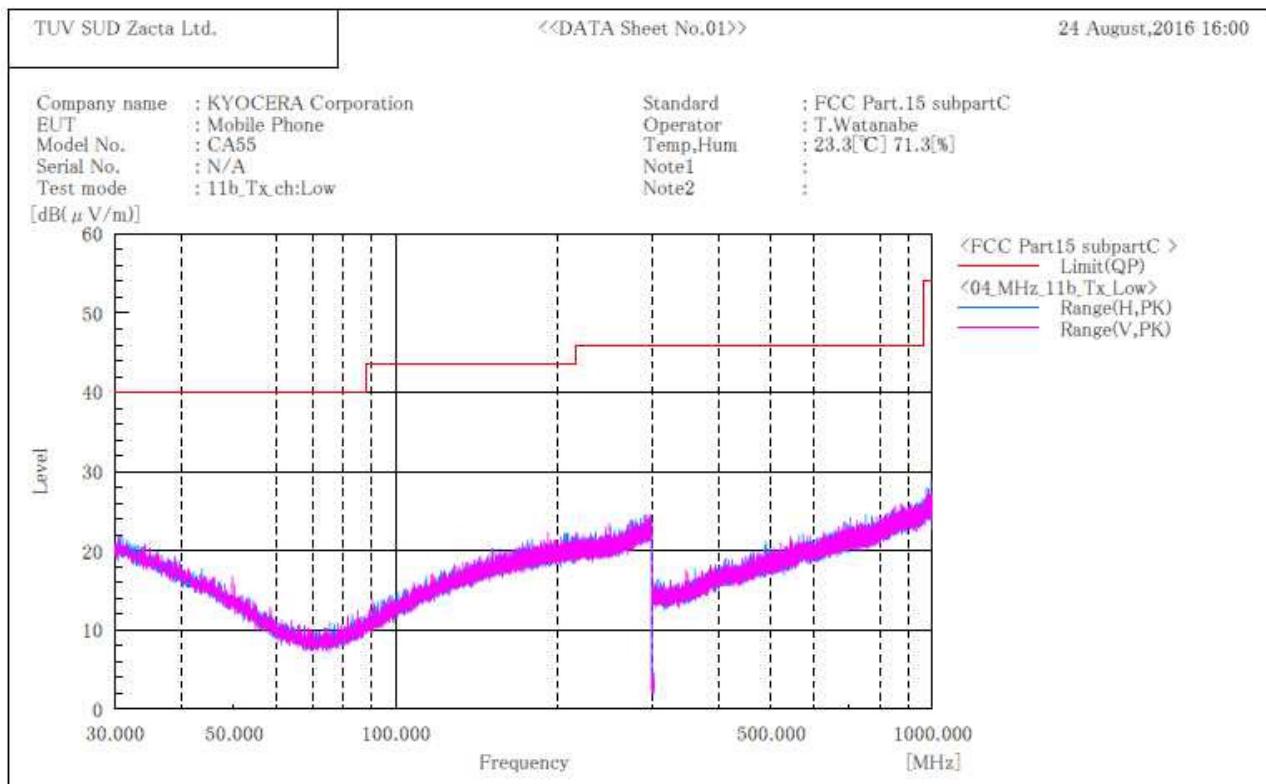

Final Result


No.	Frequency (P) [MHz]	c, f [dB(1/m)]	Height [cm]	Angle [°]	Remark
-----	------------------------	-------------------	----------------	--------------	--------

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

[11b]
Channel Low
ABOVE 1GHz

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

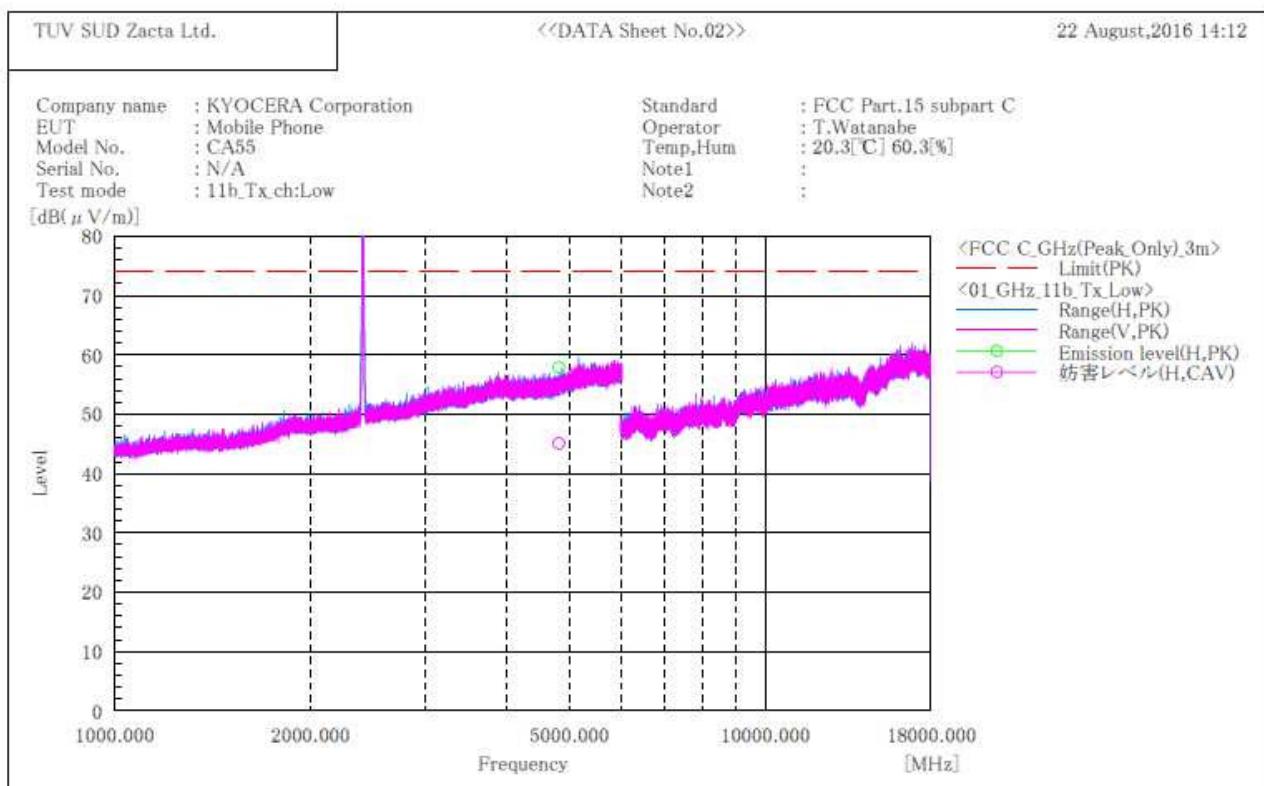

Final Result


No.	Frequency (P) [MHz]	Reading PK [dB(μV)]	Reading CAV [dB(μV)]	c.f. [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Limit PK [dB]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]	Remark
1	4824.000	H 49.5	36.7	8.4	57.9	45.1	74.0	16.1	8.9	150.0	0.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

[11b]
Channel Middle
BELOW 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

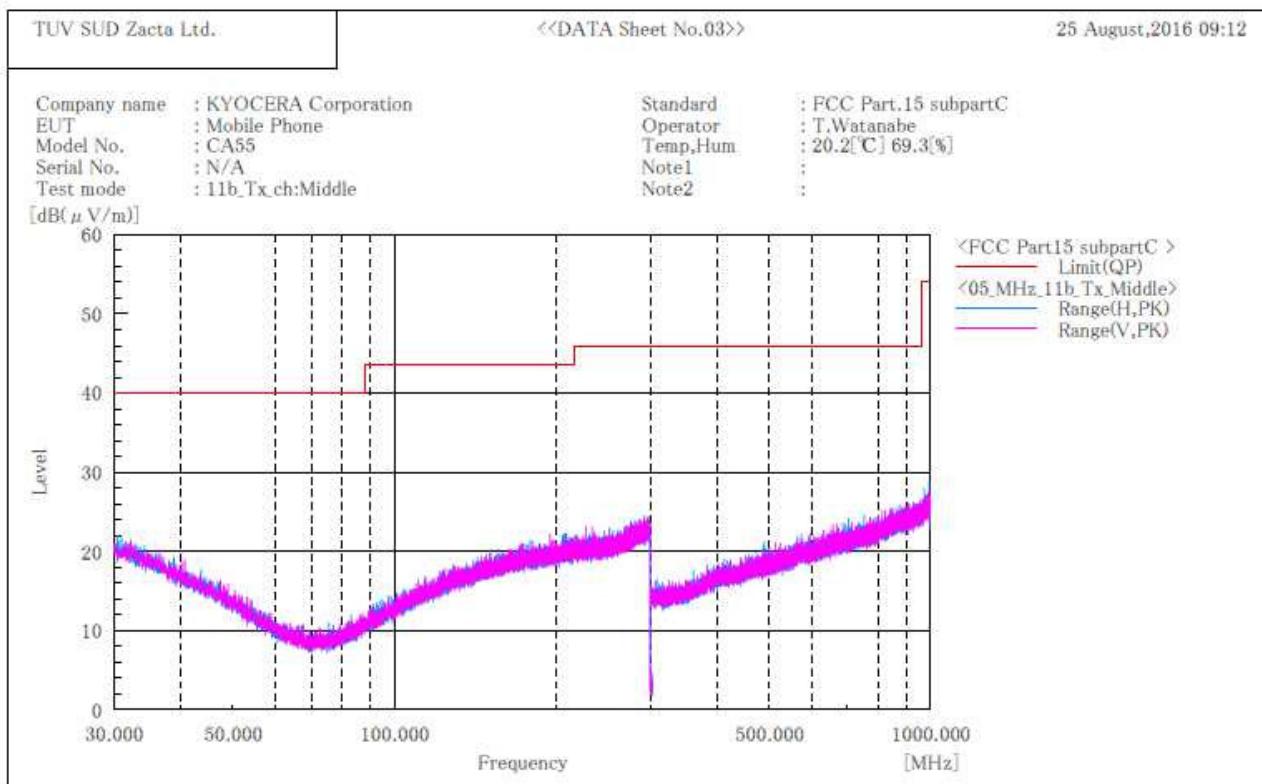

Final Result


No.	Frequency (P) [MHz]	c. f [dB(1/m)]	Height [cm]	Angle [°]	Remark
-----	------------------------	-------------------	----------------	--------------	--------

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

[11b]
Channel Middle
ABOVE 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

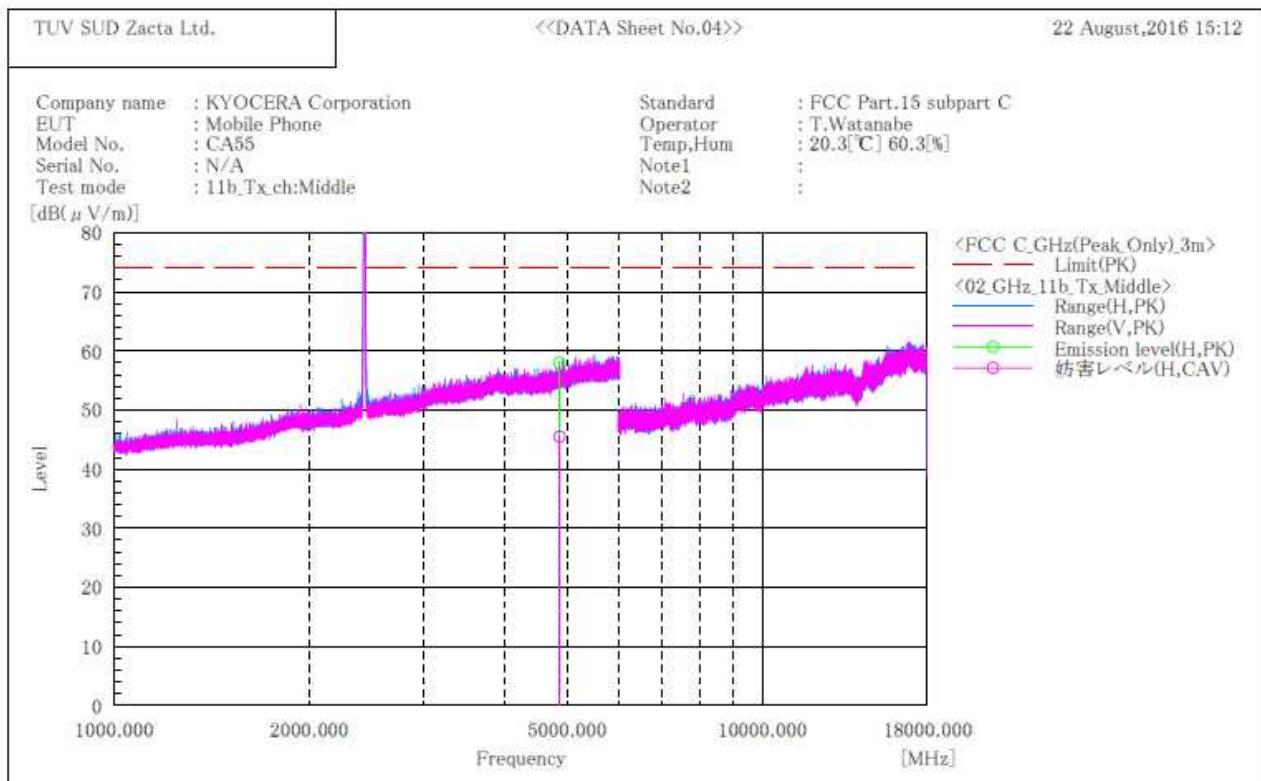

Final Result


No.	Frequency (P) [MHz]	Reading PK [dB(μ V)]	Reading CAV [dB(μ V)]	c, f [dB(1/m)]	Result PK [dB(μ V/m)]	Result CAV [dB(μ V/m)]	Limit PK [dB]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]	Remark
1	4874.000	H 49.3	36.8	8.7	58.0	45.5	74.0	16.0	8.5	150.0	0.0	

Note:

- Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
- No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

[11b]
Channel High
BELOW 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

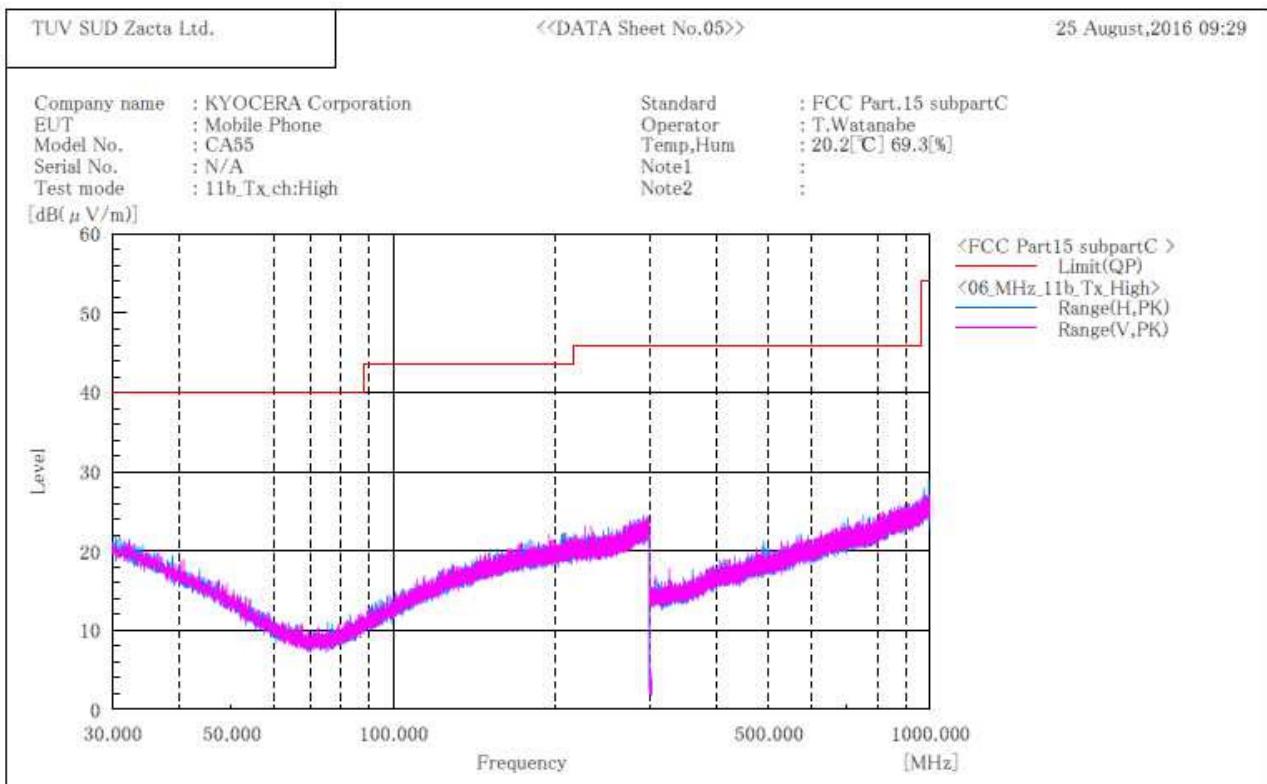

Final Result


No.	Frequency (P)	c, f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

[11b]
Channel High
ABOVE 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

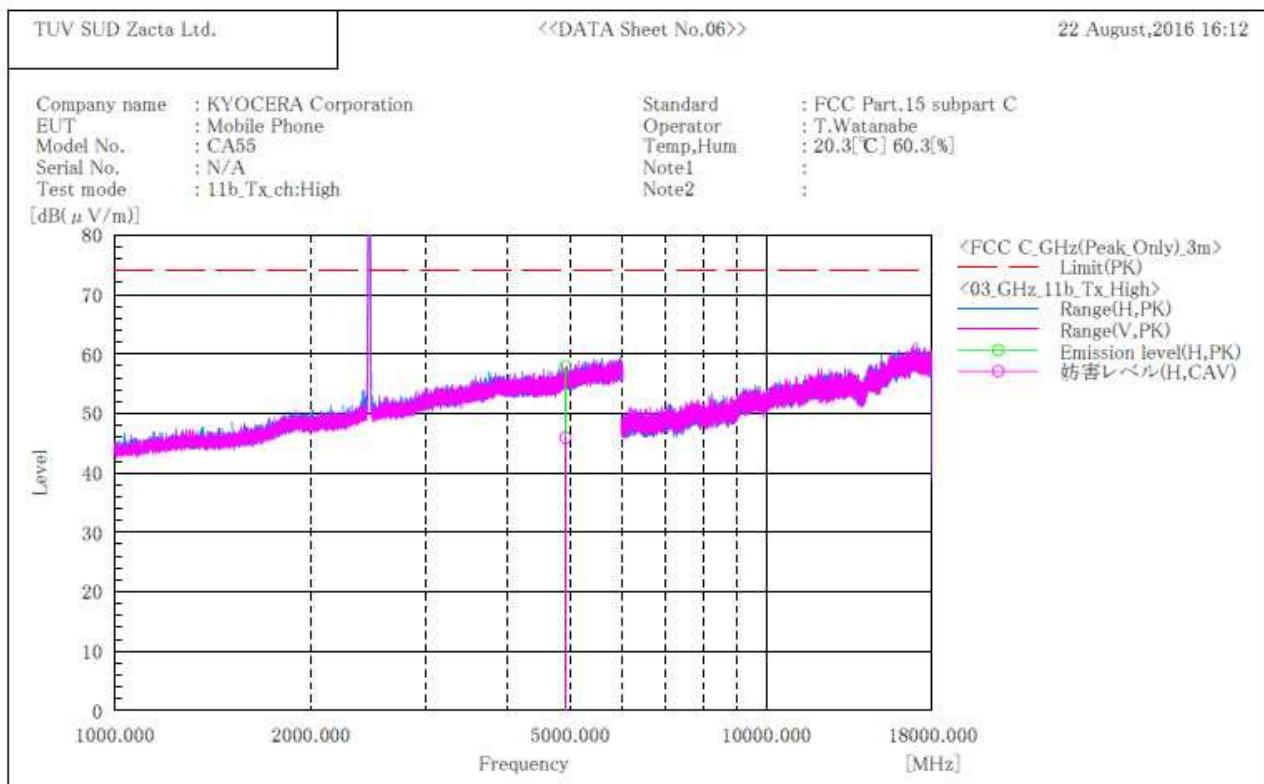

Final Result


No.	Frequency (P) [MHz]	Reading PK [dB(μV)]	Reading CAV [dB(μV)]	c, F [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Limit PK [dB]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]	Remark
1	4924.000	H 49.0	37.0	8.9	57.9	45.9	74.0	16.1	8.1	150.0	0.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

[11g]
Channel Low
BELOW 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

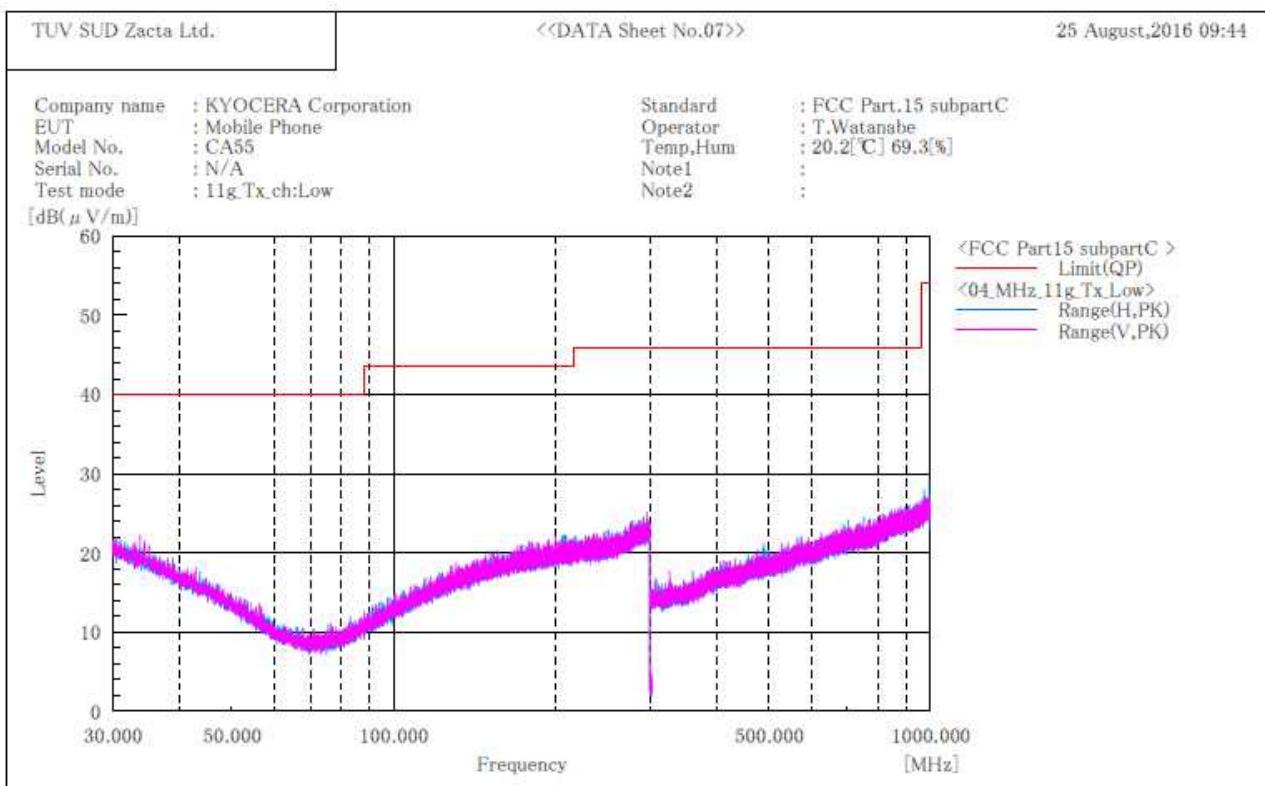

Final Result


No.	Frequency (P) [MHz]	c. f [dB(1/m)]	Height [cm]	Angle [°]	Remark
-----	------------------------	-------------------	----------------	--------------	--------

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

[11g]
Channel Low
ABOVE 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

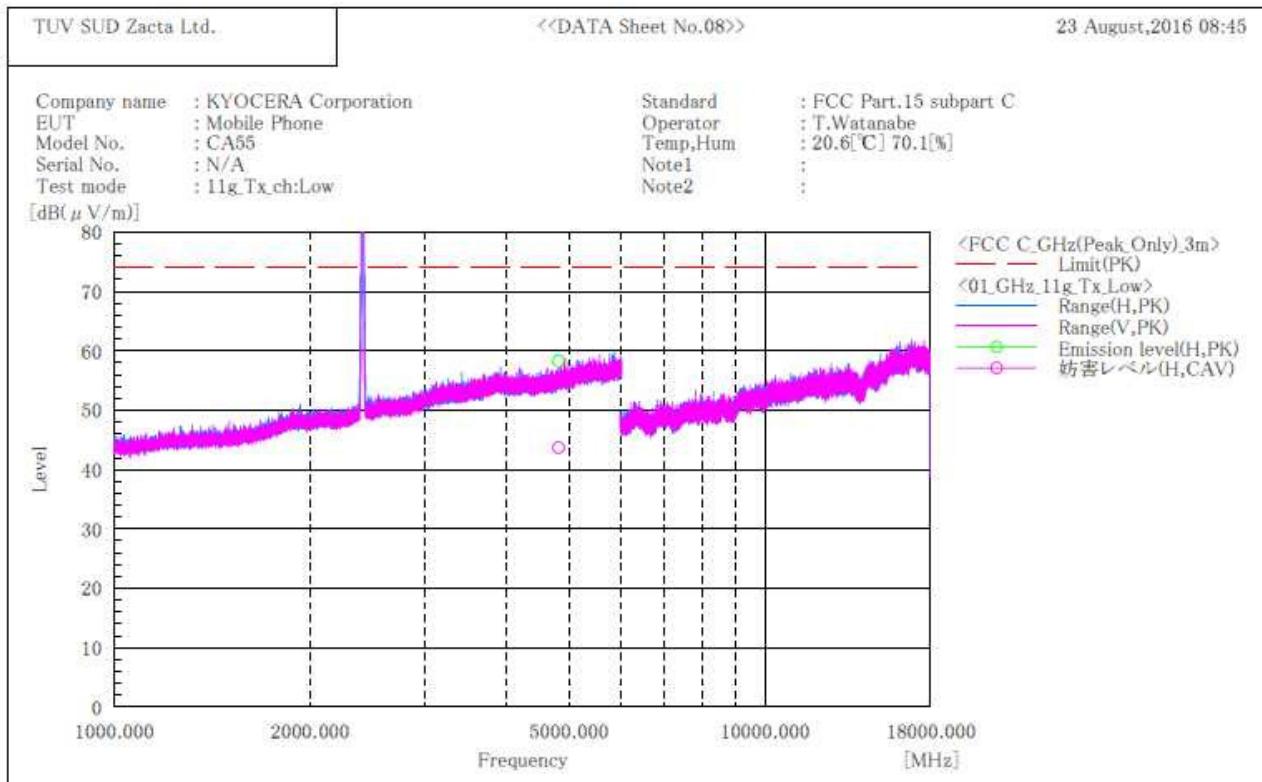

Final Result


No.	Frequency (P)	Reading PK	Reading CAV	c. f	Result PK	Result CAV	Limit PK	Margin PK	Margin CAV	Height	Angle	Remark
	[MHz]	[dB(μ V)]	[dB(μ V)]	[dB(1/m)]	[dB(μ V/m)]	[dB(μ V/m)]	[dB(μ V/m)]	[dB]	[dB]	[cm]	[°]	
1	4824.000	H 49.9	35.3	8.4	58.3	43.7	74.0	15.7	10.3	150.0	0.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

[11g]
Channel Middle
BELOW 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

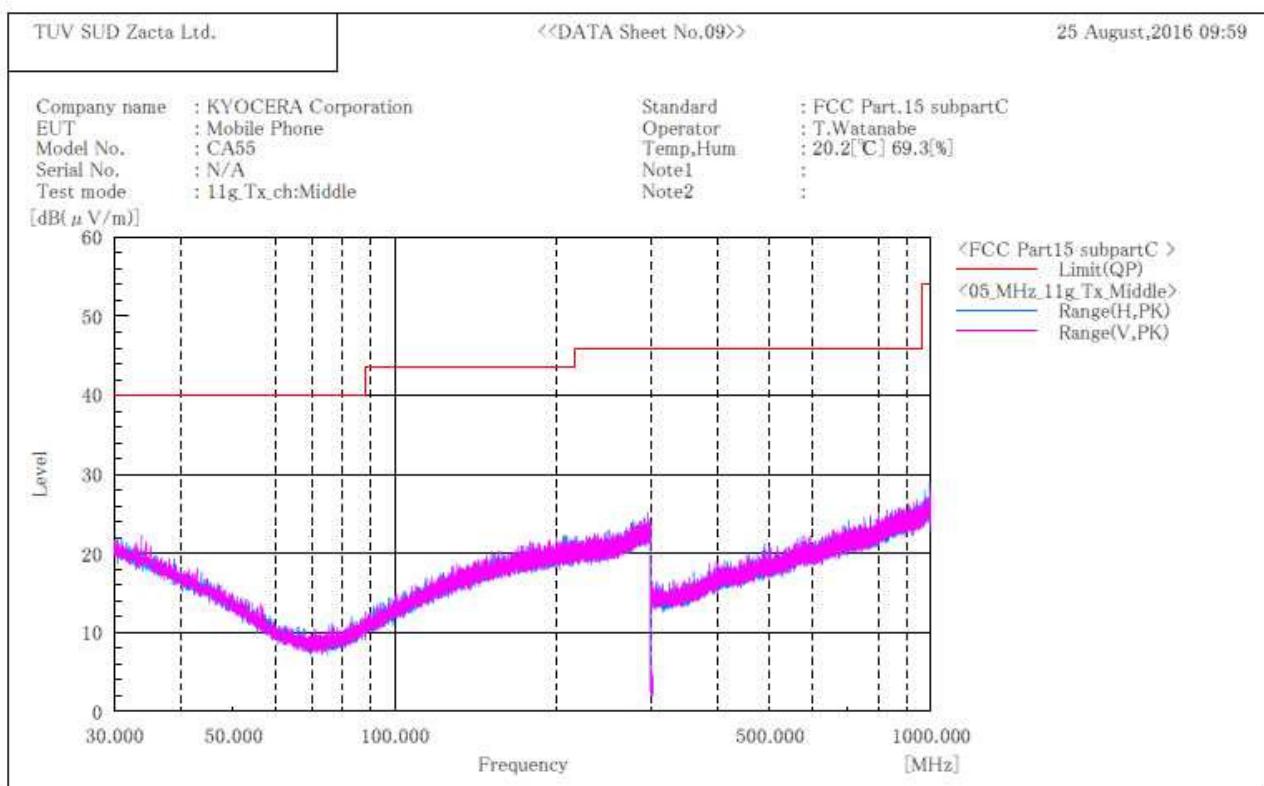

Final Result


No.	Frequency (P) [MHz]	c, f [dB(1/m)]	Height [cm]	Angle [°]	Remark
-----	------------------------	-------------------	----------------	--------------	--------

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

[11g]
Channel Middle
ABOVE 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

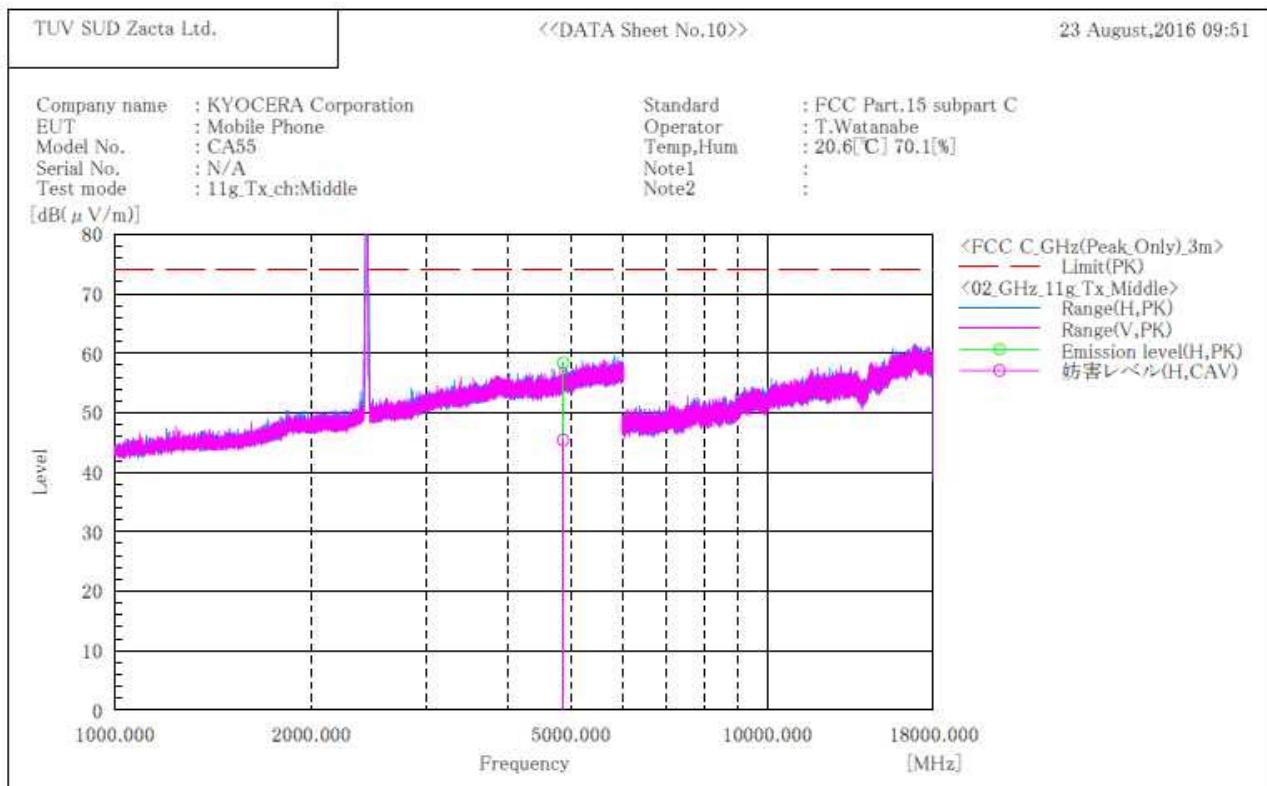

Final Result


No.	Frequency [MHz]	(P) PK	Reading CAV	Reading CAV	c.f.	Result PK	Result CAV	Limit PK	Margin PK	Margin CAV	Height [cm]	Angle [°]	Remark
1	4874.000	H 49.7	36.7	8.7	58.4	45.4	74.0	15.6	8.6	150.0	0.0		

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

[11g]
Channel High
BELOW 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

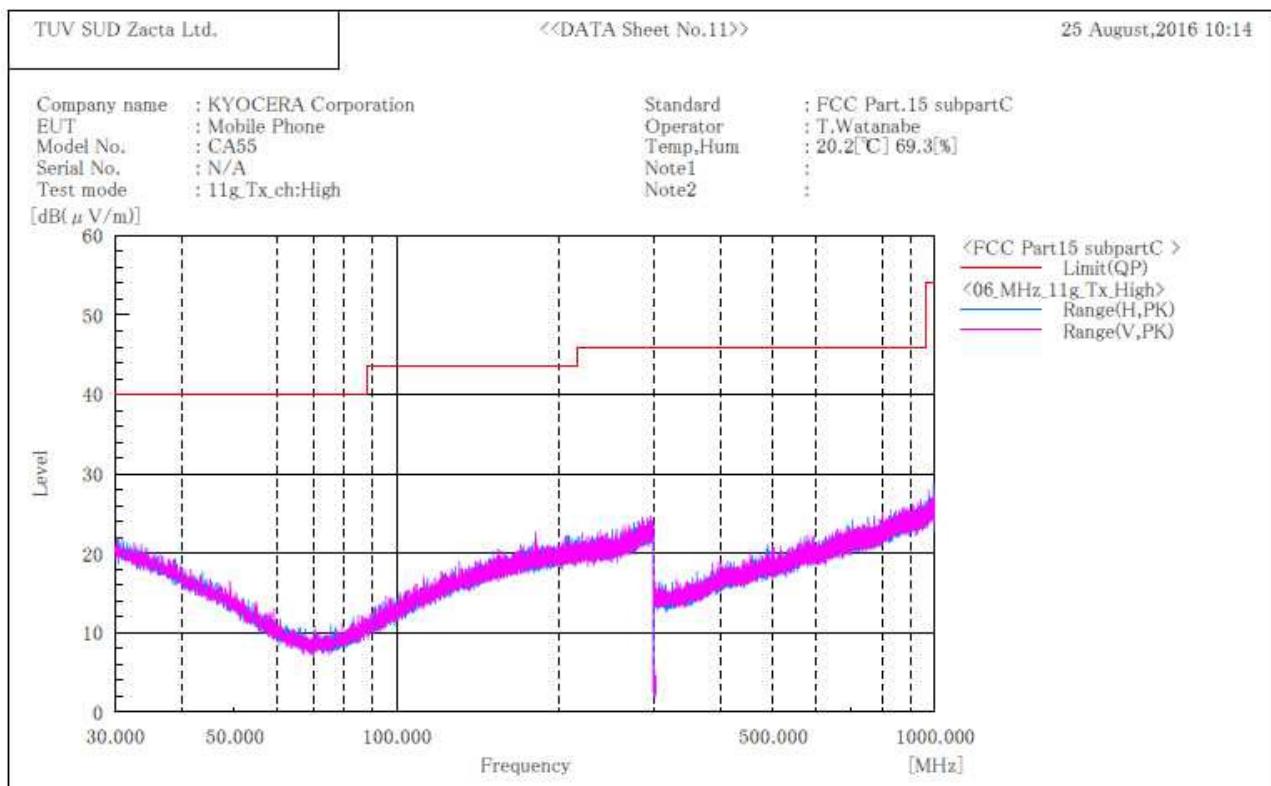

Final Result


No.	Frequency (P) [MHz]	c. f [dB(1/m)]	Height [cm]	Angle [°]	Remark
-----	------------------------	-------------------	----------------	--------------	--------

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

[11g]
Channel High
ABOVE 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

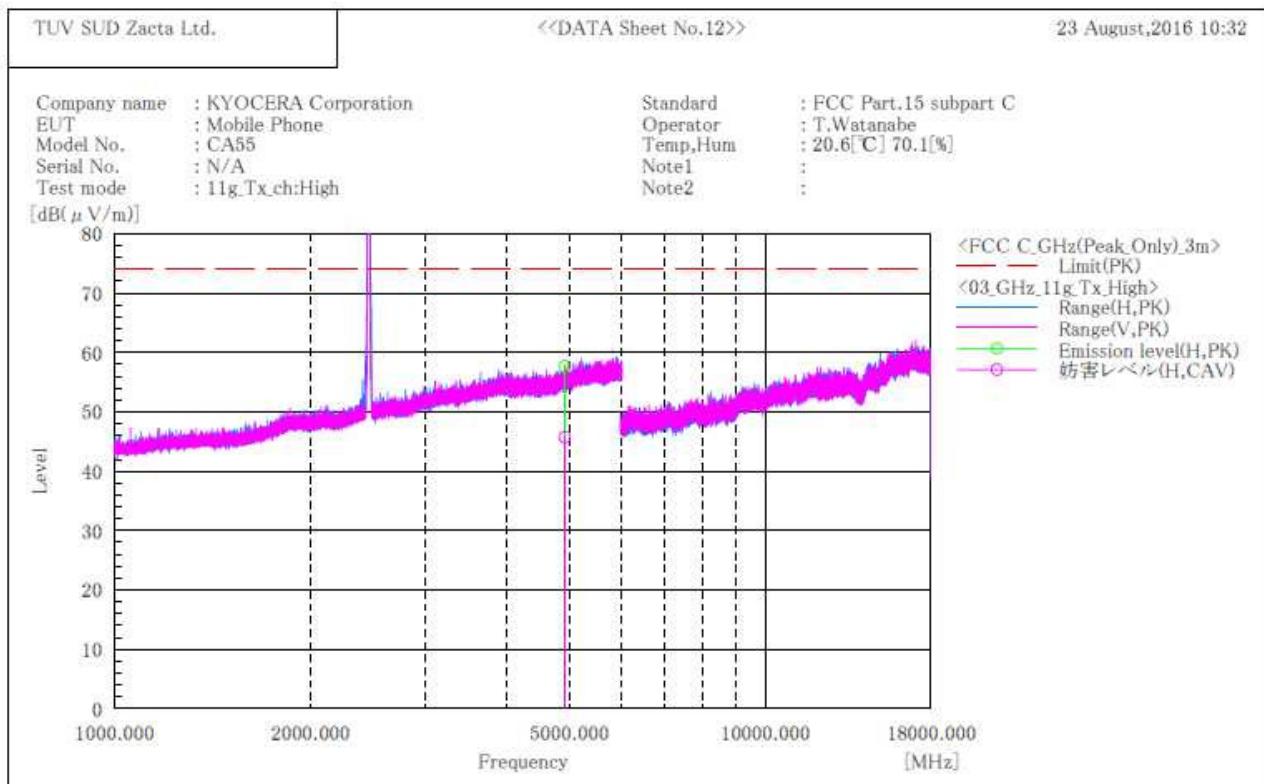

Final Result


No.	Frequency (P) [MHz]	Reading PK [dB(μV)]	Reading CAV [dB(μV)]	c.f. [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Limit PK [dB]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]	Remark
1	4924.000	H 48.8	36.8	8.9	57.7	45.7	74.0	16.3	8.3	150.0	0.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

[11n(HT20)]
Channel Low
BELOW 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

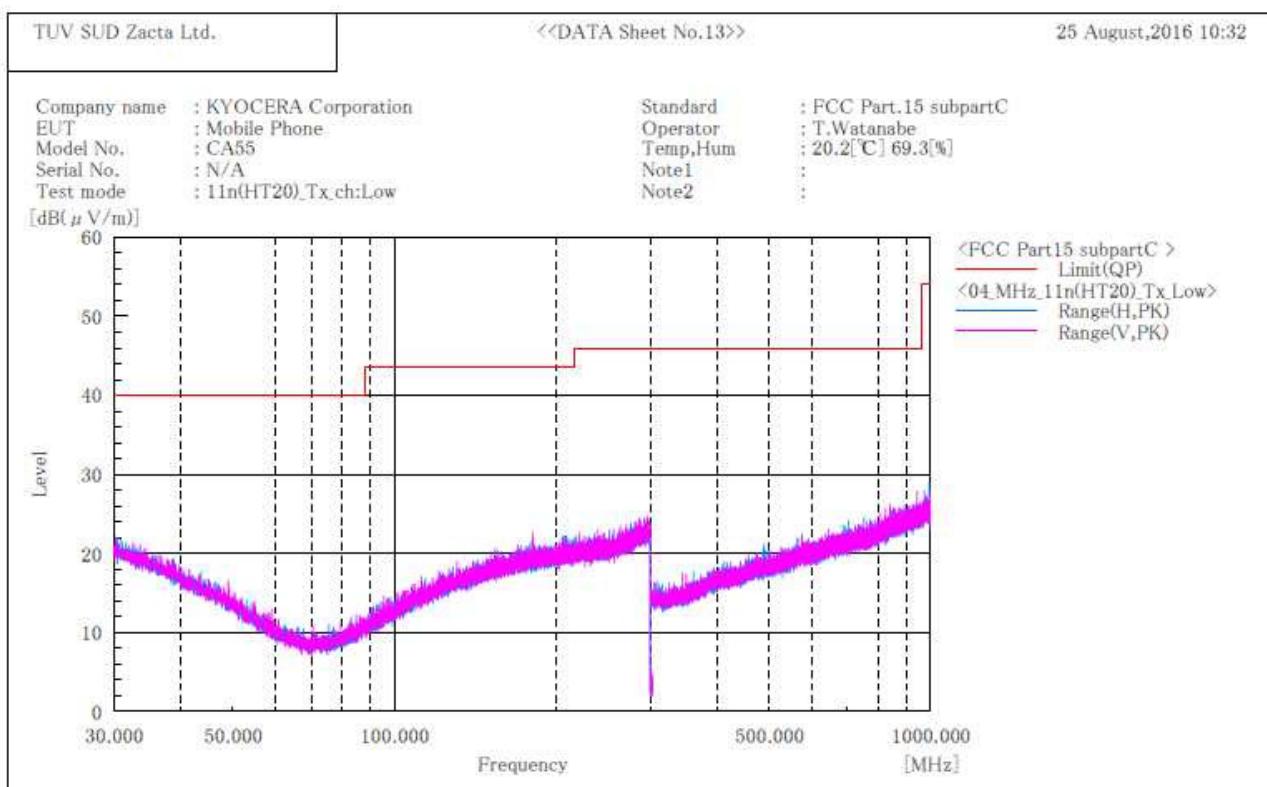

Final Result


No.	Frequency (P) [MHz]	c. f [dB(1/m)]	Height [cm]	Angle [°]	Remark
-----	------------------------	-------------------	----------------	--------------	--------

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

[11n(HT20)]
Channel Low
ABOVE 1GHz

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

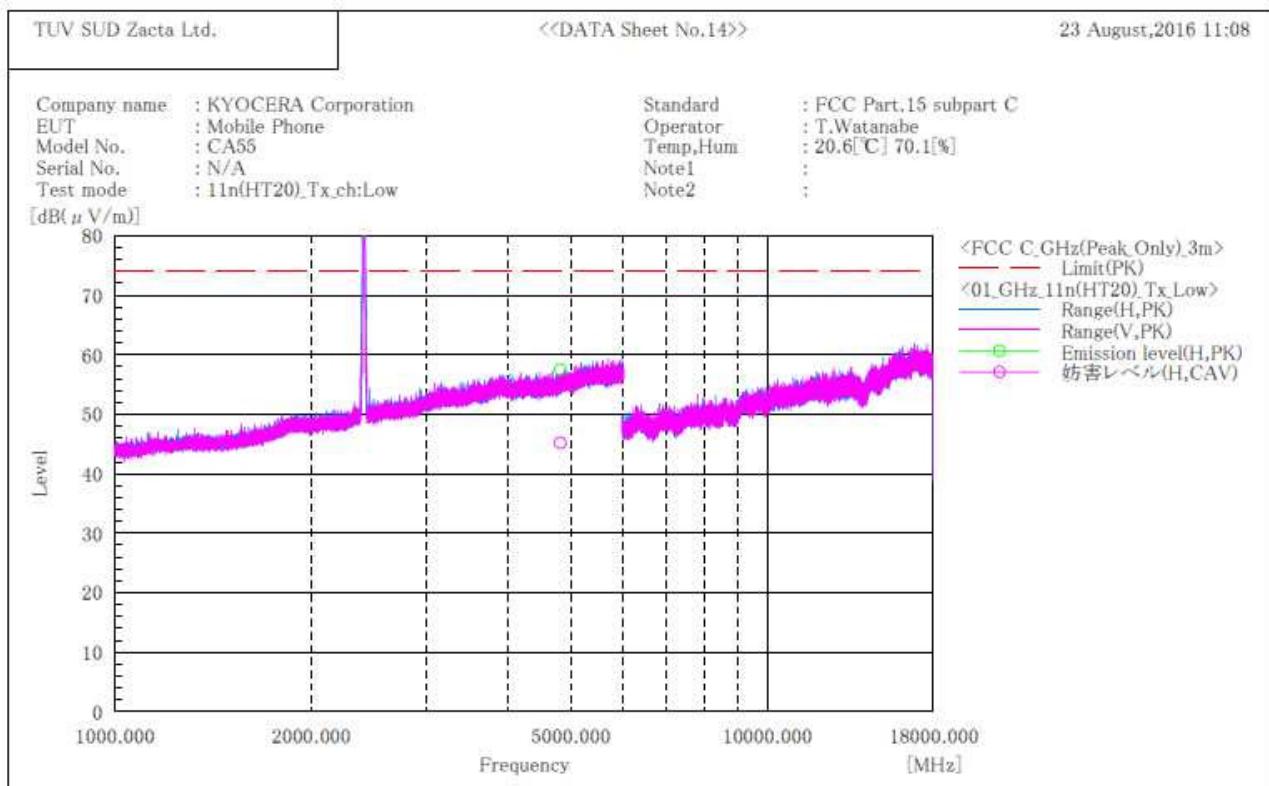

Final Result


No.	Frequency [MHz]	(P) PK	Reading CAV [dB(μV)]	Reading CAV [dB(μV)]	c, f [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	limit PK [dB]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]	Remark
1	4824.000	H 49.1	36.8	8.4	57.5	45.2	74.0	16.5	8.8	150.0	0.0		

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

[11n(HT20)]
Channel Middle
BELOW 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

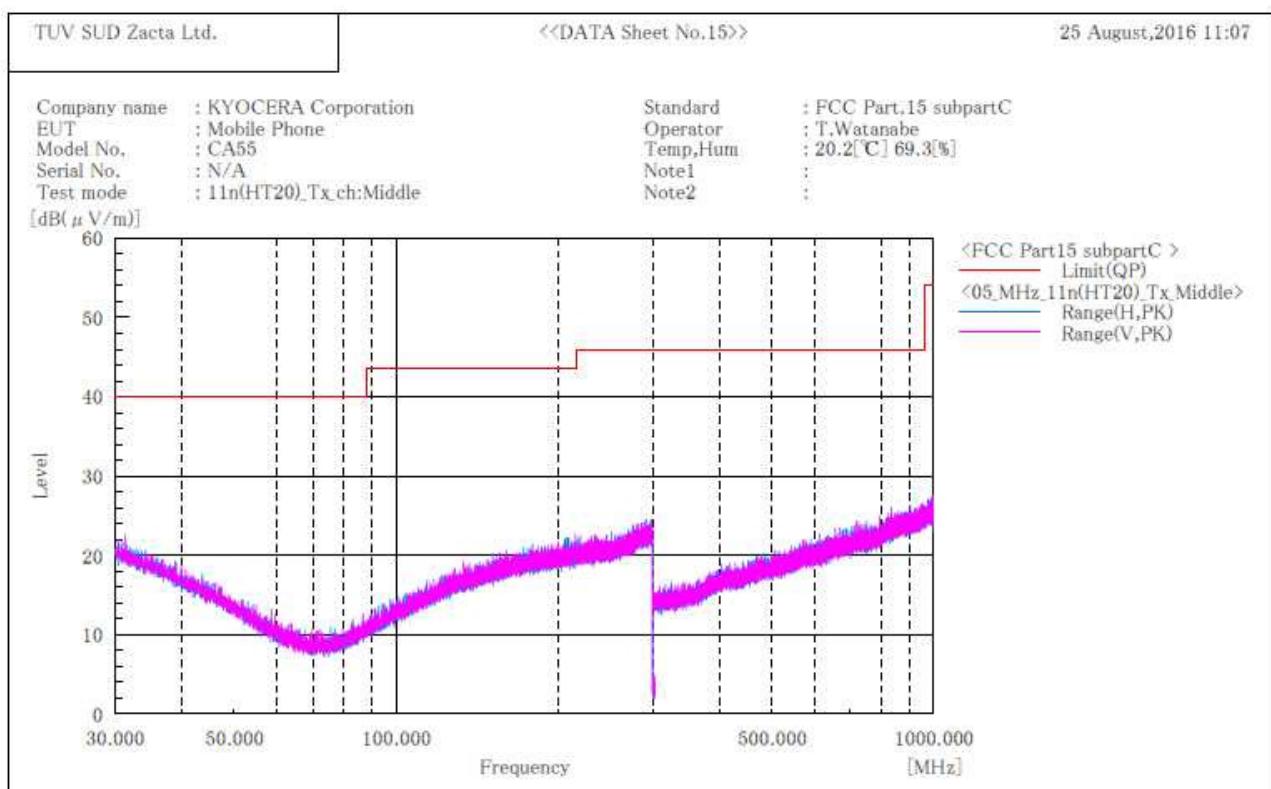

Final Result


No.	Frequency (P)	c. f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

[11n(HT20)]
Channel Middle
ABOVE 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

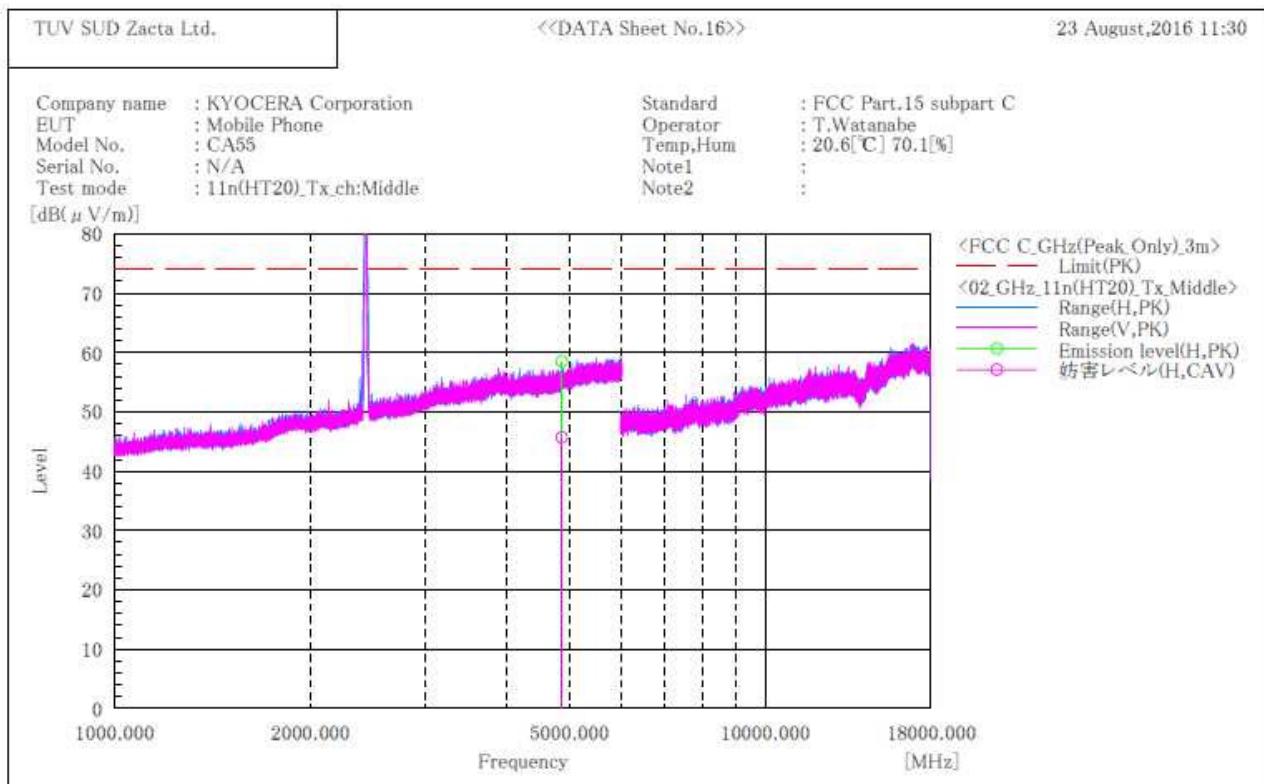

Final Result


No.	Frequency [MHz]	(P) PK [dB(μV)]	Reading CAV [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Limit PK [dB]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]	Remark
1	4874.000	H 49.8	37.0	8.7	58.5	45.7	74.0	15.5	8.3	150.0	0.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

[11n(HT20)]
Channel High
BELOW 1GHz

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

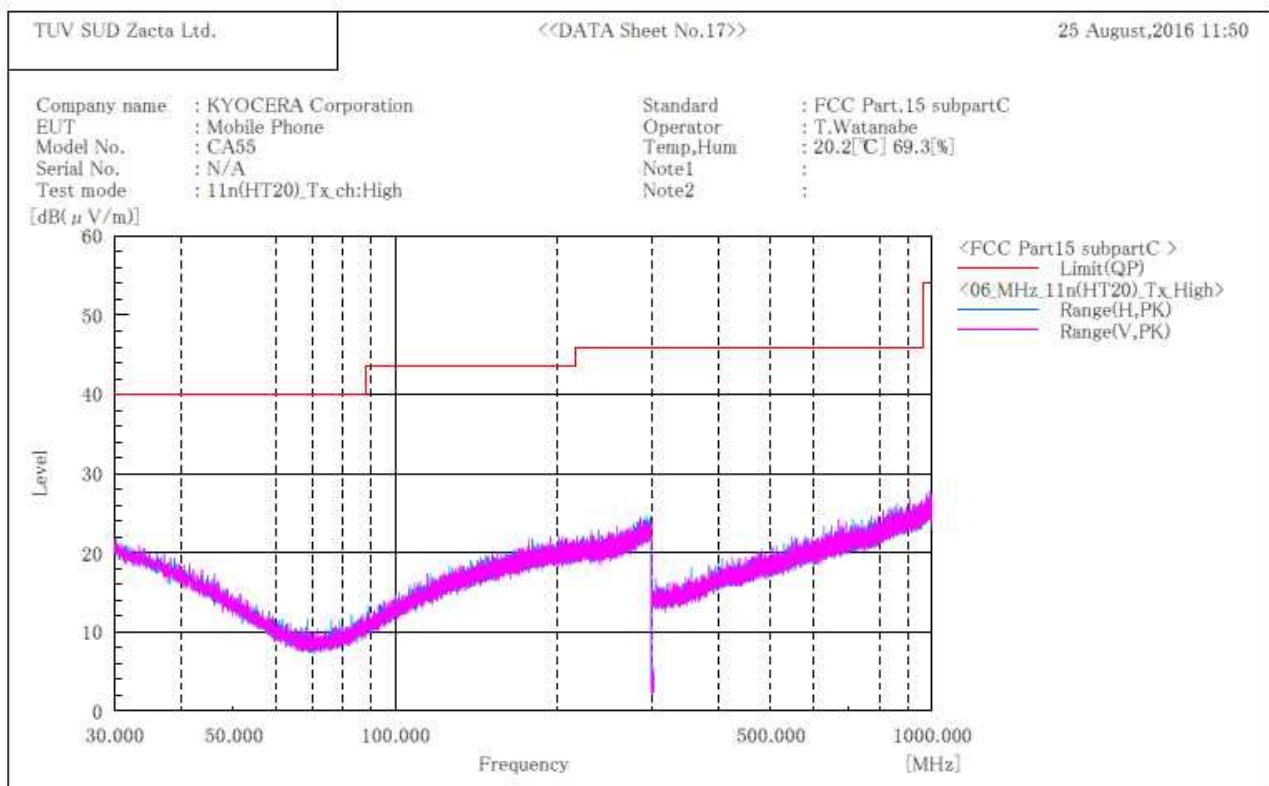

Final Result


No.	Frequency (P) [MHz]	c. f [dB(1/m)]	Height [cm]	Angle [°]	Remark
-----	------------------------	-------------------	----------------	--------------	--------

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

[11n(HT20)]
Channel High
ABOVE 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

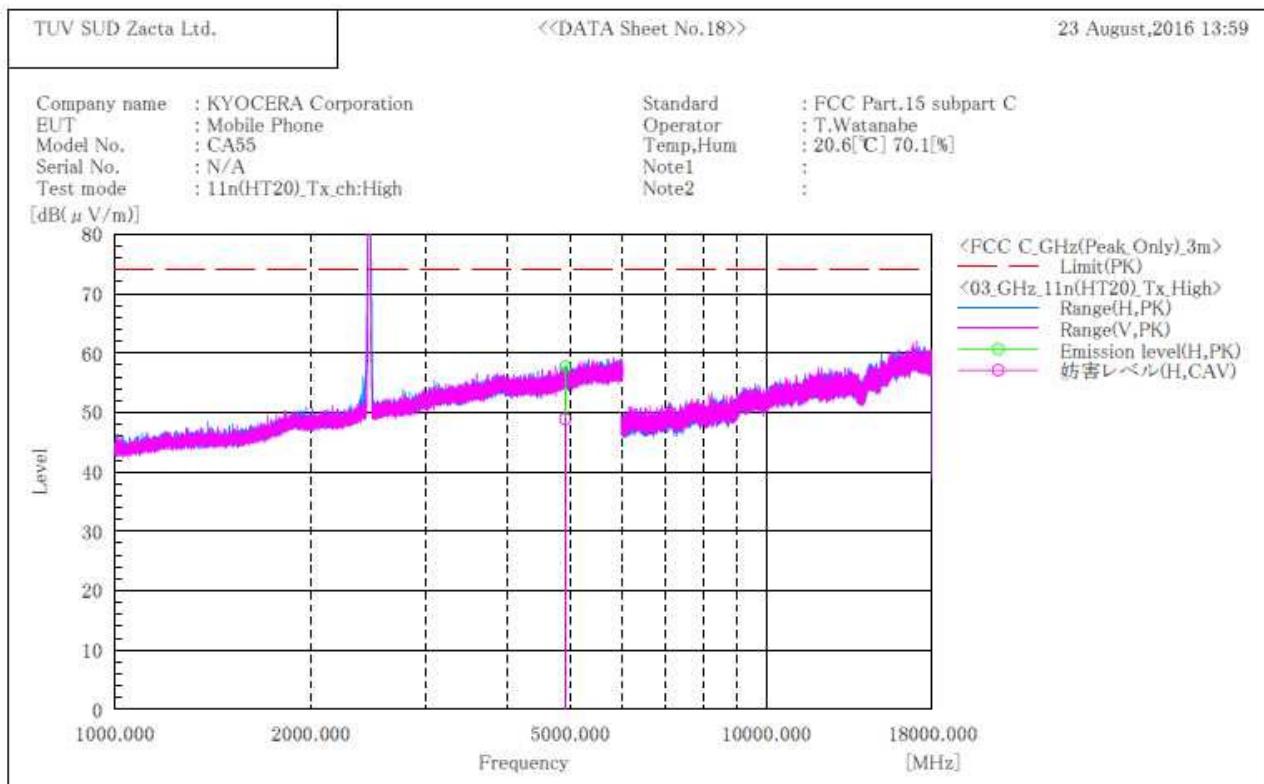

Final Result

No.	Frequency [MHz]	(P) PK H	Reading CAV [dB(μ V)]	Reading CAV [dB(μ V)]	c.f. [dB(1/m)]	Result PK [dB(μ V/m)]	Result CAV [dB(μ V/m)]	Limit PK [dB]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]	Remark
1	4924.000	H	48.8	40.0	8.9	57.7	48.9	74.0	16.3	5.1	150.0	0.0	


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

11.4.2 Receive mode

Channel Low BELOW 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

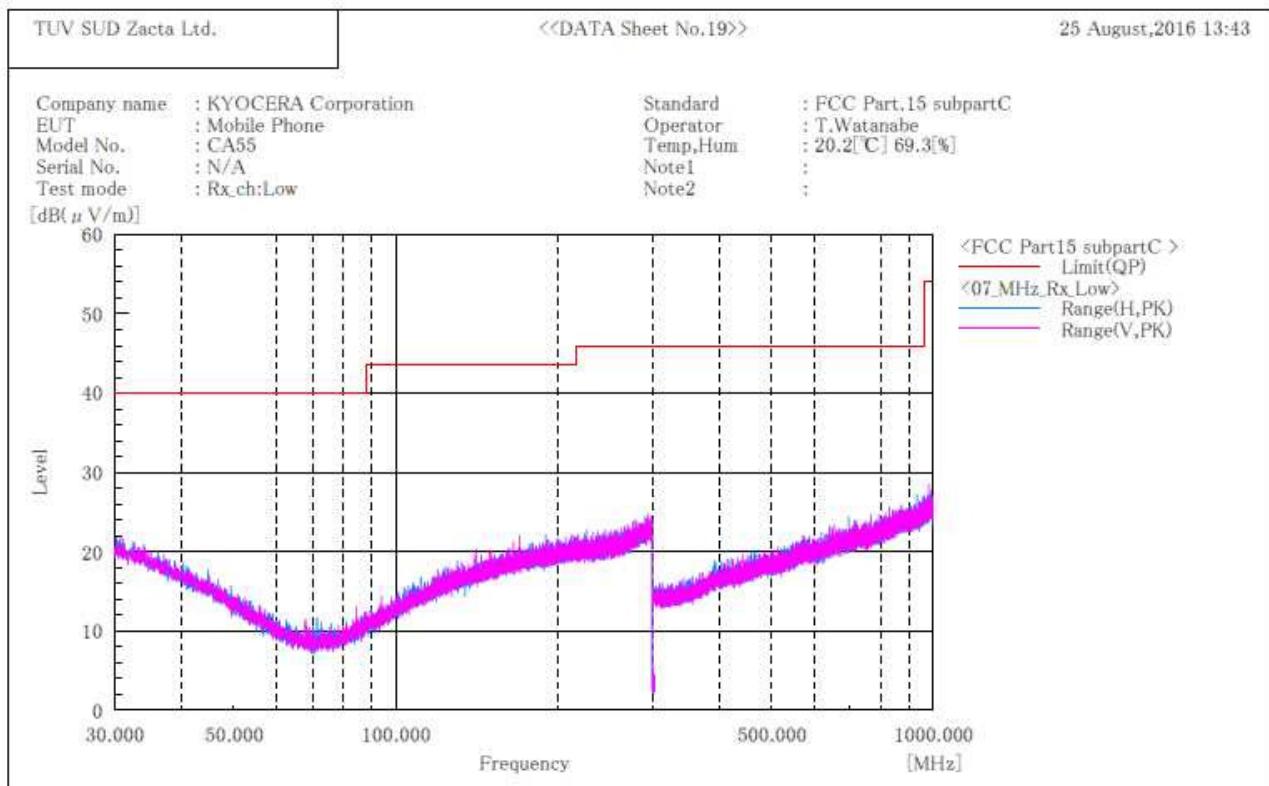


Final Result

No.	Frequency (P) [MHz]	c, f [dB(1/m)]	Height [cm]	Angle [°]	Remark
-----	------------------------	-------------------	----------------	--------------	--------

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz and 1GHz to 25GHz at the 3 meters distance.

**Channel Middle
BELOW 1GHz**

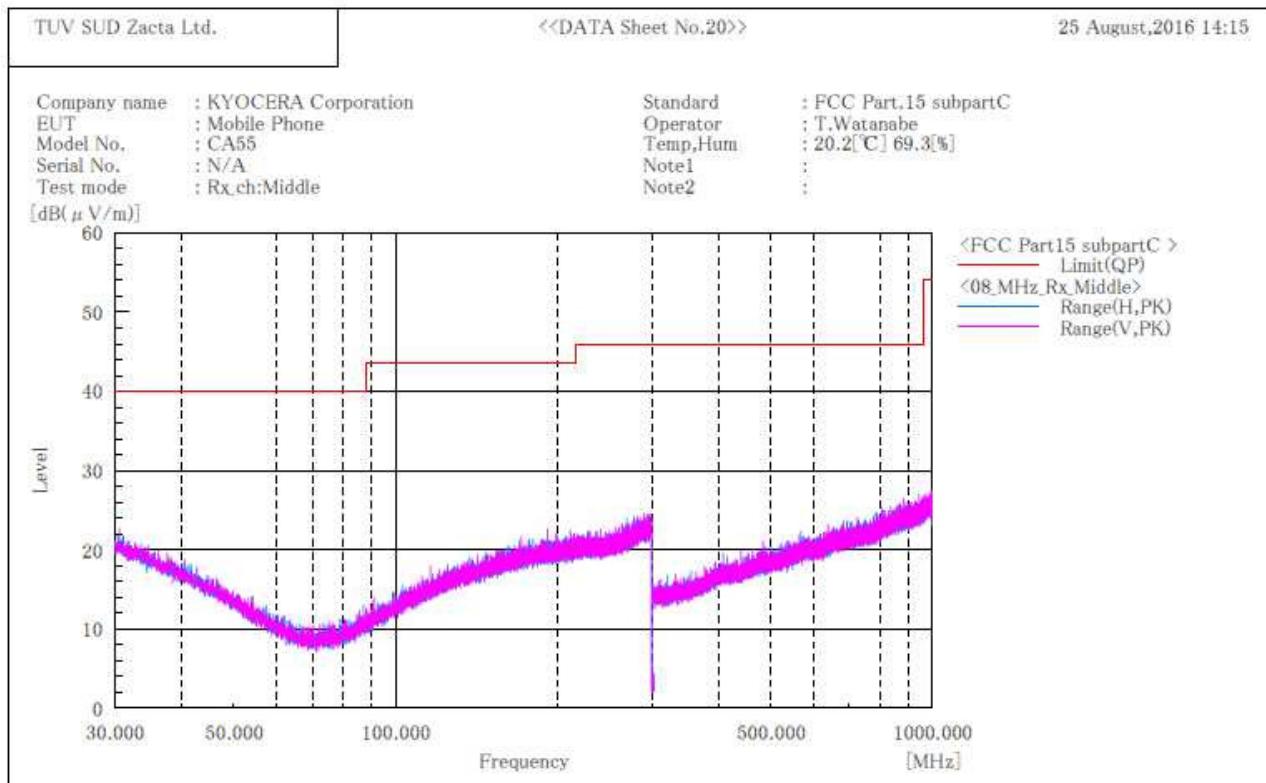
***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

Final Result

No.	Frequency (P) [MHz]	c. f [dB(1/m)]	Height [cm]	Angle [°]	Remark
-----	------------------------	-------------------	----------------	--------------	--------

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz and 1GHz to 25GHz at the 3 meters distance.

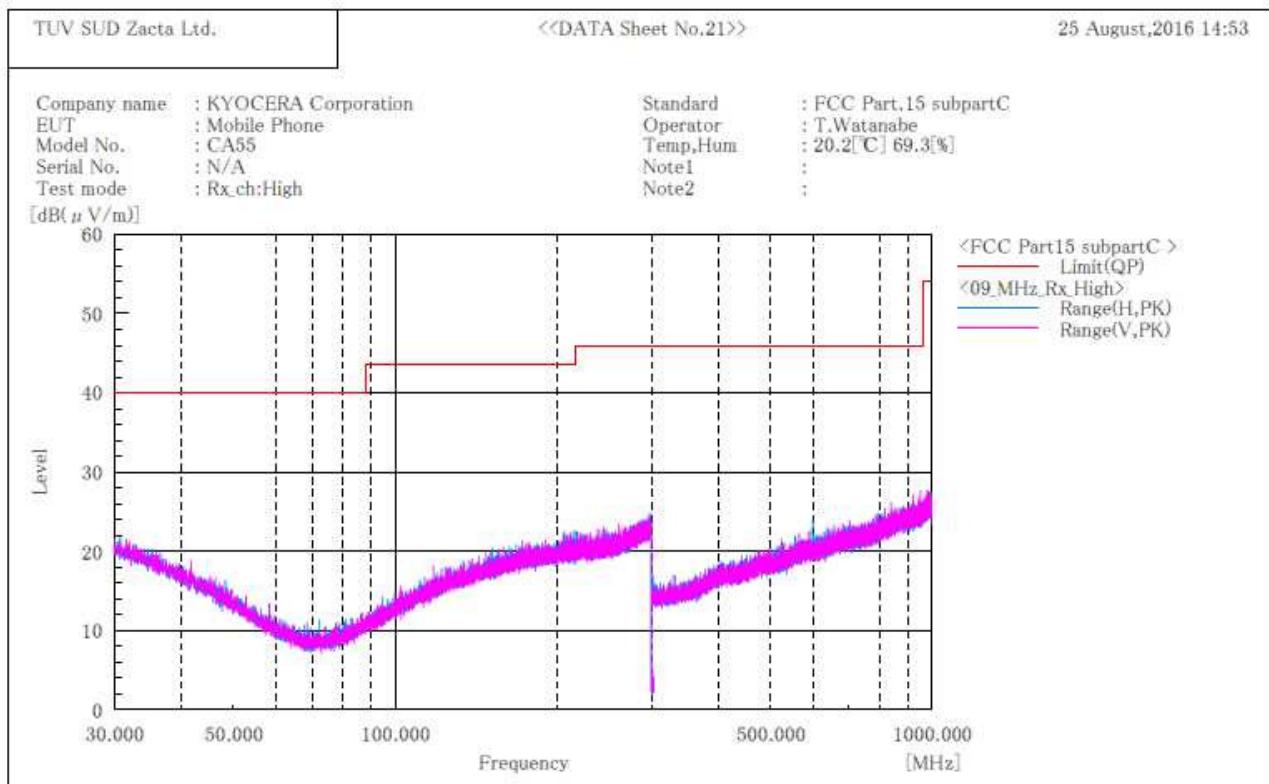**Channel High
BELOW 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

Final Result

No.	Frequency (P) [MHz]	c, f [dB (1/m)]	Height [cm]	Angle [°]	Remark
-----	------------------------	--------------------	----------------	--------------	--------

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz and 1GHz to 25GHz at the 3 meters distance.

9. Restricted Band of Operation

9.1 Measurement procedure

[FCC 15.247(d), 15.205, 15.209, KDB 558074 D01 v03r05, Section 12.0]

Test was applied by following conditions.

Test method	:	ANSI C63.10
Test place	:	3m Semi-anechoic chamber
EUT was placed on	:	Styrofoam table / (W)1.0m × (D)1.0m × (H)0.8m (below 1GHz) Styrofoam table / (W)1.0m × (D)1.0m ×(H)1.5m (above 1GHz)
Antenna distance	:	3m
Spectrum analyzer setting		
- Peak	:	RBW=1MHz, VBW=3MHz, Span=Arbitrary setting, Sweep=auto
- Average	:	RBW=1MHz, VBW=10Hz, Span=Arbitrary setting, Sweep=auto Display mode=Linear

Average Measurement Setting [VBW]

Mode	Duty Cycle (%)	T _{on} (us)	T _{off} (us)	Determined VBW Setting
IEEE802.11b	99.22	1024	8	10Hz (Duty Cycle \geq 98%)
IEEE802.11g	99.27	1360	10	10Hz (Duty Cycle \geq 98%)
IEEE802.11n(HT20)	99.22	1276	10	10Hz (Duty Cycle \geq 98%)


Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site.

Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

Radiated emission measurements are performed at 3m distance with the broadband antenna (Double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1m to 4m and stopped at height producing the maximum emission.

The EUT is Placed on a turntable, which is 0.8m/1.5m above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. The test results represent the worst case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation. Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.

- Test configuration

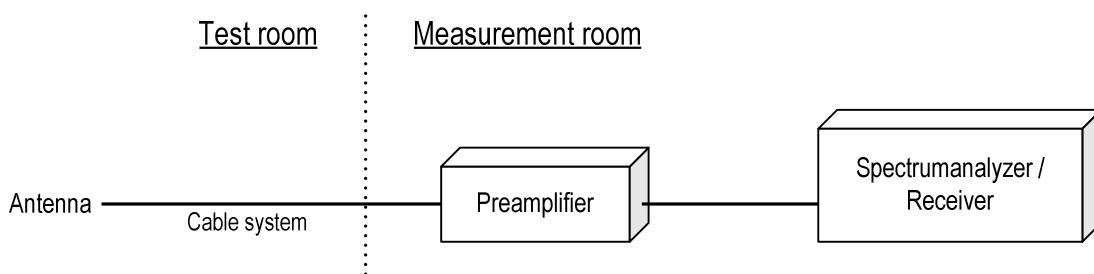

9.2 Limit

Emission at the boundary of the restricted band provided by 15.205 shall be lower than 15.209 limit.

9.3 Measurement Result

[IEEE802.11b, IEEE802.11g, IEEE802.11n (HT20)]

Channel	Frequency [MHz]	Results Chart	Result
Low	2412	See the Trace Data	Pass
High	2462	See the Trace Data	Pass

9.4 Test data

Date : August 23, 2016
Temperature : 20.6 [°C]
Humidity : 70.1 [%]
Test place : 3m Semi-anechoic chamber


Test engineer : Taiki Watanabe




Zacta

[IEEE802.11b]

Channel Low Horizontal Peak

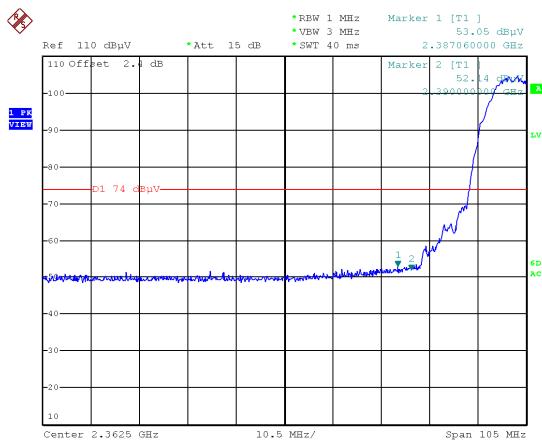


Average

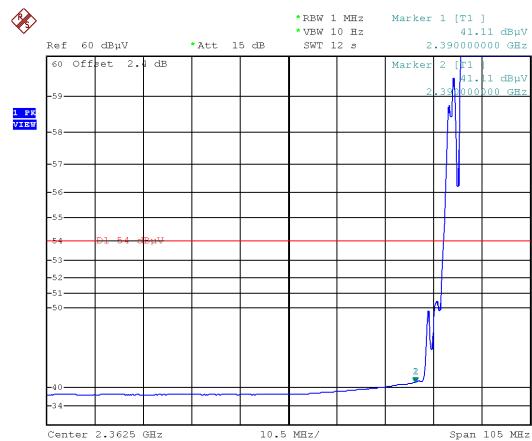


Date: 23.AUG.2016 13:13:34

Date: 23.AUG.2016 13:18:41

Vertical Peak

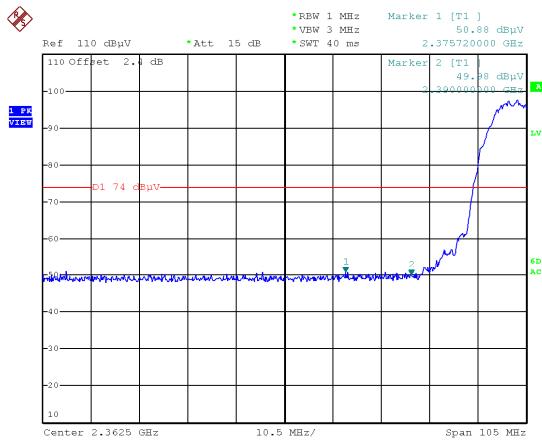


Average

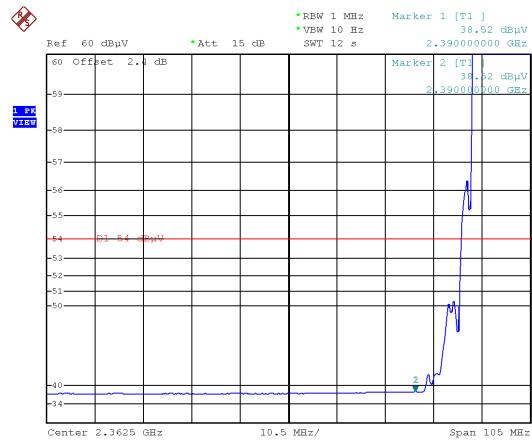


Date: 23.AUG.2016 14:53:57

Date: 23.AUG.2016 14:56:23

Channel High Horizontal Peak

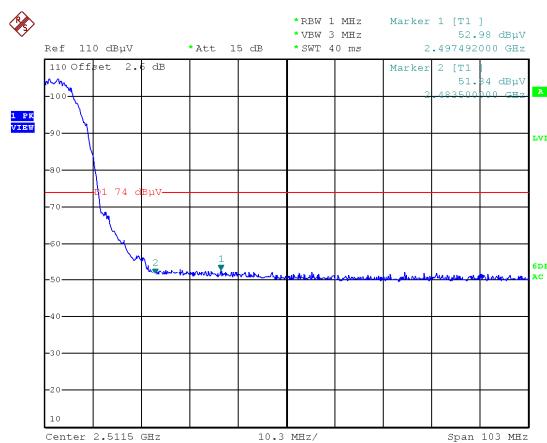


Average

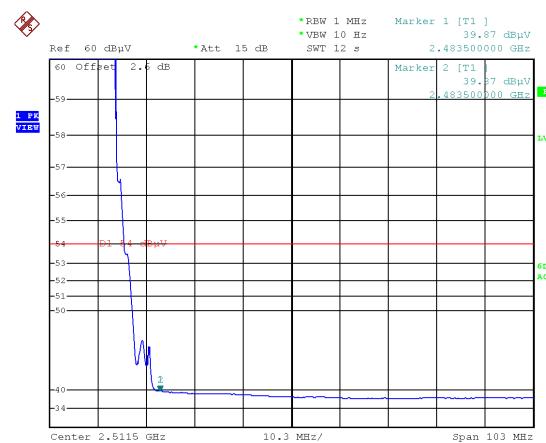


Date: 23.AUG.2016 13:33:49

Date: 23.AUG.2016 13:37:13

Vertical Peak

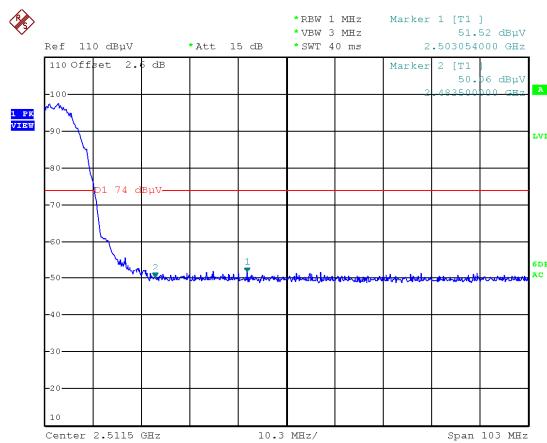

Average

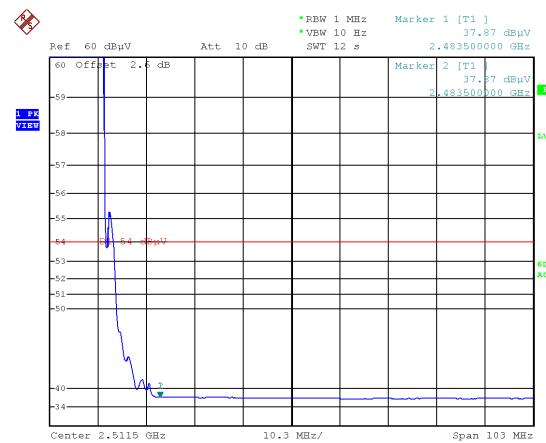


Date: 23.AUG.2016 16:00:13

Date: 23.AUG.2016 14:44:02


[IEEE802.11g]

Channel Low Horizontal Peak

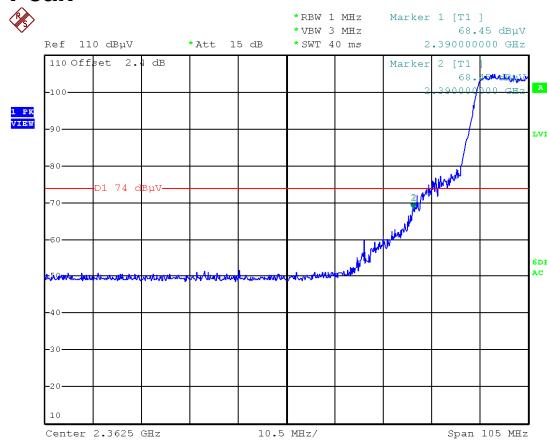


Date: 23.AUG.2016 15:05:51

Average

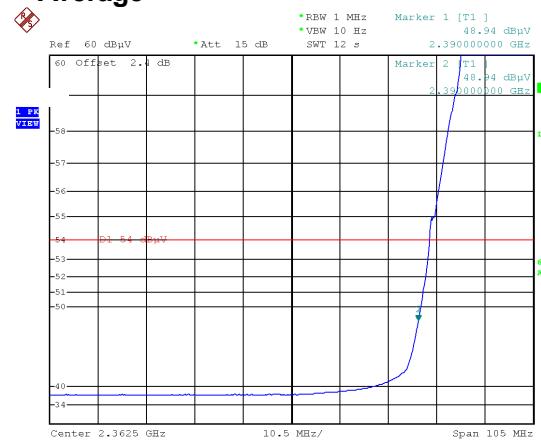


Date: 23.AUG.2016 15:10:14

Vertical Peak

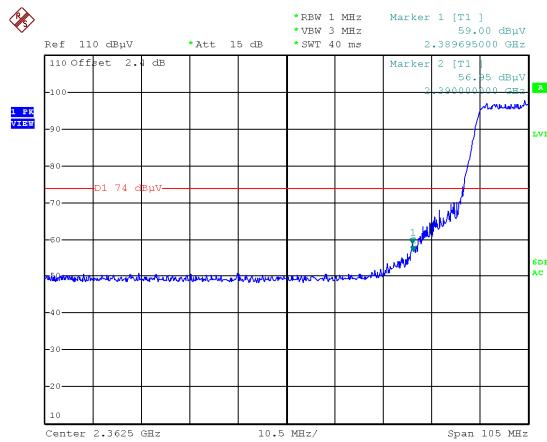


Date: 23.AUG.2016 15:01:56

Average

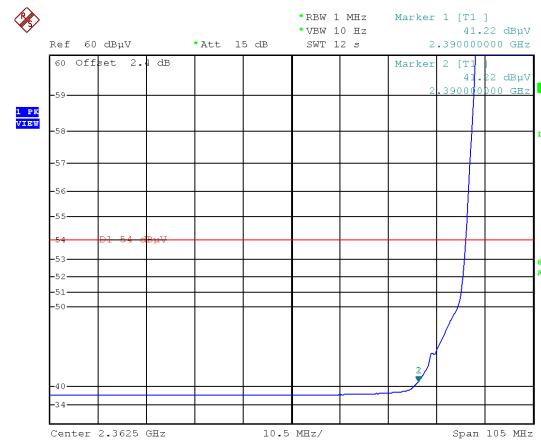


Date: 23.AUG.2016 15:02:58

Channel High Horizontal Peak

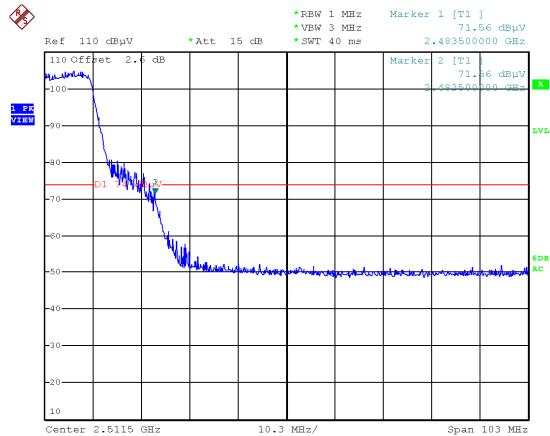


Date: 23.AUG.2016 16:06:23

Average

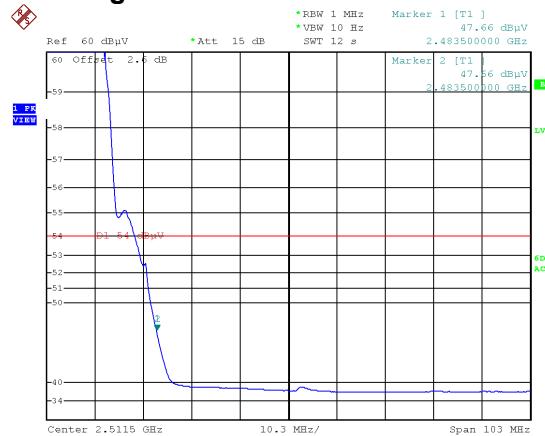


Date: 23.AUG.2016 14:26:02

Vertical Peak

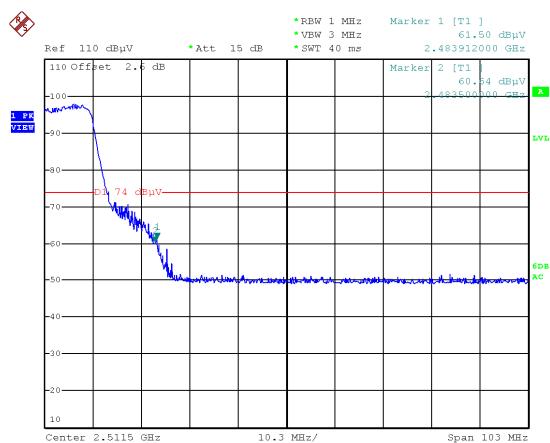

Date: 23.AUG.2016 16:04:14


Average

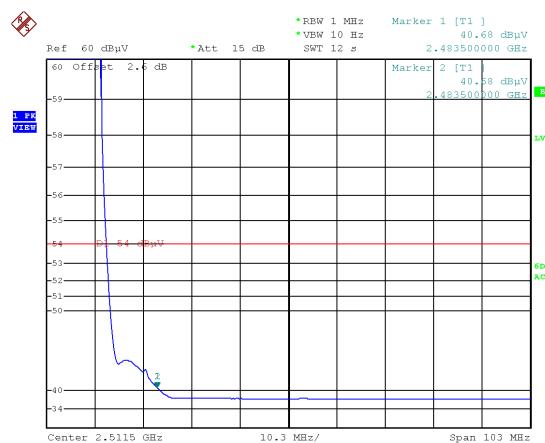

Date: 23.AUG.2016 14:31:01


[IEEE802.11n (HT20)]

Channel Low Horizontal Peak

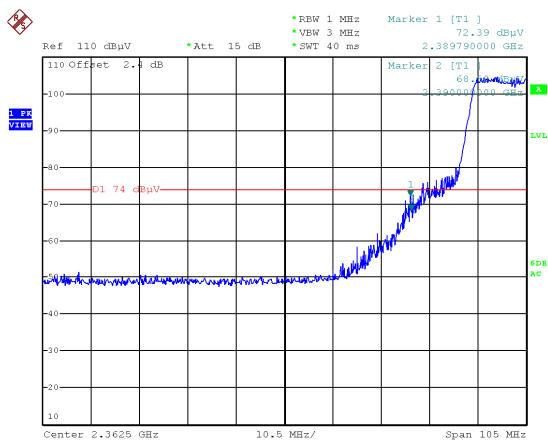


Date: 23.AUG.2016 16:10:37

Average

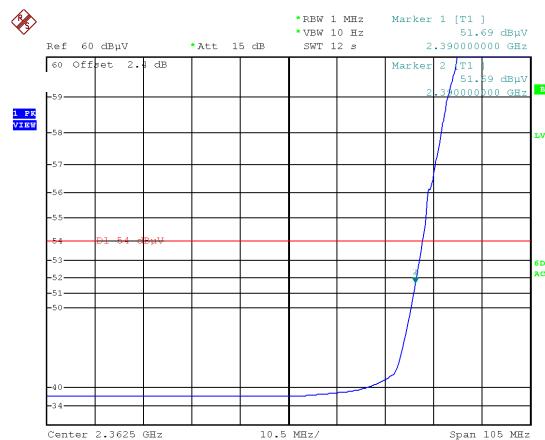


Date: 23.AUG.2016 15:15:56

Vertical Peak

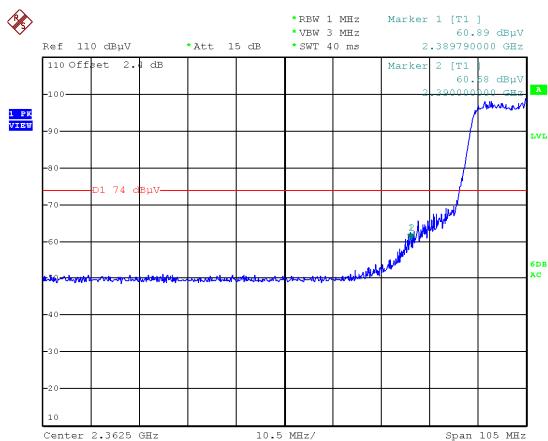


Date: 23.AUG.2016 15:30:52

Average

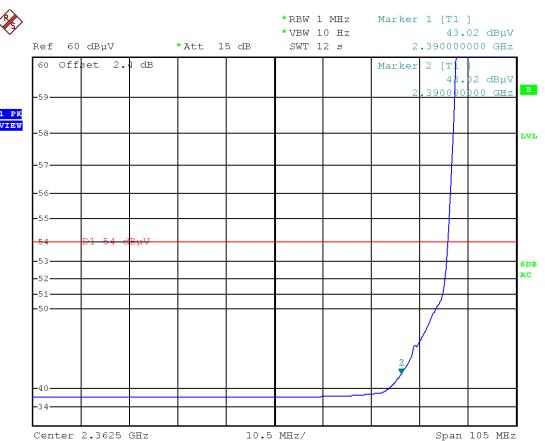


Date: 23.AUG.2016 15:33:01

Channel High Horizontal Peak

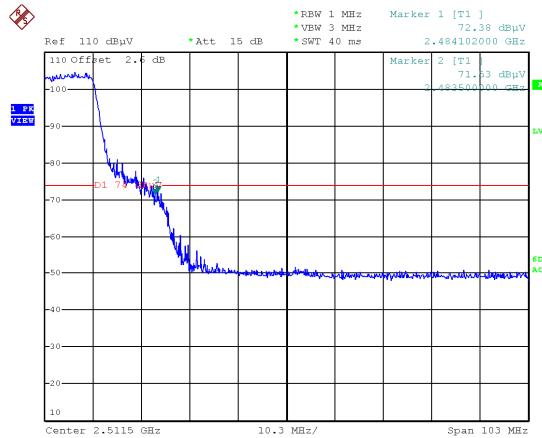


Average

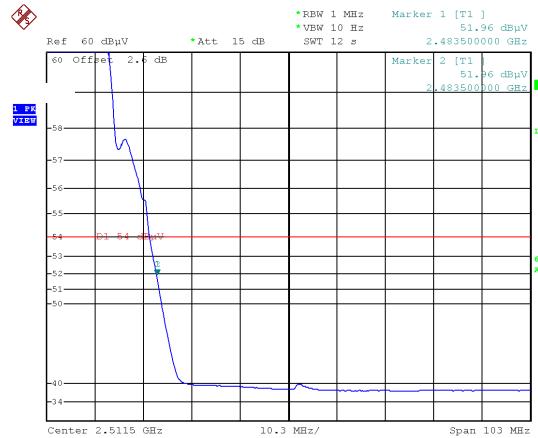


Date: 23.AUG.2016 15:47:09

Date: 23.AUG.2016 15:48:36

Vertical Peak

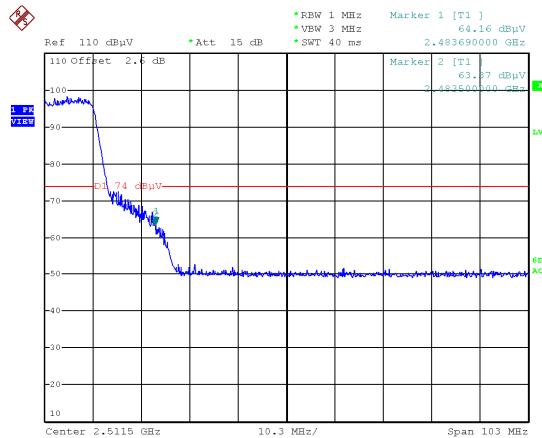

Average

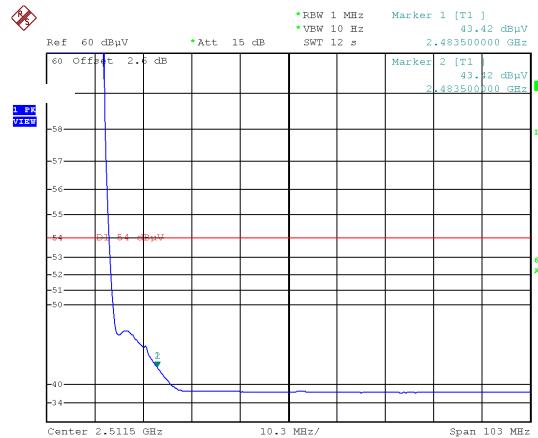

Date: 23.AUG.2016 15:39:26

Date: 23.AUG.2016 15:44:16

10. Transmitter Power Spectral Density

10.1 Measurement procedure


[FCC 15.247(e), KDB 558074 D01 v03r05, Section 10.2]

The peak power is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) Span = 1.5 times the 6 dB bandwidth.
- b) RBW = 3kHz - 100kHz.
- c) VBW \geq 3 x RBW.
- d) Sweep time = auto-couple.
- e) Detector = peak.
- f) Trace mode = max hold.

- Test configuration

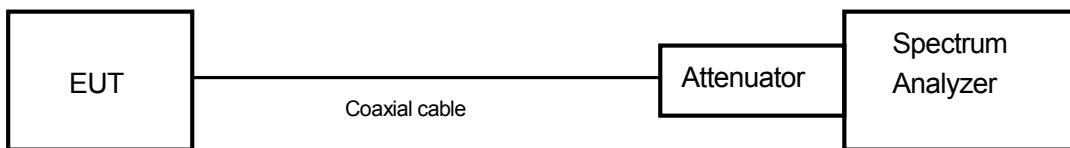

10.2 Limit

The peak power spectral density shall not be greater than 8dBm in any 3kHz band.

10.3 Measurement result

Date : August 8, 2016
 Temperature : 24.2 [°C]
 Humidity : 50.2 [%]
 Test place : Shielded room No.4

Test engineer :

Kazunori Saito

[IEEE802.11b]

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dBm)	Result
Low	2412	-18.97	10.52	-8.45	8.00	16.45	PASS
Middle	2437	-19.08	10.52	-8.56	8.00	16.56	PASS
High	2462	-19.26	10.52	-8.74	8.00	16.74	PASS

Calculation;

$$\text{Transmitter Power Spectral Density Level (Margin)} = \text{Limit} - (\text{Reading} + \text{Factor})$$

[IEEE802.11g]

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dBm)	Result
Low	2412.00	-21.87	10.52	-11.35	8.00	19.35	PASS
Middle	2437.00	-23.06	10.52	-12.54	8.00	20.54	PASS
High	2462.00	-22.50	10.52	-11.98	8.00	19.98	PASS

Calculation;

$$\text{Transmitter Power Spectral Density Level (Margin)} = \text{Limit} - (\text{Reading} + \text{Factor})$$

[IEEE802.11n (HT20)]

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dBm)	Result
Low	2412.00	-23.28	10.52	-12.76	8.00	20.76	PASS
Middle	2437.00	-23.74	10.52	-13.22	8.00	21.22	PASS
High	2462.00	-23.42	10.52	-12.90	8.00	20.90	PASS

Calculation;

$$\text{Transmitter Power Spectral Density Level (Margin)} = \text{Limit} - (\text{Reading} + \text{Factor})$$

10.4 Trace data [IEEE802.11b]


Channel Low






Channel Middle






Channel High

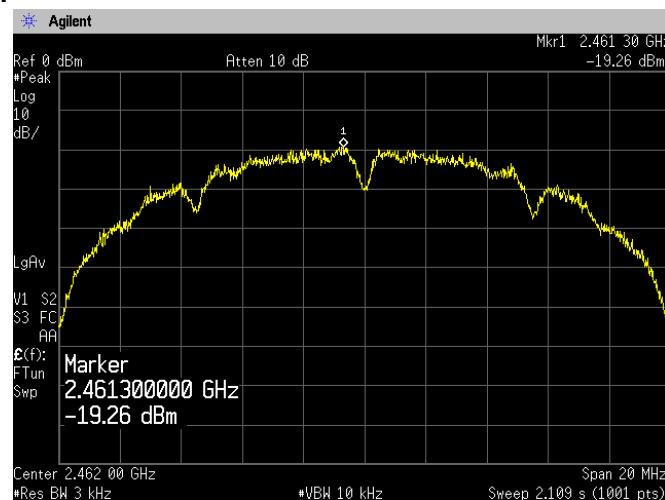

[IEEE802.11g]

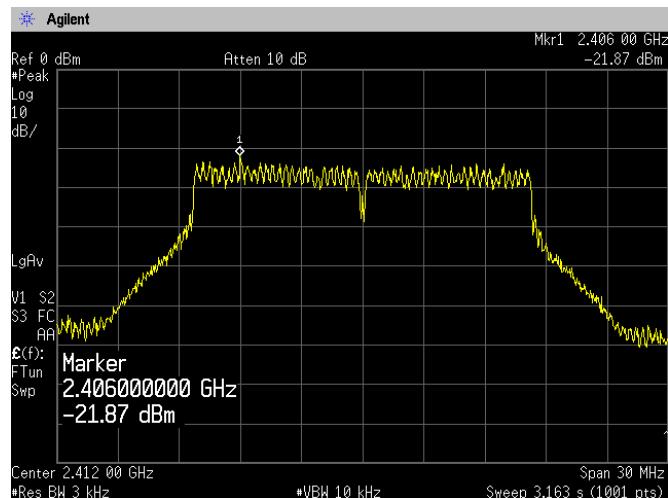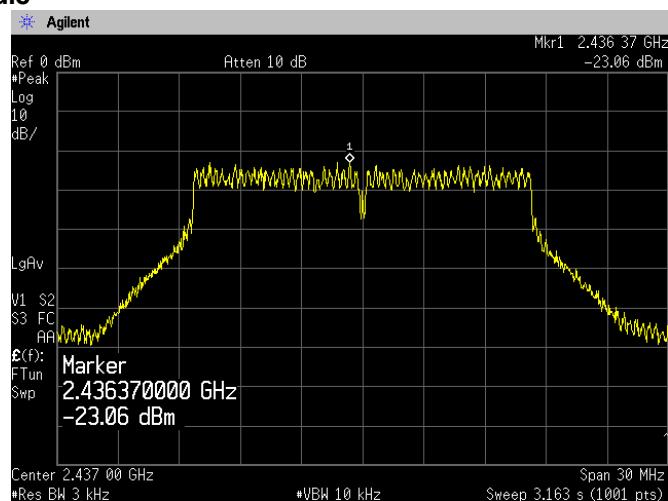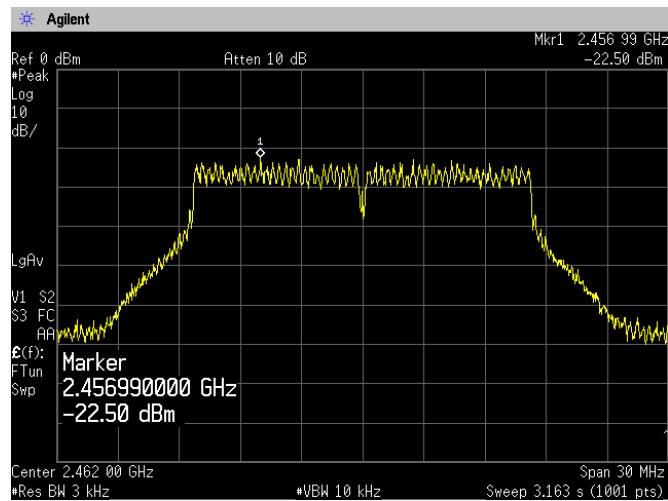Channel Low**Channel Middle****Channel High**

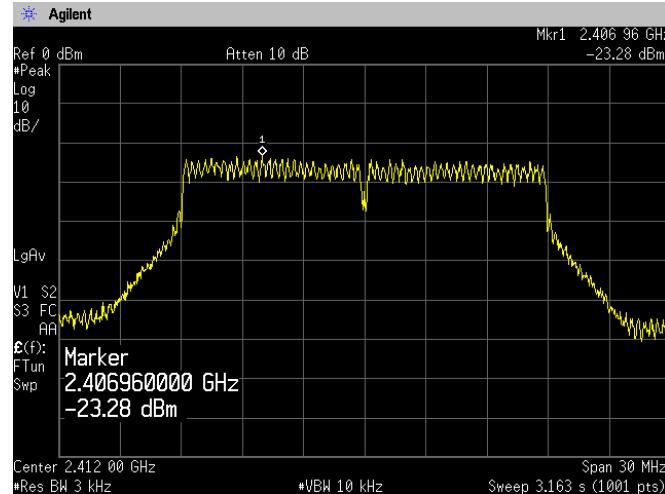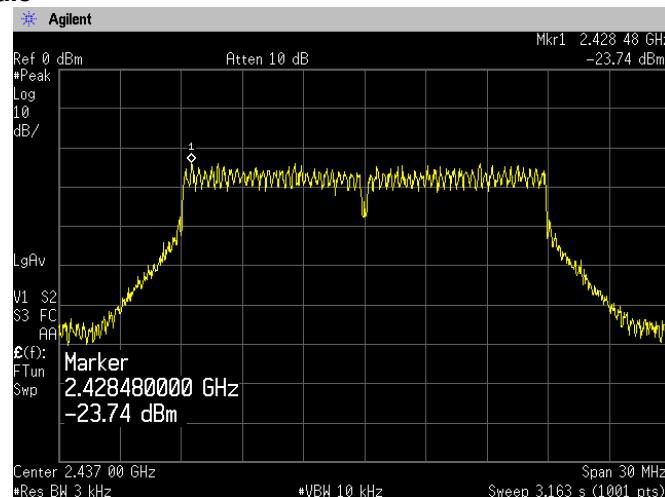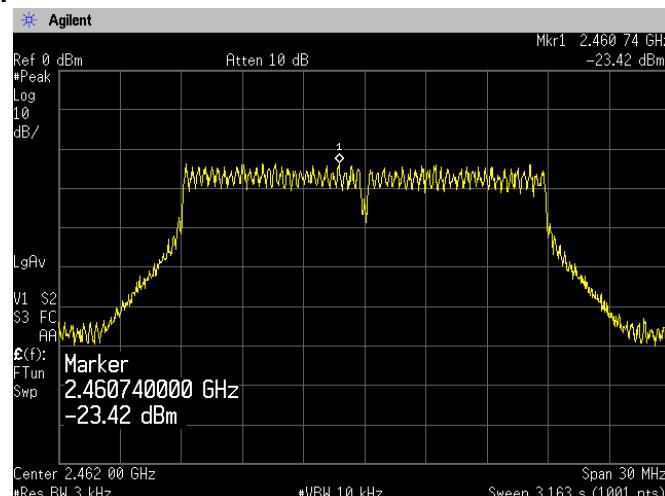[IEEE802.11n (HT20)]
Channel Low

Channel Middle

Channel High


11. AC Power Line Conducted Emissions

11.1 Measurement procedure [FCC 15.207]

Test was applied by following conditions.


Test method	:	ANSI C63.10
Frequency range	:	0.15MHz to 30MHz
Test place	:	3m Semi-anechoic chamber
EUT was placed on	:	FRP table / (W)2.0m × (D)1.0m × (H)0.8m
Vertical Metal Reference Plane	:	(W)2.0m × (H)2.0m 0.4m away from EUT
Test receiver setting		
- Detector	:	Quasi-peak, Average
- Bandwidth	:	9kHz

EUT and peripherals are connected to $50\Omega/50\mu\text{H}$ Line Impedance Stabilization Network (LISN) which are connected to reference ground plane, and are placed 80cm away from EUT. Excess of AC power cable is bundled in center.

LISN for peripheral is terminated in 50Ω .

EUT operating mode is selected to emit the maximum noise. Overall frequency range is investigated with spectrum analyzer using peak detector. Maximum emission configuration is determined by manipulating the EUT, peripherals, interconnecting cables. Then, emission measurements are performed with test receiver in above setting to each current-carrying conductor of the mains port. Sufficient time for EUT, peripherals and test equipment is provided in order for them to warm up to their normal operating condition. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits.

- Test configuration

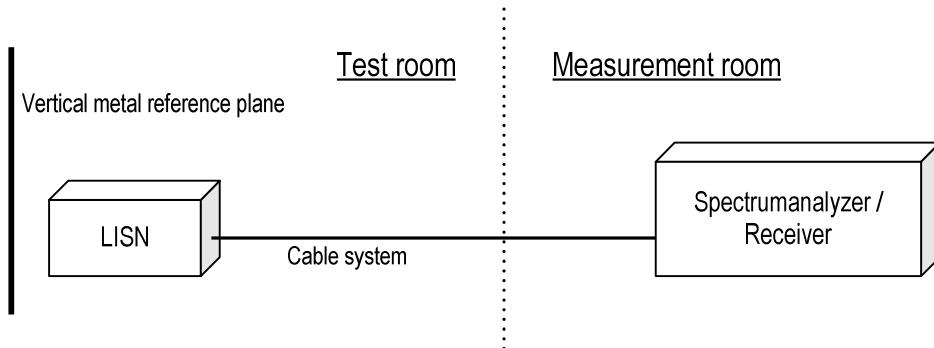

11.2 Calculation method

Emission level = Reading + (LISN. factor + Cable system loss)

Margin = Limit – Emission level

Example:

Limit @ 0.403MHz : 57.8dB μ V(Quasi-peak)
: 47.8dB μ V(Average)

(Quasi peak) Reading = 22.7dB μ V c.f = 10.4dB

Emission level = 22.7 + 10.4 = 33.1dB μ V

Margin = 57.8 – 33.1 = 24.7dB

(Average) Reading = 6.5dB μ V c.f = 10.4dB

Emission level = 6.5 + 10.4 = 16.9dB μ V

Margin = 47.8 – 16.9 = 30.9dB


11.3 Limit

Frequency [MHz]	Limit	
	QP [dBuV]	AV [dBuV]
0.15-0.5	66-56*	56-46*
0.5-5	56	46
5-30	60	50

*: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

11.4 Test data

***** CONDUCTED EMISSION at MAINS PORT *****
[3m Semi-anechoic chamber]

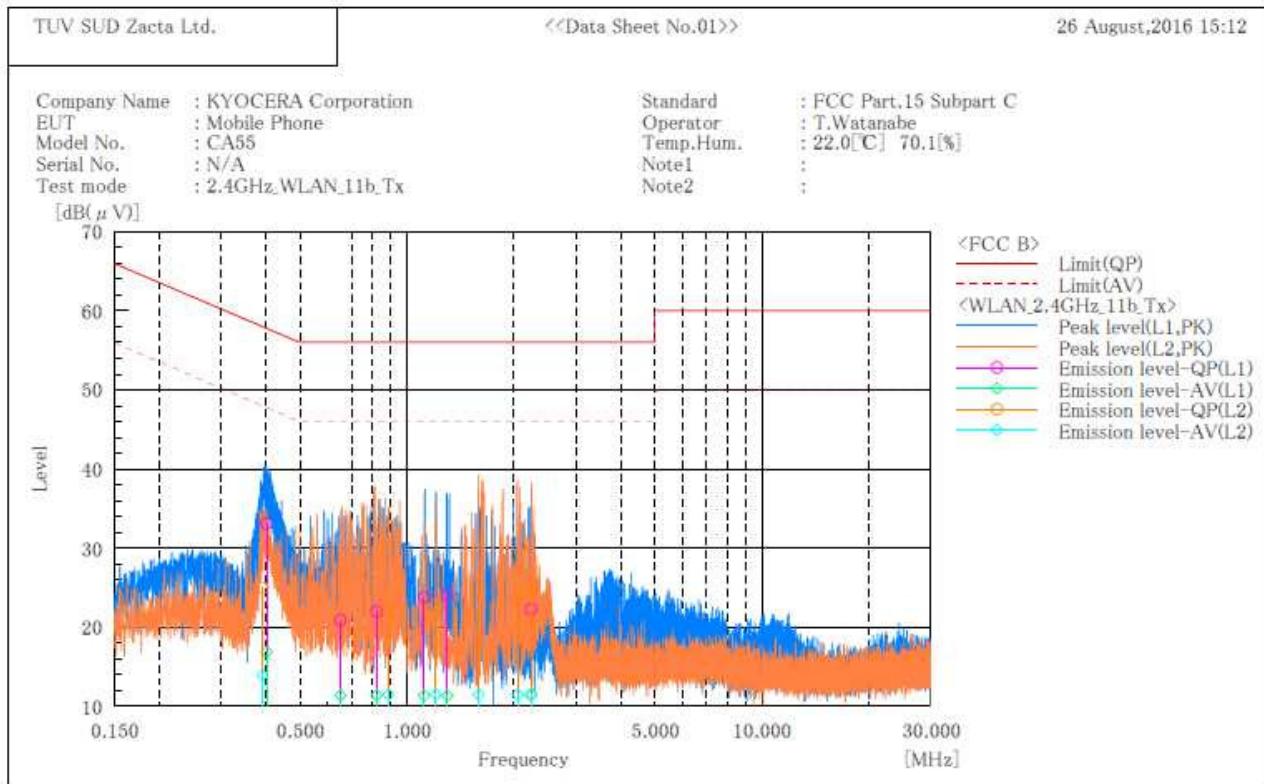

Final Result

— L1 Phase —

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c.f. [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	0.403	22.7	6.5	10.4	33.1	16.9	57.8	47.8	24.7	30.9
2	0.651	10.5	1.0	10.4	20.9	11.4	56.0	46.0	35.1	34.6
3	0.823	11.6	1.0	10.4	22.0	11.4	56.0	46.0	34.0	34.6
4	1.119	13.4	1.0	10.4	23.8	11.4	56.0	46.0	32.2	34.6
5	1.303	13.7	1.0	10.4	24.1	11.4	56.0	46.0	31.9	34.6
6	2.241	11.9	1.0	10.4	22.3	11.4	56.0	46.0	33.7	34.6

— L2 Phase —

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c.f. [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	0.392	14.5	3.5	10.5	25.0	14.0	58.0	48.0	33.0	34.0
2	0.890	11.5	1.0	10.5	22.0	11.5	56.0	46.0	34.0	34.5
3	1.207	12.3	1.0	10.5	22.8	11.5	56.0	46.0	33.2	34.5
4	1.596	14.9	1.0	10.5	25.4	11.5	56.0	46.0	30.6	34.5
5	2.053	13.6	1.0	10.5	24.1	11.5	56.0	46.0	31.9	34.5
6	2.247	14.4	1.0	10.6	25.0	11.6	56.0	46.0	31.0	34.4



12. Antenna requirement

According to FCC section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The antenna is a special antenna mounted inside of the EUT. Therefore, the EUT complies with the antenna requirement of FCC section 15.203.

13. Uncertainty of measurement

Expanded uncertainties stated are calculated with a coverage Factor k=2.

Please note that these results are not taken into account when measurement uncertainty considerations contained in ETSI TR 100 028-0011 determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission at mains port	±3.0dB
Radiated emission (9kHz – 30MHz)	±4.4dB
Radiated emission (30MHz – 1000MHz)	±4.5dB
Radiated emission (1000MHz – 26GHz)	±3.9dB

14. Laboratory description

1. Location:

TÜV SÜD Zacta Ltd. Yonezawa Testing Center
 4149-7 Hachimanpara 5-chome Yonezawa-shi Yamagata 992-1128 Japan
 Phone: +81-238-28-2880 Fax: +81-238-28-2888

2. Facility filing information:

1) NVLAP accreditation: NVLAP Lab. code: 200306-0

2) VLAC accreditation: Lab. code: VLAC-013

Site name	Radiated emission	Conducted emission for mains port	Conducted emission for telecom port	Radiated emission (CMAD)	Expiry Date
3m Semi-anechoic chamber	VLAC-013	VLAC-013	VLAC-013	-	Jul. 3, 2017
10m Semi-anechoic chamber No.1					
10m Semi-anechoic chamber No.2					
Shielded room No.1	-	VLAC-013		-	

3) FCC filing:

Site name	Registration Number	Expiry Date
Site 3	91065	Oct. 1, 2017
3m Semi-anechoic chamber	540072	Feb. 20, 2017
10m Semi-anechoic chamber No.1		
10m Semi-anechoic chamber No.2		
Shielded room No.1		

4) Industry Canada Oats site filing:

Site name	Sites on file: Oats 3m/10m	Expiry Date
Site 3	4224A-3	Dec. 3, 2017
3m Semi-anechoic chamber	4224A-4	
10m Semi-anechoic chamber No.1	4224A-5	
10m Semi-anechoic chamber No.2	4224A-6	

5) VCCI site filing:

Site name	Radiated emission	Conducted emission for mains port	Conducted emission for telecom port	Expiry Date	
Site 3	R-138	C-134	T-1222	Nov. 16, 2017	
3m Semi-anechoic chamber	A-0166	A-0166	A-0166		
10m Semi-anechoic chamber No.1					
10m Semi-anechoic chamber No.2					
Shielded room No.1	-	A-0166		Jul. 3, 2017	

6) TÜV SÜD PS authorization:

Authorized as an EMC test laboratory

7) TÜV Rheinland authorization:

Authorized as an EMC test laboratory

Appendix A. Test equipment

Antenna port conducted test

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
Spectrum analyzer	Agilent Technologies	E4440A	US40420937	Jul. 31, 2017	Jul. 15, 2016
Microwave cable	RS	YH-13S5	N/A(S403)	May 31, 2017	May 24, 2016
Attenuator	Weinschel	56-10	J4993	Nov. 30, 2016	Nov. 12, 2015
Microwave cable	SUHNER	SUCOFLEX104/1.5m	322087/4	Jul. 31, 2017	Jul. 20, 2016
Power meter	ROHDE&SCHWARZ	NRP2	103269	Jun. 30, 2017	Jun. 27, 2016
Power sensor	ROHDE&SCHWARZ	NRP-Z81	102459	Jun. 30, 2017	Jun. 27, 2016

Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100764	Aug. 31, 2016	Aug. 21, 2015
EMI Receiver	ROHDE&SCHWARZ	ESCI	100764	Aug. 31, 2017	Aug. 19, 2016
Preamplifier	ANRITSU	MH648A	M96057	May 31, 2017	May 10, 2016
Biconical antenna	Schwarzbeck	VHA9103/BBA9106	2155	Jun. 30, 2017	Jun. 2, 2016
Log periodic antenna	Schwarzbeck	UHALP9108A	0560	Jun. 30, 2017	Jun. 2, 2016
Attenuator	TME	CFA-01NPJ-6	N/A(S273)	May 31, 2017	May 25, 2016
Attenuator	TME	CFA-01NPJ-3	N/A(S270)	May 31, 2017	May 25, 2016
Spectrum analyzer	Agilent Technologies	E4440A	US40420937	Jul. 31, 2017	Jul. 15, 2016
Preamplifier	TSJ	MLA-1840-B03-35	1240332	Jun. 30, 2017	Jun. 16, 2016
Double ridged guide antenna	EMCO	3115	5205	Mar. 31, 2017	Mar. 3, 2016
Attenuator	Agilent Technologies	8491B	MY39268633	Feb. 28, 2017	Feb. 23, 2016
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170189	Jun. 30, 2017	Jun. 16, 2016
Preamplifier	TSJ	MLA-1840-B03-35	1240332	Jun. 30, 2017	Jun. 16, 2016
Microwave cable	SUHNER	SUCOFELX102/2m	31648	Mar. 31, 2017	Mar. 29, 2016
Notch filter	Micro-Tronics	BRM50702	045	Nov. 30, 2016	Nov. 12, 2015
Microwave cable	SUHNER	SUCOFLEX104/9m	346316/4	May 31, 2017	May 25, 2016
		SUCOFLEX104/1m	322084/4	May 31, 2017	May 25, 2016
		SUCOFLEX104/1.5m	317226/4	May 31, 2017	May 25, 2016
		SUCOFLEX104/7m	41625/6	May 31, 2017	May 25, 2016
PC	DELL	DIMENSION E521	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V5.3.61	N/A	N/A
Absorber	RIKEN	PFP30	N/A	N/A	N/A
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-NSA)	May 31, 2017	May 11, 2016
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-SVSWR)	May 31, 2017	May 12, 2016

Conducted emission at mains port


Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100764	Aug. 31, 2017	Aug. 19, 2016
Attenuator	HUBER+SUHNER	6810.01.A	N/A (S411)	Feb. 28, 2017	Feb. 23, 2016
Line impedance stabilization network for EUT	Kyoritsu Electrical Works, Ltd.	KNW-407F	8-2003-1	Mar. 31, 2017	Mar. 28, 2016
Coaxial cable	FUJIKURA	5D-2W/4m	N/A (S330)	Feb. 28, 2017	Feb. 23, 2016
Coaxial cable	FUJIKURA	5D-2W/1m	N/A (S193)	Feb. 28, 2017	Feb. 23, 2016
Coaxial cable	SUHNER	RG214/U/10m	N/A (S194)	Feb. 28, 2017	Feb. 23, 2016
PC	DELL	DIMENSION	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/CE-AJ	0611193/V5.6.000	N/A	N/A

*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.

Appendix B. Duty Cycle


[Plot & Calculation]

11b

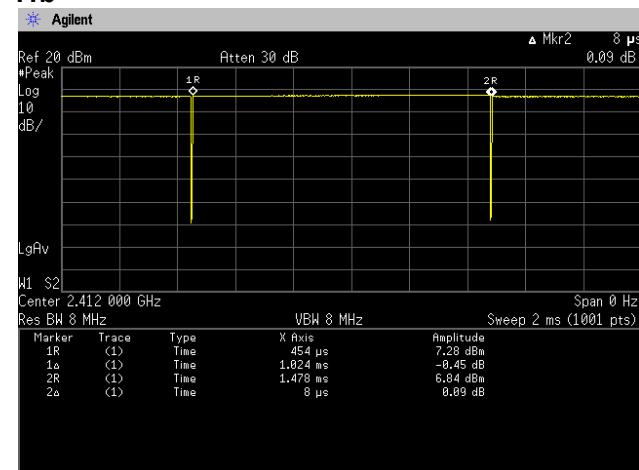


$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff}) = 1024[\mu\text{s}] / (1024[\mu\text{s}] + 8[\mu\text{s}]) = 99.22\%$$

11g

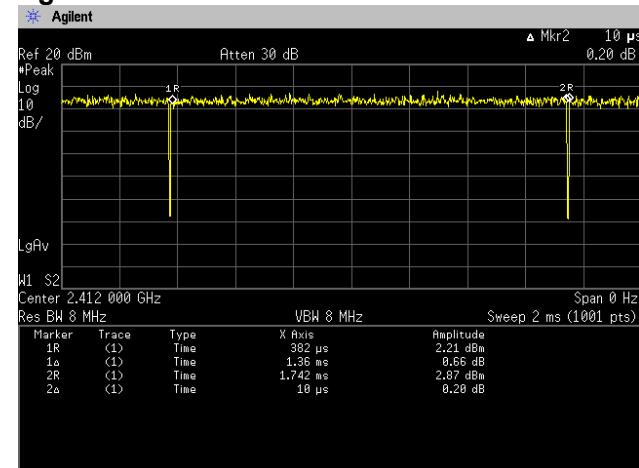

$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff}) = 1360[\mu\text{s}] / (1360[\mu\text{s}] + 10[\mu\text{s}]) = 99.27\%$$

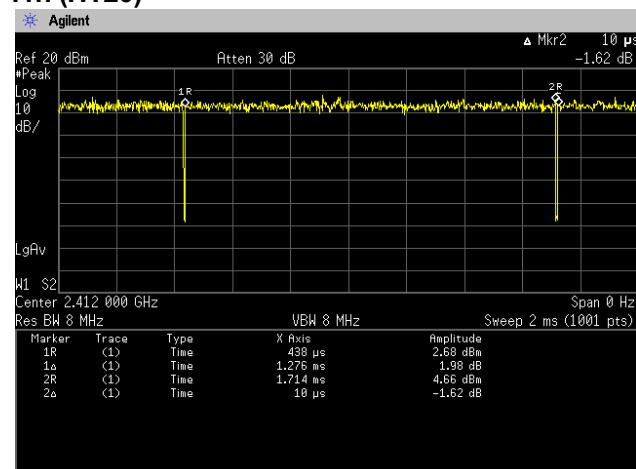11n (HT20)

Duty Cycle = Ton / (Ton + Toff) = 1276[μs] / (1276[μs] + 10[μs]) = 99.22[%]