

Report on the EMC Testing of:

KYOCERA Corporation
Mobile Phone, Model: CB70

In accordance with FCC Part 15 Subpart B Class B



Japan

Prepared for: KYOCERA Corporation
Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku,
Yokohama-shi, Kanagawa, 224-8502 Japan
Phone: +81-45-943-6253 Fax: +81-45-943-6314

**Add value.
Inspire trust.**

COMMERCIAL-IN-CONFIDENCE

Document Number: JPD-TR-19181-0

SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Hiroaki Suzuki	Deputy Manager of RF Group	Approved Signatory	25 NOV 2019

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Japan Ltd. document control rules.

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC Part 15 Subpart B (excluding the deviations mentioned in section 1.4 of this document).



DISCLAIMER AND COPYRIGHT

The results in this report are applicable only to the equipment tested.
This report shall not be re-produced except in full without the written approval of TÜV SÜD Japan Ltd.

ACCREDITATION

This test report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

TÜV SÜD Japan Ltd.
Yonezawa Testing Center
5-4149-7 Hachimanpara,
Yonezawa-shi, Yamagata,
992-1128 Japan

Phone: +81 (0) 238 28 2881
Fax: +81 (0) 238 28 2888
www.tuv-sud.jp



Additional signatures required by FCC 47 CFR Part 2, § 2.938 (b) (10)

Signatures of the individuals responsible for testing the product

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC Part 15 Subpart B. The sample tested was found to be compliant with the requirements defined in the applied rules.

NAME	RESPONSIBLE FOR	SIGNATURE
Yoshiyuki Takahashi	Testing	<i>Yoshiyuki Takahashi</i>
Tsuyoshi Okumura	Testing	<i>Tsuyoshi Okumura</i>
Mitsuhiro Takeda	Testing	<i>Mitsuhiro Takeda</i>

Contents

1	Summary of Test	4
1.1	Modification history of the test report.....	4
1.2	Standards.....	4
1.3	Measurement standards.....	4
1.4	Deviation from standards.....	4
1.5	List of applied test(s) of the EUT.....	4
1.6	Test information.....	4
1.7	Test set up.....	4
1.8	Test period.....	4
2	Equipment Under Test	5
2.1	EUT information.....	5
2.2	Modification to the EUT.....	5
2.3	Variation of family model(s).....	5
2.4	Operation mode.....	6
3	Configuration of Equipment	7
3.1	Equipment used.....	7
3.2	Cable(s) used.....	7
3.3	System configuration.....	8
4	Test Result	9
4.1	Conducted emission at mains port.....	9
4.2	Radiated emission (below 1 GHz).....	11
4.3	Radiated emission (above 1 GHz).....	17
5	Measurement Uncertainty	24
6	Laboratory Information	25
	Appendix A. Test Equipment	26
	Appendix B. Configuration Photographs	28

1 Summary of Test

1.1 Modification history of the test report

Document Number	Modification History	Issue Date
JPD-TR-19181-0	First Issue	Refer to the cover page

1.2 Standards

FCC Part 15 Subpart B

1.3 Measurement standards

ANSI C63.4 2014

1.4 Deviation from standards

None

1.5 List of applied test(s) of the EUT

Regarding judgment of conformance to Emission test, a value of measurement uncertainty was not taken in account.

Test Name	Classification of EUT	Test	Worst Point (Margin)	Result	Remarks
Conducted emission at mains port	Class B	Applied	L1 0.190 MHz QP 16.6 dB	Pass	-
Radiated emission (below 1 GHz)	Class B	Applied	USB Read with PC mode H 133.082MHz QP 10.2 dB	Pass	-
Radiated emission (above 1 GHz)	Class B	Applied	USB Read with PC mode H 2999.999 MHz AV 9.0 dB	Pass	-

1.6 Test information

None

1.7 Test set up

Table-top

1.8 Test period

11-October-2019 - 12-November-2019

2 Equipment Under Test

2.1 EUT information

Applicant	KYOCERA Corporation Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku, Yokohama-shi, Kanagawa, 224-8502 Japan Phone: +81-45-943-6253 Fax: +81-45-943-6314
Equipment Under Test (EUT)	Mobile Phone
Model number	CB70
Serial number	35860710005064, 358607100033919
Trade name	KYOCERA
Authorization	JOYCB70
Number of sample(s)	2
EUT condition	Pre-production
Maximum frequency	2000 MHz
Power rating	Battery: DC 3.85 V
Size	(W) 71.0 x (D) 159.0 x (H) 8.9 mm

2.2 Modification to the EUT

The table below details modifications made to the EUT during the test project.

Modification State	Description of Modification	Modification fitted by	Date of Modification
CB70, S/N: 35860710005064			
0	As supplied by the applicant	Not Applicable	Not Applicable
CB70, S/N: 358607100033919			
0	As supplied by the applicant	Not Applicable	Not Applicable

2.3 Variation of family model(s)

2.3.1 List of family model(s)

Not applicable

2.3.2 Reason for selection of EUT

Not applicable



Japan

2.4 Operation mode

1. In Camera with ADP mode

- i) Power ON
- ii) Record

2. Out Camera with ADP mode

- i) Power ON
- ii) Record

3. MP4 with ADP mode

- i) Power ON
- ii) Execution of Color Bar moving picture data

4. USB Read with PC mode

- i) Power ON
- ii) EUT connects to PC via USB cable
- iii) Read / write of MP4 moving picture data

5. Charge with Cradle and ADP mode

- i) Power ON
- ii) Charge

3 Configuration of Equipment

Numbers assigned to equipment or cables in "3.1 Equipment(s) used" and "3.2 Cable(s) used" correspond to numbers in "3.3 System configuration".

3.1 Equipment used

No.	Equipment	Company	Model No.	Serial No.	Authorization	Remarks
EUT1	Mobile Phone	KYOCERA	CB70	35860710005064	JOYCB70	EUT*1
				358607100033919		EUT*2
AE1	AC adapter	KDDI	0301PQA	HSTFA	N/A	*3
AE2	Earphone	N/A	N/A	N/A	N/A	-
AE3	Personal Computer	hp	Compaq 6720S	CNU8321Q6M	DoC	-
AE4	AC adapter	hp	PA-1650-02H	W92C401BMW6TY9	N/A	-
AE5	Cradle	KDDI	KYV-47PUA	KY-LJA	N/A	-

*1: Used except for Charge with Cradle and ADP mode

*2: Used in Charge with Cradle and ADP mode


*3: AC adapter is connected to keep operating.

3.2 Cable(s) used


No.	Cable	Length (m)	Shield	EUT accessory Ferrite core	Remarks
a	USB type C cable	1.0	Yes	-	-
b	Earphone cable	1.25	No	-	-
c	DC cable for PC AC adapter	1.8	No	-	-
d	AC power cord for PC AC adapter	1.8	No	-	-

3.3 System configuration


1. In Camera with ADP mode
2. Out Camera with ADP mode
3. MP4 with ADP mode

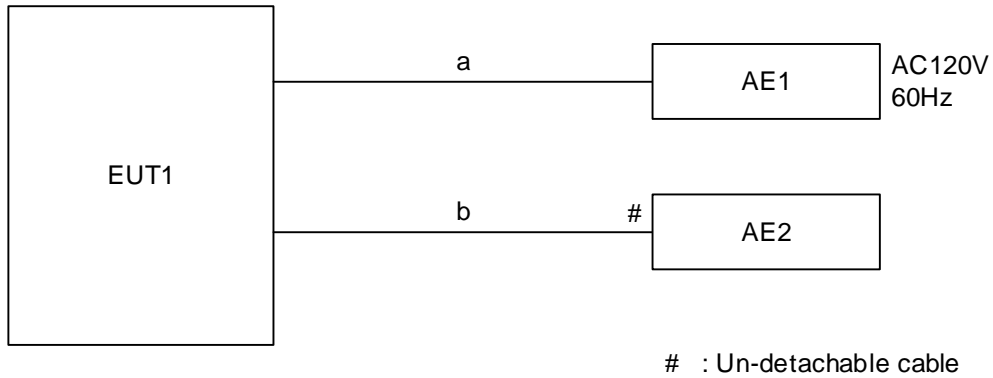

4. USB Read with PC mode

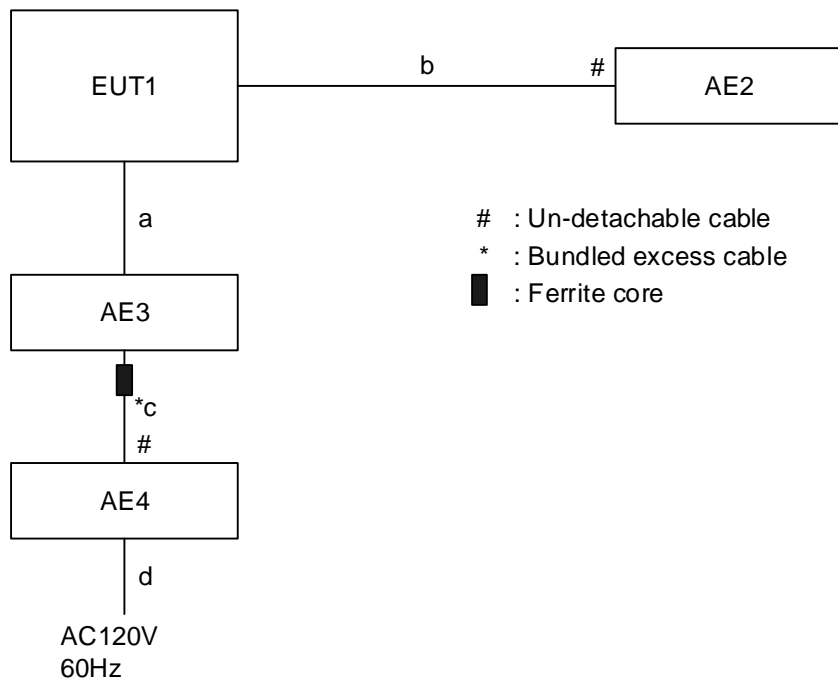

5. Charge with Cradle and ADP mode

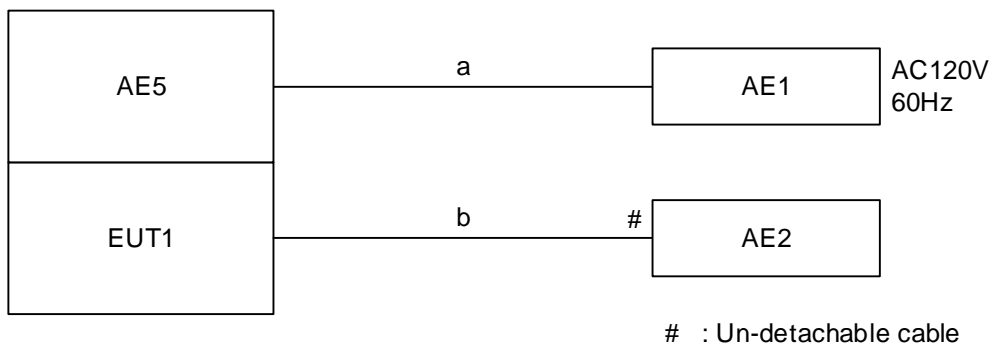

4 Test Result

4.1 Conducted emission at mains port

4.1.1 Measurement condition

Frequency range	0.15 MHz-30 MHz
Test place	10 m Semi-Anechoic Chamber No. 1
EUT was placed on	FRP table (W) 2.0 × (D) 1.0 × (H) 0.8 m
Metal reference plane	Vertical
Test receiver setting	Detector: Quasi-peak, Average Bandwidth: 9 kHz
Line Impedance Stabilization Network (LISN)	Specification: Distance from EUT: 0.8 m

EUT is placed on a non-conducting table for table-top equipment or on insulation material for a floor-standing equipment. In addition, a table-top equipment is located 0.4 m to a metal reference plane.

Line Impedance Stabilization Network (LISN) is placed 0.8 m away from the EUT. The power code of the EUT is connected to LISN and its excess part is bundled in the center. The length of bundling is 0.3-0.4 m.

A power code of a peripheral is connected to LISN and terminated into 50 Ω.

Excess cables between equipment are bundled in the center. The length of bundling is 0.3-0.4 m.

Where LISN cannot be applied, the test is performed using a voltage probe.

After overall frequency range is investigated with spectrum analyzer using peak detector, measurements are performed with test receiver in setting to the defined values.

4.1.2 Calculation method

Emission level = Reading + c.f. (correction factor)*

Margin = Limit – Emission level

*Note: c.f. = LISN factor + Cable system loss + Attenuator loss

Example)

Limit @ 6.770 MHz: 60.0 dBμV (Quasi-peak)
50.0 dBμV (Average)

Quasi-peak Reading = 41.2 dBμV c.f. = 10.3 dB
Emission level = 41.2 + 10.3 = 51.5 dBμV
Margin = 60.0 - 51.5 = 8.5 dB


Average Reading = 35.0 dBμV c.f. = 10.3 dB
Emission level = 35.0 + 10.3 = 45.3 dBμV
Margin = 50.0 - 45.3 = 4.7 dB



4.1.3 Test data

Operation mode	USB Read with PC mode
EUT	CB70, S/N: 35860710005064 - Modification State 0

Date of test: 11-October-2019 Supply voltage: AC 120 V Supply frequency: 60 Hz

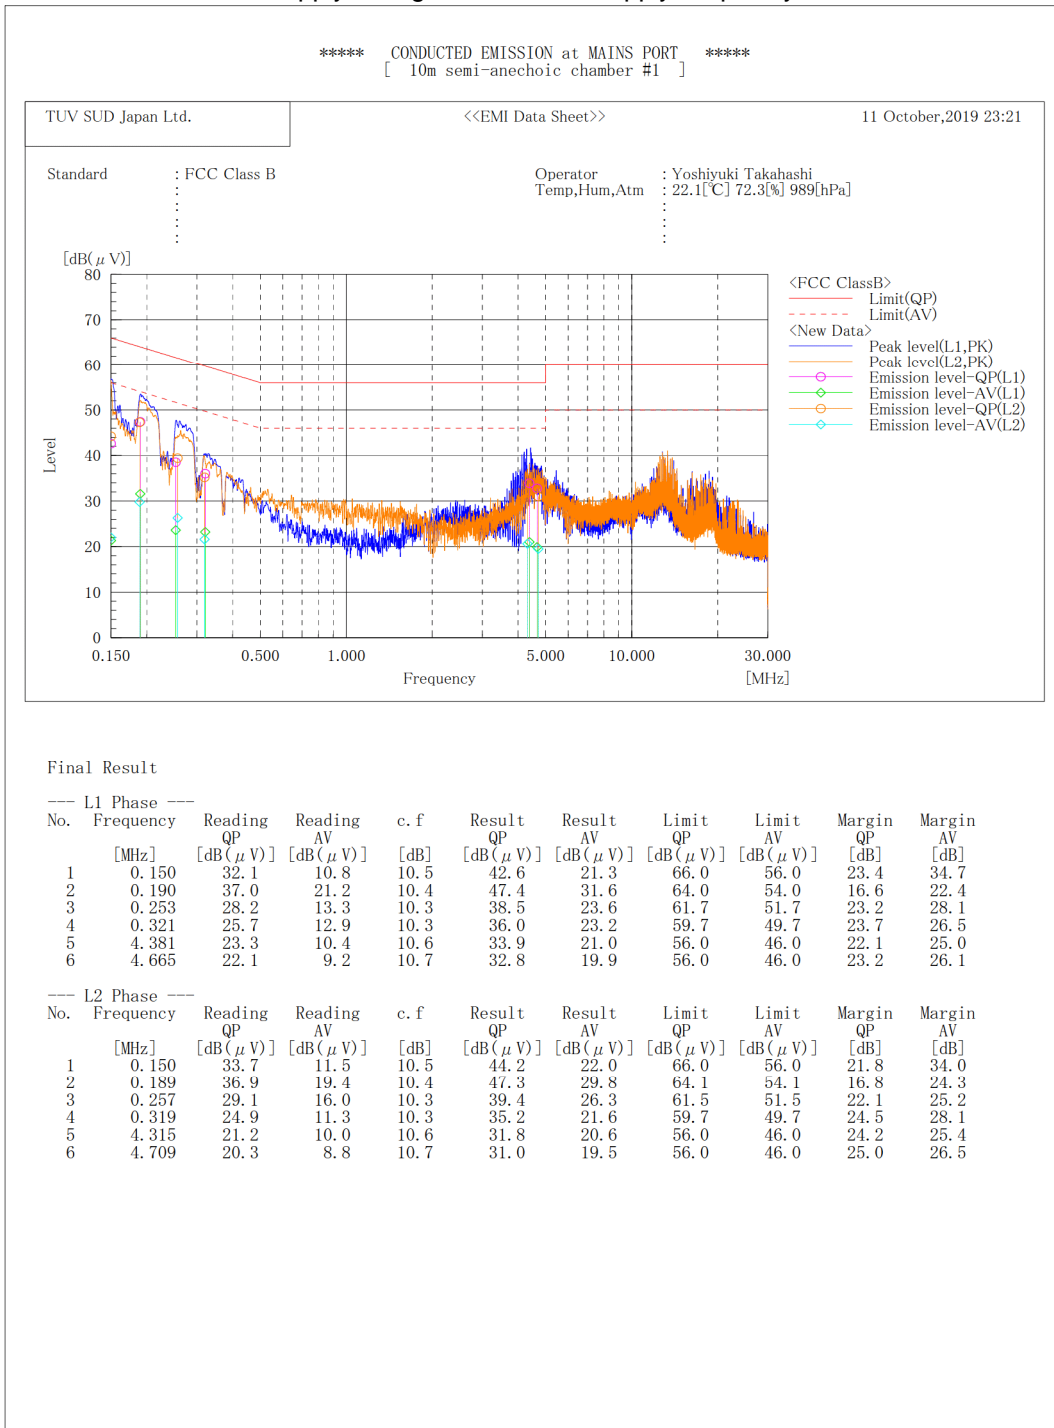

4.2 Radiated emission (below 1 GHz)

4.2.1 Measurement condition

Frequency range	30 MHz-1000 MHz
Test place	10 m Semi-Anechoic Chamber No. 1
EUT was placed on	FRP table (W) 2.0 × (D) 1.0 × (H) 0.8 m
Axis	0°-360°
Antenna	Distance from EUT: 3 m Height: 1-4 m Polarity: Horizontal/Vertical
Test receiver setting	Detector: Quasi-peak Bandwidth: 120 kHz

EUT is placed on a non-conducting table for table-top equipment or on insulation material for a floor-standing equipment. The non-conducting table or the insulation material is placed on a rotating turn table.

Excess cables between equipment are bundled in the center. The length of bundling is 0.3-0.4 m.

An antenna is adjusted between 1-4 m in height and varied its polarization (horizontal and vertical), and the EUT azimuth is varied by the rotating turntable 0 to 360 degrees.

After overall frequency range is investigated with spectrum analyzer using peak detector, measurements are performed with test receiver in setting to the defined values.

4.2.2 Calculation method

Emission level = Reading + c.f. (correction factor)*

Margin = Limit - Emission level

*Note: c.f. = Antenna factor + Cable system loss + Attenuator loss - Amplifier Gain

Example)

Limit @ 350.0 MHz: 37.0 dB μ V/m

Reading = 41.1 dB μ V c.f. = -11.8 dB/m

Emission level = 41.1 - 11.8 = 29.3 dB μ V/m


Margin = 37.0 - 29.3 = 7.7 dB



4.2.3 Test data

Operation mode	In Camera with ADP mode
EUT	CB70, S/N: 35860710005064 - Modification State 0

Date of test: 11-October-2019 Supply voltage: AC 120 V Supply frequency: 60 Hz

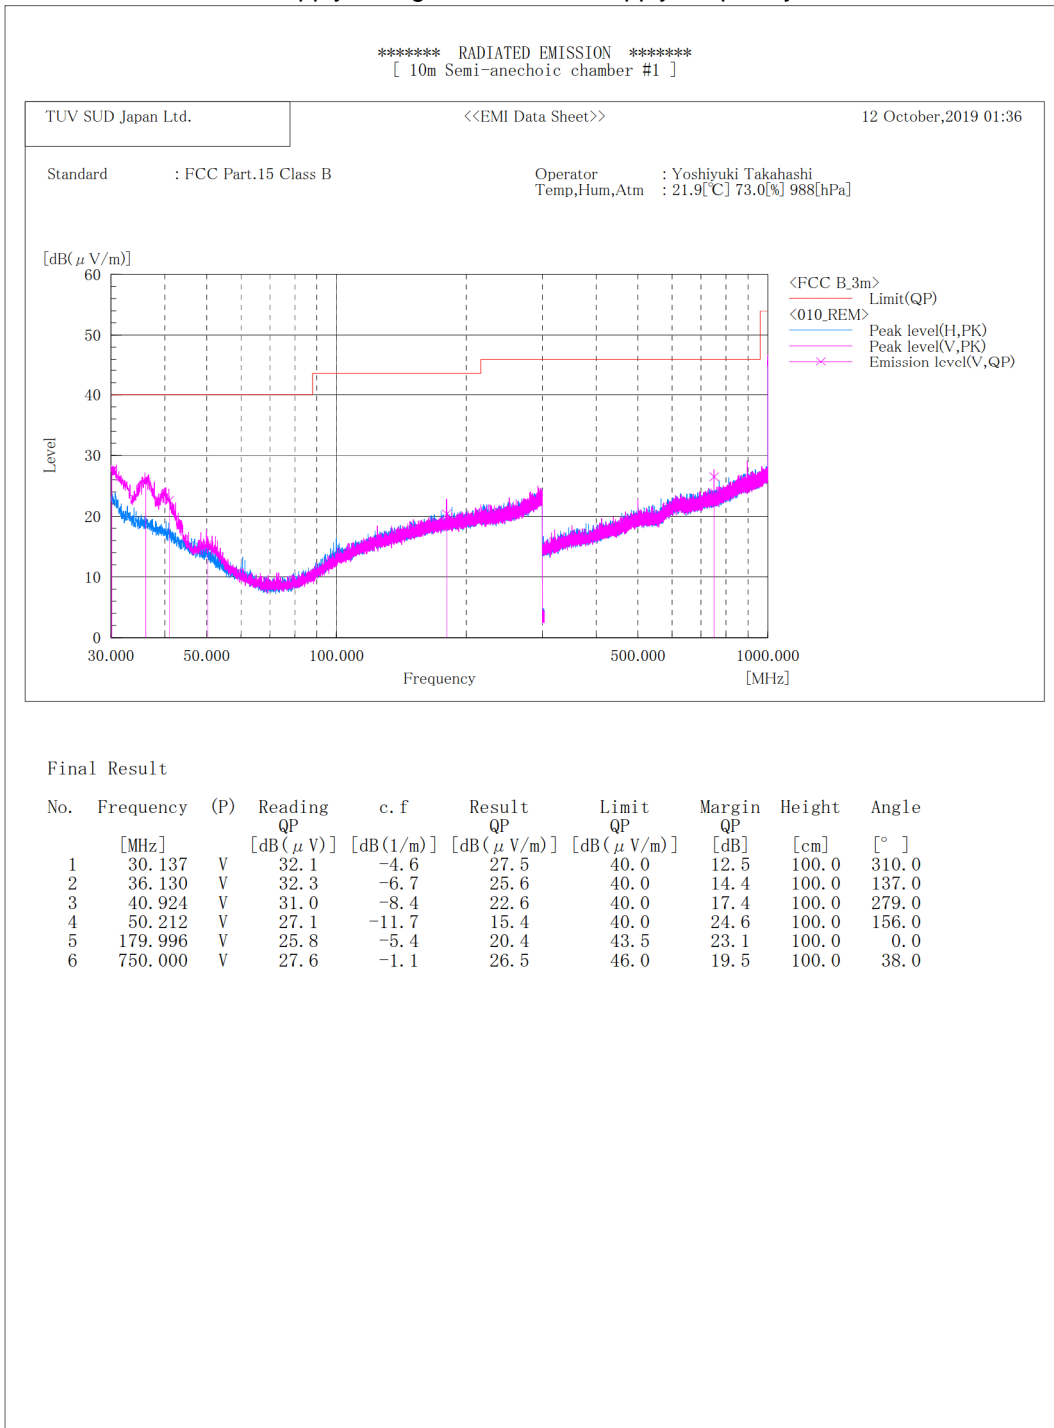




Japan

Operation mode	Out Camera with ADP mode
EUT	CB70, S/N: 35860710005064 - Modification State 0

Date of test: 12-October-2019 Supply voltage: AC 120 V Supply frequency: 60 Hz

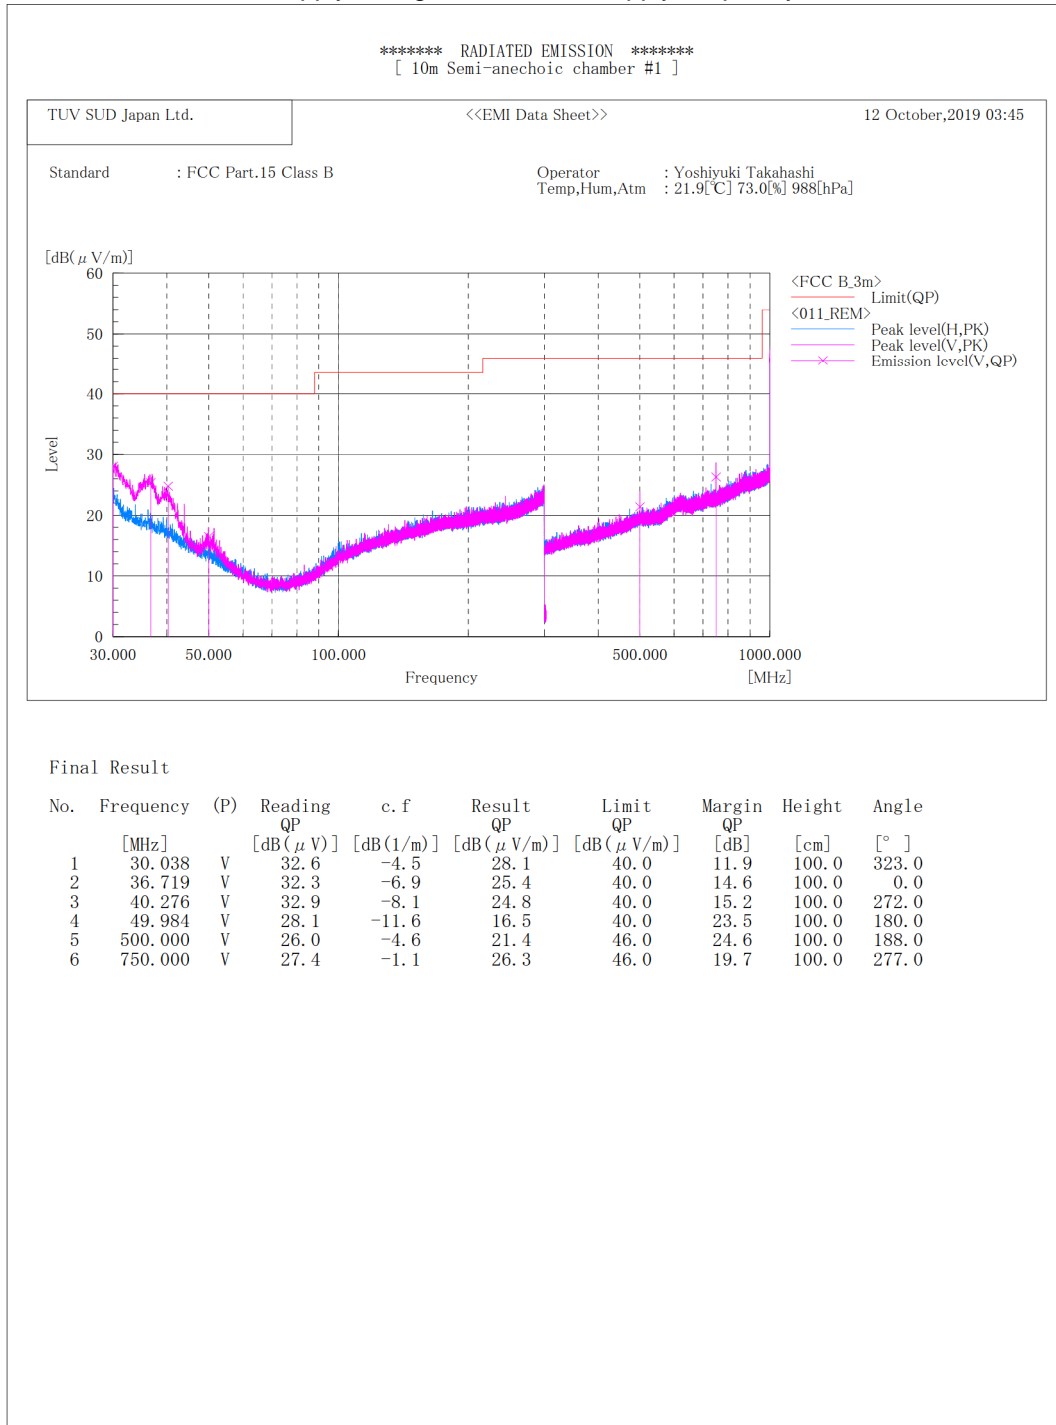




Japan

Operation mode	MP4 with ADP mode
EUT	CB70, S/N: 35860710005064 - Modification State 0


Date of test: 12-October-2019 Supply voltage: AC 120 V Supply frequency: 60 Hz

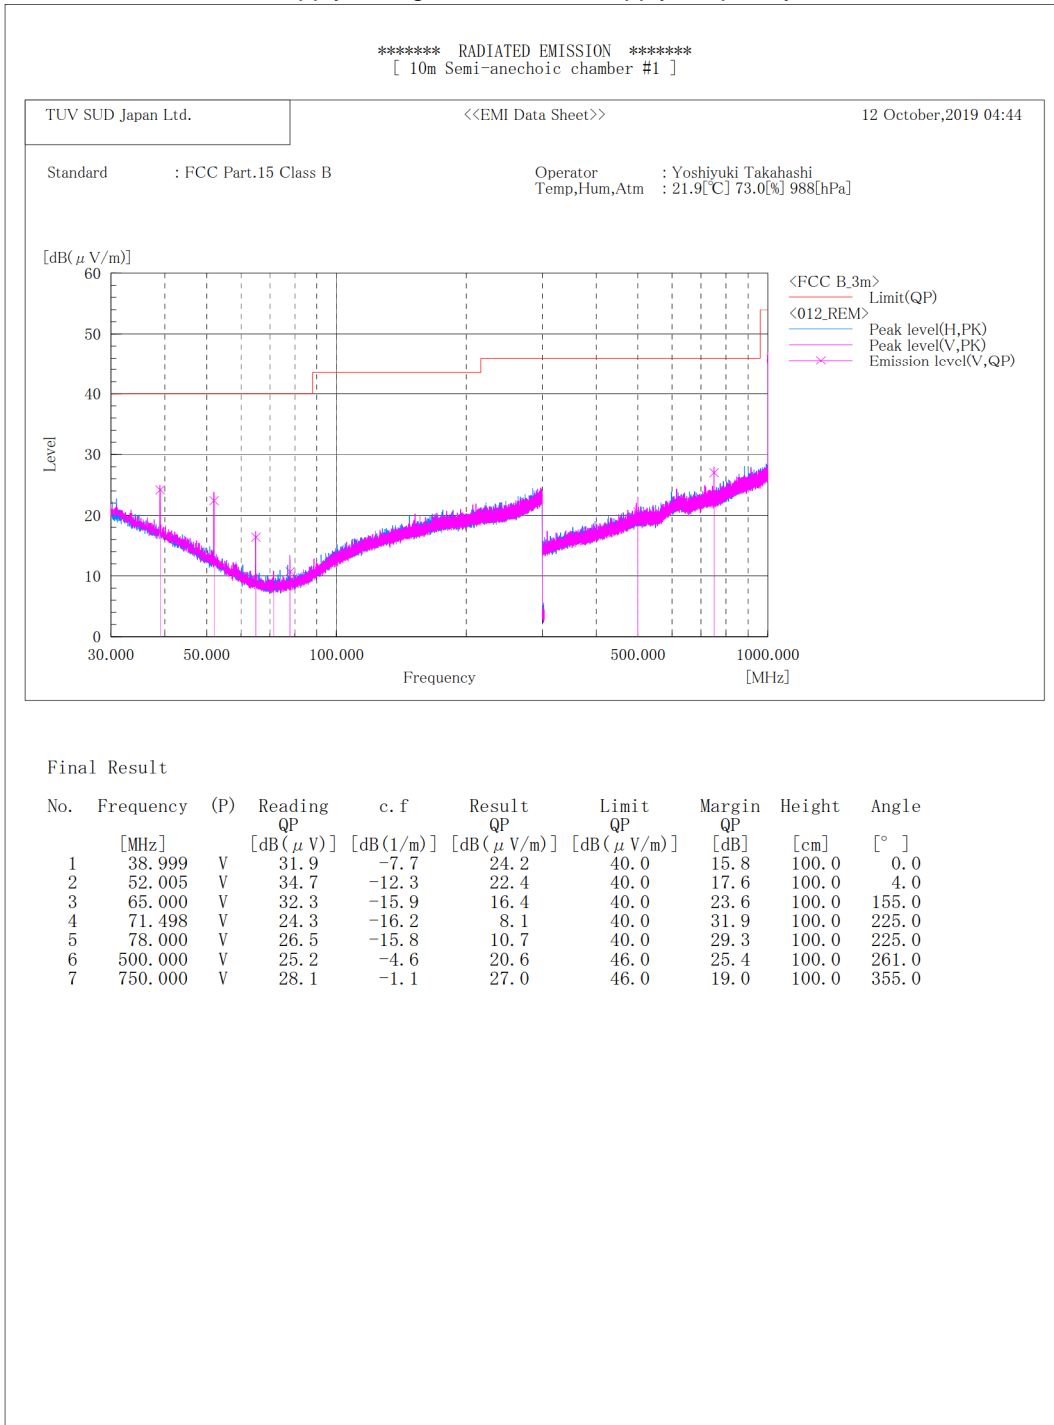



Operation mode	USB Read with PC mode
EUT	CB70, S/N: 35860710005064 - Modification State 0

Date of test: 12-October-2019 Supply voltage: AC 120 V Supply frequency: 60 Hz

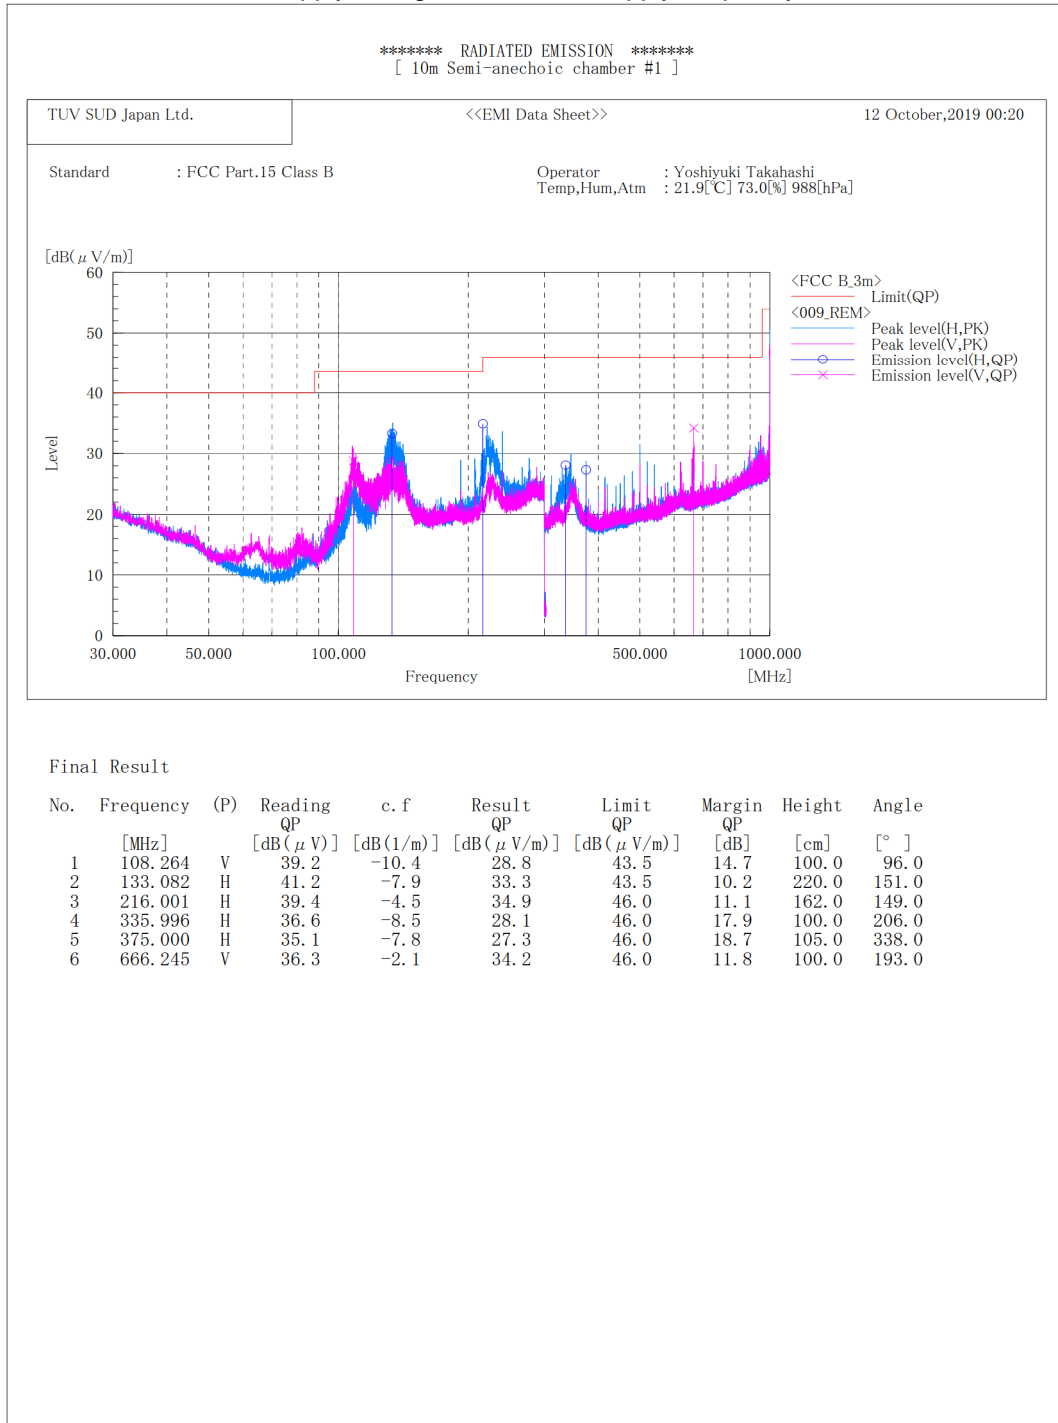




Japan

Operation mode	Charge with Cradle and ADP mode
EUT	CB70, S/N: 358607100033919 - Modification State 0

Date of test: 12-November-2019 Supply voltage: AC 120 V Supply frequency: 60 Hz

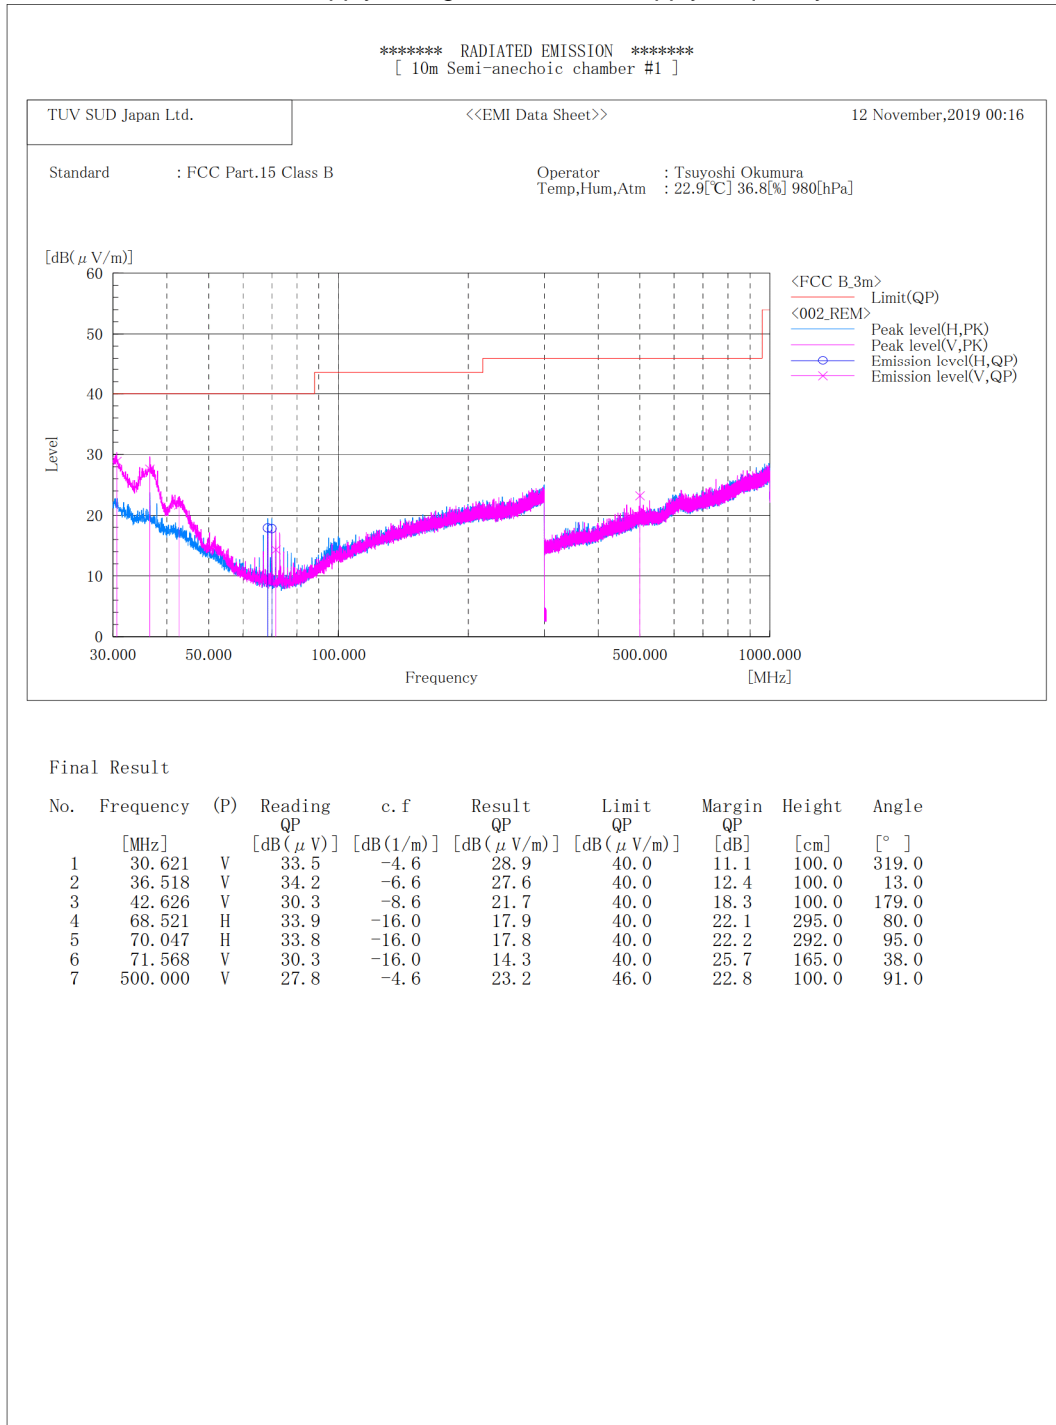

4.3 Radiated emission (above 1 GHz)

4.3.1 Measurement condition

Frequency range	1.0 GHz-10.0 GHz
Test place	10 m Semi-Anechoic Chamber No. 1
EUT was placed on	Styrene foam table (W) 2.0 x (D) 1.0 x (H) 0.8 m
Axis	0°-360°
Antenna	Distance: 3.85 m, 3.92m, 3.95m Height: 1-4 m Polarity: Horizontal/Vertical
Test receiver setting	Detector: Peak, Average Bandwidth: 1 MHz

EUT is placed on a styrene form table for table-top equipment or on insulation material for a floor-standing equipment. The styrene form table or the insulation material is placed on a rotating turn table.

Excess cables between equipment are bundled in the center. The length of bundling is 0.3-0.4 m.

Absorbers are placed between the EUT and an antenna.

The antenna is adjusted between 1-4 m in height and varied its polarization (horizontal and vertical), and the EUT azimuth is varied by the rotating turntable 0 to 360 degrees. Where height of the antenna is changed, its angle is also adjusted to the position of the EUT.

After overall frequency range is investigated with spectrum analyzer using peak detector, measurements are performed with test receiver in setting to the defined values.

The antenna is positioned from the test volume that was predetermined by the site VSWR measurement. Since this predetermined test volume is different from maximum circumference where the EUT and the peripheral devices are actually placed, the measurement distance conversion factor is added to the measurement data.

Antenna 3 dB beamwidth (antenna used: 3117)

Antenna: 3115

Frequency (GHz)	θ3 dB (°)	3 dB beamwidth w (m)
1.0	63	3.68
2.0	47	2.61
3.0	38	2.07
4.0	36	1.95
5.0	40	2.18
6.0	44	2.42

Antenna: 3117

Frequency (GHz)	θ3 dB (°)	3 dB beamwidth w (m)
1.0	82	5.22
2.0	60	3.46
3.0	76	4.69
4.0	56	3.19
5.0	54	3.06
6.0	50	2.80

Measurement distance: $d = 3.0$ m

$W = 2 \times d \times \tan(0.5 \times \theta_{3 \text{ dB}})$

4.3.2 Calculation method

Emission level = Reading + Measurement distance conversion factor + c.f. (correction factor)*

Margin = Limit - Emission level

*Note: c.f. = Antenna factor + Cable system loss + Attenuator loss - Amplifier Gain

Example)

Limit @ 1100.0 MHz: 70.0 dB μ V/m (Peak)
50.0 dB μ V/m (Average)

Measurement distance: 3.25 m


Measurement distance conversion factor: $20 \log (3.25\text{m}/3.0\text{m}) = 0.7 \text{ dB}$

Peak	Reading = 50.2 dB μ V, Measurement distance conversion factor = 0.7 dB, c.f. = 1.7 dB/m Emission level = $50.2 + 0.7 + 1.7 = 52.6 \text{ dB}\mu\text{V/m}$ Margin = $70.0 - 52.6 = 17.4 \text{ dB}$
Average	Reading = 32.0 dB μ V, Measurement distance conversion factor = 0.7 dB, c.f. = 1.7 dB/m Emission level = $32.0 + 0.7 + 1.7 = 34.4 \text{ dB}\mu\text{V/m}$ Margin = $50.0 - 34.4 = 15.6 \text{ dB}$

4.3.3 Test data


Operation mode	In Camera with ADP mode
EUT	CB70, S/N: 35860710005064 - Modification State 0

Date of test: 18-October-2019 Supply voltage: AC 120 V Supply frequency: 60 Hz

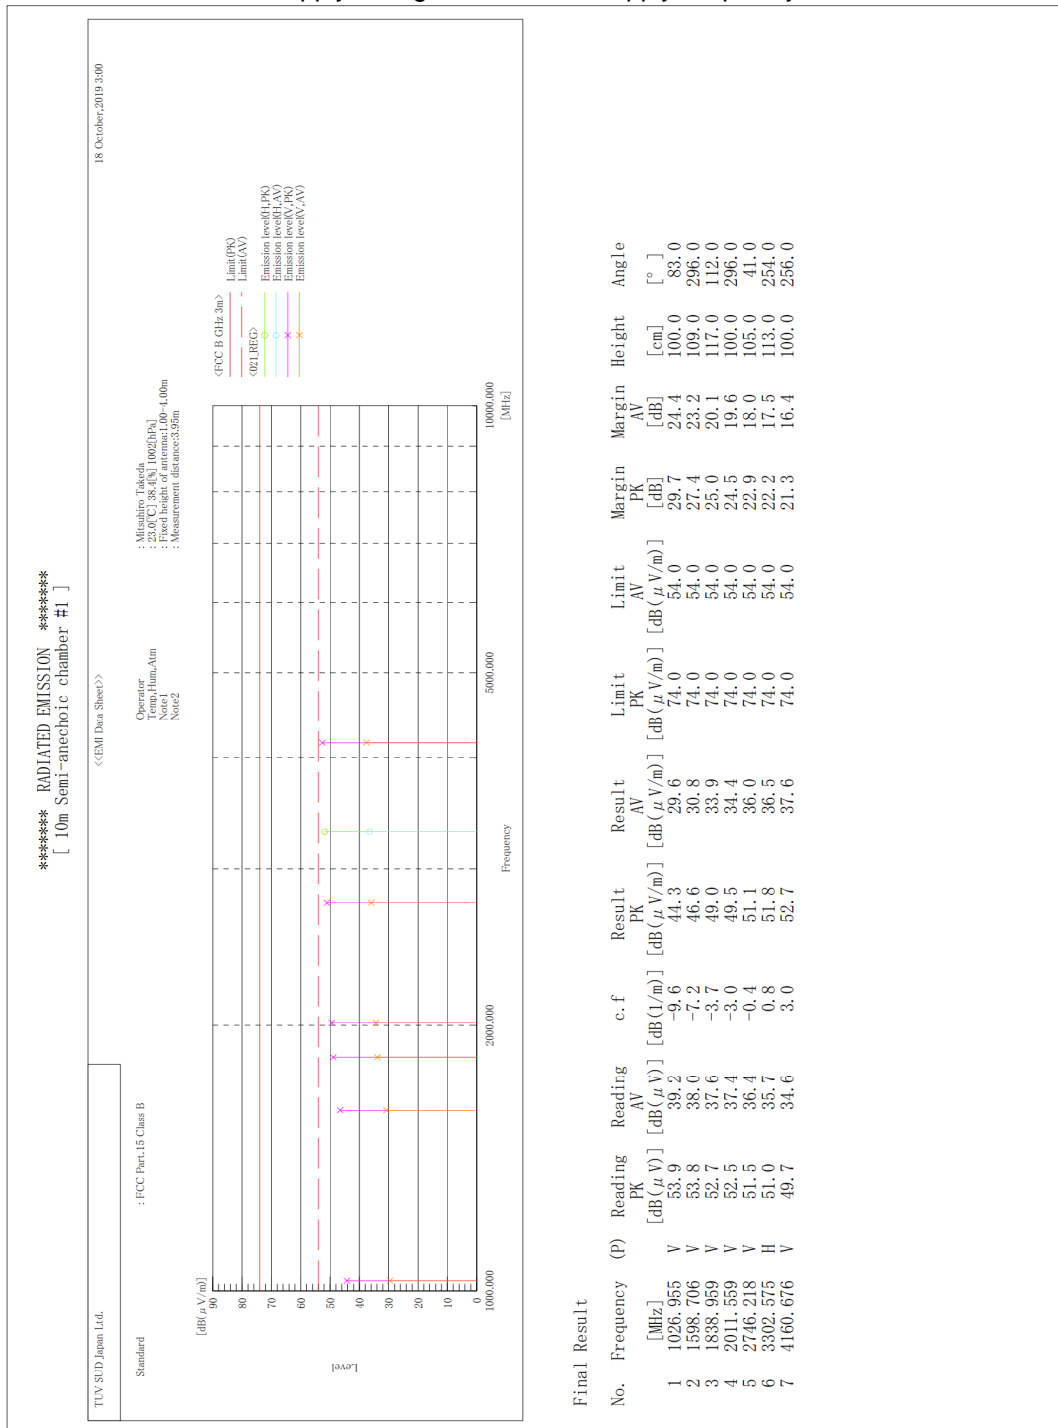

Operation mode	Out Camera with ADP mode
EUT	CB70, S/N: 35860710005064 - Modification State 0


Date of test: 18-October-2019 Supply voltage: AC 120 V Supply frequency: 60 Hz

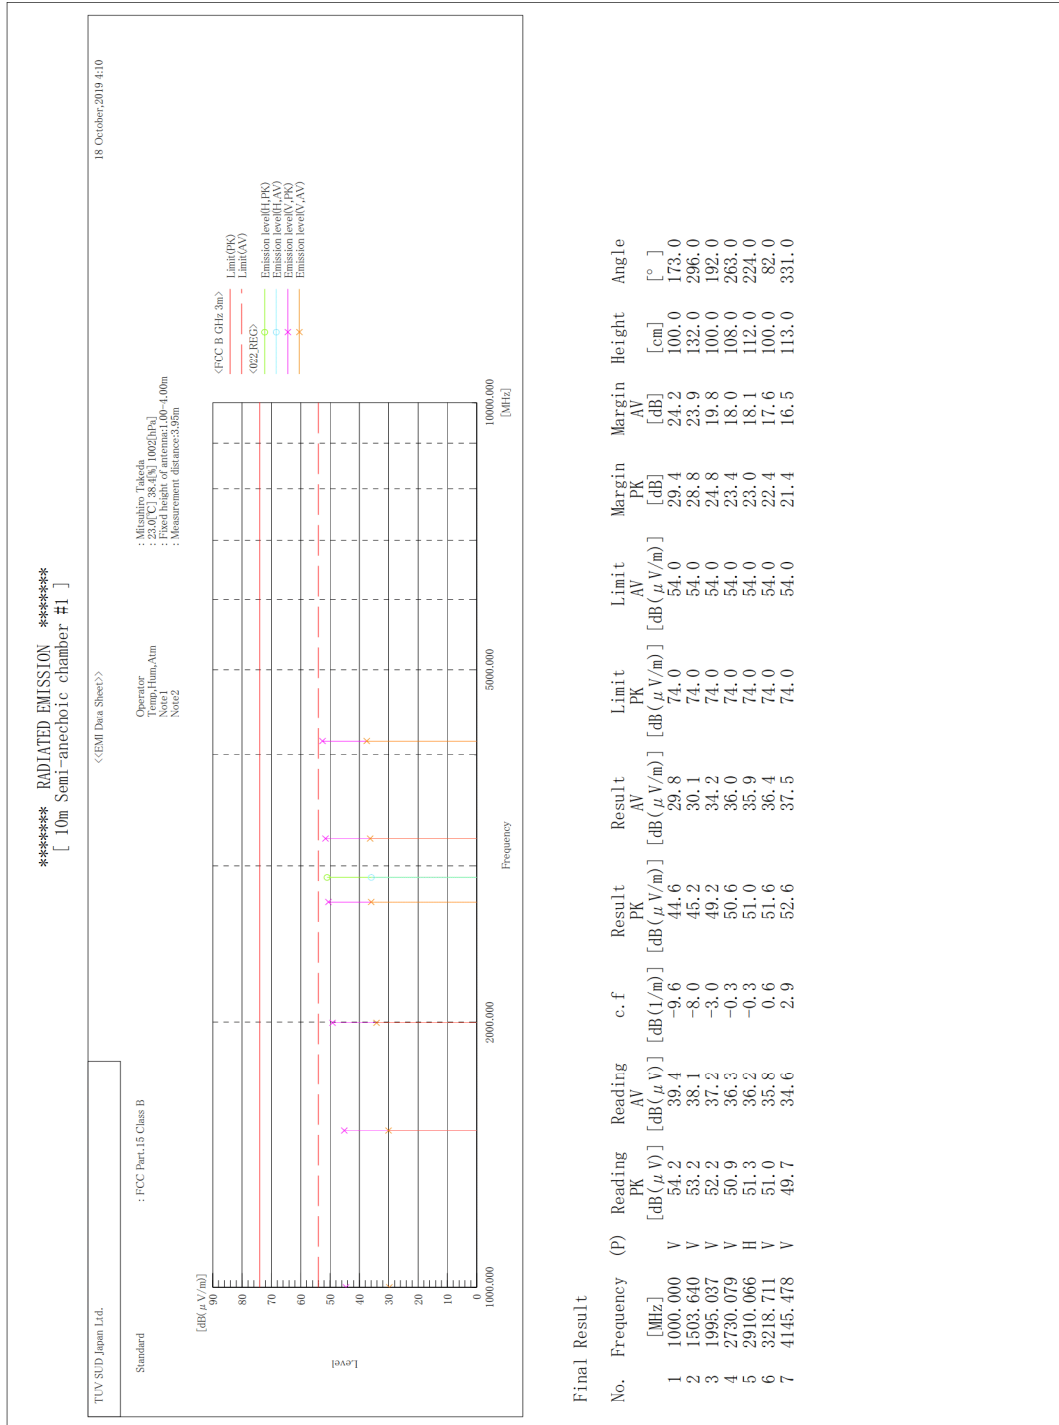



Operation mode	MP4 with ADP mode
EUT	CB70, S/N: 35860710005064 - Modification State 0


Date of test: 16-October-2019 Supply voltage: AC 120 V Supply frequency: 60 Hz

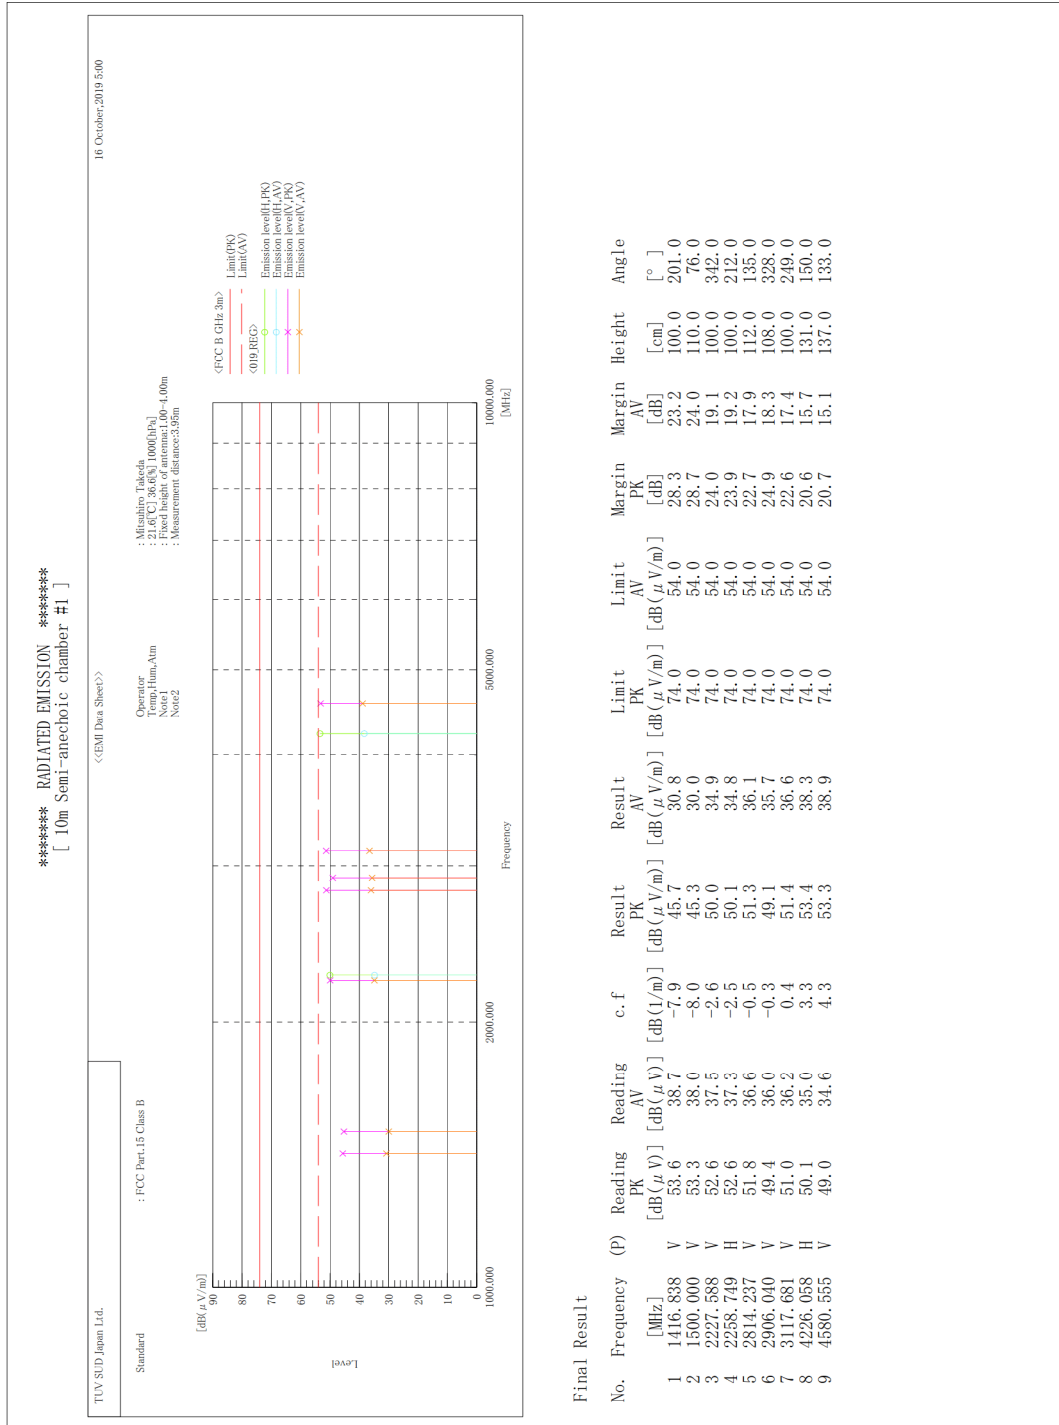




Operation mode	USB Read with PC mode
EUT	CB70, S/N: 35860710005064 - Modification State 0

Date of test: 16-October-2019 Supply voltage: AC 120 V Supply frequency: 60 Hz

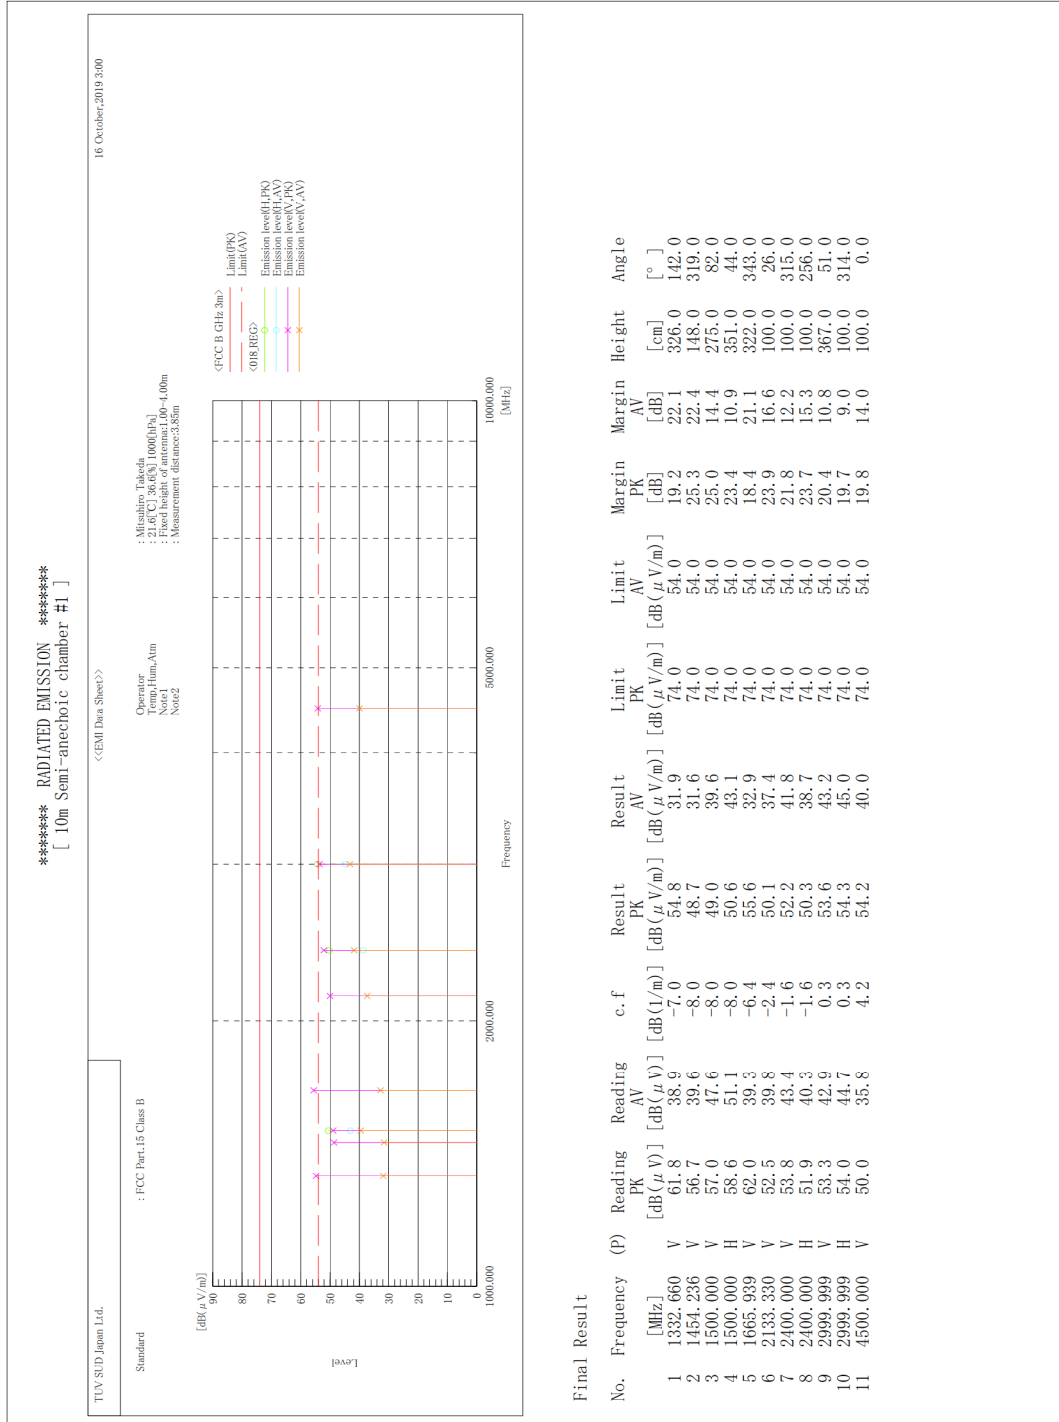

Operation mode	Charge with Cradle and ADP mode
EUT	CB70, S/N: 358607100033919 - Modification State 0

Date of test: 12-November-2019 Supply voltage: AC 120 V Supply frequency: 60 Hz

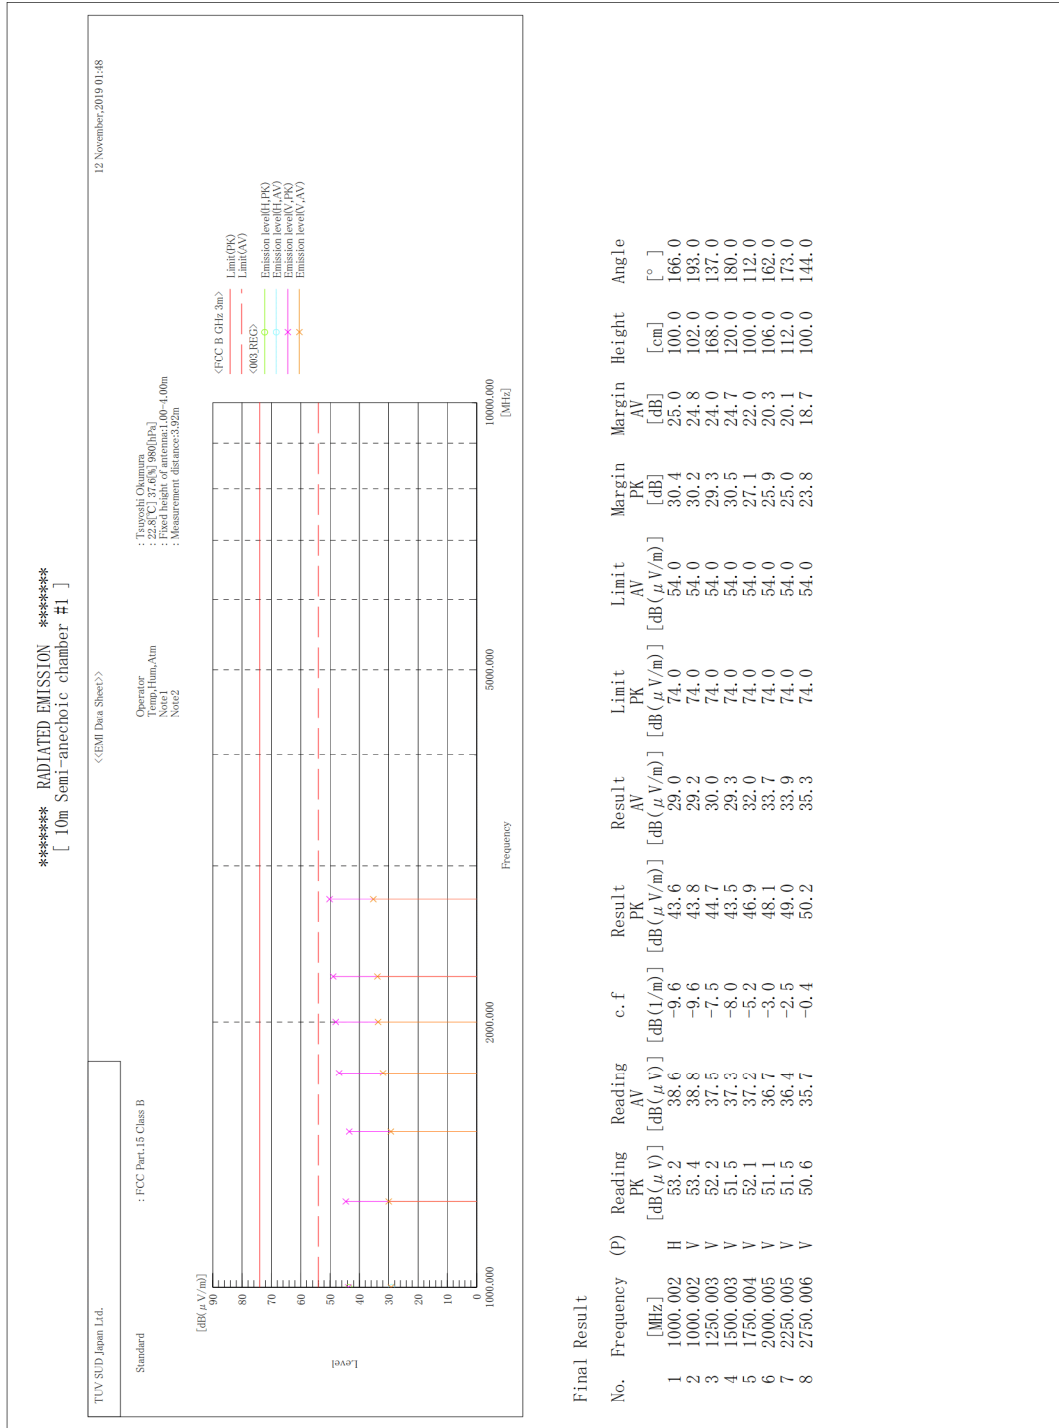

5 Measurement Uncertainty

The reported measurement uncertainty is based on a value obtained by multiplying standard uncertainty by coverage factor of $k=2$, and a level of confidence becomes 95 %.

Item	Parameter	U_{lab}	U_{cispr}
Conducted Emission, AMN	9kHz to 150kHz	± 3.8 dB	± 3.8 dB
Conducted Emission, AMN	150kHz to 30MHz	± 3.4 dB	± 3.4 dB
Conducted Emission, AN	150kHz to 30MHz	± 4.3 dB	-
Conducted Emission, Voltage Probe	9kHz to 30MHz	± 2.8 dB	± 2.9 dB
Conducted Emission, AAN	150kHz to 30MHz	± 4.9 dB	± 5.0 dB
Conducted Emission, Current Probe	150kHz to 30MHz	± 2.9 dB	± 2.9 dB
Disturbance Power	30MHz to 300MHz	± 4.3 dB	± 4.5 dB
Radiated Emission	30MHz to 1000MHz	± 4.9 dB	± 6.3 dB
Radiated Emission	1GHz to 6GHz	± 4.6 dB	± 5.2 dB
Radiated Emission	6GHz to 18GHz	± 4.9 dB	± 5.5 dB
Radiated Emission	9kHz to 30MHz	± 3.3 dB	-



Japan

6 Laboratory Information

Testing was performed and the report was issued at:

TÜV SÜD Japan Ltd. Yonezawa Testing Center

Address: 5-4149-7 Hachimanpara, Yonezawa-shi, Yamagata, 992-1128 Japan

Phone: +81-238-28-2881

Fax: +81-238-28-2888

Accreditation and Registration

VLAC

Accreditation No.: VLAC-013

BSMI

Laboratory Code: SL2-IN-E-6018, SL2-A1-E-6018

VCCI Council

Registration number	Expiration date
A-0166	03-July-2021

Appendix A. Test Equipment

Conducted emission at mains port

Equipment	Company	Model No.	Serial No.	Cal. due	Cal. Date
EMI receiver	ROHDE&SCHWARZ	ESR7	101742	31-Jan-2020	25-Jan-2019
Line impedance stabilization network for EUT	Kyoritsu Technology Corporation	TNW-407F2	12-17-110-2	31-May-2020	16-May-2019
Attenuator	HUBER+SUHNER	6810.01.A	N/A(S442)	31-Dec-2019	17-Dec-2018
Coaxial cable	FUJIKURA	5D-2W/4m	N/A(S349)	31-Oct-2020	02-Oct-2019
Microwave cable	HUBER+SUHNER	SUCOFLEX104/2m	317672/4	31-Oct-2020	02-Oct-2019
Coaxial cable	HUBER+SUHNER	RG214/U/25m	N/A(S191)	31-Oct-2020	02-Oct-2019
PC	HP	dc7800small	JPA7450FPJ	N/A	N/A
Software	TOYO Corporation	EP5/CE-AJ	0611193/V5.4.11	N/A	N/A

Radiated emission (below 1 GHz)

Other than Charge with Cradle and ADP mode

Equipment	Company	Model No.	Serial No.	Cal. due	Cal. date
EMI receiver	ROHDE&SCHWARZ	ESR7	101742	31-Jan-2020	25-Jan-2019
Biconical antenna	Schwarzbeck	VHA9103/BBA9106	VHA91032850	31-Oct-2019	17-Oct-2018
Log-periodic antenna	Schwarzbeck	VUSLP9111B	343	30-Apr-2020	08-Apr-2019
Attenuator	TDC	TAT-43B-06	N/A(S209)	31-Jul-2020	17-Jul-2019
Attenuator	TAMAGAWA.ELEC	CFA-01NPJ-3	N/A(S270)	31-May-2020	17-May-2019
Microwave cable	HUBER+SUHNER	SUCOFLEX104/9m	MY23758/4	31-Oct-2020	02-Oct-2019
Microwave cable	HUBER+SUHNER	SUCOFLEX104/1m	MY24628/4	31-Oct-2020	02-Oct-2019
Microwave cable	HUBER+SUHNER	SUCOFLEX104/2m	SN MY28398/4	31-Oct-2020	02-Oct-2019
Microwave cable	HUBER+SUHNER	SUCOFLEX106/12m	41624/6	31-Oct-2020	02-Oct-2019
Preamplifier	ANRITSU	MH648A	M96057	31-Jan-2020	17-Jan-2019
10m Semi-anechoic Chamber	TOKIN	N/A	N/A(9001-NSA10m)	31-Oct-2019	12-Oct-2018
PC	HP	dc7800small	JPA7450FPJ	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V5.6.0	N/A	N/A

Radiated emission (below 1 GHz)

Charge with Cradle and ADP mode

Equipment	Company	Model No.	Serial No.	Cal. due	Cal. date
EMI receiver	ROHDE&SCHWARZ	ESR7	101742	31-Jan-2020	25-Jan-2019
Biconical antenna	Schwarzbeck	VHA9103/BBA9106	VHA91032851	30-Sep-2020	25-Sep-2019
Log-periodic antenna	Schwarzbeck	VUSLP9111B	343	30-Apr-2020	08-Apr-2019
Attenuator	TDC	TAT-43B-06	N/A(S209)	31-Jul-2020	17-Jul-2019
Attenuator	TAMAGAWA.ELEC	CFA-01NPJ-3	N/A(S270)	31-May-2020	17-May-2019
Microwave cable	HUBER+SUHNER	SUCOFLEX104/9m	MY23758/4	31-Oct-2020	02-Oct-2019
Microwave cable	HUBER+SUHNER	SUCOFLEX104/1m	MY24628/4	31-Oct-2020	02-Oct-2019
Microwave cable	HUBER+SUHNER	SUCOFLEX104/2m	SN MY28398/4	31-Oct-2020	02-Oct-2019
Microwave cable	HUBER+SUHNER	SUCOFLEX106/13m	MY1159/6	31-Oct-2020	02-Oct-2019
Preamplifier	ANRITSU	MH648A	M96057	31-Jan-2020	17-Jan-2019
10m Semi-anechoic Chamber	TOKIN	N/A	N/A(9001-NSA3m)	31-Oct-2020	03-Oct-2019
PC	HP	dc7800small	JPA7450FPJ	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V5.6.0	N/A	N/A

**Radiated emission (above 1 GHz)
Other than Charge with Cradle and ADP mode**

Equipment	Company	Model No.	Serial No.	Cal. due	Cal. date
EMI receiver	ROHDE&SCHWARZ	ESR7	101742	31-Jan-2020	25-Jan-2019
Preamplifier	TSJ	MLA-0118-J02-40	14882	31-Oct-2020	01-Oct-2019
Double ridged guide antenna	ETS LINDGREN	3117	00209352	30-Nov-2019	06-Nov-2018
Attenuator	Agilent Technologies	8491B	MY39268632	31-May-2020	17-May-2019
Microwave cable	HUBER+SUHNER	SUCOFLEX104/9m	800693/4	31-May-2020	16-May-2019
Microwave cable	HUBER+SUHNER	SUCOFLEX104/1.5m	SN MY19304/4	31-Oct-2020	02-Oct-2019
Microwave cable	HUBER+SUHNER	SUCOFLEX104/2m	SN MY28398/4	31-Oct-2020	02-Oct-2019
Microwave cable	HUBER+SUHNER	SUCOFLEX106/13m	MY1159/6	31-Oct-2020	02-Oct-2019
Absorber	RIKEN	PFP30	N/A	N/A	N/A
10m Semi-anechoic Chamber	TOKIN	N/A	N/A(9001-SVSWR)	31-Oct-2020	04-Oct-2019
PC	HP	dc7800small	JPA7450FPJ	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V5.6.0	N/A	N/A

**Radiated emission (above 1 GHz)
Charge with Cradle and ADP mode**

Equipment	Company	Model No.	Serial No.	Cal. due	Cal. date
EMI receiver	ROHDE&SCHWARZ	ESR7	101742	31-Jan-2020	25-Jan-2019
Preamplifier	TSJ	MLA-0118-J02-40	14882	31-Oct-2020	01-Oct-2019
Double ridged guide antenna	ETS LINDGREN	3117	00209352	30-Nov-2019	06-Nov-2018
Attenuator	Agilent Technologies	8491B	MY39268632	31-May-2020	17-May-2019
Microwave cable	HUBER+SUHNER	SUCOFLEX104/9m	800693/4	31-May-2020	16-May-2019
Microwave cable	HUBER+SUHNER	SUCOFLEX104/1.5m	SN MY19304/4	31-Oct-2020	02-Oct-2019
Microwave cable	HUBER+SUHNER	SUCOFLEX104/2m	SN MY28398/4	31-Oct-2020	02-Oct-2019
Microwave cable	HUBER+SUHNER	SUCOFLEX106/13m	MY1159/6	31-Oct-2020	02-Oct-2019
Absorber	RIKEN	PFP30	N/A	N/A	N/A
10m Semi-anechoic Chamber	TOKIN	N/A	N/A(9001-SVSWR)	31-Oct-2020	04-Oct-2019
PC	HP	dc7800small	JPA7450FPJ	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V5.6.0	N/A	N/A