

FCC Test Report

(PART 27_Spot Check)

Report No.: RFBHAA-WTW-P21040941-2

FCC ID: JOYCW1011

Test Model: AL-T51A2-2

Series Model: AL-T52V1, AL-T51A2-1 (refer to item 3.1 for more details)

Received Date: Apr. 25, 2021

Test Date: Apr. 29 ~ May 02, 2021

Issued Date: May 10, 2021

Applicant: Kyocera Corporation

Address: 2-1-1 Kagahara, Tsuzuki-ku Yokohama-city Kanagawa 224-8502 Japan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results.....	5
2.1 Measurement Uncertainty.....	6
2.2 Test Site and Instruments	7
3 General Information	7
3.1 General Description of EUT	8
3.2 Configuration of System under Test.....	10
3.2.1 Description of Support Units	10
3.3 Test Mode Applicability and Tested Channel Detail	12
3.4 EUT Operating Conditions	13
3.5 General Description of Applied Standards and references.....	13
4 Test Types and Results	14
4.1 Output Power Measurement.....	14
4.1.1 Limits of Output Power Measurement	14
4.1.2 Test Procedures.....	14
4.1.3 Test Setup.....	15
4.1.4 Test Results	16
4.2 Radiated Emission Measurement.....	24
4.2.1 Limits of Radiated Emission Measurement	24
4.2.2 Test Procedure	24
4.2.3 Deviation from Test Standard	24
4.2.4 Test Setup.....	25
4.2.5 Test Results	26
5 Pictures of Test Arrangements.....	34
Appendix – Information of the Testing Laboratories	35

Release Control Record

Issue No.	Description	Date Issued
RFBHAA-WTW-P21040941-2	Original Release	May 10, 2021

1 Certificate of Conformity

Product: Telematics Module

Brand: Kyocera

Test Model: AL-T51A2-2

Series Model: AL-T52V1, AL-T51A2-1 (refer to item 3.1 for more details)

Sample Status: Engineering Sample

Applicant: Kyocera Corporation

Test Date: Apr. 29 ~ May 02, 2021

Standards: FCC Part 27, Subpart C, H, L

This report is issued as a supplementary report of RFBHAA-WTW-P20070391-2. This report shall be used combined together with its original report.

Prepared by : Gina Liu, **Date:** May 10, 2021

Gina Liu / Specialist

Approved by : Dylan Chiou, **Date:** May 10, 2021

Dylan Chiou / Senior Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 27 & Part 2 (WCDMA Band 4)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(d)(4)	Equivalent Isotropic Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	N/A	Refer to Note 1
2.1055 27.54	Frequency Stability	N/A	Refer to Note 1
2.1049	Occupied Bandwidth	N/A	Refer to Note 1
27.50(d)(5)	Peak to Average Ratio	N/A	Refer to Note 1
27.53(h)	Band Edge Measurements	N/A	Refer to Note 1
2.1051 27.53(h)	Conducted Spurious Emissions	N/A	Refer to Note 1
2.1053 27.53(h)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -40.5 dB at 3424.80 MHz.

Applied Standard: FCC Part 27 & Part 2 (LTE Band 4)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(d)(4)	Equivalent Isotropic Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	N/A	Refer to Note 1
2.1055 27.54	Frequency Stability	N/A	Refer to Note 1
2.1049	Occupied Bandwidth	N/A	Refer to Note 1
27.50(d)(5)	Peak to Average Ratio	N/A	Refer to Note 1
27.53(h)	Band Edge Measurements	N/A	Refer to Note 1
2.1051 27.53(h)	Conducted Spurious Emissions	N/A	Refer to Note 1
2.1053 27.53(h)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -40.0 dB at 3500.00 MHz.

Applied Standard: FCC Part 27 & Part 2 (LTE Band 12)

FCC Clause	Test Item	Result	Remarks
2.1046 27.50(c)(10)	Effective Isotropic Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	N/A	Refer to Note 1
2.1055 27.54	Frequency Stability	N/A	Refer to Note 1
2.1049	Occupied Bandwidth	N/A	Refer to Note 1
---	Peak to Average Ratio	N/A	Refer to Note 1
27.53(g)	Band Edge Measurements	N/A	Refer to Note 1
2.1051 27.53(g)	Conducted Spurious Emissions	N/A	Refer to Note 1
2.1053 27.53(g)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -32.3 dB at 1430.60 MHz.

N/A: Not Applicable

Note:

1. The equivalent isotropic radiated power and radiated spurious emissions test items are performed for the addendum, according to the worst case of the original report. Refer to original report for the other test data.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	3.59 dB
	200 MHz ~ 1000 MHz	3.60 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.29 dB
	18 GHz ~ 40 GHz	2.29 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver KEYSIGHT	N9038A	MY55420137	Apr. 09, 2021	Apr. 08, 2022
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Jun. 12, 2020	Jun. 11, 2021
Spectrum Analyzer KEYSIGHT	N9030B	MY57140953	Jul. 02, 2020	Jul. 01, 2021
MXG Vector signal generator Agilent	N5182B	MY53050162	Jan. 11, 2021	Jan. 10, 2022
Radio Communication Analyzer Anritsu	MT8820C	6201300640	Aug. 19, 2019	Aug. 18, 2021
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Nov. 06, 2020	Nov. 05, 2021
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-1169	Nov. 22, 2020	Nov. 21, 2021
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Nov. 06, 2020	Nov. 05, 2021
Loop Antenna TESEQ	HLA 6121	45745	Jul. 06, 2020	Jul. 05, 2021
Preamplifier Agilent (Below 1GHz)	8447D	2944A10638	Jun. 08, 2020	Jun. 07, 2021
Preamplifier Agilent (Above 1GHz)	8449B	3008A02367	Feb. 17, 2021	Feb. 16, 2022
RF signal cable HUBER+SUHNER&EMCI	SUCOFLEX 104 & EMC104-SM-SM800 0	CABLE-CH9-02 (248780+171006)	Jan. 16, 2021	Jan. 15, 2022
RF signal cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-(2507 95/4)	Jan. 16, 2021	Jan. 15, 2022
RF signal cable Woken	8D-FB	Cable-CH9-01	Jun. 08, 2020	Jun. 07, 2021
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021703	NA	NA
Turn Table BV ADT	TT100	TT93021703	NA	NA
Turn Table Controller BV ADT	SC100	SC93021703	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Pre-amplifier (18GHz-40GHz) EMC	EMC184045B	980175	Sep. 04, 2020	Sep. 03, 2021
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Chamber 9.

3 General Information

3.1 General Description of EUT

Product	Telematics Module	
Brand	Kyocera	
Test Model	AL-T51A2-2	
Series Model	AL-T52V1, AL-T51A2-1	
Status of EUT	Engineering Sample	
Power Supply Rating	5Vdc	
Modulation Type	WCDMA	QPSK
	LTE	QPSK, 16QAM
Frequency Range	WCDMA Band 4	1712.4 ~ 1752.6 MHz
	LTE Band 4 (Channel Bandwidth: 1.4 MHz)	1710.7 ~ 1754.3 MHz
	LTE Band 4 (Channel Bandwidth: 3 MHz)	1711.5 ~ 1753.5 MHz
	LTE Band 4 (Channel Bandwidth: 5 MHz)	1712.5 ~ 1752.5 MHz
	LTE Band 4 (Channel Bandwidth: 10 MHz)	1715.0 ~ 1750.0 MHz
	LTE Band 4 (Channel Bandwidth: 15 MHz)	1717.5 ~ 1747.5 MHz
	LTE Band 4 (Channel Bandwidth: 20 MHz)	1720.0 ~ 1745.0 MHz
	LTE Band 12 (Channel Bandwidth: 1.4 MHz)	699.7 ~ 715.3 MHz
	LTE Band 12 (Channel Bandwidth: 3 MHz)	700.5 ~ 714.5 MHz
	LTE Band 12 (Channel Bandwidth: 5 MHz)	701.5 ~ 713.5 MHz
	LTE Band 12 (Channel Bandwidth: 10 MHz)	704.0 ~ 711.0 MHz
Max. EIRP Power	WCDMA Band 4	60.256 mW (17.8dBm)
	LTE Band 4 (Channel Bandwidth: 1.4 MHz)	239.883 mW (23.8dBm)
	LTE Band 4 (Channel Bandwidth: 3 MHz)	251.189 mW (24.0dBm)
	LTE Band 4 (Channel Bandwidth: 5 MHz)	213.796 mW (23.3dBm)
	LTE Band 4 (Channel Bandwidth: 10 MHz)	223.872 mW (23.5dBm)
	LTE Band 4 (Channel Bandwidth: 15 MHz)	218.776 mW (23.4dBm)
	LTE Band 4 (Channel Bandwidth: 20 MHz)	234.423 mW (23.7dBm)
	LTE Band 12 (Channel Bandwidth: 1.4 MHz)	208.930 mW (23.2dBm)
	LTE Band 12 (Channel Bandwidth: 3 MHz)	173.780 mW (22.4dBm)
	LTE Band 12 (Channel Bandwidth: 5 MHz)	194.984 mW (22.9dBm)
LTE Band 12 (Channel Bandwidth: 10 MHz)	199.526 mW (23.0dBm)	
Antenna Type	Refer to Note as below	
Accessory Device	Refer to Note as below	
Data Cable Supplied	Refer to Note as below	

Note:

1. This report is a Spot Check Verification report. The differences compared with the original report (BV CPS report no.: RFBHAA-WTW-P20070391-2) are adding a model and changing ID & software & memory capacity. The effective radiated power and radiated spurious emissions test items are performed for the addendum, according to the worst case of the original report. Refer to original report for the other test data.
2. All models are listed as below. (New model is marked in boldface.)

Brand	Model	Difference
Kyocera	AL-T52V1	Support WCDMA Band 2, 4, 5 and LTE Band 2, 4, 12, 13, 26
	AL-T51A2-1	Support WCDMA Band 2, 4, 5 and LTE Band 2, 4, 12, 26
	AL-T51A2-2	Support band same with AL-T51A2-1, just different memory and driver software

3. The EUT uses following antennas (support units).

Antenna 1					
Antenna Type	AUX		Connector Type		SMA
Manufacturer	YOKOWO		Part Number		86769-459B1
Band	B12	B13	B5 / B26	B4	B2
Frequency (MHz)	704	782	832	1730	1880
Gain (dBi)	3.1	3.2	3.8	2.6	2.0

Antenna 2					
Antenna Type	AUX		Connector Type		SMA
Manufacturer	taoglas		Part Number		TG.30.8113
Band	B12 / B13	B5 / B26	B4	B2	
Frequency (MHz)	700-800	824-960	1710-1880	1850-1990	
Free Space Straight Gain (dBi)	1.1	0.3	1.9	2.7	
Free Space Bent Gain (dBi)	2.6	1.5	2.7	3.1	

Antenna 3					
Antenna Type	AUX		Connector Type		Inverted-F
Manufacturer	MinebeaMitsumi		Part Number		DN4E 66T30
Band	B12 / B13	B5 / B26	B4	B2	
Frequency (MHz)	700-800	824-960	1710-1880	1850-1990	
Gain (dBd)	-0.3	-0.3	0.4	0.4	
Gain (dBi)	1.85	1.85	2.55	2.55	

dBi = dBd + 2.15

Antenna 4					
Antenna Type	External		Connector Type		Inverted-F
Manufacturer	Mitsumi Electric		Part Number		KJK966 T30
Band	B12 / B13	B5 / B26	B4	B2	
Frequency (MHz)	700-800	824-960	1710-1880	1850-1990	
Gain (dBi)	1.0	1.0	0.4	0.4	

Antenna 5					
Antenna Type	External		Connector Type		Inverted-F
Manufacturer	HARADA INDUSTRY		Part Number		TD2K 66 T30
Band	B12 / B13	B5 / B26	B4	B2	
Frequency (MHz)	700-800	824-960	1710-1880	1850-1990	
Gain (dBi)	-2.1	-2.1	-1.2	-1.2	


For WCDMA Band 2 and LTE Band 2: Antenna 2 was chosen for final test according to manufacturer's requirement.

For WCDMA Band 4, 5 and LTE Band 4, 5, 12, 13, 26: Antenna 1 was chosen for final test according to manufacturer's requirement.

4. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible

3.2 Configuration of System under Test


Antenna 1

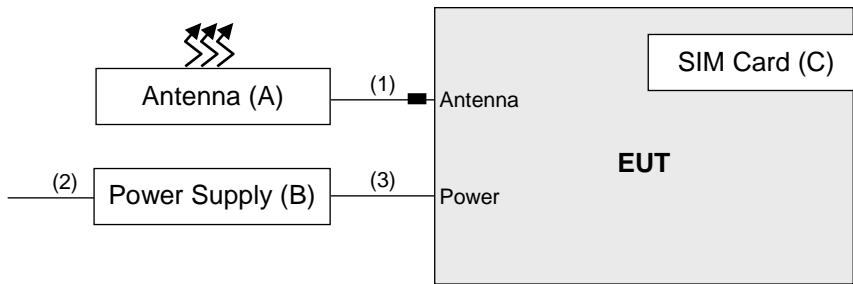

Remote site



Antenna 2

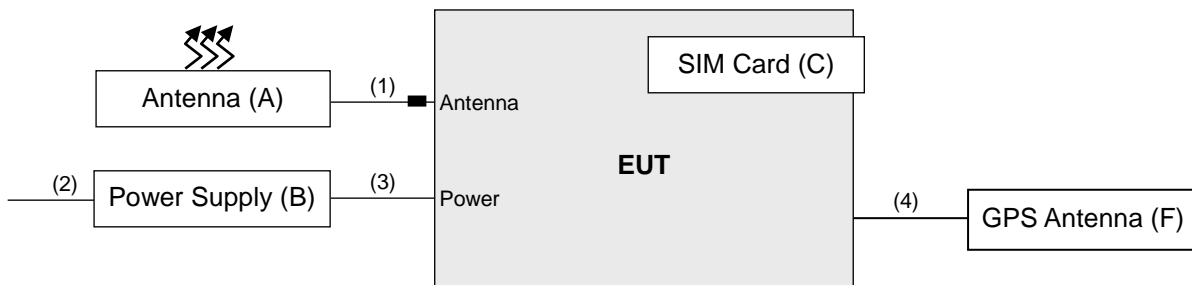

Remote site



3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Antenna	taoglas	TG.30.8113	NA	NA	Provided by manufacturer
B.	Power Supply	Inspower	DC400-20D	212004	FCC DoC Approved	Provided by manufacturer Input:100-240Vac, 0.4A, 50-60Hz Output: 5Vdc, 3A
C.	SIM Card	NA	NA	NA	NA	Provided by manufacturer
D.	Radio Communication Tester	R&S	CMU200	123112	NA	-
E.	Radio Communication Analyzer	Anritsu	MT8820C	6201300640	NA	-
F.	GPS Antenna	N/A	N/A	N/A	N/A	-

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item D and E acted as a communication partners to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	Antenna	1	3	N	1	Provided by manufacturer
2.	Power	1	1.75	N	0	Provided by manufacturer
3.	Module cable	2	0.08	N	0	Attached on EUT
4.	GPS Antenna	1	1.5	Y	0	-

Note: The core(s) is(are) originally attached to the cable(s).

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on X-plane for WCDMA and Z-plane for LTE. Following channel(s) was (were) selected for the final test as listed below.

WCDMA Band 4

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	EIRP	1312 to 1513	1312 (1712.4MHz), 1413 (1732.6MHz), 1513 (1752.6MHz)	WCDMA
-	Radiated Emission	1312 to 1513	1312 (1712.4MHz)	WCDMA

LTE Band 4

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	19957 to 20393	19957 (1710.7MHz), 20175 (1732.5MHz), 20175 (1732.5MHz)	1.4MHz	QPSK	1 RB / 0 RB Offset
		19965 to 20385	19965 (1711.5MHz), 20175 (1732.5MHz), 20385 (1753.5MHz)	3MHz	QPSK	1 RB / 0 RB Offset
		19975 to 20375	19975 (1712.5MHz), 20175 (1732.5MHz), 20375 (1752.5MHz)	5MHz	QPSK	1 RB / 0 RB Offset
		20000 to 20350	20000 (1715.0MHz), 20175 (1732.5MHz), 20350 (1750.0MHz)	10MHz	QPSK	1 RB / 0 RB Offset
		20025 to 20325	20025 (1717.5MHz), 20175 (1732.5MHz), 20325 (1747.5MHz)	15MHz	QPSK	1 RB / 0 RB Offset
		20050 to 20300	20050 (1720.0MHz), 20175 (1732.5MHz), 20300 (1745.0MHz)	20MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	20000 to 20350	20350 (1750.0MHz)	10MHz	QPSK	1 RB / 0 RB Offset

LTE Band 12

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	23017 to 23171	23017 (699.7MHz), 23095 (707.5MHz), 23173 (715.3MHz)	1.4MHz	QPSK	1 RB / 0 RB Offset
		23025 to 23165	23025 (700.5MHz), 23095 (707.5MHz), 23165 (714.5MHz)	3MHz	QPSK	1 RB / 0 RB Offset
		23035 to 23155	23035 (701.5MHz), 23095 (707.5MHz), 23155 (713.5MHz)	5MHz	QPSK	1 RB / 0 RB Offset
		23060 to 23130	23060 (704.0MHz), 23095 (707.5MHz), 23130 (711.0MHz)	10MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	23017 to 23173	23173 (715.3MHz)	1.4 MHz	QPSK	1 RB / 0 RB Offset

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
EIRP	25deg. C, 70%RH	120Vac, 60Hz	Jones Chang
Radiated Emission	25deg. C, 70%RH 22deg. C, 68%RH	120Vac, 60Hz	Luis Lee, Jones Chang

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

ANSI 63.26-2015

Note: All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-E 2016

Note: All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

Portable stations (hand-held device) operating in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

4.1.2 Test Procedures


EIRP / ERP Measurement:

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 5 MHz for WCDMA and 20 MHz for LTE mode, and $VBW \geq 3 \times RBW$.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step b. Record the power level of S.G.
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15 \text{ dB}$.


4.1.3 Test Setup

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

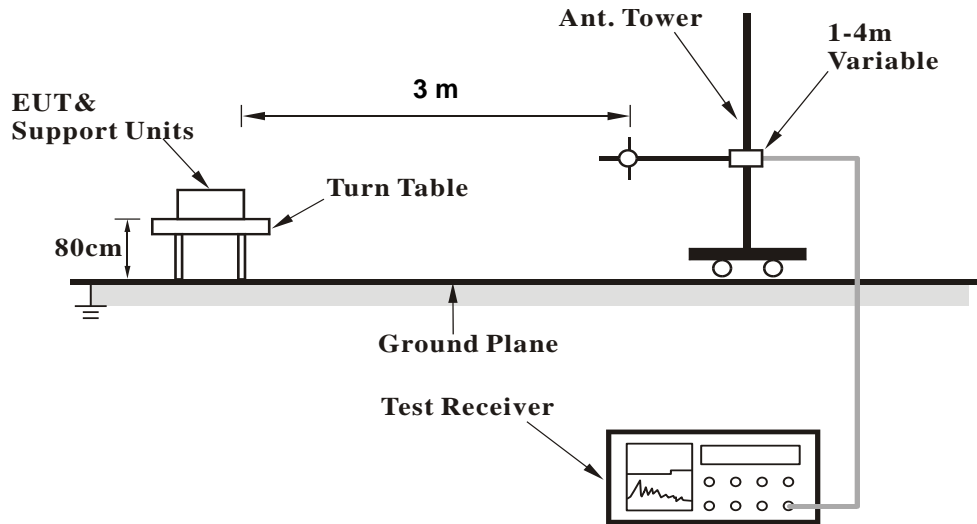

<Radiated Emission above 1 GHz>

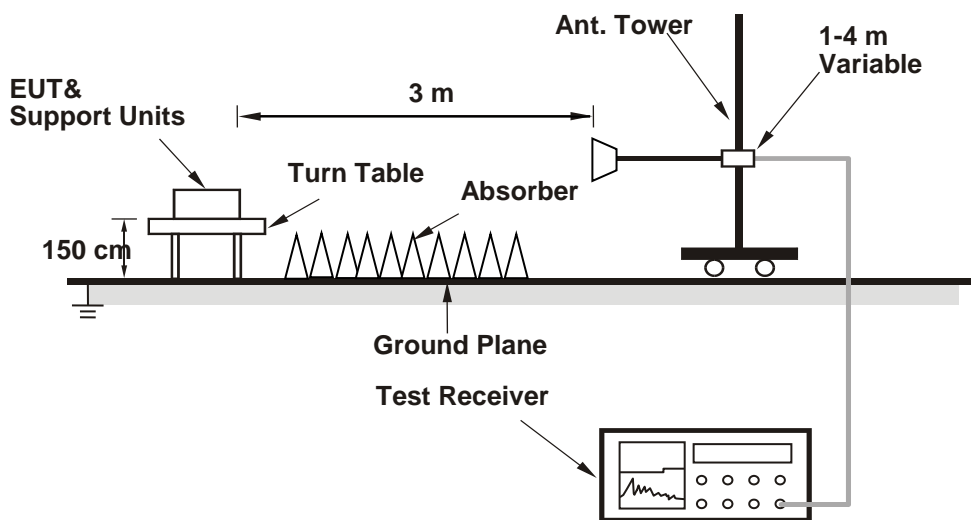

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.4 Test Results

WCDMA Band IV

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
1312	1712.40 (PK)	-25.0	13.5	1.0	14.5	30.0	-15.5
1413	1732.60 (PK)	-26.7	12.0	1.0	13.0	30.0	-17.0
1513	1752.60 (PK)	-27.0	11.8	1.1	12.9	30.0	-17.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
1312	1712.40 (PK)	-22.4	16.8	1.0	17.8	30.0	-12.2
1413	1732.60 (PK)	-22.8	16.4	1.0	17.4	30.0	-12.6
1513	1752.60 (PK)	-22.7	16.4	1.1	17.5	30.0	-12.5

NOTE: Power Value(dBm) = S.G Power Value(dBm) + Correction Factor(dB)

QPSK

LTE Band 4, Channel Bandwidth 1.4MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
19957	1710.70 (PK)	-15.8	22.7	1.0	23.7	30.0	-6.3
20175	1732.50 (PK)	-16.3	22.4	1.0	23.4	30.0	-6.6
20393	1754.30 (PK)	-16.0	22.7	1.1	23.8	30.0	-6.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
19957	1710.70 (PK)	-24.5	14.7	1.0	15.7	30.0	-14.3
20175	1732.50 (PK)	-24.4	14.8	1.0	15.8	30.0	-14.2
20393	1754.30 (PK)	-24.2	14.9	1.1	16.0	30.0	-14.0

NOTE: Power Value(dBm) = S.G Power Value(dBm) + Correction Factor(dB)

LTE Band 4, Channel Bandwidth 3MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
19965	1711.50 (PK)	-15.5	23.0	1.0	24.0	30.0	-6.0
20175	1732.50 (PK)	-15.9	22.8	1.0	23.8	30.0	-6.2
20385	1753.50 (PK)	-16.4	22.4	1.1	23.5	30.0	-6.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
19965	1711.50 (PK)	-24.3	14.9	1.0	15.9	30.0	-14.1
20175	1732.50 (PK)	-25.0	14.2	1.0	15.2	30.0	-14.8
20385	1753.50 (PK)	-24.2	14.9	1.1	16.0	30.0	-14.0

NOTE: Power Value(dBm) = S.G Power Value(dBm) + Correction Factor(dB)

LTE Band 4, Channel Bandwidth 5MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
19975	1712.50 (PK)	-16.4	22.1	1.0	23.1	30.0	-6.9
20175	1732.50 (PK)	-16.7	22.0	1.0	23.0	30.0	-7.0
20375	1752.50 (PK)	-16.5	22.2	1.1	23.3	30.0	-6.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
19975	1712.50 (PK)	-25.3	13.9	1.0	14.9	30.0	-15.1
20175	1732.50 (PK)	-25.0	14.2	1.0	15.2	30.0	-14.8
20375	1752.50 (PK)	-24.8	14.3	1.1	15.4	30.0	-14.6

NOTE: Power Value(dBm) = S.G Power Value(dBm) + Correction Factor(dB)

LTE Band 4, Channel Bandwidth 10MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
20000	1715.00 (PK)	-16.0	22.5	1.0	23.5	30.0	-6.5
20175	1732.50 (PK)	-16.3	22.4	1.0	23.4	30.0	-6.6
20350	1750.00 (PK)	-16.5	22.2	1.1	23.3	30.0	-6.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
20000	1715.00 (PK)	-25.4	13.8	1.0	14.8	30.0	-15.2
20175	1732.50 (PK)	-25.2	14.0	1.0	15.0	30.0	-15.0
20350	1750.00 (PK)	-24.7	14.4	1.1	15.5	30.0	-14.5

NOTE: Power Value(dBm) = S.G Power Value(dBm) + Correction Factor(dB)

LTE Band 4, Channel Bandwidth 15MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
20025	1717.50 (PK)	-16.1	22.4	1.0	23.4	30.0	-6.6
20175	1732.50 (PK)	-16.5	22.2	1.0	23.2	30.0	-6.8
20325	1747.50 (PK)	-16.7	22.0	1.1	23.1	30.0	-6.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
20025	1717.50 (PK)	-25.0	14.2	1.0	15.2	30.0	-14.8
20175	1732.50 (PK)	-24.7	14.5	1.0	15.5	30.0	-14.5
20325	1747.50 (PK)	-25.0	14.1	1.1	15.2	30.0	-14.8

NOTE: Power Value(dBm) = S.G Power Value(dBm) + Correction Factor(dB)

LTE Band 4, Channel Bandwidth 20MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
20050	1720.00 (PK)	-16.4	22.1	1.0	23.1	30.0	-6.9
20175	1732.50 (PK)	-16.0	22.7	1.0	23.7	30.0	-6.3
20300	1747.50 (PK)	-16.6	22.1	1.1	23.2	30.0	-6.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
20050	1720.00 (PK)	-25.2	14.0	1.0	15.0	30.0	-15.0
20175	1732.50 (PK)	-24.7	14.5	1.0	15.5	30.0	-14.5
20300	1747.50 (PK)	-25.0	14.1	1.1	15.2	30.0	-14.8

NOTE: Power Value(dBm) = S.G Power Value(dBm) + Correction Factor(dB)

LTE Band 12, Channel Bandwidth 1.4MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
23017	699.70	-7.7	22.6	-0.5	22.1	34.8	-12.7
23095	707.50	-7.5	23.1	-0.5	22.6	34.8	-12.2
23173	715.30	-6.9	23.7	-0.5	23.2	34.8	-11.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
23017	699.70	-17.7	15.7	-0.5	15.2	34.8	-19.6
23095	707.50	-17.9	15.8	-0.5	15.3	34.8	-19.5
23173	715.30	-18.0	16.0	-0.5	15.5	34.8	-19.3

NOTE: Power Value(dBm) = S.G Power Value(dBm) + Correction Factor(dB)

LTE Band 12, Channel Bandwidth 3MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
23025	700.50	-8.1	22.3	-0.5	21.8	34.8	-13.0
23095	707.50	-8.1	22.5	-0.5	22.0	34.8	-12.8
23165	714.50	-7.6	22.9	-0.5	22.4	34.8	-12.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
23025	700.50	-17.9	15.5	-0.5	15.0	34.8	-19.8
23095	707.50	-17.9	15.8	-0.5	15.3	34.8	-19.5
23165	714.50	-17.8	16.1	-0.5	15.6	34.8	-19.2

NOTE: Power Value(dBm) = S.G Power Value(dBm) + Correction Factor(dB)

LTE Band 12, Channel Bandwidth 5MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
23035	701.50	-7.9	22.5	-0.5	22.0	34.8	-12.8
23095	707.50	-7.7	22.9	-0.5	22.4	34.8	-12.4
23155	713.50	-7.1	23.4	-0.5	22.9	34.8	-11.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
23035	701.50	-17.8	15.6	-0.5	15.1	34.8	-19.7
23095	707.50	-17.8	15.9	-0.5	15.4	34.8	-19.4
23155	713.50	-17.6	16.2	-0.5	15.7	34.8	-19.1

NOTE: Power Value(dBm) = S.G Power Value(dBm) + Correction Factor(dB)

LTE Band 12, Channel Bandwidth 10MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
23060	704.00	-8.0	22.7	-0.5	22.2	34.8	-12.6
23095	707.50	-7.6	23.0	-0.5	22.5	34.8	-12.3
23130	711.00	-6.9	23.5	-0.5	23.0	34.8	-11.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
23060	704.00	-17.9	15.8	-0.5	15.3	34.8	-19.5
23095	707.50	-17.8	15.9	-0.5	15.4	34.8	-19.4
23130	711.00	-17.7	16.0	-0.5	15.5	34.8	-19.3

NOTE: Power Value(dBm) = S.G Power Value(dBm) + Correction Factor(dB)

16QAM

LTE Band 4, Channel Bandwidth 1.4MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
19957	1710.70 (PK)	-16.8	21.7	1.0	22.7	30.0	-7.3
20175	1732.50 (PK)	-17.3	21.4	1.0	22.4	30.0	-7.6
20393	1754.30 (PK)	-17.2	21.5	1.1	22.6	30.0	-7.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
19957	1710.70 (PK)	-25.5	13.7	1.0	14.7	30.0	-15.3
20175	1732.50 (PK)	-25.4	13.8	1.0	14.8	30.0	-15.2
20393	1754.30 (PK)	-25.2	13.9	1.1	15.0	30.0	-15.0

NOTE: Power Value(dBm) = S.G Power Value(dBm) + Correction Factor(dB)

LTE Band 4, Channel Bandwidth 3MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
19965	1711.50 (PK)	-16.5	22.0	1.0	23.0	30.0	-7.0
20175	1732.50 (PK)	-16.9	21.8	1.0	22.8	30.0	-7.2
20385	1753.50 (PK)	-17.4	21.4	1.1	22.5	30.0	-7.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
19965	1711.50 (PK)	-25.3	13.9	1.0	14.9	30.0	-15.1
20175	1732.50 (PK)	-26.0	13.2	1.0	14.2	30.0	-15.8
20385	1753.50 (PK)	-25.2	13.9	1.1	15.0	30.0	-15.0

NOTE: Power Value(dBm) = S.G Power Value(dBm) + Correction Factor(dB)

LTE Band 4, Channel Bandwidth 5MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
19975	1712.50 (PK)	-17.4	21.1	1.0	22.1	30.0	-7.9
20175	1732.50 (PK)	-17.7	21.0	1.0	22.0	30.0	-8.0
20375	1752.50 (PK)	-17.5	21.2	1.1	22.3	30.0	-7.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
19975	1712.50 (PK)	-26.3	12.9	1.0	13.9	30.0	-16.1
20175	1732.50 (PK)	-26.0	13.2	1.0	14.2	30.0	-15.8
20375	1752.50 (PK)	-25.8	13.3	1.1	14.4	30.0	-15.6

NOTE: Power Value(dBm) = S.G Power Value(dBm) + Correction Factor(dB)

LTE Band 4, Channel Bandwidth 10MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
20000	1715.00 (PK)	-17.0	21.5	1.0	22.5	30.0	-7.5
20175	1732.50 (PK)	-17.3	21.4	1.0	22.4	30.0	-7.6
20350	1750.00 (PK)	-17.6	21.1	1.1	22.2	30.0	-7.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
20000	1715.00 (PK)	-26.4	12.8	1.0	13.8	30.0	-16.2
20175	1732.50 (PK)	-26.2	13.0	1.0	14.0	30.0	-16.0
20350	1750.00 (PK)	-25.8	13.3	1.1	14.4	30.0	-15.6

NOTE: Power Value(dBm) = S.G Power Value(dBm) + Correction Factor(dB)

LTE Band 4, Channel Bandwidth 15MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
20025	1717.50 (PK)	-17.1	21.4	1.0	22.4	30.0	-7.6
20175	1732.50 (PK)	-17.5	21.2	1.0	22.2	30.0	-7.8
20325	1747.50 (PK)	-17.7	21.0	1.1	22.1	30.0	-7.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
20025	1717.50 (PK)	-26.0	13.2	1.0	14.2	30.0	-15.8
20175	1732.50 (PK)	-25.7	13.5	1.0	14.5	30.0	-15.5
20325	1747.50 (PK)	-26.0	13.1	1.1	14.2	30.0	-15.8

NOTE: Power Value(dBm) = S.G Power Value(dBm) + Correction Factor(dB)

LTE Band 4, Channel Bandwidth 20MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
20050	1720.00 (PK)	-17.4	21.1	1.0	22.1	30.0	-7.9
20175	1732.50 (PK)	-17.0	21.7	1.0	22.7	30.0	-7.3
20300	1747.50 (PK)	-17.6	21.1	1.1	22.2	30.0	-7.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
20050	1720.00 (PK)	-26.2	13.0	1.0	14.0	30.0	-16.0
20175	1732.50 (PK)	-25.7	13.5	1.0	14.5	30.0	-15.5
20300	1747.50 (PK)	-26.0	13.1	1.1	14.2	30.0	-15.8

NOTE: Power Value(dBm) = S.G Power Value(dBm) + Correction Factor(dB)

LTE Band 12, Channel Bandwidth 1.4MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
23017	699.70	-8.8	21.5	-0.5	21.0	34.8	-13.8
23095	707.50	-8.5	22.1	-0.5	21.6	34.8	-13.2
23173	715.30	-7.9	22.7	-0.5	22.2	34.8	-12.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
23017	699.70	-18.7	14.7	-0.5	14.2	34.8	-20.6
23095	707.50	-18.9	14.8	-0.5	14.3	34.8	-20.5
23173	715.30	-19.0	15.0	-0.5	14.5	34.8	-20.3

NOTE: Power Value(dBm) = S.G Power Value(dBm) + Correction Factor(dB)

LTE Band 12, Channel Bandwidth 3MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
23025	700.50	-9.1	21.3	-0.5	20.8	34.8	-14.0
23095	707.50	-9.1	21.5	-0.5	21.0	34.8	-13.8
23165	714.50	-8.6	21.9	-0.5	21.4	34.8	-13.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
23025	700.50	-18.9	14.5	-0.5	14.0	34.8	-20.8
23095	707.50	-18.9	14.8	-0.5	14.3	34.8	-20.5
23165	714.50	-18.8	15.1	-0.5	14.6	34.8	-20.2

NOTE: Power Value(dBm) = S.G Power Value(dBm) + Correction Factor(dB)

LTE Band 12, Channel Bandwidth 5MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
23035	701.50	-8.9	21.5	-0.5	21.0	34.8	-13.8
23095	707.50	-8.7	21.9	-0.5	21.4	34.8	-13.4
23155	713.50	-8.1	22.4	-0.5	21.9	34.8	-12.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
23035	701.50	-18.8	14.6	-0.5	14.1	34.8	-20.7
23095	707.50	-18.8	14.9	-0.5	14.4	34.8	-20.4
23155	713.50	-18.6	15.2	-0.5	14.7	34.8	-20.1

NOTE: Power Value(dBm) = S.G Power Value(dBm) + Correction Factor(dB)

LTE Band 12, Channel Bandwidth 10MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
23060	704.00	-9.0	21.7	-0.5	21.2	34.8	-13.6
23095	707.50	-8.6	22.0	-0.5	21.5	34.8	-13.3
23130	711.00	-7.9	22.5	-0.5	22.0	34.8	-12.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
Channel	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
23060	704.00	-18.9	14.8	-0.5	14.3	34.8	-20.5
23095	707.50	-18.8	14.9	-0.5	14.4	34.8	-20.4
23130	711.00	-18.7	15.0	-0.5	14.5	34.8	-20.3

NOTE: Power Value(dBm) = S.G Power Value(dBm) + Correction Factor(dB)

4.2 Radiated Emission Measurement

4.2.1 Limits of Radiated Emission Measurement

- a. The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The limit of emission is equal to -13 dBm.

4.2.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- c. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15 \text{ dB}$.


Note: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

4.2.3 Deviation from Test Standard


No deviation.

4.2.4 Test Setup

<Radiated Emission below or equal 1 GHz>

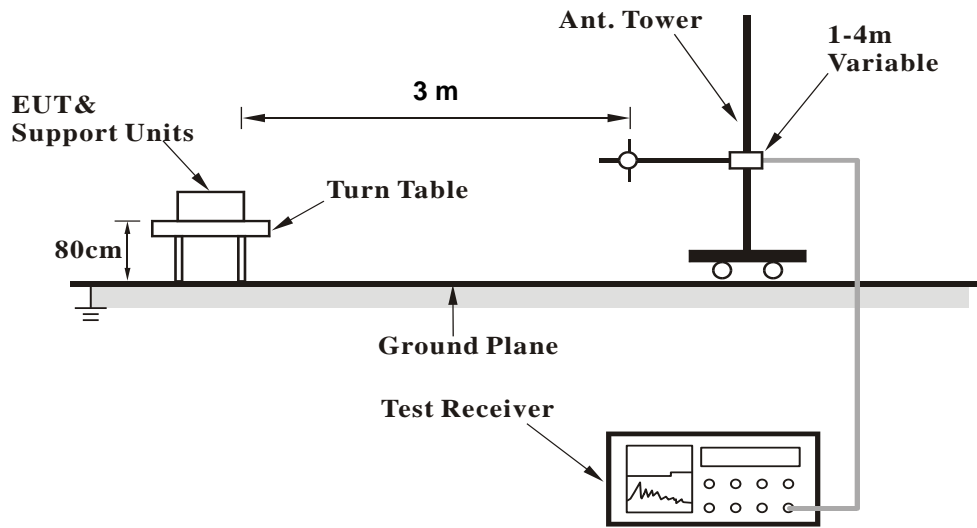

<Radiated Emission above 1 GHz>

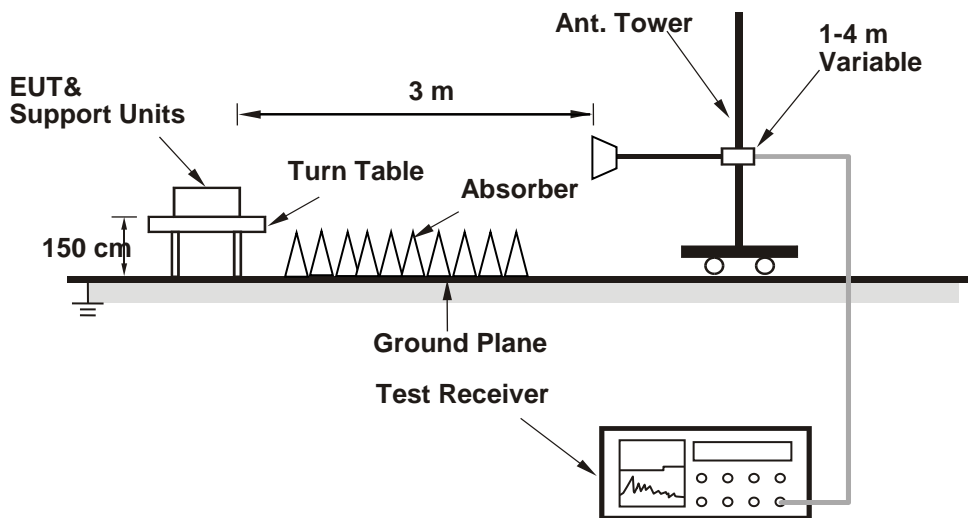

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.5 Test Results

BELOW 1GHz


WCDMA VI

Mode	TX channel 1312 (1712.4MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Luis Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
NO.	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
1	94.67	-50.4	-59.3	0.1	-59.2	-13.0	-46.2
2	138.25	-56.7	-61.5	-1.2	-62.7	-13.0	-49.7
3	190.26	-57.1	-68.7	3.1	-65.6	-13.0	-52.6
4	235.25	-62.1	-73.8	4.4	-69.4	-13.0	-56.4
5	297.10	-66.0	-73.0	4.2	-68.8	-13.0	-55.8
6	502.35	-68.1	-72.0	3.8	-68.2	-13.0	-55.2

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

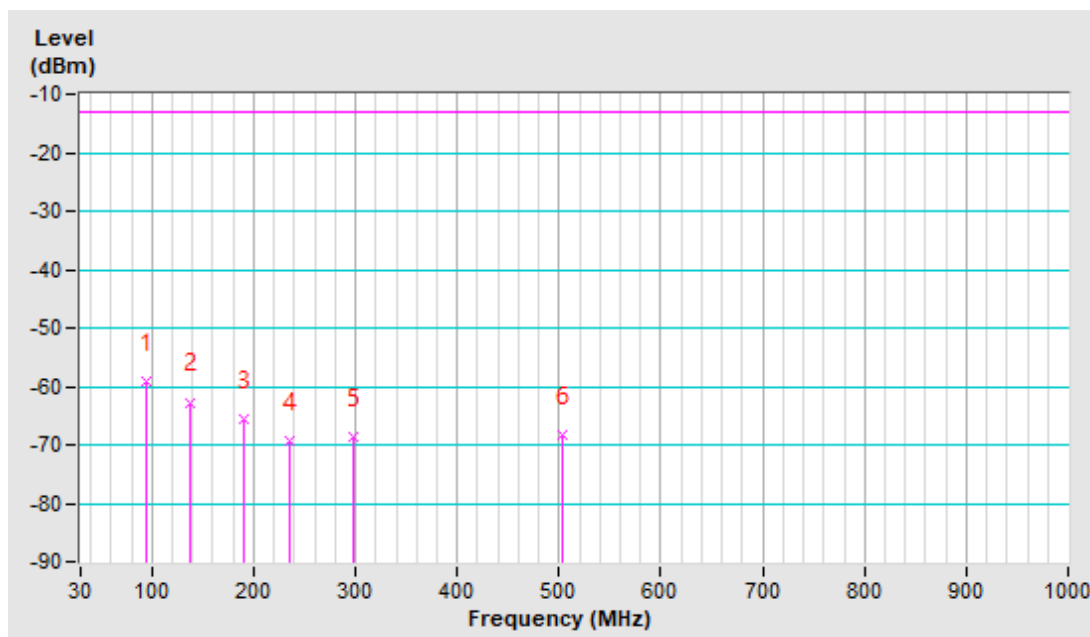


Mode	TX channel 1312 (1712.4MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Luis Lee		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
1	91.86	-55.8	-62.9	0.3	-62.6	-13.0	-49.6
2	156.52	-65.0	-67.1	-0.7	-67.8	-13.0	-54.8
3	246.49	-69.3	-74.7	4.4	-70.3	-13.0	-57.3
4	353.33	-71.6	-76.1	4.1	-72.0	-13.0	-59.0
5	384.26	-63.0	-67.6	4.2	-63.4	-13.0	-50.4
6	568.42	-69.2	-71.0	3.5	-67.5	-13.0	-54.5

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

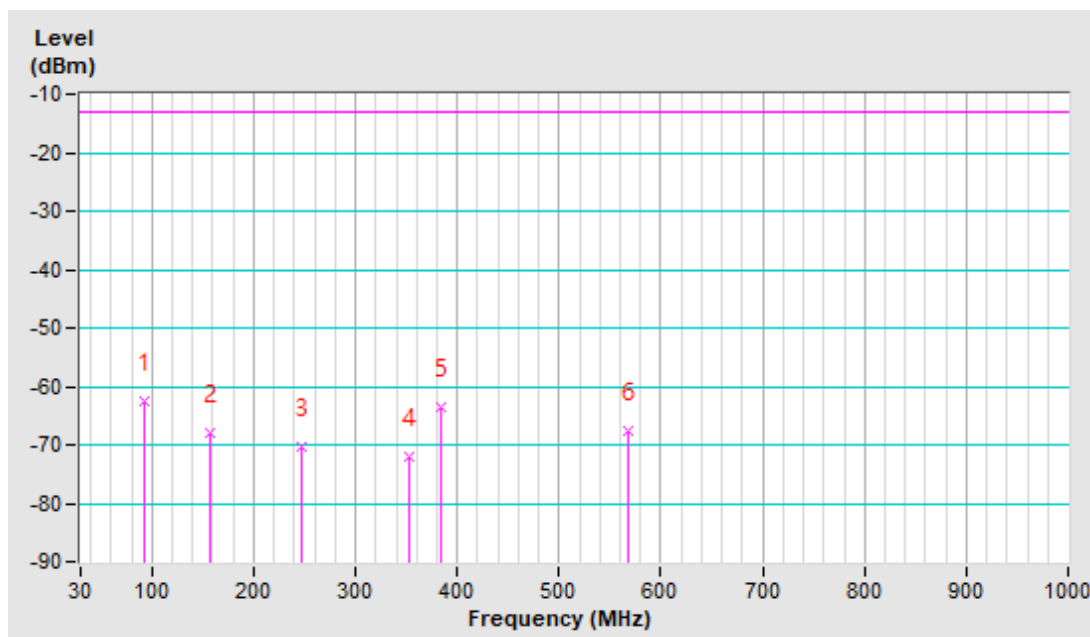

LTE BAND 4, CHANNEL BANDWIDTH: 10MHz


Mode	TX channel 20350 (1750MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Luis Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
1	93.26	-51.5	-60.3	0.2	-60.1	-13.0	-47.1
2	167.77	-62.4	-69.4	0.3	-69.1	-13.0	-56.1
3	194.48	-55.7	-68.0	3.8	-64.2	-13.0	-51.2
4	249.30	-63.5	-74.4	4.4	-70.0	-13.0	-57.0
5	323.81	-68.2	-76.4	4.3	-72.1	-13.0	-59.1
6	510.78	-68.2	-72.0	3.8	-68.2	-13.0	-55.2

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

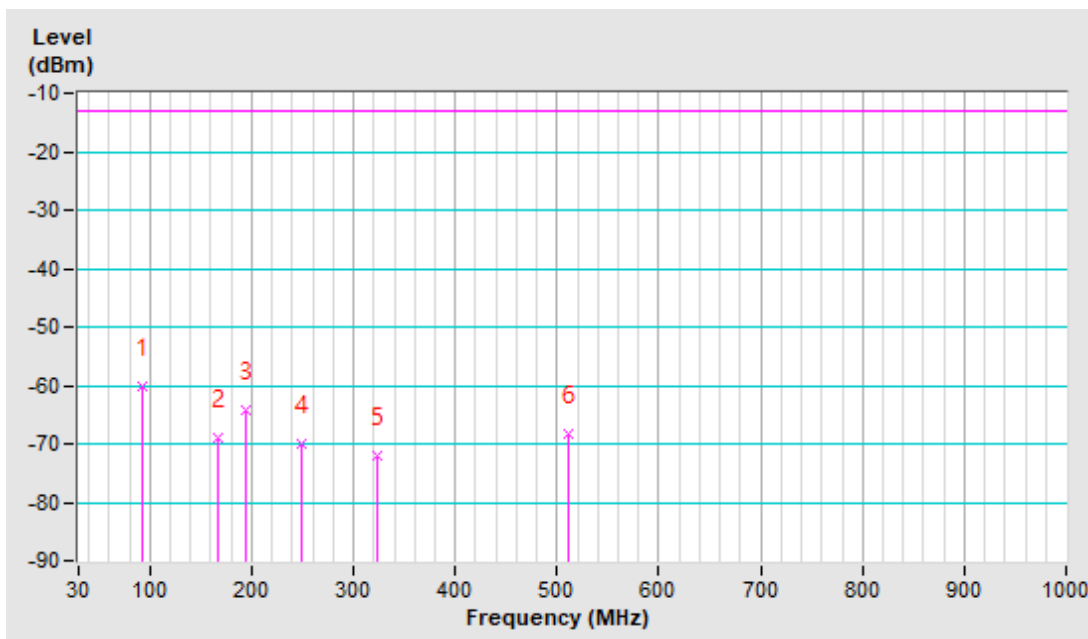


Mode	TX channel 20350 (1750MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Luis Lee		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
1	128.41	-51.6	-55.9	-1.1	-57.0	-13.0	-44.0
2	235.25	-69.1	-75.7	4.4	-71.3	-13.0	-58.3
3	328.03	-71.6	-76.1	4.3	-71.8	-13.0	-58.8
4	402.54	-70.2	-75.1	4.2	-70.9	-13.0	-57.9
5	510.78	-69.4	-73.1	3.8	-69.3	-13.0	-56.3
6	630.28	-70.7	-69.2	3.3	-65.9	-13.0	-52.9

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

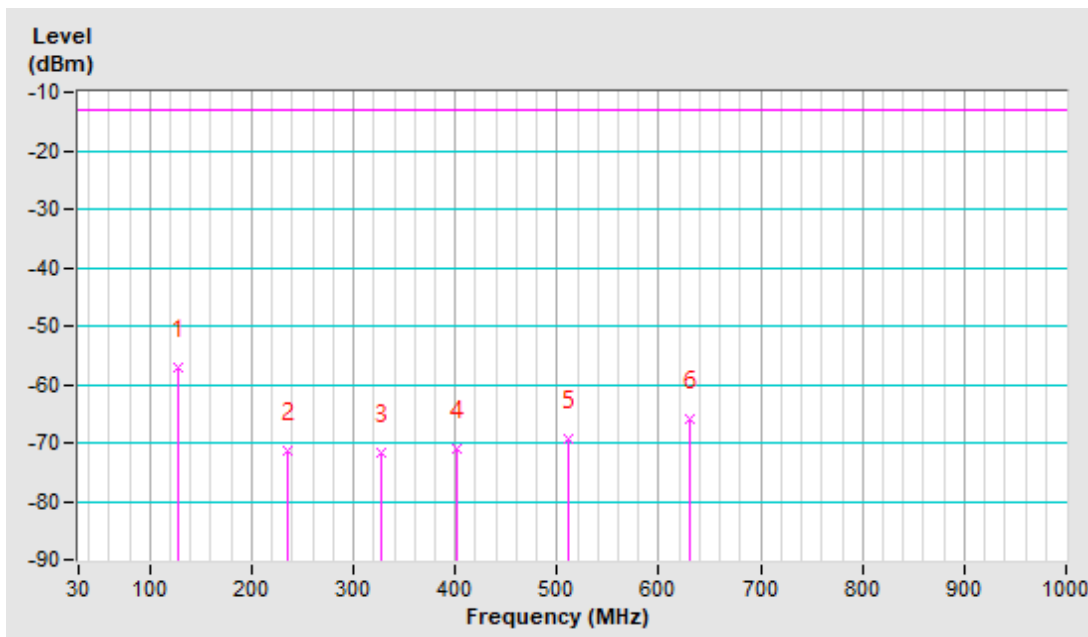


LTE BAND 12, CHANNEL BANDWIDTH: 1.4MHz

Mode	TX channel 23173 (715.3MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Luis Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
NO.	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
1	93.26	-53.4	-62.2	0.2	-62.0	-13.0	-49.0
2	139.65	-57.5	-62.1	-1.2	-63.3	-13.0	-50.3
3	160.74	-61.5	-66.4	-0.5	-66.9	-13.0	-53.9
4	222.59	-64.0	-76.5	4.4	-72.1	-13.0	-59.1
5	477.04	-70.6	-74.7	3.9	-70.8	-13.0	-57.8
6	626.06	-70.2	-71.6	3.4	-68.2	-13.0	-55.2

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

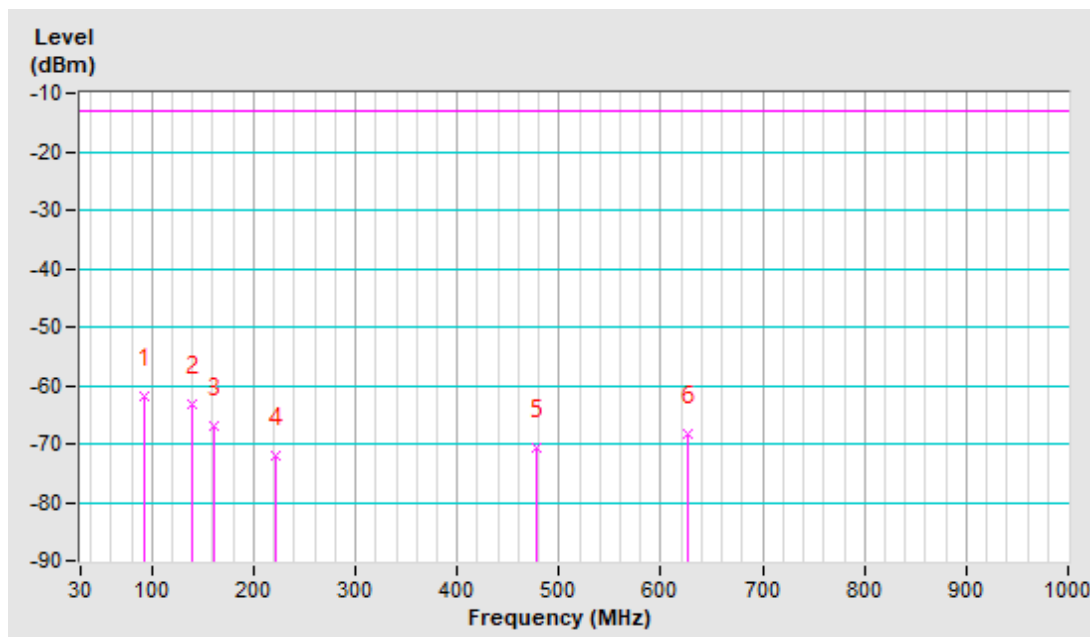


Mode	TX channel 23173 (715.3MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Luis Lee		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
1	91.86	-57.3	-64.4	0.3	-64.1	-13.0	-51.1
2	146.68	-66.0	-66.9	-1.1	-68.0	-13.0	-55.0
3	222.59	-62.2	-70.7	4.4	-66.3	-13.0	-53.3
4	297.10	-68.6	-73.0	4.2	-68.8	-13.0	-55.8
5	371.61	-65.0	-69.5	4.2	-65.3	-13.0	-52.3
6	547.33	-72.0	-74.0	3.6	-70.4	-13.0	-57.4

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

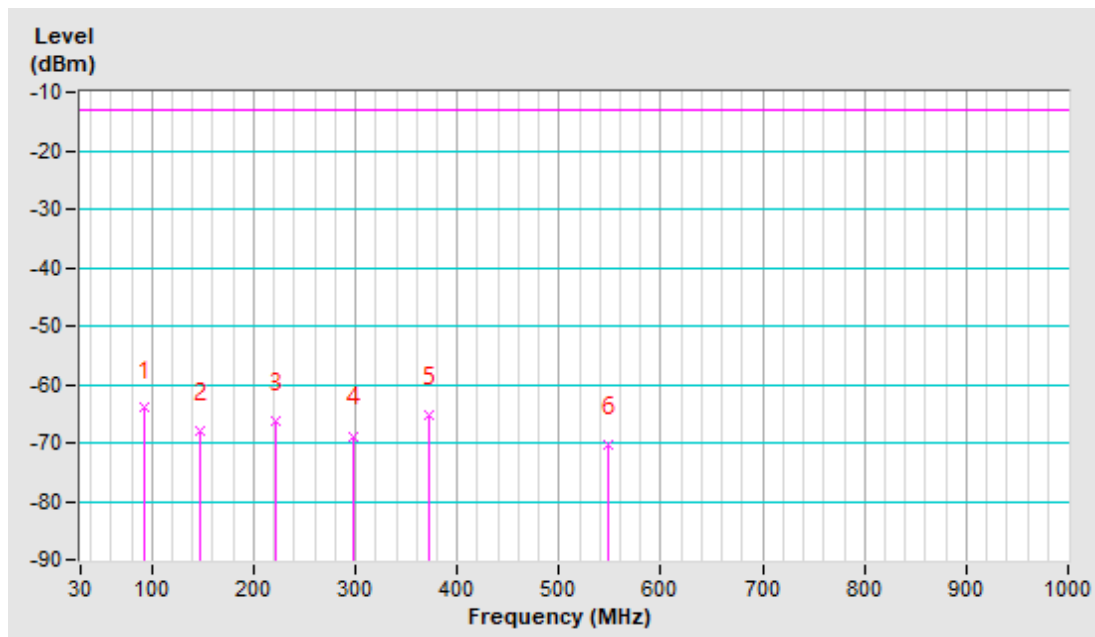

Above 1GHz

WCDMA Band IV

Mode	TX channel 1312 (1712.4MHz)	Frequency Range	1GHz-18GHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Jones Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
1	3424.80 (PK)	-64.8	-60.6	7.1	-53.5	-13.0	-40.5

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
1	3424.80 (PK)	-67.2	-60.7	7.1	-53.6	-13.0	-40.6

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 4, Channel Bandwidth 10MHz

Mode	TX channel 20350 (1750MHz)	Frequency Range	1GHz-18GHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Jones Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
1	3500.00 (PK)	-64.3	-60.1	7.1	-53.0	-13.0	-40.0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
1	3500.00 (PK)	-69.1	-62.6	7.1	-55.5	-13.0	-42.5

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 12, Channel Bandwidth 1.4MHz

Mode	TX channel 23173 (715.3MHz)	Frequency Range	1GHz-18GHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Jones Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
1	1430.60 (PK)	-48.1	-50.1	4.8	-45.3	-13.0	-32.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	READING (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	EIRP (dBm)	LIMIT (dBm)	MARGIN (dB)
1	1430.60 (PK)	-50.8	-52.6	4.8	-47.8	-13.0	-34.8

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---