



Zacta

# TEST REPORT

Report number : JPD-TR-16224-0

Issue date : January 30, 2017

The device, as described herewith, was tested pursuant to applicable test procedure and complies with the requirements of;

## FCC Part15 Subpart C

The test results are traceable to the international or national standards.

Applicant	: KYOCERA Corporation
-----------	-----------------------

Equipment under test (EUT)	: Mobile Phone
----------------------------	----------------

Model number	: DA03
--------------	--------

FCC ID	: JOYDA03
--------	-----------

Date of test	: October 7, 27, 28, 2016, December 14, 19, 21, 2016 January 30, 2017
--------------	--

Test place	: TÜV SÜD Zacta Ltd. Yonezawa Testing Center 5-4149-7, Hachimanpara, Yonezawa-shi, Yamagata, 992-1128 Japan
------------	---

Test results	: Phone: +81-238-28-2881 Fax: +81-238-28-2888
--------------	---

Test results	: Complied
--------------	------------

The results in this report are applicable only to the equipment tested.

This report shall not be re-produced except in full without the written approval of TÜV SÜD Zacta Ltd.

This test report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Tested by : Kazunori Saito

Kazunori Saito

Approved by : Eiji Akiba

Eiji Akiba  
Lab Manager



## Table of contents

---

	Page
<b>1. Summary of Test .....</b>	<b>4</b>
1.1 Purpose of test.....	4
1.2 Standards .....	4
1.3 List of applied test to the EUT .....	4
1.4 Modification to the EUT by laboratory.....	4
<b>2. Equipment Under Test .....</b>	<b>5</b>
2.1 General Description of equipment.....	5
2.2 EUT information .....	5
2.3 Variation of the family model(s).....	6
2.4 Operating channels and frequencies .....	6
2.5 Operating mode .....	7
2.6 Operating flow .....	7
<b>3. Configuration of equipment .....</b>	<b>8</b>
3.1 Equipment(s) used.....	8
3.2 Cable(s) used .....	8
3.3 System configuration .....	8
<b>4. 20dB Bandwidth .....</b>	<b>9</b>
4.1 Measurement procedure.....	9
4.2 Limit.....	9
4.3 Measurement result.....	9
4.4 Trace data .....	10
<b>5. Carrier Frequency Separation .....</b>	<b>12</b>
5.1 Measurement procedure.....	12
5.2 Limit.....	12
5.3 Measurement result.....	12
5.4 Trace data .....	13
<b>6. Number of Hopping Frequencies.....</b>	<b>15</b>
6.1 Measurement procedure.....	15
6.2 Limit.....	15
6.3 Measurement result.....	15
6.4 Trace data .....	16
<b>7. Time of Occupancy (Dwell Time) .....</b>	<b>20</b>
7.1 Measurement procedure.....	20
7.2 Limit.....	20
7.3 Measurement result.....	21
7.4 Trace data .....	22
<b>8. Maximum Peak Output Power.....</b>	<b>26</b>
8.1 Measurement procedure.....	26
8.2 Limit.....	26
8.3 Measurement result.....	26
<b>9. Band Edge Compliance of RF Conducted Emissions.....</b>	<b>27</b>
9.1 Measurement procedure.....	27
9.2 Limit.....	27



Zacta

<b>9.3 Measurement result.....</b>	<b>28</b>
<b>9.4 Trace data .....</b>	<b>29</b>
<b>10. Spurious emissions - Conducted - .....</b>	<b>31</b>
<b>10.1 Measurement procedure.....</b>	<b>31</b>
<b>10.2 Limit.....</b>	<b>31</b>
<b>10.3 Measurement result.....</b>	<b>31</b>
<b>10.4 Trace data .....</b>	<b>32</b>
<b>11. Spurious Emissions - Radiated -.....</b>	<b>38</b>
<b>11.1 Measurement procedure.....</b>	<b>38</b>
<b>11.2 Calculation method.....</b>	<b>39</b>
<b>11.3 Limit.....</b>	<b>39</b>
<b>11.4 Test data.....</b>	<b>40</b>
<b>12. Restricted Band of Operation.....</b>	<b>55</b>
<b>12.1 Measurement procedure.....</b>	<b>55</b>
<b>12.2 Limit.....</b>	<b>55</b>
<b>12.3 Measurement Result.....</b>	<b>56</b>
<b>12.4 Test data.....</b>	<b>56</b>
<b>13. AC Power Line Conducted Emissions.....</b>	<b>61</b>
<b>13.1 Measurement procedure.....</b>	<b>61</b>
<b>13.2 Calculation method.....</b>	<b>61</b>
<b>13.3 Limit.....</b>	<b>62</b>
<b>13.4 Test data.....</b>	<b>62</b>
<b>14. Antenna requirement .....</b>	<b>63</b>
<b>15. Uncertainty of measurement.....</b>	<b>64</b>
<b>16. Laboratory Information.....</b>	<b>65</b>
<b>Appendix A. Test equipment .....</b>	<b>66</b>
<b>Appendix B. Duty Cycle.....</b>	<b>67</b>

## 1. Summary of Test

---

### 1.1 Purpose of test

It is the original test in order to verify conformance to FCC Part 15 Subpart C.

### 1.2 Standards

CFR47 FCC Part 15 Subpart C

#### 1.2.1 Test Methods

ANSI C63.10-2013

#### 1.2.2 Deviation from standards

None

### 1.3 List of applied test to the EUT

Test items Section	Test items	Condition	Result
15.247(a)(1)	20dB Bandwidth	Conducted	PASS
15.247(a)(1)	Carrier Frequency Separation	Conducted	PASS
15.247(a)(1)(iii)	Number of Hopping Frequencies	Conducted	PASS
15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Conducted	PASS
15.247(b)(1)	Maximum Peak Output Power	Conducted	PASS
15.247(d) 15.205 15.209	Band Edge Compliance of RF Conducted Emissions	Conducted	PASS
15.247(d) 15.205 15.209	Spurious Emissions	Conducted Radiated	PASS
15.247(d) 15.205 15.209	Restricted Bands of Operation	Radiated	PASS
15.207	AC Power Line Conducted Emissions	Conducted	PASS

#### 1.3.1 Test set up

Table-Top

### 1.4 Modification to the EUT by laboratory

None

## **2. Equipment Under Test**

---

### **2.1 General Description of equipment**

EUT is the Mobile Phone.

### **2.2 EUT information**

Applicant	:	KYOCERA Corporation Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa, Japan Phone: +81-45-943-6253 Fax: +81-45-943-6314
Equipment under test	:	Mobile Phone
Trade name	:	Kyocera
Model number	:	DA03
Serial number	:	N/A
EUT condition	:	Pre-Production
Power ratings	:	Battery: DC 3.8V
Size	:	(W) 71.0 × (D) 10.4 × (H) 142.0 mm
Environment	:	Indoor and Outdoor use
Terminal limitation	:	-20°C to 60°C
RF Specification Protocol	:	Bluetooth 4.2 + EDR
Frequency range	:	2402MHz-2480MHz
Number of RF Channels	:	79 Channels
Modulation type/ Data rate	:	FHSS: GFSK (1Mbps), π/4-DQPSK (2Mbps), 8-DPSK (3Mbps)
Channel separation	:	1MHz
Conducted power	:	6.252mW (DH5) 6.950mW (3-DH5)
Antenna type	:	Internal antenna
Antenna gain	:	-1.9dBi

## 2.3 Variation of the family model(s)

Not applicable

## 2.4 Operating channels and frequencies

Channel	Frequency [MHz]	Channel	Frequency [MHz]	Channel	Frequency [MHz]
0	2402	27	2429	54	2456
1	2403	28	2430	55	2457
2	2404	29	2431	56	2458
3	2405	30	2432	57	2459
4	2406	31	2433	58	2460
5	2407	32	2434	59	2461
6	2408	33	2435	60	2462
7	2409	34	2436	61	2463
8	2410	35	2437	62	2464
9	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

## 2.5 Operating mode

The EUT had been tested under operating condition.

There are three channels have been tested as following:

Tested Channel	Frequency [MHz]
Low	2402
Middle	2441
High	2480

The pre-test has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates.

Tested Channel	Modulation Technology	Modulation Type	Packet Type
Low, Middle, High	FHSS	GFSK	DH5
Low, Middle, High	FHSS	8-DPSK	3-DH5

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in X axis and the worst case recorded.

## 2.6 Operating flow

[Tx mode]

- i) Bluetooth test program setup to the DM tool
- ii) Select a test mode

Operating frequency:

No hopping (Channel Low: 2402MHz, Channel Middle: 2441MHz, Channel High: 2480MHz)

Hopping

Packet type: DH5, 3-DH5

- iii) Start test mode

[Rx mode]

- i) Bluetooth test program setup to the DM tool
- ii) Select a test mode

Operating frequency: Channel Low: 2402MHz, Channel Middle: 2441MHz, Channel High: 2480MHz

- iii) Start test mode

### **3. Configuration of equipment**

#### **3.1 Equipment(s) used**

No.	Equipment	Company	Model No.	Serial No.	FCC ID / DoC	Comment
1	Mobile Phone	KYOCERA	DA03	N/A	JOYDA03	EUT
2	AC Adapter	au	N/A	N/A	N/A	*


\*: AC power line Conducted Emission Test.

#### **3.2 Cable(s) used**

No.	Cable	Length[m]	Shield	Connector	Comment
a	Micro USB cable(for AC Adapter)	1.0	Yes	Metal	*

\*: AC power line Conducted Emission Test.

#### **3.3 System configuration**

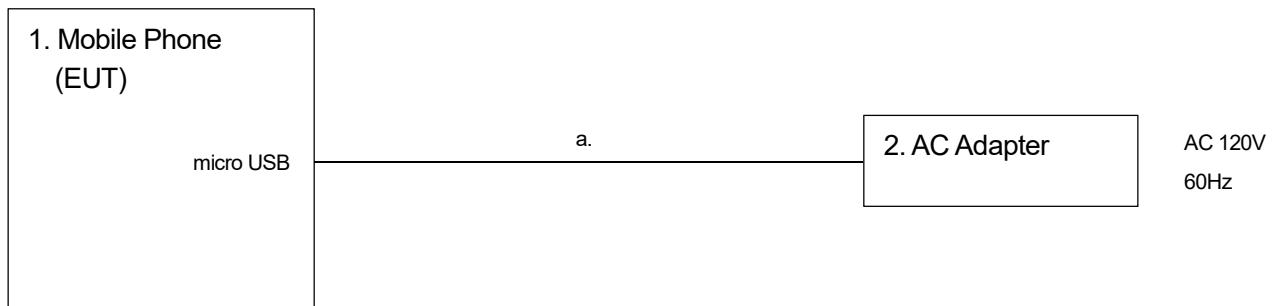

Note1: Numbers assigned to equipment or cables on this diagram correspond to the list in “3.1 Equipment(s) used” and “3.2 Cable(s) used”.

## 4. 20dB Bandwidth

### 4.1 Measurement procedure


[FCC 15.247(a)(1)]

The bandwidth at 20dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) Span = 2-3 times the 20 dB bandwidth.
- b) RBW  $\geq$  1% of the 20 dB bandwidth.
- c) VBW  $\geq$  RBW.
- d) Sweep time = auto-couple.
- e) Detector = peak.
- f) Trace mode = max hold.

- Test configuration

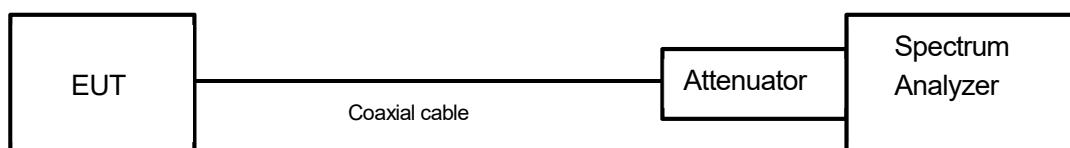

### 4.2 Limit

None

### 4.3 Measurement result

Date : October 27, 2016  
 Temperature : 23.6 [°C]  
 Humidity : 47.7 [%]  
 Test place : Shielded room No.4


Test engineer :

Kazunori Saito

Channel	Frequency [MHz]	20dB bandwidth [MHz]	
		DH5	3-DH5
Low	2402	0.970	1.306
Middle	2441	0.970	1.308
High	2480	0.970	1.307


## 4.4 Trace data [DH5]

### Channel Low

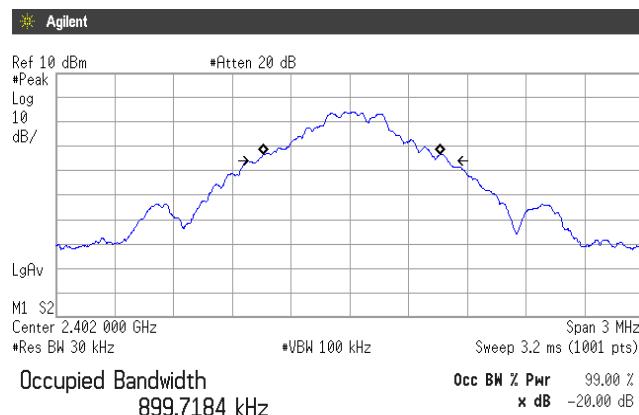


Transmit Freq Error 9.039 kHz  
x dB Bandwidth 969.747 kHz

### Channel Middle

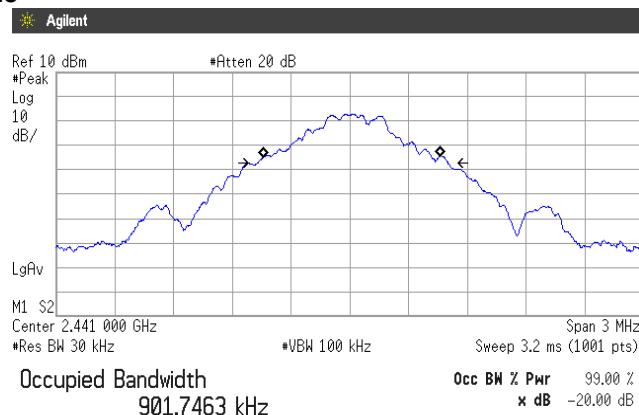




Transmit Freq Error 8.680 kHz  
x dB Bandwidth 969.620 kHz

### Channel High

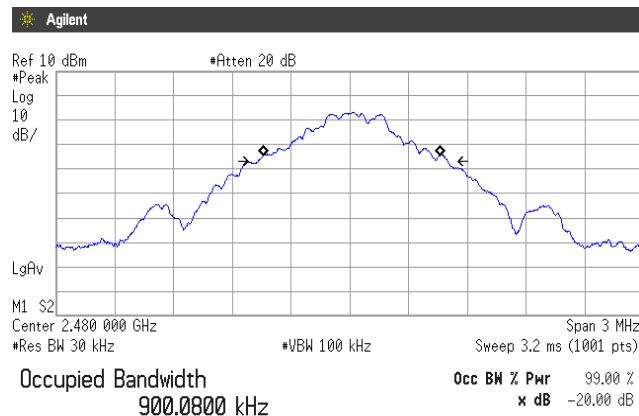

Transmit Freq Error 8.303 kHz  
x dB Bandwidth 969.810 kHz

[3-DH5]

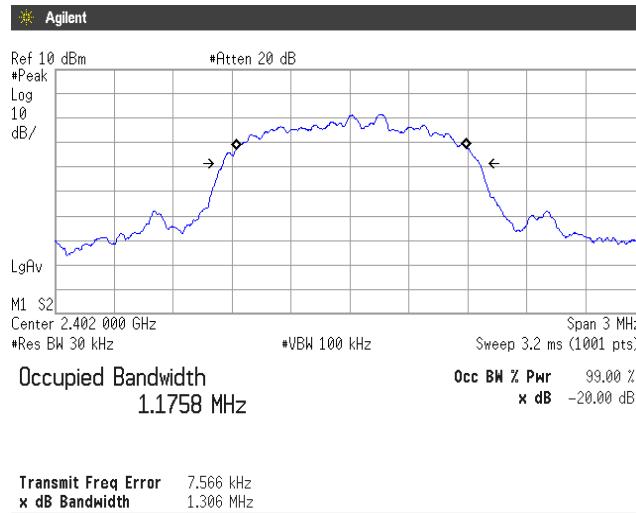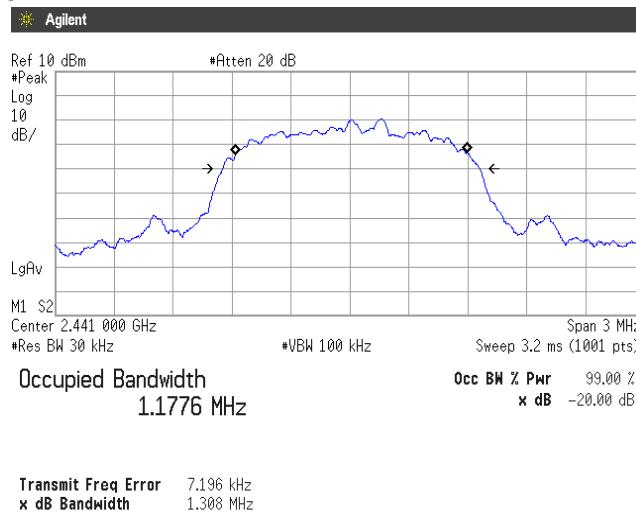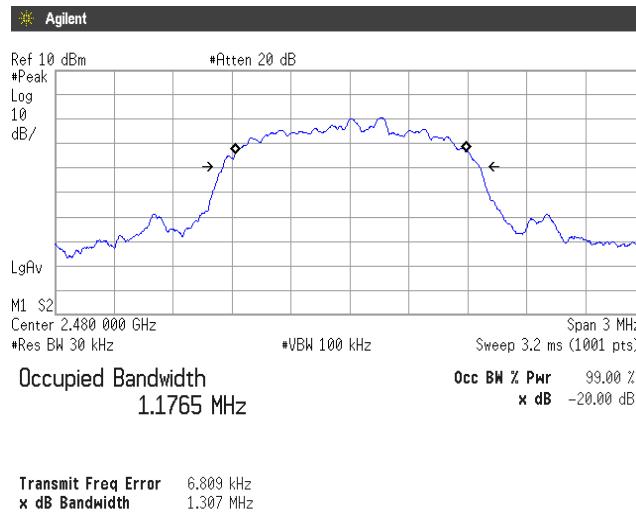**Channel Low****Channel Middle****Channel High**

## 5. Carrier Frequency Separation


### 5.1 Measurement procedure [FCC 15.247(a)(1)]

The adjacent channel interval is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) Span = wide enough to capture the peaks of two adjacent channels.
- b) RBW  $\geq$  1% of the span.
- c) VBW  $\geq$  RBW.
- d) Sweep time = auto-couple.
- e) Detector = peak.
- f) Trace mode = max hold.

- Test configuration

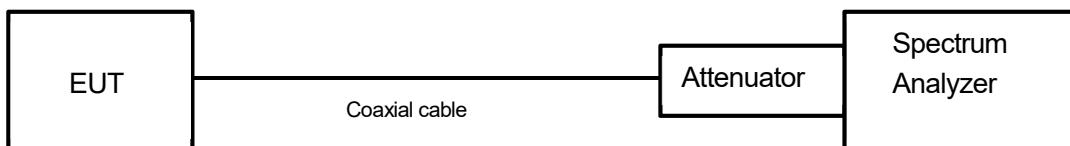

### 5.2 Limit


System shall have hopping channel carrier frequencies separated by a minimum of;  
25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

### 5.3 Measurement result


Date	:	October 27, 2016		
Temperature	:	23.6 [°C]		
Humidity	:	47.7 [%]		
Test place	:	Shielded room No.4	Test engineer :	Kazunori Saito



Packet type	Channel separation (MHz)	Limit (MHz)	Result
DH5	1.002	>two-thirds of the 20dB Bandwidth =647kHz	PASS
3-DH5	1.008	>two-thirds of the 20dB Bandwidth =872kHz	PASS
DH5(AFH)	1.011	>two-thirds of the 20dB Bandwidth =647kHz	PASS
3-DH5(AFH)	1.002	>two-thirds of the 20dB Bandwidth =872kHz	PASS

## 5.4 Trace data [DH5]

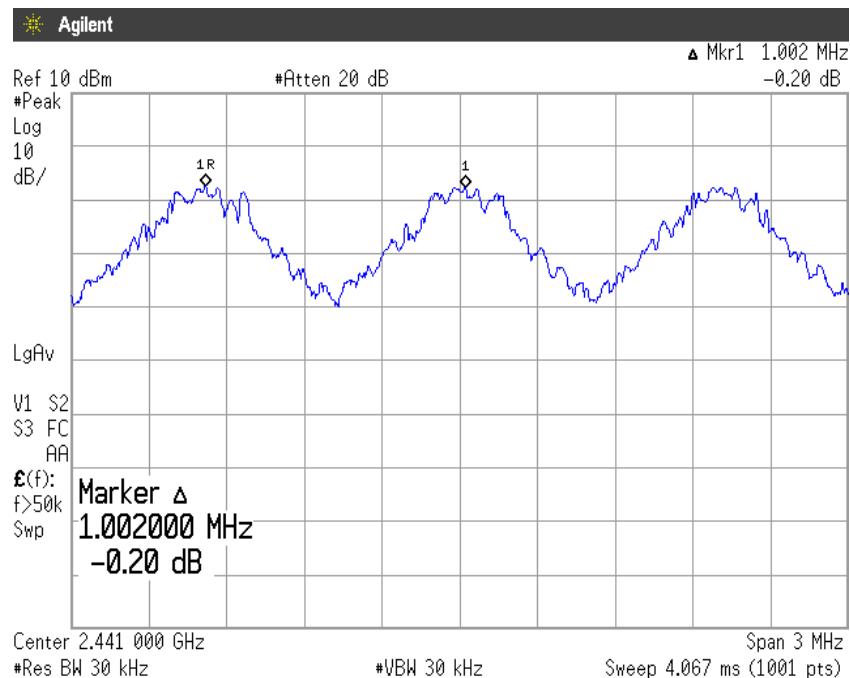

## [3-DH5]

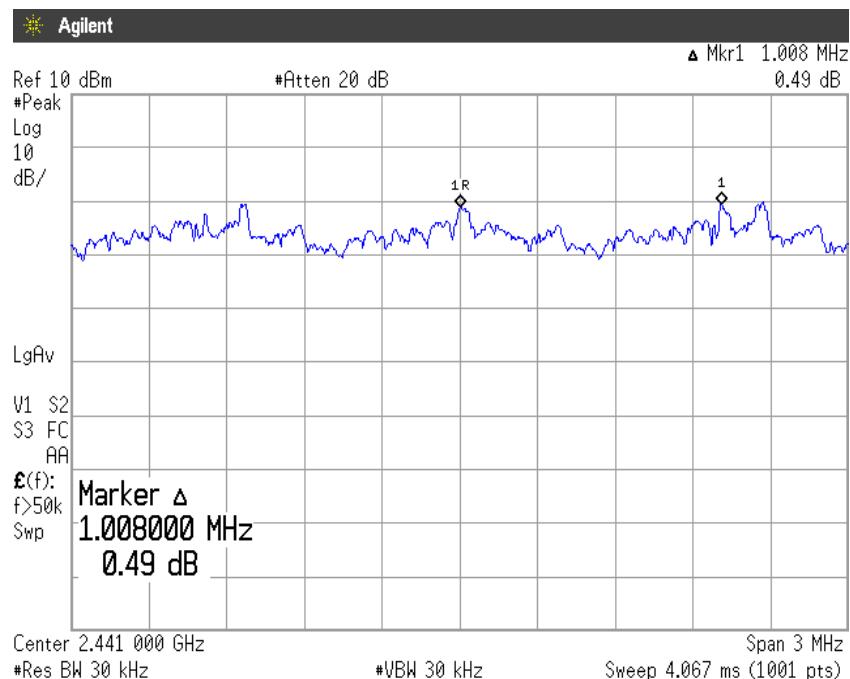

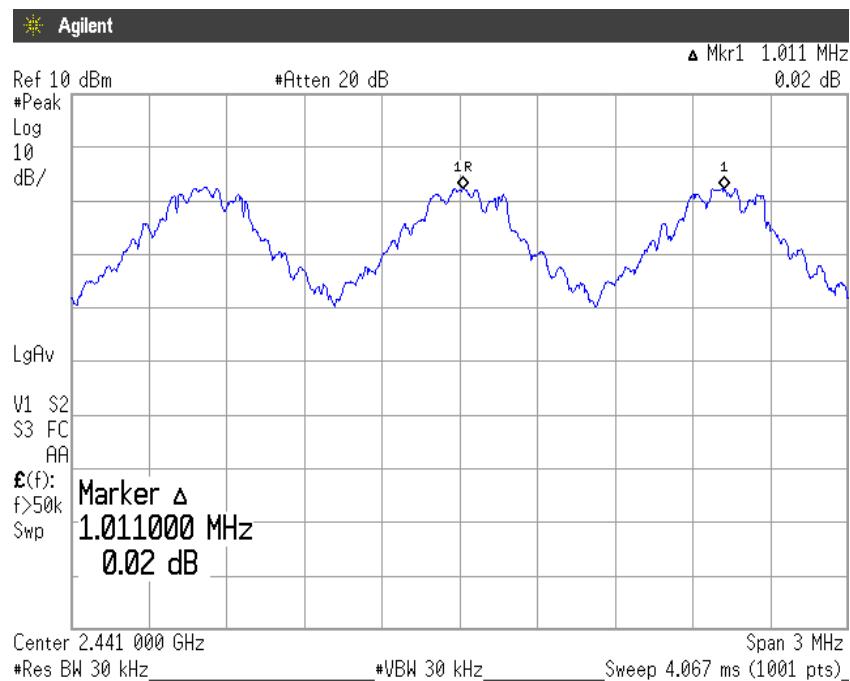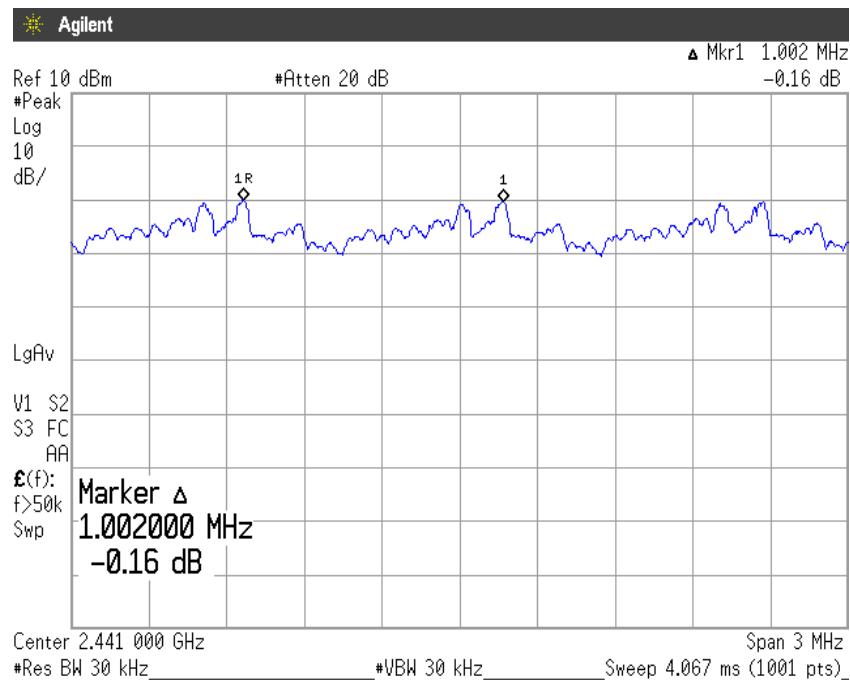**[DH5(AFH)]****[3-DH5(AFH)]**

## 6. Number of Hopping Frequencies

### 6.1 Measurement procedure


[FCC 15.247(a)(1)(iii)]

The number of hopping channels is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) Span = the frequency band of operation.
- b) RBW  $\geq$  1% of the Span.
- c) VBW  $\geq$  RBW.
- d) Sweep time = auto-couple.
- e) Detector = peak.
- f) Trace mode = max hold.

- Test configuration

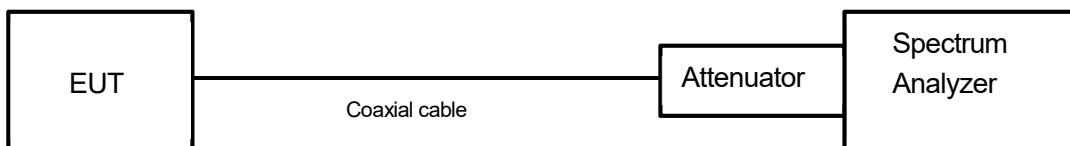

### 6.2 Limit

Shall have more than 15 channels.

### 6.3 Measurement result

Date : October 27, 2016  
 Temperature : 23.6 [°C]  
 Humidity : 47.7 [%]  
 Test place : Shielded room No.4

Test engineer :

Kazunori Saito

#### FHSS


Number of channels	Limit	Result
79	$\geq$ 15 channel	PASS

#### AFH


Channel	Number of channels	Limit	Result
Low	20	$\geq$ 15 channel	PASS
Middle	20	$\geq$ 15 channel	PASS
High	20	$\geq$ 15 channel	PASS

## 6.4 Trace data [DH5]

**Low**

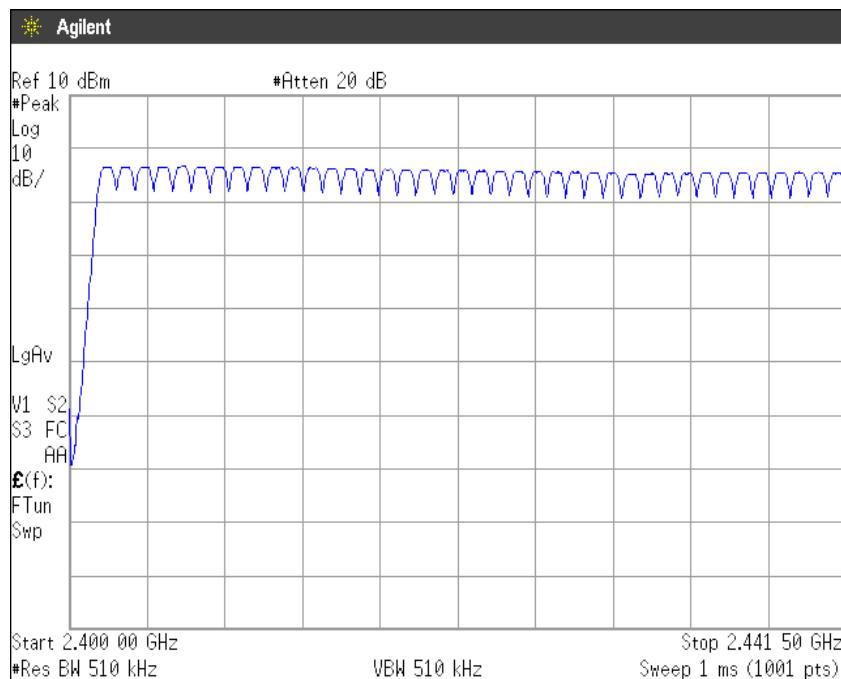


**High**

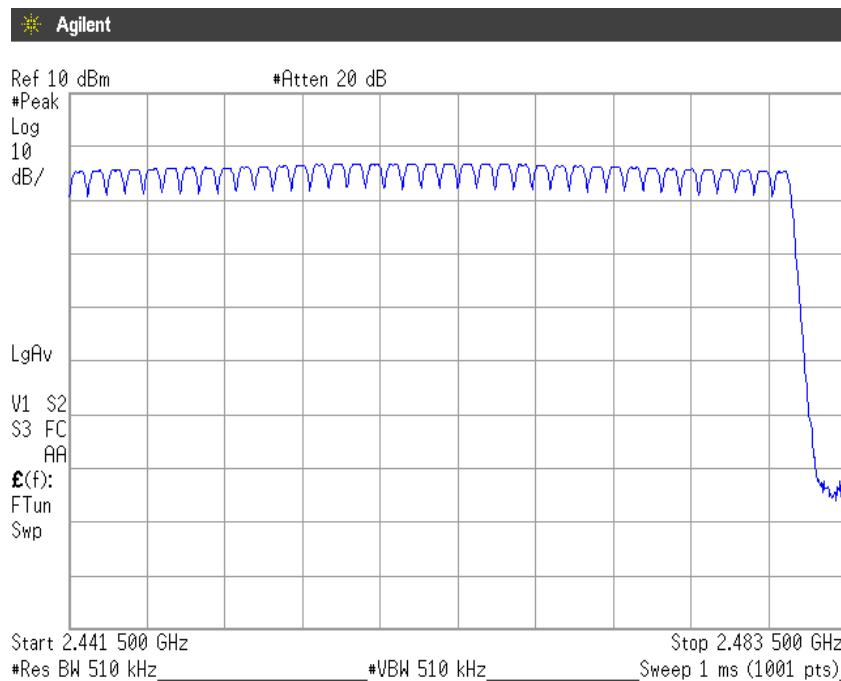





[3-DH5]




Low

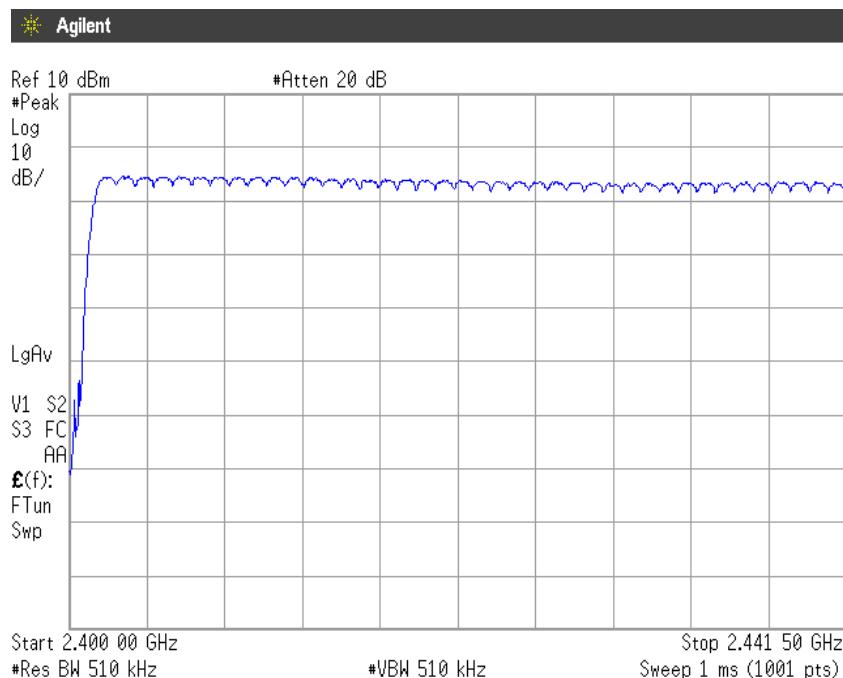

High

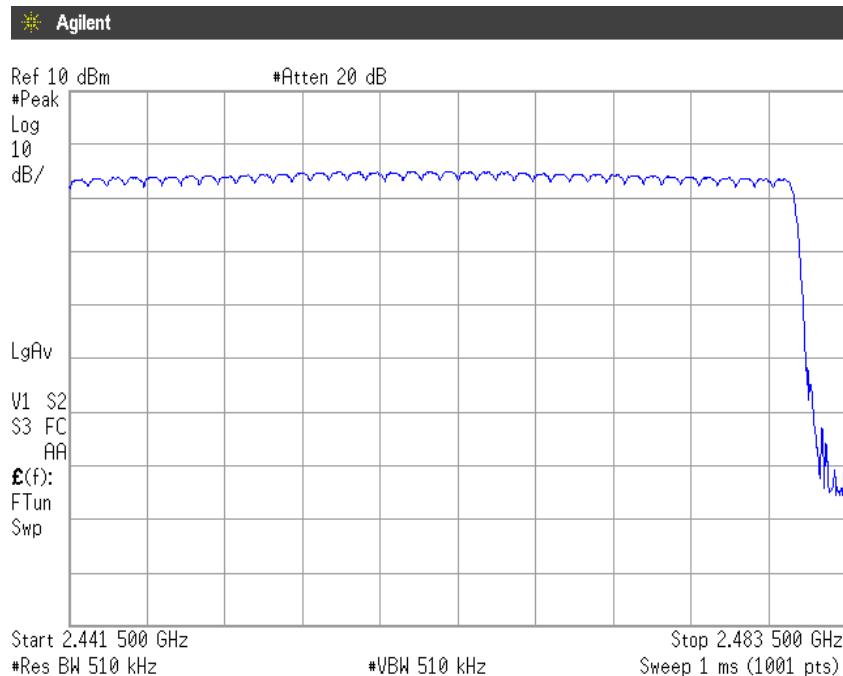

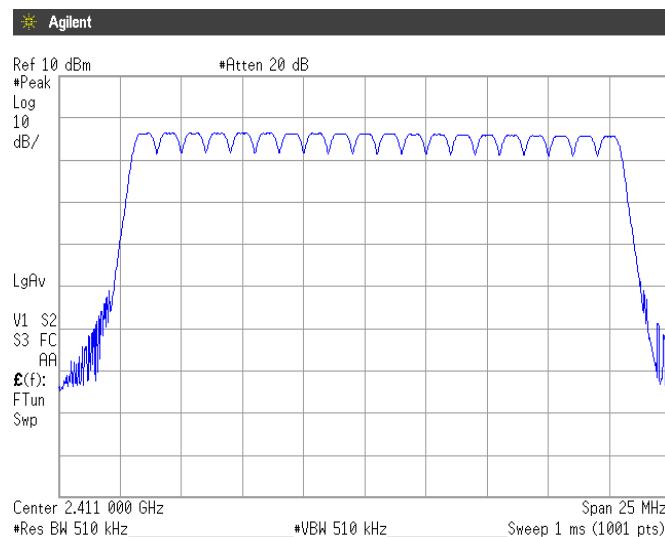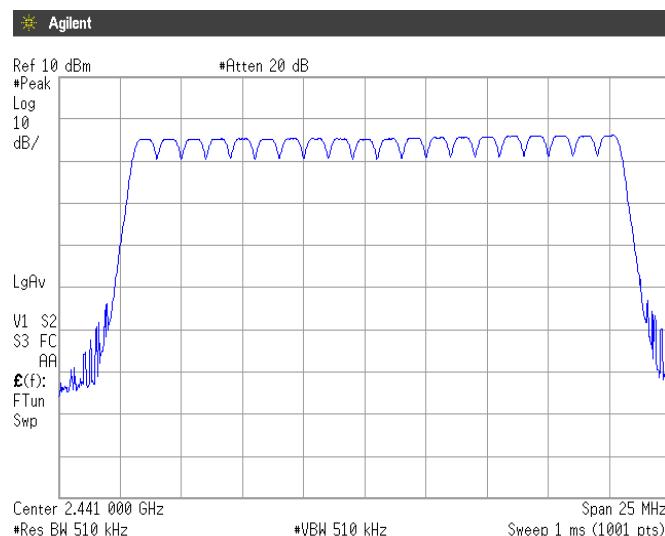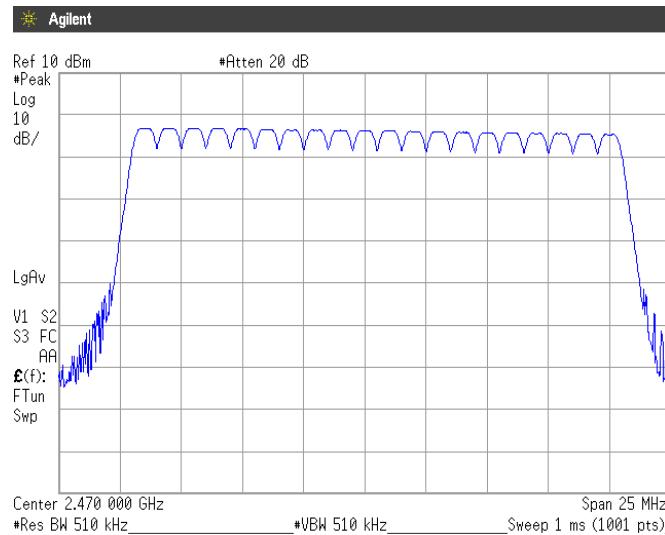**[DH5(AFH)]**  
**Low**

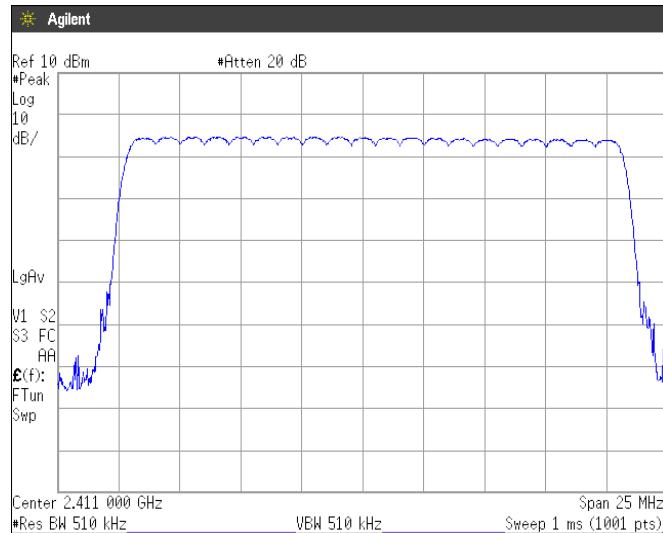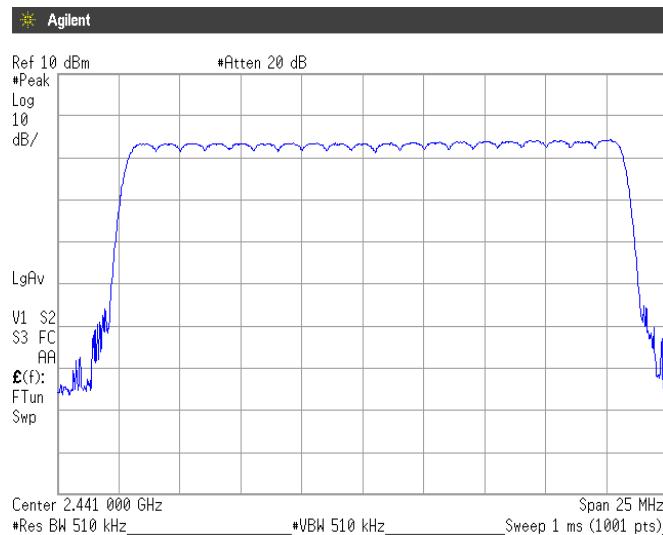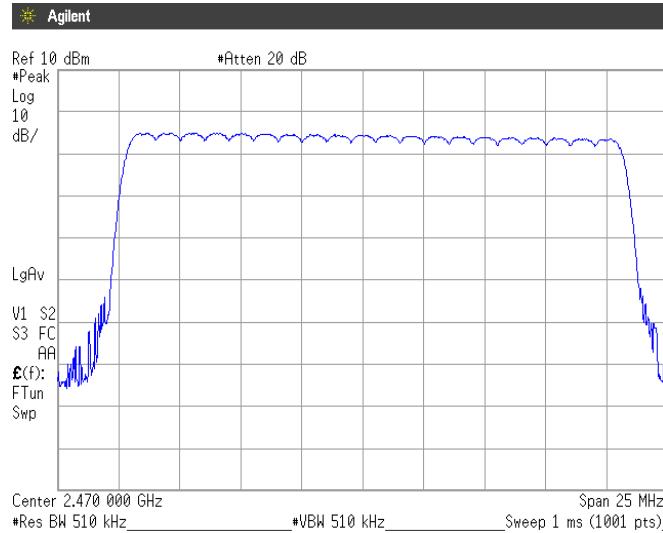**Middle**

**High**


**[3-DH5(AFH)]**  
**Low**

**Middle**

**High**


## **7. Time of Occupancy (Dwell Time)**

### **7.1 Measurement procedure**


**[FCC 15.247(a)(1)(iii)]**

The time occupancy of hopping channel is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) Span = Zero span, centered on a hopping channel.
- b) RBW  $\geq$  1MHz.
- c) VBW  $\geq$  RBW.
- d) Sweep time = auto-couple.
- e) Detector = peak.
- f) Trace mode=Single.

- Test configuration

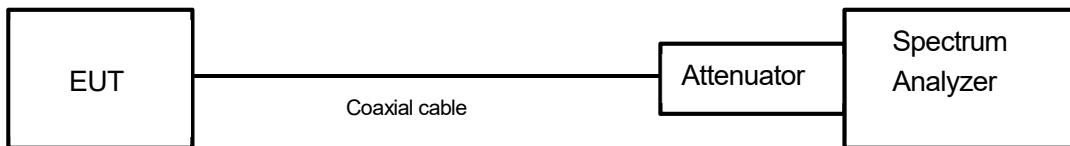

### **7.2 Limit**

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 7.3 Measurement result

Date : October 28, 2016  
 Temperature : 22.5 [°C]  
 Humidity : 47.4 [%]  
 Test place : Shielded room No.4

Test engineer : Kazunori Saito

#### FHSS

Channel	Frequency (MHz)	Packet type	Dwell time (ms)	Occupancy time of 31.6 seconds (s)	Limit	Result
Low	2402	DH5	2.880	0.307	<0.4s	PASS
	2402	3-DH5	2.880	0.307	<0.4s	PASS
Middle	2441	DH5	2.890	0.308	<0.4s	PASS
	2441	3-DH5	2.890	0.308	<0.4s	PASS
High	2480	DH5	2.880	0.307	<0.4s	PASS
	2480	3-DH5	2.890	0.308	<0.4s	PASS

#### AFH

Channel	Frequency (MHz)	Packet type	Dwell time (ms)	Occupancy time of 31.6 seconds (s)	Limit	Result
Low	2402	DH5	2.870	0.153	<0.4s	PASS
	2402	3-DH5	2.890	0.154	<0.4s	PASS
Middle	2441	DH5	2.890	0.154	<0.4s	PASS
	2441	3-DH5	2.890	0.154	<0.4s	PASS
High	2480	DH5	2.880	0.154	<0.4s	PASS
	2480	3-DH5	2.880	0.154	<0.4s	PASS

#### FHSS

$$\text{DH5/3-DH5} = \text{Dwell time (ms)} \times 1600 / 6 / 79 \times 31.6$$

#### AFH

$$\text{DH5/3-DH5} = \text{Dwell time (ms)} \times 1600 / 6 / 20 \times 8$$

The hopping rates of Bluetooth devices change with different types of payload. The longer the payload is, the slower the hopping rate. The hopping rate scenario is defined in Bluetooth core specification.

Calculation:

$$\text{Occupancy time of 31.6 seconds}^* = \text{time domain slot length} \times \text{hop rate} / \text{number of hopper channel} / 79 / 31.6$$


$$\text{Ex.) for FHSS mode Channel Low,3- DH5} = 2.880\text{ms} \times 1600 / 6 / 79 \times 31.6 = 307\text{ms}$$

## 7.4 Trace data


### FHSS

#### [DH5]


##### Channel Low



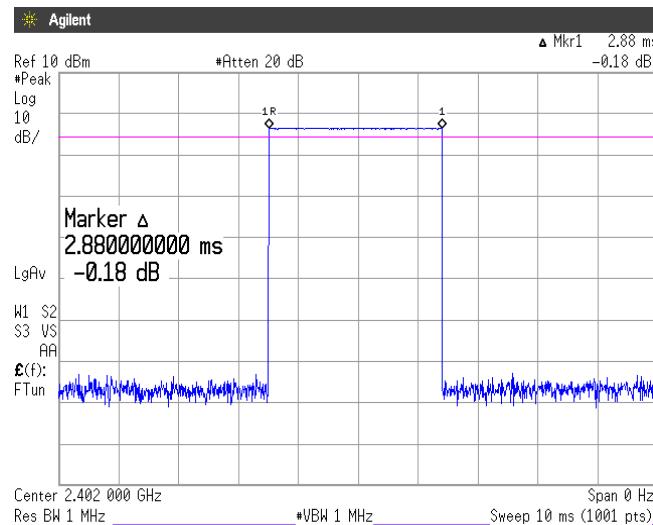


##### Channel Middle

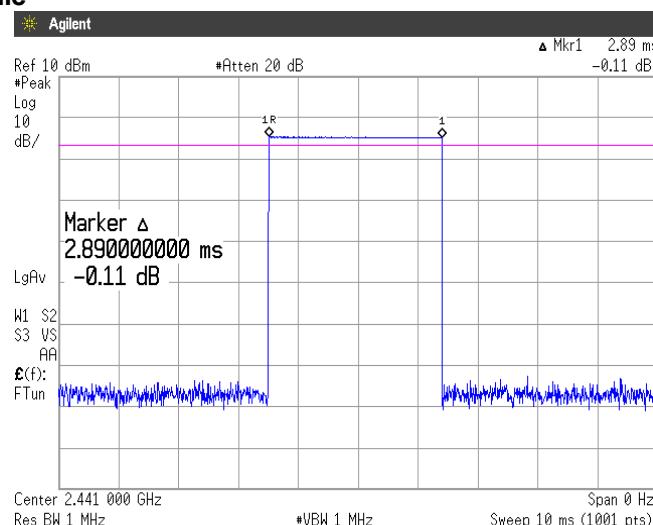


##### Channel High

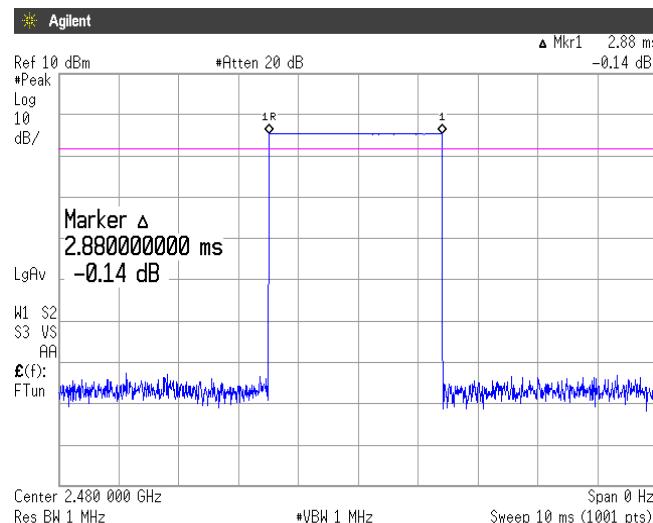

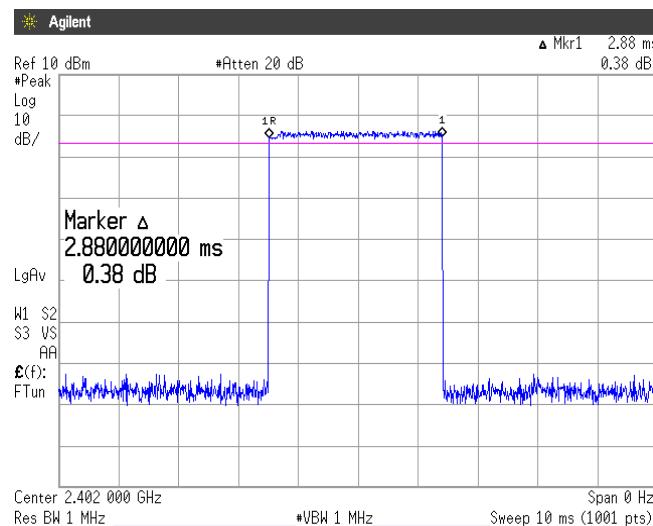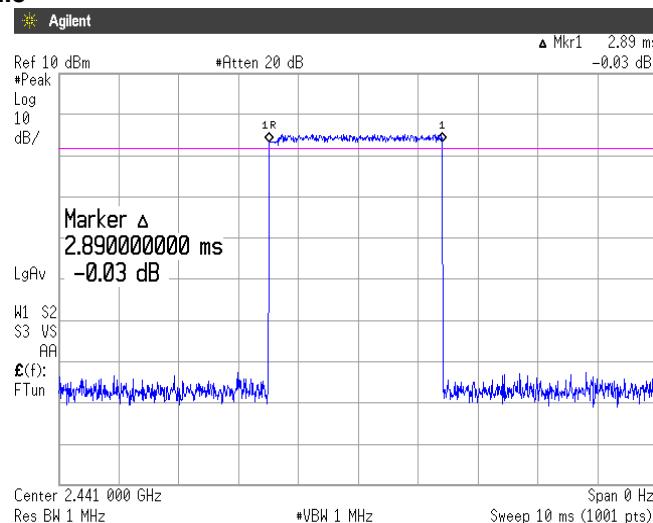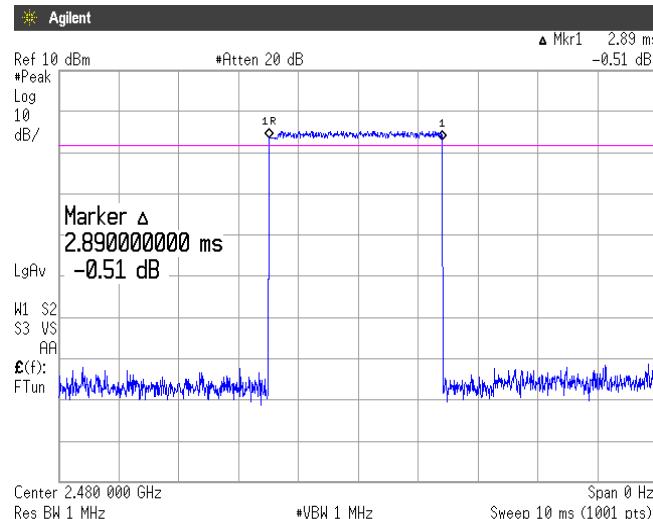
**FHSS**  
**[3-DH5]**
**Channel Low****Channel Middle****Channel High**

**AFH**  
**[DH5]**


### Channel Low



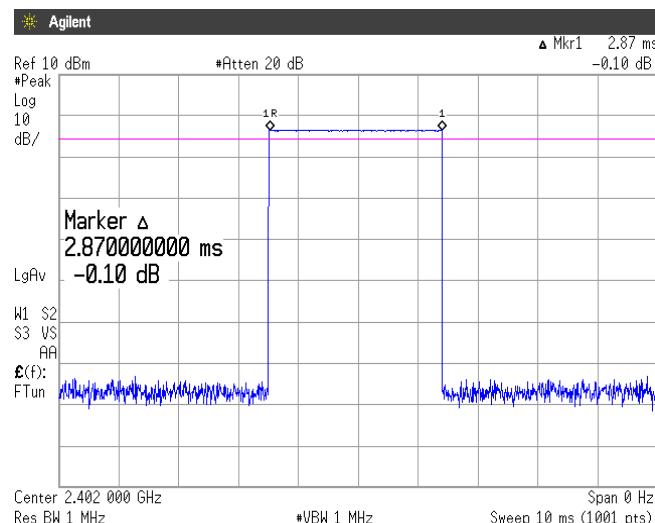


### Channel Middle

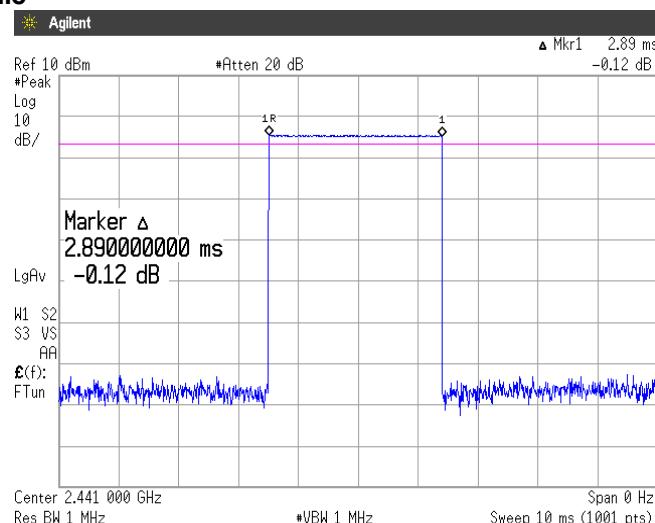

### Channel High

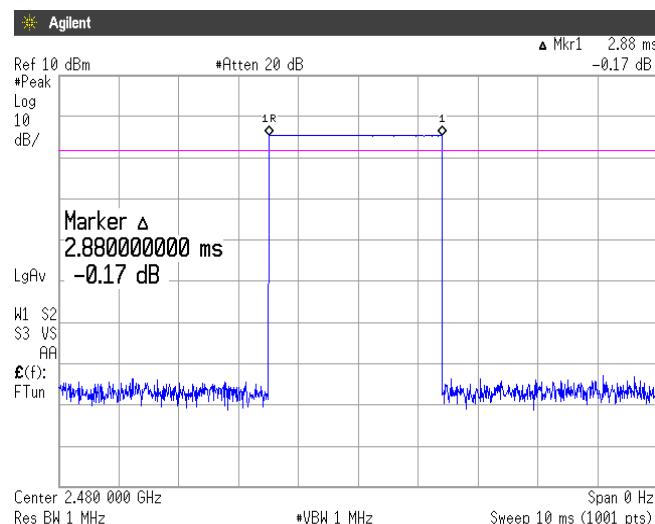

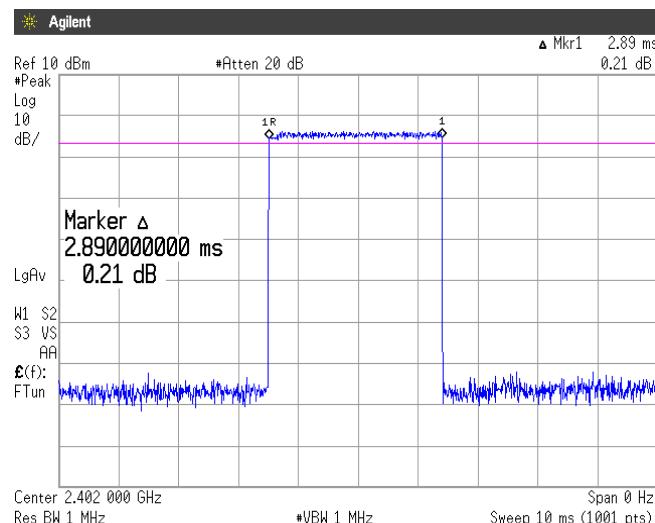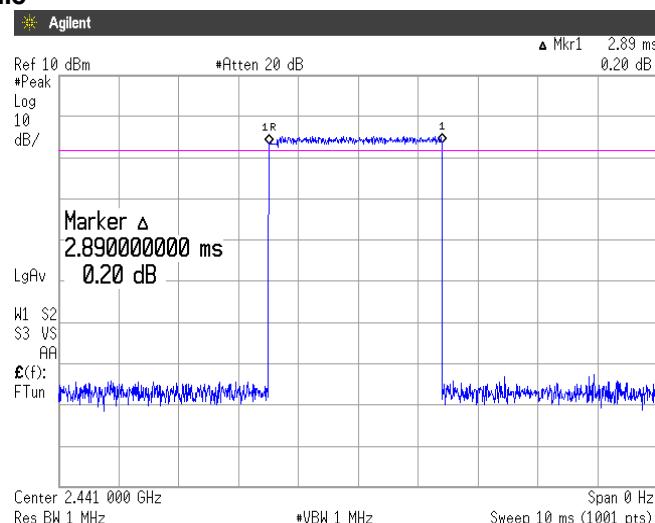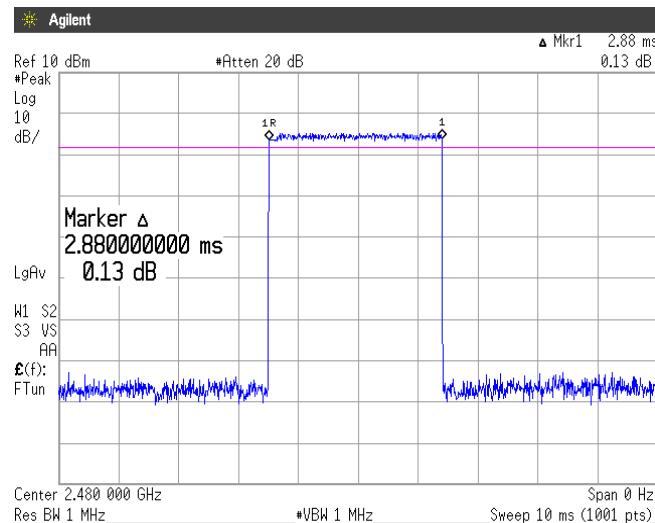
**AFH****[3-DH5]****Channel Low****Channel Middle****Channel High**

## 8. Maximum Peak Output Power

### 8.1 Measurement procedure [FCC 15.247(b)(1)]

The peak power is measured with a power sensor connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

- Test configuration

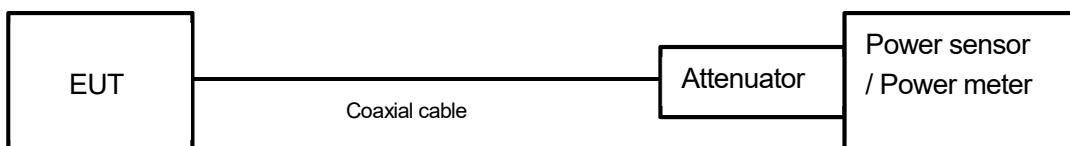

### 8.2 Limit

0.125 W or less

### 8.3 Measurement result

Date : January 30, 2017  
 Temperature : 22.0 [°C]  
 Humidity : 27.9 [%]  
 Test place : Shielded room No.4

Test engineer :

Kazunori Saito

#### Battery Full

Channel	Center Frequency (MHz)	Packet type	Reading (dBm)	Factor (dB)	Level (dBm)	Peak Output Power (mW)	Limit (mW)	Result
Low	2402	DH5	-2.56	10.52	7.96	6.252	≤125	PASS
		3-DH5	-2.10	10.52	8.42	6.950	≤125	PASS
Middle	2441	DH5	-3.49	10.52	7.03	5.047	≤125	PASS
		3-DH5	-3.06	10.52	7.46	5.572	≤125	PASS
High	2480	DH5	-3.39	10.52	7.13	5.164	≤125	PASS
		3-DH5	-2.86	10.52	7.66	5.834	≤125	PASS

Calculation:

$$\text{Reading (dBm)} + \text{Factor (dB)} = \text{Level (dBm)}$$

$$10\log P = \text{Level (dBm)}$$

$$P = 10^{(\text{Maximum Peak Output Power} / 10)} (\text{mW})$$

## **9. Band Edge Compliance of RF Conducted Emissions**


### **9.1 Measurement procedure** **[FCC 15.247(d)]**

The Band Edge is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) Span = Arbitrary setting.(Setting suitable for measurement.)
- b) RBW  $\geq$  1% of the span
- c) VBW  $\geq$  RBW
- d) Sweep time = auto-couple.
- e) Detector = peak.
- f) Trace mode = max hold.

- Test configuration

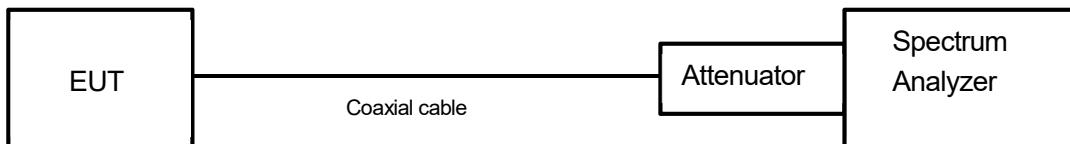

### **9.2 Limit**

In any 100kHz bandwidth outside the frequency band the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

### 9.3 Measurement result

Date : October 28, 2016  
 Temperature : 22.5 [°C]  
 Humidity : 47.4 [%]  
 Test place : Shielded room No.4

Test engineer :

Kazunori Saito

#### [Hopping]

Channel	Frequency (MHz)	Packet type	RF Power Level (dBm)	Band-edge Frequency (MHz)	Band-edge Level (dBm)	Difference Level (dBm)	Limit (dBm)	Result
Low	2402	DH5	-3.77	2399.95	-62.78	59.01	At least 20dB below from peak of RF	PASS
		3-DH5	-5.53	2399.85	-70.21	64.68		PASS
High	2480	DH5	-3.18	2484.55	-69.69	66.51	At least 20dB below from peak of RF	PASS
		3-DH5	-5.06	2487.40	-70.64	65.58		PASS


#### [No hopping]

Channel	Frequency (MHz)	Packet type	RF Power Level (dBm)	Band-edge Frequency (MHz)	Band-edge Level (dBm)	Difference Level (dBm)	Limit (dBm)	Result
Low	2402	DH5	-3.58	2399.95	-61.23	57.65	At least 20dB below from peak of RF	PASS
		3-DH5	-5.43	2399.95	-62.86	57.43		PASS
High	2480	DH5	-4.52	2483.50	-69.16	64.64	At least 20dB below from peak of RF	PASS
		3-DH5	-6.47	2483.65	-69.07	62.60		PASS


## 9.4 Trace data

### [Hopping] Channel Low

DH5

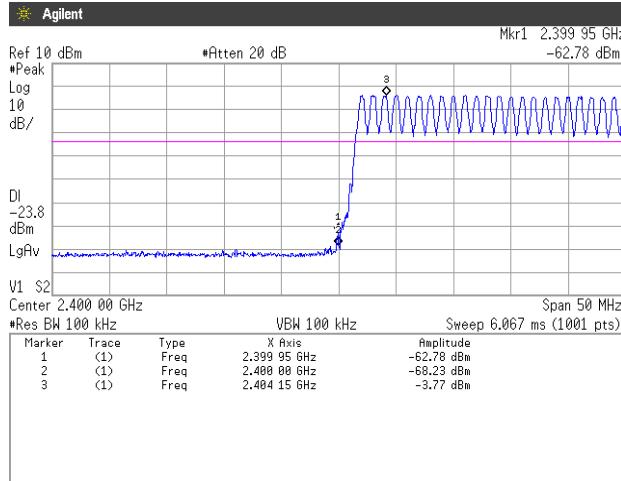


**3-DH5**

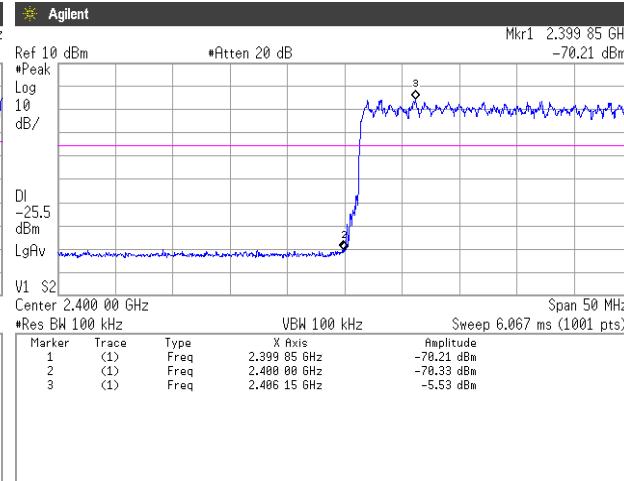


### Channel High



DH5

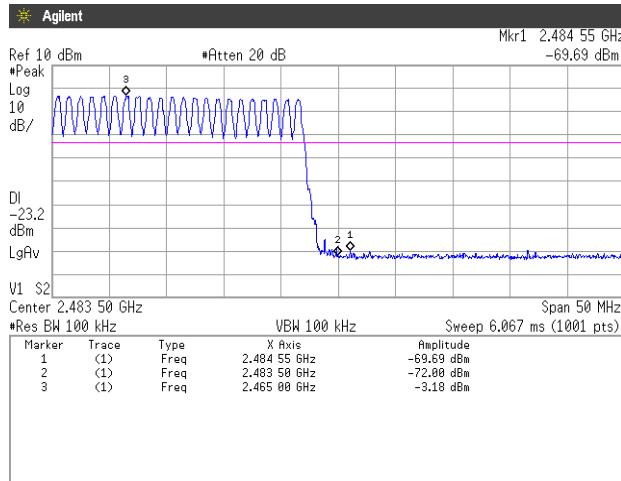



**3-DH5**

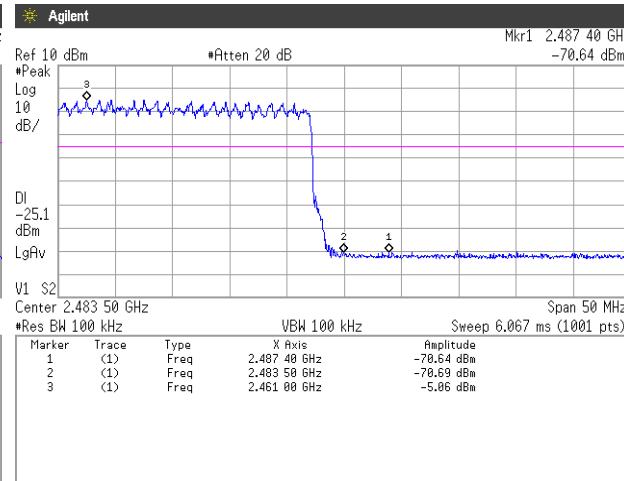

**[No hopping]  
Channel Low  
DH5**

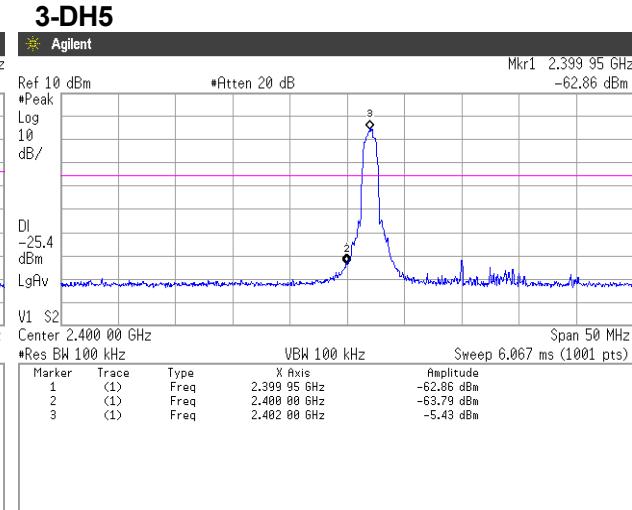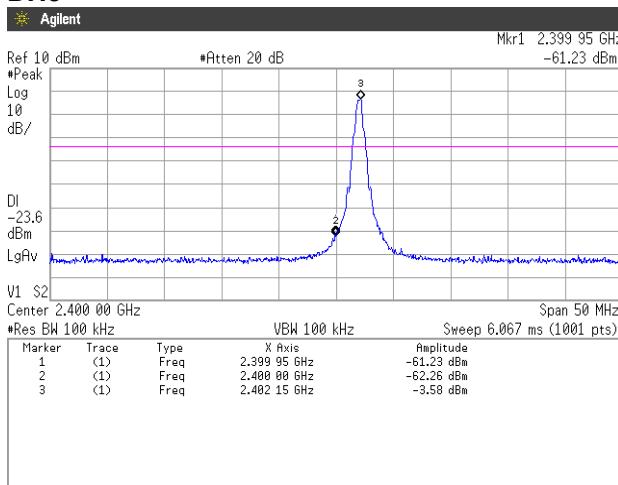

**Channel High  
DH5**

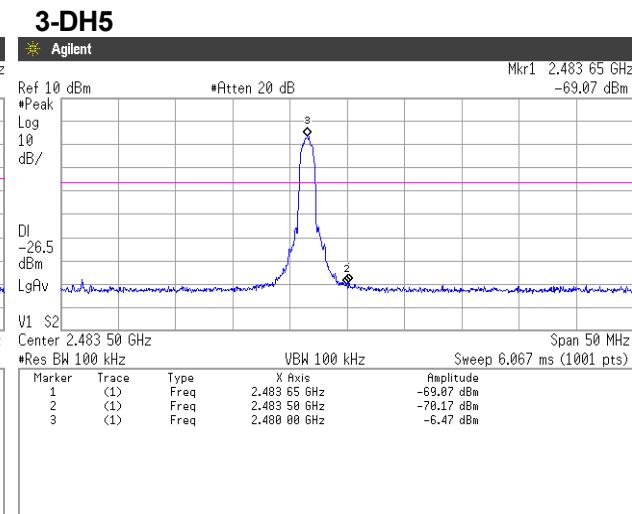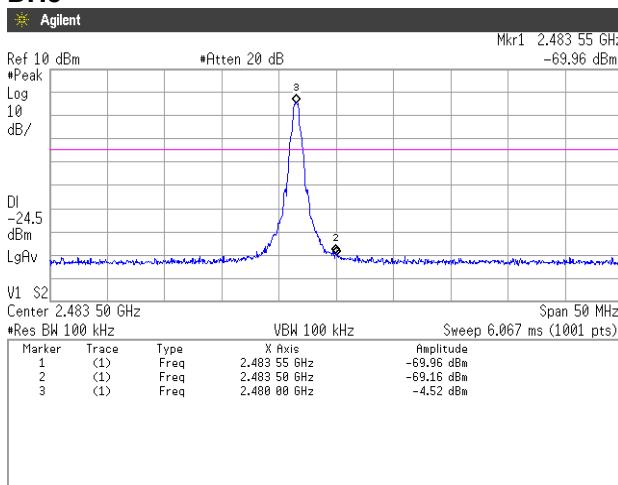

## **10. Spurious emissions - Conducted -**


### **10.1 Measurement procedure** **[FCC 15.247(d)]**

The spurious emissions (Conducted) are measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) Span = wide enough to fully capture the emission being measured.
- b) RBW = 100 kHz.
- c) VBW  $\geq$  RBW.
- d) Sweep time = auto-couple.
- e) Detector = peak.
- f) Trace mode = max hold.

- Test configuration

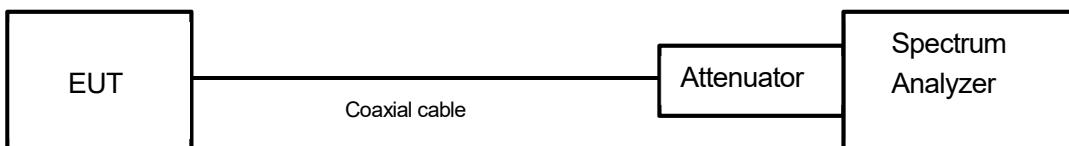

### **10.2 Limit**

In any 100kHz bandwidth outside the frequency band the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

### **10.3 Measurement result**

Date : October 28, 2016  
 Temperature : 22.5 [°C]  
 Humidity : 47.4 [%]  
 Test place : Shielded room No.4



Test engineer :

Kazunori Saito



Channel	Frequency [MHz]	Limit [dB]	Results Chart	Result
Low	2402	At least 20dB below from peak of RF	See the trace Data	PASS
Middle	2441	At least 20dB below from peak of RF	See the trace Data	PASS
High	2480	At least 20dB below from peak of RF	See the trace Data	PASS

## 10.4 Trace data



### [DH5] Channel Low 30MHz-1GHz

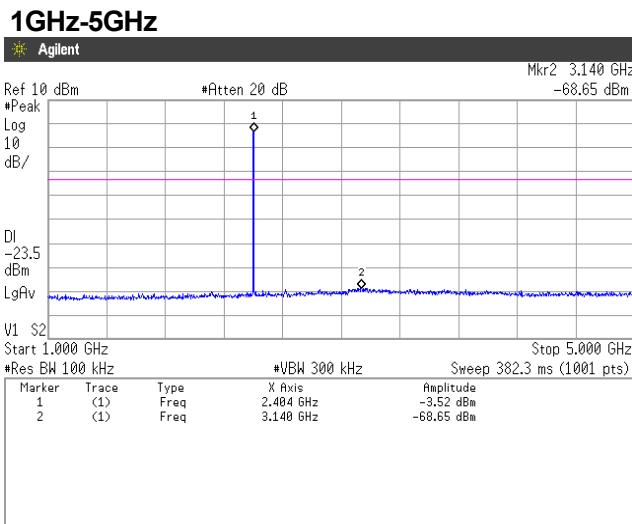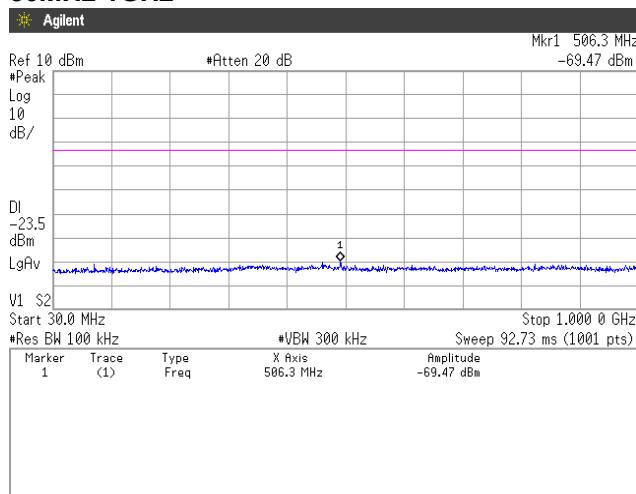


### 5GHz-10GHz

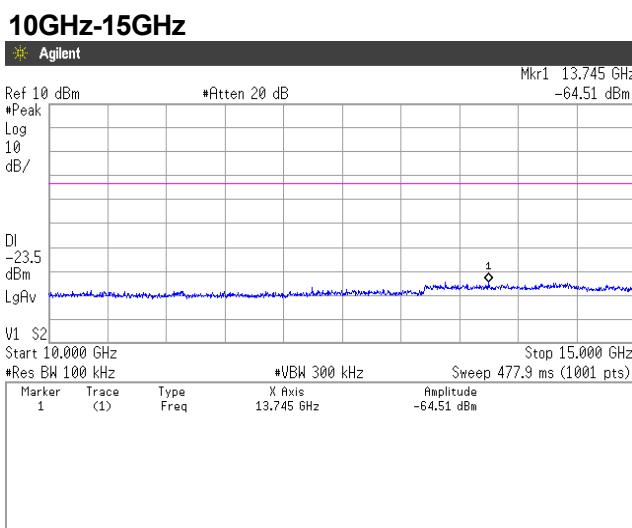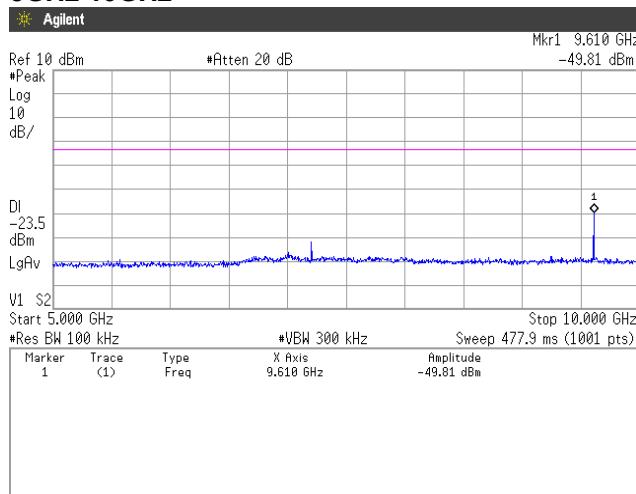


### 15GHz-20GHz

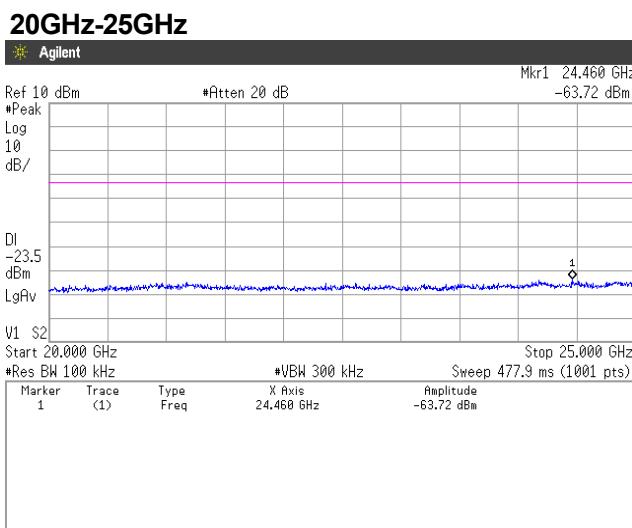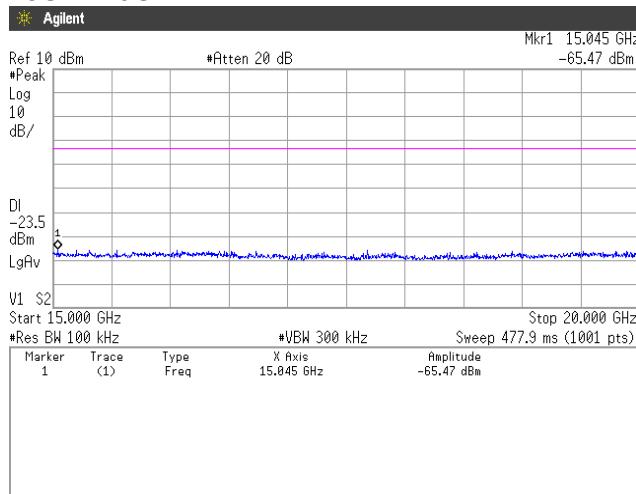


## Channel Middle 30MHz-1GHz

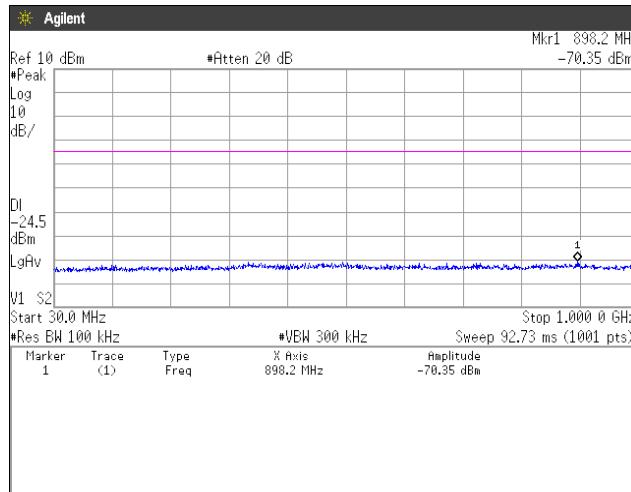


## 1GHz-5GHz

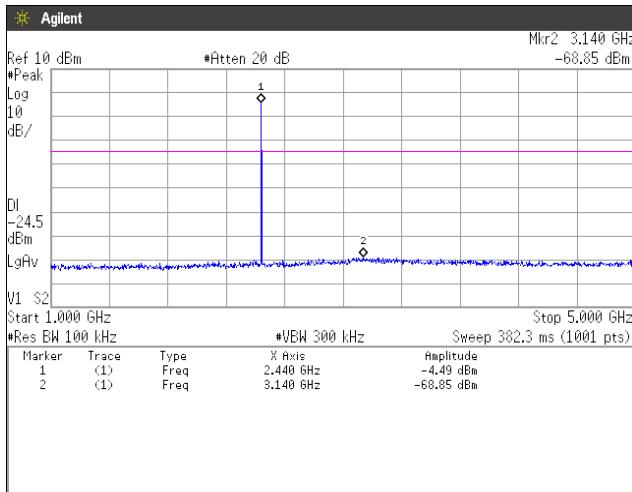


## 5GHz-10GHz

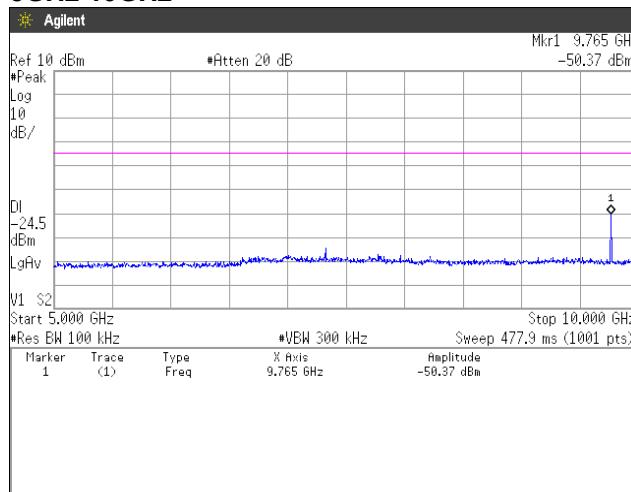


## 10GHz-15GHz

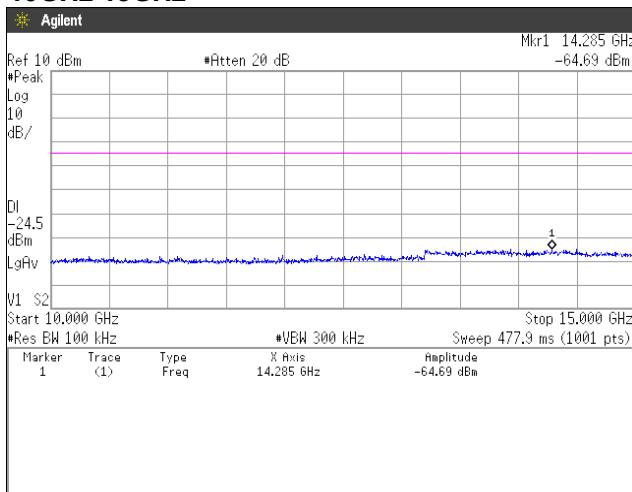


## 15GHz-20GHz

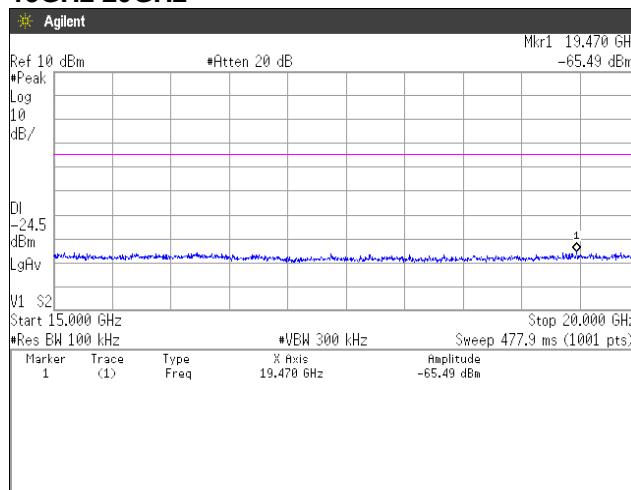


## 20GHz-25GHz

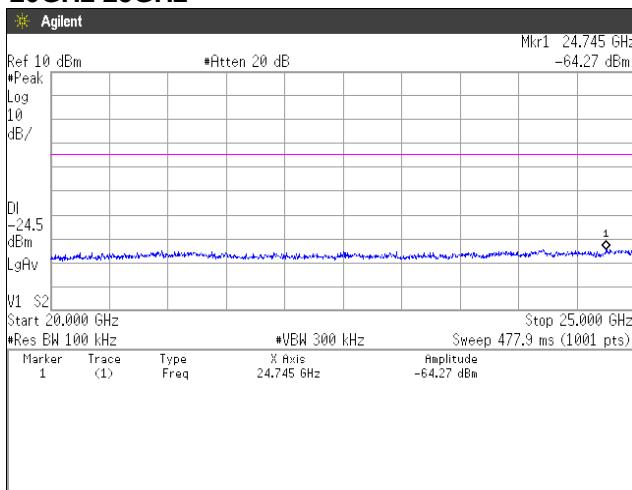


## Channel High 30MHz-1GHz

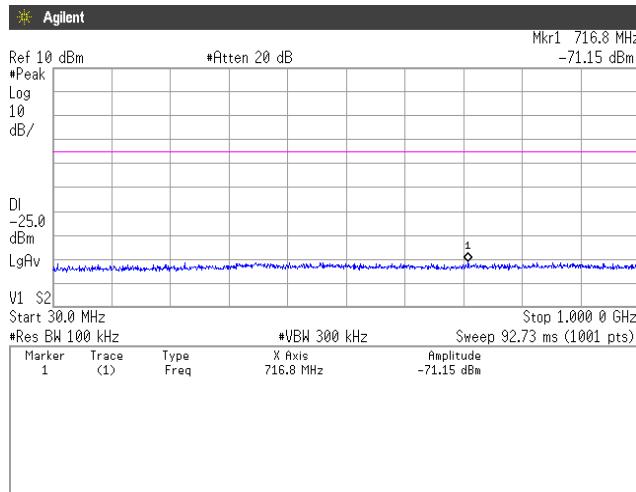


## 1GHz-5GHz

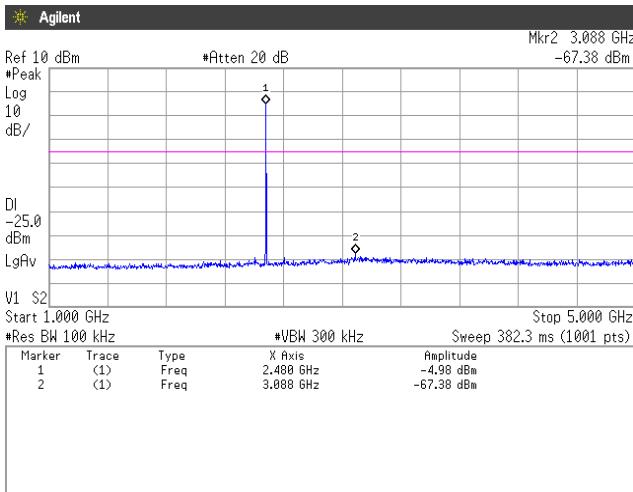


## 5GHz-10GHz

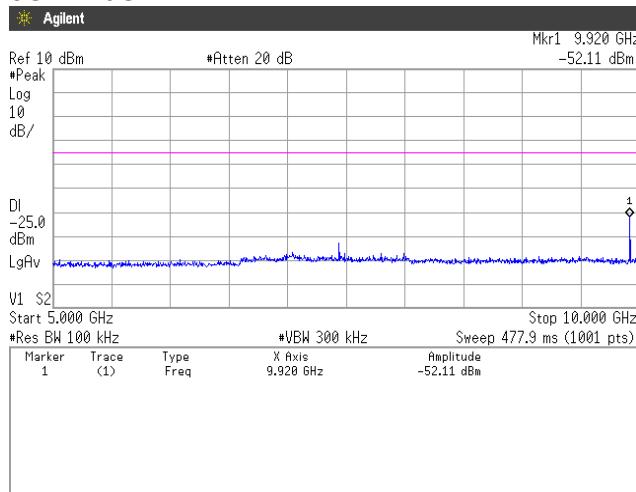


## 10GHz-15GHz

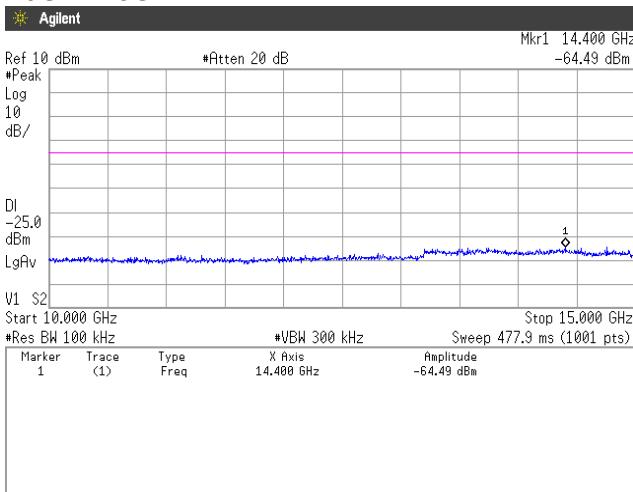

## 15GHz-20GHz

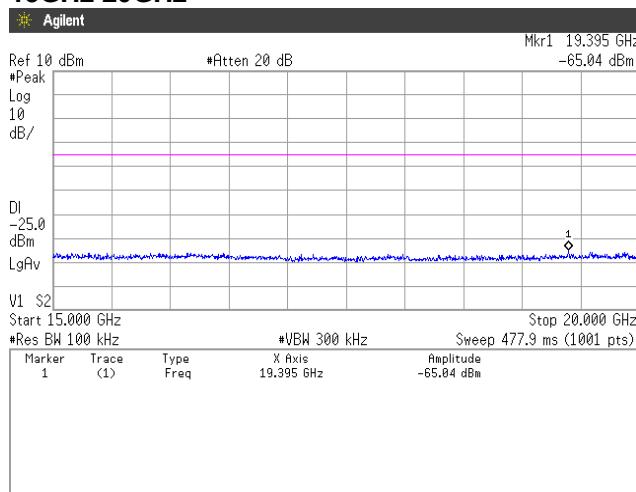


## 20GHz-25GHz

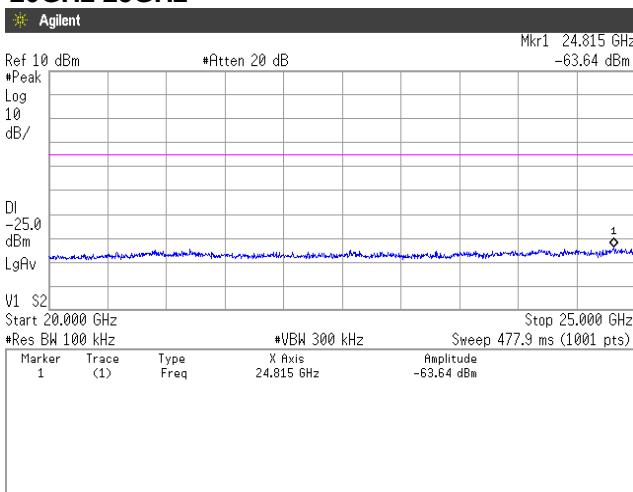




Zacta


### [3-DH5] Channel Low 30MHz-1GHz

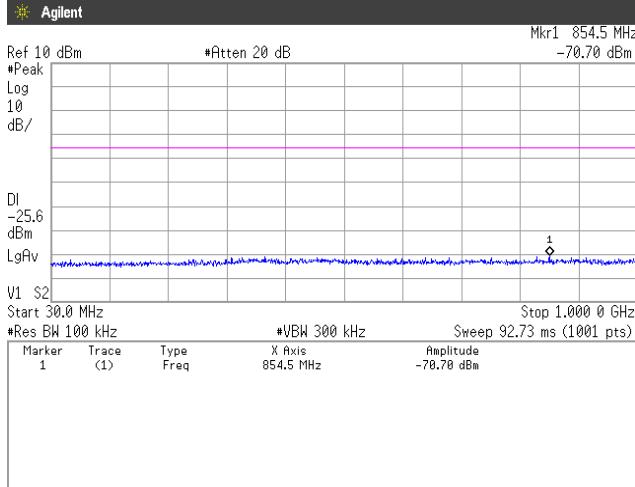


### 1GHz-5GHz

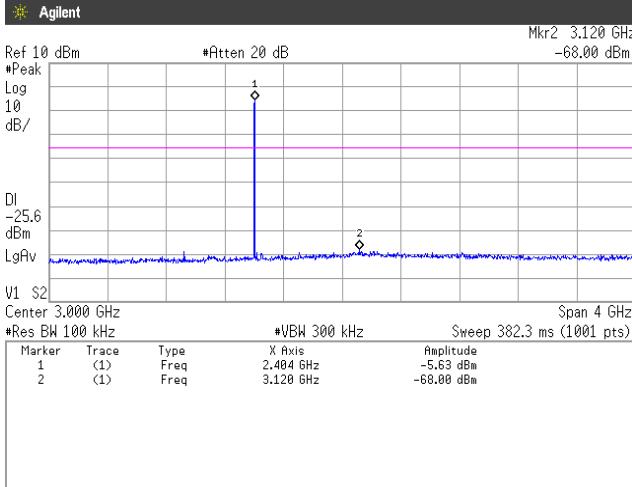


### 5GHz-10GHz

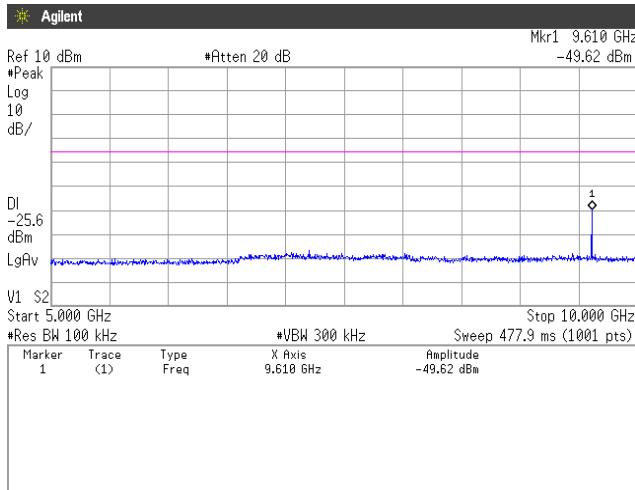


### 10GHz-15GHz

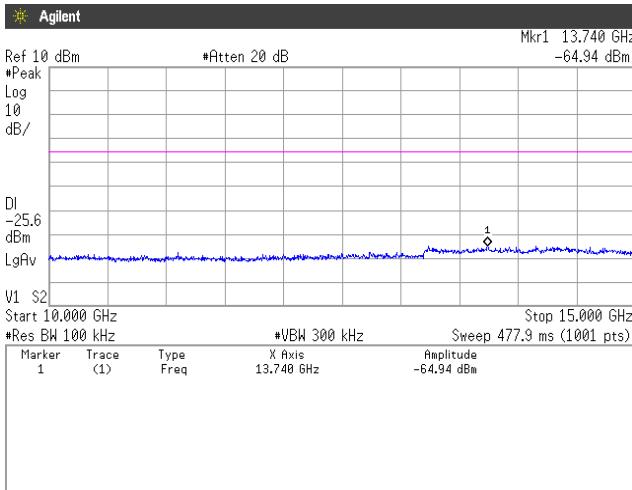

### 15GHz-20GHz

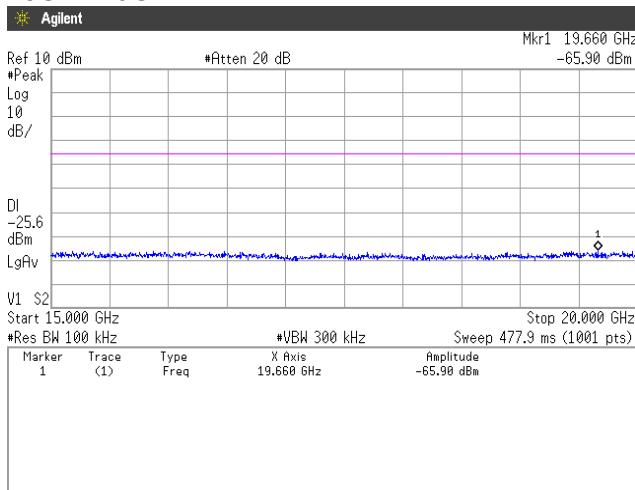


### 20GHz-25GHz

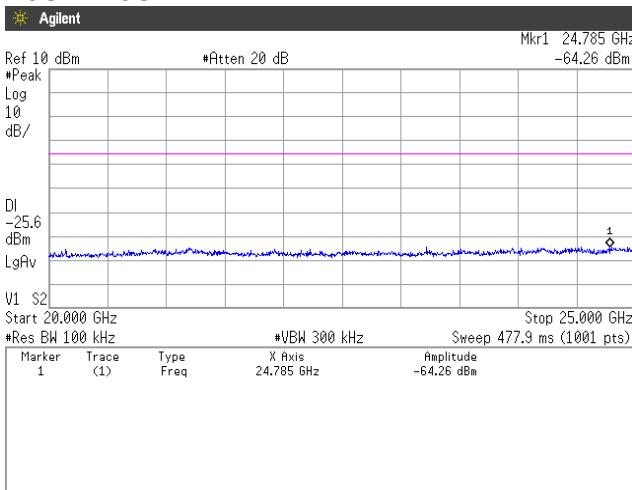




Zacta


## Channel Middle 30MHz-1GHz

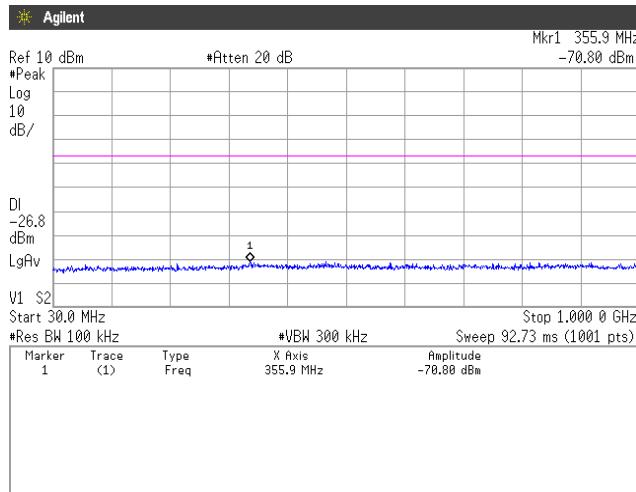


## 1GHz-5GHz

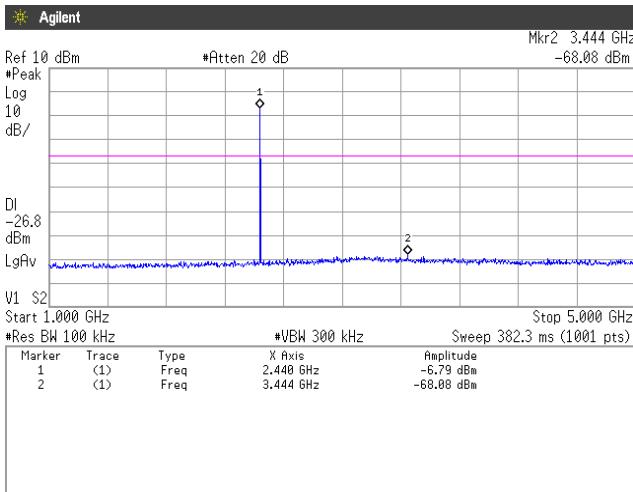


## 5GHz-10GHz

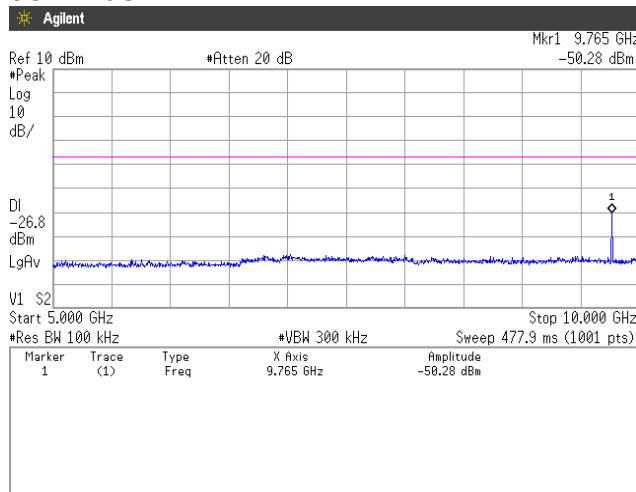


## 10GHz-15GHz

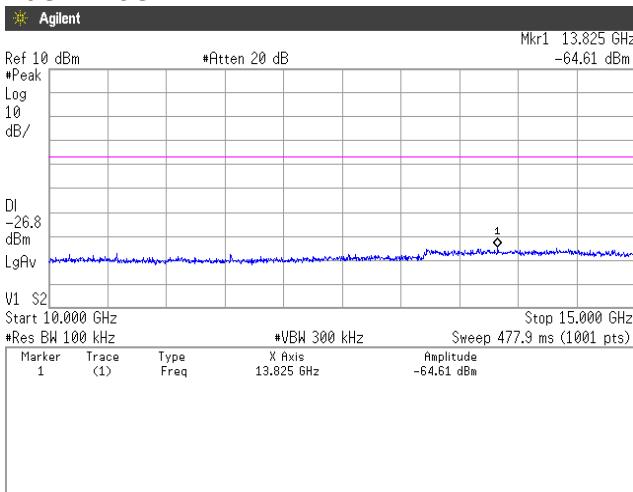

## 15GHz-20GHz

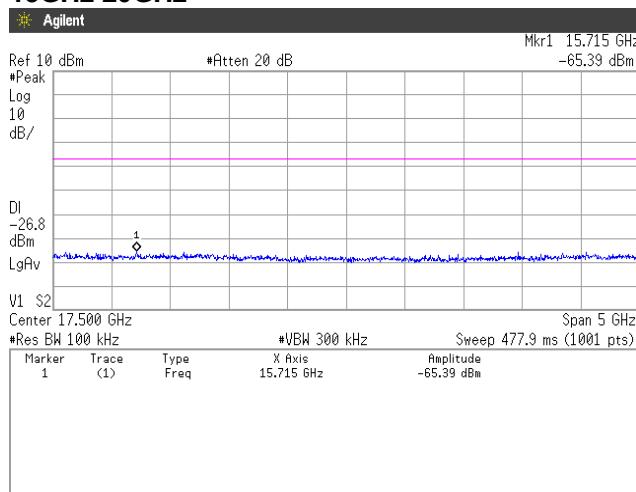


## 20GHz-25GHz

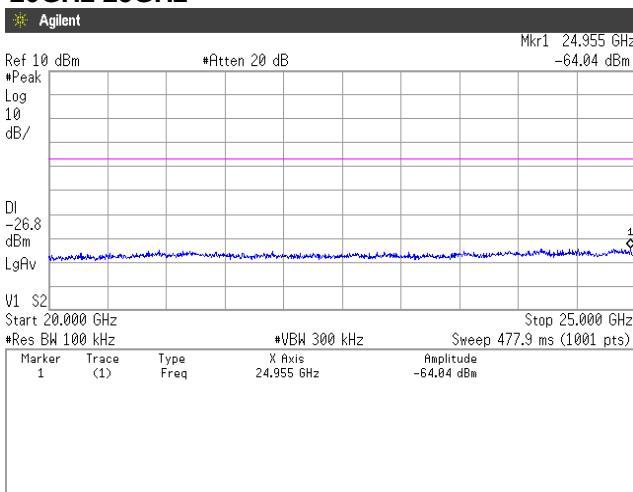




Zacta


## Channel High 30MHz-1GHz

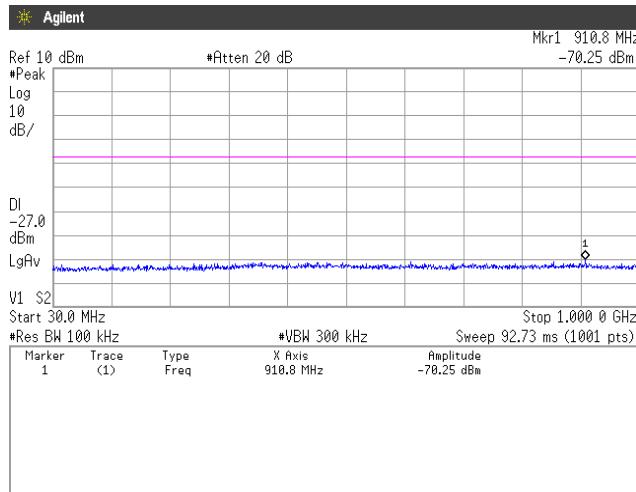


## 1GHz-5GHz

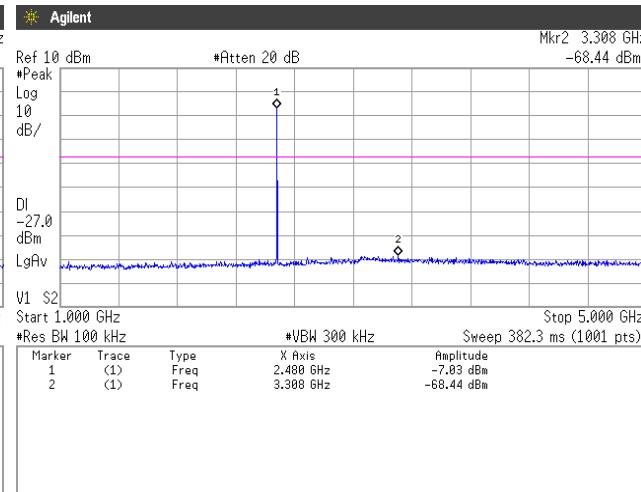


## 5GHz-10GHz

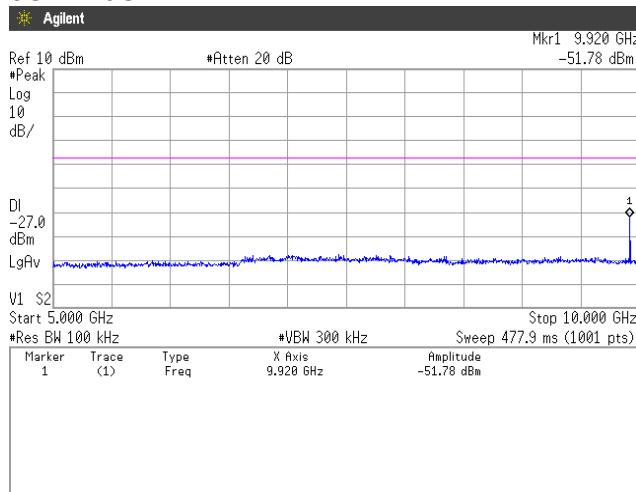


## 10GHz-15GHz

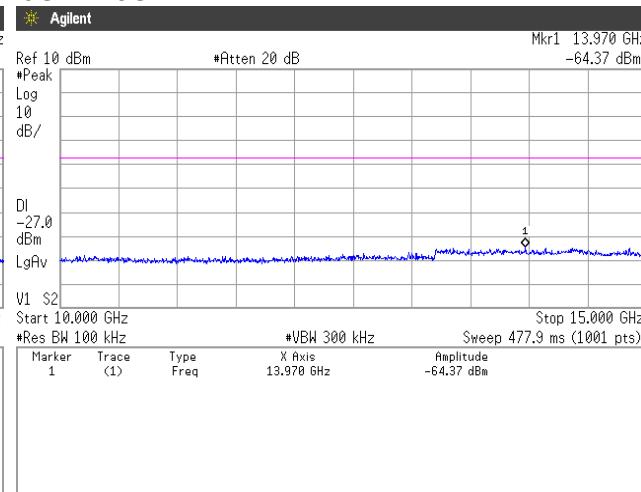

## 15GHz-20GHz

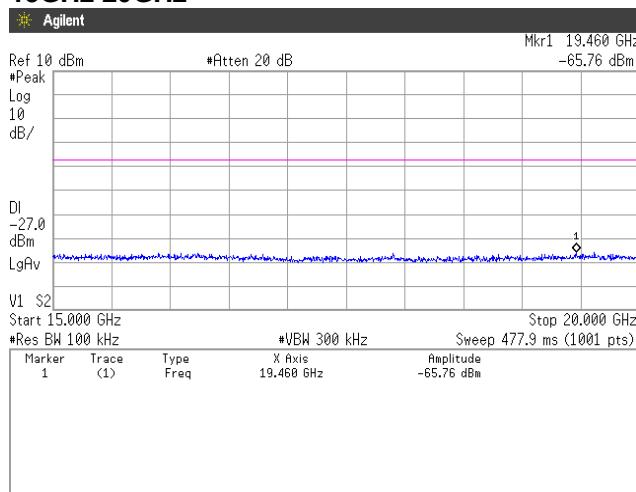

## 20GHz-25GHz

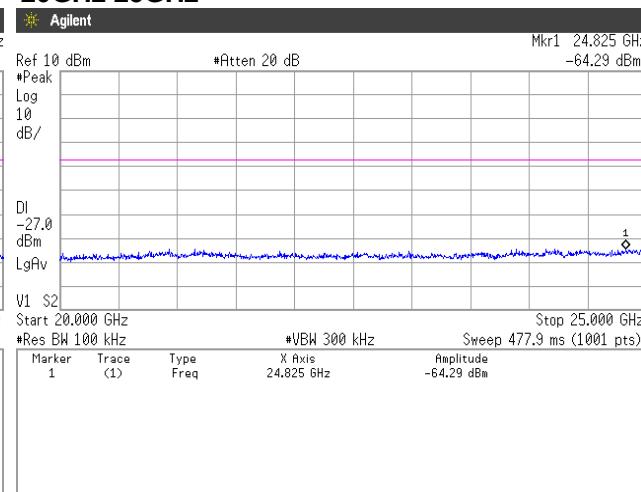

## **11. Spurious Emissions - Radiated -**

### **11.1 Measurement procedure**

#### **[FCC 15.247(d), 15.205, 15.209]**

Test was applied by following conditions.

Test method	:	ANSI C63.10
Frequency range	:	9kHz to 25GHz
Test place	:	3m Semi-anechoic chamber
EUT was placed on	:	Styrofoam table / (W)1.0m × (D)1.0m × (H)0.8m (below 1GHz) Styrofoam table / (W)0.6m × (D)0.6m ×(H)1.5m (above 1GHz)
Antenna distance	:	3m
Test receiver setting	:	Below 1GHz
- Detector	:	Average (9kHz-90kHz, 110kHz-490kHz), Quasi-peak
- Bandwidth	:	200Hz, 120kHz
Spectrum analyzer setting	:	Above 1GHz
- Peak	:	RBW=1MHz, VBW=3MHz, Span=0Hz, Sweep time = auto-couple
- Average	:	RBW=1MHz, VBW=1kHz, Span=0Hz, Sweep time = auto-couple Display mode=Linear

#### **Average Measurement Setting [VBW]**


Mode	Duty Cycle (%)	T <sub>on</sub> (us)	T <sub>off</sub> (us)	1/T <sub>on</sub> (kHz)	Determined VBW Setting
Bluetooth 4.2 EDR	76.93	2885	865	0.347	1kHz

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site.

Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

Radiated emission measurements are performed at 3m distance with the broadband antenna (Loop antenna, Biconical antenna, Log periodic antenna, Double ridged guide antenna and Broad-band horn Antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1m to 4m and stopped at height producing the maximum emission. As for the Loop antenna, it is positioned with its plane vertical, and the center of the Loop antenna is 1m above the ground plane. The EUT is Placed on a turntable, which is 0.8m/1.5m above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. The test results represent the worst case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation. Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.

#### **- Test configuration**

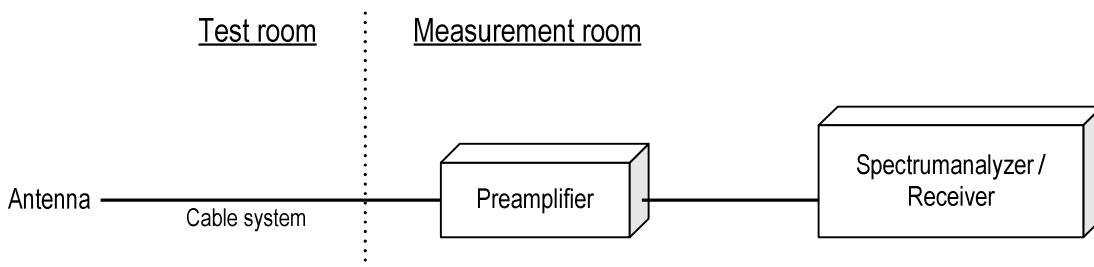

## 11.2 Calculation method

[9kHz to 150kHz]

Emission level = Reading + (Ant. factor + Cable system loss )

Margin = Limit – Emission level

[150kHz to 25GHz]

Emission level = Reading + (Ant. factor + Cable system loss – Amp. Gain)

Margin = Limit – Emission level

Example:

Limit @ 4804.0MHz : 74.0dBuV/m (Peak Limit)

S.A Reading = 49.0dBuV Cable system loss = 8.3dB

Result = 49.0 + 8.3 = 57.3dBuV/m

Margin = 74.0 - 57.3 = 16.7dB

## 11.3 Limit

Frequency [MHz]	Field strength		Distance [m]
	[uV/m]	[dBuV/m]	
0.009-0.490	2400 / F [kHz]	20logE [uV/m]	300
0.490-1.705	24000 / F [kHz]	20logE [uV/m]	30
1.705-30	30	29.5	30
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level [dBuV/m] = 20log Emission [uV/m]
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition modulation.

## 11.4 Test data

Date : December 19, 2016  
 Temperature : 23.4 [°C]  
 Humidity : 24.7 [%]  
 Test place : 3m Semi-anechoic chamber

Test engineer : Kazunori Saito


Date : December 21, 2016  
 Temperature : 23.4 [°C]  
 Humidity : 23.1 [%]  
 Test place : 3m Semi-anechoic chamber

Test engineer : Kazunori Saito

### 11.4.1 Transmission mode

**[DH5]**  
**Channel Low**  
**BELOW 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
 [ 3m Semi-anechoic chamber ]

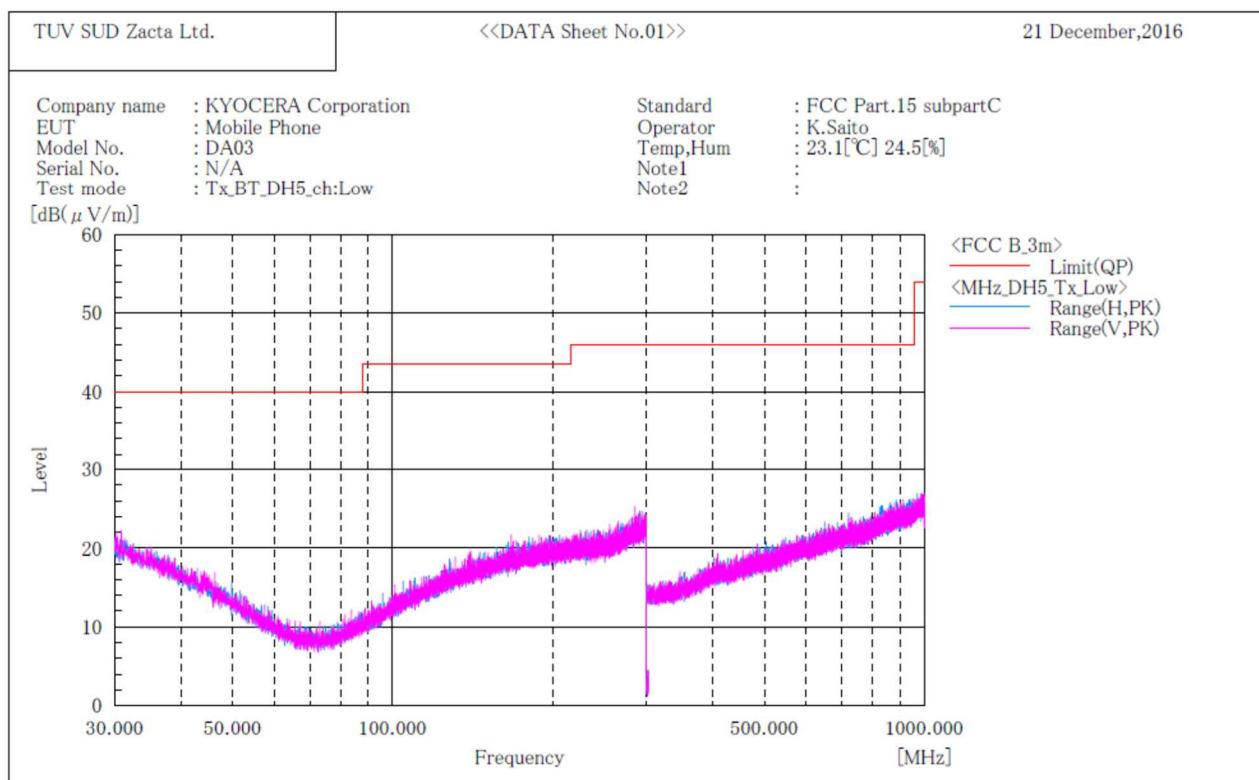

#### Final Result


No.	Frequency (P) [MHz]	c. f [dB(1/m)]	Height [cm]	Angle [°]	Remark
-----	------------------------	-------------------	----------------	--------------	--------

#### Note:

- Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
- No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

**[DH5]**  
**Channel Low**  
**ABOVE 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

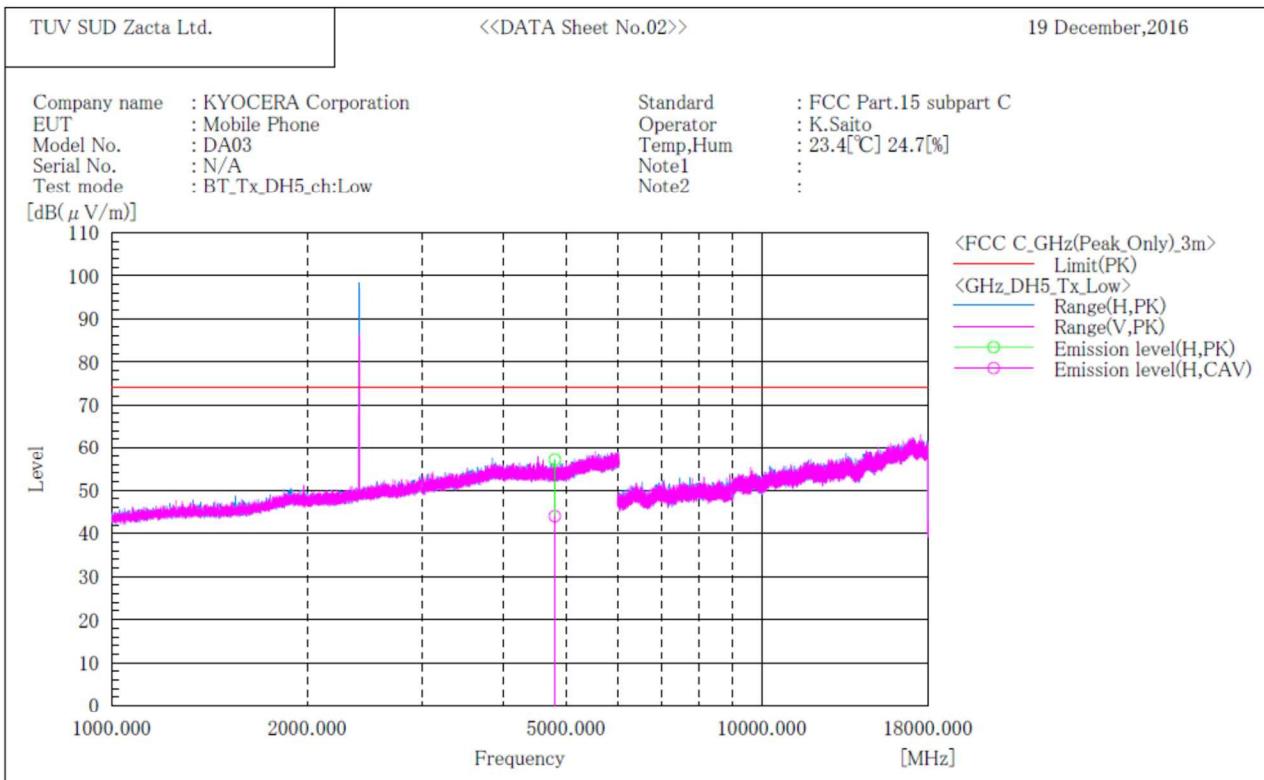

## Final Result


No.	Frequency [MHz]	(P) PK	Reading [dB(μV)]	Reading [dB(μV)]	c. f [dB(1/m)]	Result PK	Result CAV	Limit PK	Margin PK	Margin CAV	Height [cm]	Angle [°]	Remark
1	4804.000	H	48.9	35.8	8.2	57.1	44.0	74.0	16.9	10.0	140.0	231.0	

## Note:

- Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
- No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

**[DH5]**  
**Channel Middle**  
**BELOW 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

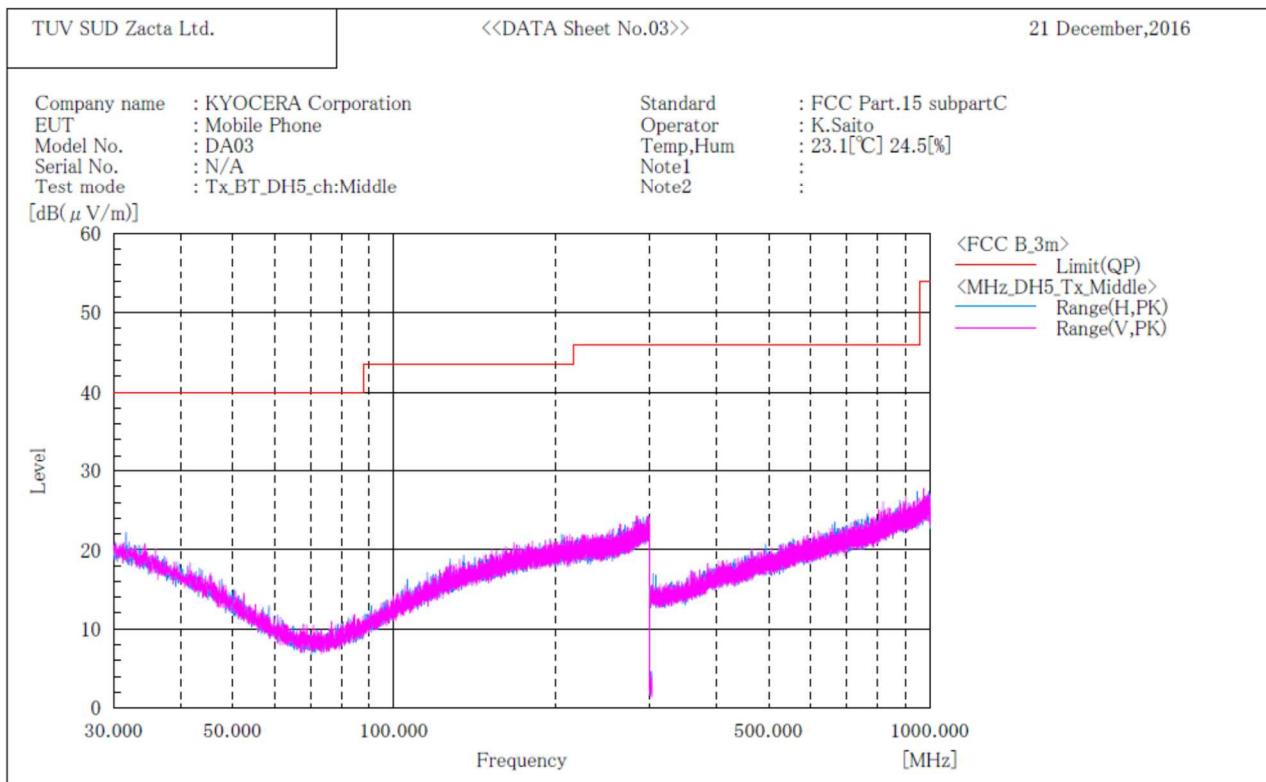


Final Result

No.	Frequency (P)	c. f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

**[DH5]**  
**Channel Middle**  
**ABOVE 1GHz**

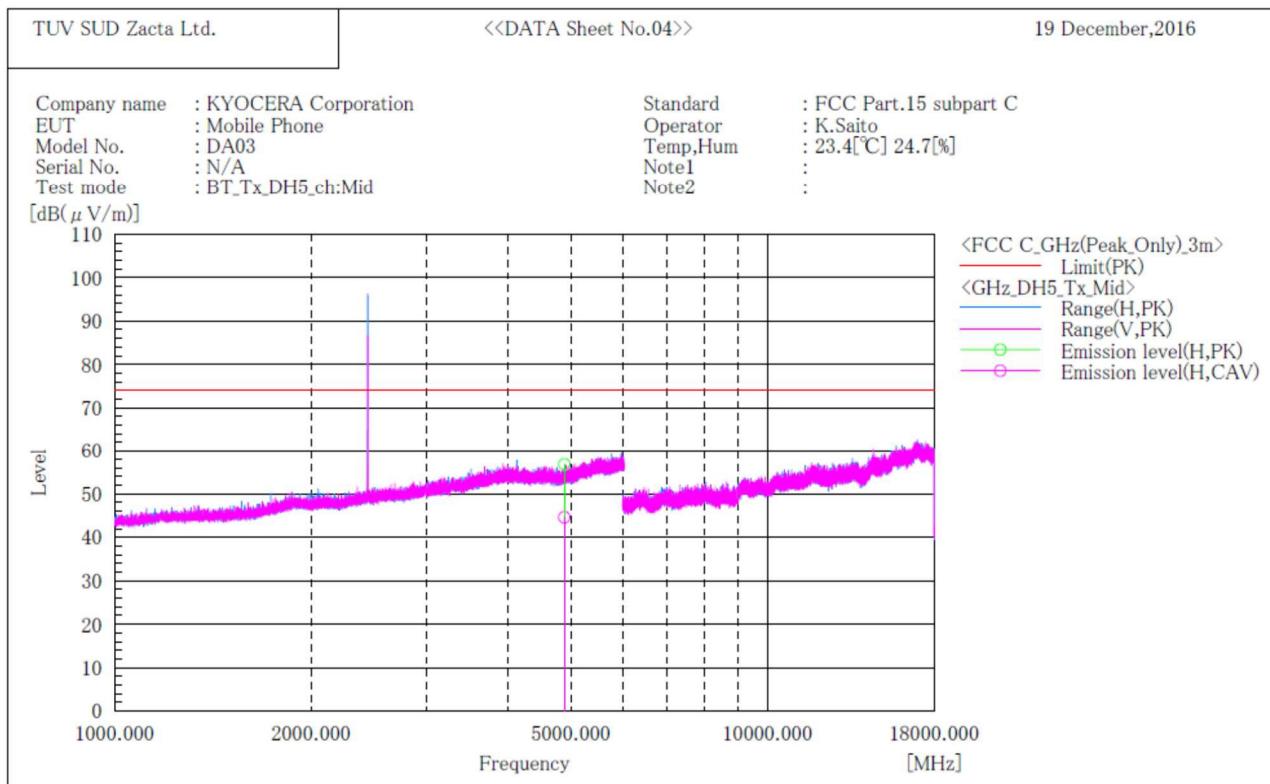\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]


## Final Result


No.	Frequency [MHz]	(P) PK H	Reading PK [dB(μV)] 48.1	Reading CAV [dB(μV)] 35.9	c. f. [dB(1/m)] 8.7	Result PK [dB(μV/m)] 56.8	Result CAV [dB(μV/m)] 44.6	Limit PK [dB] 74.0	Margin PK [dB] 17.2	Margin CAV [dB] 9.4	Height [cm] 136.0	Angle [°] 207.0	Remark
1	4882.000												

## Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

**[DH5]**  
**Channel High**  
**BELOW 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

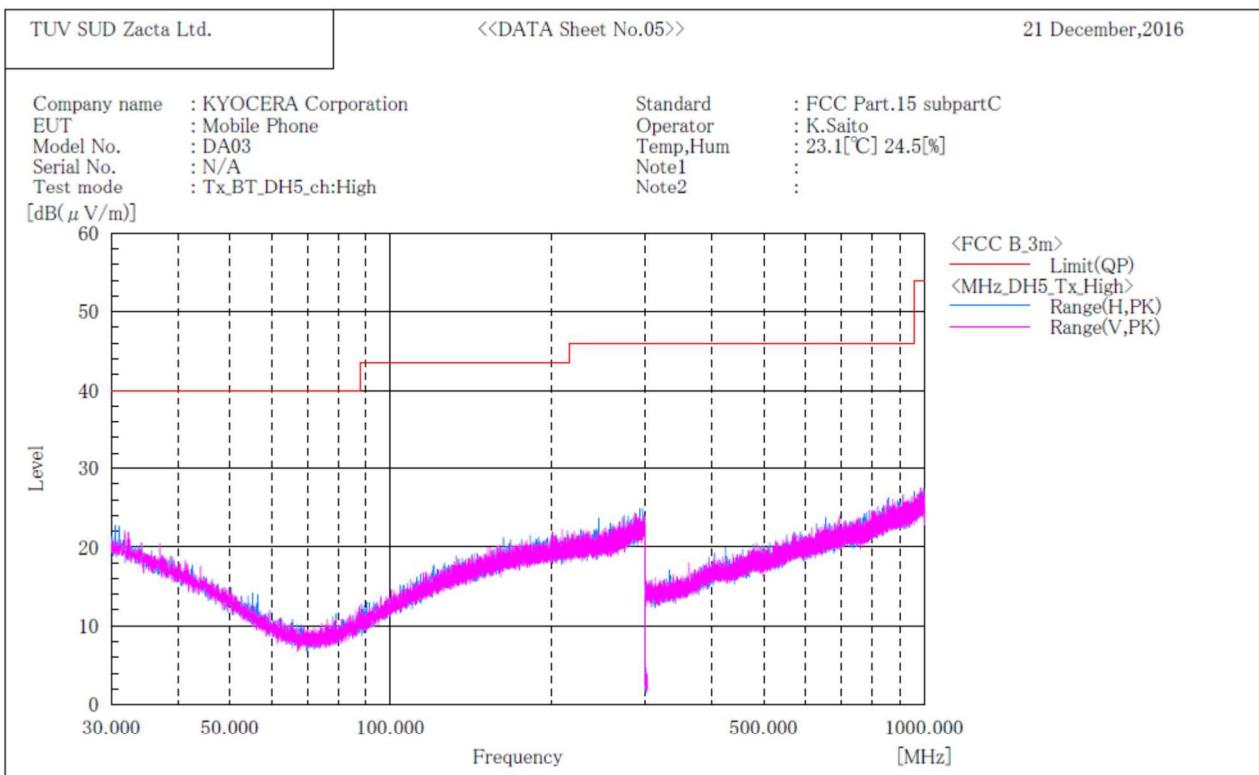

Final Result


No.	Frequency (P) [MHz]	c. f [dB(1/m)]	Height [cm]	Angle [°]	Remark
-----	------------------------	-------------------	----------------	--------------	--------

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

**[DH5]**  
**Channel High**  
**ABOVE 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

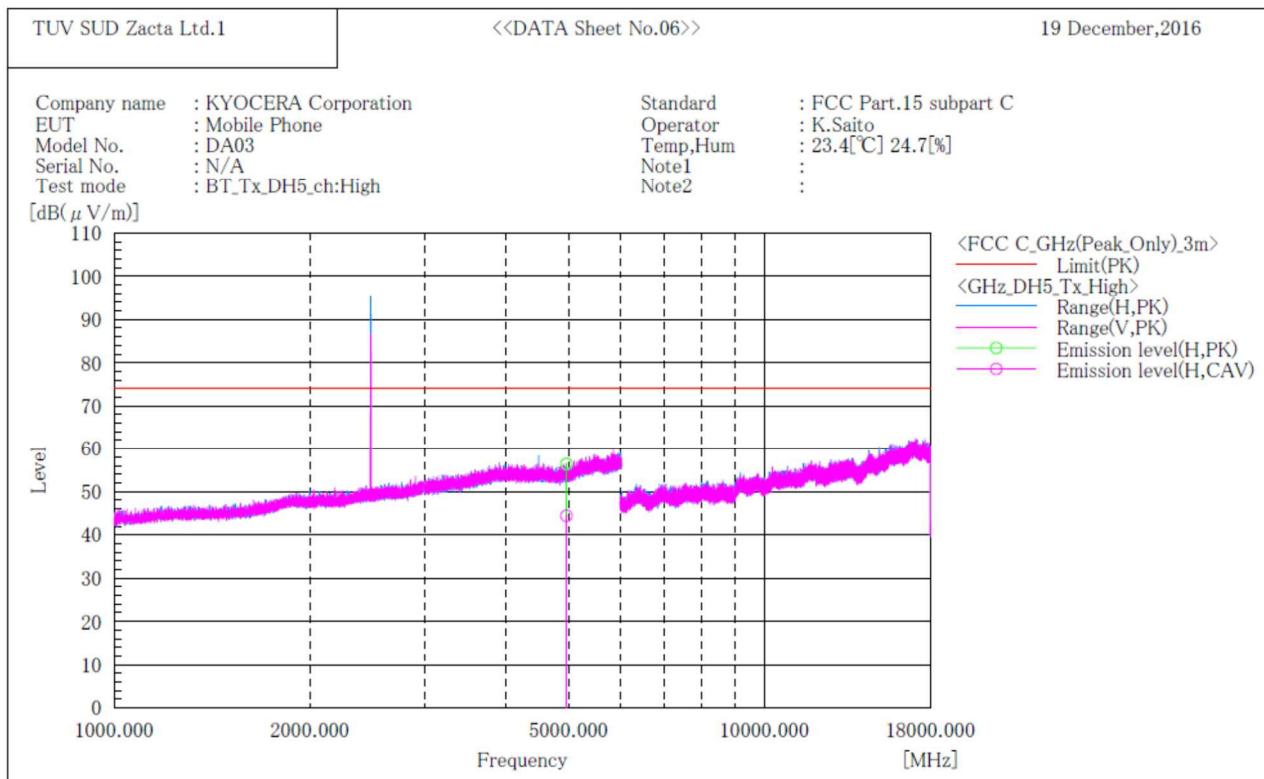

Final Result


No.	Frequency [MHz]	(P) PK H	Reading [dB(μV)]	Reading [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Limit PK [dB]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]	Remark
1	4960.000	H	47.6	35.6	8.8	56.4	44.4	74.0	17.6	9.6	148.0	233.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

**[3-DH5]**  
**Channel Low**  
**BELOW 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

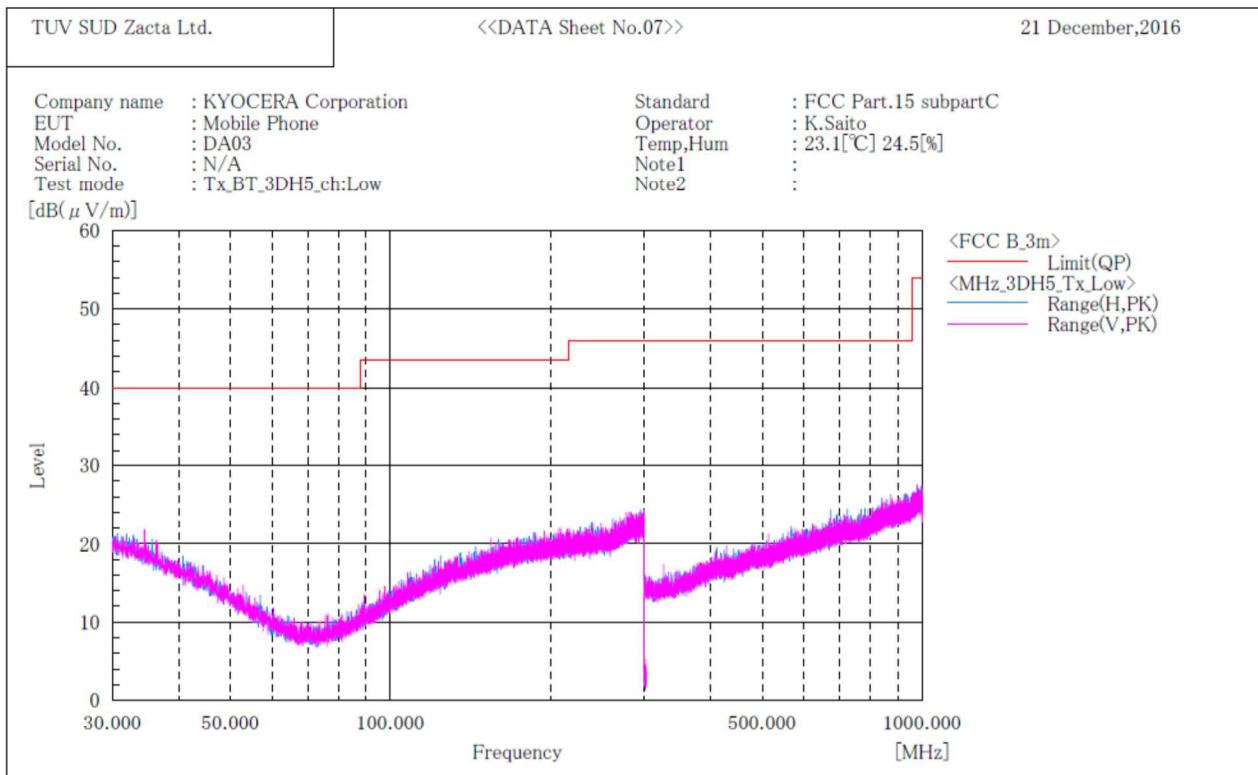

Final Result


No.	Frequency (P) [MHz]	c. f [dB(1/m)]	Height [cm]	Angle [°]	Remark
-----	------------------------	-------------------	----------------	--------------	--------

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

**[3-DH5]**  
**Channel Low**  
**ABOVE 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
 [ 3m Semi-anechoic chamber ]

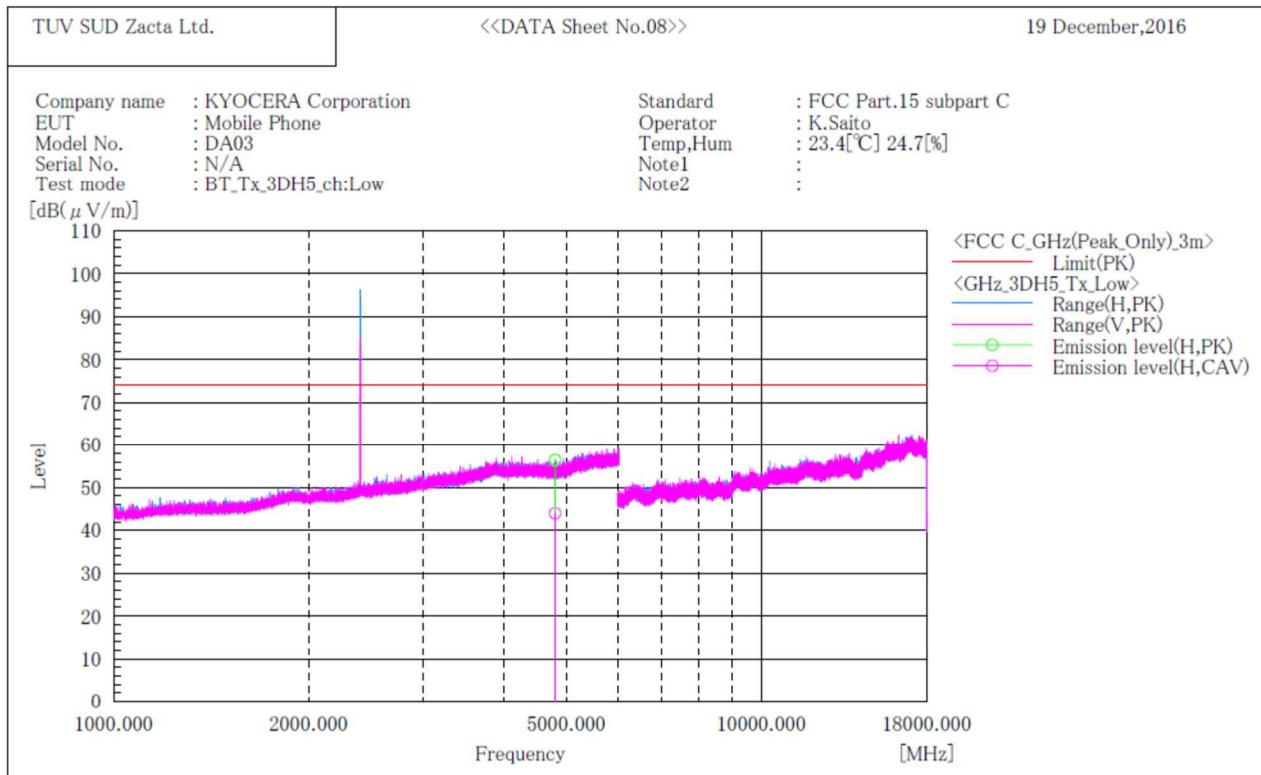

Final Result


No.	Frequency [MHz]	(P) PK	Reading PK [dB(μ V)]	Reading CAV [dB(μ V)]	c. f [dB(1/m)]	Result PK [dB(μ V/m)]	Result CAV [dB(μ V/m)]	Limit PK [dB(μ V/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]	Remark
1	4804.000	H	48.2	35.8	8.2	56.4	44.0	74.0	17.6	10.0	155.0	170.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

**[3-DH5]**  
**Channel Middle**  
**BELOW 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
 [ 3m Semi-anechoic chamber ]

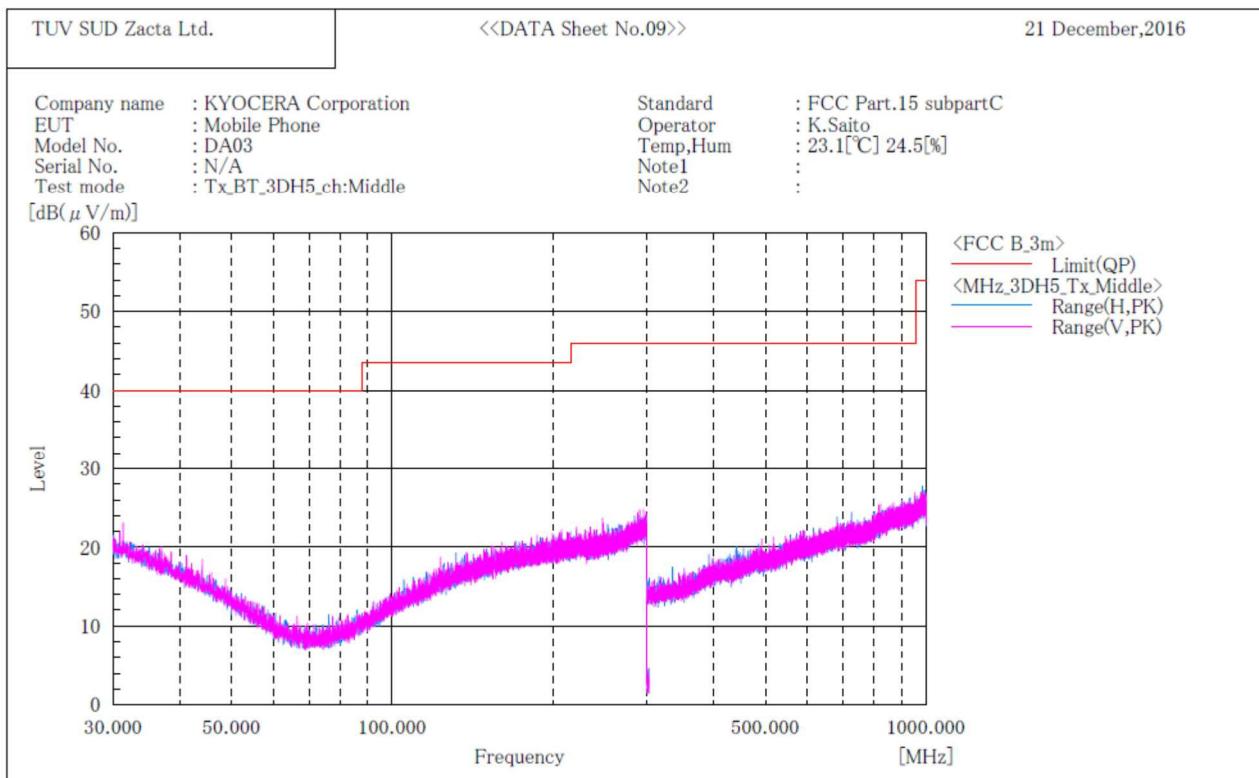

Final Result


No.	Frequency (P) [MHz]	c. f [dB(1/m)]	Height [cm]	Angle [°]	Remark
-----	------------------------	-------------------	----------------	--------------	--------

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp )]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

**[3-DH5]**  
**Channel Middle**  
**ABOVE 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
 [ 3m Semi-anechoic chamber ]

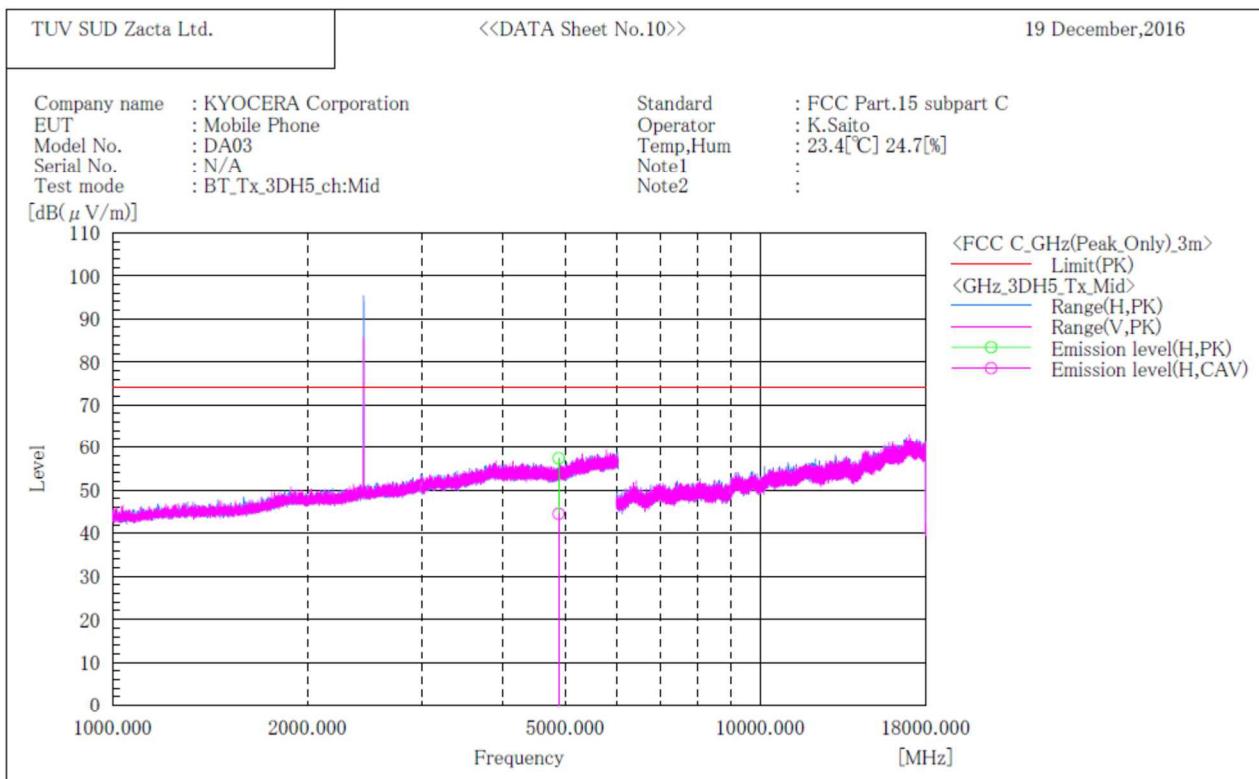

## Final Result


No.	Frequency	(P)	Reading PK	Reading CAV	c. f	Result PK	Result CAV	Limit PK	Margin PK	Margin CAV	Height	Angle	Remark
	[MHz]		[dB(μ V)]	[dB(μ V)]	[dB(1/m)]	[dB(μ V/m)]	[dB(μ V/m)]	[dB(μ V/m)]	[dB]	[dB]	[cm]	[°]	
1	4882.000	H	48.7	35.8	8.7	57.4	44.5	74.0	16.6	9.5	142.0	241.0	

## Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp )]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

**[3-DH5]**  
**Channel High**  
**BELOW 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

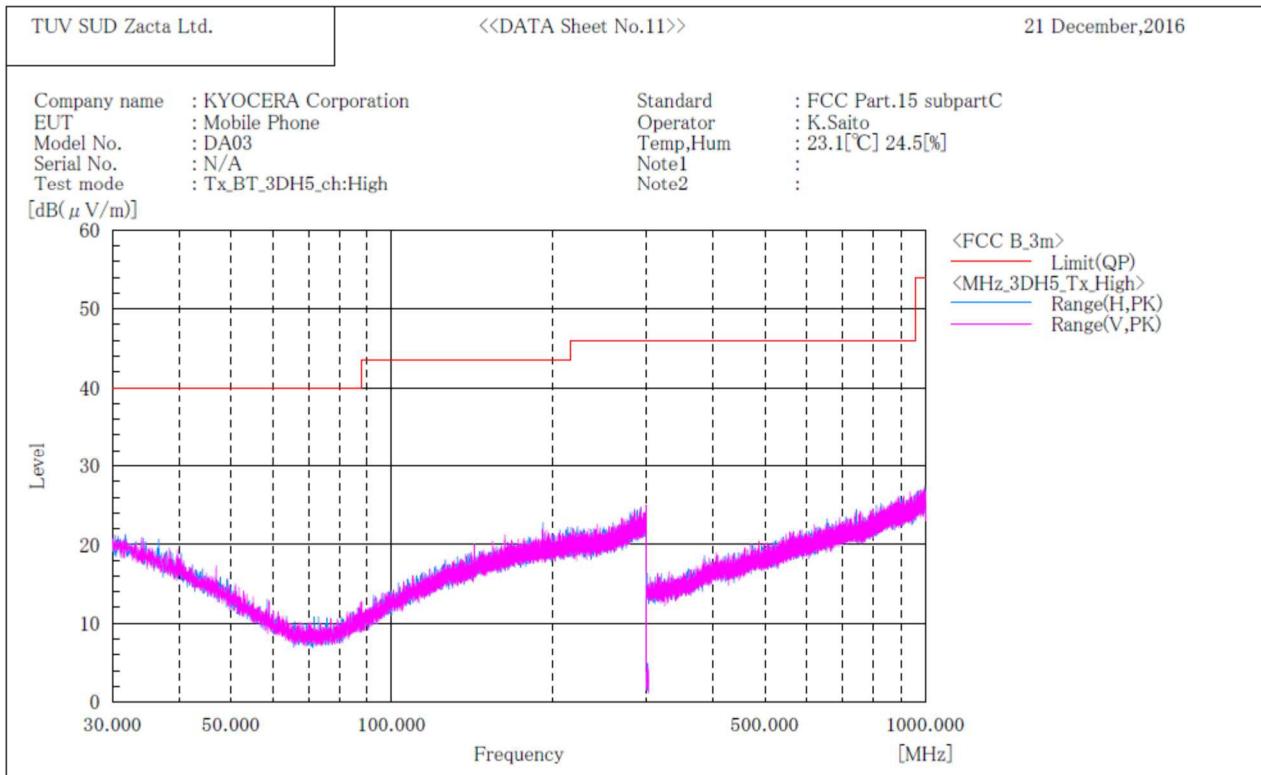

Final Result


No.	Frequency (P) [MHz]	c. f [dB(1/m)]	Height [cm]	Angle [°]	Remark
-----	------------------------	-------------------	----------------	--------------	--------

Note:

- Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
- No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

**[3-DH5]**  
**Channel High**  
**ABOVE 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
 [ 3m Semi-anechoic chamber ]

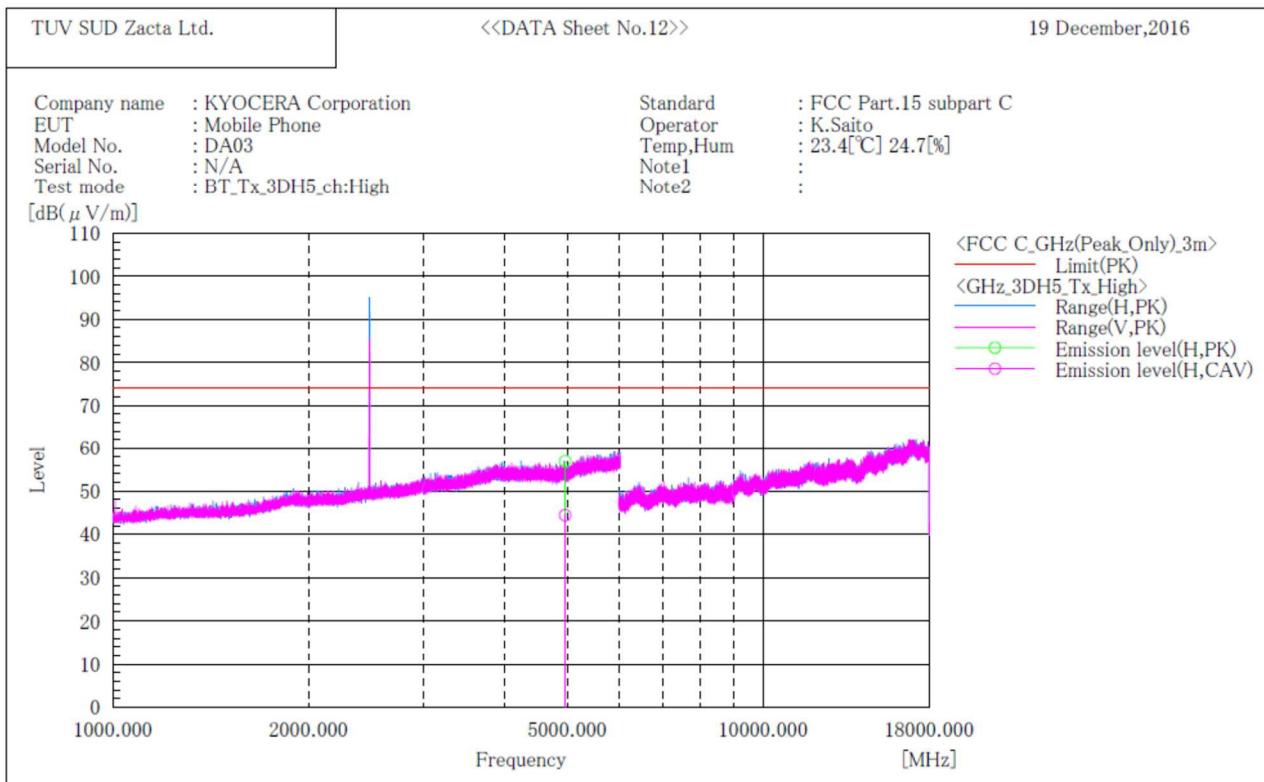

Final Result

No.	Frequency [MHz]	(P) H	Reading PK [dB(μV)]	Reading CAV [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]	Remark
1	4960.000	H	48.1	35.6	8.8	56.9	44.4	74.0	17.1	9.6	144.0	156.0	


Note:

- Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
- No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

### 11.4.2 Receive mode

#### Channel Low BELOW 1GHz

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
 [ 3m Semi-anechoic chamber ]

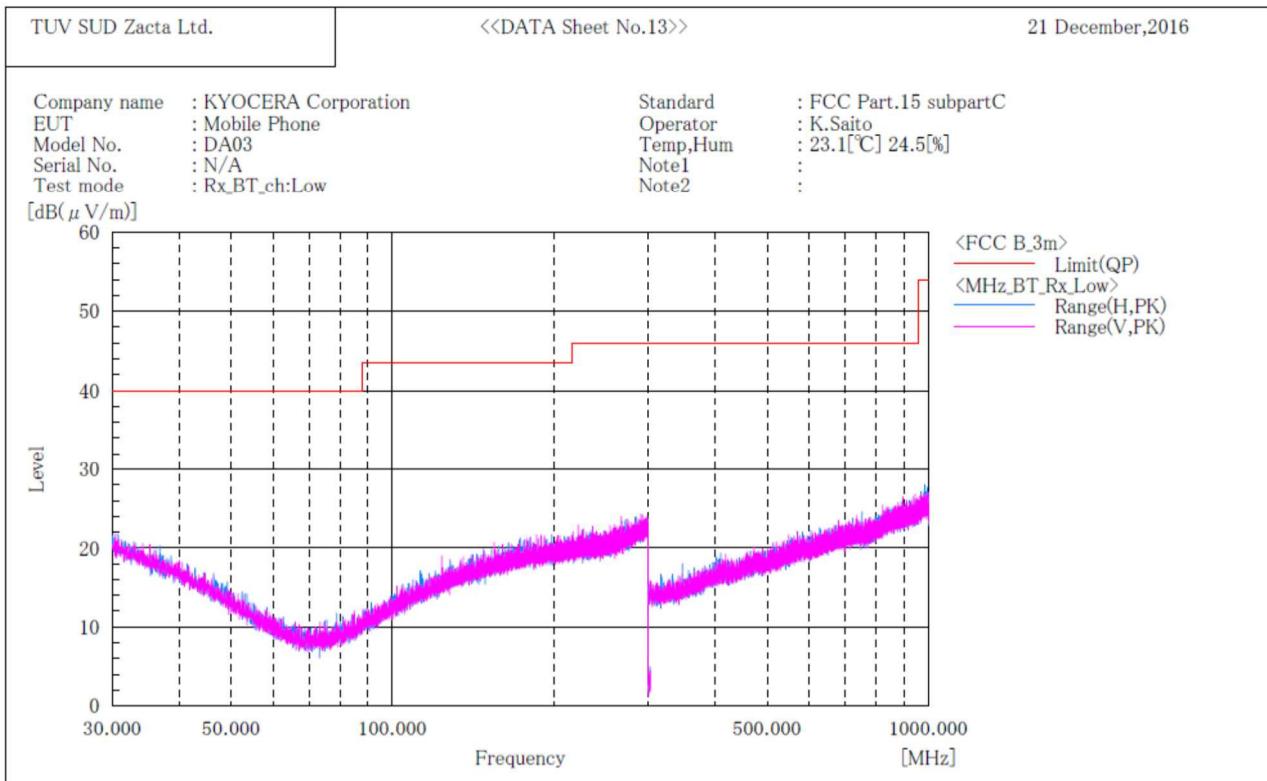

#### Final Result


No.	Frequency (P) [MHz]	c. f [dB(1/m)]	Height [cm]	Angle [°]	Remark
-----	------------------------	-------------------	----------------	--------------	--------

#### Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz and 1GHz to 25GHz at the 3 meters distance.

**Channel Middle  
BELOW 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
 [ 3m Semi-anechoic chamber ]

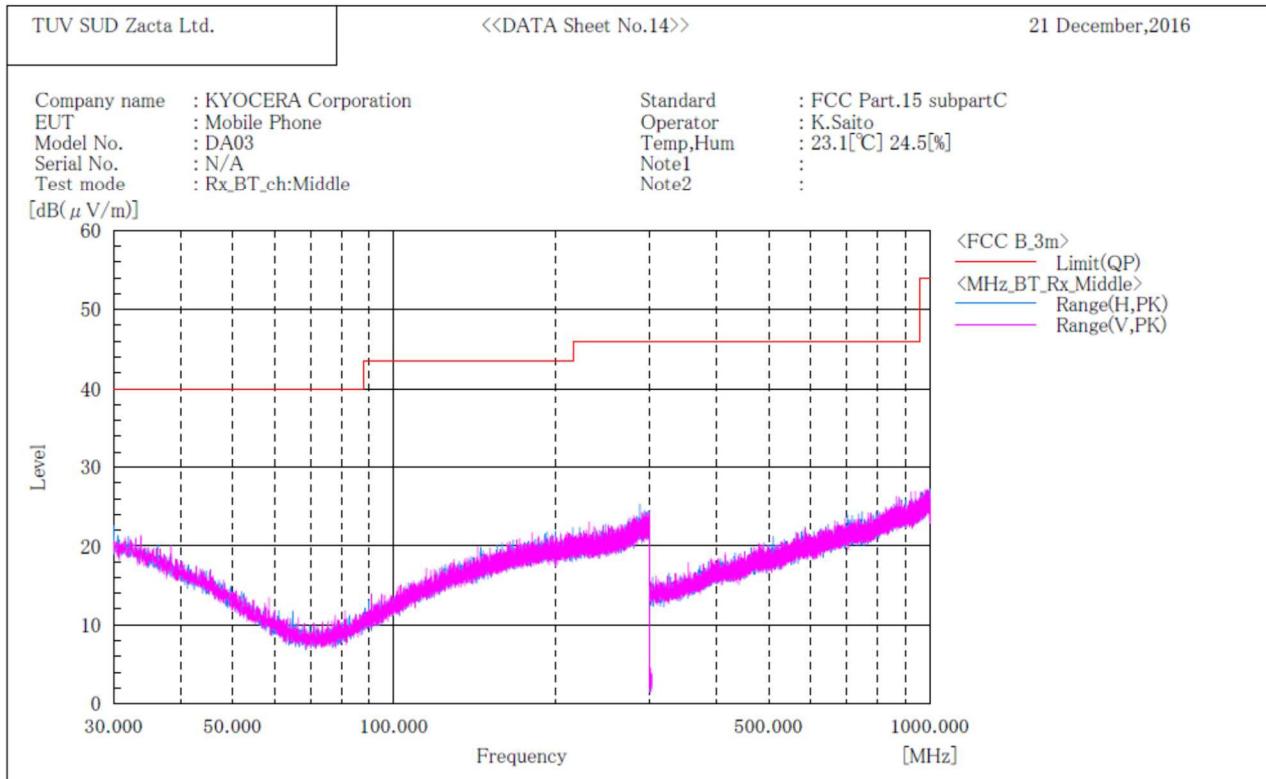

**Final Result**

No.	Frequency (P) [MHz]	c. f [dB(1/m)]	Height [cm]	Angle [°]	Remark
-----	------------------------	-------------------	----------------	--------------	--------

**Note:**

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz and 1GHz to 25GHz at the 3 meters distance.

**Channel High  
BELOW 1GHz**

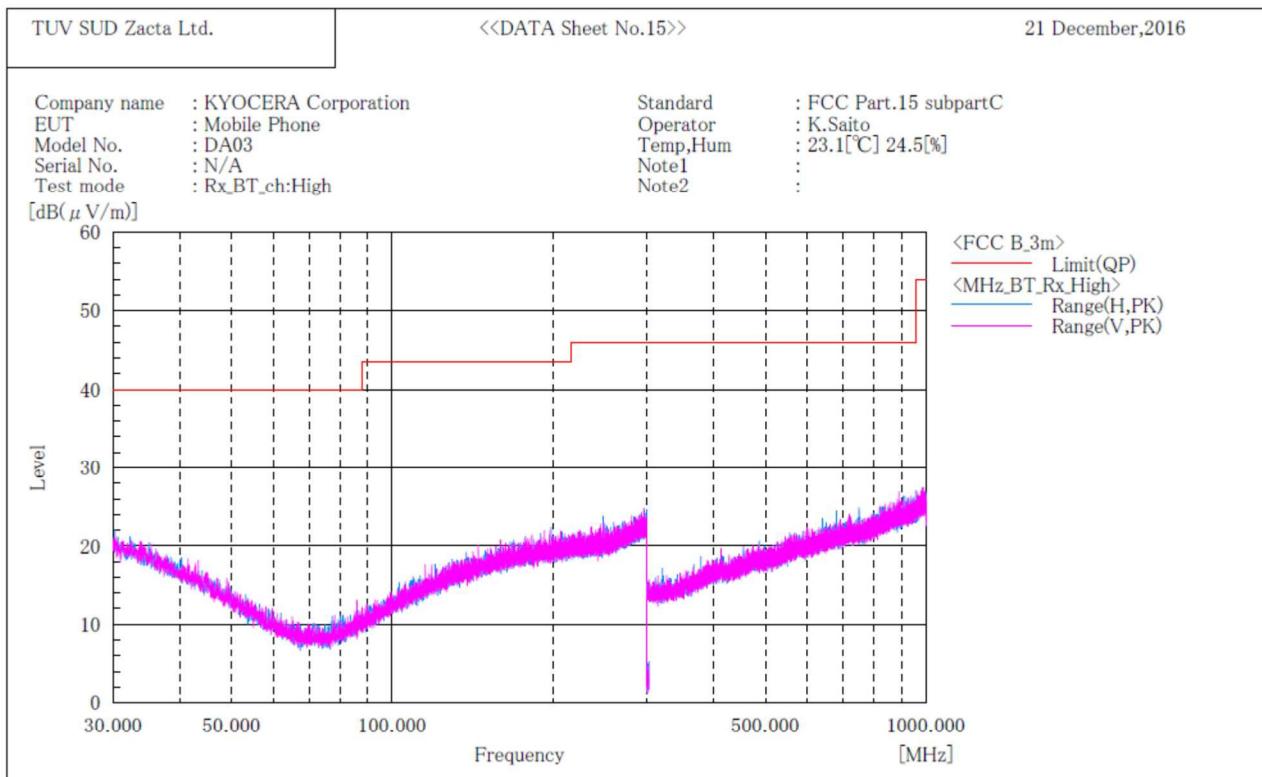\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*
  
[ 3m Semi-anechoic chamber ]

**Final Result**

No.	Frequency (P)	c. f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	

**Note:**

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz and 1GHz to 25GHz at the 3 meters distance.

## **12. Restricted Band of Operation**

### **12.1 Measurement procedure**

[FCC 15.247(d), 15.205, 15.209]

Test was applied by following conditions.

Test method	:	ANSI C63.10
Test place	:	3m Semi-anechoic chamber
EUT was placed on	:	Styrofoam table / (W)1.0m × (D)1.0m × (H)0.8m (below 1GHz) Styrofoam table / (W)0.6m × (D)0.6m ×(H)1.5m (above 1GHz)
Antenna distance	:	3m
Spectrum analyzer setting	:	
- Peak	:	RBW=1MHz, VBW=3MHz, Span=Arbitrary setting, Sweep time = auto-couple
- Average	:	RBW=1MHz, VBW=1kHz, Span=Arbitrary setting, Sweep time = auto-couple, Display mode=Linear

#### Average Measurement Setting [VBW]


Mode	Duty Cycle (%)	T <sub>on</sub> (us)	T <sub>off</sub> (us)	1/T <sub>on</sub> (kHz)	Determined VBW Setting
Bluetooth 4.2 EDR	76.93	2885	865	0.347	1kHz

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site.

Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

Radiated emission measurements are performed at 3m distance with the broadband antenna (Double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1m to 4m and stopped at height producing the maximum emission. The EUT is Placed on a turntable, which is 0.8m/1.5m above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. The test results represent the worst case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation. Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.

- Test configuration

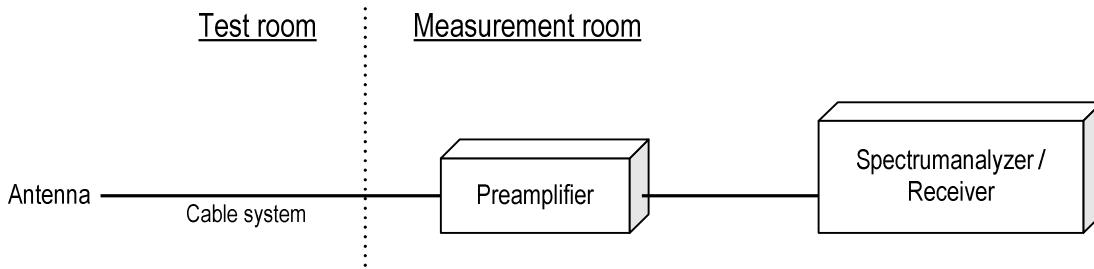

### **12.2 Limit**

Emission at the boundary of the restricted band provided by 15.205 shall be lower than 15.209 limit.

### 12.3 Measurement Result



Channel	Frequency [MHz]	Results Chart	Result
Low	2402	See the Trace Data	Pass
High	2480	See the Trace Data	Pass

### 12.4 Test data

Date : December 21, 2016  
Temperature : 23.1 [°C]  
Humidity : 24.5 [%]  
Test place : 3m Semi-anechoic chamber

Test engineer : Kazunori Saito



**[DH5]**  
**Channel Low**  
**Horizontal**  
**Peak**

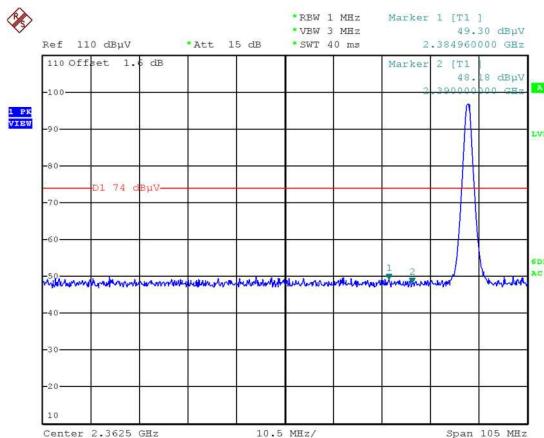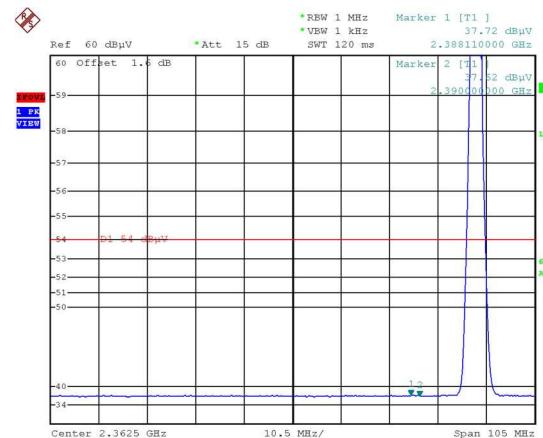**Average**

Date: 21.DEC.2016 02:02:09

Date: 21.DEC.2016 02:01:19



**Vertical**  
**Peak**

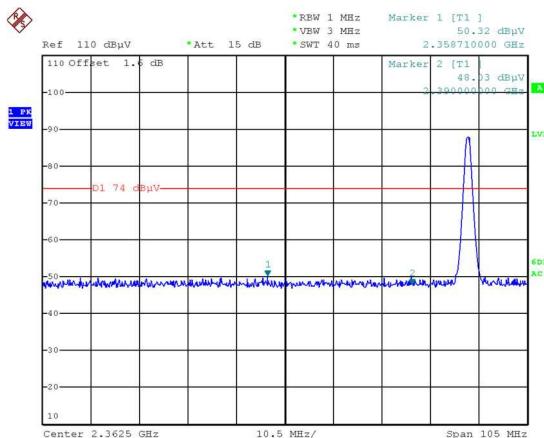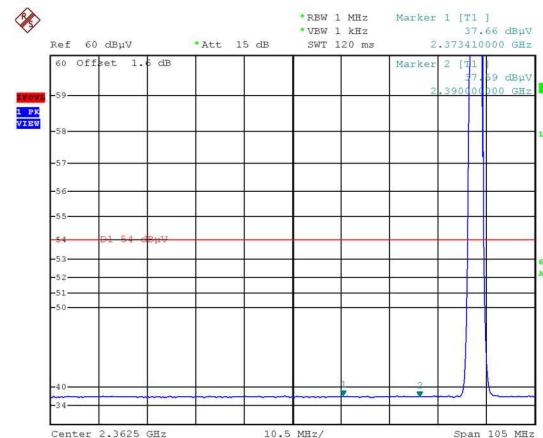**Average**

Date: 21.DEC.2016 02:06:04

Date: 21.DEC.2016 02:06:39



**[DH5]**  
**Channel High**  
**Horizontal**  
**Peak**

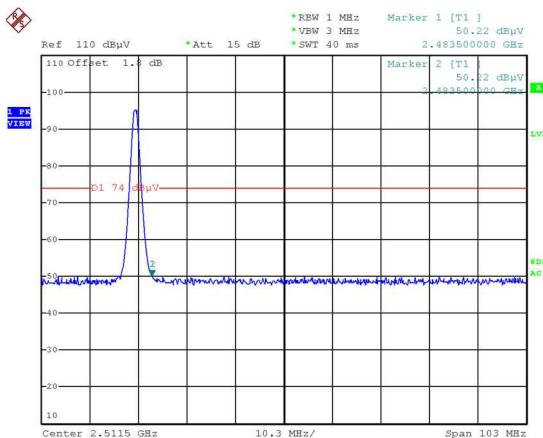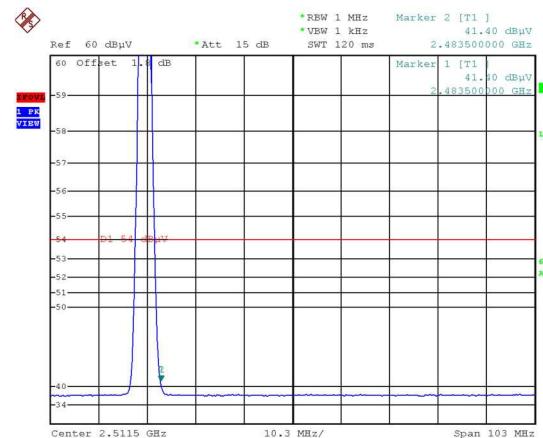**Average**

Date: 21.DEC.2016 02:12:45

Date: 21.DEC.2016 02:13:08


**Vertical**  
**Peak**

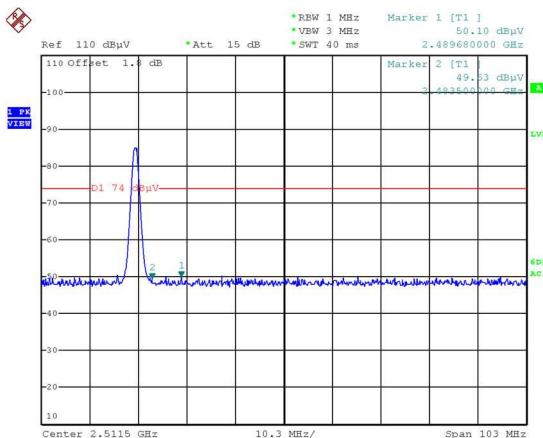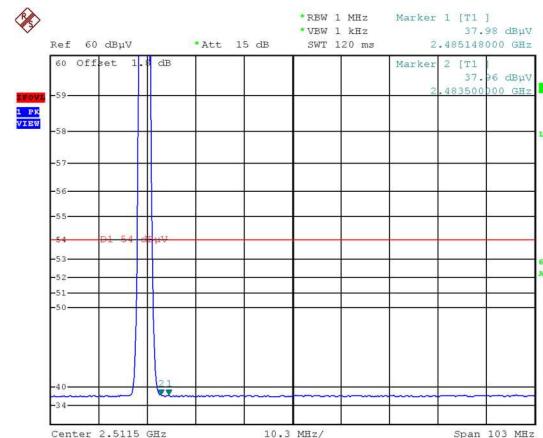**Average**


Date: 21.DEC.2016 02:15:33

Date: 21.DEC.2016 02:16:19

### [3-DH5] Channel Low Horizontal Peak

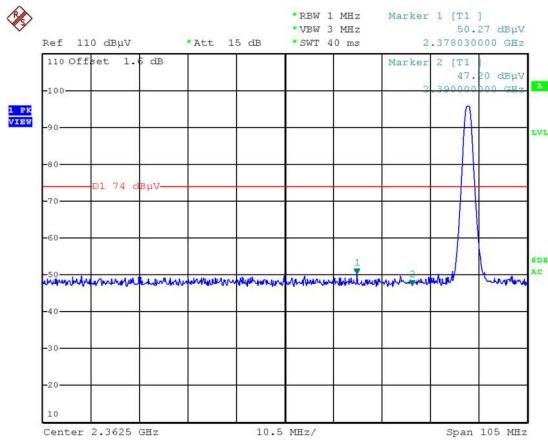


### Average

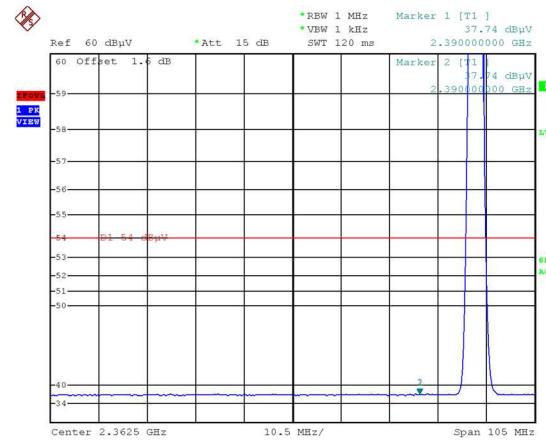


Date: 21.DEC.2016 02:23:45

Date: 21.DEC.2016 02:24:38

### Vertical Peak

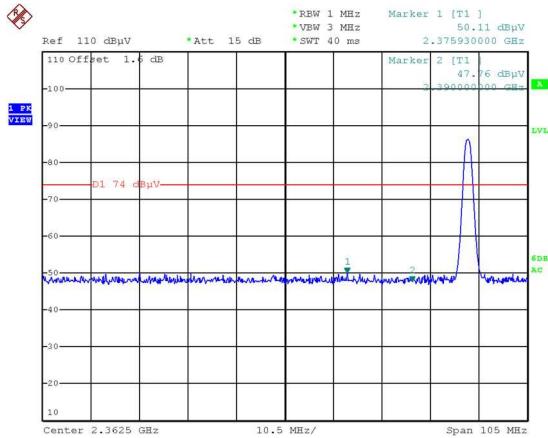



### Average

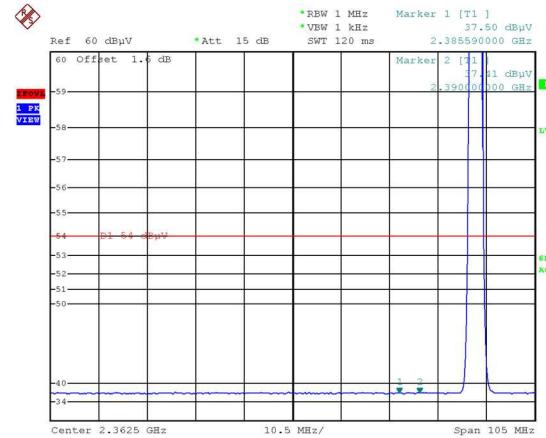

Date: 21.DEC.2016 02:27:51

Date: 21.DEC.2016 02:28:21



**[3-DH5]**  
**Channel High**  
**Horizontal**  
**Peak**

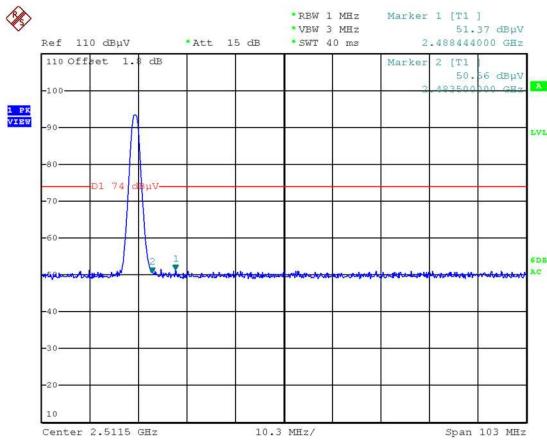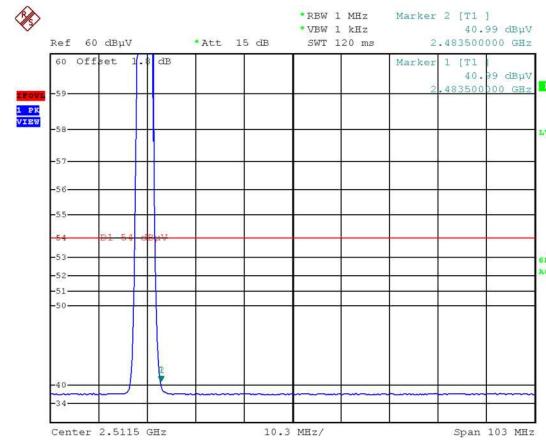**Average**

Date: 21.DEC.2016 02:36:27

Date: 21.DEC.2016 02:33:01

**Vertical**  
**Peak**

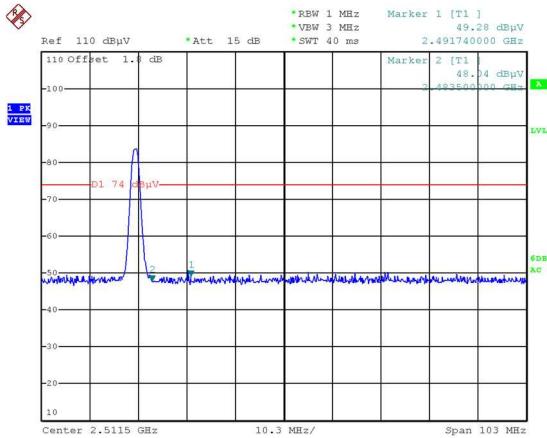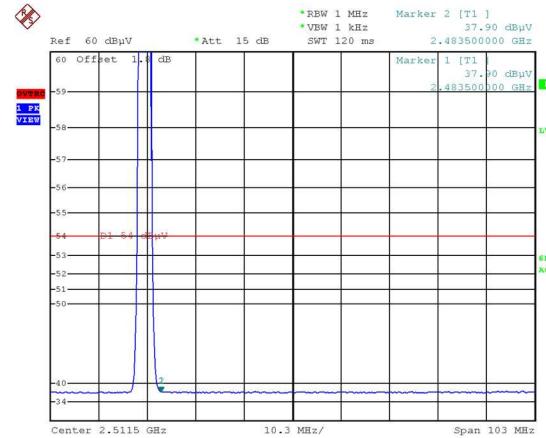**Average**

Date: 21.DEC.2016 02:35:55

Date: 21.DEC.2016 02:42:48

## 13. AC Power Line Conducted Emissions

### 13.1 Measurement procedure [FCC 15.207]

Test was applied by following conditions.


Test method	:	ANSI C63.10
Frequency range	:	0.15MHz to 30MHz
Test place	:	3m Semi-anechoic chamber
EUT was placed on	:	FRP table / (W)2.0m × (D)1.0m × (H)0.8m
Vertical Metal Reference Plane	:	(W)2.0m × (H)2.0m 0.4m away from EUT
Test receiver setting		
- Detector	:	Quasi-peak, Average
- Bandwidth	:	9kHz

EUT and peripherals are connected to  $50\Omega/50\mu\text{H}$  Line Impedance Stabilization Network (LISN) which are connected to reference ground plane, and are placed 80cm away from EUT. Excess of AC power cable is bundled in center.

LISN for peripheral is terminated in  $50\Omega$ .

EUT operating mode is selected to emit the maximum noise. Overall frequency range is investigated with spectrum analyzer using peak detector. Maximum emission configuration is determined by manipulating the EUT, peripherals, interconnecting cables. Then, emission measurements are performed with test receiver in above setting to each current-carrying conductor of the mains port. Sufficient time for EUT, peripherals and test equipment is provided in order for them to warm up to their normal operating condition. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits.

#### - Test configuration

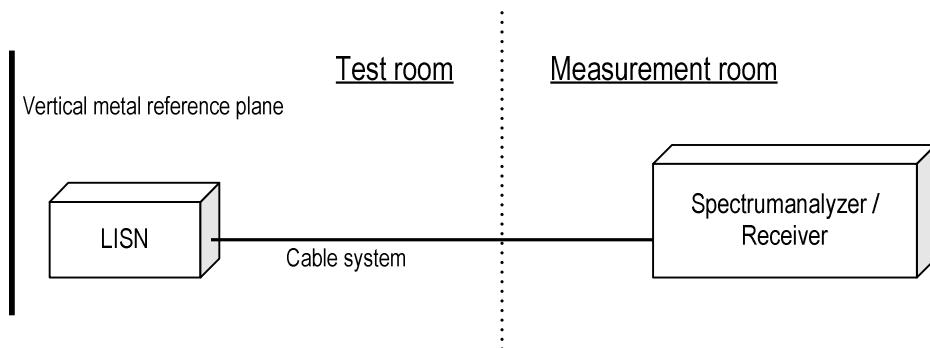

### 13.2 Calculation method

Emission level = Reading + (LISN. factor + Cable system loss)

Margin = Limit – Emission level

Example:


Limit	@ 0.400MHz	: 57.9dB $\mu$ V(Quasi-peak)	
		: 47.9dB $\mu$ V(Average)	
(Quasi peak)	Reading	= 22.7dB $\mu$ V	c.f = 10.4dB
Emission level	=	22.7 + 10.4 = 33.1dB $\mu$ V	
Margin	=	57.9 – 33.1 = 8.5dB	
(Average)	Reading	= 6.3dB $\mu$ V	c.f = 10.4dB
Emission level	=	6.3 + 10.4 = 16.7dB $\mu$ V	
Margin	=	47.9 – 16.7 = 4.7dB	

### 13.3 Limit

Frequency [MHz]	Limit	
	QP [dBuV]	AV [dBuV]
0.15-0.5	66-56*	56-46*
0.5-5	56	46
5-30	60	50

\*: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 13.4 Test data

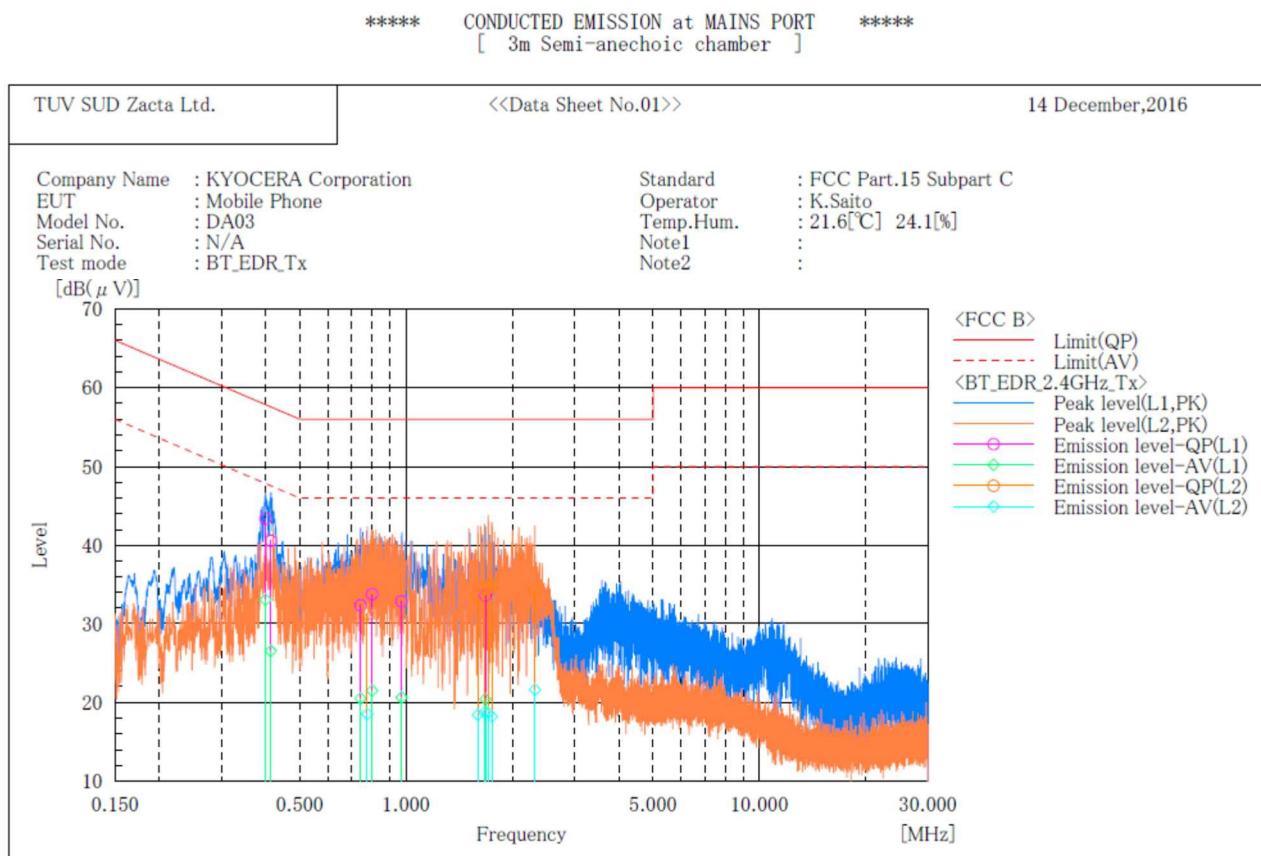

#### Final Result

##### --- L1 Phase ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c. f	Result QP [dB]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]	Remark
1	0.400	33.1	22.7	10.3	43.4	33.0	57.9	47.9	14.5	14.9	
2	0.414	30.3	16.2	10.3	40.6	26.5	57.6	47.6	17.0	21.1	
3	0.743	22.0	10.2	10.3	32.3	20.5	56.0	46.0	23.7	25.5	
4	0.801	23.4	11.2	10.3	33.7	21.5	56.0	46.0	22.3	24.5	
5	0.971	22.4	10.2	10.4	32.8	20.6	56.0	46.0	23.2	25.4	
6	1.677	23.1	10.0	10.4	33.5	20.4	56.0	46.0	22.5	25.6	

##### --- L2 Phase ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c. f	Result QP [dB]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]	Remark
1	0.776	20.9	8.2	10.3	31.2	18.5	56.0	46.0	24.8	27.5	
2	1.596	23.0	8.0	10.4	33.4	18.4	56.0	46.0	22.6	27.6	
3	1.667	24.1	8.3	10.4	34.5	18.7	56.0	46.0	21.5	27.3	
4	1.707	24.3	8.3	10.4	34.7	18.7	56.0	46.0	21.3	27.3	
5	1.748	24.5	7.8	10.4	34.9	18.2	56.0	46.0	21.1	27.8	
6	2.316	23.8	11.2	10.4	34.2	21.6	56.0	46.0	21.8	24.4	



## **14. Antenna requirement**

According to FCC section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The antenna is a special antenna mounted inside of the EUT. Therefore, the EUT complies with the antenna requirement of FCC section 15.203.

## 15. Uncertainty of measurement

---

Expanded uncertainties stated are calculated with a coverage Factor k=2.

Please note that these results are not taken into account when measurement uncertainty considerations contained in ETSI TR 100 028-0011 determining compliance or non-compliance with test result

Test item	Measurement uncertainty
Conducted emission at mains port	±3.0dB
Radiated emission (9kHz – 30MHz)	±4.4dB
Radiated emission (30MHz – 1000MHz)	±4.5dB
Radiated emission (1000MHz – 26GHz)	±3.9dB

## 16. Laboratory Information

---

### 1. Location

Name: Yonezawa Testing Center  
 Address: 5-4149-7, Hachimanpara, Yonezawa-shi, Yamagata, 992-1128 Japan  
 Phone: +81-238-28-2881  
 Fax: +81-238-28-2888

### 2. Accreditation and Registration

- 1) NVLAP  
LAB CODE: 200306-0
- 2) VLAC  
Accreditation No.: VLAC-013
- 3) BSMI  
Laboratory Code: SL2-IN-E-6018, SL2-A1-E-6018
- 4) FCC
 

Registration number	Expiration date
540072	2017-2-20
- 5) Industry Canada
 

Site number	Facility	Expiration date
4224A-4	3m Semi-anechoic chamber	2017-12-03
4224A-5	10m Semi-anechoic chamber No.1	2017-12-03
4224A-6	10m Semi-anechoic chamber No.2	2019-12-14
- 6) VCCI Council
 

Registration number	Expiration date
A-0166	2017-07-03

## Appendix A. Test equipment

### Antenna port conducted test

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
Spectrum analyzer	Agilent Technologies	E4440A	US40420937	Jul. 31, 2017	Jul. 15, 2016
Microwave cable	RS	YH-13S5	N/A(S403)	May 31, 2017	May 24, 2016
Attenuator	Weinschel	56-10	J4993	Nov. 30, 2016	Nov. 12, 2015
Attenuator	Weinschel	56-10	J4993	Nov. 30, 2017	Nov. 1, 2016
Microwave cable	SUHNER	SUCOFLEX104/1.5m	322087/4	Jul. 31, 2017	Jul. 20, 2016
Power meter	ROHDE&SCHWARZ	NRP2	103269	Jun. 30, 2017	Jun. 27, 2016
Power sensor	ROHDE&SCHWARZ	NRP-Z81	102459	Jun. 30, 2017	Jun. 27, 2016

### Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100764	Aug. 31, 2017	Aug. 19, 2016
Preamplifier	ANRITSU	MH648A	M96057	May 31, 2017	May 10, 2016
Loop antenna	ROHDE&SCHWARZ	HFH2-Z2	892246/010	May 31, 2017	May 9, 2016
Attenuator	TDC	TAT-43B-06	N/A(S209)	May 31, 2017	May 10, 2016
Biconical antenna	Schwarzbeck	VHA9103/BBA9106	2155	Jun. 30, 2017	Jun. 2, 2016
Log periodic antenna	Schwarzbeck	UHALP9108A	0560	Jun. 30, 2017	Jun. 2, 2016
Attenuator	TME	CFA-01NPJ-6	N/A(S273)	May 31, 2017	May 25, 2016
Attenuator	TME	CFA-01NPJ-3	N/A(S270)	May 31, 2017	May 25, 2016
Spectrum analyzer	Agilent Technologies	E4440A	US40420937	Jul. 31, 2017	Jul. 15, 2016
Preamplifier	TSJ	MLA-1840-B03-35	1240332	Jun. 30, 2017	Jun. 16, 2016
Double ridged guide antenna	EMCO	3115	5205	Mar. 31, 2017	Mar. 3, 2016
Double ridged guide antenna	ETS LINDGREN	3117	00052315	Feb. 28, 2017	Feb. 23, 2016
Attenuator	Agilent Technologies	8491B	MY39268633	Feb. 28, 2017	Feb. 23, 2016
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170189	Jun. 30, 2017	Jun. 16, 2016
Preamplifier	TSJ	MLA-1840-B03-35	1240332	Jun. 30, 2017	Jun. 16, 2016
Microwave cable	SUHNER	SUCOFELX102/2m	31648	Mar. 31, 2017	Mar. 29, 2016
Notch filter	Micro-Tronics	BRM50702	045	Apr. 30, 2017	Apr. 8, 2016
Microwave cable	SUHNER	SUCOFLEX104/9m	346316/4	May 31, 2017	May 25, 2016
		SUCOFLEX104/1m	322084/4	May 31, 2017	May 25, 2016
		SUCOFLEX104/1.5m	317226/4	May 31, 2017	May 25, 2016
		SUCOFLEX104/7m	41625/6	May 31, 2017	May 25, 2016
PC	DELL	DIMENSION E521	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V5.3.61	N/A	N/A
Absorber	RIKEN	PFP30	N/A	N/A	N/A
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-NSA)	May 31, 2017	May 11, 2016
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-SVSWR)	May 31, 2017	May 12, 2016


### Conducted emission at mains port

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100764	Aug. 31, 2017	Aug. 19, 2016
Attenuator	HUBER+SUHNER	6810.01.A	N/A(S411)	Feb. 28, 2017	Feb. 23, 2016
Line impedance stabilization network for EUT	Kyoritsu Electrical Works, Ltd.	KNW-407F	8-2003-1	Mar. 31, 2017	Mar. 28, 2016
Coaxial cable	FUJIKURA	5D-2W/4m	N/A (S330)	Feb. 28, 2017	Feb. 23, 2016
Coaxial cable	FUJIKURA	5D-2W/1m	N/A (S193)	Feb. 28, 2017	Feb. 23, 2016
Coaxial cable	SUHNER	RG214/U/10m	N/A (S194)	Feb. 28, 2017	Feb. 23, 2016
PC	DELL	DIMENSION	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/CE-AJ	0611193/V5.6.000	N/A	N/A

\*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.

## Appendix B. Duty Cycle

### [Plot & Calculation]

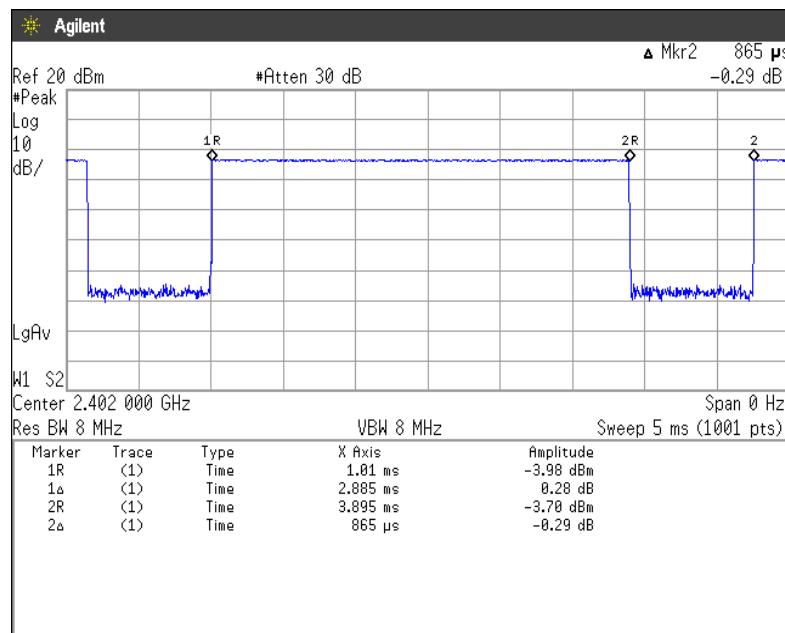

$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff}) = 2885[\mu\text{s}] / (2885[\mu\text{s}] + 865[\mu\text{s}]) = 76.93[\%]$$