

## Report on the RF Testing of:

KYOCERA Corporation  
Mobile Phone, Model: EB1157  
FCC ID: JOYEB1157

## In accordance with FCC Part 15 Subpart C

Prepared for: KYOCERA Corporation  
Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku  
Yokohama-shi, Kanagawa, Japan  
Phone: +81-45-943-6253 Fax: +81-45-943-6314



Japan

**Add value.  
Inspire trust.**

## COMMERCIAL-IN-CONFIDENCE

Document Number: JPD-TR-23074-0

### SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Hiroaki Suzuki	Deputy Manager of RF Group	Approved Signatory	2023.08.18

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Japan Ltd. document control rules.

### EXECUTIVE SUMMARY – Result: Complied

A sample of this product was tested and the result above was confirmed in accordance with FCC Part 15 Subpart C.



### DISCLAIMER AND COPYRIGHT

The results in this report are applicable only to the equipment tested.  
This report shall not be re-produced except in full without the written approval of TÜV SÜD Japan Ltd.  
Client provided data, for which TÜV SÜD Japan Ltd. take no responsibility, which can affect validity of results within this report is clearly identified.

### ACCREDITATION

This test report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

TÜV SÜD Japan Ltd.  
Yonezawa Testing Center  
5-4149-7 Hachimanpara,  
Yonezawa-shi, Yamagata,  
992-1128 Japan

Phone: +81 (0) 238 28 2881  
www.tuvsud.com/ja-jp



## Contents

<b>1</b>	<b>Summary of Test</b> .....	<b>3</b>
1.1	Modification history of the test report.....	3
1.2	Standards.....	3
1.3	Test methods.....	3
1.4	Deviation from standards.....	3
1.5	List of applied test(s) of the EUT.....	3
1.6	Test information.....	3
1.7	Test set up.....	3
1.8	Test period.....	3
<b>2</b>	<b>Equipment Under Test</b> .....	<b>4</b>
2.1	EUT information.....	4
2.2	Modification to the EUT.....	5
2.3	Variation of family model(s).....	5
2.4	Operating channels and frequencies.....	5
2.5	Operating mode.....	5
2.6	Operating flow.....	6
<b>3</b>	<b>Configuration of Equipment</b> .....	<b>7</b>
3.1	Equipment used.....	7
3.2	Cable(s) used.....	7
3.3	System configuration.....	7
<b>4</b>	<b>Test Result</b> .....	<b>8</b>
4.1	6dB Bandwidth / Occupied Bandwidth (99%).....	8
4.2	Maximum Peak Output Power.....	17
4.3	Band Edge Compliance of RF Conducted Emissions.....	20
4.4	Spurious Emissions - Conducted -.....	27
4.5	Spurious Emissions - Radiated -.....	52
4.6	Restricted Band of Operation.....	71
4.7	Transmitter Power Spectral Density.....	81
4.8	AC Power Line Conducted Emissions.....	92
<b>5</b>	<b>Antenna requirement</b> .....	<b>95</b>
<b>6</b>	<b>Measurement Uncertainty</b> .....	<b>96</b>
<b>7</b>	<b>Laboratory Information</b> .....	<b>97</b>
	<b>Appendix A. Test Equipment</b> .....	<b>98</b>
	<b>Appendix B. Duty Cycle</b> .....	<b>99</b>

## 1 Summary of Test

### 1.1 Modification history of the test report

Document Number	Modification History	Issue Date
JPD-TR-23074-0	First Issue	Refer to the cover page

### 1.2 Standards

CFR47 FCC Part 15 Subpart C

### 1.3 Test methods

ANSI C63.10-2013,  
KDB 558074 D01 15.247 Meas Guidance v05r02

### 1.4 Deviation from standards

None

### 1.5 List of applied test(s) of the EUT

Test item section	Test item	Condition	Result	Remark
15.247(a)(2)	6dB Bandwidth	Conducted	PASS	-
15.247(b)(3)	Maximum Peak Output Power	Conducted	PASS	-
15.247(d)	Band Edge Compliance of RF Conducted Emissions	Conducted	PASS	-
15.247(d) 15.205 15.209	Spurious Emissions	Conducted	PASS	-
		Radiated	PASS	-
15.247(d) 15.205 15.209	Restricted Bands of Operation	Radiated	PASS	-
15.247(e)	Transmitter Power Spectral Density	Conducted	PASS	-
15.207	AC Power Line Conducted Emissions	Conducted	PASS	-

### 1.6 Test information

None

### 1.7 Test set up

Table-top

### 1.8 Test period

28-June-2023 - 5-July-2023



## 2 Equipment Under Test

All information in this chapter was provided by the applicant.

### 2.1 EUT information

Applicant	KYOCERA Corporation Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa, Japan Phone: +81-45-943-6253 Fax: +81-45-943-6314
Equipment Under Test (EUT)	Mobile Phone
Model number	EB1157
Serial number	358018240001198, 358018240001065
Trade name	Kyocera
Number of sample(s)	2
EUT condition	Pre-Production
Power rating	Battery: DC 3.87 V
Size	(W) 75 mm x (D) 14.6 mm x (H) 154 mm
Environment	Indoor and Outdoor use
Terminal limitation	-20 °C to 60 °C
Hardware version	Pre-Production
Software version	0.130RI
Firmware version	Not applicable
RF Specification	
Protocol	Bluetooth 5.2 + EDR
Frequency range	2402 MHz-2480 MHz
Number of RF Channels	40 Channels
Modulation method/Data rate	GFSK (1Mbps, 2Mbps), Long Range S2/S8 (500kbps/125kbps)
Channel separation	2 MHz
Conducted power	6.798 mW
Antenna type	Internal antenna
Antenna gain	Chain 0 : +1.0 dBi Chain 1 : -1.1 dBi

## 2.2 Modification to the EUT

The table below details modifications made to the EUT during the test project.

Modification State	Description of Modification	Modification fitted by	Date of Modification
Model: EB1157, Serial Number: 358018240001198, 358018240001065			
0	As supplied by the applicant	Not Applicable	Not Applicable

## 2.3 Variation of family model(s)

### 2.3.1 List of family model(s)

Not applicable

### 2.3.2 Reason for selection of EUT

Not applicable

## 2.4 Operating channels and frequencies

Channel	Frequency [MHz]	Channel	Frequency [MHz]
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

## 2.5 Operating mode

The EUT had been tested under operating condition.  
There are three channels have been tested as following:

Tested Channel	Frequency [MHz]
Low	2402
Middle	2440
High	2480

The pre-test has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates.

Tested Channel	Modulation Type	Data Rate
Low, Middle, High	GFSK	1 Mbps

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in X-axis, Chain 1 and the worst case recorded.

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports.

## 2.6 Operating flow

[Tx mode]

- i) Test program setup to the Software
- ii) Select a Test mode  
Operating frequency: Channel Low: 2402 MHz, Channel Middle: 2440 MHz, Channel High: 2480 MHz
- iii) Start test mode

[Rx mode]

- i) Test program setup to the Software
- ii) Select a Test mode  
Operating frequency: Channel Low: 2402 MHz, Channel Middle: 2440 MHz, Channel High: 2480 MHz
- iii) Start test mode

### 3 Configuration of Equipment

Numbers assigned to equipment on the diagram in “3.3 System configuration” correspond to the list in “3.1 Equipment used” and “3.2 Cable(s) used”.

This test configuration is based on the manufacture’s instruction.

Cabling and setup(s) were taken into consideration and test data was taken under worse case condition.

#### 3.1 Equipment used

No.	Equipment	Company	Model No.	Serial No.	FCC ID/DoC	Comment
1	Mobile Phone	KYOCERA	EB1157	358018240001198 358018240001065	JOYEB1157	EUT
2	AC Adapter	KDDI	0602PQA	N/A	N/A	*


\*:AC power line Conducted Emission Test.

#### 3.2 Cable(s) used

No.	Equipment	Length[m]	Shield	Connector	Comment
a	USB cable (for AC Adapter)	1.5	No	Plastic	*

\*:AC power line Conducted Emission Test.

#### 3.3 System configuration

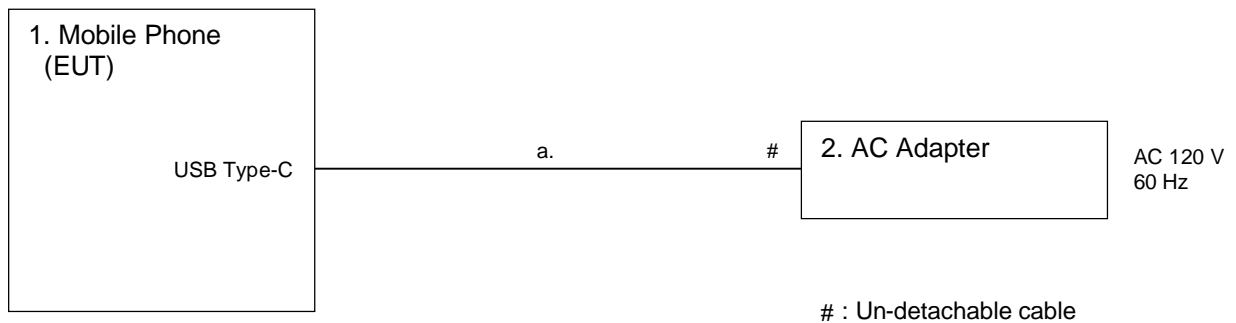



## 4 Test Result

### 4.1 6dB Bandwidth / Occupied Bandwidth (99%)

#### 4.1.1 Measurement procedure


[FCC 15.247(a)(2), KDB558074 D01 v05r02]

The bandwidth at 6 dB down from the highest inband spectral density is measured with spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) RBW = 100 kHz
- b) VBW ≥ 3 x RBW
- c) Sweep time = auto-couple
- d) Detector = peak
- e) Trace mode = max hold

- Test configuration

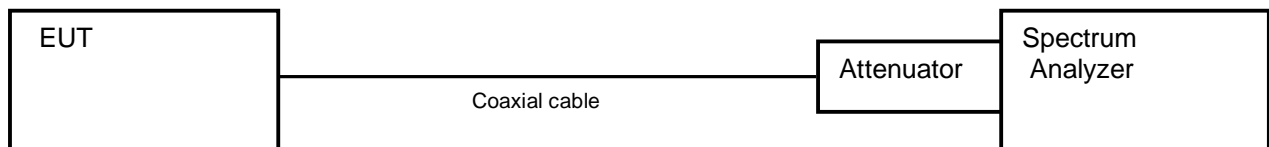

#### 4.1.2 Limit

The minimum permissible 6dB bandwidth is 500kHz.

#### 4.1.3 Measurement result

Date : 4-July-2023  
 Temperature : 24.1 [°C]  
 Humidity : 63.3 [%]  
 Test place : Shielded room No.4  
 Test engineer : Kazunori Saito

Date : 5-July-2023  
 Temperature : 24.1 [°C]  
 Humidity : 59.3 [%]  
 Test place : Shielded room No.4  
 Test engineer : Kazunori Saito


Channel	6dB bandwidth [MHz]			
	BT_LE			
	1Mbps	2Mbps	LongRange S2	LongRange S8
Low [Chain 0]	0.668	1.138	0.671	0.624
Middle [Chain 0]	0.671	1.139	0.666	0.624
High [Chain 0]	0.666	1.135	0.669	0.623
Low [Chain 1]	0.673	1.138	0.669	0.628
Middle [Chain 1]	0.669	1.136	0.669	0.627
High [Chain 1]	0.667	1.132	0.669	0.629






4.1.4 Trace data


[BT\_LE (1Mbps)]  
Channel Low[Chain 0]

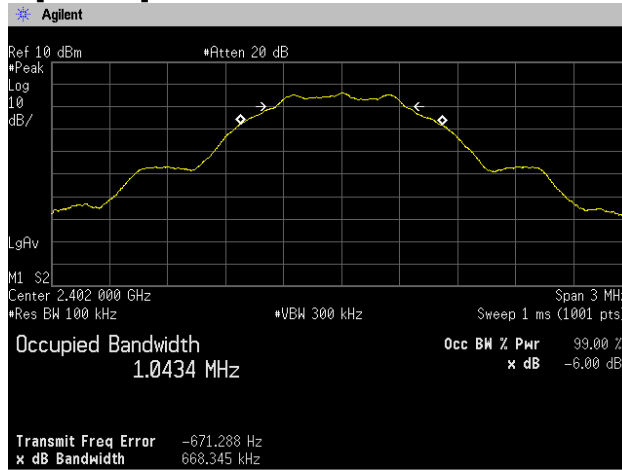

Channel Middle[Chain 0]

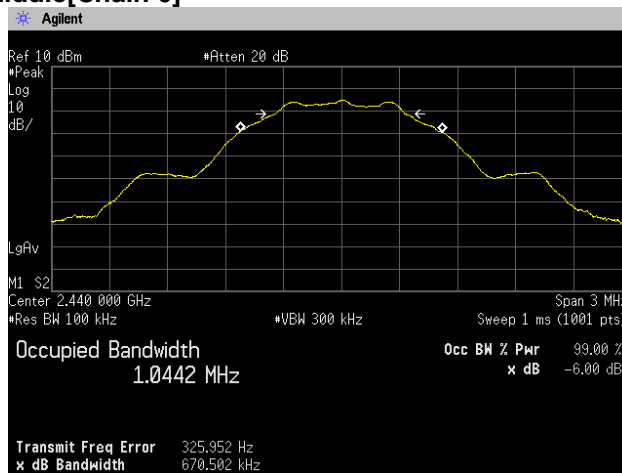


Channel High[Chain 0]

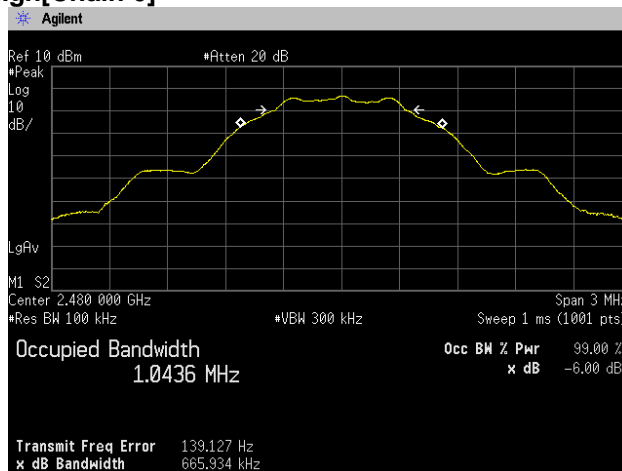





### [BT\_LE (2Mbps)] Channel Low[Chain 0]

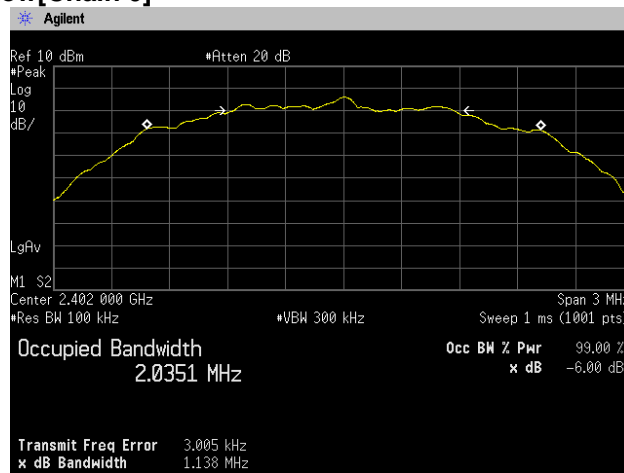


### Channel Middle[Chain 0]

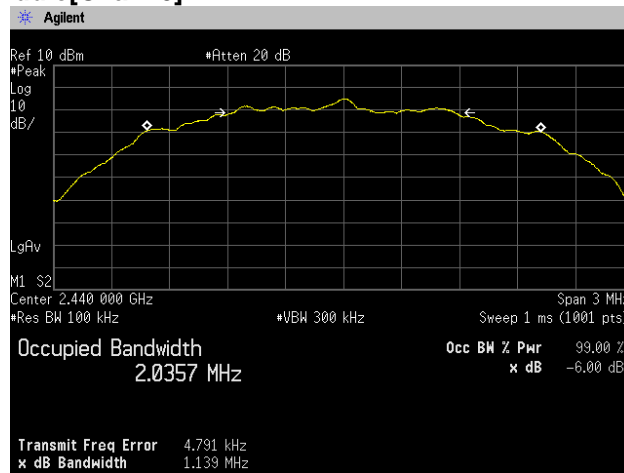


### Channel High[Chain 0]

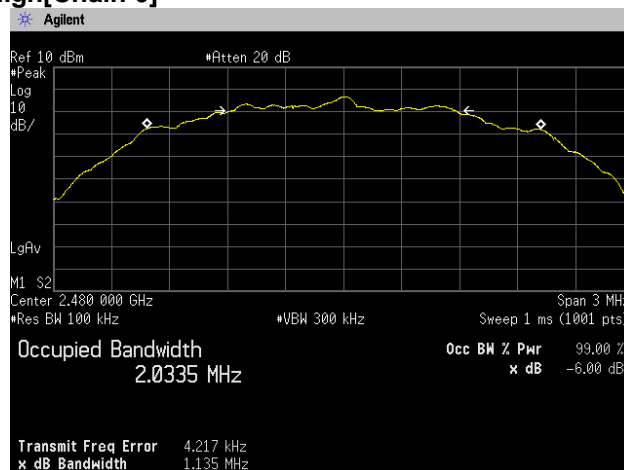


### [BT\_LE (LongRange S2)] Channel Low[Chain 0]

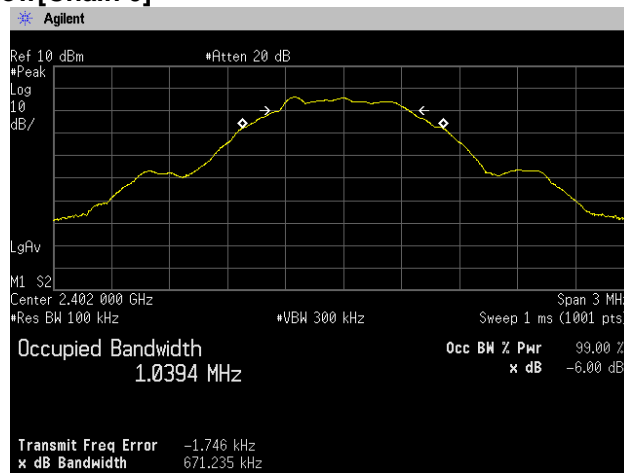

### Channel Middle[Chain 0]

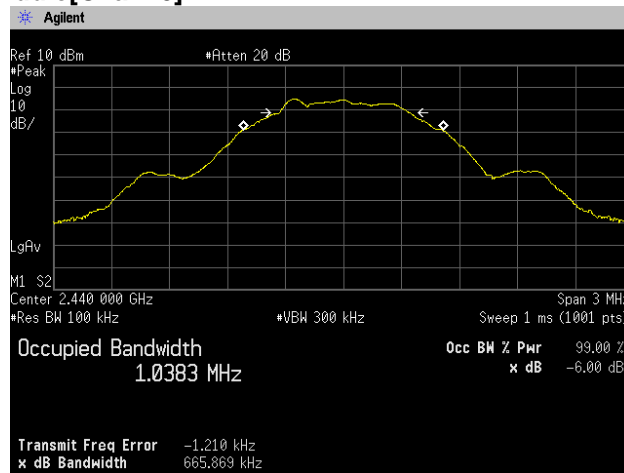


### Channel High[Chain 0]

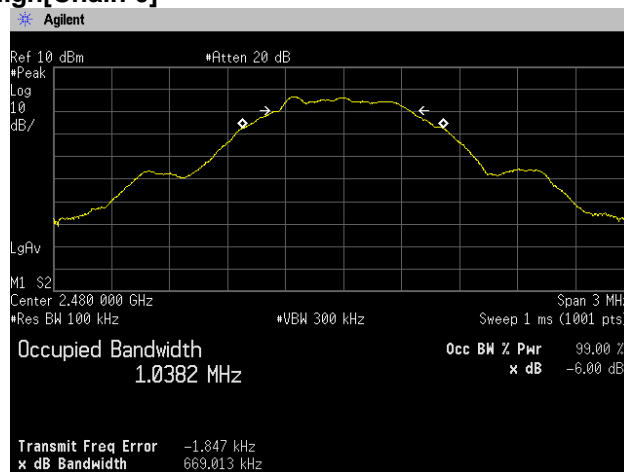





### [BT\_LE (LongRange S8)] Channel Low[Chain 0]

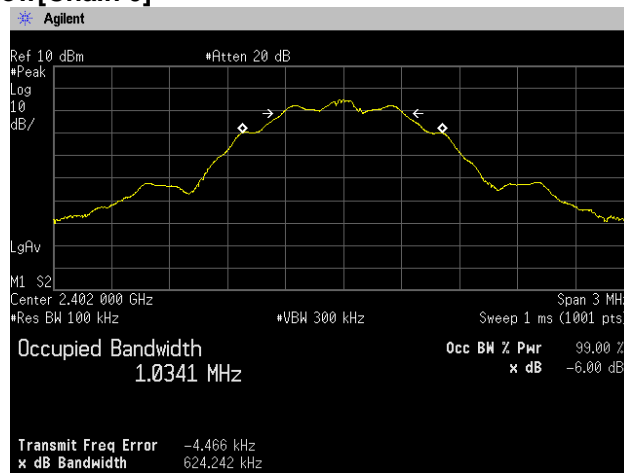

### Channel Middle[Chain 0]

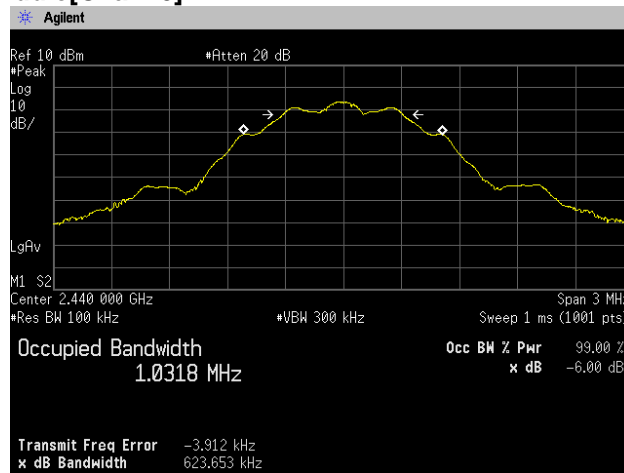


### Channel High[Chain 0]

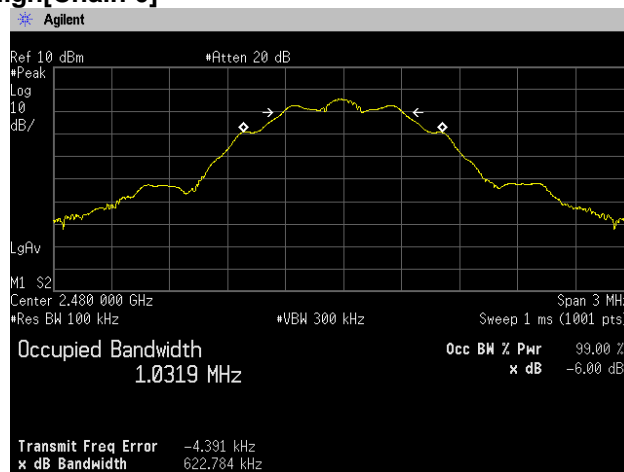





**[BT\_LE (1Mbps)]**  
**Channel Low[Chain 1]**

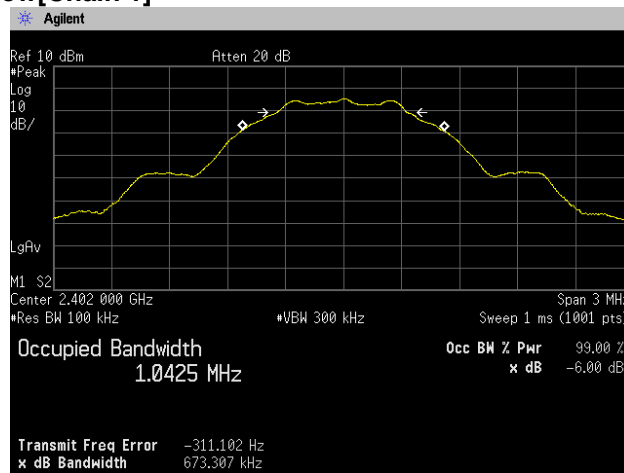

**Channel Middle[Chain 1]**

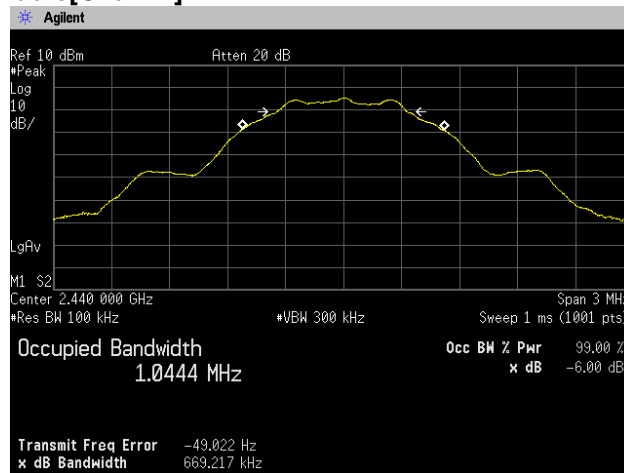


**Channel High[Chain 1]**

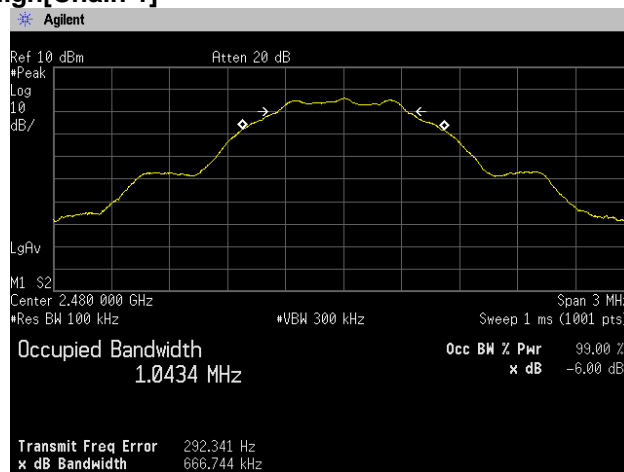





### [BT\_LE (2Mbps)] Channel Low[Chain 1]

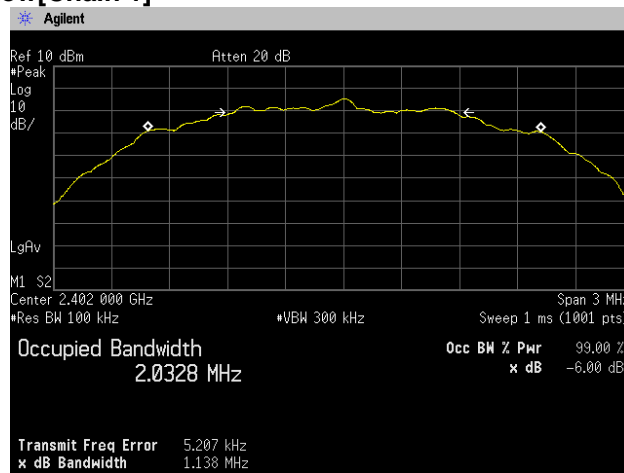

### Channel Middle[Chain 1]

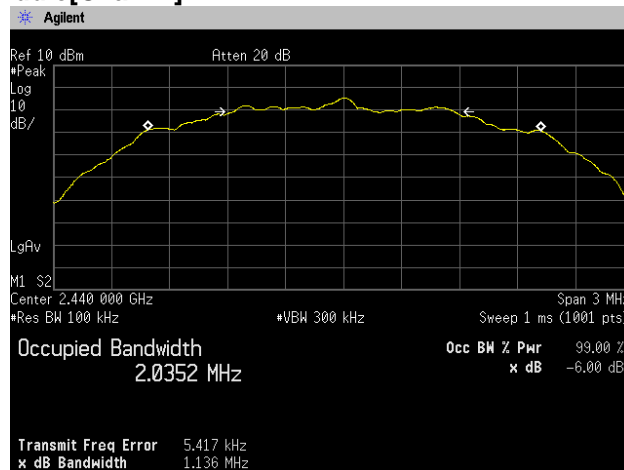


### Channel High[Chain 1]

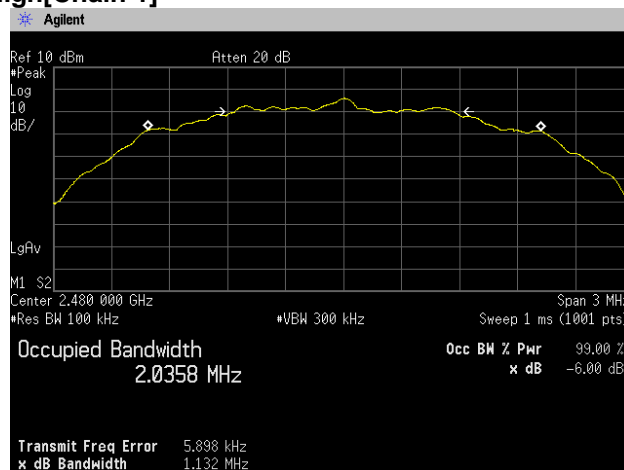





### [BT\_LE (LongRange S2)] Channel Low[Chain 1]

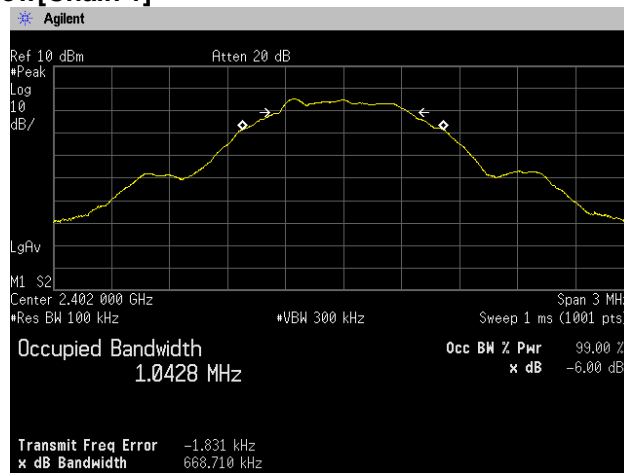

### Channel Middle[Chain 1]

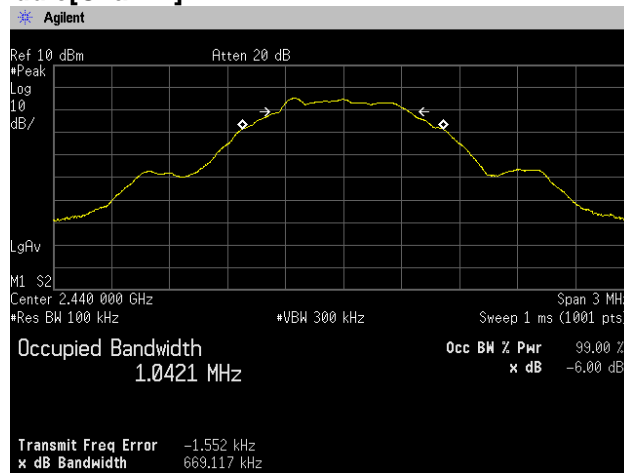


### Channel High[Chain 1]

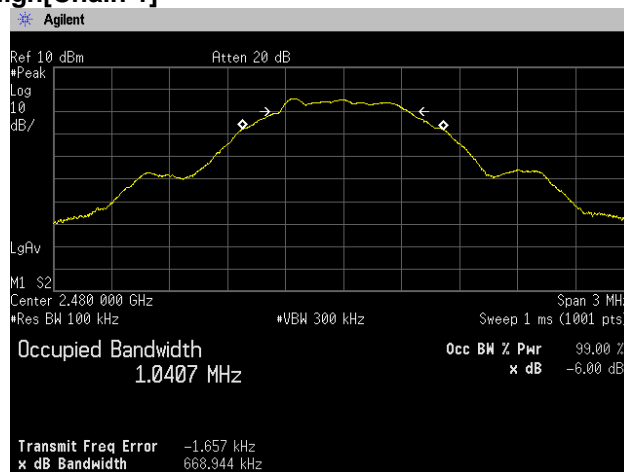





**[BT\_LE (LongRange S8)]  
Channel Low[Chain 1]**

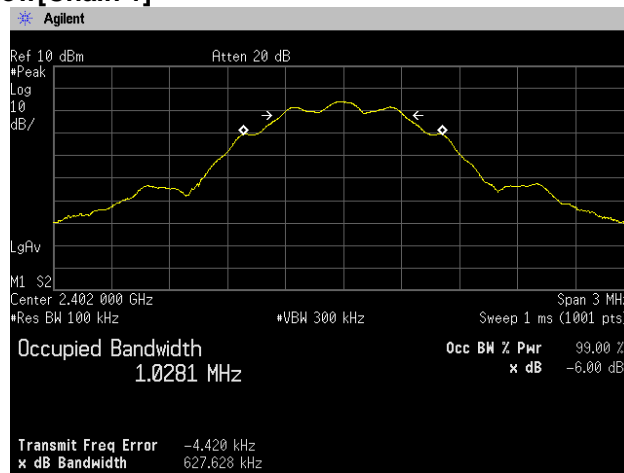

**Channel Middle[Chain 1]**

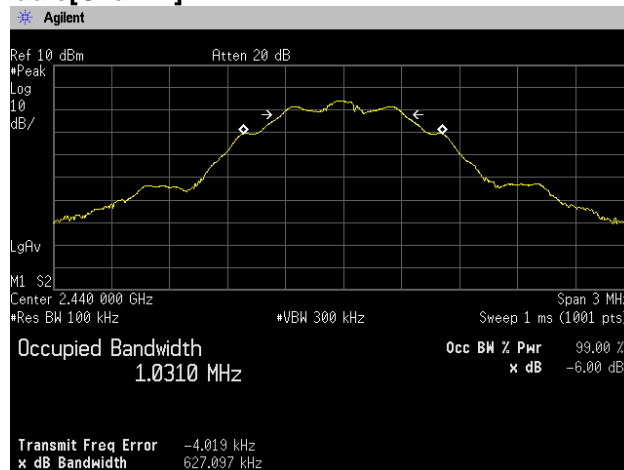

**Channel High[Chain 1]**

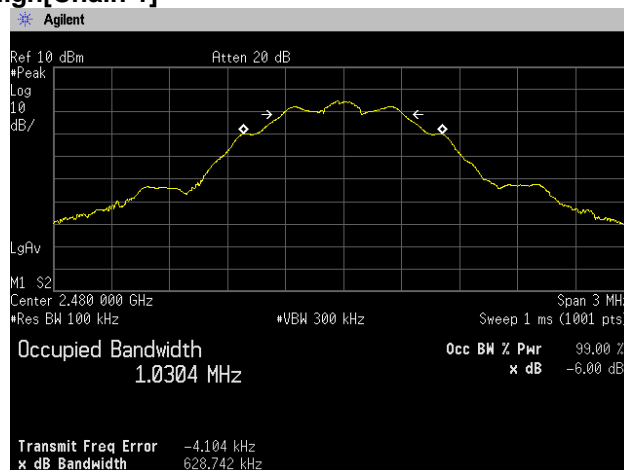




## 4.2 Maximum Peak Output Power

### 4.2.1 Measurement procedure

[FCC 15.247(b)(3), KDB558074 D01 v05r02]

The peak power is measured with a power sensor connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

- Test configuration

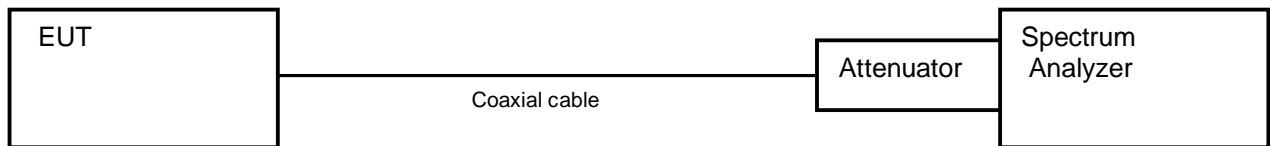

### 4.2.2 Limit

1 W (1000 mW) or less

### 4.2.3 Measurement result

Date : 5-July-2023  
 Temperature : 24.1 [°C]  
 Humidity : 59.3 [%]  
 Test place : Shielded room No.4

Test engineer : Kazunori Saito

#### [Chain 0]

##### Battery Full (1Mbps)

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Peak Output Power (mW)	Limit (mW)	Result
Low	2402	-3.63	10.83	7.20	5.244	≤1000	PASS
Middle	2440	-4.72	10.83	6.11	4.085	≤1000	PASS
High	2480	-2.83	10.83	8.00	6.314	≤1000	PASS

##### Battery Full (2Mbps)

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Peak Output Power (mW)	Limit (mW)	Result
Low	2402	-3.25	10.83	7.58	5.727	≤1000	PASS
Middle	2440	-4.39	10.83	6.44	4.401	≤1000	PASS
High	2480	-2.51	10.83	8.32	6.798	≤1000	PASS

##### Battery Full (LongRange S2)

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Peak Output Power (mW)	Limit (mW)	Result
Low	2402	-3.54	10.83	7.29	5.358	≤1000	PASS
Middle	2440	-4.64	10.83	6.19	4.163	≤1000	PASS
High	2480	-4.65	10.83	6.18	4.151	≤1000	PASS

##### Battery Full (LongRange S8)

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Peak Output Power (mW)	Limit (mW)	Result
Low	2402	-3.62	10.83	7.21	5.258	≤1000	PASS
Middle	2440	-4.72	10.83	6.11	4.083	≤1000	PASS
High	2480	-2.83	10.83	8.00	6.308	≤1000	PASS

Calculation;

$$\text{Reading (dBm)} + \text{Factor (dB)} = \text{Level (dBm)}$$

$$10 \log P = \text{Level (dBm)}$$

$$P = 10^{(\text{Maximum Peak Output Power} / 10)} \text{ (mW)}$$

**[Chain 1]****Battery Full (1Mbps)**

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Peak Output Power (mW)	Limit (mW)	Result
Low	2402	-4.22	10.83	6.61	4.581	≤1000	PASS
Middle	2440	-4.16	10.83	6.68	4.651	≤1000	PASS
High	2480	-3.51	10.83	7.32	5.399	≤1000	PASS

**Battery Full (2Mbps)**

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Peak Output Power (mW)	Limit (mW)	Result
Low	2402	-4.00	10.83	6.83	4.815	≤1000	PASS
Middle	2440	-3.91	10.83	6.92	4.917	≤1000	PASS
High	2480	-3.20	10.83	7.64	5.801	≤1000	PASS

**Battery Full (LongRange S2)**

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Peak Output Power (mW)	Limit (mW)	Result
Low	2402	-4.21	10.83	6.63	4.597	≤1000	PASS
Middle	2440	-4.11	10.83	6.73	4.704	≤1000	PASS
High	2480	-3.42	10.83	7.41	5.511	≤1000	PASS

**Battery Full (LongRange S8)**

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Peak Output Power (mW)	Limit (mW)	Result
Low	2402	-4.27	10.83	6.56	4.531	≤1000	PASS
Middle	2440	-4.14	10.83	6.69	4.667	≤1000	PASS
High	2480	-3.43	10.83	7.40	5.493	≤1000	PASS

Calculation;

Reading (dBm) + Factor (dB) = Level (dBm)

 $10\log P = \text{Level (dBm)}$  $P = 10^{(\text{Maximum Peak Output Power} / 10)} \text{ (mW)}$

### 4.3 Band Edge Compliance of RF Conducted Emissions

#### 4.3.1 Measurement procedure


##### [FCC 15.247(d), KDB558074 D01 v05r02]

The Band Edge is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) Span = Arbitrary setting. (Setting suitable for measurement.)
- b) RBW = 100 kHz
- c) VBW  $\geq 3 \times$  RBW
- d) Sweep time = auto-couple
- e) Detector = peak
- f) Trace mode = max hold

- Test configuration

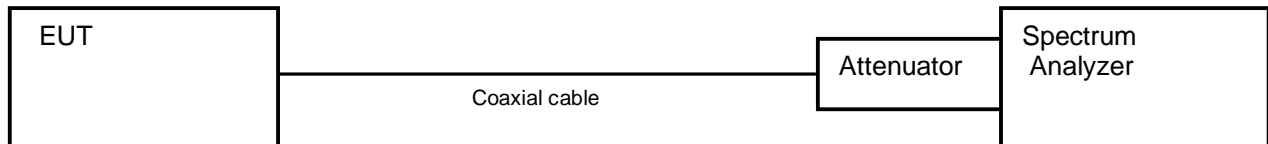

#### 4.3.2 Limit

In any 100kHz bandwidth outside the frequency band the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.



**4.3.3 Measurement result**

Date : 4-July-2023  
 Temperature : 24.1 [°C]  
 Humidity : 63.3 [%]  
 Test place : Shielded room No.4  
 Test engineer : Kazunori Saito

Date : 5-July-2023  
 Temperature : 24.1 [°C]  
 Humidity : 59.3 [%]  
 Test place : Shielded room No.4  
 Test engineer : Kazunori Saito

**[Chain 0]  
 [BT\_LE (1Mbps)]**

Channel	Frequency (MHz)	RF Power Level (dBm)	Band-edge Frequency (MHz)	Band-edge Level (dBm)	Difference Level (dBm)	Limit (dBm)	Result
Low	2402	-3.89	2399.90	-62.31	58.42	At least 20dB below from peak of RF	PASS
High	2480	-3.19	2486.90	-68.89	65.70	At least 20dB below from peak of RF	PASS

**[BT\_LE (2Mbps)]**

Channel	Frequency (MHz)	RF Power Level (dBm)	Band-edge Frequency (MHz)	Band-edge Level (dBm)	Difference Level (dBm)	Limit (dBm)	Result
Low	2402	-3.87	2399.95	-52.14	48.27	At least 20dB below from peak of RF	PASS
High	2480	-3.15	2487.60	-68.68	65.53	At least 20dB below from peak of RF	PASS

**[BT\_LE (LongRange S2)]**

Channel	Frequency (MHz)	RF Power Level (dBm)	Band-edge Frequency (MHz)	Band-edge Level (dBm)	Difference Level (dBm)	Limit (dBm)	Result
Low	2402	-3.95	2399.95	-62.80	58.85	At least 20dB below from peak of RF	PASS
High	2480	-3.38	2494.80	-69.52	66.14	At least 20dB below from peak of RF	PASS

**[BT\_LE (LongRange S8)]**

Channel	Frequency (MHz)	RF Power Level (dBm)	Band-edge Frequency (MHz)	Band-edge Level (dBm)	Difference Level (dBm)	Limit (dBm)	Result
Low	2402	-5.26	2399.95	-64.21	58.95	At least 20dB below from peak of RF	PASS
High	2480	-4.65	2497.55	-69.11	64.46	At least 20dB below from peak of RF	PASS

**[Chain 1]****[BT\_LE (1Mbps)]**

Channel	Frequency (MHz)	RF Power Level (dBm)	Band-edge Frequency (MHz)	Band-edge Level (dBm)	Difference Level (dBm)	Limit (dBm)	Result
Low	2402	-4.62	2399.95	-63.70	59.08	At least 20dB below from peak of RF	PASS
High	2480	-3.95	2483.80	-67.59	63.64	At least 20dB below from peak of RF	PASS

**[BT\_LE (2Mbps)]**

Channel	Frequency (MHz)	RF Power Level (dBm)	Band-edge Frequency (MHz)	Band-edge Level (dBm)	Difference Level (dBm)	Limit (dBm)	Result
Low	2402	-4.71	2399.95	-53.69	48.98	At least 20dB below from peak of RF	PASS
High	2480	-4.00	2497.10	-68.87	64.87	At least 20dB below from peak of RF	PASS

**[BT\_LE (LongRange S2)]**

Channel	Frequency (MHz)	RF Power Level (dBm)	Band-edge Frequency (MHz)	Band-edge Level (dBm)	Difference Level (dBm)	Limit (dBm)	Result
Low	2402	-4.71	2399.90	-63.71	59.00	At least 20dB below from peak of RF	PASS
High	2480	-4.20	2484.95	-68.92	64.72	At least 20dB below from peak of RF	PASS


**[BT\_LE (LongRange S8)]**

Channel	Frequency (MHz)	RF Power Level (dBm)	Band-edge Frequency (MHz)	Band-edge Level (dBm)	Difference Level (dBm)	Limit (dBm)	Result
Low	2402	-5.92	2399.80	-64.03	58.11	At least 20dB below from peak of RF	PASS
High	2480	-5.25	2490.10	-68.78	63.53	At least 20dB below from peak of RF	PASS




4.3.4 Trace data


[Chain 0]  
[BT\_LE (1Mbps)]  
Channel: Low

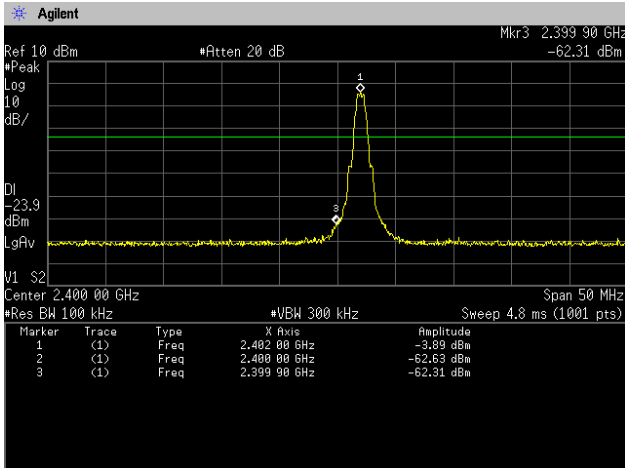


Channel: High

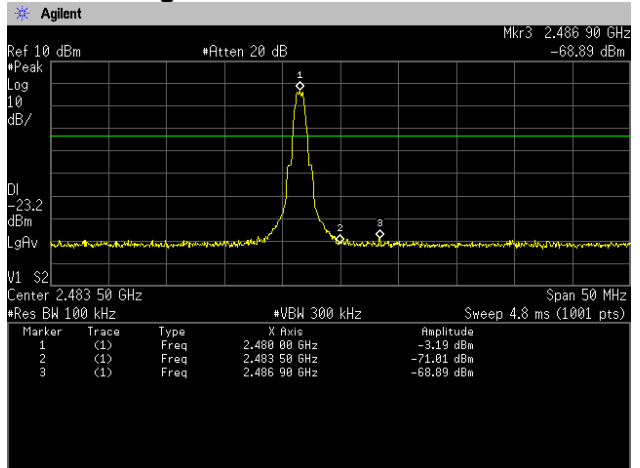

[Chain 0]  
[BT\_LE (2Mbps)]  
Channel: Low

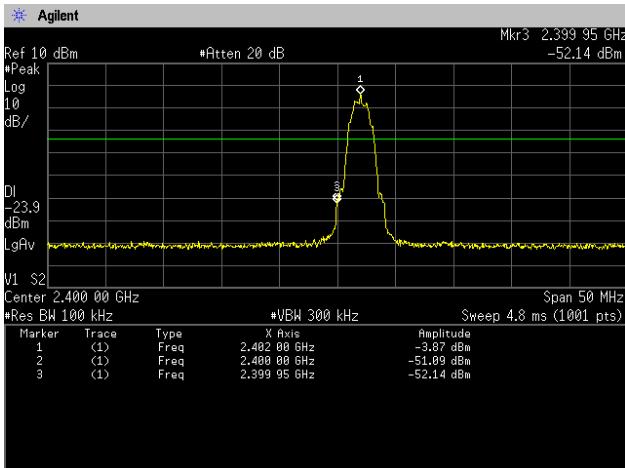


Channel: High

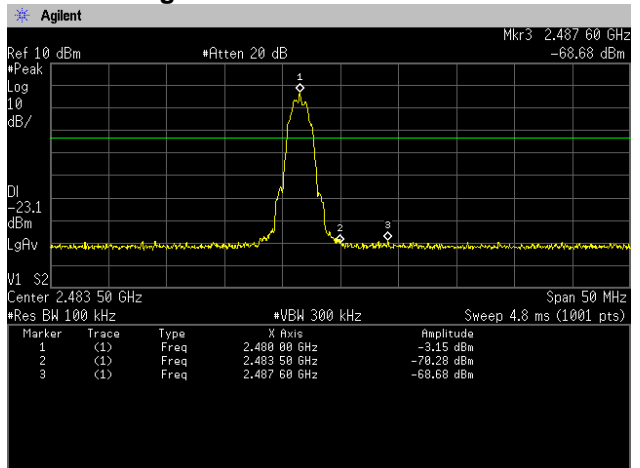





**[Chain 0]  
[BT\_LE (LongRange S2)]  
Channel: Low**

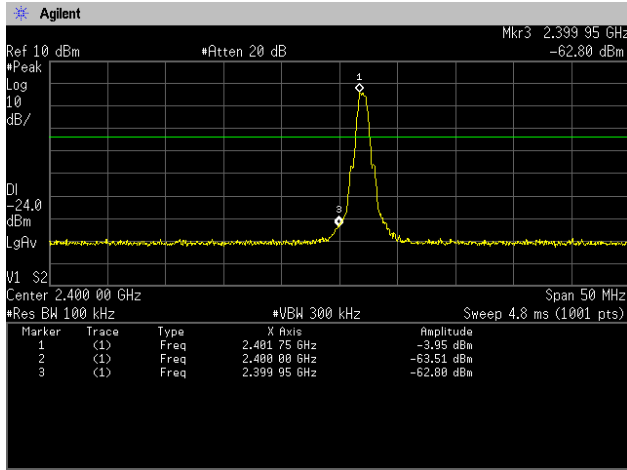


**Channel: High**

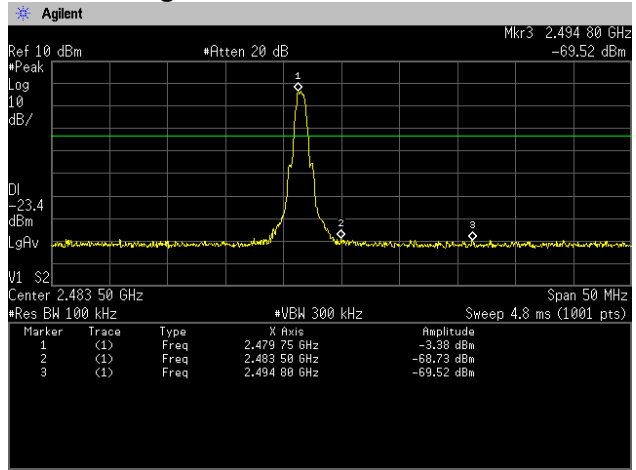

**[Chain 0]  
[BT\_LE (LongRange S8)]  
Channel: Low**

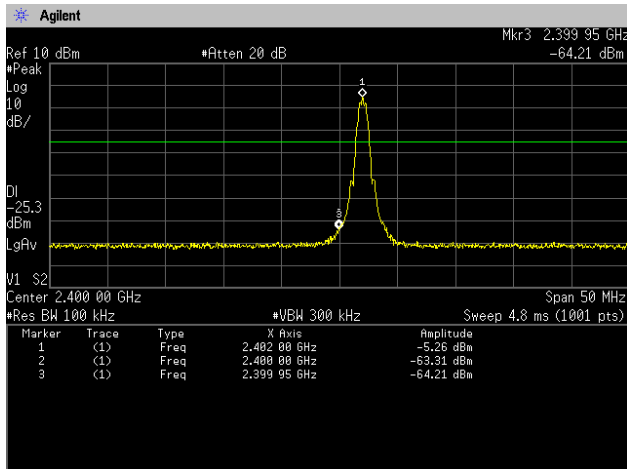


**Channel: High**

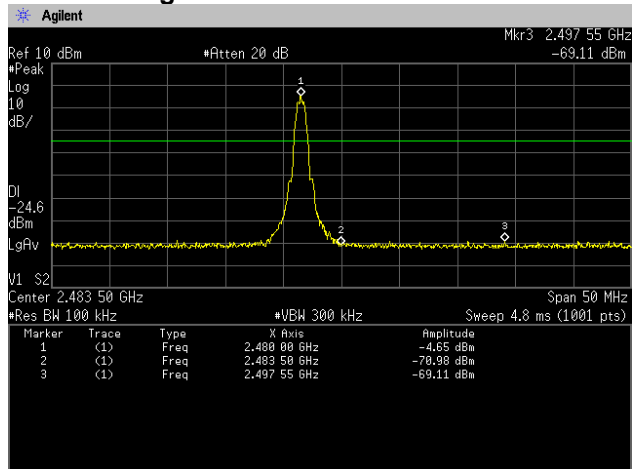







**[Chain 1]  
[BT\_LE (1Mbps)]  
Channel: Low**

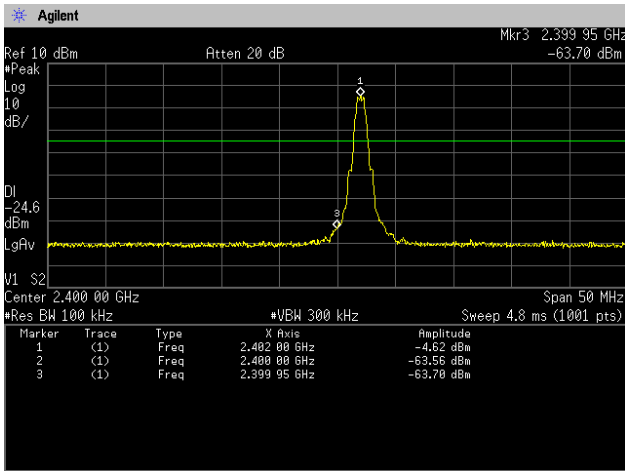


**Channel: High**

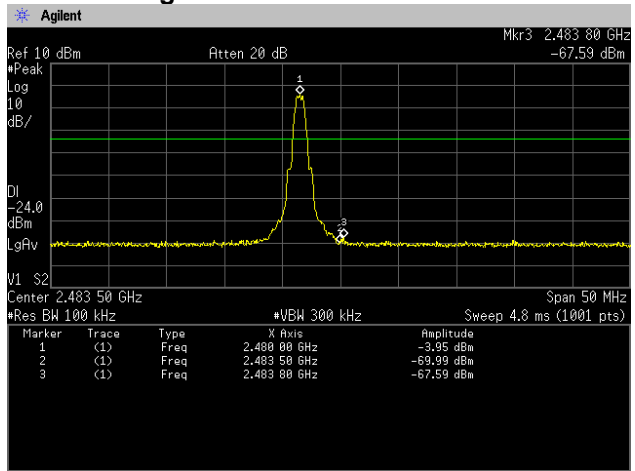

**[Chain 1]  
[BT\_LE (2Mbps)]  
Channel: Low**

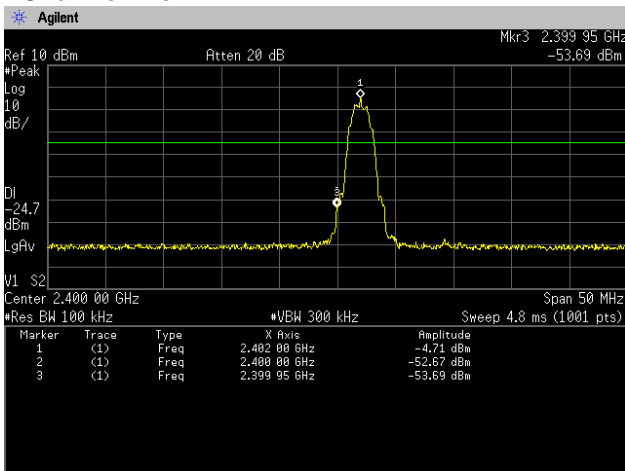


**Channel: High**

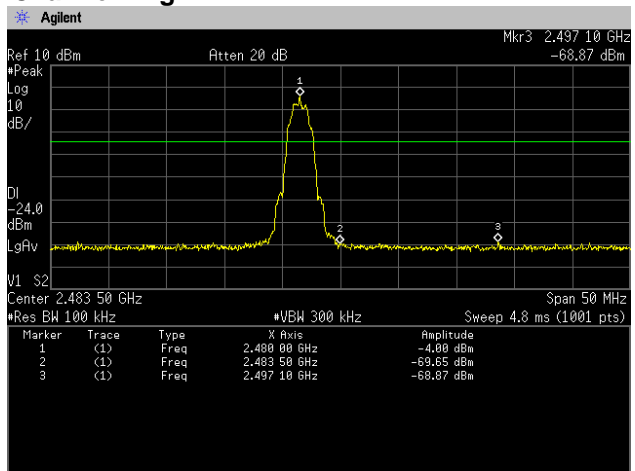





**[Chain 1]  
[BT\_LE (LongRange S2)]  
Channel: Low**

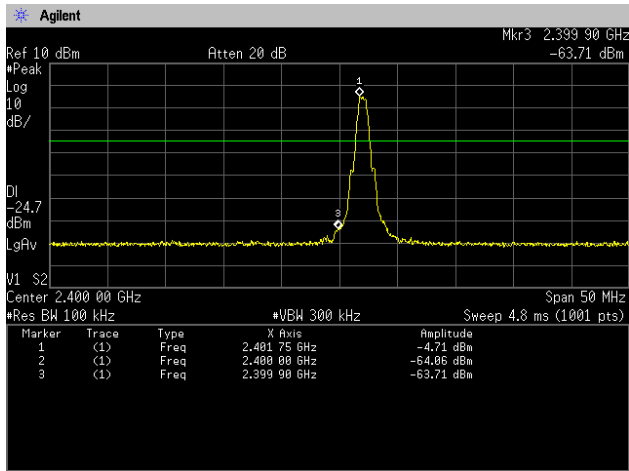


**Channel: High**

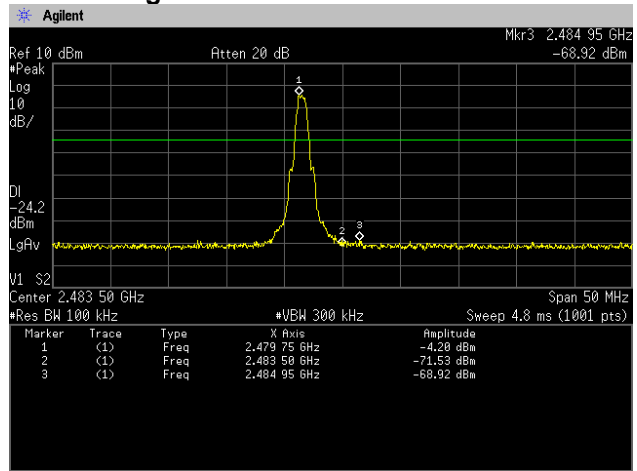

**[Chain 1]  
[BT\_LE (LongRange S8)]  
Channel: Low**

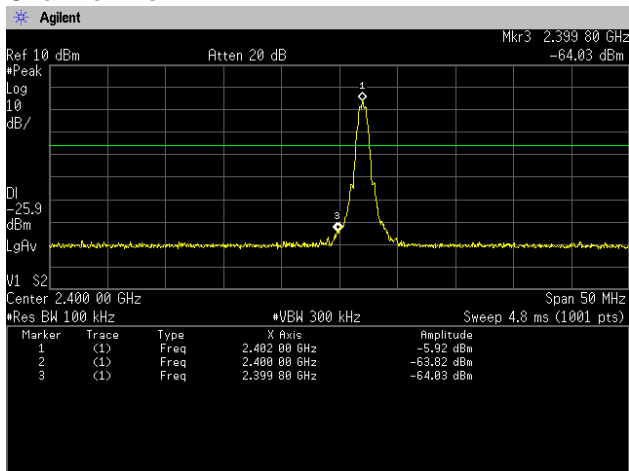

**Channel: High**

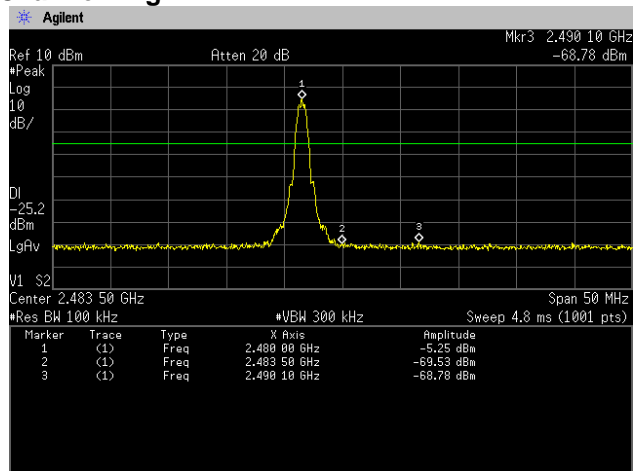



**4.4 Spurious Emissions - Conducted -**

**4.4.1 Measurement procedure**


**[FCC 15.247(d), KDB558074 D01 v05r02]**

The spurious emissions (Conducted) are measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) Span = wide enough to fully capture the emission being measured.
- b) RBW = 100 kHz
- c) VBW ≥ RBW
- d) Sweep time = auto-couple
- e) Detector = peak
- f) Trace mode = max hold

- Test configuration

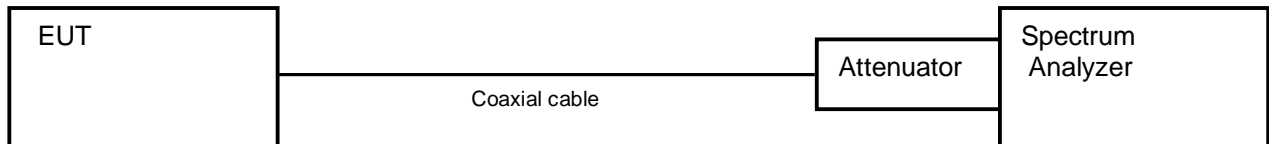

**4.4.2 Limit**

In any 100kHz bandwidth outside the frequency band the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

**4.4.3 Measurement result**


Date	: 4-July-2023		
Temperature	: 24.1 [°C]		
Humidity	: 63.3 [%]	Test engineer	:
Test place	: Shielded room No.4		<u>Kazunori Saito</u>
Date	: 5-July-2023		
Temperature	: 24.1 [°C]		
Humidity	: 59.3 [%]	Test engineer	:
Test place	: Shielded room No.4		<u>Kazunori Saito</u>

Channel	Frequency [MHz]	Limit [dB]	Results Chart	Result
Low	2402	At least 20dB below from peak of RF	See the trace Data	PASS
Middle	2440	At least 20dB below from peak of RF	See the trace Data	PASS
High	2480	At least 20dB below from peak of RF	See the trace Data	PASS




### 4.4.4 Trace data


**[BT\_LE (1Mbps)]**  
**Channel: Low [Chain 0]**  
**30MHz - 1GHz**

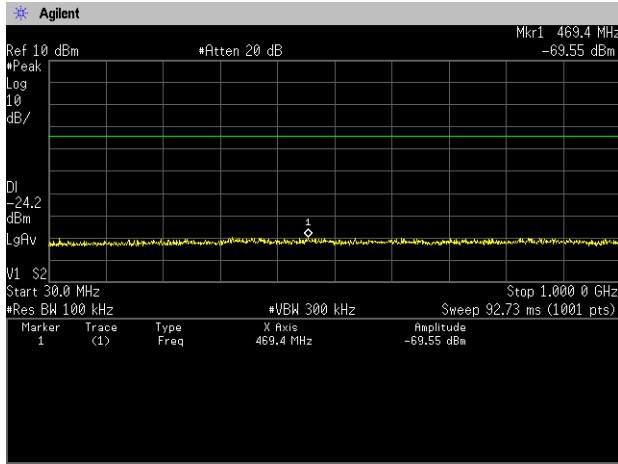


### 1GHz - 5GHz

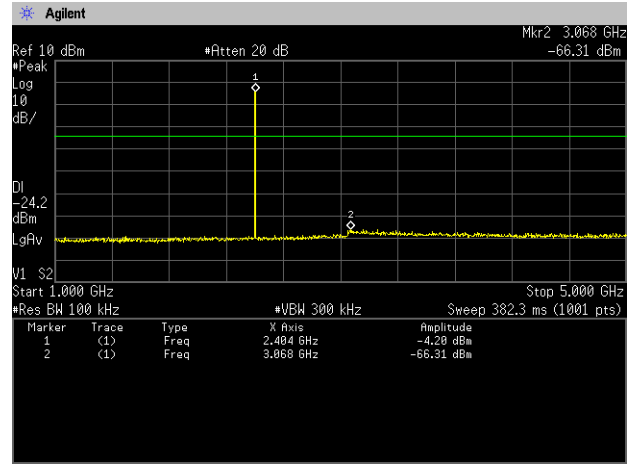


### 5GHz - 10GHz

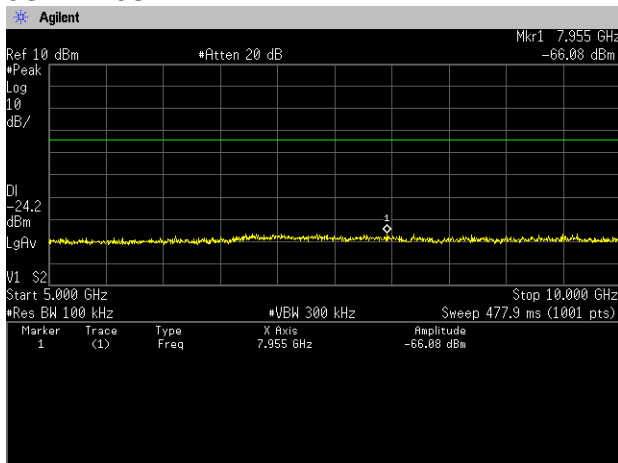


### 10GHz - 15GHz

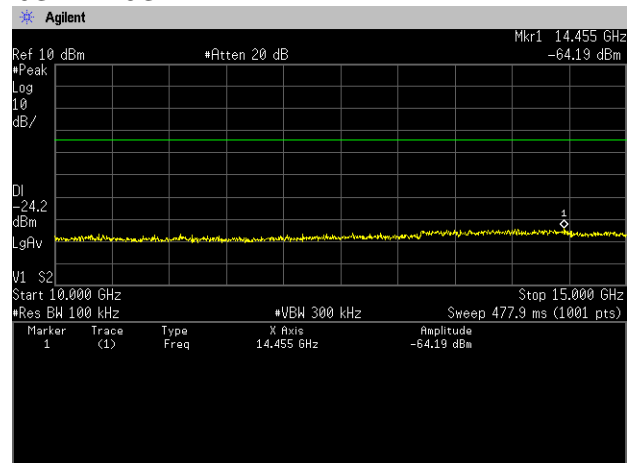

### 15GHz - 20GHz

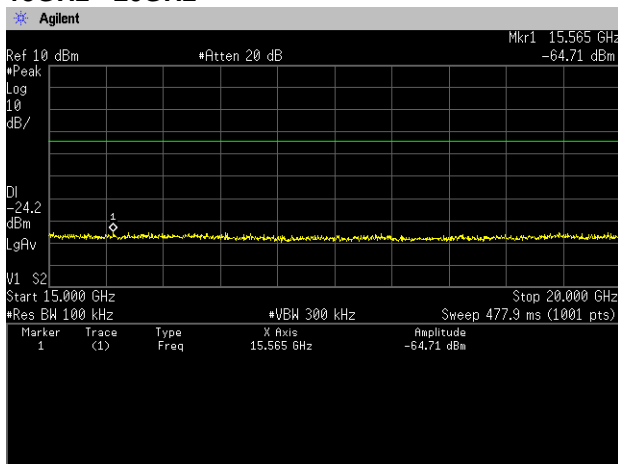


### 20GHz - 25GHz

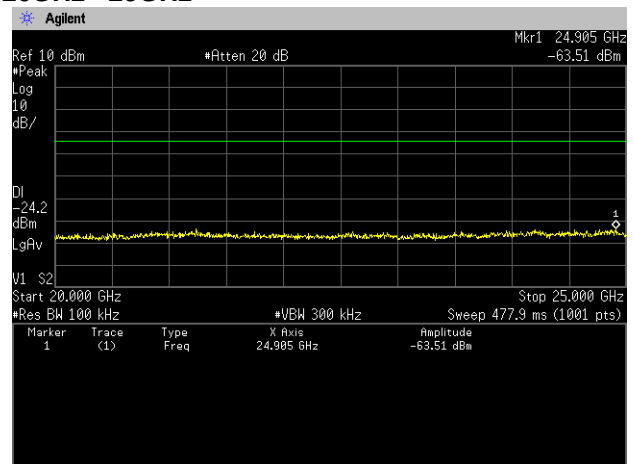





**[BT\_LE (1Mbps)]**  
**Channel: Middle [Chain 0]**  
**30MHz - 1GHz**

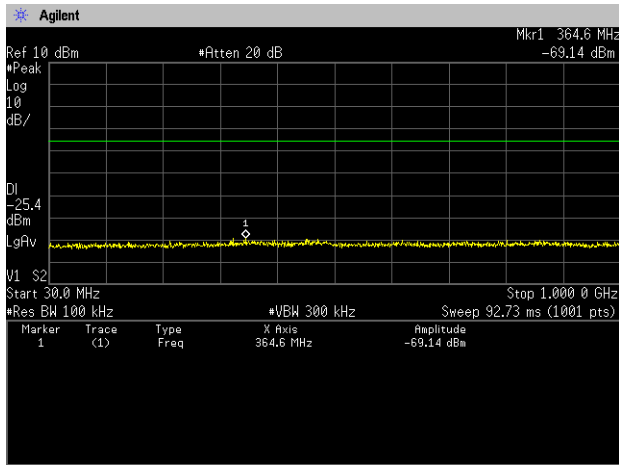


**1GHz - 5GHz**

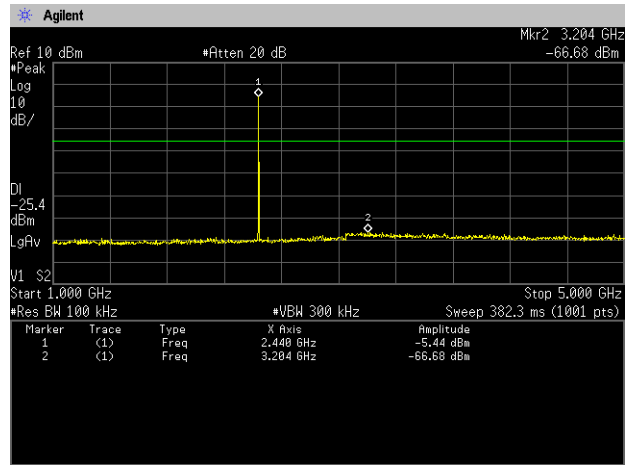


**5GHz - 10GHz**

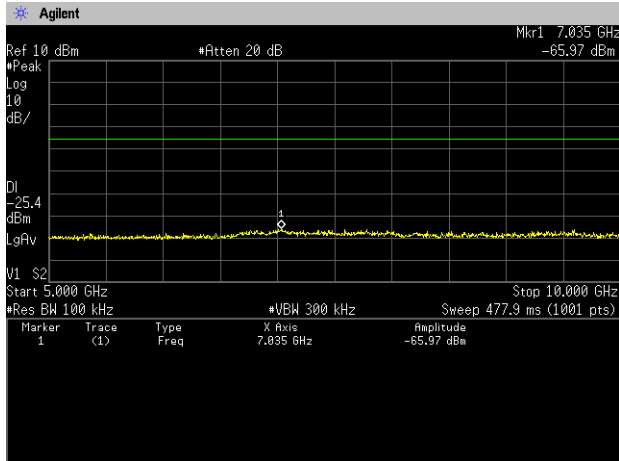


**10GHz - 15GHz**

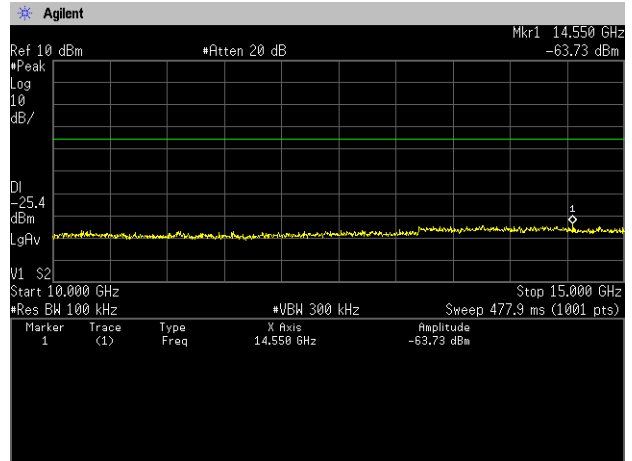

**15GHz - 20GHz**

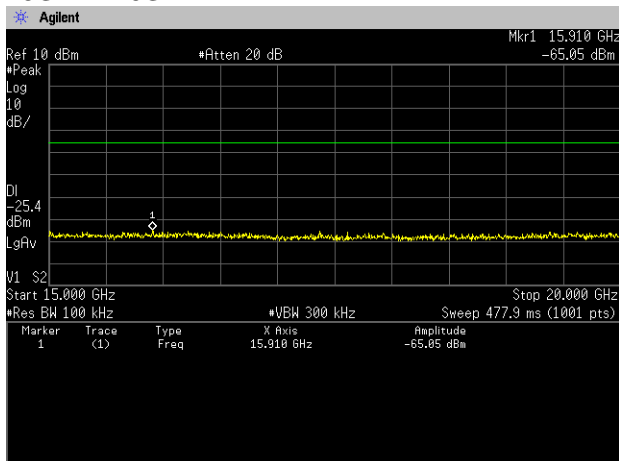


**20GHz - 25GHz**

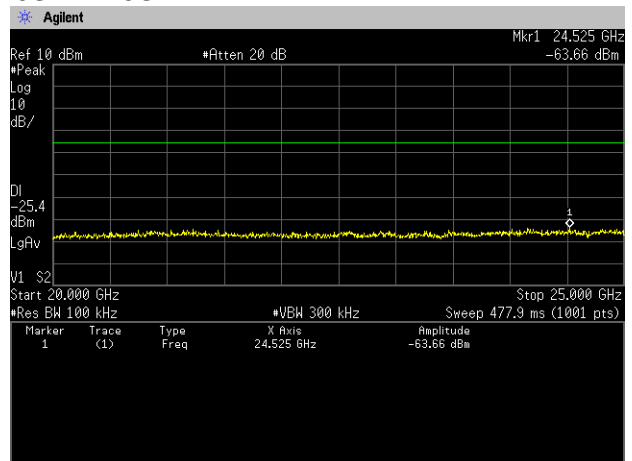





**[BT\_LE (1Mbps)]**  
**Channel: High [Chain 0]**  
**30MHz - 1GHz**

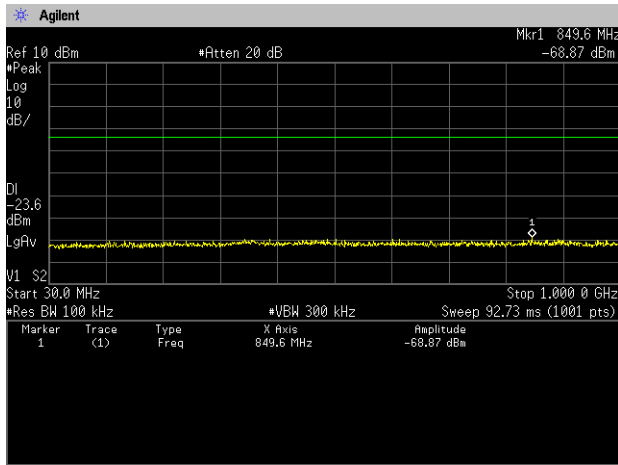


**1GHz - 5GHz**

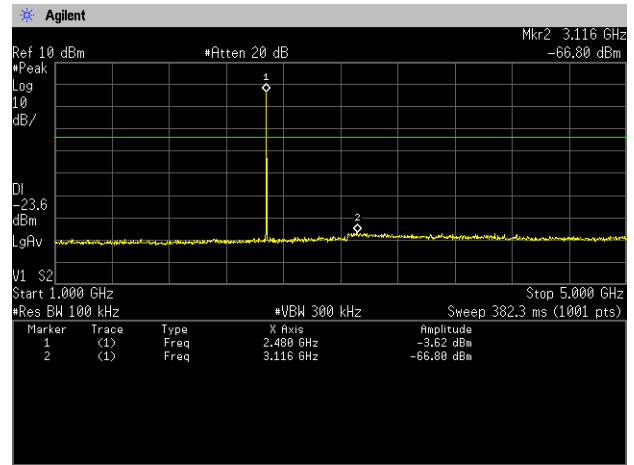


**5GHz - 10GHz**

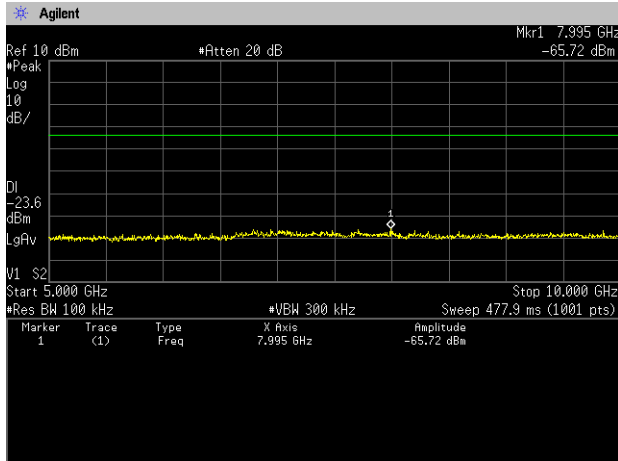


**10GHz - 15GHz**

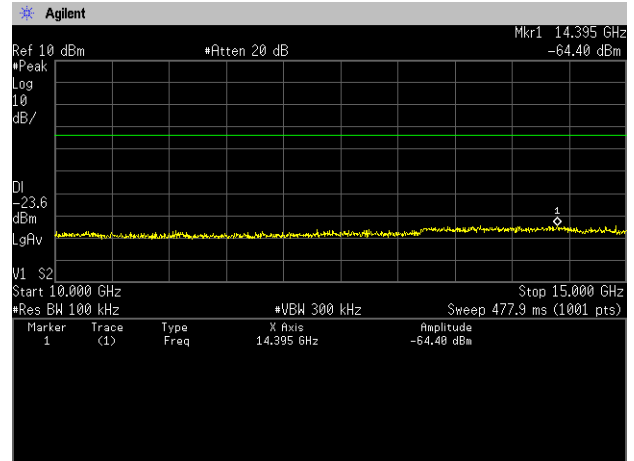


**15GHz - 20GHz**

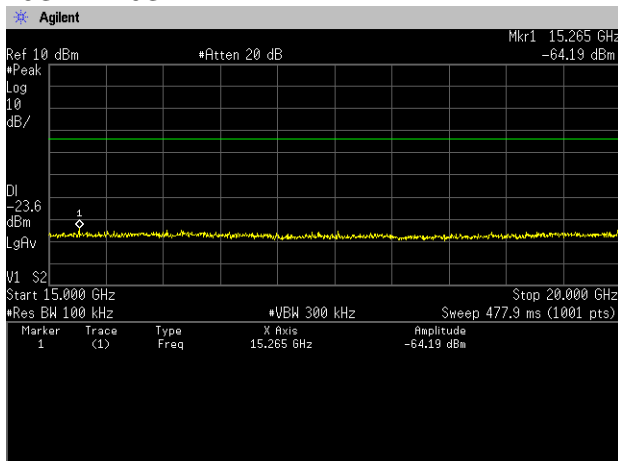


**20GHz - 25GHz**

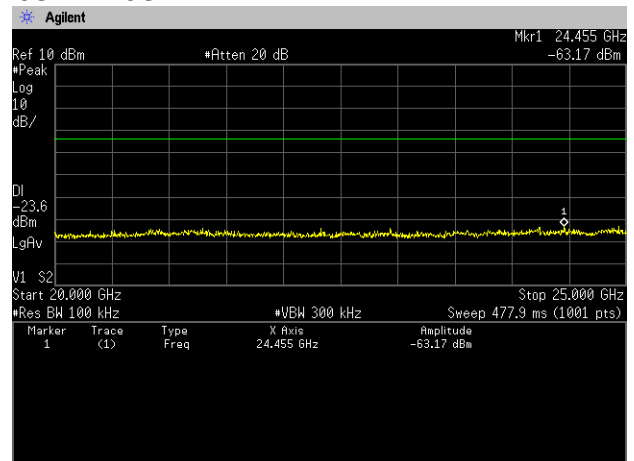


**[BT\_LE (2Mbps)]**  
**Channel: Low [Chain 0]**  
**30MHz - 1GHz**

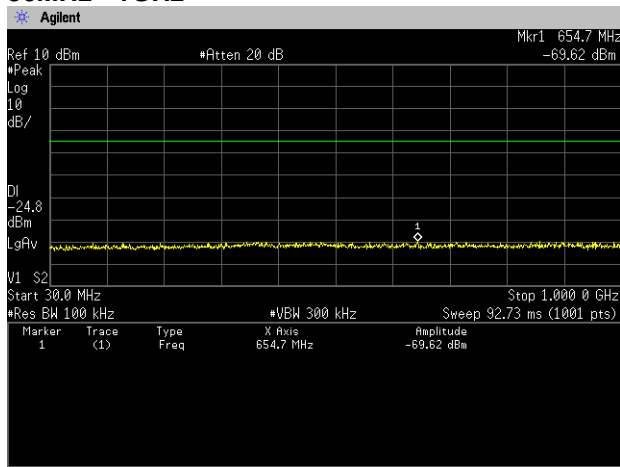


**1GHz - 5GHz**

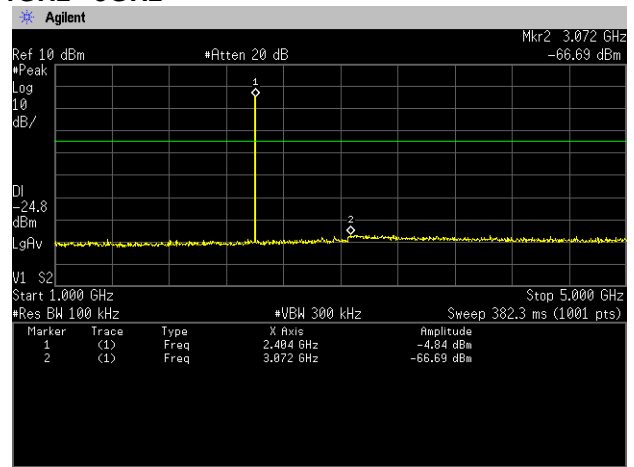


**5GHz - 10GHz**

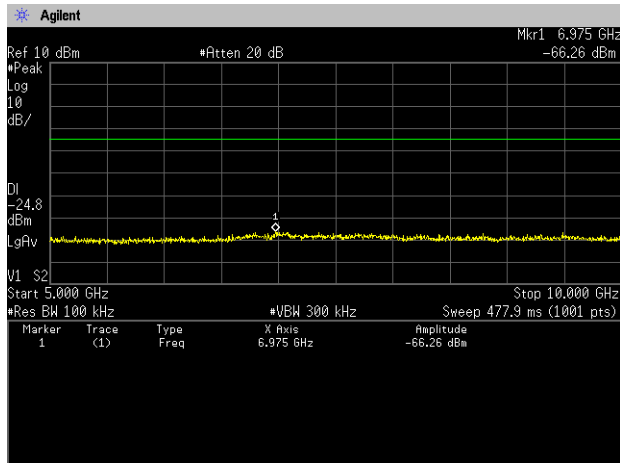


**10GHz - 15GHz**

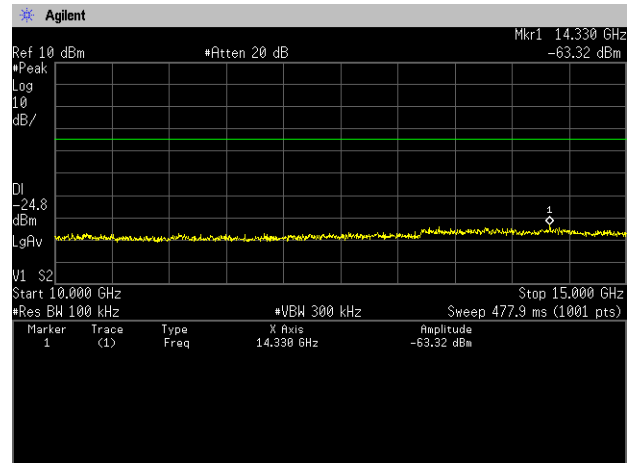

**15GHz - 20GHz**

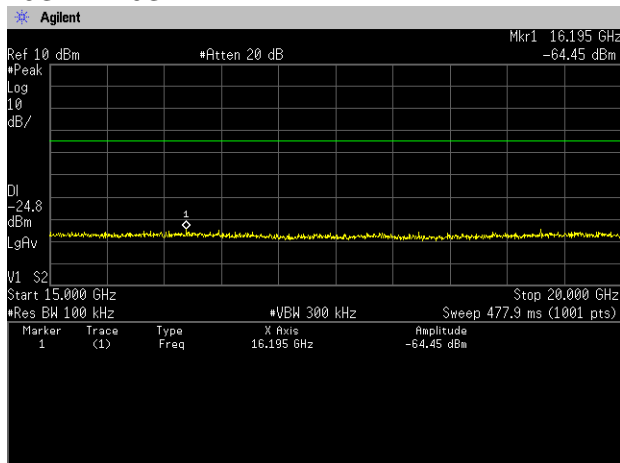


**20GHz - 25GHz**

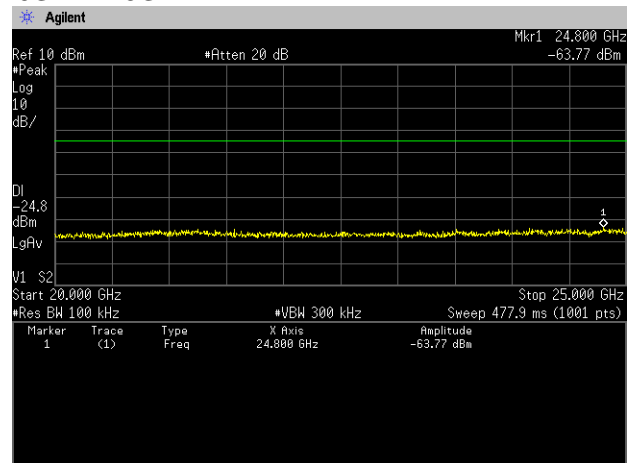





**[BT\_LE (2Mbps)]**  
**Channel: Middle [Chain 0]**  
**30MHz - 1GHz**

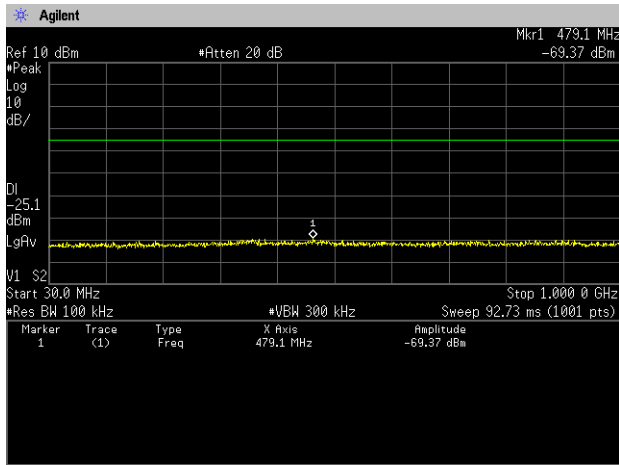


**1GHz - 5GHz**

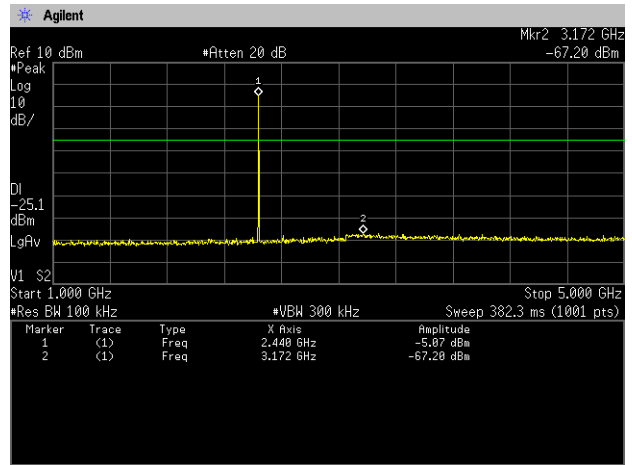


**5GHz - 10GHz**

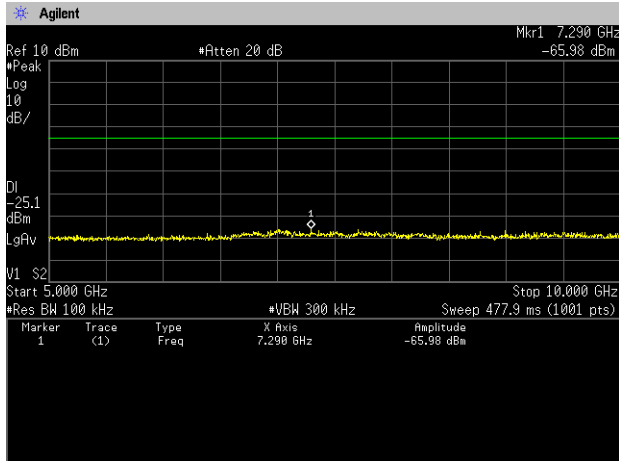


**10GHz - 15GHz**

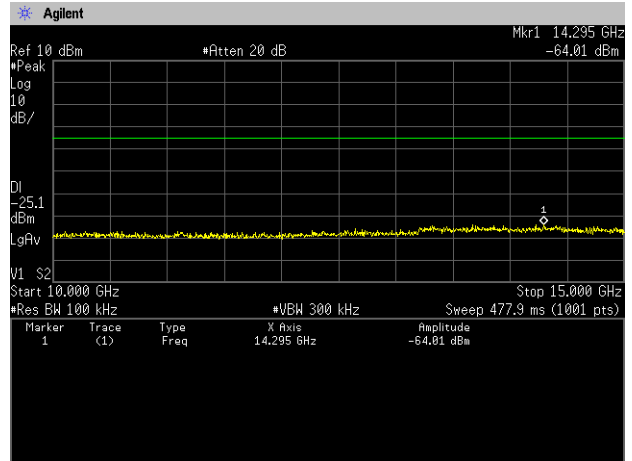

**15GHz - 20GHz**

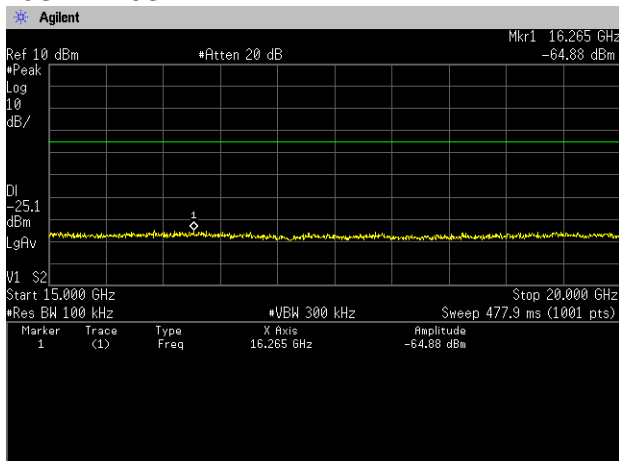


**20GHz - 25GHz**

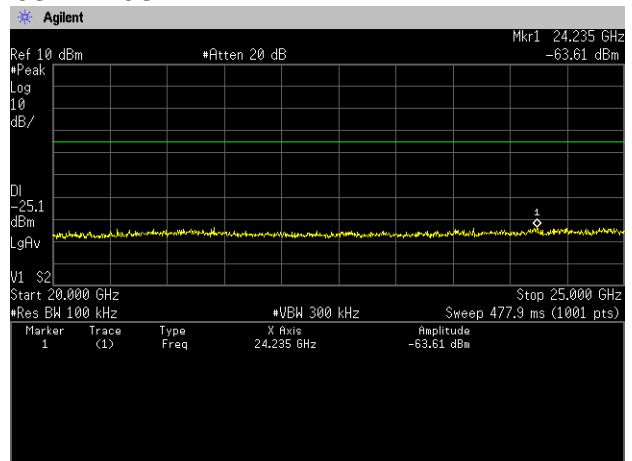







**[BT\_LE (2Mbps)]**  
**Channel: High [Chain 0]**  
**30MHz - 1GHz**

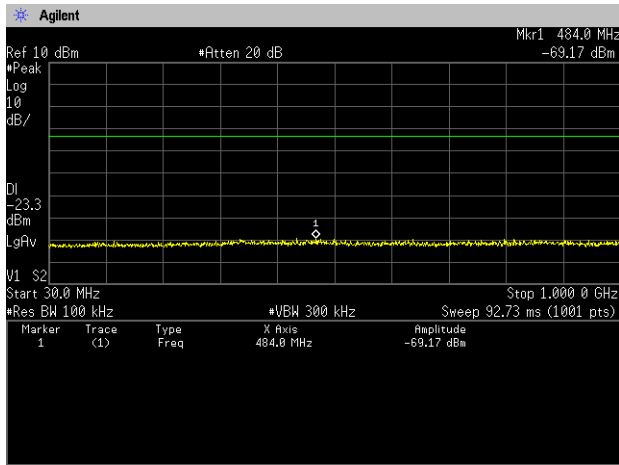


**1GHz - 5GHz**

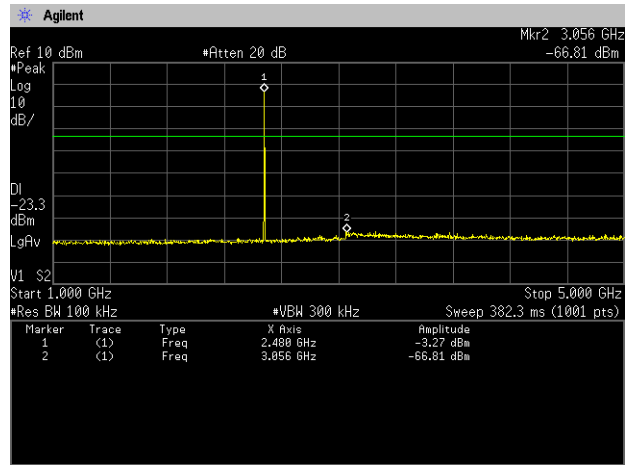


**5GHz - 10GHz**

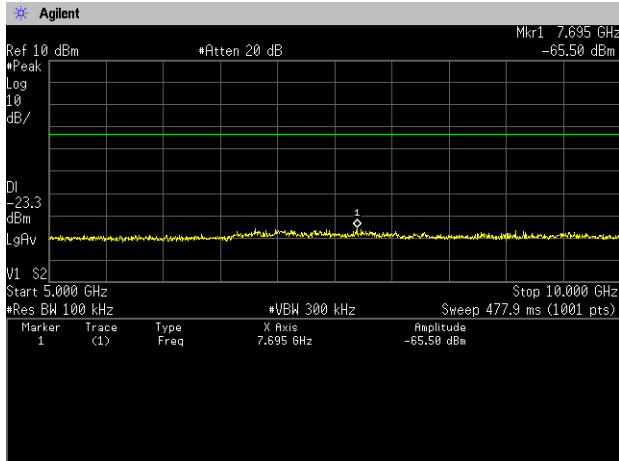


**10GHz - 15GHz**

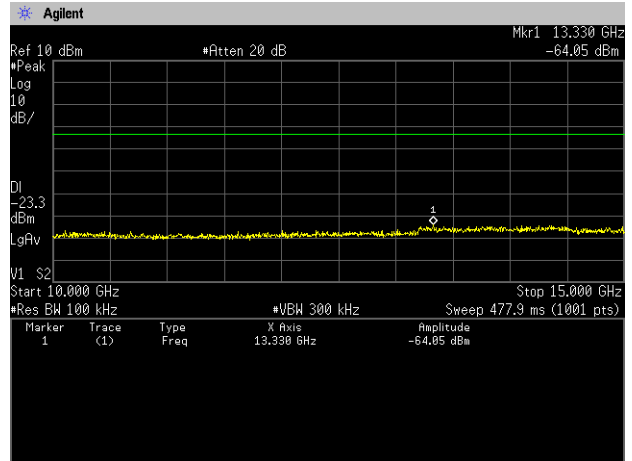

**15GHz - 20GHz**

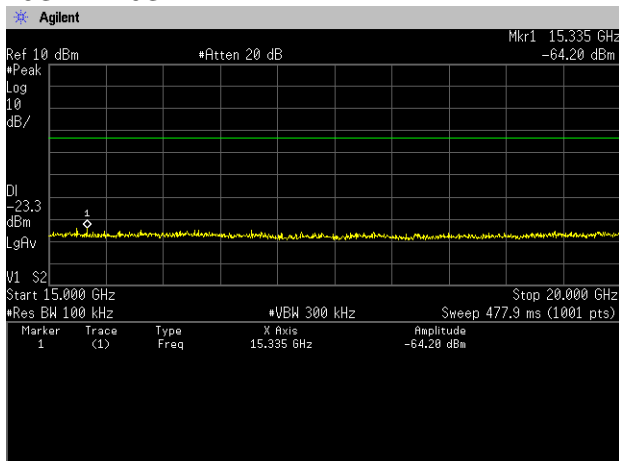


**20GHz - 25GHz**

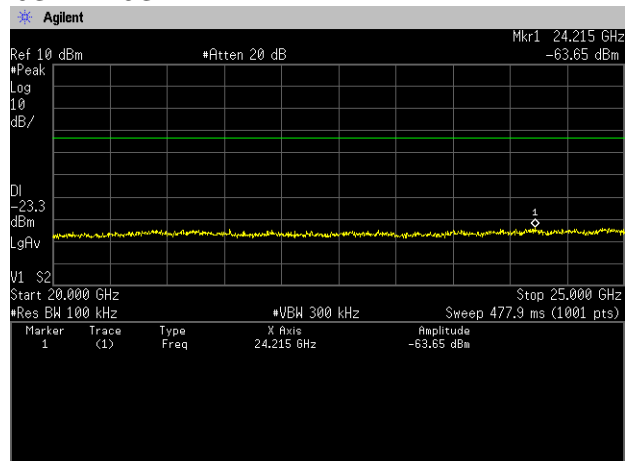





### [BT\_LE (LongRange S2)] Channel: Low [Chain 0] 30MHz - 1GHz

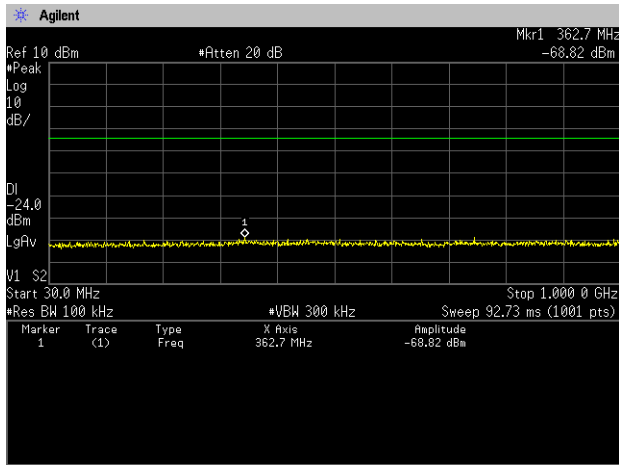


### 1GHz - 5GHz

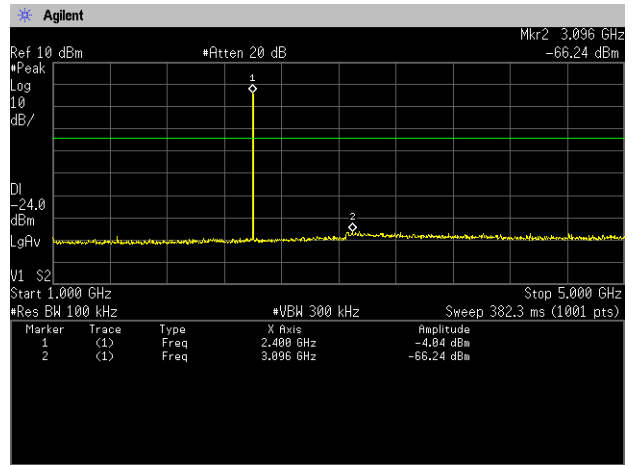


### 5GHz - 10GHz

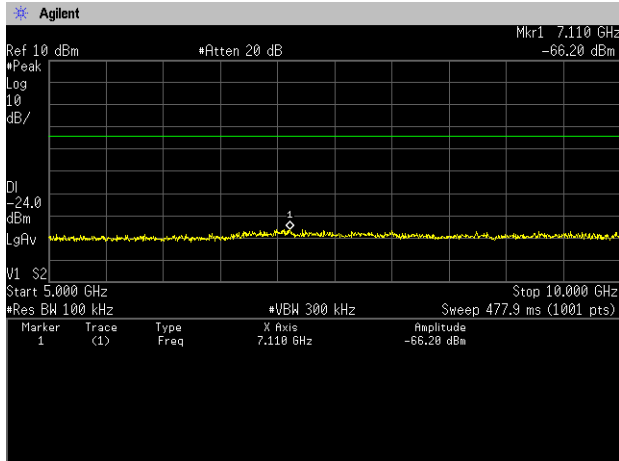


### 10GHz - 15GHz

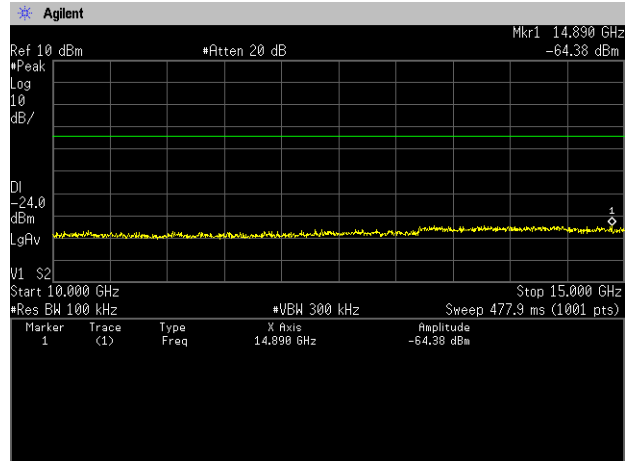

### 15GHz - 20GHz

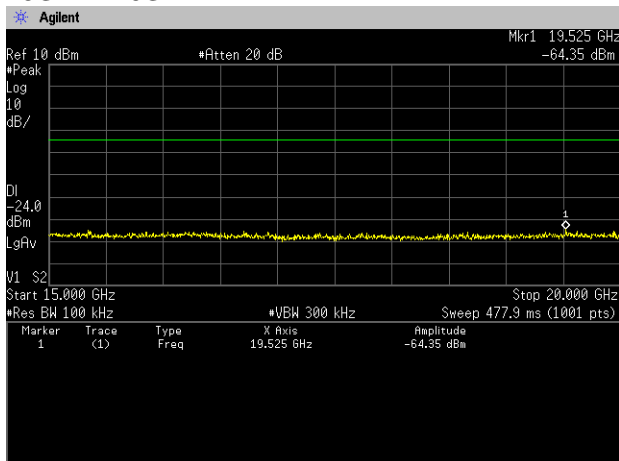


### 20GHz - 25GHz

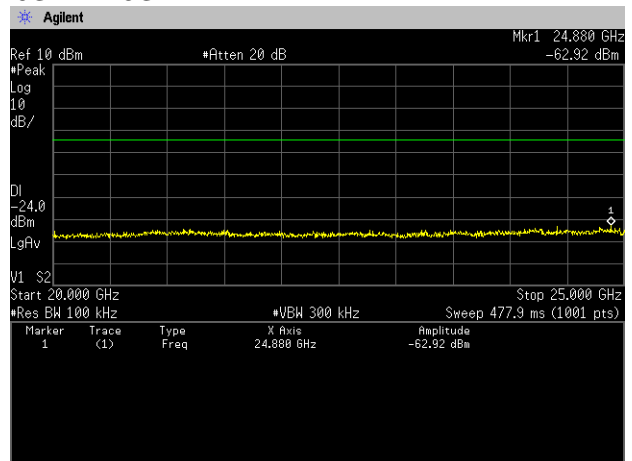





**[BT\_LE (LongRange S2)]**  
**Channel: Middle [Chain 0]**  
**30MHz - 1GHz**

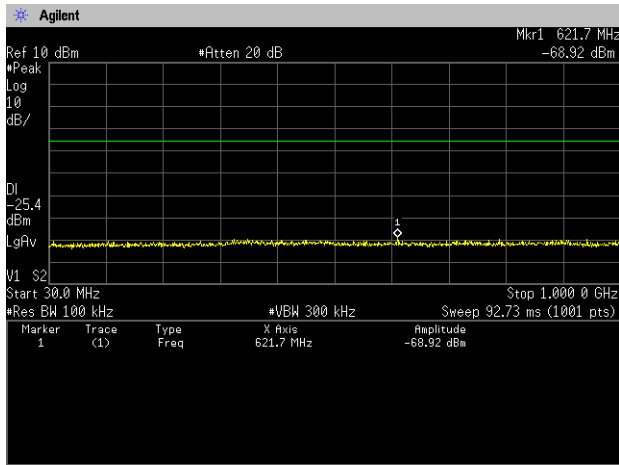


**1GHz - 5GHz**

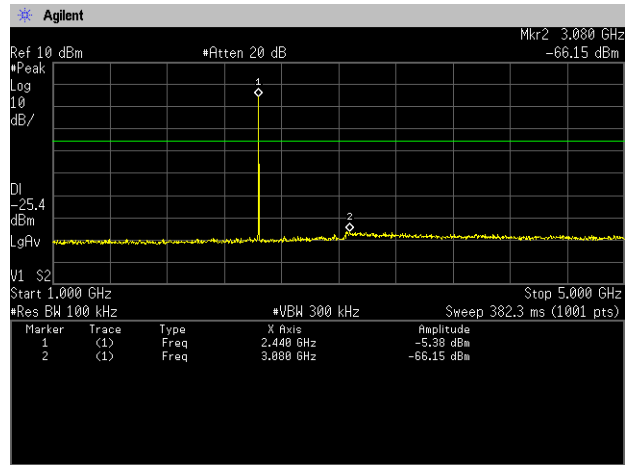


**5GHz - 10GHz**

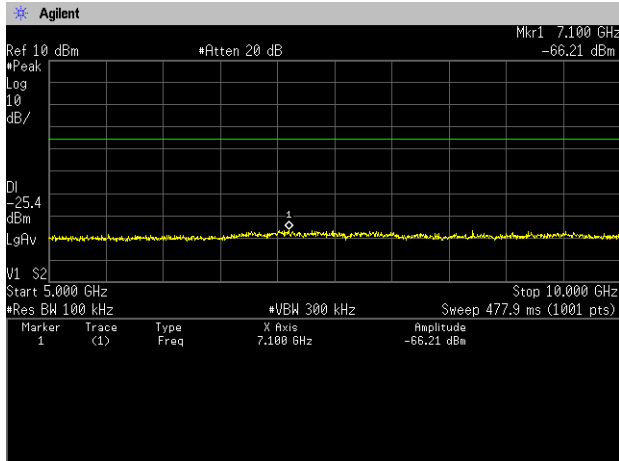


**10GHz - 15GHz**

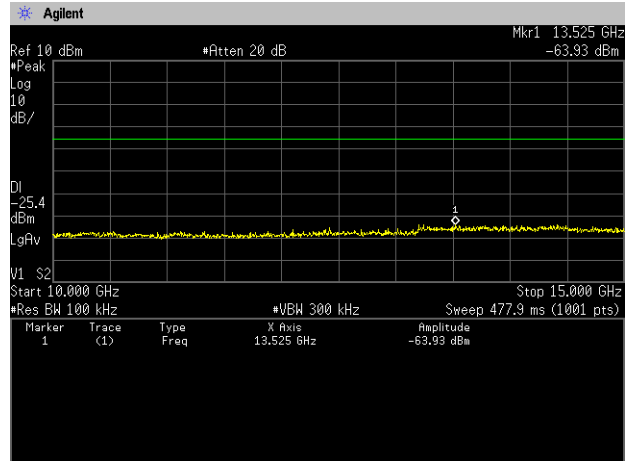

**15GHz - 20GHz**

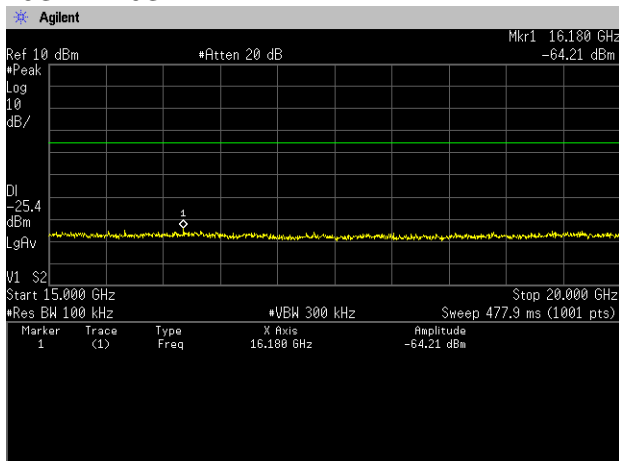


**20GHz - 25GHz**

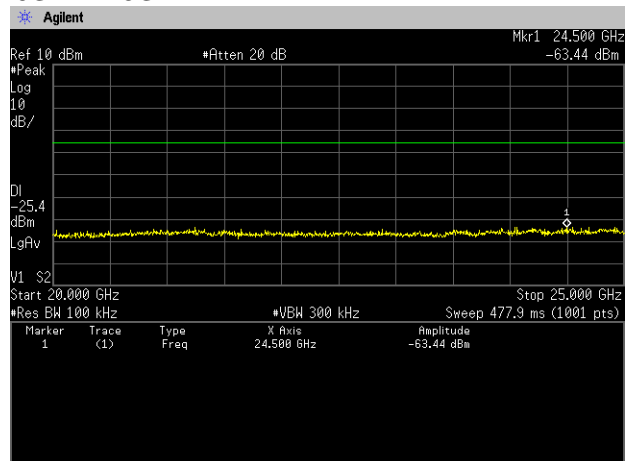





**[BT\_LE (LongRange S2)]**  
**Channel: High [Chain 0]**  
**30MHz - 1GHz**

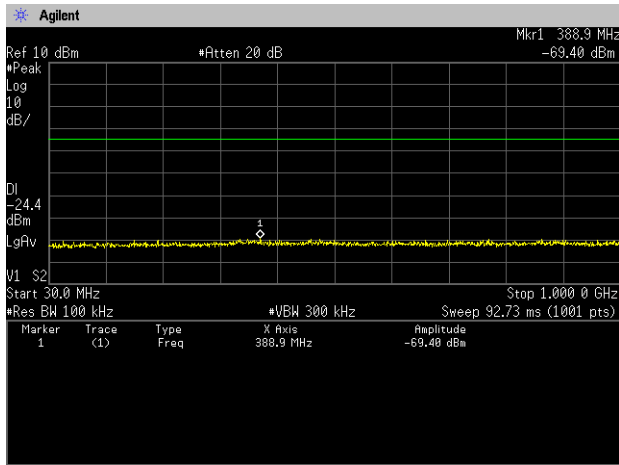


**1GHz - 5GHz**

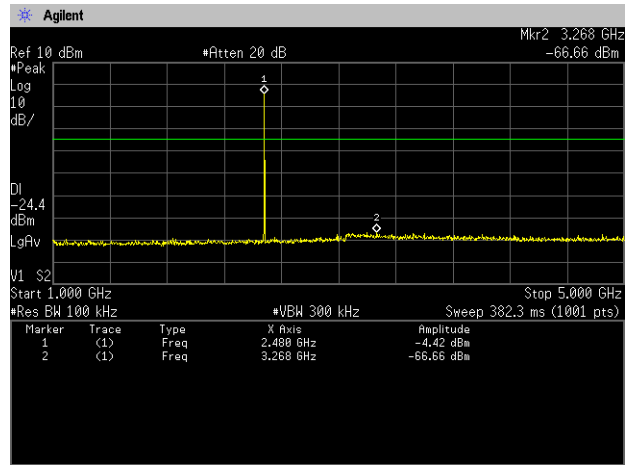


**5GHz - 10GHz**

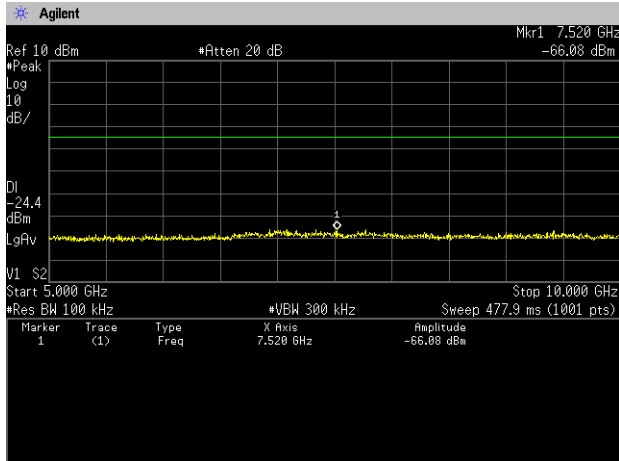


**10GHz - 15GHz**

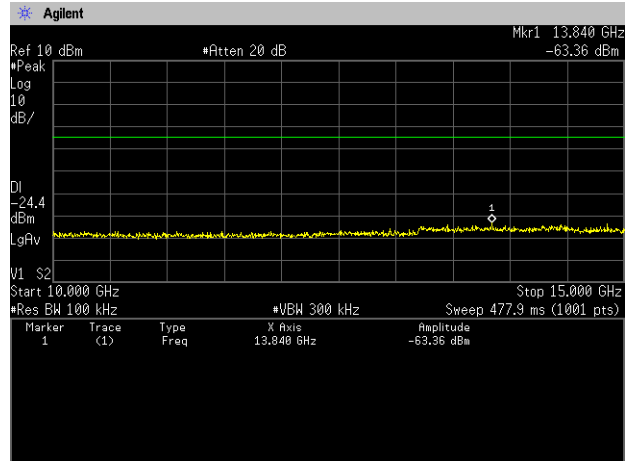


**15GHz - 20GHz**

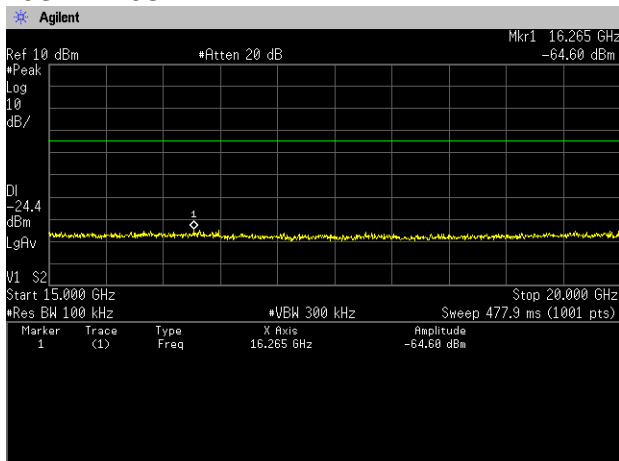


**20GHz - 25GHz**

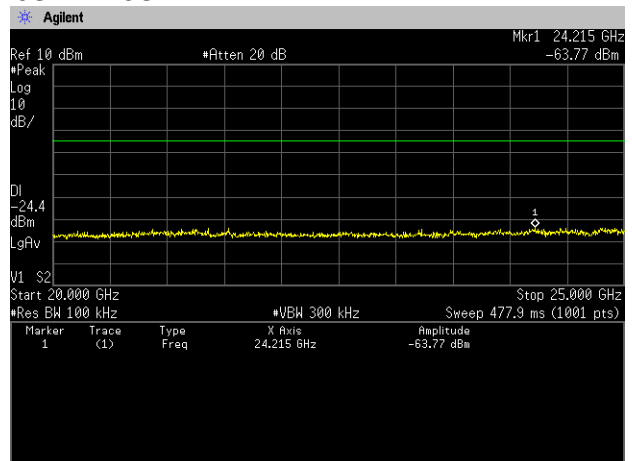


**[BT\_LE (LongRange S8)]**  
**Channel: Low [Chain 0]**  
**30MHz - 1GHz**

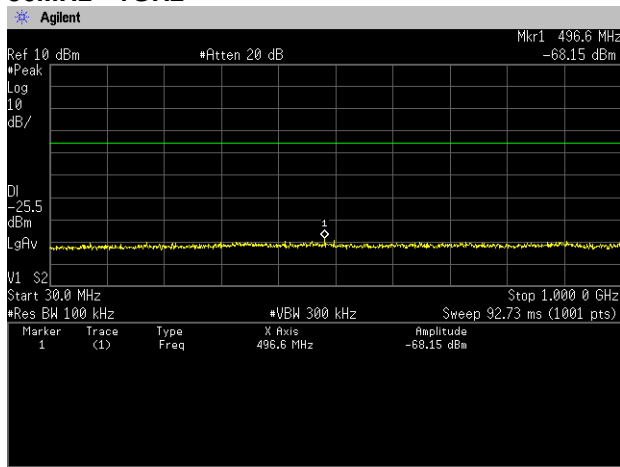


**1GHz - 5GHz**

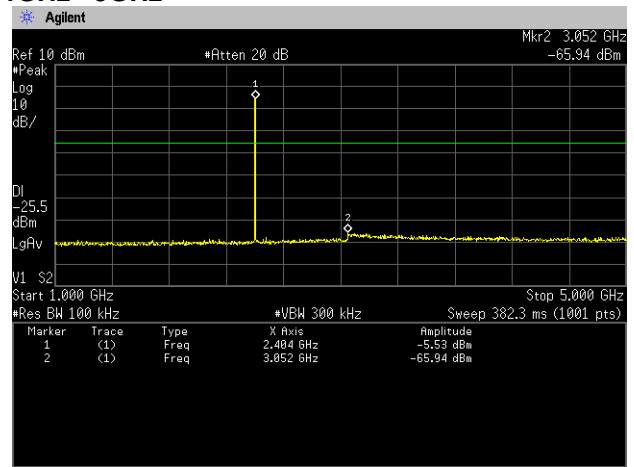


**5GHz - 10GHz**

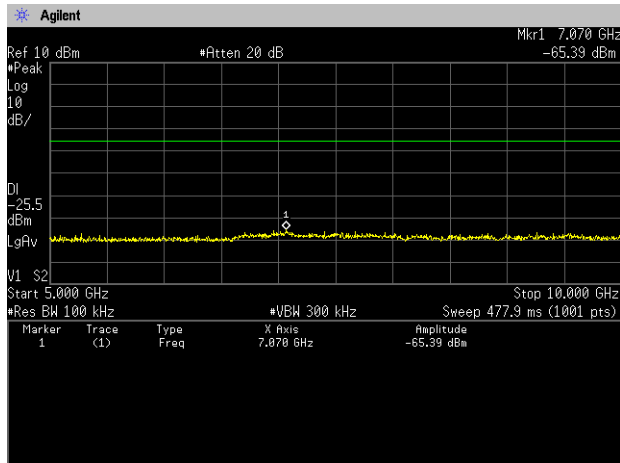


**10GHz - 15GHz**

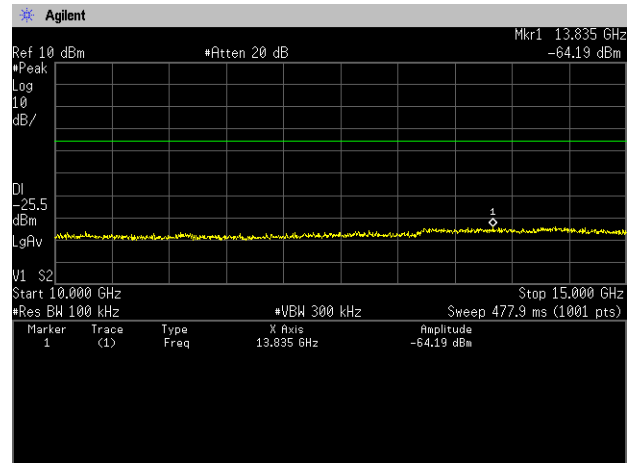

**15GHz - 20GHz**

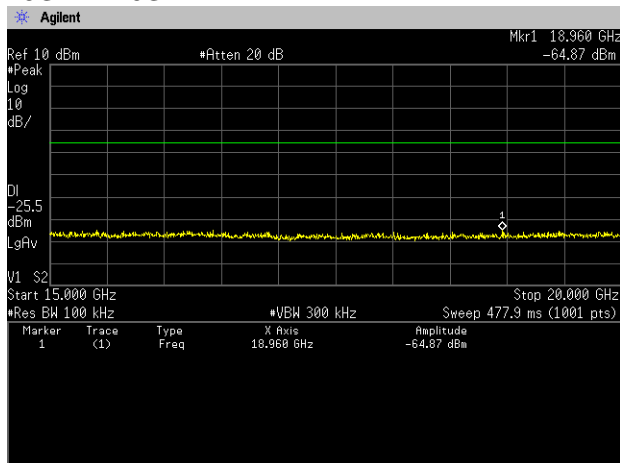


**20GHz - 25GHz**

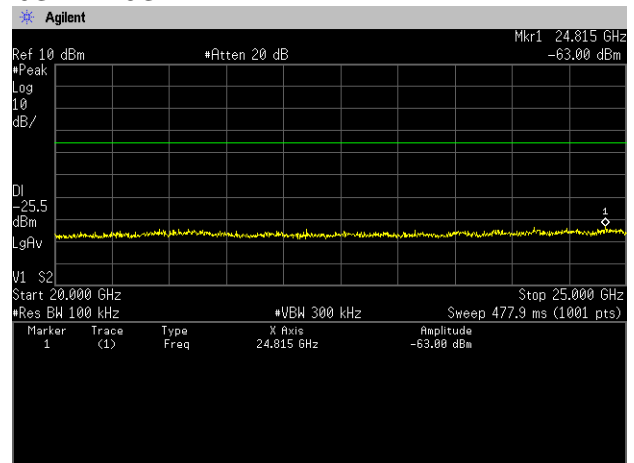





**[BT\_LE (LongRange S8)]**  
**Channel: Middle [Chain 0]**  
**30MHz - 1GHz**

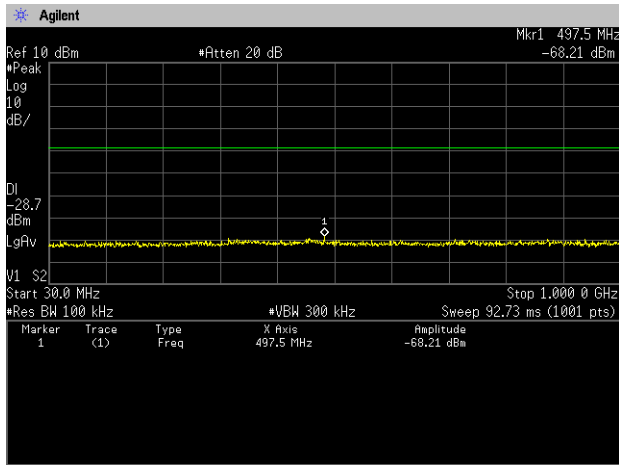


**1GHz - 5GHz**

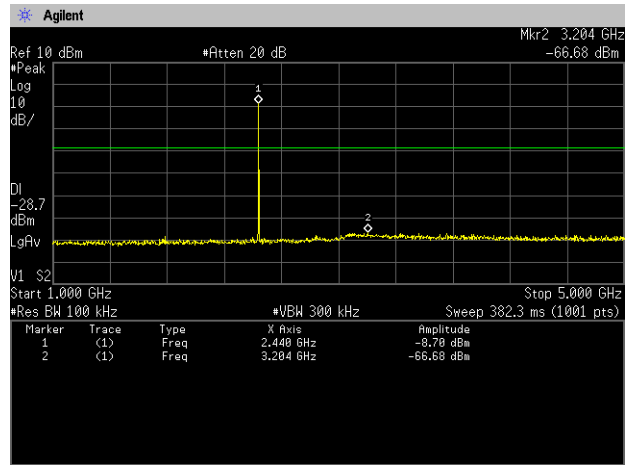


**5GHz - 10GHz**

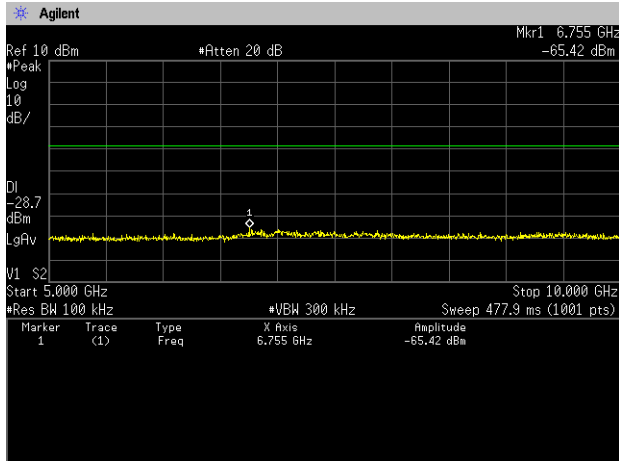


**10GHz - 15GHz**

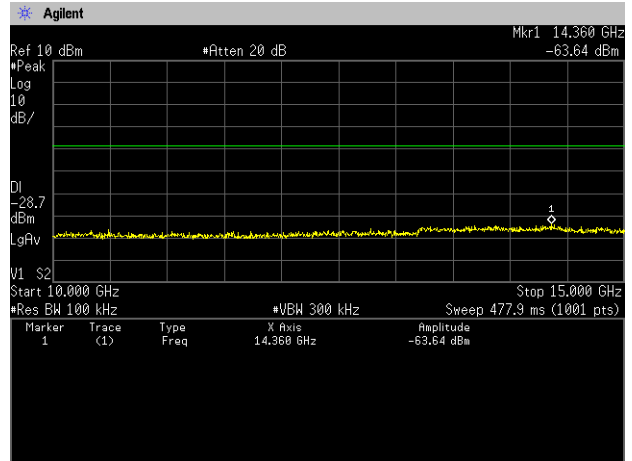


**15GHz - 20GHz**

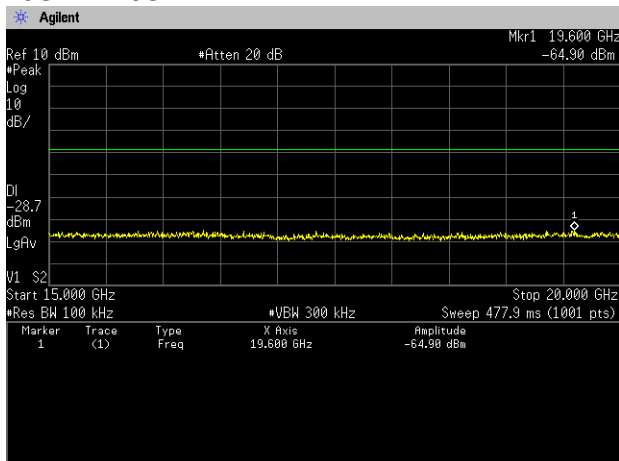


**20GHz - 25GHz**

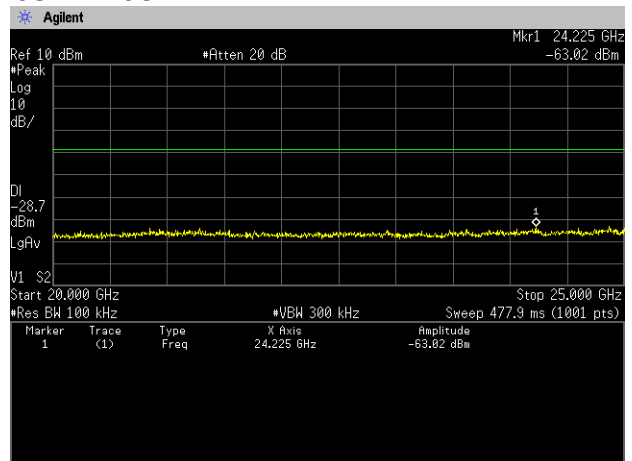


**[BT\_LE (LongRange S8)]**  
**Channel: High [Chain 0]**  
**30MHz - 1GHz**

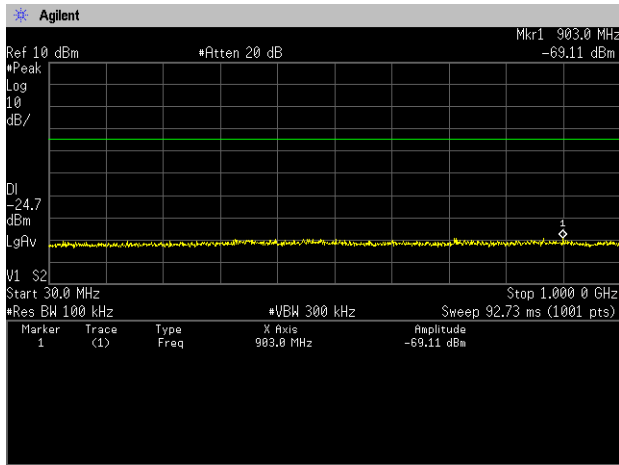


**1GHz - 5GHz**

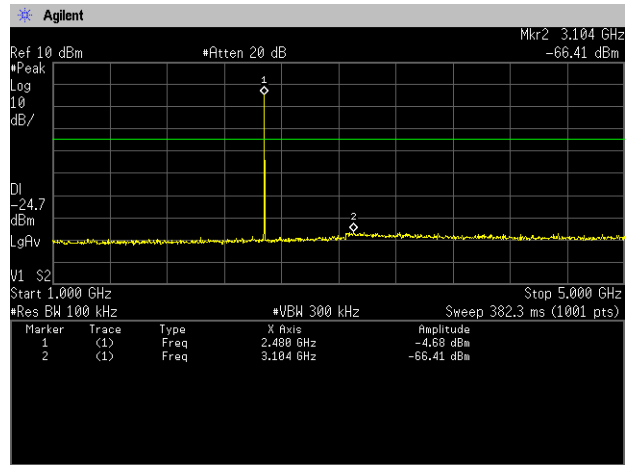


**5GHz - 10GHz**

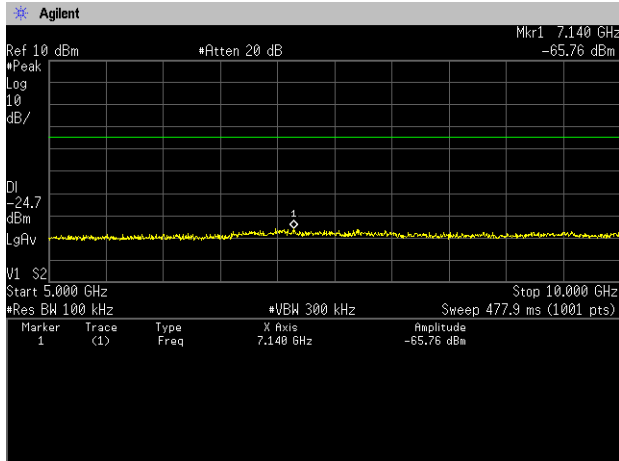


**10GHz - 15GHz**

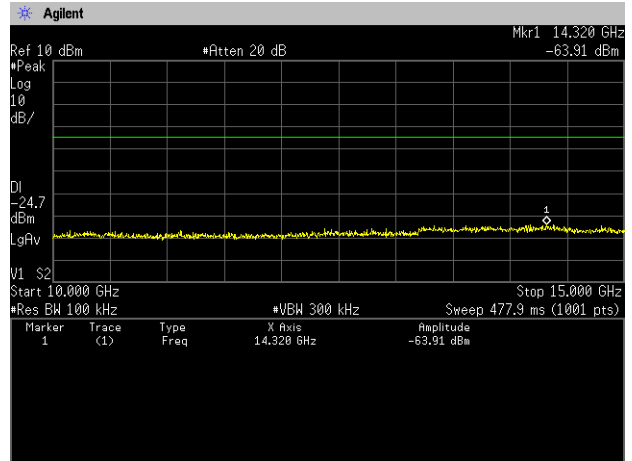

**15GHz - 20GHz**

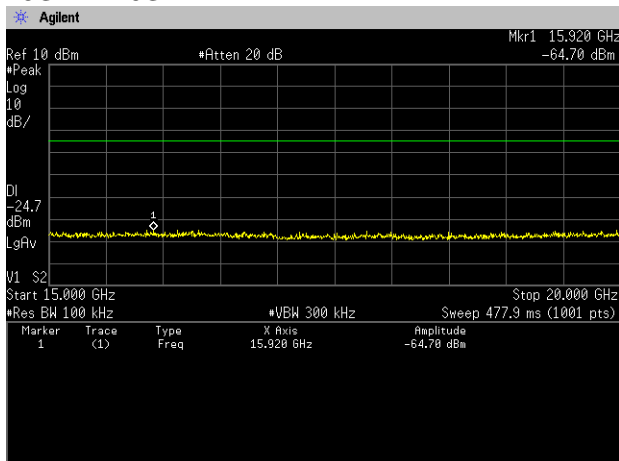


**20GHz - 25GHz**

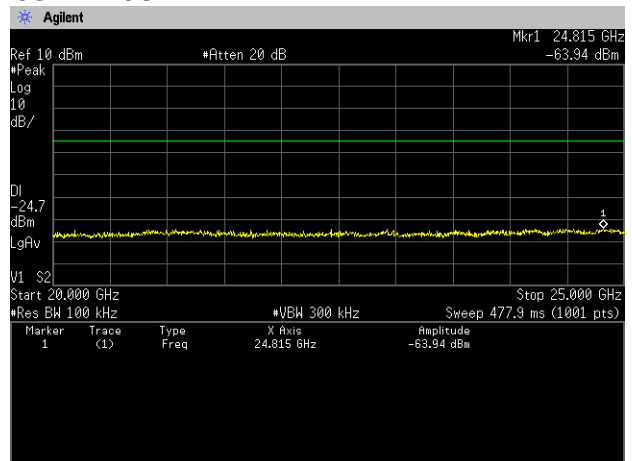





**[BT\_LE (1Mbps)]**  
**Channel: Low [Chain 1]**  
**30MHz - 1GHz**

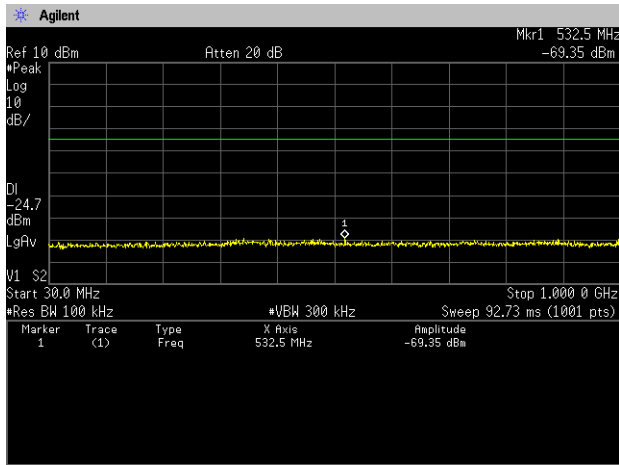


**1GHz - 5GHz**

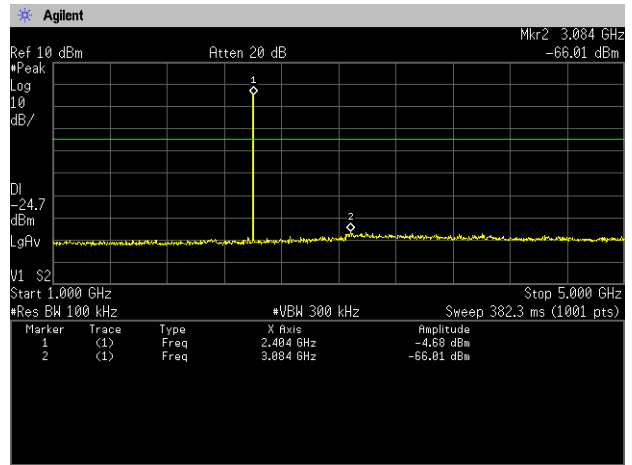


**5GHz - 10GHz**

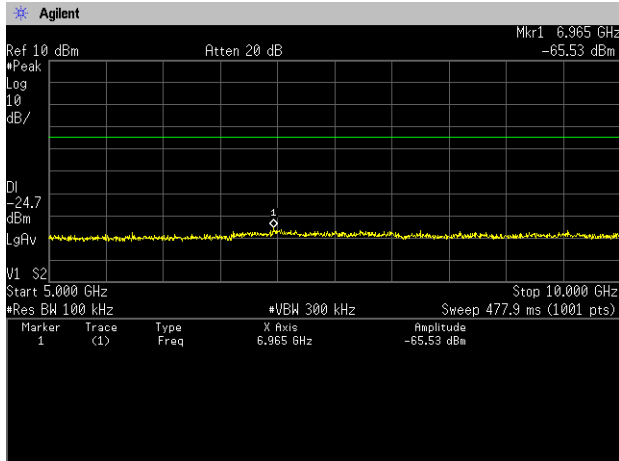


**10GHz - 15GHz**

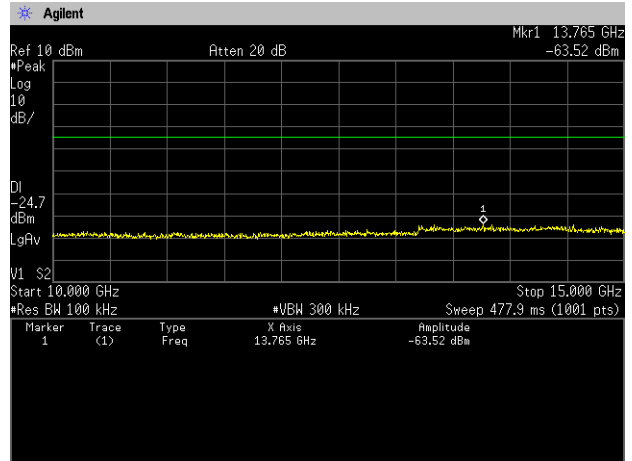

**15GHz - 20GHz**

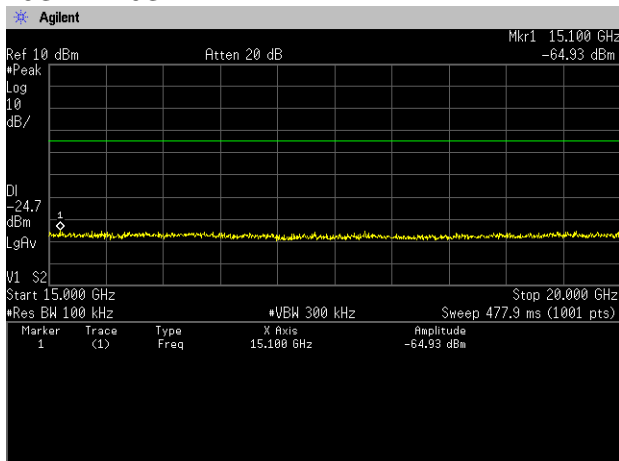


**20GHz - 25GHz**

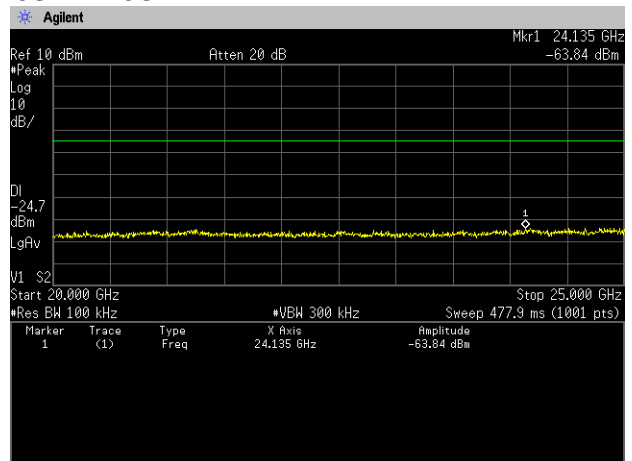







**[BT\_LE (1Mbps)]**  
**Channel: Middle [Chain 1]**  
**30MHz - 1GHz**

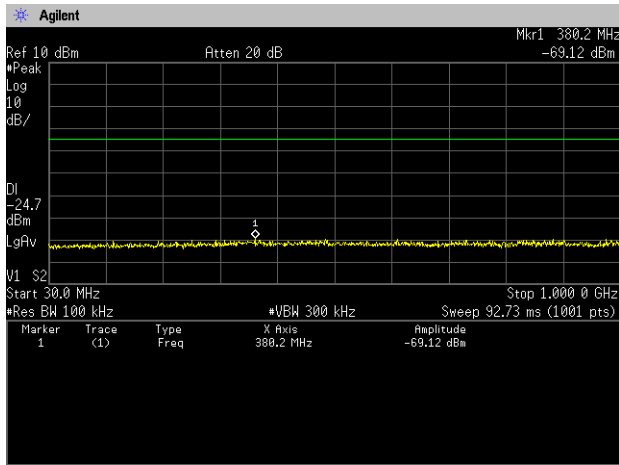


**1GHz - 5GHz**

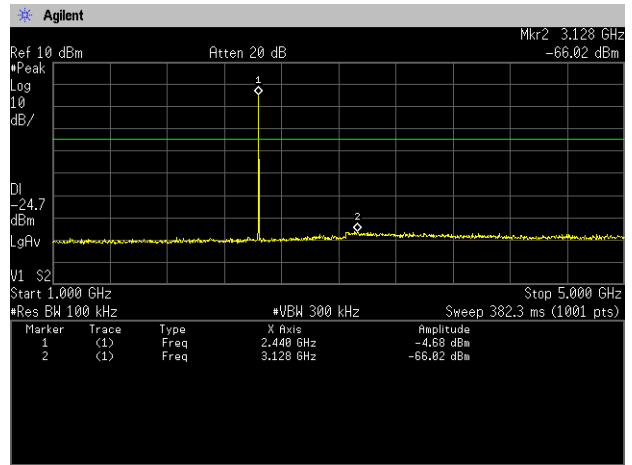


**5GHz - 10GHz**

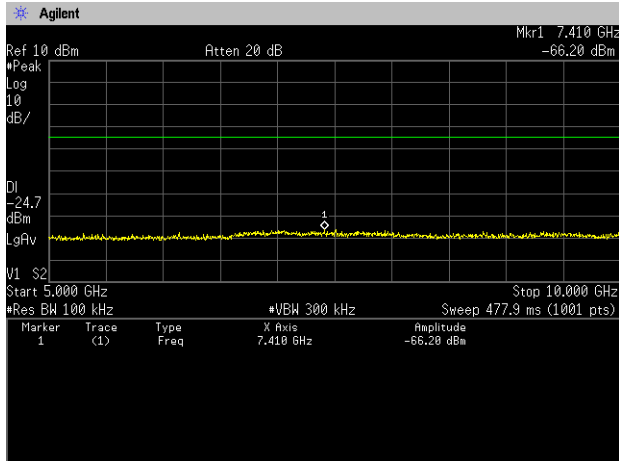


**10GHz - 15GHz**

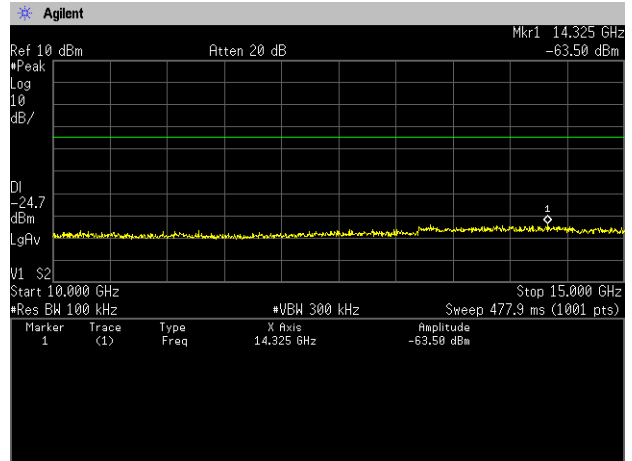

**15GHz - 20GHz**

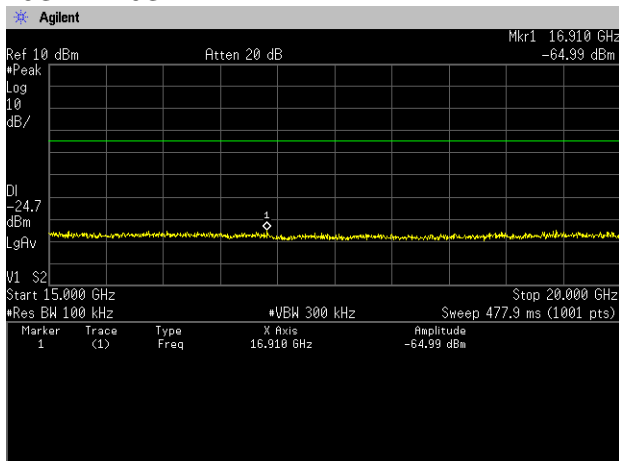


**20GHz - 25GHz**

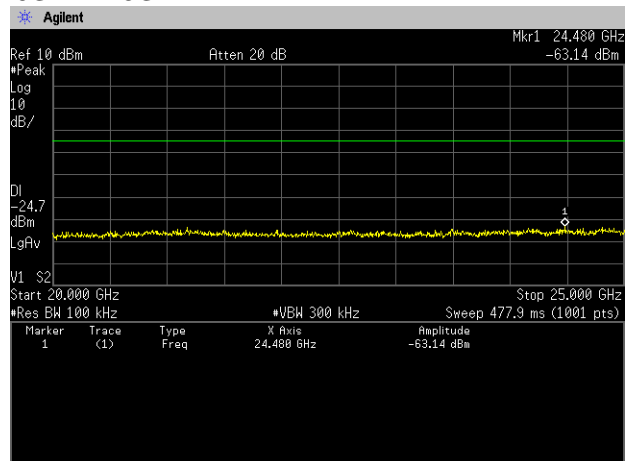





**[BT\_LE (1Mbps)]**  
**Channel: High [Chain 1]**  
**30MHz - 1GHz**

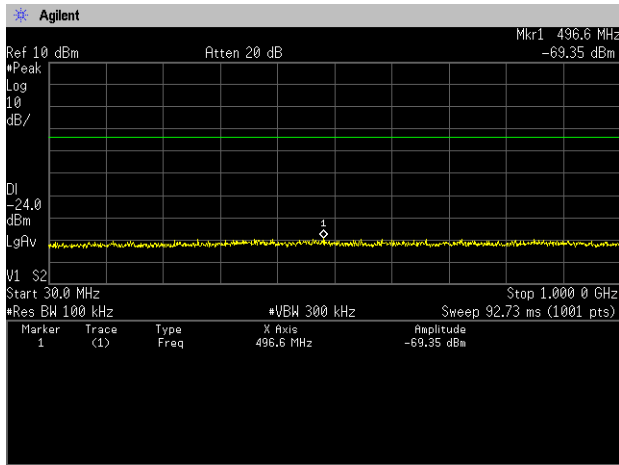


**1GHz - 5GHz**

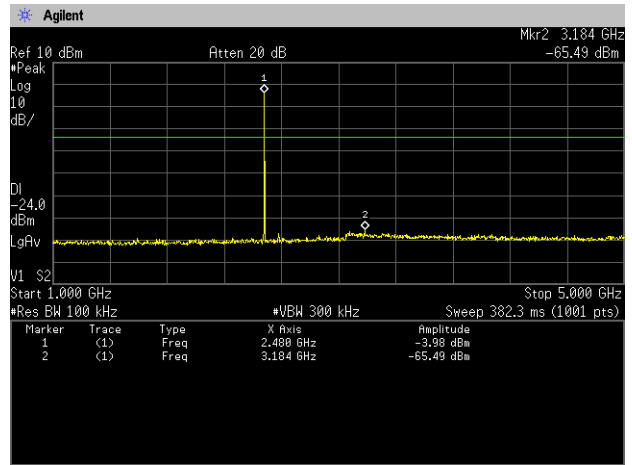


**5GHz - 10GHz**

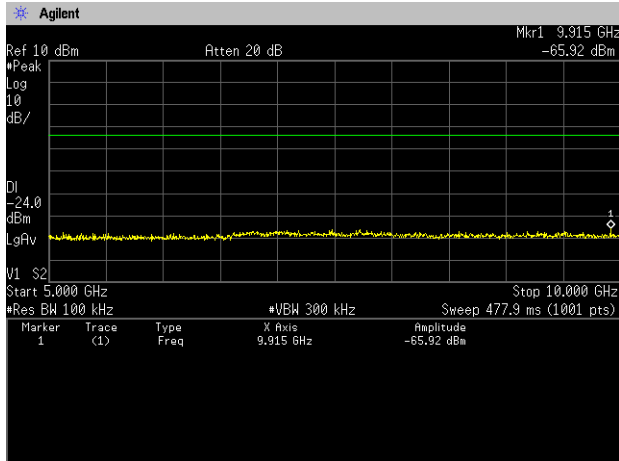


**10GHz - 15GHz**

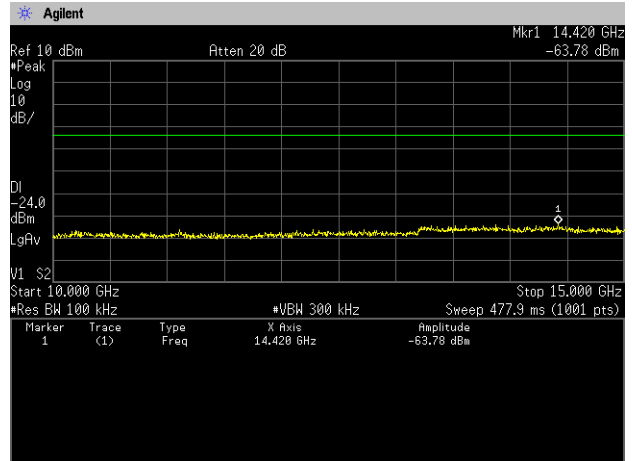

**15GHz - 20GHz**

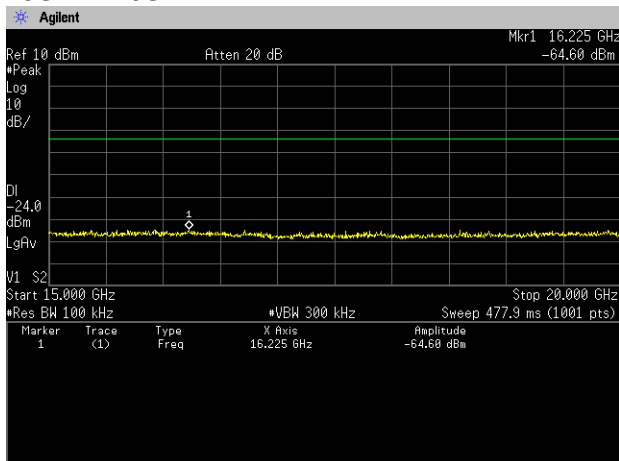


**20GHz - 25GHz**

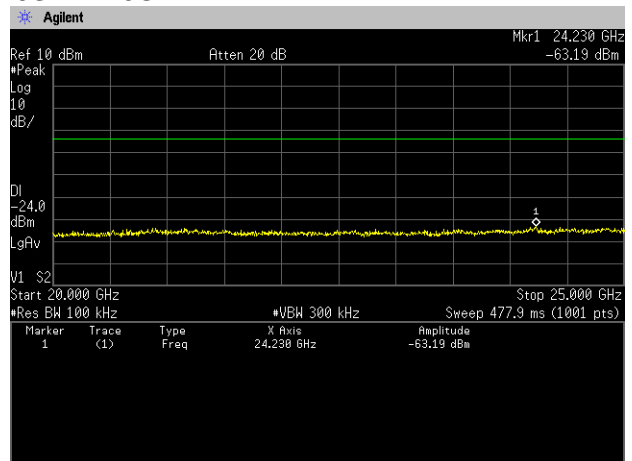





**[BT\_LE (2Mbps)]**  
**Channel: Low [Chain 1]**  
**30MHz - 1GHz**

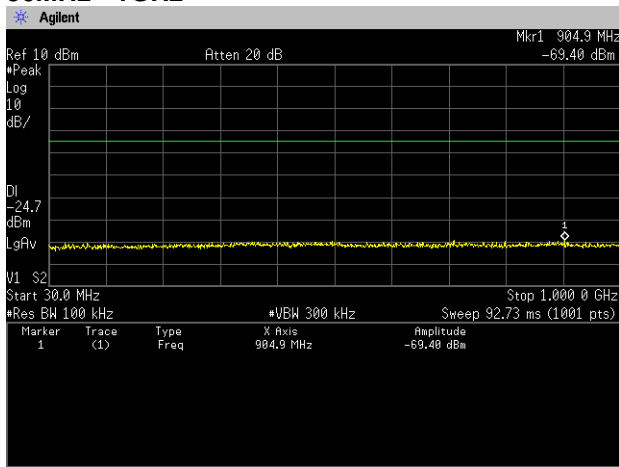


**1GHz - 5GHz**

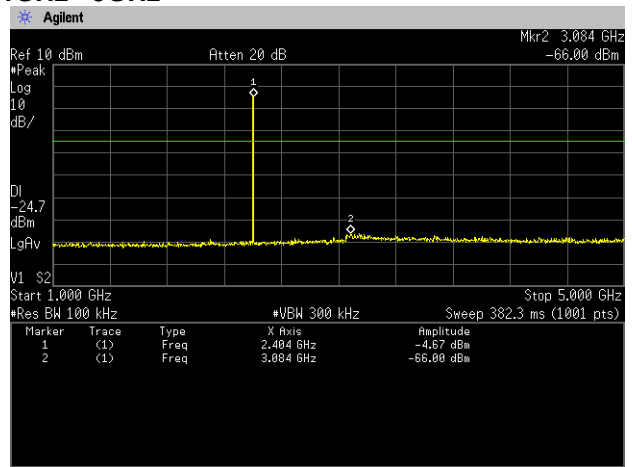


**5GHz - 10GHz**

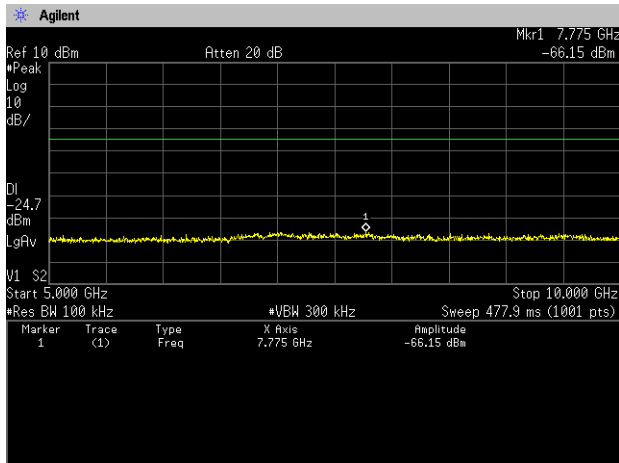


**10GHz - 15GHz**

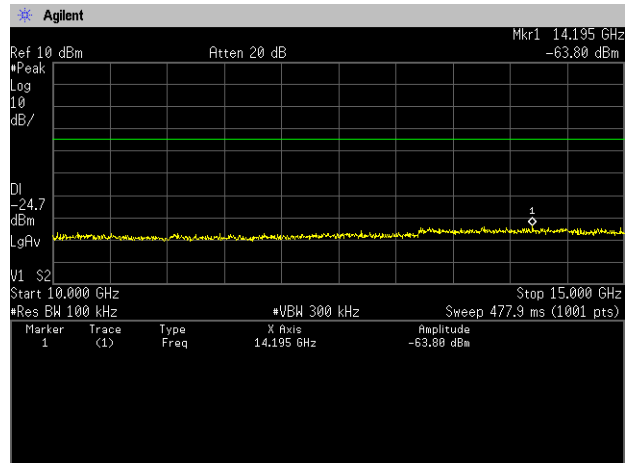

**15GHz - 20GHz**

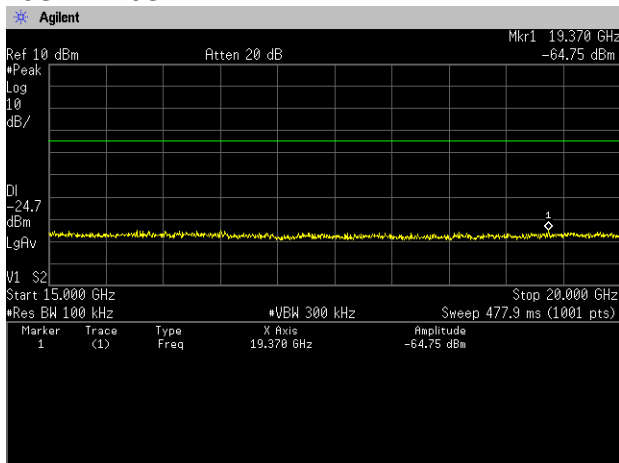


**20GHz - 25GHz**

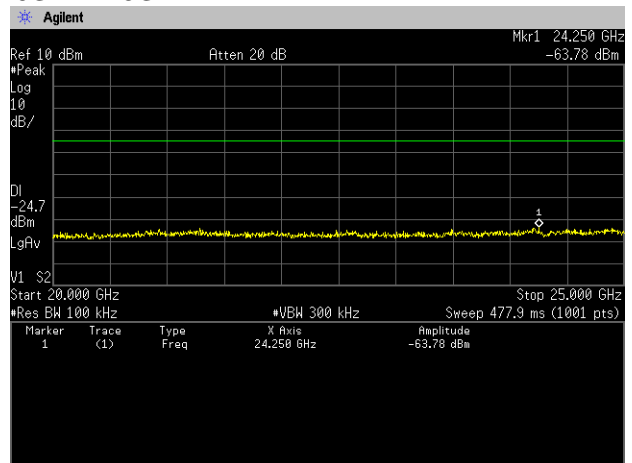





**[BT\_LE (2Mbps)]**  
**Channel: Middle [Chain 1]**  
**30MHz - 1GHz**

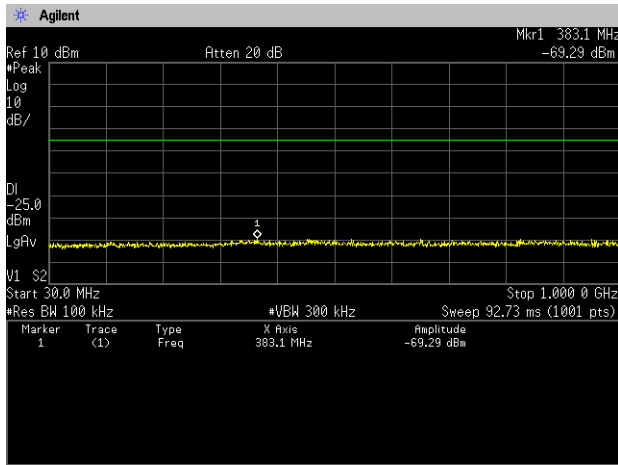


**1GHz - 5GHz**

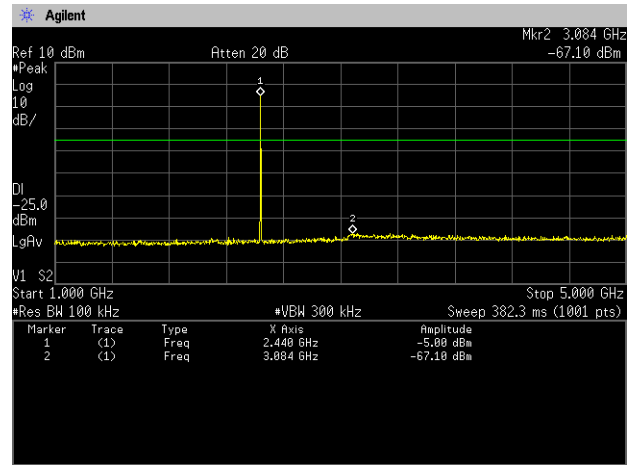


**5GHz - 10GHz**

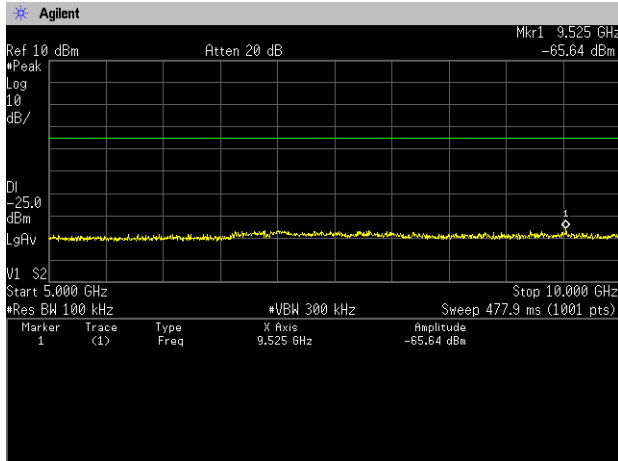


**10GHz - 15GHz**

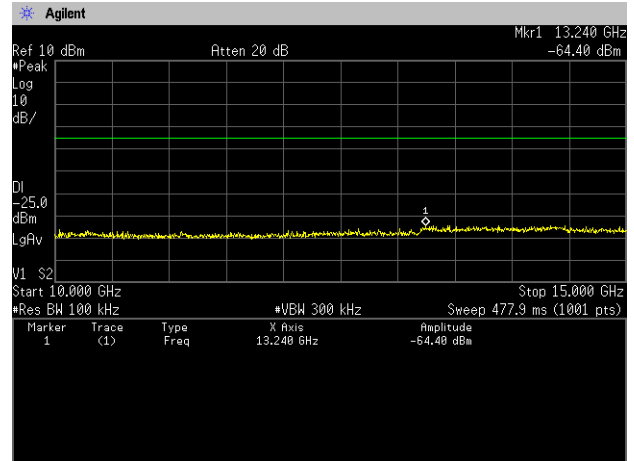

**15GHz - 20GHz**

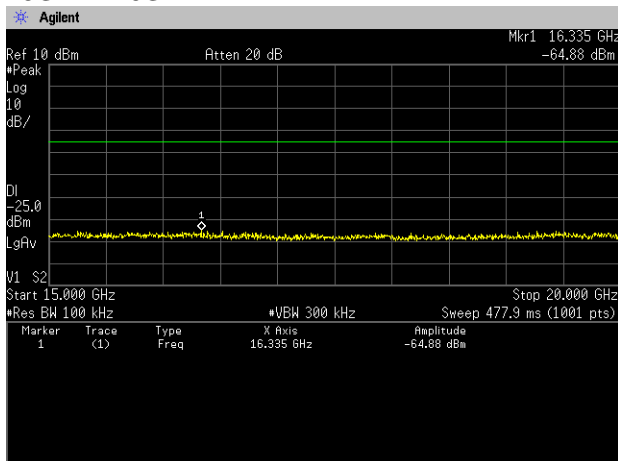


**20GHz - 25GHz**

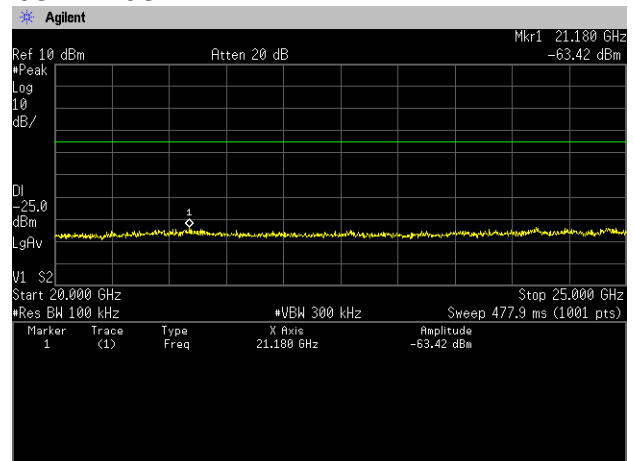





**[BT\_LE (2Mbps)]**  
**Channel: High [Chain 1]**  
**30MHz - 1GHz**

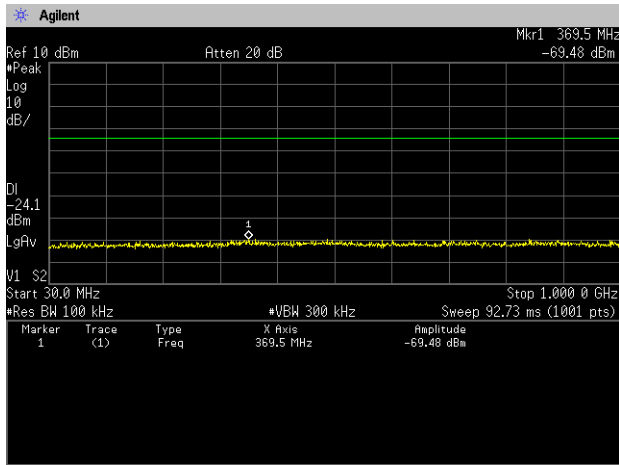


**1GHz - 5GHz**

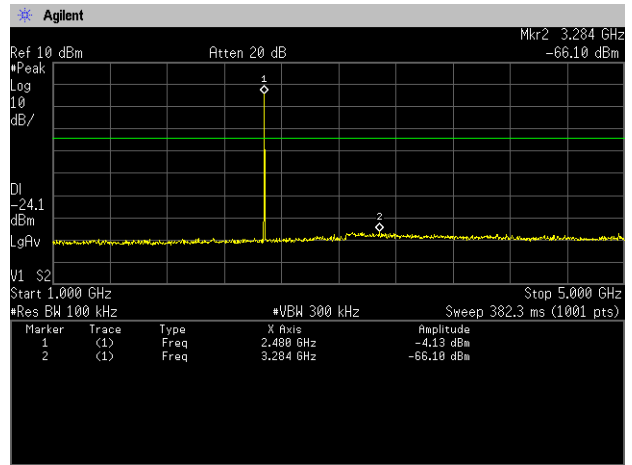


**5GHz - 10GHz**

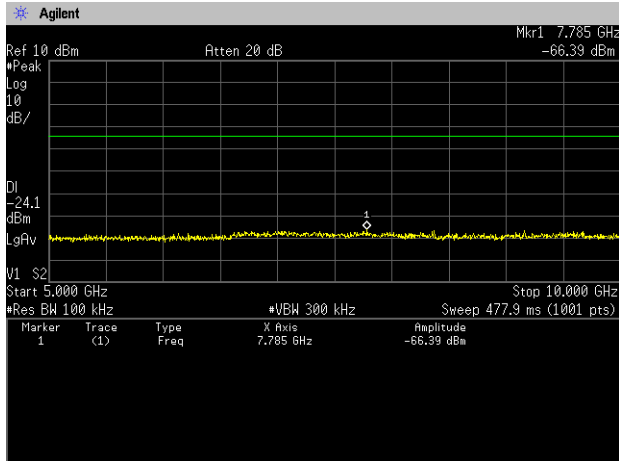


**10GHz - 15GHz**

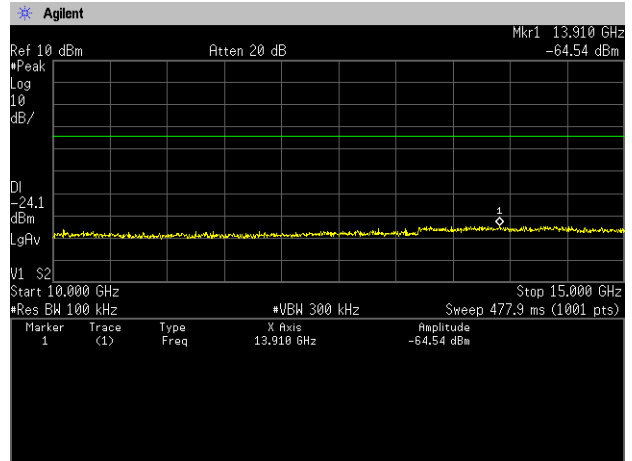

**15GHz - 20GHz**

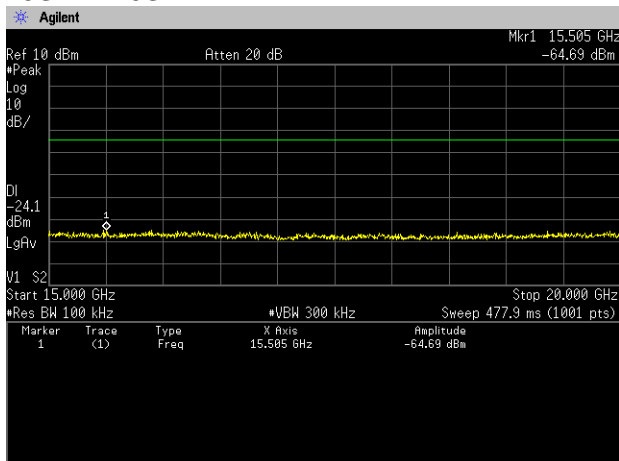


**20GHz - 25GHz**

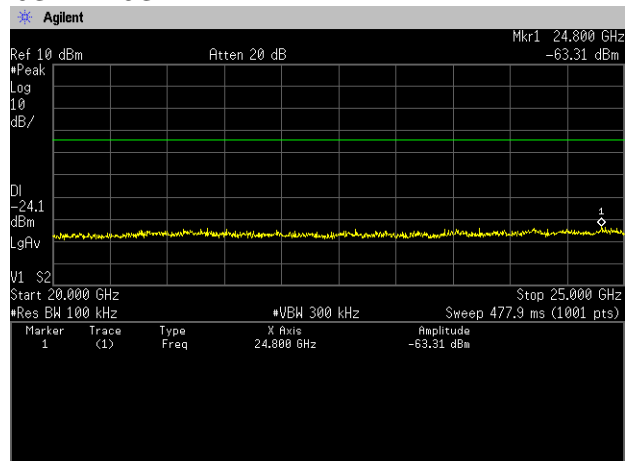





### [BT\_LE (LongRange S2)] Channel: Low [Chain 1] 30MHz - 1GHz

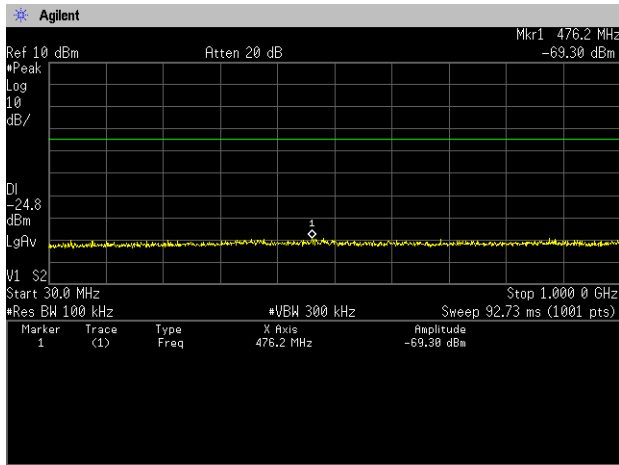


### 1GHz - 5GHz

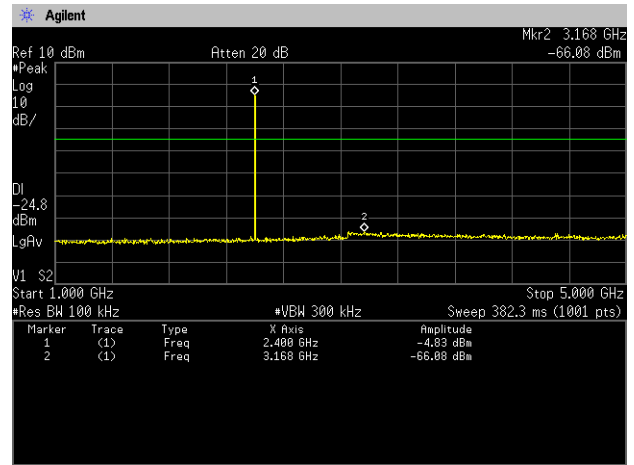


### 5GHz - 10GHz

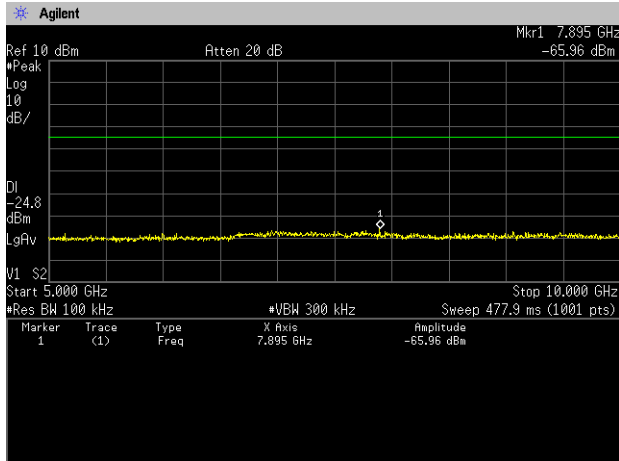


### 10GHz - 15GHz

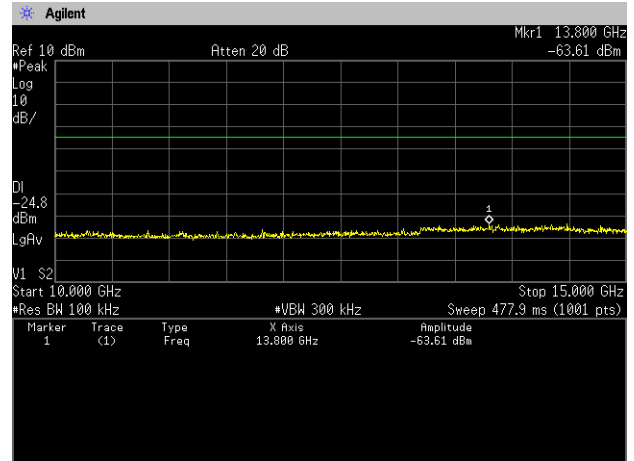

### 15GHz - 20GHz

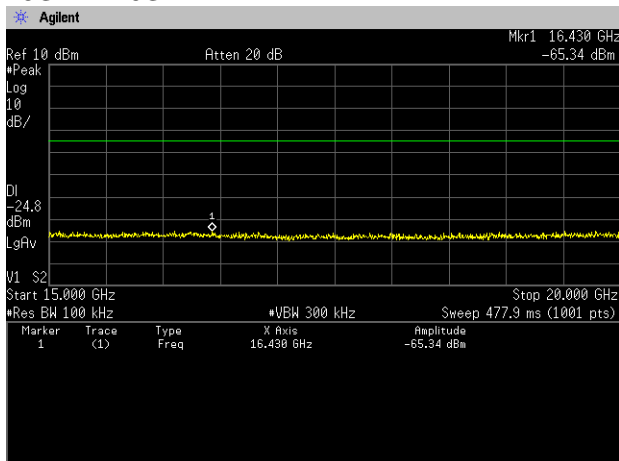


### 20GHz - 25GHz

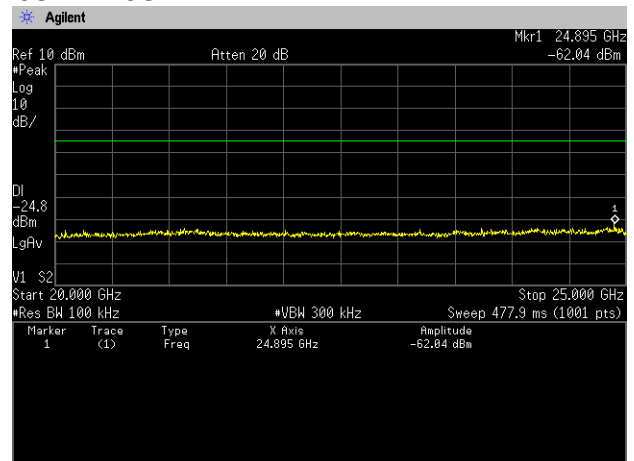





### [BT\_LE (LongRange S2)] Channel: Middle [Chain 1] 30MHz - 1GHz

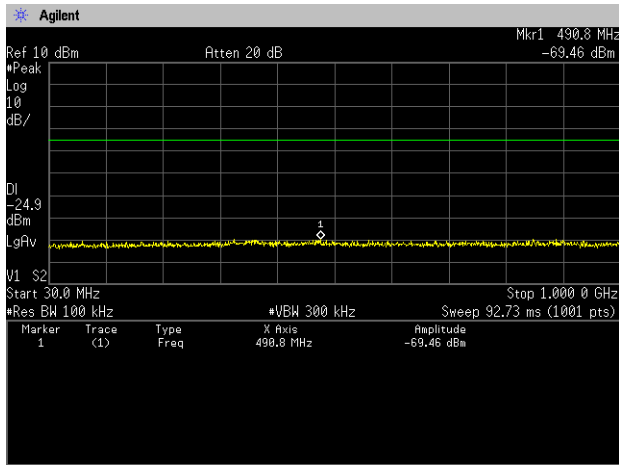


### 1GHz - 5GHz

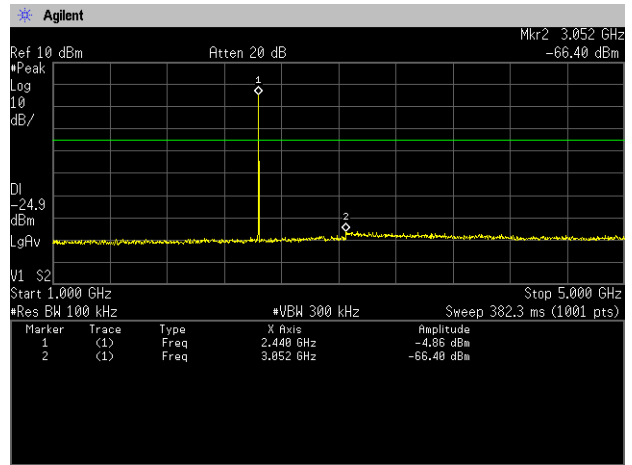


### 5GHz - 10GHz

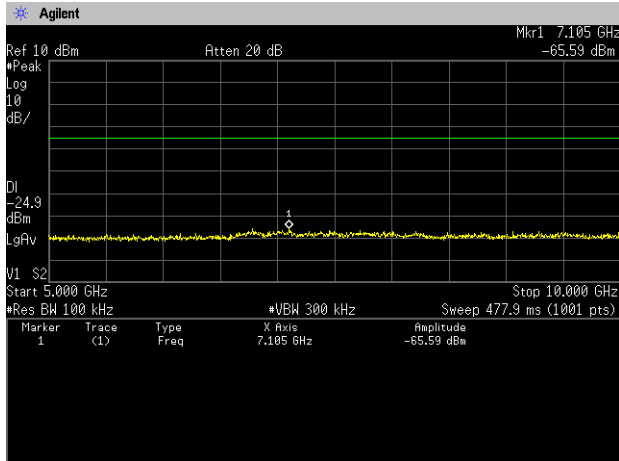


### 10GHz - 15GHz

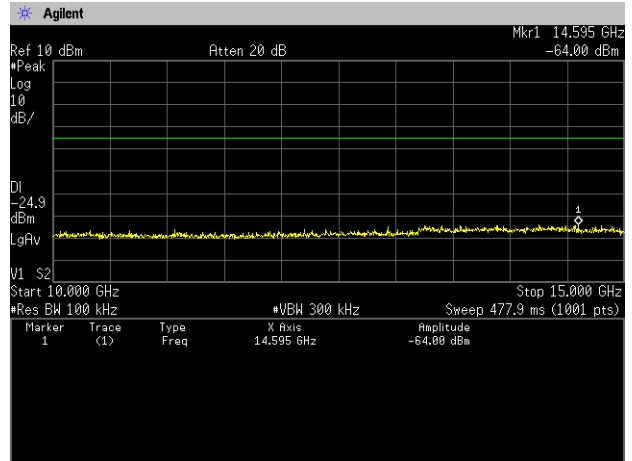

### 15GHz - 20GHz

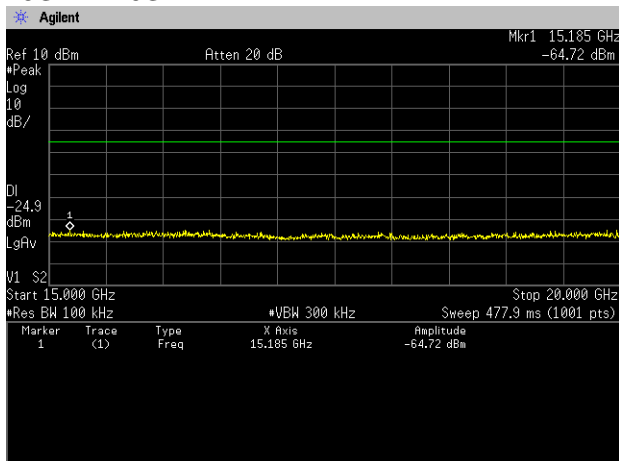


### 20GHz - 25GHz

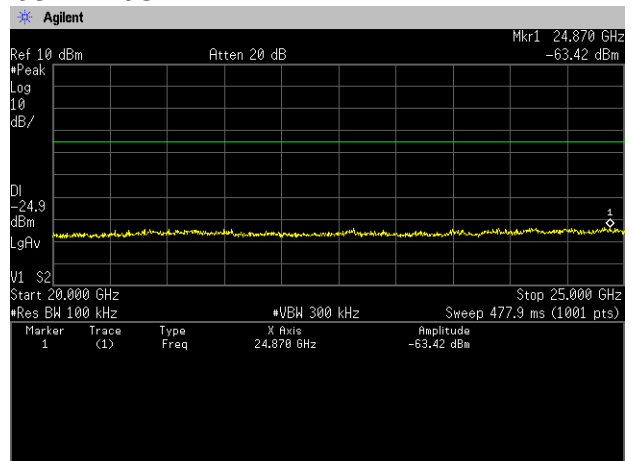





**[BT\_LE (LongRange S2)]**  
**Channel: High [Chain 1]**  
**30MHz - 1GHz**

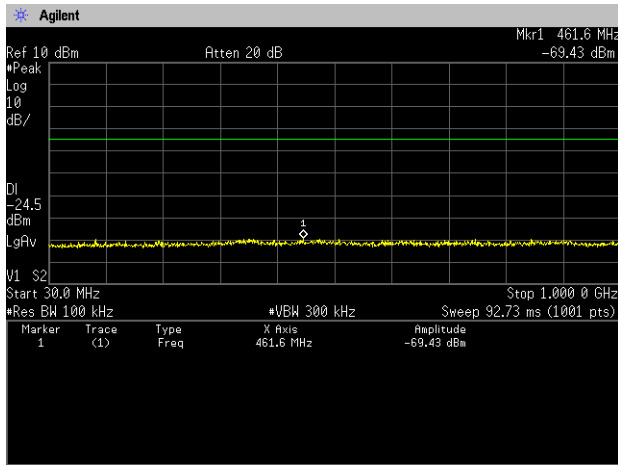


**1GHz - 5GHz**

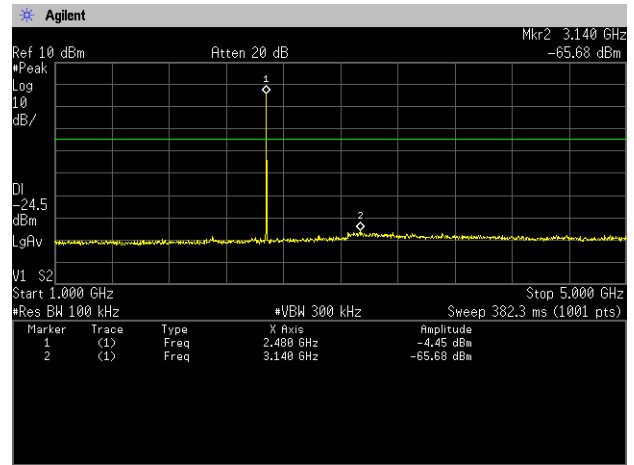


**5GHz - 10GHz**

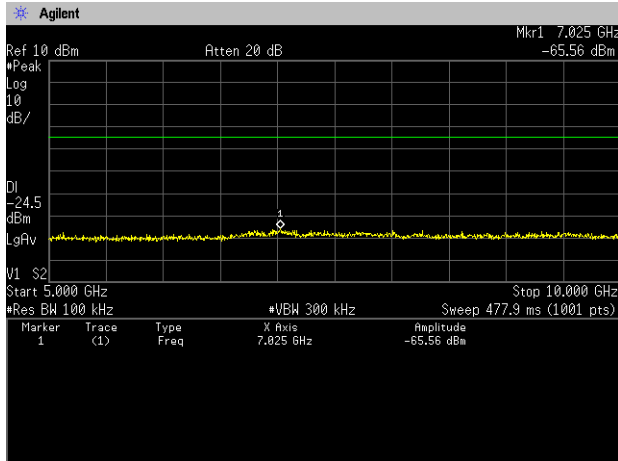


**10GHz - 15GHz**

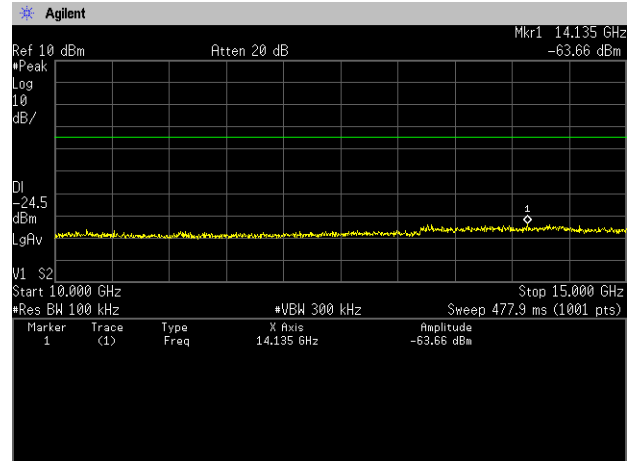

**15GHz - 20GHz**

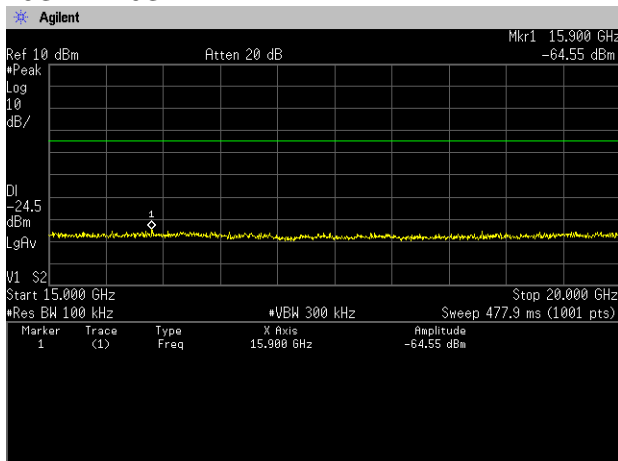


**20GHz - 25GHz**

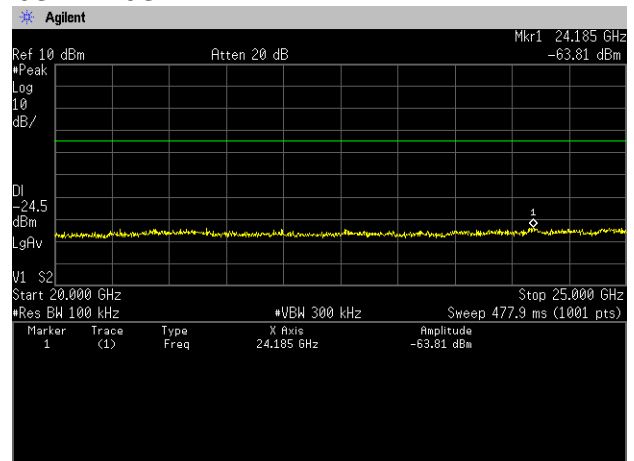







**[BT\_LE (LongRange S8)]**  
**Channel: Low [Chain 1]**  
**30MHz - 1GHz**

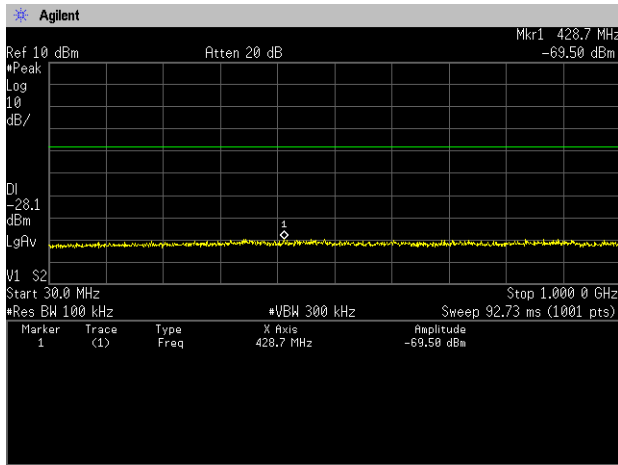


**1GHz - 5GHz**

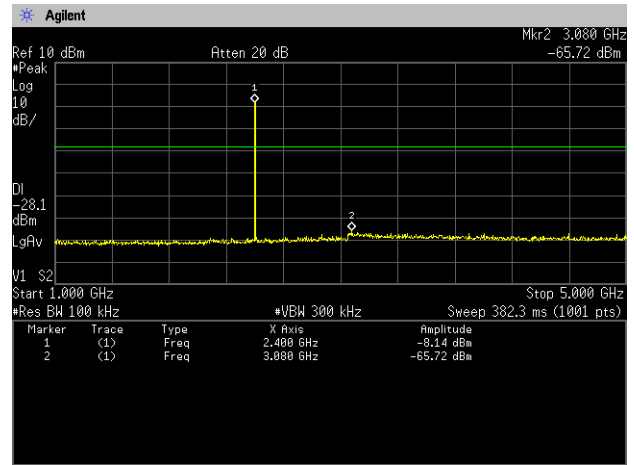


**5GHz - 10GHz**

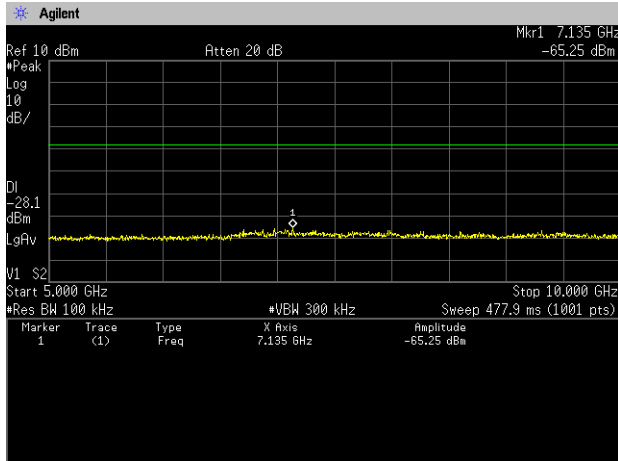


**10GHz - 15GHz**

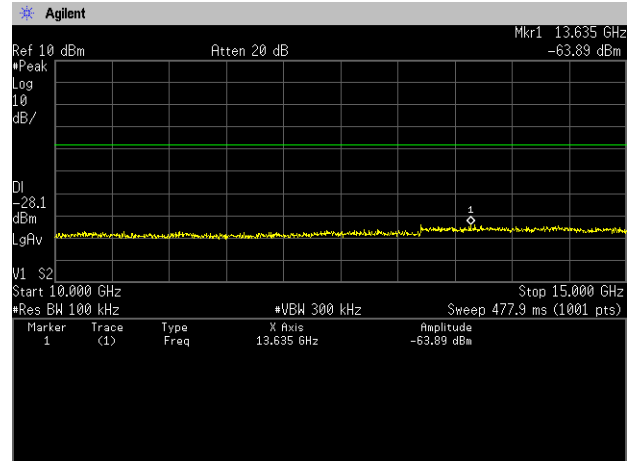


**15GHz - 20GHz**

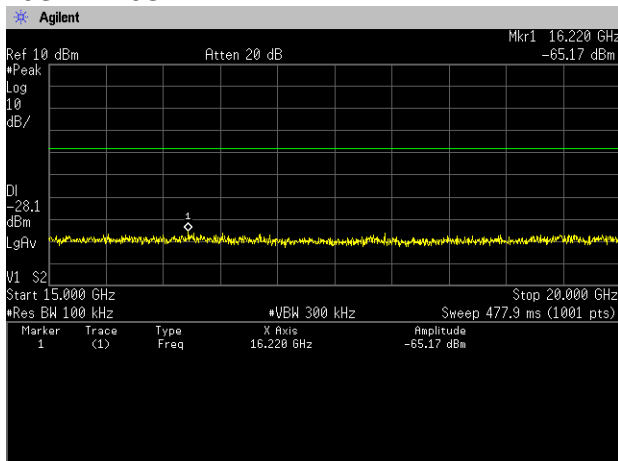


**20GHz - 25GHz**

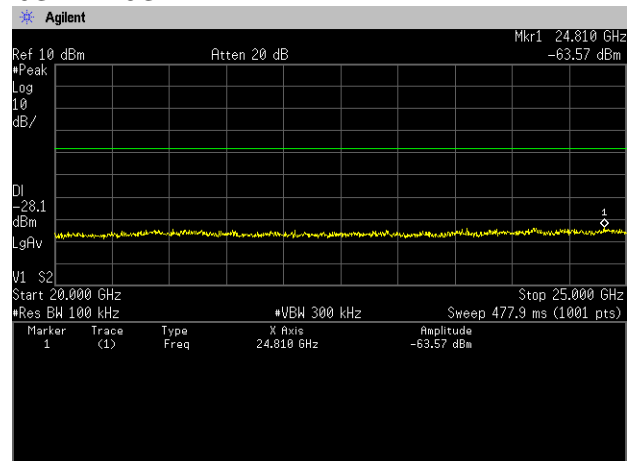


**[BT\_LE (LongRange S8)]**  
**Channel: Middle [Chain 1]**  
**30MHz - 1GHz**

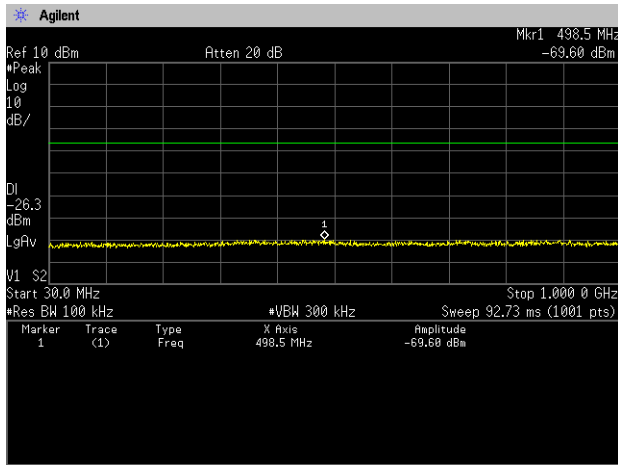


**1GHz - 5GHz**

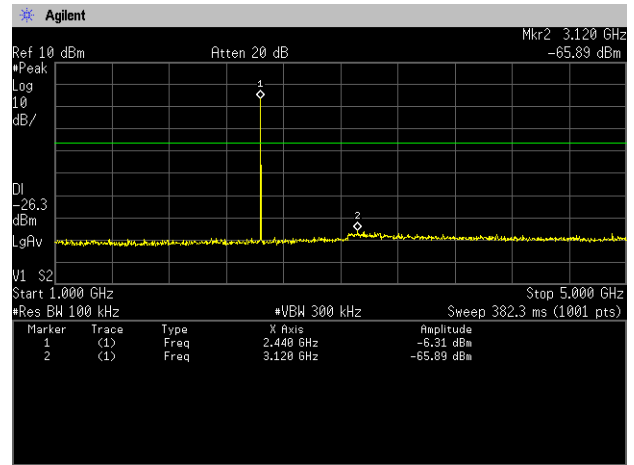


**5GHz - 10GHz**

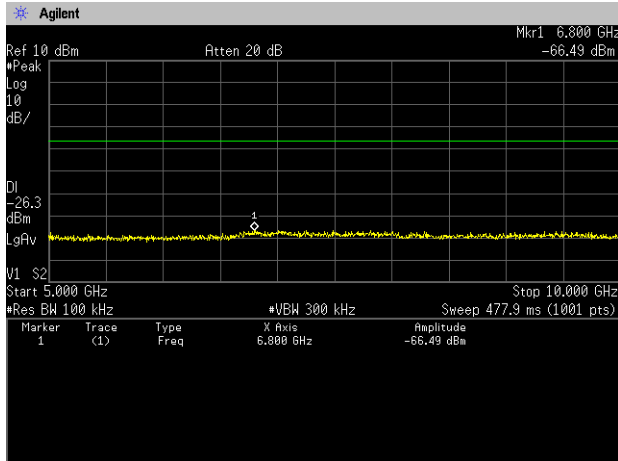


**10GHz - 15GHz**

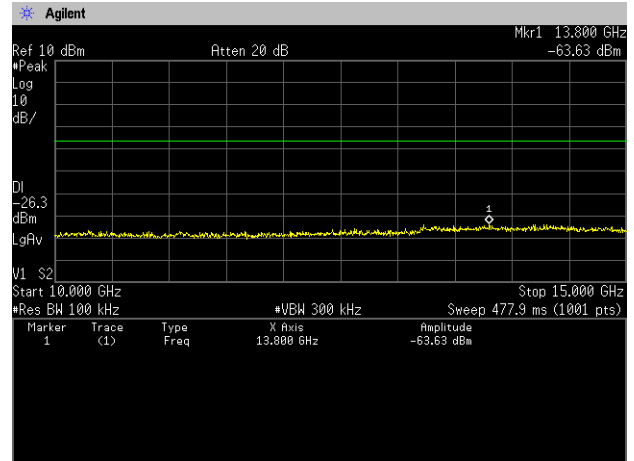

**15GHz - 20GHz**

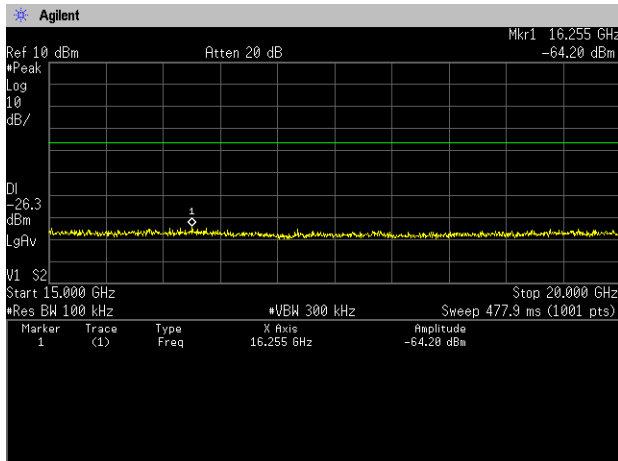


**20GHz - 25GHz**

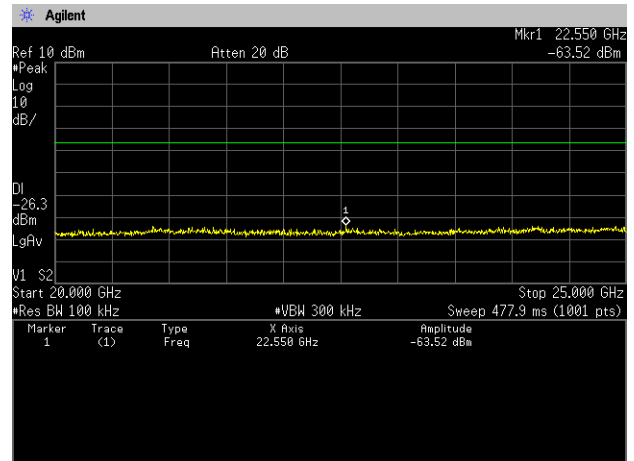





**[BT\_LE (LongRange S8)]**  
**Channel: High [Chain 1]**  
**30MHz - 1GHz**

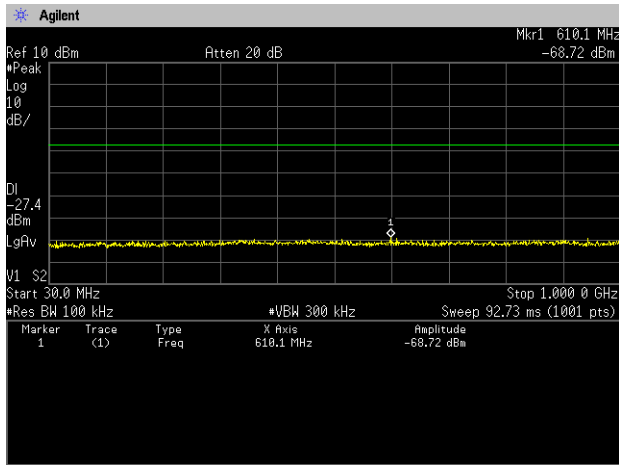


**1GHz - 5GHz**

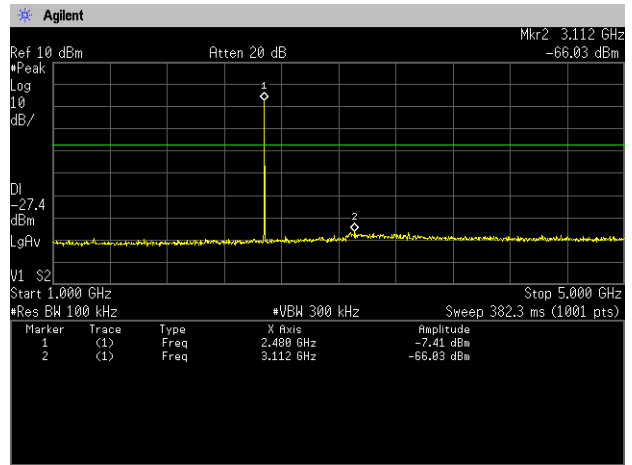


**5GHz - 10GHz**

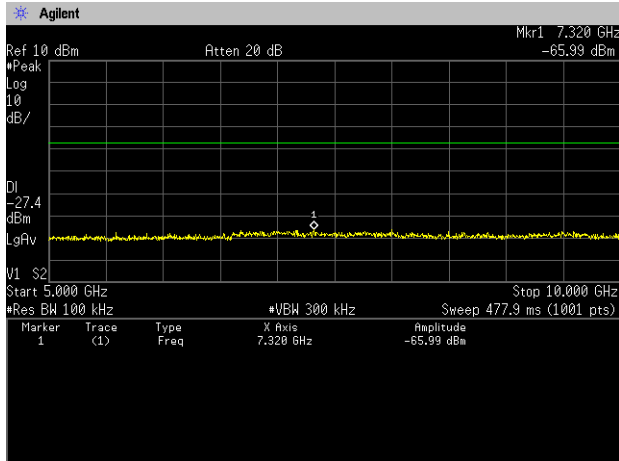


**10GHz - 15GHz**

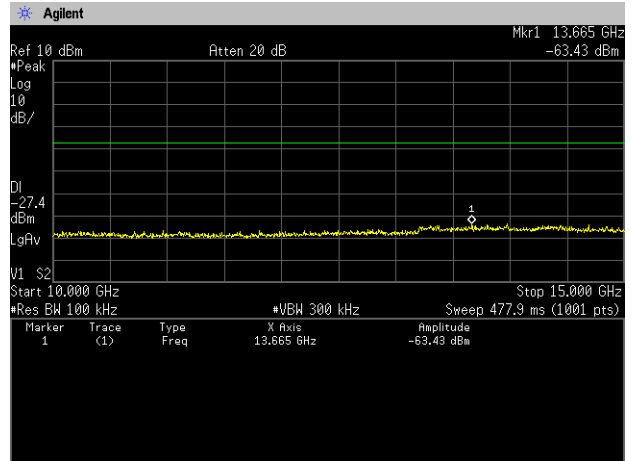

**15GHz - 20GHz**

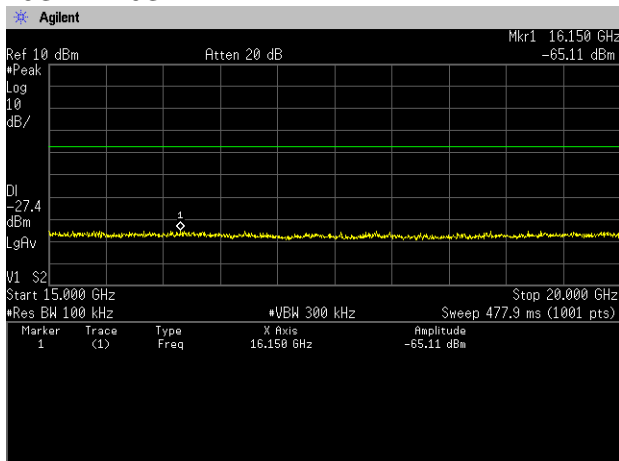

**20GHz - 25GHz**

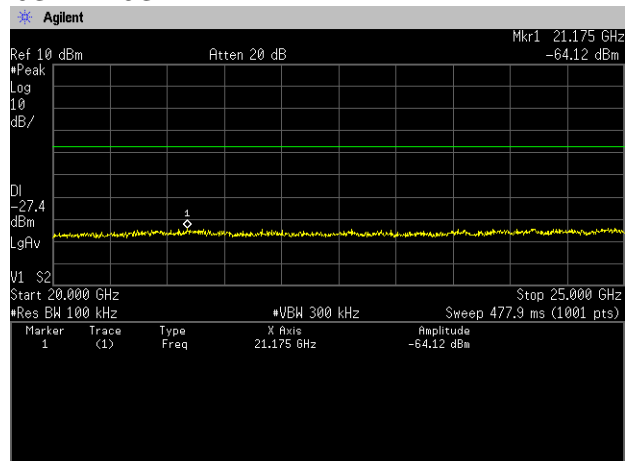

## 4.5 Spurious Emissions - Radiated -

### 4.5.1 Measurement procedure

#### [FCC 15.247(d), 15.205, 15.209, KDB558074 D01 v05r02]

Test was applied by following conditions.

Test method	:	ANSI C63.10
Frequency range	:	9kHz to 25GHz
Test place	:	3m Semi-anechoic chamber
EUT was placed on	:	Styrofoam table / (W)1.0m x (D)0.8m x (H)0.8m (below 1GHz) Styrofoam table / (W)0.6m x (D)0.6m x(H)1.5m (above 1GHz)
Antenna distance	:	3m
Test receiver setting	:	Below 1GHz
- Detector	:	Average (9kHz-90kHz, 110kHz-490kHz), Quasi-peak
- Bandwidth	:	200Hz, 120kHz
Spectrum analyzer setting	:	Above 1GHz
- Peak	:	RBW=1MHz, VBW=3MHz, Span=0Hz, Sweep=auto
- Average	:	RBW=1MHz, VBW=3kHz (1Mbps), 10kHz (2Mbps), 1kHz (LongRange S2, S8), Span=0Hz, Sweep=auto Display mode=Linear


#### Average Measurement Setting [VBW]

Mode	Duty Cycle (%)	T <sub>on</sub> (us)	T <sub>off</sub> (us)	1/T <sub>on</sub> (kHz)	Determined VBW Setting
Bluetooth 5.2 LE (1Mbps)	62.56	391	234	2.558	3kHz
Bluetooth 5.2 LE (2Mbps)	33.12	207	418	4.831	5kHz
Bluetooth 5.2 LE (Long Range S2)	57.01	1069	806	0.935	1kHz
Bluetooth5.2 LE (Long Range S8)	82.80	3105	645	0.322	1kHz

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore, sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

Radiated emission measurements are performed at 3m distance with the broadband antenna (Loop antenna, Biconical antenna, Log periodic antenna, Double ridged guide antenna and Broad-band horn Antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1m to 4m and stopped at height producing the maximum emission. As for the Loop antenna, it is positioned with its plane vertical, and the center of the Loop antenna is 1m above the ground plane. The EUT is Placed on a turntable, which is 0.8m/1.5m above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. The test results represent the worst case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation. Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.

- Test configuration

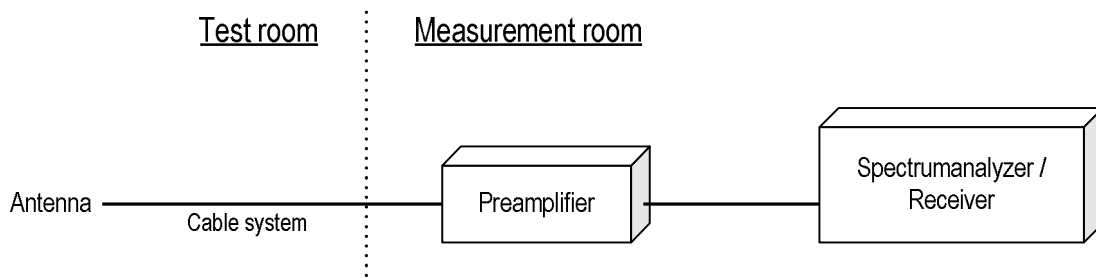

**4.5.2 Calculation method**

[9kHz to 150kHz]

Emission level = Reading + (Ant factor + Cable system loss)

Margin = Limit – Emission level

[150kHz to 25GHz]

Emission level = Reading + (Ant factor + Cable system loss - Amp. Gain)

Margin = Limit – Emission level

Example:

Limit @ 4804.0MHz: 74.0dBuV/m (Peak Limit)

S.A Reading = 39.9dBuV Cable system loss = 8.3dB

Result = 39.9 + 8.3 = 48.2dBuV/m

Margin = 74.0 - 48.2 = 25.8dB

**4.5.3 Limit**

Frequency [MHz]	Field strength		Distance [m]
	[uV/m]	[dBuV/m]	
0.009-0.490	2400 / F [kHz]	20logE [uV/m]	300
0.490-1.705	24000 / F [kHz]	20logE [uV/m]	30
1.705-30	30	29.5	30
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level [dBuV/m] = 20log Emission [uV/m]
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition modulation.



Japan

#### 4.5.4 Test data

Date : 28-June-2023  
Temperature : 23.0 [°C]  
Humidity : 59.7 [%]  
Test place : 3m Semi-anechoic chamber

Test engineer : Chiaki Kanno

Date : 29-June-2023  
Temperature : 22.2 [°C]  
Humidity : 69.4 [%]  
Test place : 3m Semi-anechoic chamber

Test engineer : Tadahiro Seino

Date : 30-June-2023  
Temperature : 22.8 [°C]  
Humidity : 67.8 [%]  
Test place : 3m Semi-anechoic chamber

Test engineer : Tadahiro Seino




Japan

**[Transmission mode]  
[BT\_LE (1Mbps)]  
Channel: Low  
BELOW 1 GHz(Worst)**

Company name : KYOCERA Corporation  
EUT : Mobile Phone  
Model No. : EB1157  
Serial No. : N/A  
Test mode : BTLE\_Tx\_CH:Low\_1M

Sheet No. : 04  
Standard : FCC Part15 subpart C  
Operator : T.Seino  
Temp,Hum,Atm : 22.8 [° C], 67.8 [%]  
Note1 :

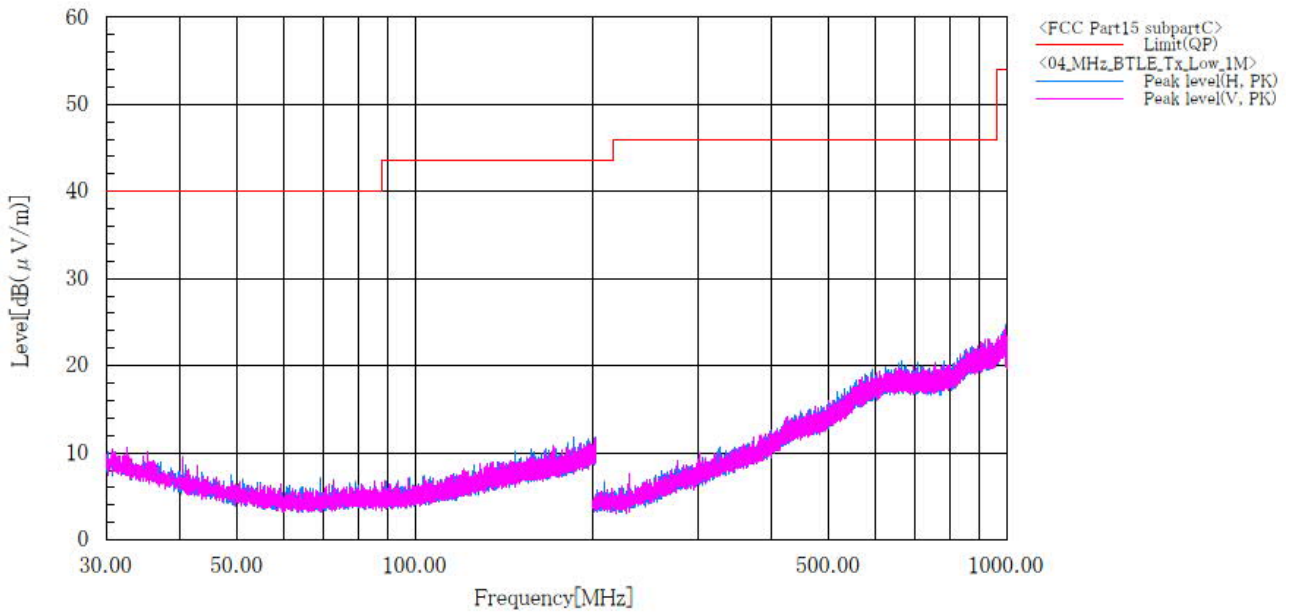

Final Result

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 9kHz to 30MHz at the 3 meters distance.




Japan

**[BT\_LE (1Mbps)]**  
**Channel: Low**  
**ABOVE 1 GHz**

Company name : KYOCERA Corporation  
 EUT : Mobile Phone  
 Model No. : EB1157  
 Serial No. : N/A  
 Test mode : BT\_LE\_1M\_Tx\_Ch:Low

Standard : FCC Part.15 subpart C  
 Operator : C.Kanno  
 Temp,Hum,Atm : 23.0 [°C] 59.7 [%]  
 Note1 :  
 Note2 :

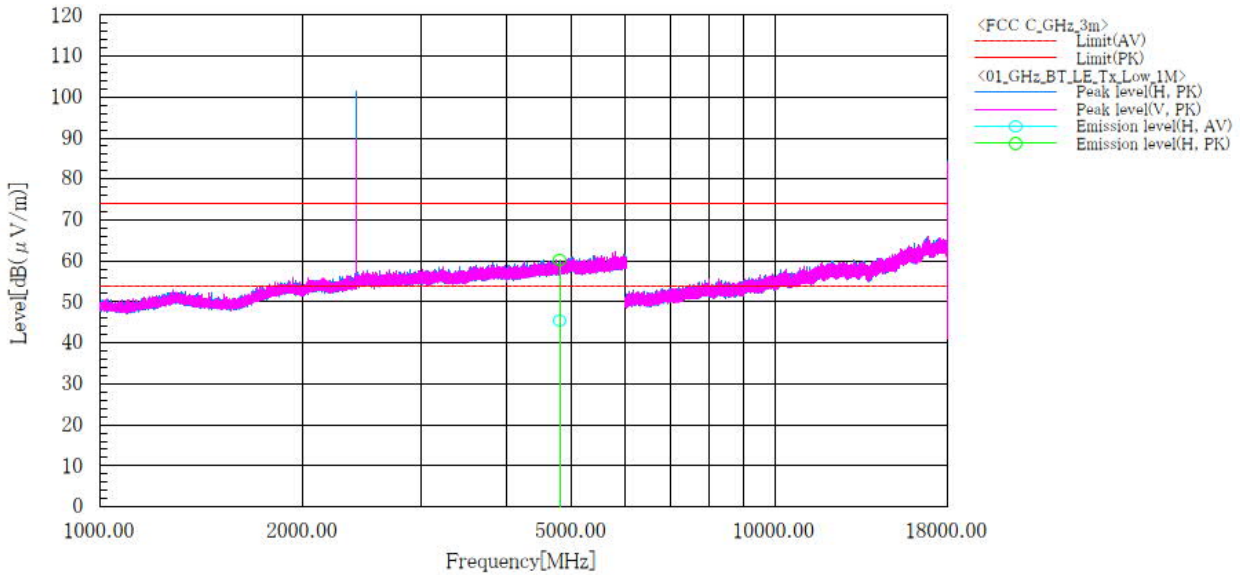

Final Result

No.	Frequency [MHz]	Pol	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c. f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]
1	4804.000	H	34.8	49.6	10.7	45.5	60.3	54.0	74.0	8.5	13.7	100.0	97.0

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.






Japan

**[BT\_LE (1Mbps)]**  
**Channel: Middle**  
**ABOVE 1 GHz**

Company name : KYOCERA Corporation  
 EUT : Mobile Phone  
 Model No. : EB1157  
 Serial No. : N/A  
 Test mode : BT\_LE\_1M\_Tx\_Ch:Mid

Standard : FCC Part.15 subpart C  
 Operator : C.Kanno  
 Temp,Hum,Atm : 23.0 [°C] 59.7 [%]  
 Note1 :  
 Note2 :

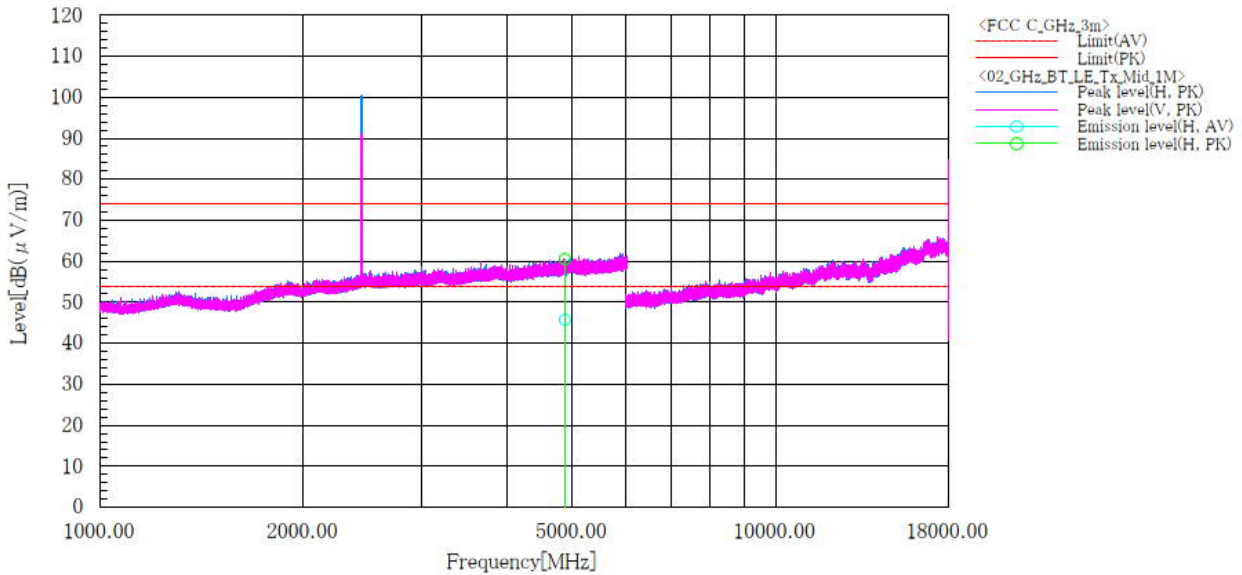

Final Result

No.	Frequency	Pol	Reading AV	Reading PK	c. f	Result AV	Result PK	Limit AV	Limit PK	Margin AV	Margin PK	Height	Angle
	[MHz]		[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[deg]
1	4880.000	H	34.7	49.5	11.0	45.7	60.5	54.0	74.0	8.3	13.5	100.0	79.0

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.




Japan

**[BT\_LE (1Mbps)]**  
**Channel: High**  
**ABOVE 1 GHz**

Company name : KYOCERA Corporation  
 EUT : Mobile Phone  
 Model No. : EB1157  
 Serial No. : N/A  
 Test mode : BT\_LE\_1M\_Tx\_Ch:High

Standard : FCC Part.15 subpart C  
 Operator : C.Kanno  
 Temp,Hum,Atm : 23.0 [°C] 59.7 [%]  
 Note1 :  
 Note2 :

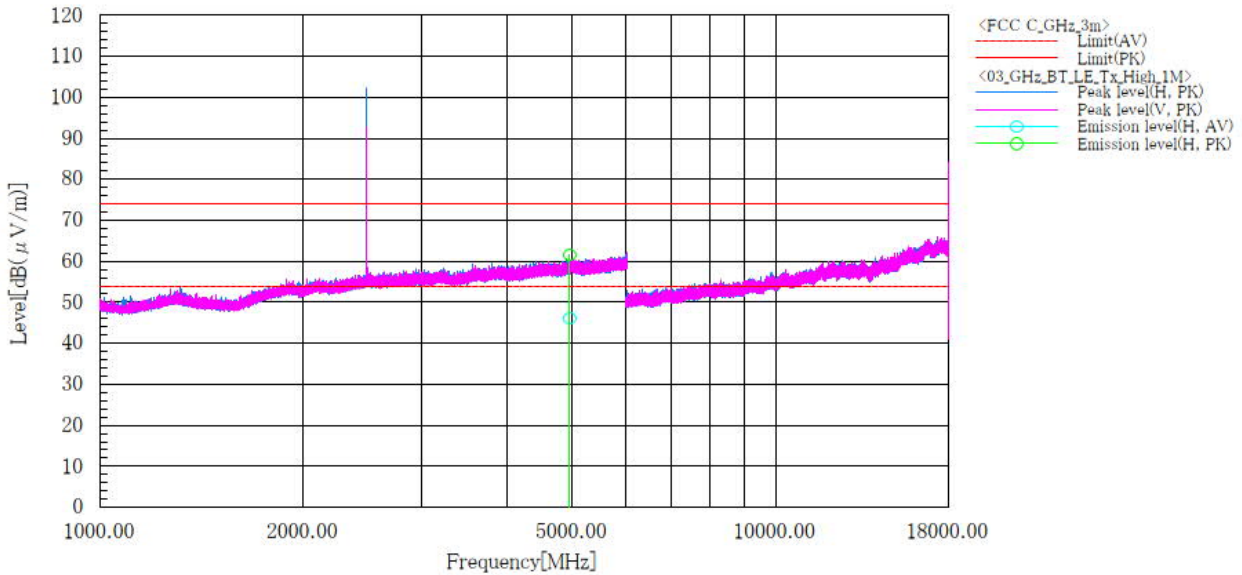

Final Result

No.	Frequency	Pol	Reading AV	Reading PK	c. f	Result AV	Result PK	Limit AV	Limit PK	Margin AV	Margin PK	Height	Angle
	[MHz]		[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[deg]
1	4960.000	H	34.7	50.1	11.5	46.2	61.6	54.0	74.0	7.8	12.4	100.0	77.0

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.




Japan

**[BT\_LE (2Mbps)]**  
**Channel: Low**  
**BELOW 1 GHz(Worst)**

Company name : KYOCERA Corporation  
 EUT : Mobile Phone  
 Model No. : EB1157  
 Serial No. : N/A  
 Test mode : BTLE\_Tx\_CH:Low\_2M

Sheet No. : 04  
 Standard : FCC Part15 subpart C  
 Operator : T.Seino  
 Temp,Hum,Atm : 22.8 [° C], 67.8 [%]  
 Note1 :

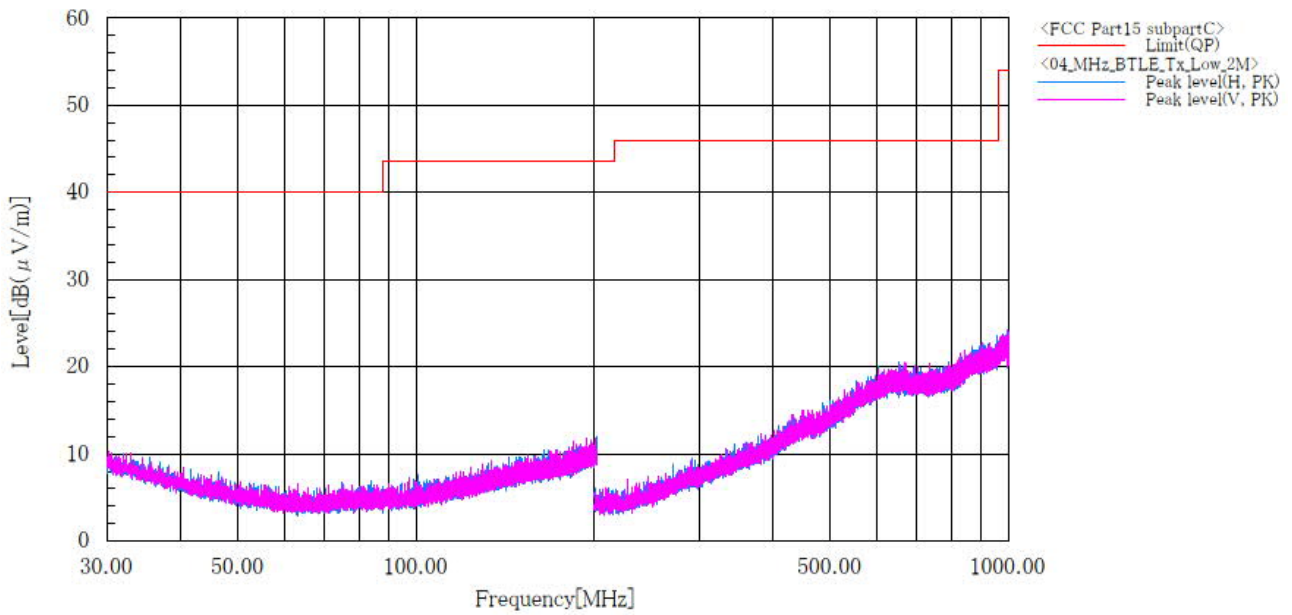

Final Result

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 9kHz to 30MHz at the 3 meters distance.



**[BT\_LE (2Mbps)]**  
**Channel: Low**  
**ABOVE 1 GHz**

Company name : KYOCERA Corporation  
 EUT : Mobile Phone  
 Model No. : EB1157  
 Serial No. : N/A  
 Test mode : BT LE\_2M\_Tx\_Ch:Low

Standard : FCC Part.15 subpart C  
 Operator : T.Seino  
 Temp,Hum,Atm : 22.2 [°C] 69.4 [%]  
 Note1 :  
 Note2 :

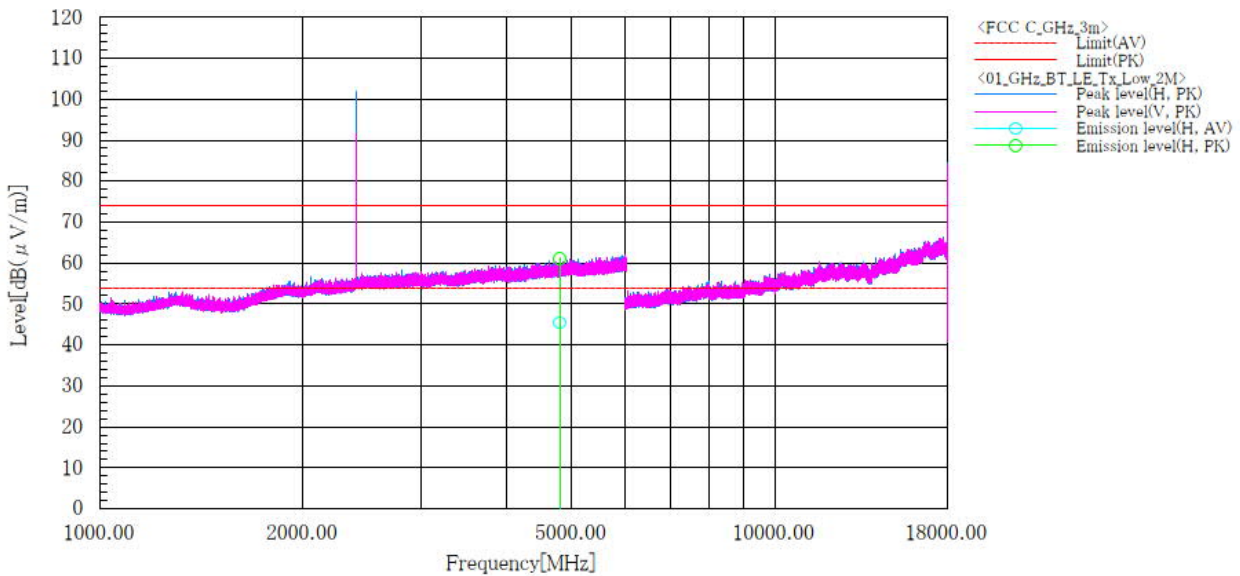

Final Result

No.	Frequency [MHz]	Pol	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c. f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]
1	4804.000	H	34.8	50.4	10.7	45.5	61.1	54.0	74.0	8.5	12.9	100.0	102.0

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.



**[BT\_LE (2Mbps)]**  
**Channel: Middle**  
**ABOVE 1 GHz**

Company name : KYOCERA Corporation  
 EUT : Mobile Phone  
 Model No. : EB1157  
 Serial No. : N/A  
 Test mode : BT LE\_2M\_Tx\_Ch:Mid

Standard : FCC Part.15 subpart C  
 Operator : T.Seino  
 Temp,Hum,Atm : 22.2 [°C] 69.4 [%]  
 Note1 :  
 Note2 :

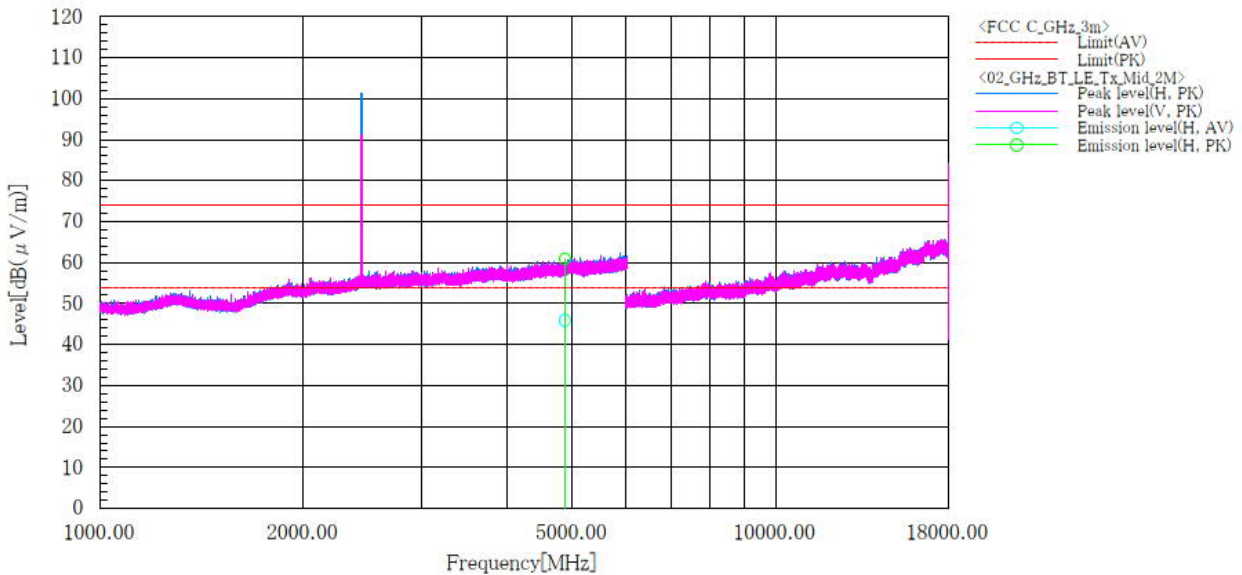

Final Result

No.	Frequency [MHz]	Pol	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c. f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]
1	4880.000	H	34.9	50.0	11.0	45.9	61.0	54.0	74.0	8.1	13.0	100.0	97.0

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.



**[BT\_LE (2Mbps)]**  
**Channel: High**  
**ABOVE 1 GHz**

Company name : KYOCERA Corporation  
 EUT : Mobile Phone  
 Model No. : EB1157  
 Serial No. : N/A  
 Test mode : BT LE\_1M\_Tx\_Ch:High

Standard : FCC Part.15 subpart C  
 Operator : T.Seino  
 Temp,Hum,Atm : 22.2 [°C] 69.4 [%]  
 Note1 :  
 Note2 :

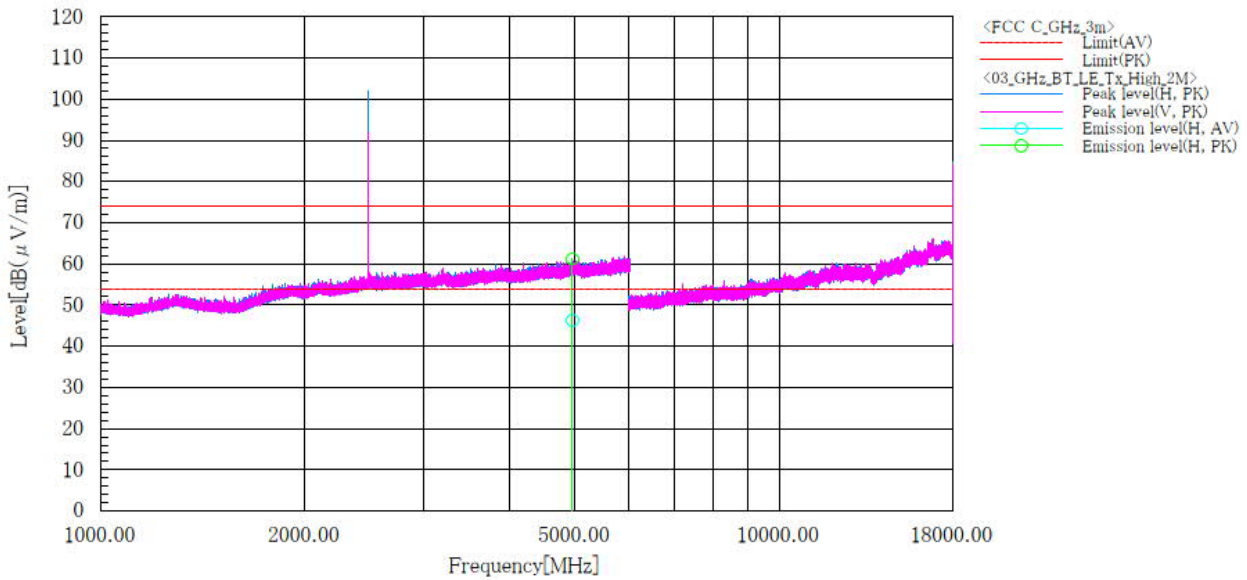

Final Result

No.	Frequency [MHz]	Pol	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c. f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]
1	4960.000	H	34.8	49.7	11.5	46.3	61.2	54.0	74.0	7.7	12.8	100.0	83.0

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.




Japan

**[BT\_LE (LongRange S2)]**  
**Channel: Low**  
**BELOW 1 GHz(Worst)**

Company name : KYOCERA Corporation  
 EUT : Mobile Phone  
 Model No. : EB1157  
 Serial No. : N/A  
 Test mode : BTLE\_Tx\_CH:Low\_S2

Sheet No. : 04  
 Standard : FCC Part15 subpart C  
 Operator : T.Seino  
 Temp,Hum,Atm : 22.8 [° C], 67.8 [%]  
 Note1 :

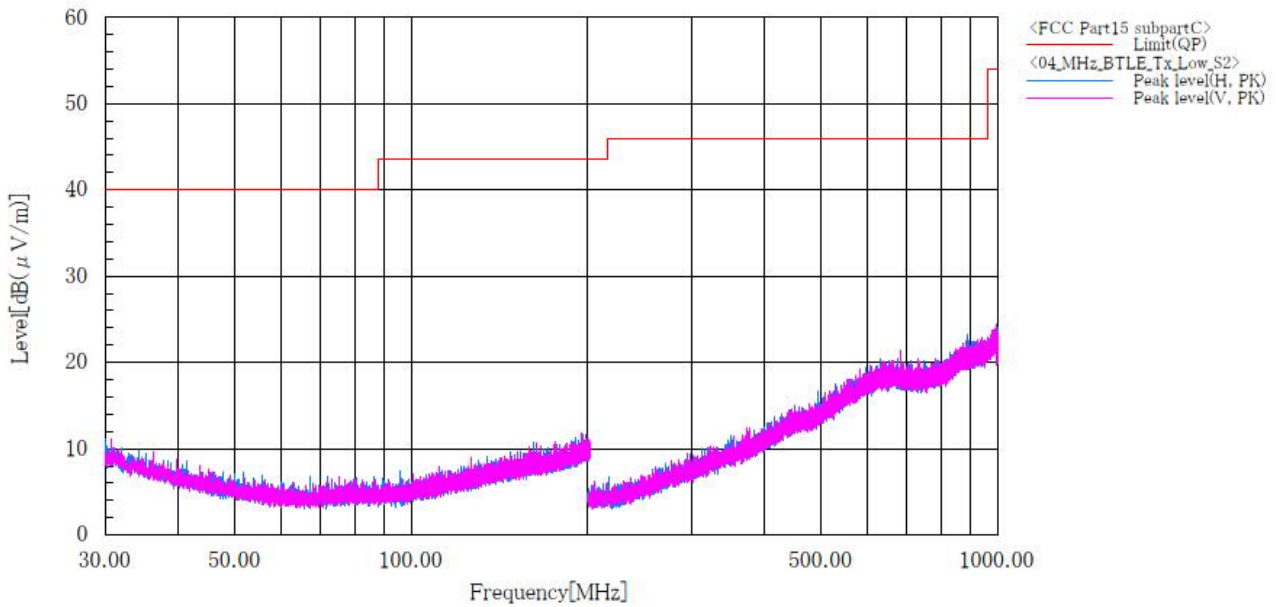

Final Result


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 30MHz at the 3 meters distance.



**[BT\_LE (LongRange S2)]**  
**Channel: Low**  
**ABOVE 1 GHz**

Company name	: KYOCERA Corporation	Standard	: FCC Part.15 subpart C
EUT	: Mobile Phone	Operator	: T.Seino
Model No.	: EB1157	Temp,Hum,Atm	: 22.2 [°C] 69.4 [%]
Serial No.	: N/A	Note1	:
Test mode	: BT_LE_Long Range S2_Tx_Ch:Low	Note2	:

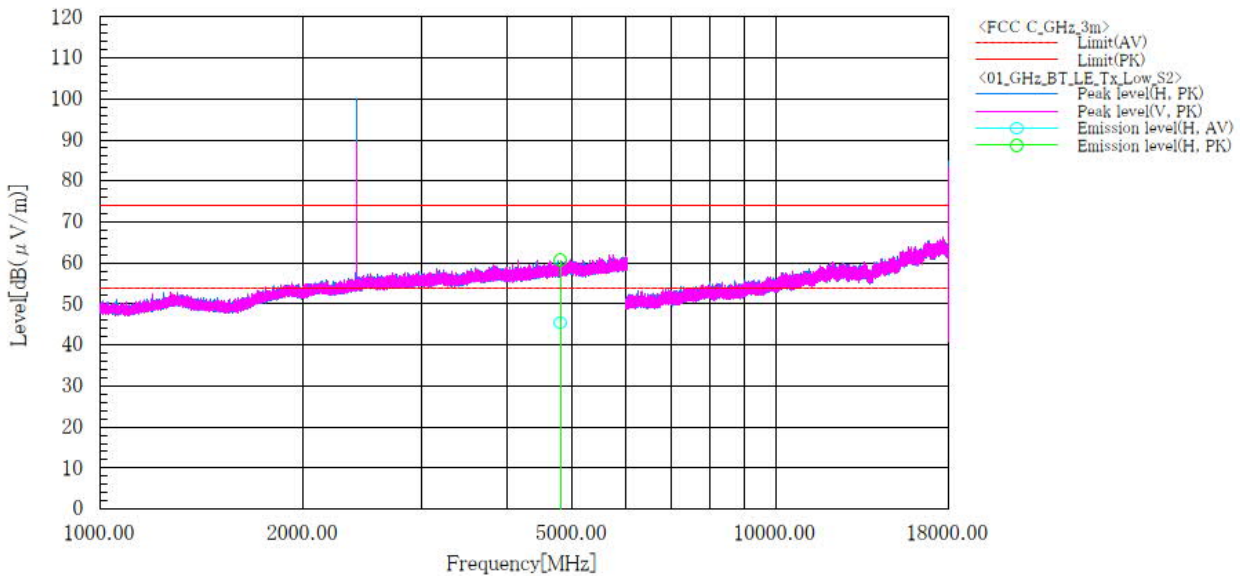

Final Result

No.	Frequency [MHz]	Pol	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c. f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]
1	4804.000	H	34.8	50.0	10.7	45.5	60.7	54.0	74.0	8.5	13.3	100.0	94.0

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.






Japan

**[BT\_LE (LongRange S2)]**  
**Channel: Middle**  
**ABOVE 1 GHz**

Company name	: KYOCERA Corporation	Standard	: FCC Part.15 subpart C
EUT	: Mobile Phone	Operator	: T.Seino
Model No.	: EB1157	Temp,Hum,Atm	: 22.2 [°C] 69.4 [%]
Serial No.	: N/A	Note1	:
Test mode	: BT LE_Long Range S2_Tx_Ch:Mid	Note2	:

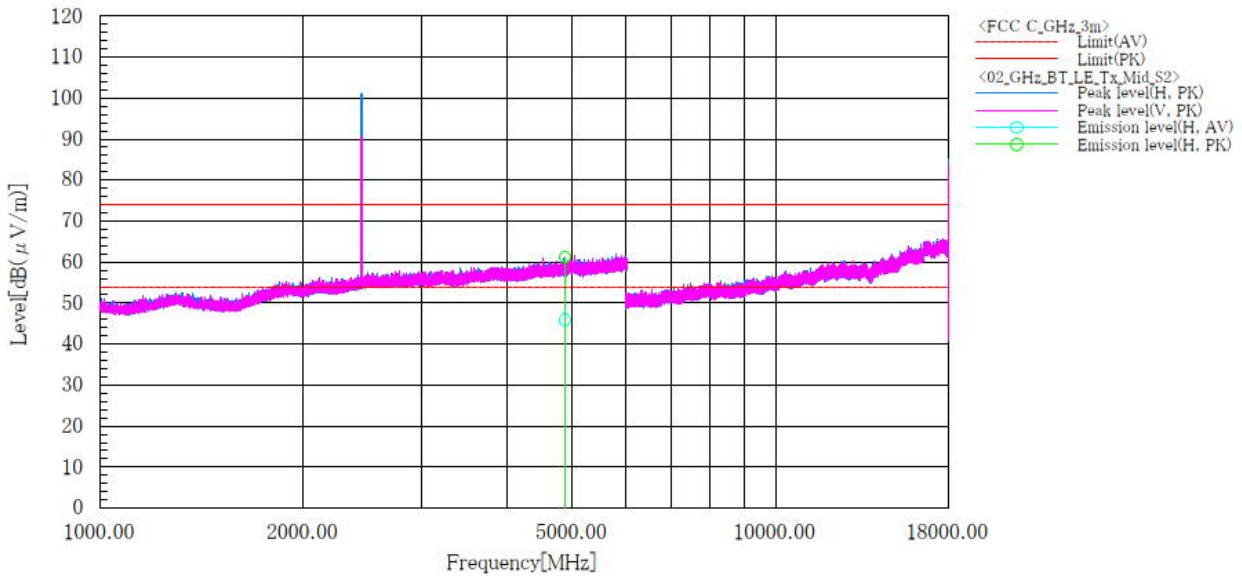

Final Result

No.	Frequency [MHz]	Pol	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c. f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]
1	4880.000	H	34.9	50.2	11.0	45.9	61.2	54.0	74.0	8.1	12.8	100.0	91.0

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.



Japan

**[BT\_LE (LongRange S2)]**  
**Channel: High**  
**ABOVE 1 GHz**

Company name	: KYOCERA Corporation	Standard	: FCC Part.15 subpart C
EUT	: Mobile Phone	Operator	: T.Seino
Model No.	: EB1157	Temp,Hum,Atm	: 22.2 [°C] 69.4 [%]
Serial No.	: N/A	Note1	:
Test mode	: BT LE_Long Range S2_Tx,Ch:High	Note2	:

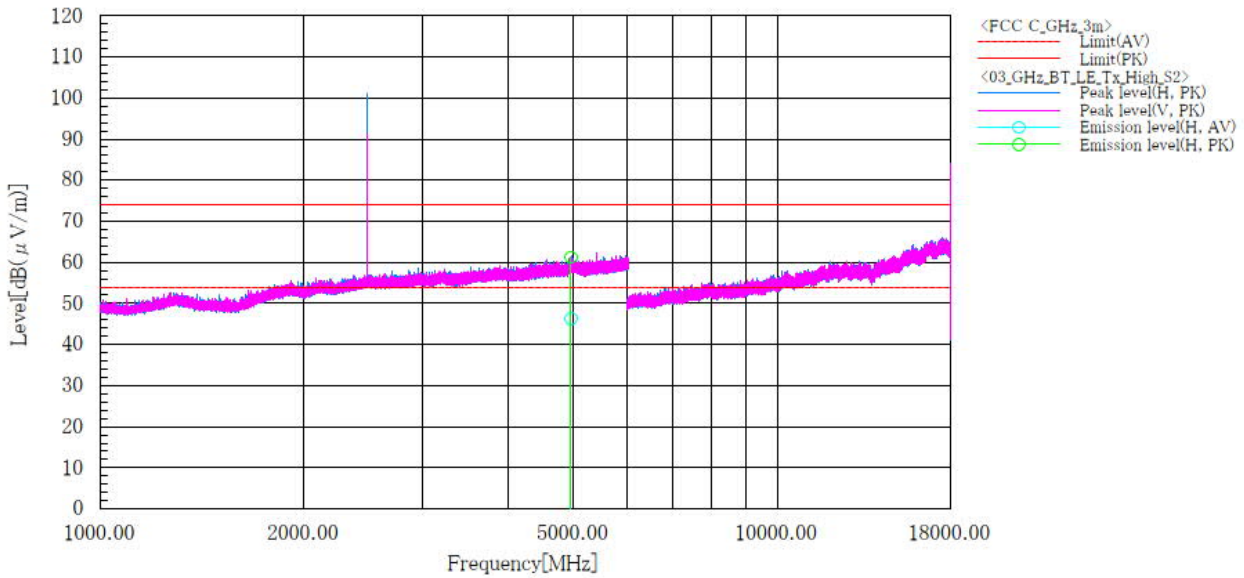

Final Result

No.	Frequency [MHz]	Pol	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c. f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]
1	4960.000	H	34.8	49.8	11.5	46.3	61.3	54.0	74.0	7.7	12.7	100.0	88.0

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.



**[BT\_LE (LongRange S8)]**  
**Channel: Low**  
**BELOW 1 GHz(Worst)**

Company name : KYOCERA Corporation  
 EUT : Mobile Phone  
 Model No. : EB1157  
 Serial No. : N/A  
 Test mode : BTLE\_Tx\_CH:Low\_S8

Sheet No. : 04  
 Standard : FCC Part15 subpart C  
 Operator : T.Seino  
 Temp,Hum,Atm : 22.8 [° C], 67.8 [%]  
 Note1 :

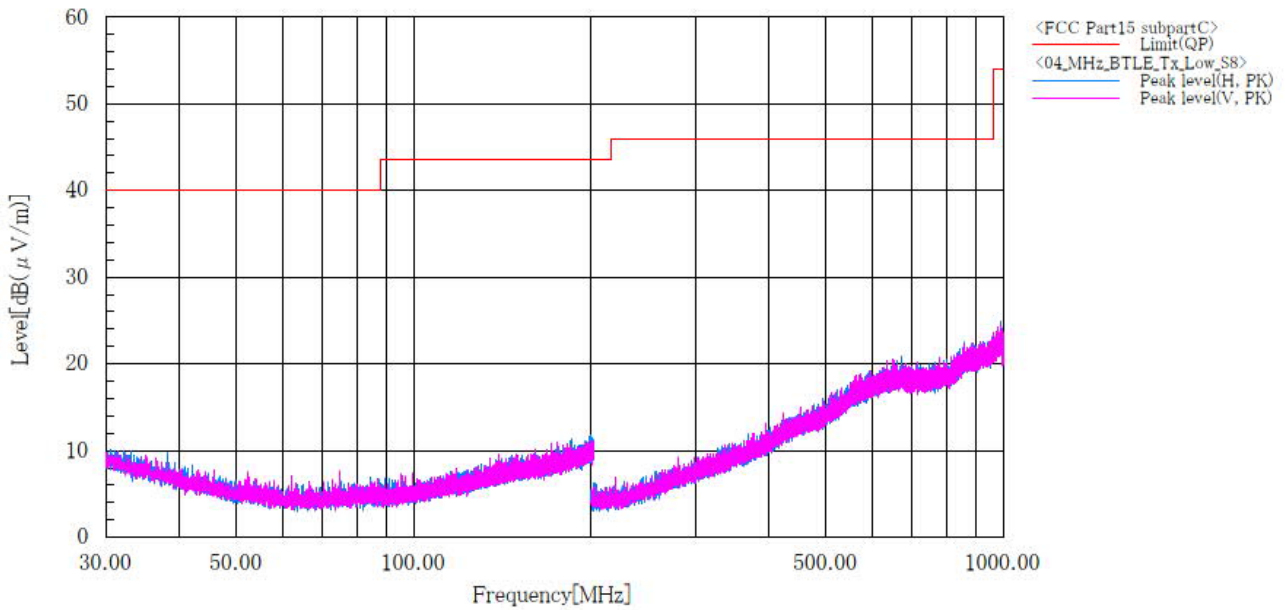

Final Result


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 30MHz at the 3 meters distance.



**[BT\_LE (LongRange S8)]**  
**Channel: Low**  
**ABOVE 1 GHz**

Company name	: KYOCERA Corporation	Standard	: FCC Part.15 subpart C
EUT	: Mobile Phone	Operator	: T.Seino
Model No.	: EB1157	Temp,Hum,Atm	: 22.2 [°C] 69.4 [%]
Serial No.	: N/A	Note1	:
Test mode	: BT LE_Long Range S8_Tx_Ch:Low	Note2	:

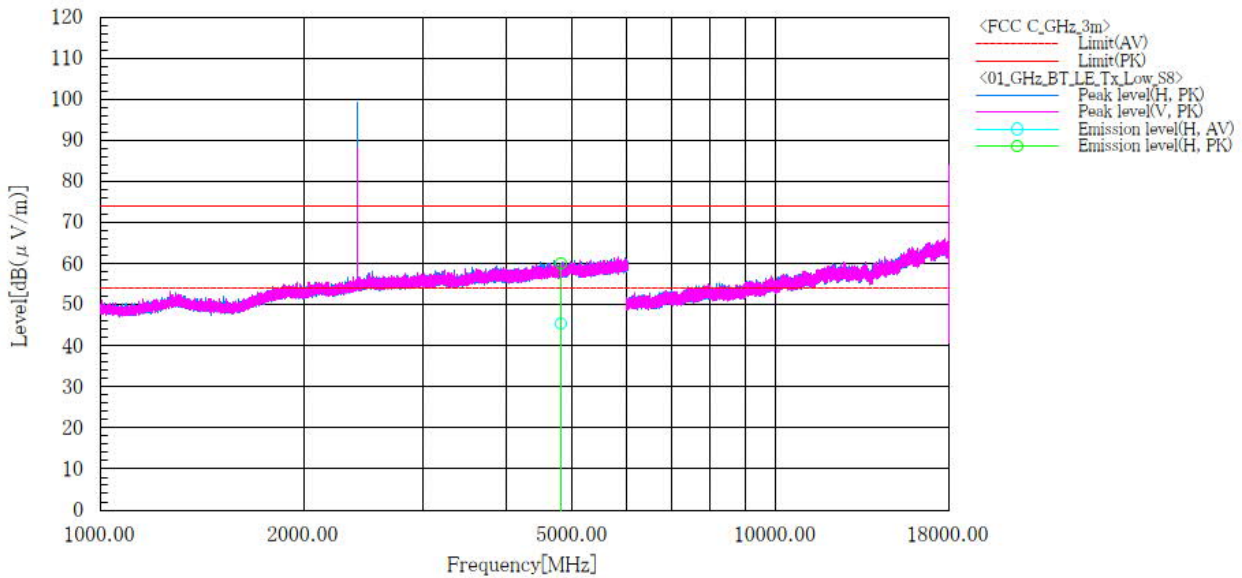

Final Result

No.	Frequency [MHz]	Pol	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c. f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]
1	4804.000	H	34.8	49.5	10.7	45.5	60.2	54.0	74.0	8.5	13.8	100.0	95.0

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.



Japan

**[BT\_LE (LongRange S8)]**  
**Channel: Middle**  
**ABOVE 1 GHz**

Company name	: KYOCERA Corporation	Standard	: FCC Part.15 subpart C
EUT	: Mobile Phone	Operator	: T.Seino
Model No.	: EB1157	Temp,Hum,Atm	: 22.2 [°C] 69.4 [%]
Serial No.	: N/A	Note1	:
Test mode	: BT LE_Long Range S2_Tx_Ch:Mid	Note2	:

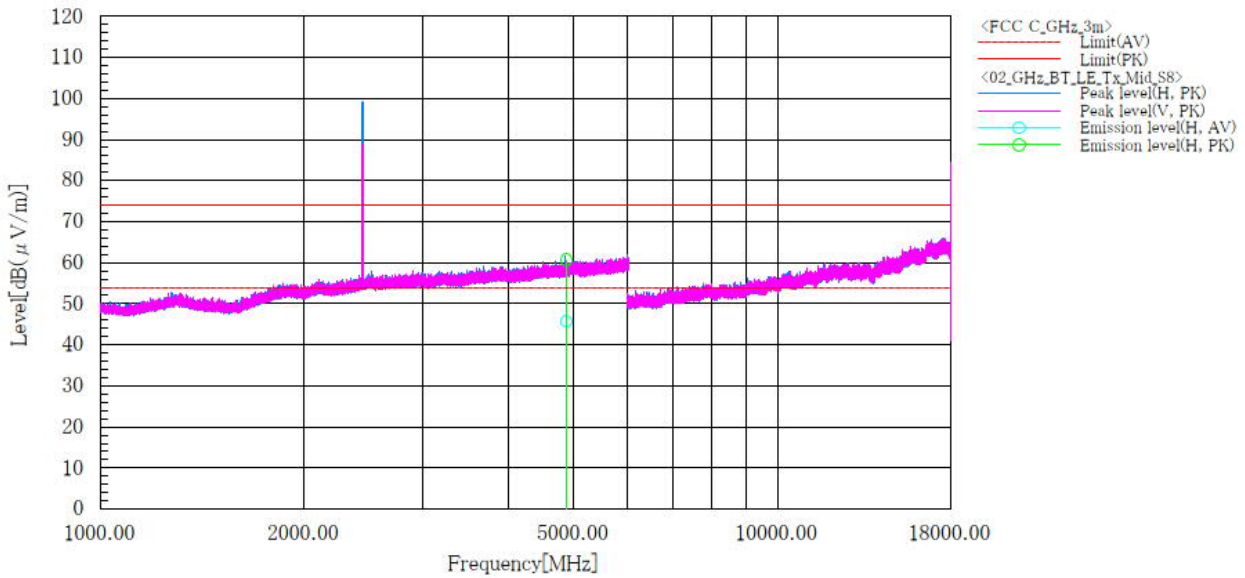

Final Result

No.	Frequency [MHz]	Pol	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c. f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]
1	4880.000	H	34.7	49.7	11.0	45.7	60.7	54.0	74.0	8.3	13.3	100.0	85.0


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.



**[BT\_LE (LongRange S8)]**  
**Channel: High**  
**ABOVE 1 GHz**

Company name	: KYOCERA Corporation	Standard	: FCC Part.15 subpart C
EUT	: Mobile Phone	Operator	: T.Seino
Model No.	: EB1157	Temp,Hum,Atm	: 22.2 [C] 69.4 [%]
Serial No.	: N/A	Note1	:
Test mode	: BT LE_Long Range S8_Tx,Ch:High	Note2	:

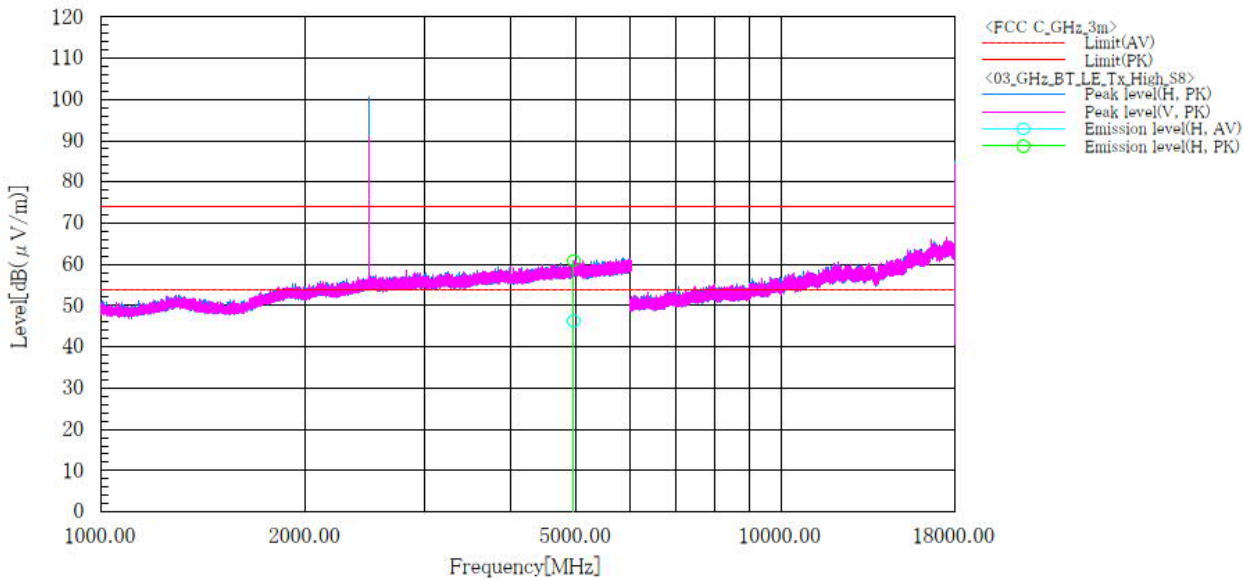

Final Result

No.	Frequency	Pol	Reading AV	Reading PK	c. f	Result AV	Result PK	Limit AV	Limit PK	Margin AV	Margin PK	Height	Angle
	[MHz]		[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[deg]
1	4960.000	H	34.8	49.5	11.5	46.3	61.0	54.0	74.0	7.7	13.0	100.0	87.0

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

## 4.6 Restricted Band of Operation

### 4.6.1 Measurement procedure

[FCC 15.247(d), 15.205, 15.209, KDB558074 D01 v05r02]

Test was applied by following conditions.

- Test method : ANSI C63.10
- Test place : 3m Semi-anechoic chamber
- EUT was placed on : Styrofoam table / (W)1.0m x (D)0.8m x (H)0.8m (below 1GHz)  
Styrofoam table / (W)0.6m x (D)0.6m x(H)1.5m (above 1GHz)
- Antenna distance : 3m
- Spectrum analyzer setting
  - Peak : RBW=1MHz, VBW=3MHz, Span=Arbitrary setting, Sweep=auto
  - Average : RBW=1MHz, VBW=3kHz (1Mbps), 10kHz (2Mbps),  
1kHz (LongRange S2, S8), Span=0Hz, Sweep=auto  
Display mode=Linear


#### Average Measurement Setting [VBW]

Mode	Duty Cycle (%)	T <sub>on</sub> (us)	T <sub>off</sub> (us)	1/T <sub>on</sub> (kHz)	Determined VBW Setting
Bluetooth 5.2 LE (1Mbps)	62.56	391	234	2.558	3kHz
Bluetooth 5.2 LE (2Mbps)	33.12	207	418	4.831	5kHz
Bluetooth 5.2 LE (Long Range S2)	57.01	1069	806	0.935	1kHz
Bluetooth5.2 LE (Long Range S8)	82.80	3105	645	0.322	1kHz

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore, sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

Radiated emission measurements are performed at 3m distance with the broadband antenna (Loop antenna, Biconical antenna, Log periodic antenna, Double ridged guide antenna and Broad-band horn Antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1m to 4m and stopped at height producing the maximum emission. As for the Loop antenna, it is positioned with its plane vertical, and the center of the Loop antenna is 1m above the ground plane. The EUT is Placed on a turntable, which is 0.8m/1.5m above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. The test results represent the worst case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation. Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.

- Test configuration

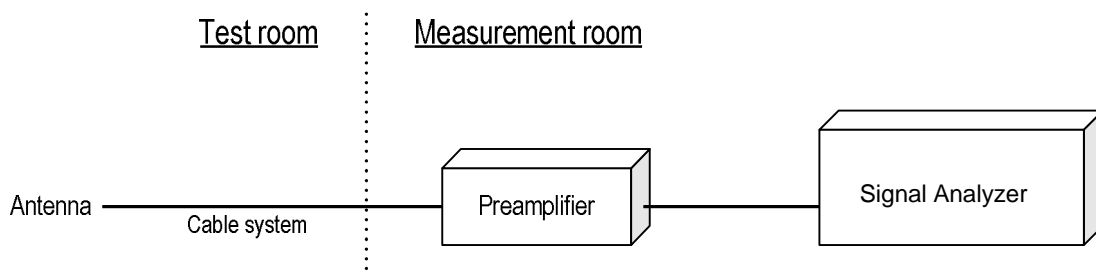



#### 4.6.2 Limit

Emission at the boundary of the restricted band provided by 15.205 shall be lower than 15.209 limit.

#### 4.6.3 Measurement result

Channel	Frequency [MHz]	Results Chart	Result
Low	2402	See the Trace Data	Pass
High	2480	See the Trace Data	Pass

#### 4.6.4 Test data

Date : 29-June-2023

Temperature : 22.2 [°C]

Humidity : 69.4 [%]

Test place : 3m Semi-anechoic chamber


Test engineer :

Chiaki Kanno







**[BT\_LE (1Mbps)]**  
**Channel: Low**  
**Horizontal**  
**Peak**

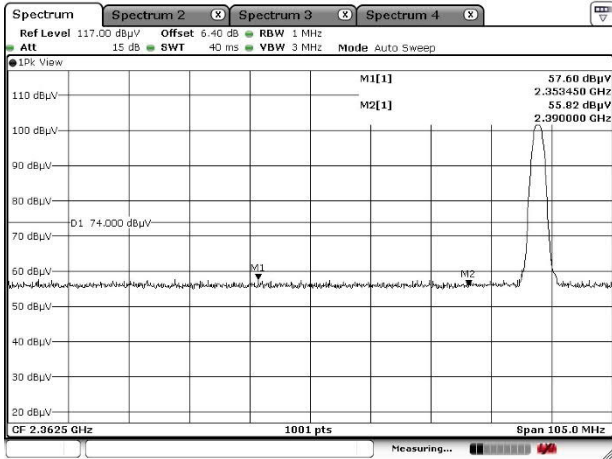


**Average**

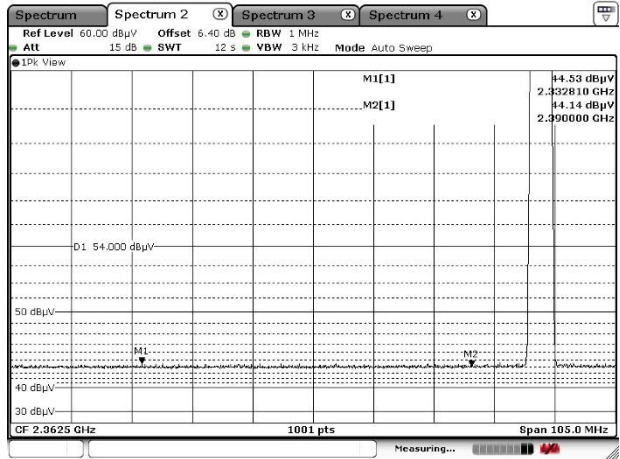

**Vertical**  
**Peak**

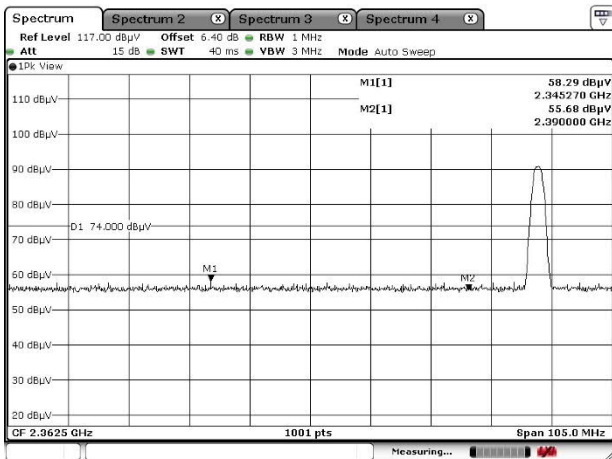


**Average**

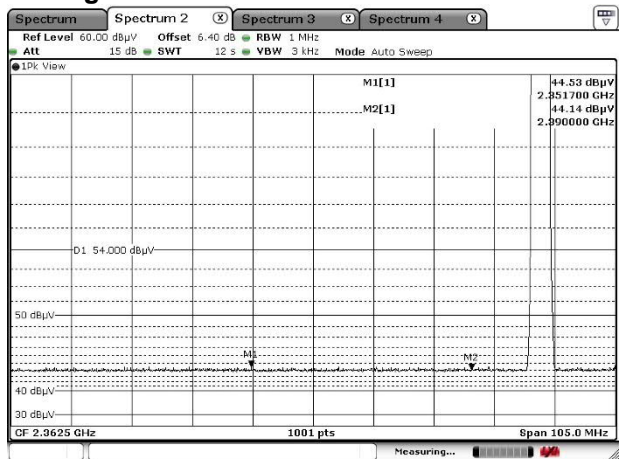





**Channel: High  
Horizontal  
Peak**

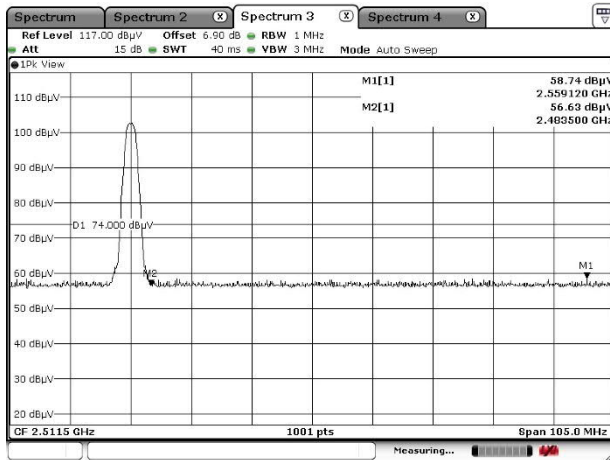


**Average**

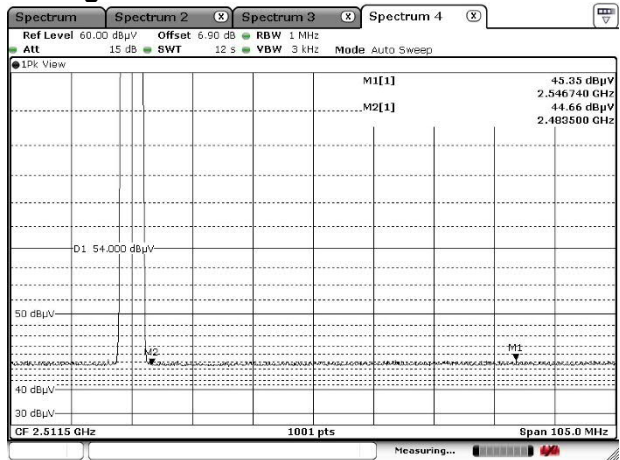

**Vertical  
Peak**

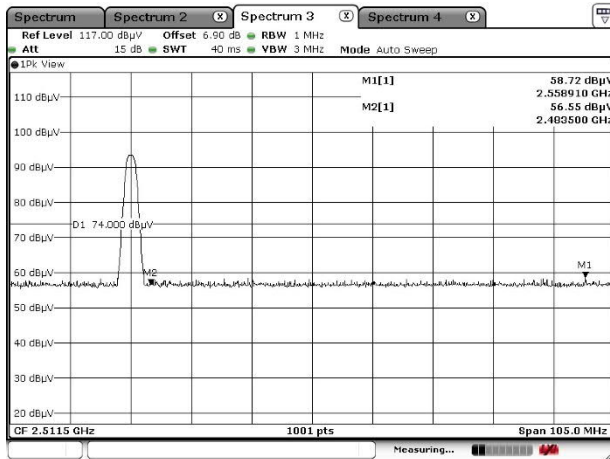


**Average**

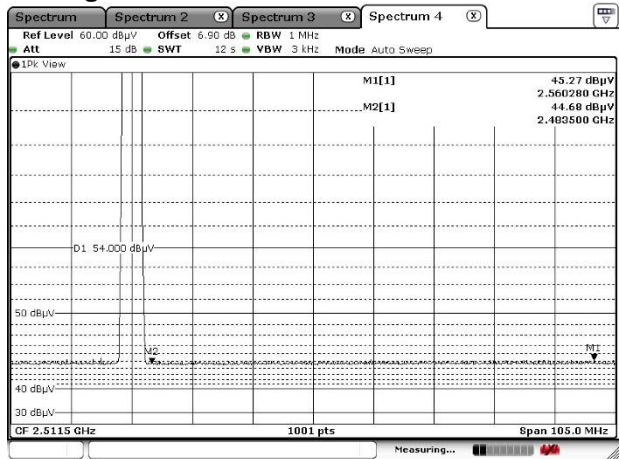





**[BT\_LE (2Mbps)]**  
**Channel: Low**  
**Horizontal**  
**Peak**

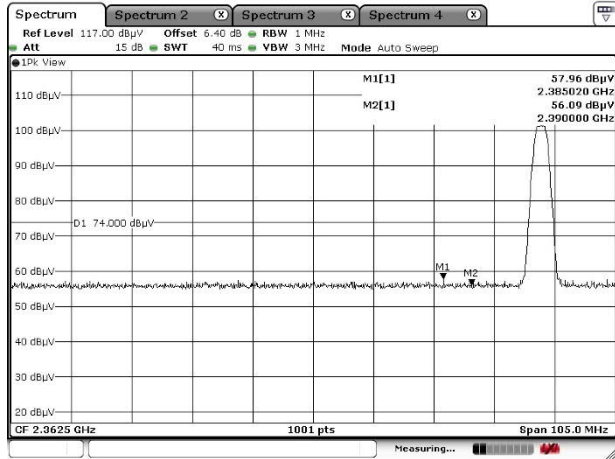


**Average**

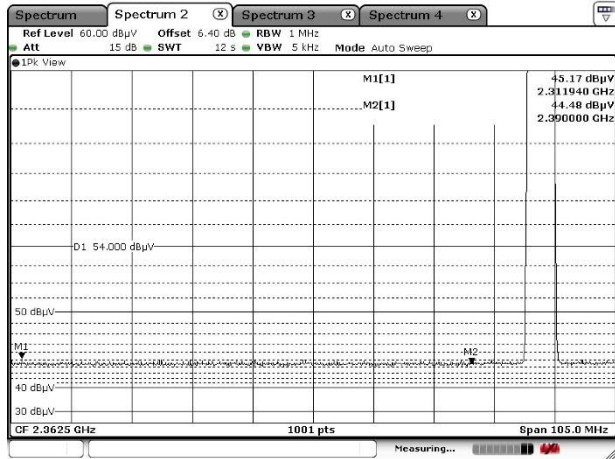

**Vertical**  
**Peak**

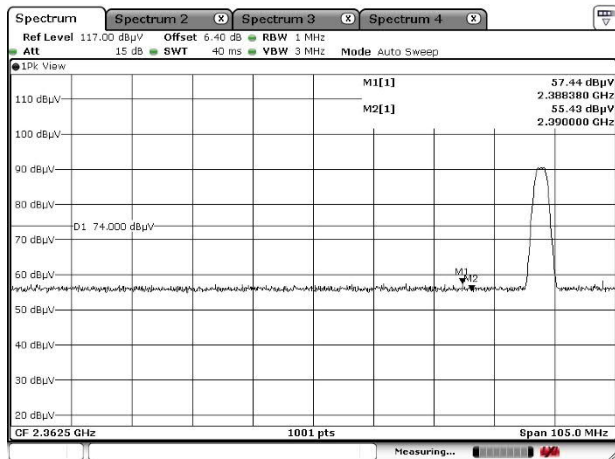


**Average**

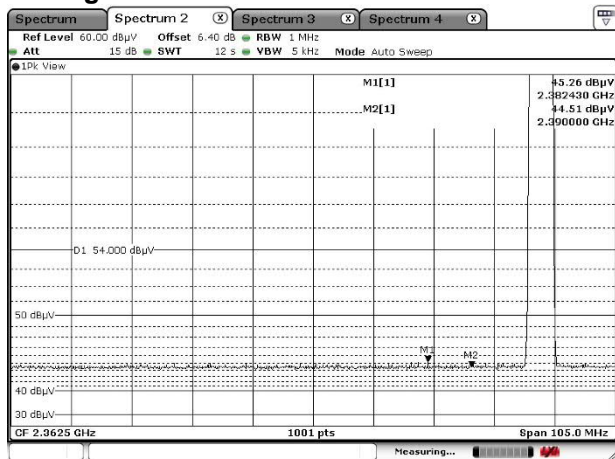





**Channel: High  
Horizontal  
Peak**

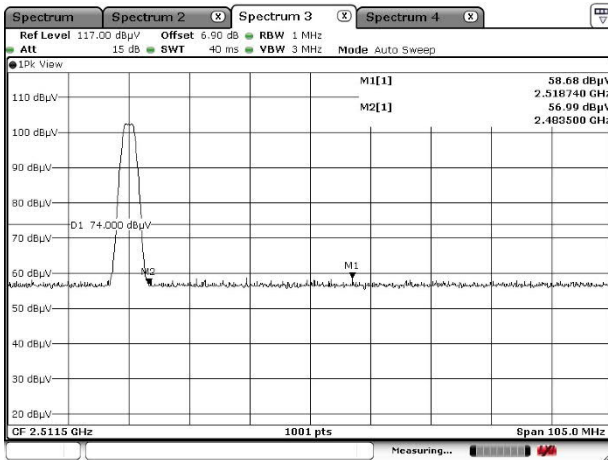


**Average**

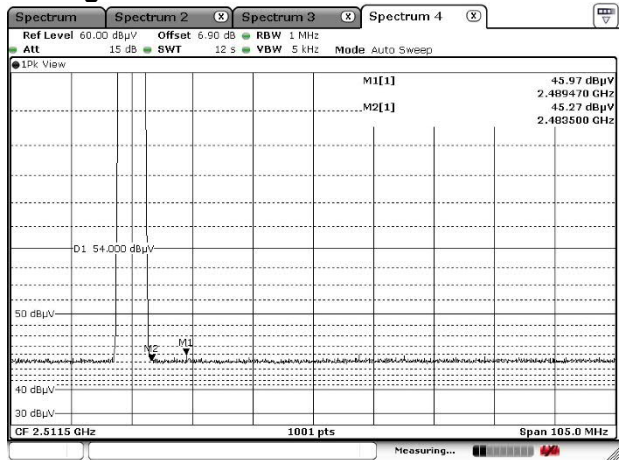

**Vertical  
Peak**

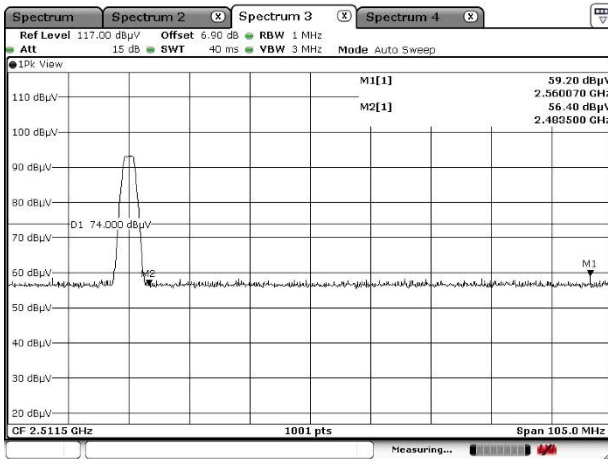


**Average**

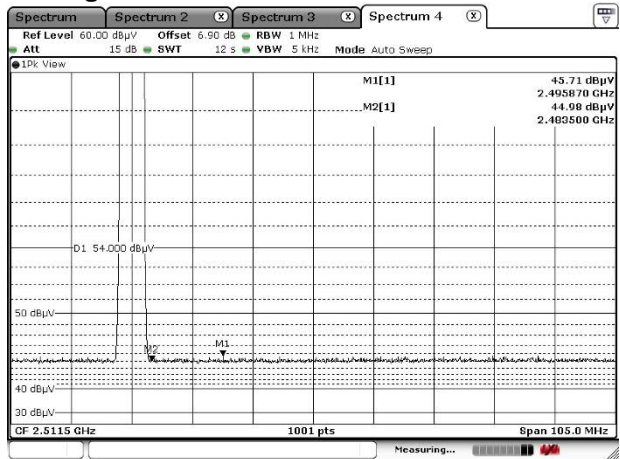





[BT\_LE (LongRange S2)]  
Channel: Low  
Horizontal  
Peak

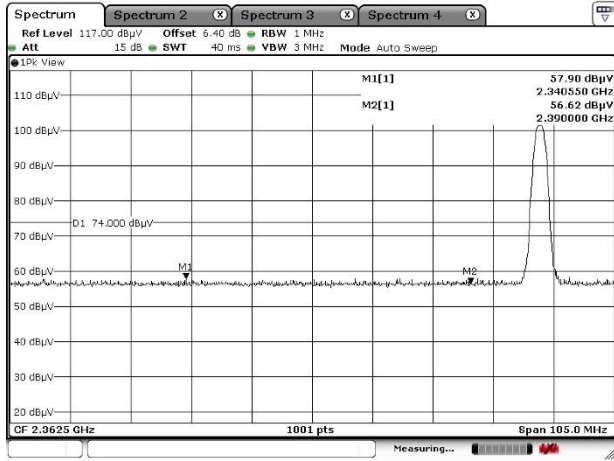


Average

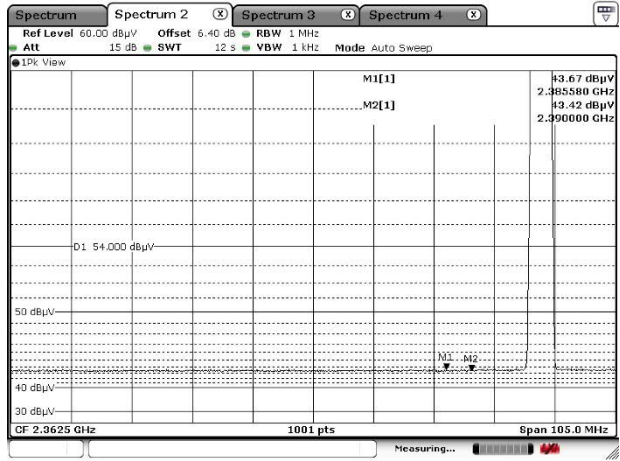

Vertical  
Peak

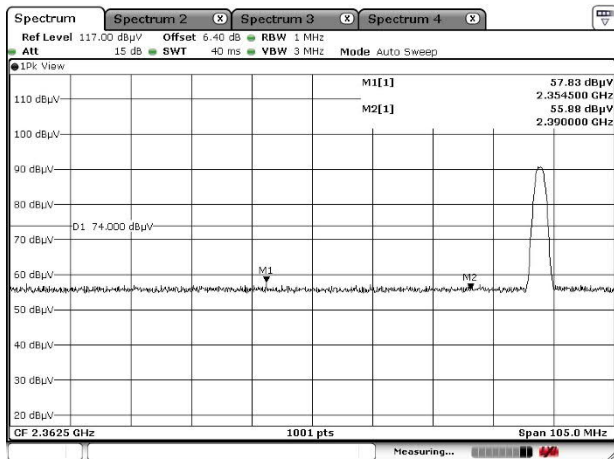


Average

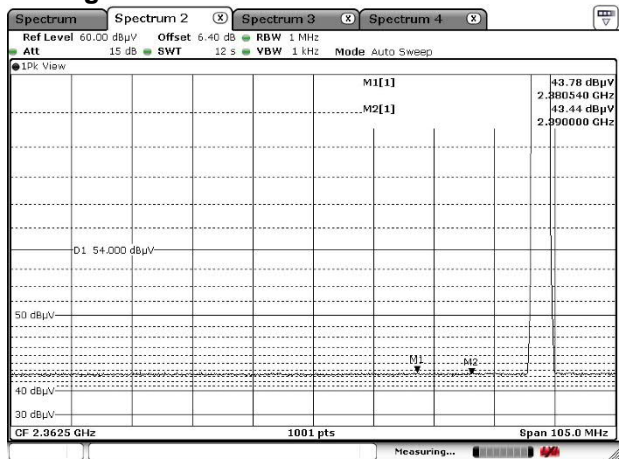





**Channel: High  
Horizontal  
Peak**

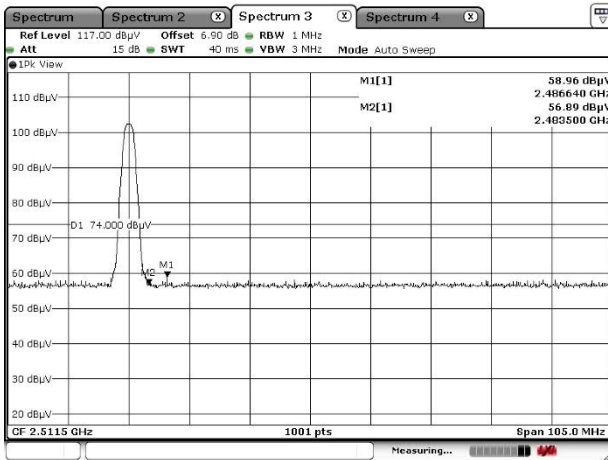


**Average**

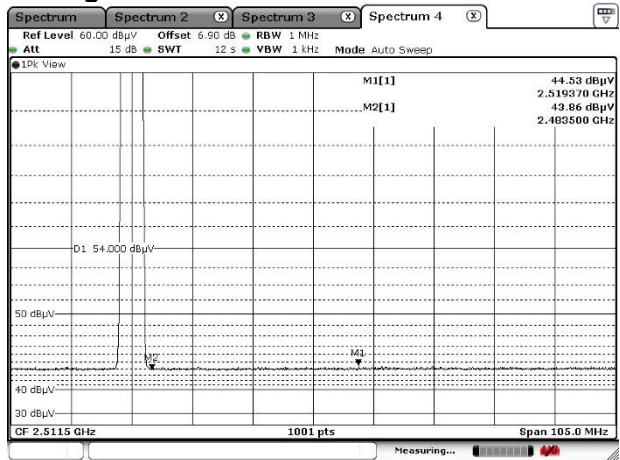

**Vertical  
Peak**

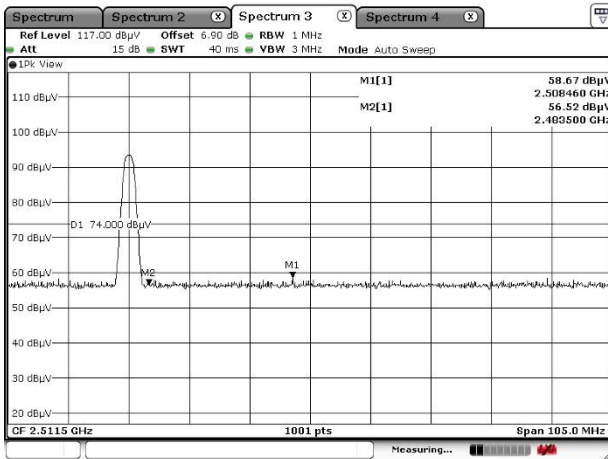


**Average**

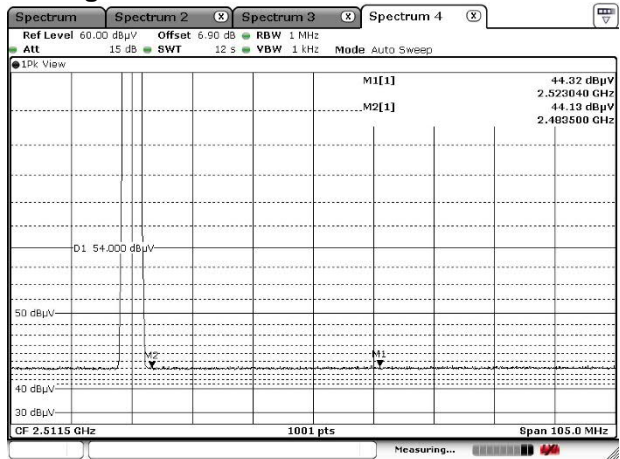





**[BT\_LE (LongRange S8)]**  
**Channel: Low**  
**Horizontal**  
**Peak**

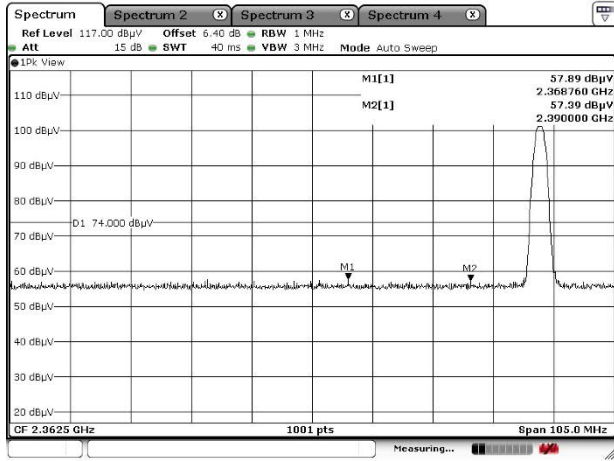


**Average**

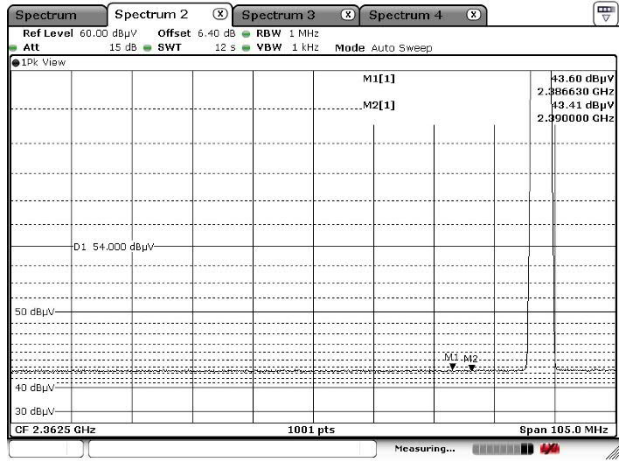

**Vertical**  
**Peak**

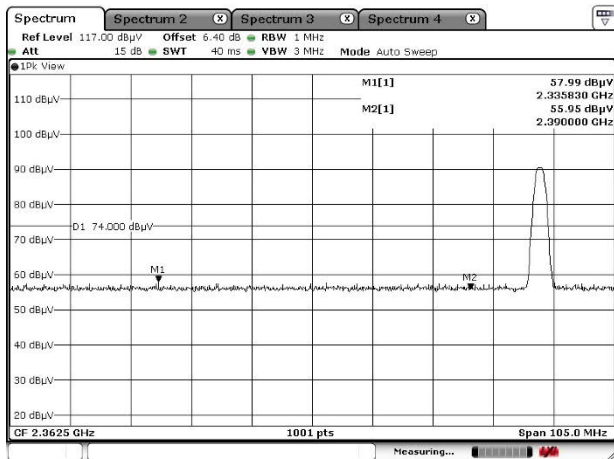


**Average**

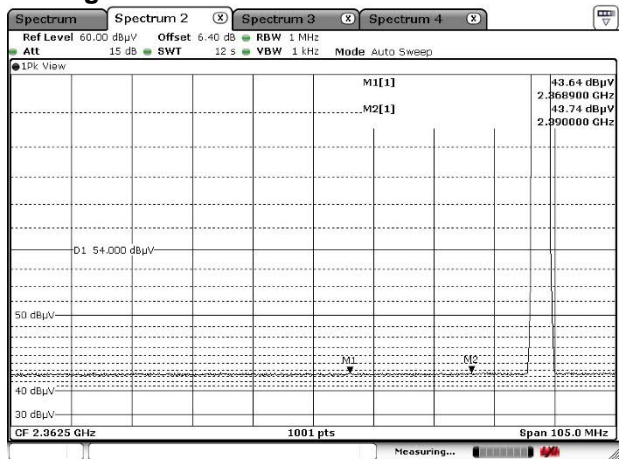





### Channel: High Horizontal Peak

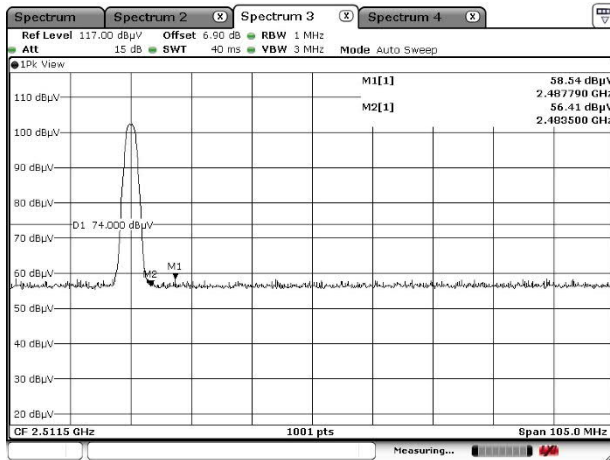


### Average

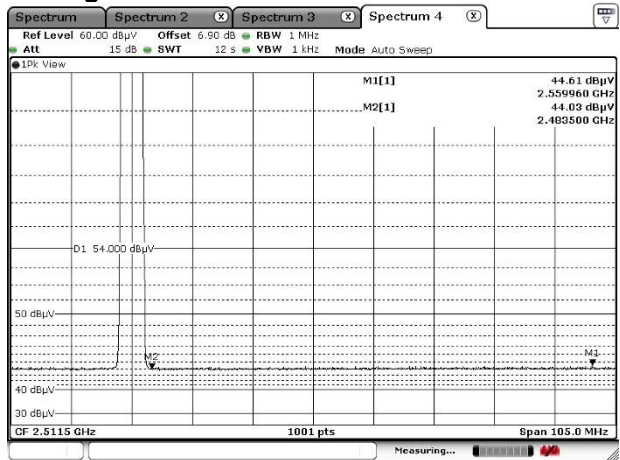

### Vertical Peak

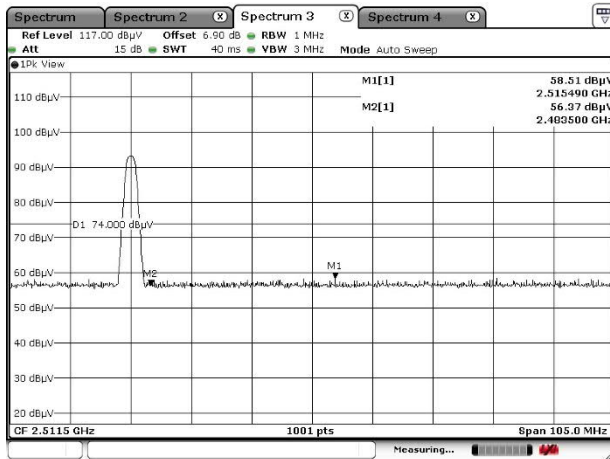

### Average

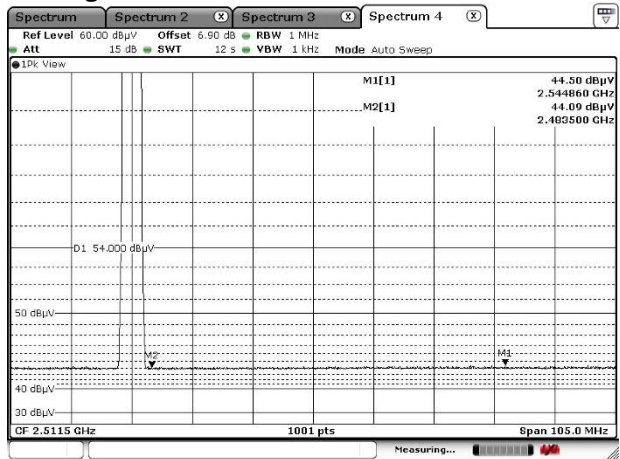



## 4.7 Transmitter Power Spectral Density

### 4.7.1 Measurement procedure


#### [FCC 15.247(e), KDB558074 D01 v05r02]

The peak power is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) Span = 1.5 times the 6 dB bandwidth.
- b) RBW = 3kHz - 100kHz.
- c) VBW  $\geq$  3 x RBW.
- d) Sweep time = auto-couple.
- e) Detector = peak.
- f) Trace mode = max hold.

- Test configuration

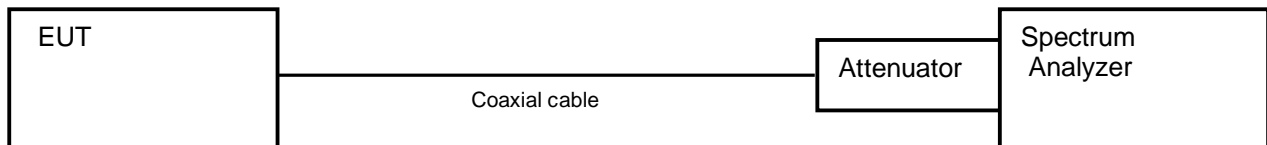

### 4.7.2 Limit

The peak power spectral density shall not be greater than 8dBm in any 3kHz band.

### 4.7.3 Measurement result

Date : 5-July-2023  
 Temperature : 24.1 [°C]  
 Humidity : 59.3 [%]  
 Test place : Shielded room No.4

Test engineer : Kazunori Saito

#### [Chain 0]

##### [BT\_LE (1Mbps)]

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dBm)	Result
Low	2402	-18.61	10.83	-7.78	8.00	15.78	PASS
Middle	2440	-19.77	10.83	-8.94	8.00	16.94	PASS
High	2480	-17.89	10.83	-7.06	8.00	15.06	PASS

##### [BT\_LE (2Mbps)]

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dBm)	Result
Low	2402	-21.17	10.83	-10.34	8.00	18.34	PASS
Middle	2440	-22.37	10.83	-11.54	8.00	19.54	PASS
High	2480	-20.55	10.83	-9.72	8.00	17.72	PASS

##### [BT\_LE (LongRange S2)]

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dBm)	Result
Low	2402	-10.14	10.83	0.69	8.00	7.31	PASS
Middle	2440	-11.37	10.83	-0.54	8.00	8.54	PASS
High	2480	-9.53	10.83	1.30	8.00	6.70	PASS

##### [BT\_LE (LongRange S8)]

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dBm)	Result
Low	2402	-10.28	10.83	0.55	8.00	7.45	PASS
Middle	2440	-11.41	10.83	-0.58	8.00	8.58	PASS
High	2480	-9.52	10.83	1.31	8.00	6.69	PASS

Calculation;

Transmitter Power Spectral Density Level (Margin) = Limit – (Reading + Factor)

**[Chain 1]****[BT\_LE (1Mbps)]**

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dBm)	Result
Low	2402	-19.24	10.83	-8.41	8.00	16.41	PASS
Middle	2440	-19.32	10.83	-8.49	8.00	16.49	PASS
High	2480	-18.67	10.83	-7.84	8.00	15.84	PASS

**[BT\_LE (2Mbps)]**

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dBm)	Result
Low	2402	-21.85	10.83	-11.02	8.00	19.02	PASS
Middle	2440	-21.99	10.83	-11.16	8.00	19.16	PASS
High	2480	-21.32	10.83	-10.49	8.00	18.49	PASS

**[BT\_LE (LongRange S2)]**

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dBm)	Result
Low	2402	-10.68	10.83	0.15	8.00	7.85	PASS
Middle	2440	-10.82	10.83	0.01	8.00	7.99	PASS
High	2480	-10.15	10.83	0.68	8.00	7.32	PASS

**[BT\_LE (LongRange S8)]**


Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dBm)	Result
Low	2402	-10.74	10.83	0.09	8.00	7.91	PASS
Middle	2440	-10.78	10.83	0.05	8.00	7.95	PASS
High	2480	-10.09	10.83	0.74	8.00	7.26	PASS

Calculation;


Transmitter Power Spectral Density Level (Margin) = Limit – (Reading + Factor)

#### 4.7.4 Trace data


##### [BT\_LE (1Mbps)] Channel Low[Chain 0]

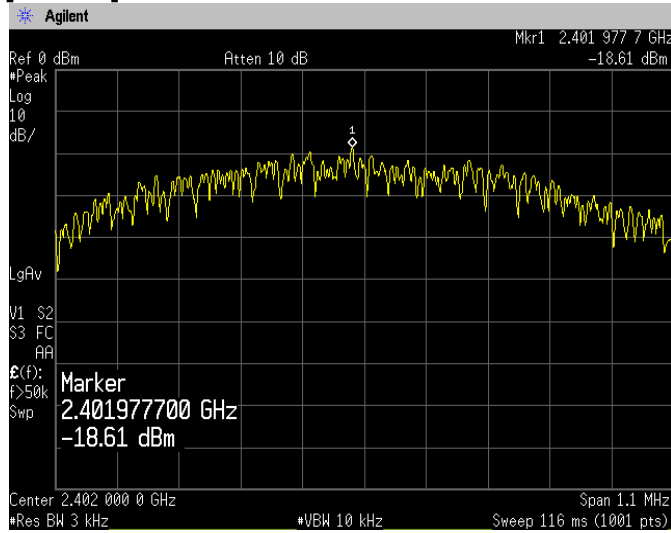

##### Channel Middle[Chain 0]

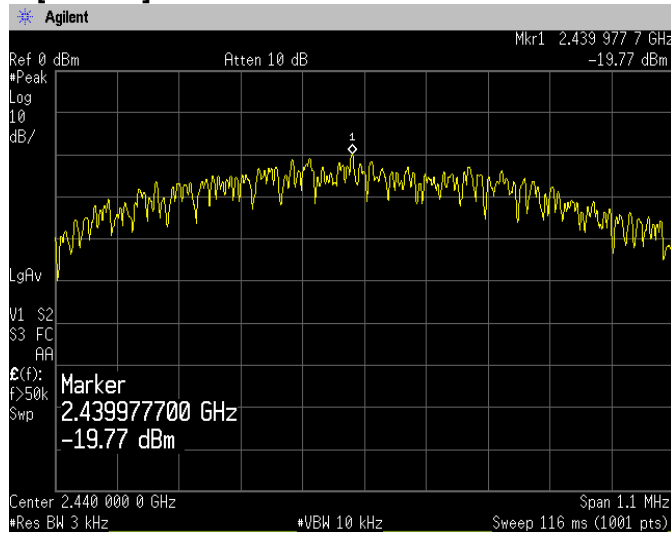


##### Channel High[Chain 0]

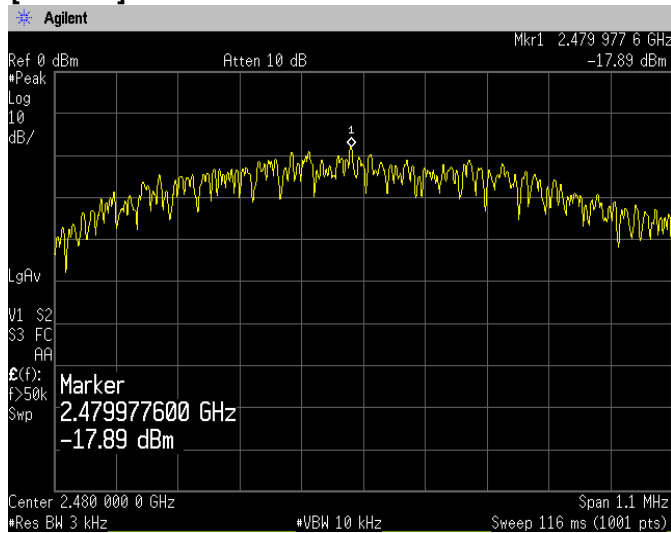





### [BT\_LE (2Mbps)] Channel Low[Chain 0]

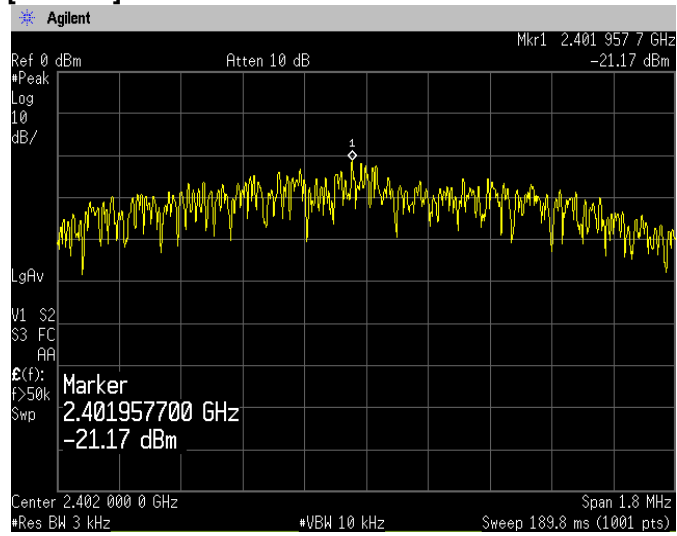


### Channel Middle[Chain 0]

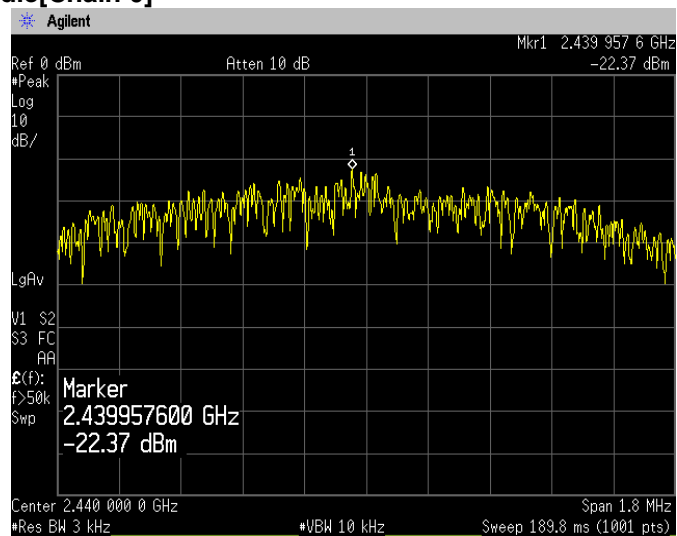


### Channel High[Chain 0]

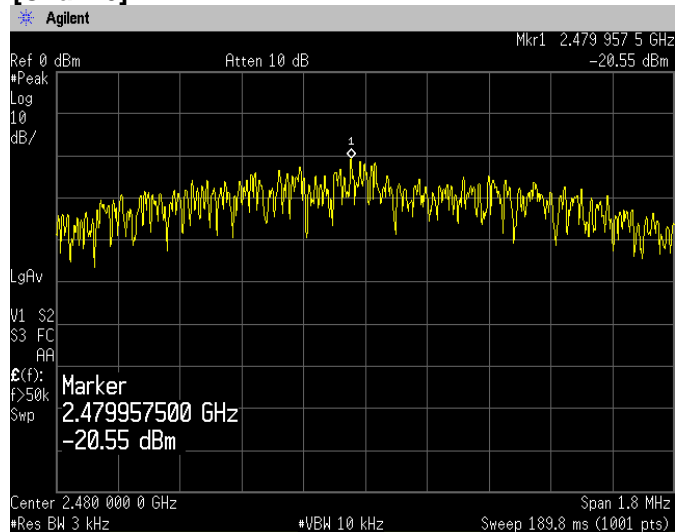


### [BT\_LE (LongRange S2)] Channel Low[Chain 0]

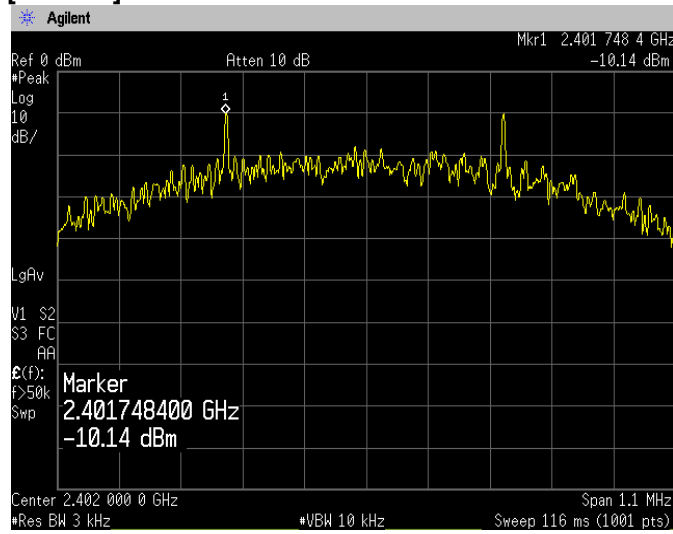

### Channel Middle[Chain 0]

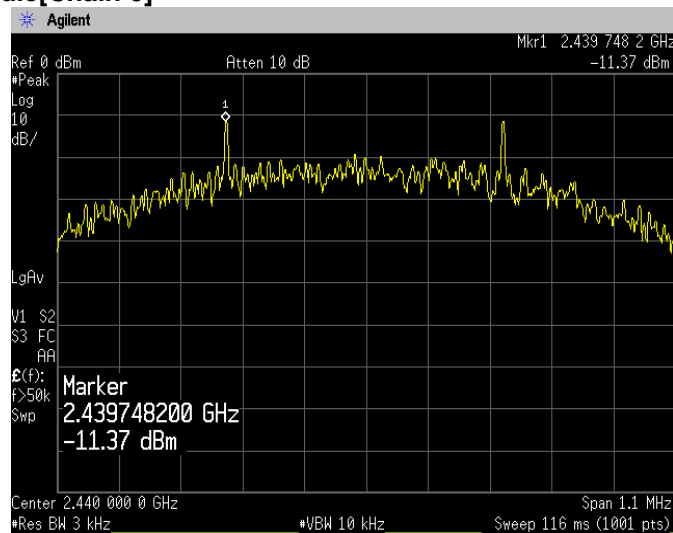


### Channel High[Chain 0]

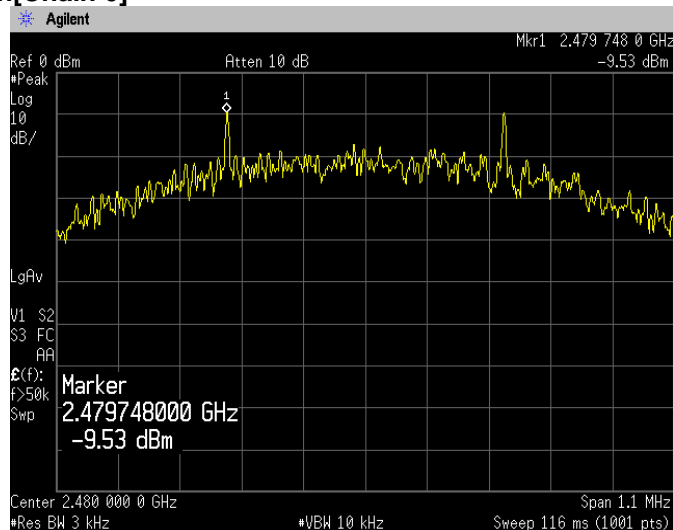





### [BT\_LE (LongRange S8)] Channel Low[Chain 0]

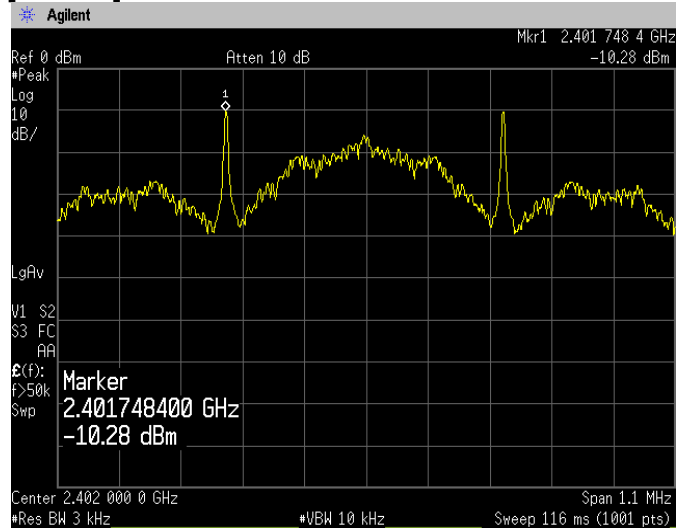

### Channel Middle[Chain 0]

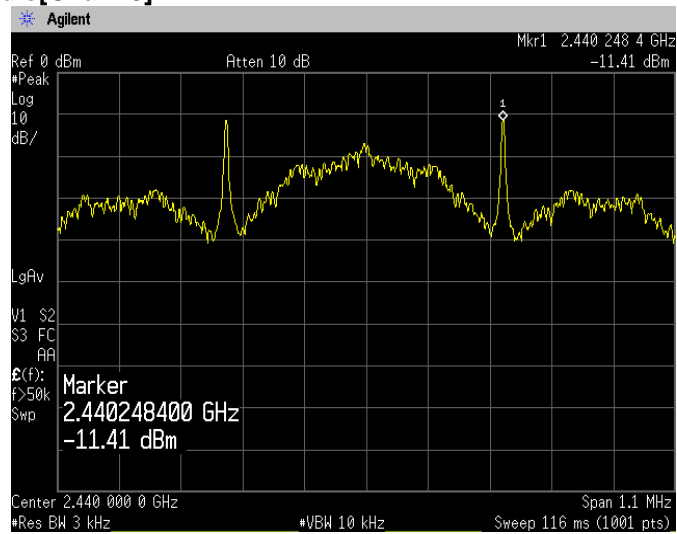


### Channel High[Chain 0]

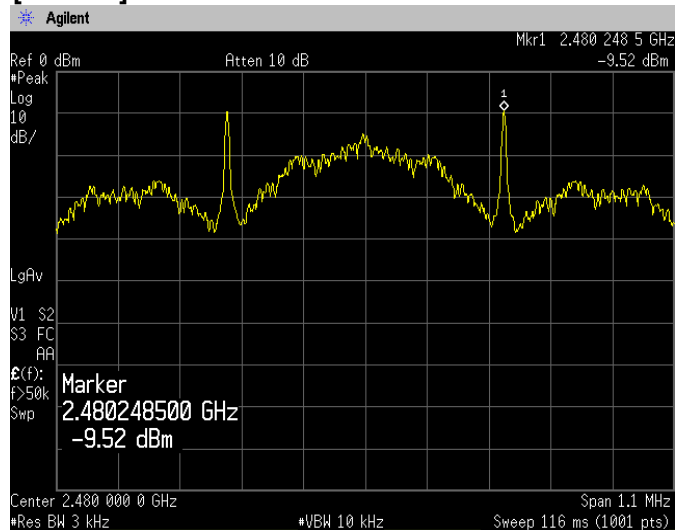





### [BT\_LE (1Mbps)] Channel Low[Chain 1]

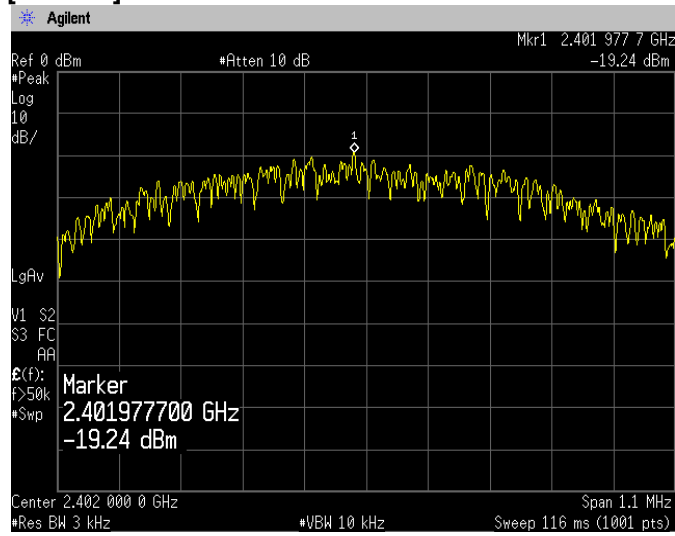

### Channel Middle[Chain 1]

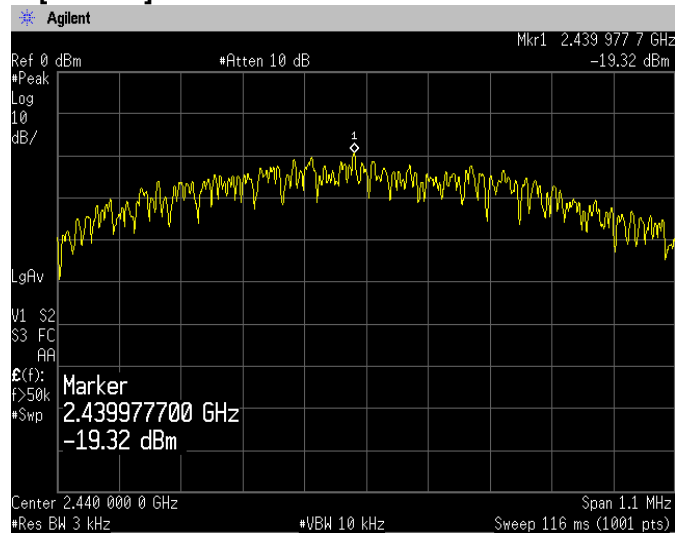


### Channel High[Chain 1]

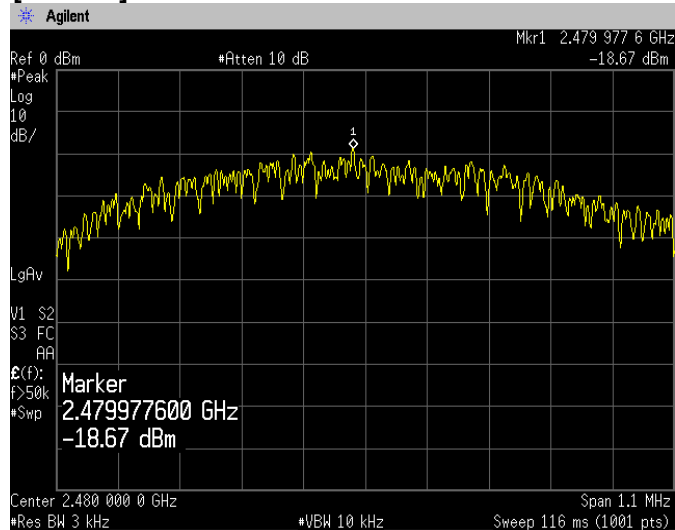







### [BT\_LE (2Mbps)] Channel Low[Chain 1]

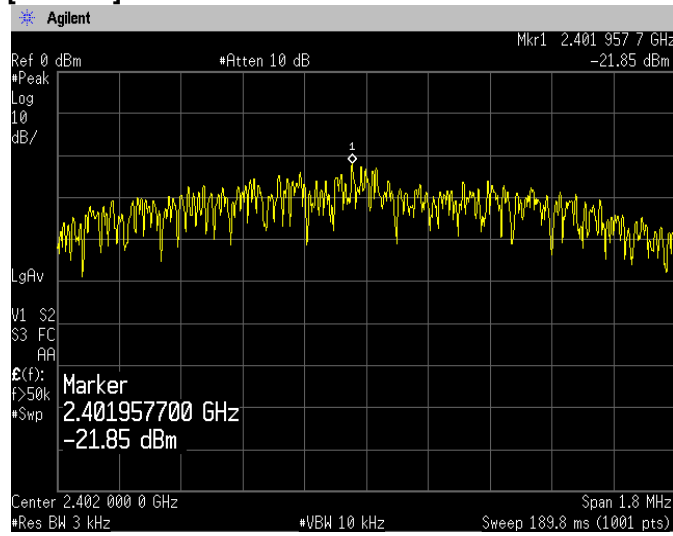

### Channel Middle[Chain 1]

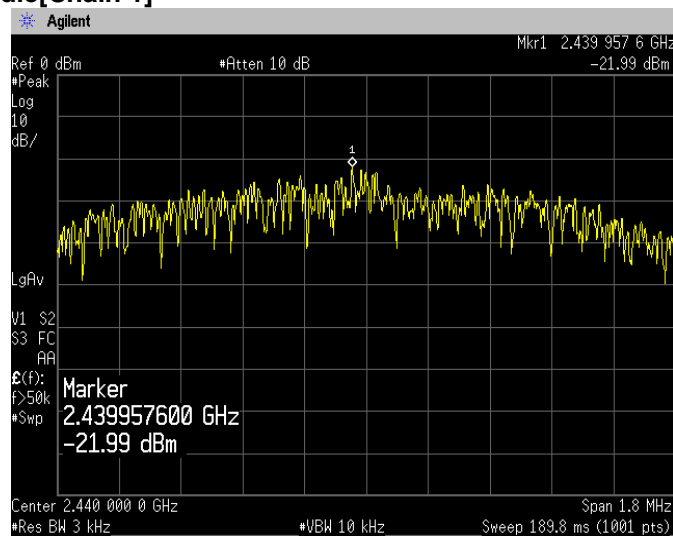


### Channel High[Chain 1]

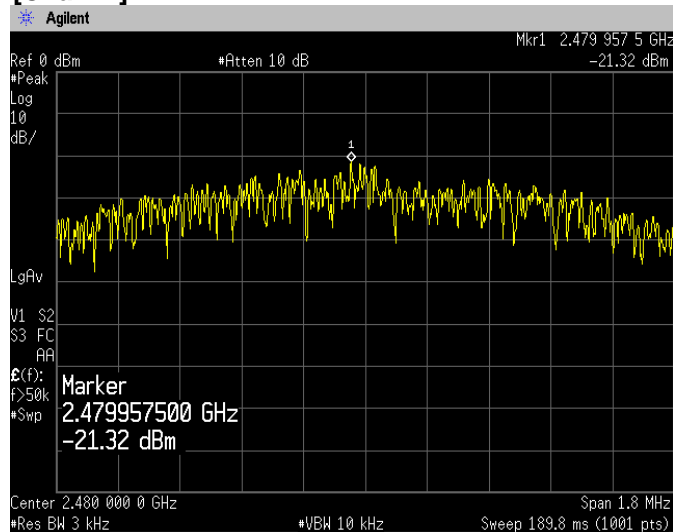





### [BT\_LE (LongRange S2)] Channel Low[Chain 1]

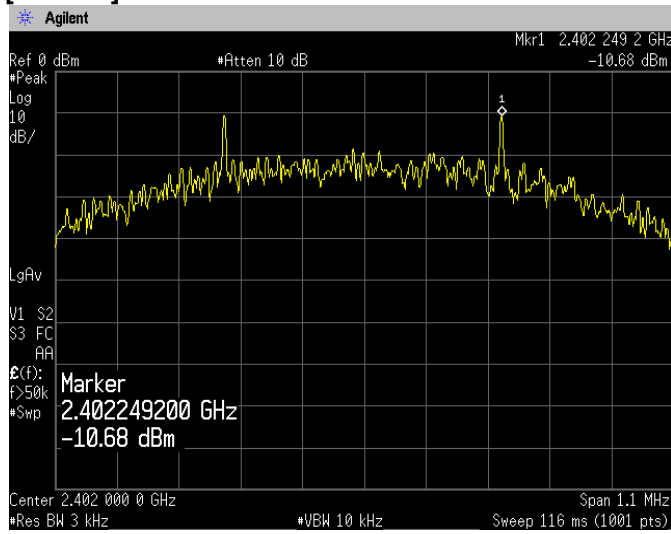

### Channel Middle[Chain 1]

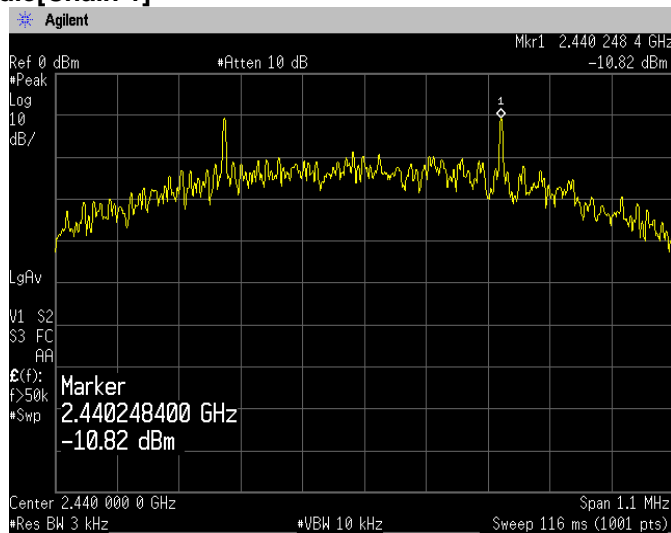


### Channel High[Chain 1]

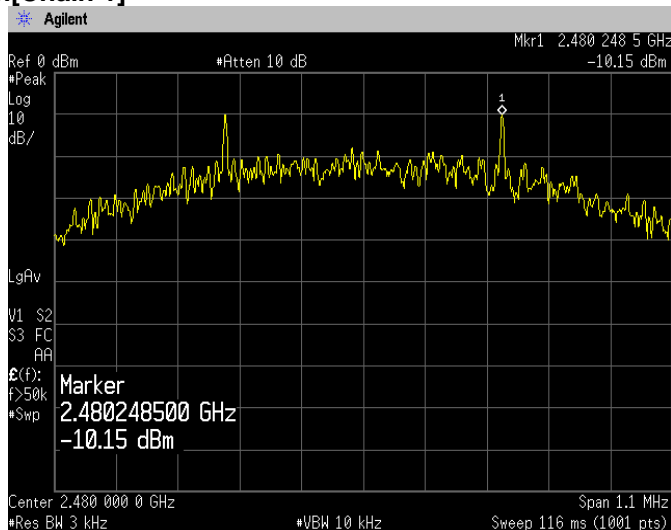





### [BT\_LE (LongRange S8)] Channel Low[Chain 1]

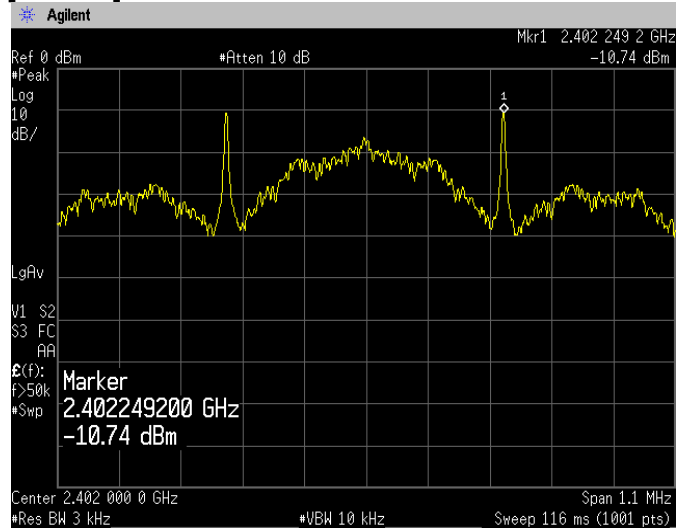

### Channel Middle[Chain 1]

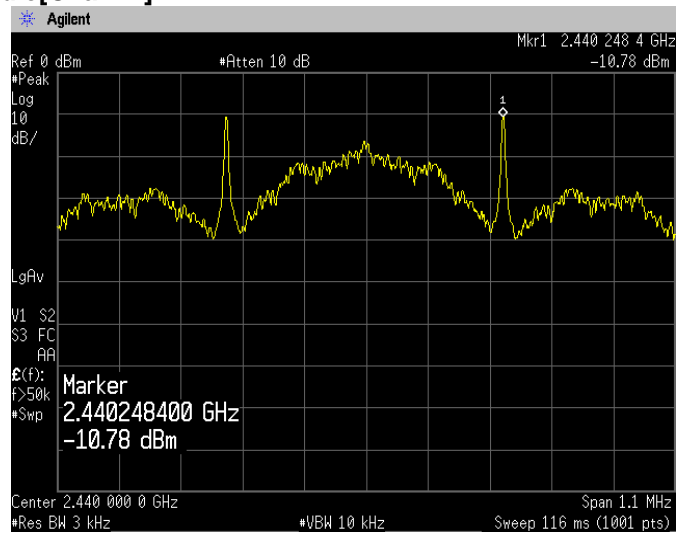

### Channel High[Chain 1]

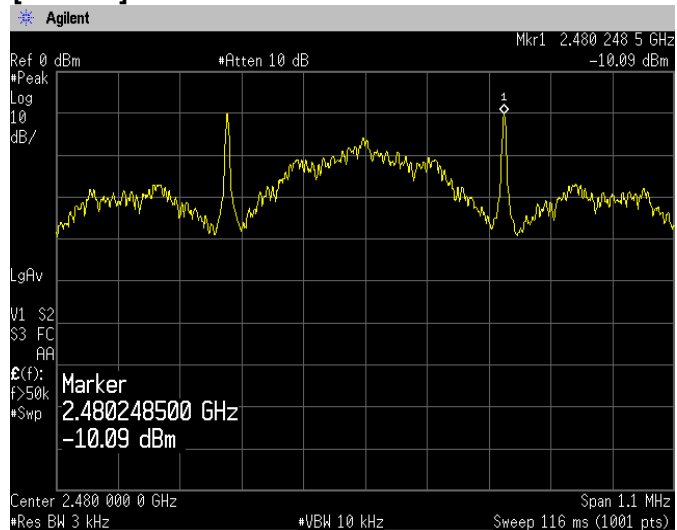

## 4.8 AC Power Line Conducted Emissions

### 4.8.1 Measurement procedure

#### [FCC 15.207]

Test was applied by following conditions.


Test method	:	ANSI C63.10
Frequency range	:	0.15 MHz to 30 MHz
Test place	:	3 m Semi-anechoic chamber
EUT was placed on	:	Styrofoam table / (W)1.0m x (D)0.8m x (H)0.8m
Vertical Metal Reference Plane	:	(W)2.0 m x (H)2.0 m 0.4 m away from EUT
Test receiver setting		
- Detector	:	Quasi-peak, Average
- Bandwidth	:	9 kHz

EUT and peripherals are connected to 50Ω/50μH Line Impedance Stabilization Network (LISN) which are connected to reference ground plane, and are placed 80cm away from EUT. Excess of AC power cable is bundled in center.

LISN for peripheral is terminated in 50Ω.

EUT operating mode is selected to emit the maximum noise. Overall frequency range is investigated with spectrum analyzer using peak detector. Maximum emission configuration is determined by manipulating the EUT, peripherals, interconnecting cables. Then, emission measurements are performed with test receiver in above setting to each current-carrying conductor of the mains port. Sufficient time for EUT, peripherals and test equipment is provided in order for them to warm up to their normal operating condition. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits.

- Test configuration

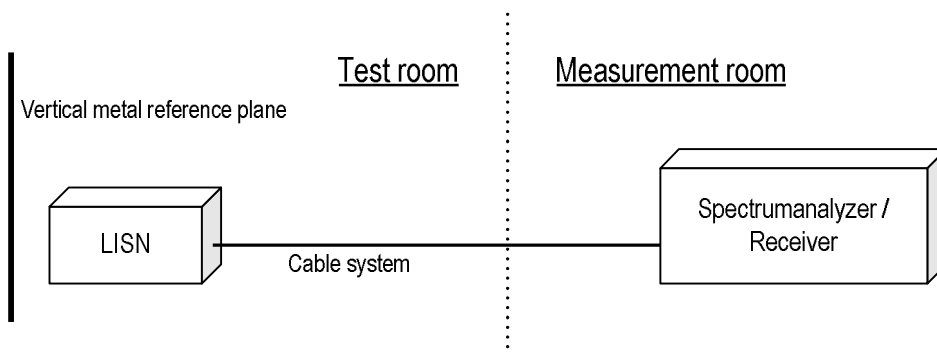





4.8.4 Test data


Date : 30-June-2023  
 Temperature : 23.5 [°C]  
 Humidity : 62.2 [%]  
 Test place : 3m Semi-anechoic chamber

Test engineer : Chiaki Kanno

[BT\_LE]

Company name : KYOCERA Corporation  
 EUT : Mobile Phone  
 Model No. : EB1157  
 Serial No. : N/A  
 Test mode : BT\_LE\_Tx\_1M

Standard : FCC Part 15 Subpart C  
 Operator : C.Kanno  
 Temp,Hum,Atm : 23.5 [°C], 62.2 [%]  
 Note1 :  
 Note2 :

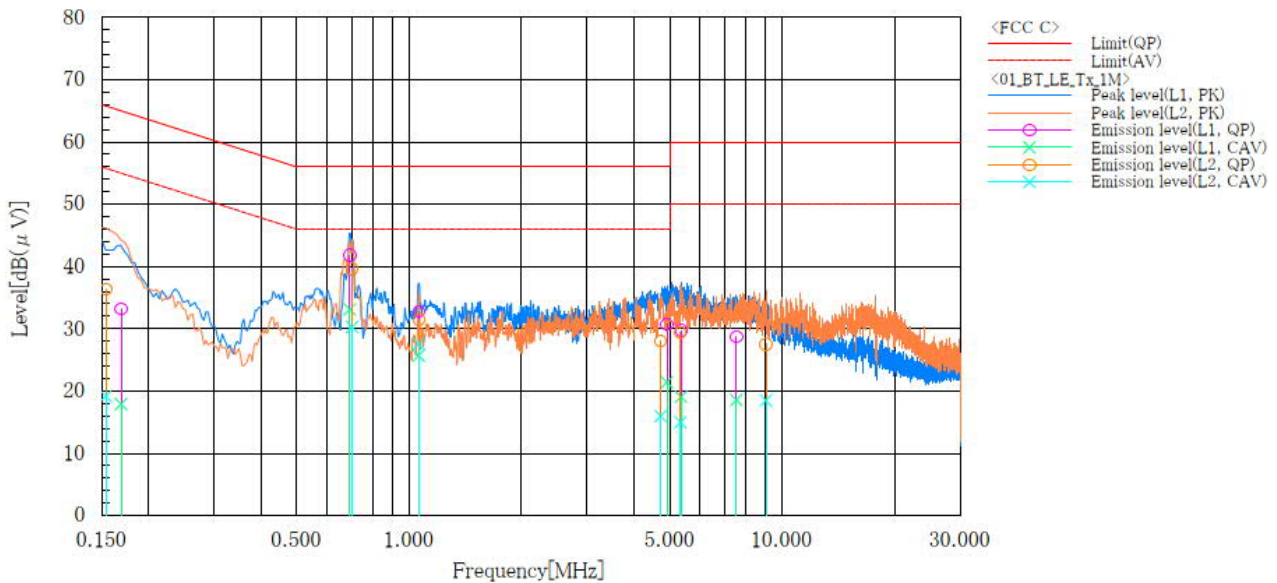

Final Result

--- L1 ---										
No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading CAV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result CAV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin CAV [dB]
1	0.169	22.7	7.4	10.5	33.2	17.9	65.0	55.0	31.8	37.1
2	0.693	31.5	22.8	10.3	41.8	33.1	56.0	46.0	14.2	12.9
3	1.062	22.4	15.3	10.4	32.8	25.7	56.0	46.0	23.2	20.3
4	4.906	20.0	10.7	10.7	30.7	21.4	56.0	46.0	25.3	24.6
5	5.358	19.0	8.4	10.7	29.7	19.1	60.0	50.0	30.3	30.9
6	7.544	17.8	7.7	10.9	28.7	18.6	60.0	50.0	31.3	31.4

--- L2 ---										
No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading CAV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result CAV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin CAV [dB]
1	0.154	25.9	8.7	10.5	36.4	19.2	65.8	55.8	29.4	36.6
2	0.704	29.3	20.0	10.3	39.6	30.3	56.0	46.0	16.4	15.7
3	1.062	21.2	17.3	10.3	31.5	27.6	56.0	46.0	24.5	18.4
4	4.729	17.3	5.3	10.7	28.0	16.0	56.0	46.0	28.0	30.0
5	5.343	18.7	4.3	10.7	29.4	15.0	60.0	50.0	30.6	35.0
6	9.051	16.5	7.5	11.0	27.5	18.5	60.0	50.0	32.5	31.5



Japan

## 5 Antenna requirement

According to FCC section 15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device. The antenna is a special antenna mounted inside of the EUT. Therefore, the EUT complies with the antenna requirement of FCC section 15.203.



## 6 Measurement Uncertainty

Expanded uncertainties stated are calculated with a coverage Factor k=2.  
 Please note that these results are not taken into account when measurement uncertainty considerations contained in ETSI TR 100 028 Parts 1 and 2 determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission, AMN (9 kHz – 150 kHz)	±3.7 dB
Conducted emission, AMN (150 kHz – 30 MHz)	±3.3 dB
Radiated emission ( 9kHz – 30 MHz)	±3.8 dB
Radiated emission (30 MHz – 1000 MHz)	±5.4 dB
Radiated emission (1 GHz – 6 GHz)	±4.6 dB
Radiated emission (6 GHz – 18 GHz)	±4.7 dB
Radiated emission (18 GHz – 40 GHz)	±6.4 dB
Radio Frequency	±1.3 * 10 <sup>-8</sup>
RF power, conducted	±0.7 dB
Adjacent channel power	±1.5 dB
Temperature	±0.6 °C
Humidity	±1.2 %
Voltage (DC)	±0.4 %
Voltage (AC, <10kHz)	±0.2 %

Judge	Measured value and standard limit value
PASS	<p><b>Case1</b></p> <p>Standard limit value</p> <p>+Uncertainty   -Uncertainty</p> <p>Measured value</p> <p>Even if it takes uncertainty into consideration, a standard limit value is fulfilled.</p>
	<p><b>Case2</b></p> <p>Although measured value is in a standard limit value, a limit value won't be fulfilled if uncertainty is taken into consideration.</p>
FAIL	<p><b>Case3</b></p> <p>Although measured value exceeds a standard limit value, a limit value will be fulfilled if uncertainty is taken into consideration.</p>
	<p><b>Case4</b></p> <p>Even if it takes uncertainty into consideration, a standard limit value isn't fulfilled.</p>





Japan

## 7 Laboratory Information

Testing was performed and the report was issued at:

**TÜV SÜD Japan Ltd. Yonezawa Testing Center**

Address: 5-4149-7 Hachimanpara, Yonezawa-shi, Yamagata, 992-1128 Japan  
Phone: +81-238-28-2881

**Accreditation and Registration**

A2LA

Certificate #3686.03

VLAC

Accreditation No.: VLAC-013

BSMI

Laboratory Code: SL2-IN-E-6018, SL2-A1-E-6018

Innovation, Science and Economic Development Canada

ISED#: 4224A

VCCI Council

Registration number: A-0166

## Appendix A. Test Equipment

### Antenna port conducted test

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
Spectrum analyzer	Agilent Technologies	E4440A	US44302655	30-Sep-2023	05-Sep-2022
Attenuator	HUBER+SUHNER	6810.19.A	N/A(S450)	31-Dec-2023	19-Dec-2022
Power meter	ROHDE&SCHWARZ	NRP2	103269	31-Mar-2024	13-Mar-2023
Power sensor	ROHDE&SCHWARZ	NRP-Z81	102467	31-Mar-2024	13-Mar-2023

### Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI receiver	ROHDE&SCHWARZ	ESW44	103171	30-Sep-2023	20-Sep-2022
Spectrum analyzer	ROHDE&SCHWARZ	FSV40	101731	31-Jul-2023	19-Jul-2022
Preamplifier	SONOMA	310	372170	30-Sep-2023	28-Sep-2022
Loop antenna	ROHDE&SCHWARZ	HFH2-Z2	100515	30-Apr-2024	21-Apr-2023
Attenuator	TOYO Connector	NA-PJ-6	N/A(S507)	31-Mar-2024	15-Mar-2023
Biconical antenna	Schwarzbeck	VHBB9124/BBA9106	1145	30-Jun-2023	28-Jun-2022
Log periodic antenna	Schwarzbeck	VUSLP9111B	346	30-Nov-2023	16-Nov-2022
Attenuator	TOYO Connector	NA-PJ-6/6dB	N/A(S541)	30-Sep-2023	28-Sep-2022
Attenuator	TAMAGAWA.ELEC	CFA-10/3dB	N/A(S503)	31-Jul-2023	14-Jul-2022
Preamplifier	TSJ	MLA-100M18-B02-40	1929118	31-Dec-2023	22-Dec-2022
Attenuator	AEROFLEX	26A-10	081217-08	31-Dec-2023	19-Dec-2022
Double ridged guide antenna	ETS LINDGREN	3117	00052315	30-Jun-2024	22-Jun-2023
Attenuator	HUBER+SUHNER	6803.17.B	N/A(2340)	31-Dec-2023	22-Dec-2022
Double ridged guide antenna	A.H.Systems Inc.	SAS-574	469	31-Aug-2023	19-Aug-2022
Preamplifier	TSJ	MLA-1840-B03-35	1240332	31-Aug-2023	19-Aug-2022
Notch Filter	Micro-Tronics	BRM50702	G433	30-Sep-2023	28-Sep-2022
Microwave cable	HUBER+SUHNER	SUCOFLEX104/9m	800690/4	31-Oct-2023	26-Oct-2022
		SUCOFLEX104/1m	my24610/4	31-Dec-2023	19-Dec-2022
		SUCOFLEX104/9m	2001099/4	31-Dec-2023	22-Dec-2022
		SUCOFLEX104/1m	MY32976/4	31-Dec-2023	22-Dec-2022
		SUCOFLEX104/2m	SN MY28404/4	31-Dec-2023	19-Dec-2022
		SUCOFLEX104/7m	41625/6	31-Dec-2023	22-Dec-2022
PC	DELL	OPTIPLEX9010	00186-228-073-851	N/A	N/A
Software	TOYO Technica	ES10/RE-AJ	Ver.2021.10.001	N/A	N/A
Absorber	RIKEN	PFP30	N/A	N/A	N/A
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-NSA)	31-May-2024	28-May-2023
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-SVSWR)	31-May-2024	28-May-2023

### Conducted emission at mains port


Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI receiver	ROHDE&SCHWARZ	ESW44	103171	30-Sep-2023	20-Sep-2022
Attenuator	HUBER+SUHNER	6810.01.A	N/A (S411)	31-Dec-2023	20-Dec-2022
Line impedance stabilization network	Kyoritsu Electrical Works, Ltd.	TNW-407F2	12-17-110-2	30-Jun-2024	22-Jun-2023
Microwave cable	HUBER+SUHNER	SUCOFLEX104/5m	MY33601/4	31-Oct-2023	27-Oct-2022
Microwave cable	HUBER+SUHNER	SUCOFLEX104/2m	MY37268/4	31-Oct-2023	27-Oct-2022
Coaxial cable	HUBER+SUHNER	RG214/U/10m	N/A (S194)	31-Dec-2023	22-Dec-2022
PC	DELL	OPTIPLEX9010	00186-228-073-851	N/A	N/A
Software	TOYO Technica	ES10/RE-AJ	Ver.2021.10.001	N/A	N/A

\*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.

## Appendix B. Duty Cycle


### [Plot & Calculation]

#### BT\_LE (1Mbps)

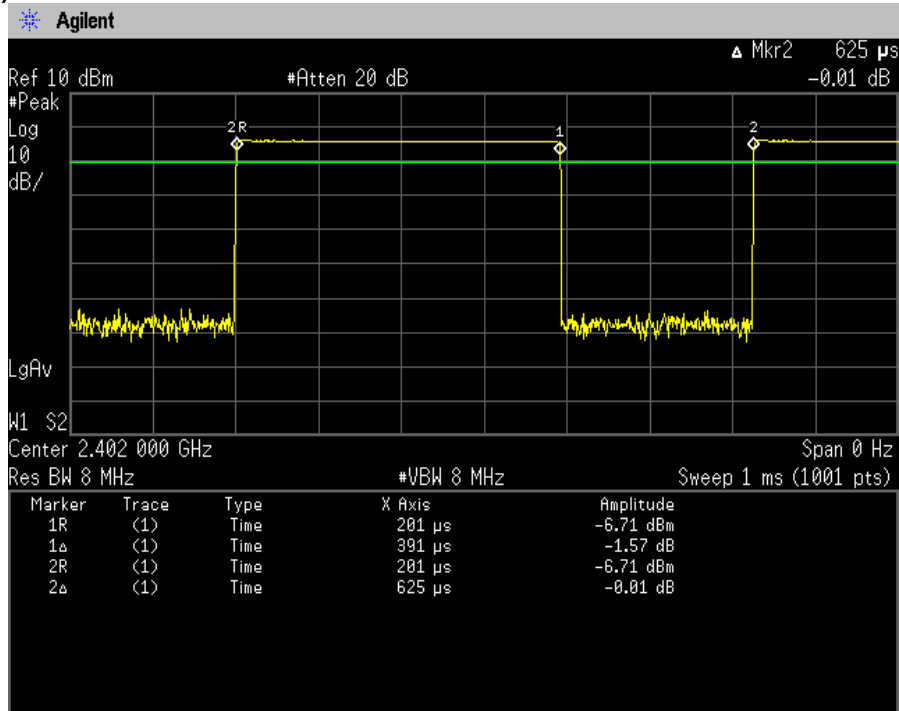

$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff}) = 391[\mu\text{s}] / (391[\mu\text{s}] + 234[\mu\text{s}]) = 62.56[\%]$$


#### BT\_LE (2Mbps)

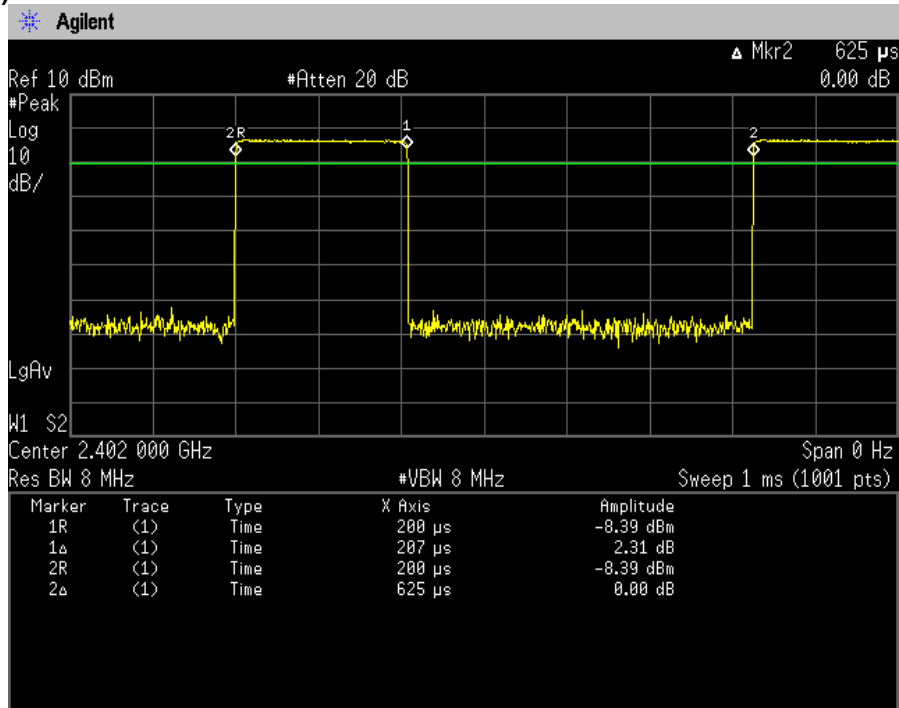

$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff}) = 207[\mu\text{s}] / (207[\mu\text{s}] + 418[\mu\text{s}]) = 33.12[\%]$$




**BT\_LE (LongRage S2)**

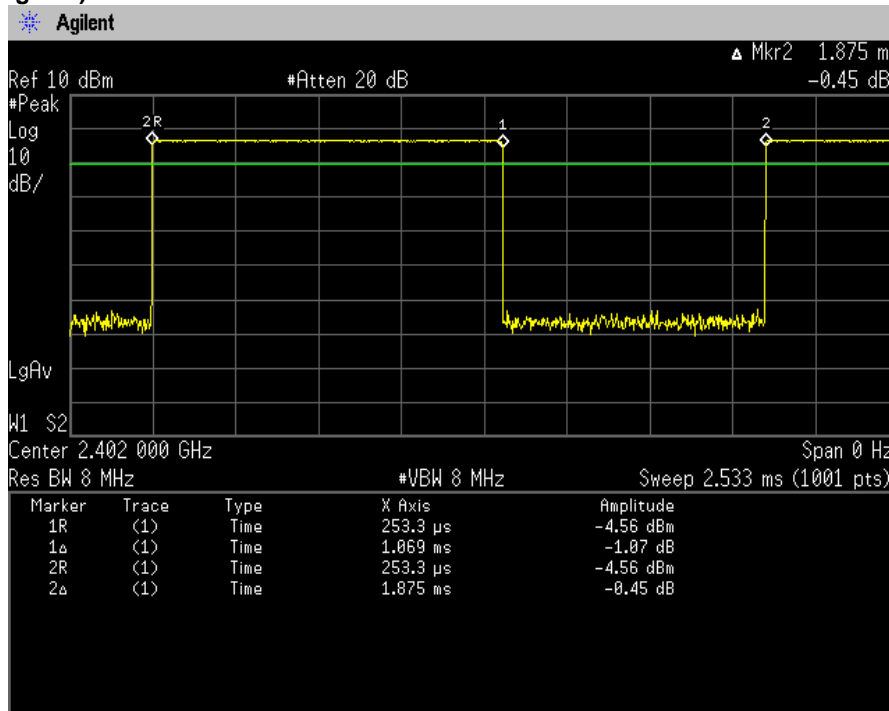

$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff}) = 1069[\mu\text{s}] / (1069[\mu\text{s}] + 806[\mu\text{s}]) = 57.01[\%]$$

**BT\_LE (LongRage S8)**

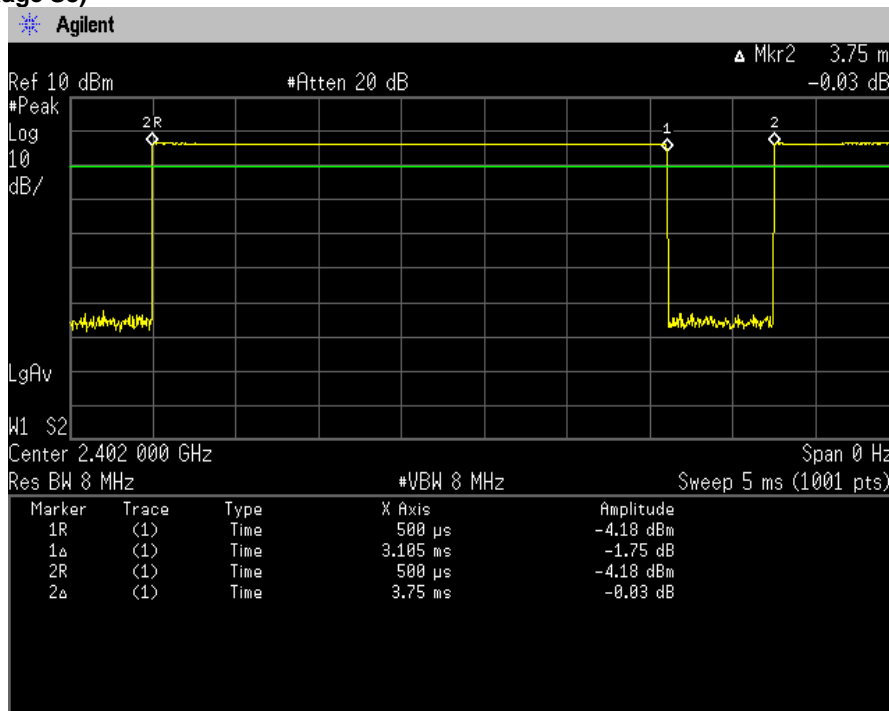

$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff}) = 3105[\mu\text{s}] / (3105[\mu\text{s}] + 645[\mu\text{s}]) = 82.8[\%]$$