



Zacta

TEST REPORT

Report number : Z101C-15077

Issue date : August 24, 2015

The device, as described herewith, was tested pursuant to applicable test procedure and complies with the requirements of;

FCC Part 22 Subpart H IC RSS-132

The test results are traceable to the international or national standards.

Applicant	: KYOCERA Corporation
Equipment under test (EUT)	: Module
Model number	: J79
FCC ID	: JOYJ79
IC Certification Number	: 574B-J79

Date of test : June 18, 19, 20, 24, 25, 30, July 3, 2015
 Test place : TÜV SÜD Zacta Ltd. Yonezawa Testing Center
 4149-7 Hachimanpara 5-chome
 Yonezawa-shi Yamagata 992-1128 Japan
 Phone: +81-238-28-2880 Fax: +81-238-28-2888
 Test results : Complied

The results in this report are applicable only to the equipment tested.
 This report shall not be re-produced except in full without the written approval of TÜV SÜD Zacta Ltd.
 This test report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Tested by : Taiki Watanabe
 Taiki Watanabe

Hikaru Shibata
 Hikaru Shibata

Authorized by : Hiroaki Suzuki
 Hiroaki Suzuki
 Manager of EMC Technical Department



Table of contents

	Page
1. Summary of Test	4
1.1 Purpose of test	4
1.2 Standards	4
1.3 List of applied test to the EUT	4
1.4 Modification to the EUT by laboratory	4
2. Equipment Under Test	5
2.1 General Description of equipment	5
2.2 EUT information	5
2.3 Variation of the family model(s)	6
2.4 Description of Test mode	6
3. Configuration of equipment	7
3.1 Equipment(s) used	7
3.2 Cable(s) used	7
3.3 System configuration	7
4. Conducted Output Power	8
4.1 Measurement procedure	8
4.2 Measurement result	8
5. Effective Radiated Power	11
5.1 Measurement procedure	11
5.2 Calculation method	11
5.3 Limit	11
5.4 Test data	12
6. Occupied Bandwidth	15
6.1 Measurement procedure	15
6.2 Limit	15
6.3 Measurement result	15
6.4 Trace data	17
7. Band Edge Spurious and Harmonic at Antenna Terminals	26
7.1 Measurement procedure	26
7.2 Limit	26
7.3 Measurement result	26
7.4 Trace data	28
8. Radiated Emissions and Harmonic Emissions	55
8.1 Measurement procedure	55
8.2 Calculation method	55
8.3 Limit	55
8.4 Test data	56
9. Frequency Stability	66
9.1 Measurement procedure	66
9.2 Limit	66
9.3 Measurement result	66
10. Uncertainty of measurement	69
11. Laboratory description	70



Zacta
71

Appendix A. Test equipment.....

1. Summary of Test

1.1 Purpose of test

It is the original test in order to verify conformance to FCC Part 22 Subpart H, IC RSS-132.

1.2 Standards

CFR47 FCC Part 22 Subpart H
IC RSS-132

1.2.1 Test Methods

KDB 971168 D01 Power Meas License Digital Systems v02r02
ANSI/TIA/EIA-603-D-2010

1.2.2 Deviation from standards

None

1.3 List of applied test to the EUT

FCC Section	IC Section	Test items	Condition	Result
2.1046	N/A	Conducted Output Power	Conducted	PASS
22.913(a)(2)	RSS-132 4.3	Effective Radiated Power	Radiated	PASS
22.917(a) 2.1049	N/A	Occupied Bandwidth	Conducted	PASS
22.917(a) 2.1051	RSS-132 4.5.1	Band Edge Spurious and Harmonic at Antenna Terminal	Conducted	PASS
22.917(a) 2.1053	RSS-132 4.5.1	Radiated emissions and Harmonic Emissions	Radiated	PASS
22.355 2.1055	RSS-132 4.3	Frequency Stability	Conducted	PASS

1.3.1 Test set up

Table-Top

1.4 Modification to the EUT by laboratory

None



Zacta

2. Equipment Under Test

2.1 General Description of equipment

EUT is the Module.

2.2 EUT information

Applicant	:	KYOCERA Corporation Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa, Japan Phone: +81-45-943-6253 Fax: +81-45-943-6314
Equipment under test	:	Module
Trade name	:	Kyocera
Model number	:	J79
Serial number	:	N/A
EUT condition	:	Pre-Production
Power ratings	:	DC 3.9V
Size	:	(W) 40.0 × (D) 40.0 × (H) 4.3 mm
Environment	:	Indoor and Outdoor use
Terminal limitation	:	-20°C to 60°C
RF Specification	:	
Frequency of Operation	:	Up Link WCDMA Band V: 826.4-846.6MHz LTE Band V: 824-849MHz
	:	Down Link WCDMA Band V: 871.4-891.6MHz LTE Band V: 869-894MHz
Modulation type	:	WCDMA Band V: QPSK, 16QAM LTE Band V: QPSK, 16QAM
Emission designator	:	WCDMA Band V: 4M17F9W LTE Band V: QPSK: 9M00G7D, 16QAM: 8M99W7D
Conducted Output power	:	WCDMA Band V: 0.221W (23.45dBm) LTE Band V: QPSK 0.167W (22.23dBm), 16QAM 0.134W (21.27dBm)
Antenna type	:	External antenna
Antenna gain	:	WCDMA Band V: 3.8Bi LTE Band V: 3.8dBi

2.3 Variation of the family model(s)

Not applicable

2.4 Description of Test mode

The EUT had been tested under operating condition.
There are three channels have been tested as following:

Band	Channel	Frequency
WCDMA Band V	4132	826.4MHz
	4183	836.6MHz
	4233	846.6MHz

Band	Modulation	Bandwidth	Channel	Frequency [MHz]
LTE Band V	QPSK	1.4MHz	20407	824.7
			20525	836.5
			20643	848.3
		3MHz	20415	825.5
			20525	836.5
			20635	847.5
	5MHz	20425	826.5	
		20525	836.5	
	10MHz	20625	846.5	
		20450	829.0	
	16QAM	1.4MHz	20525	836.5
			20600	844.0
			20643	848.3
		3MHz	20407	824.7
20525			836.5	
20635			847.5	
5MHz		20415	825.5	
		20525	836.5	
10MHz		20625	846.5	
		20450	829.0	

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in Y axis and the worst case recorded.

3. Configuration of equipment


3.1 Equipment(s) used

No.	Equipment	Company	Model No.	Serial No.	FCC ID / DoC	Comment
1	Module	KYOCERA	J79	N/A	JOYJ79	EUT
2	JOINT BOARD	KYOCERA	N/A	N/A	N/A	-
3	SHARK Antenna	YOKOWO	N/A	N/A	N/A	-
4	Whip Antenna	EAD	PTR7210	N/A	N/A	-
5	GPS Antenna	PASTERNAK	PE51066	N/A	N/A	-

3.2 Cable(s) used

No.	Cable	Length[m]	Shield	Connector	Comment
a	RF cable (MAIN)	0.3	YES	Metal	-
b	RF cable (SUB)	0.3	YES	Metal	-
c	GPS Antenna cable	5.0	YES	Metal	-
d	DC cable	1.3	NO	Plastic	-
e	RF cable	0.9	YES	Metal	-

3.3 System configuration

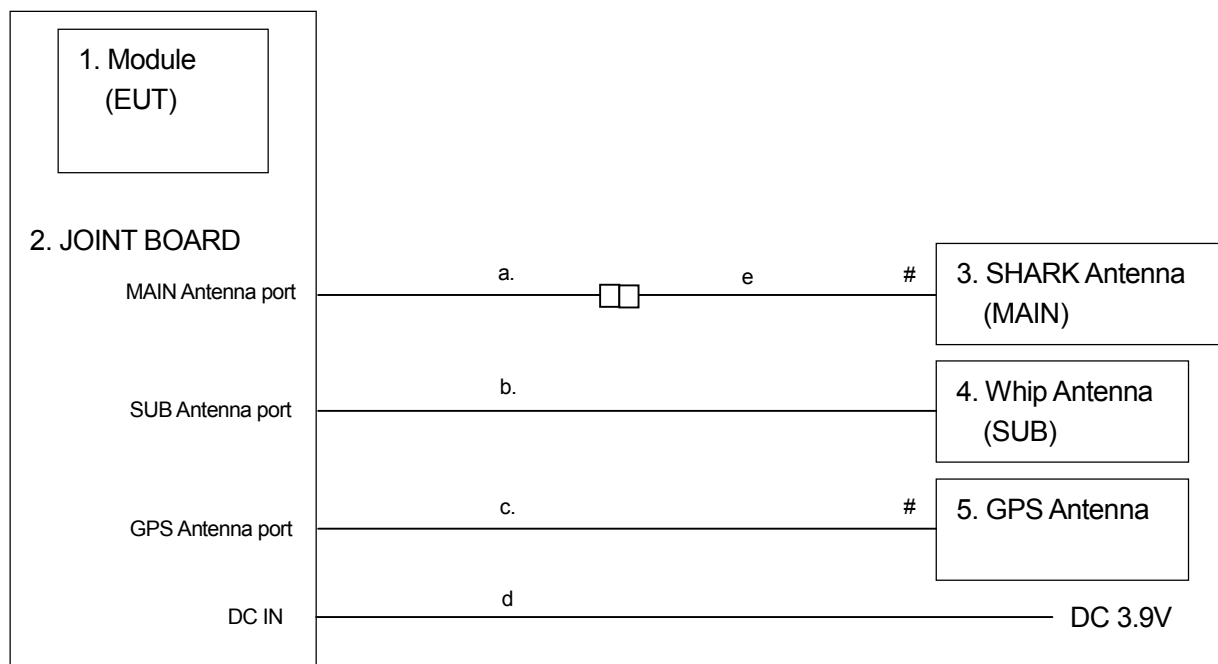

: Un-detachable cable

 : Connector


Note1: Numbers assigned to equipment or cables on this diagram correspond to the list in "3.1 Equipment(s) used" and "3.2 Cable(s) used".

4. Conducted Output Power

4.1 Measurement procedure [FCC 2.1046]

The conducted output power was measured with a wireless communication tester connected to the antenna terminal. The wireless communication tester parameters were set to produce the maximum power from the EUT.

- Test configuration

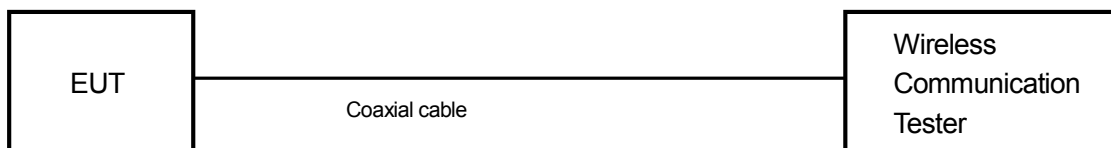

4.2 Measurement result

Date : June 17, 2015
 Temperature : 25.7 [°C]
 Humidity : 54.5 [%]
 Test place : Shielded room No.4

Test engineer : Hikaru Shibata

3GPP Release Version	Mode		Sub- Test	Power [dBm]			MPR	Bc	βd	Bc/βd
	Channel			4132	4183	4233				
	Frequency [MHz]			826.4	836.6	846.6				
99	W-CDMA	RMC	-	23.41	23.31	23.45	-	-	-	-
		AMR	-	-	-	-	-	-	-	-
5	HSDPA (Cellular)		1	22.07	21.86	22.06	0	2/15	15/15	2/15
5			2	22.03	21.93	22.04	0	12/15	15/15	12/15
5			3	22.06	21.87	22.05	0.5	15/15	8/15	15/8
5			4	22.06	21.94	22.04	0.5	15/15	4/15	15/4
6	HSUPA		1	22.05	22.07	21.99	0	11/15	15/15	11/15
6			2	21.22	20.83	21.20	2	6/15	15/15	6/15
6			3	21.35	20.91	21.09	1	15/15	9/15	15/9
6			4	21.43	21.22	21.38	2	2/15	15/15	2/15
6			5	22.46	22.36	22.44	0	15/15	15/15	15/15

Band	BW [MHz]	Mode	RB Allocation	RB offset	Target MPR	Avg Power[dBm]		
						20407	20525	20643
						824.7 MHz	836.5 MHz	848.3 MHz
LTE Band 5	1.4	QPSK	1	0	0	22.19	22.13	22.18
			1	3	0	22.14	22.08	22.08
			1	5	0	22.05	22.06	22.05
			3	0	0	22.18	22.10	22.07
			3	1	0	22.16	22.10	22.06
			3	3	0	22.09	22.09	22.05
			6	0	1	21.31	21.24	21.14
		16QAM	1	0	1	21.25	21.05	20.93
			1	3	1	21.27	21.05	20.93
			1	5	1	21.17	21.04	20.87
			3	0	1	21.13	21.20	21.06
			3	1	1	21.17	21.15	21.05
			3	3	1	21.11	21.13	21.00
			6	0	2	20.27	20.23	20.10

Band	BW [MHz]	Mode	RB Allocation	RB offset	Target MPR	Avg Power[dBm]		
						20415	20525	20635
						825.5 MHz	836.5 MHz	847.5 MHz
LTE Band 5	3	QPSK	1	0	0	22.06	22.18	22.23
			1	8	0	22.05	22.16	22.14
			1	14	0	22.03	22.15	22.09
			8	0	1	21.29	21.16	21.18
			8	4	1	21.20	21.24	21.07
			8	7	1	21.27	21.17	21.13
			15	0	1	21.20	21.18	21.07
		16QAM	1	0	1	20.92	21.10	21.18
			1	8	1	20.86	21.09	21.06
			1	14	1	20.81	21.15	21.07
			8	0	2	20.27	20.26	20.26
			8	4	2	20.21	20.31	20.18
			8	7	2	20.23	20.29	20.16
			15	0	2	20.20	20.27	20.22

Band	BW [MHz]	Mode	RB Allocation	RB offset	Target MPR	Avg Power[dBm]		
						20425	20525	20625
						826.5 MHz	836.5 MHz	846.5 MHz
LTE Band 5	5	QPSK	1	0	0	22.15	22.09	22.23
			1	12	0	22.06	22.08	22.25
			1	24	0	22.18	22.13	22.13
			12	0	1	21.23	21.18	21.26
			12	7	1	21.26	21.22	21.22
			12	13	1	21.32	21.27	21.12
		25	0	1	21.29	21.22	21.29	
		16QAM	1	0	1	21.22	20.88	21.23
			1	12	1	21.01	20.93	21.31
			1	24	1	21.07	20.95	21.13
			12	0	2	20.22	20.25	20.30
			12	7	2	20.31	20.20	20.33
			12	13	2	20.36	20.27	20.22
			25	0	2	20.29	20.26	20.31

Band	BW [MHz]	Mode	RB Allocation	RB offset	Target MPR	Avg Power[dBm]		
						20450	20525	20600
						829.0 MHz	836.5 MHz	844.0 MHz
LTE Band 5	10	QPSK	1	0	0	22.16	22.19	22.13
			1	25	0	22.12	22.12	22.16
			1	49	0	22.09	22.18	22.11
			25	0	1	21.16	21.15	21.21
			25	12	1	21.16	21.13	21.25
			25	25	1	21.17	21.17	21.21
		50	0	1	21.07	21.10	21.22	
		16QAM	1	0	1	20.97	21.08	21.18
			1	25	1	20.87	21.05	21.14
			1	49	1	20.82	21.19	21.05
			25	0	2	20.24	20.26	20.29
			25	12	2	20.19	20.24	20.25
			25	25	2	20.19	20.23	20.23
			50	0	2	20.08	20.14	20.23

5. Effective Radiated Power

5.1 Measurement procedure

[FCC 22.913(a), IC RSS-132 4.4]

<Step 1>

The EUT and support equipment are placed on a 1 meter x 1.5 meter surface, 0.8 meter height FRP table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission. The bandwidth of the spectrum analyzer is set to 1MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission.


<Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT). The frequency of the signal generator is adjusted to the measurement frequency. Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

Spectrum analyzer setting

- Detector: Peak, RBW: 5MHz, VBW: 8MHz

- Test configuration

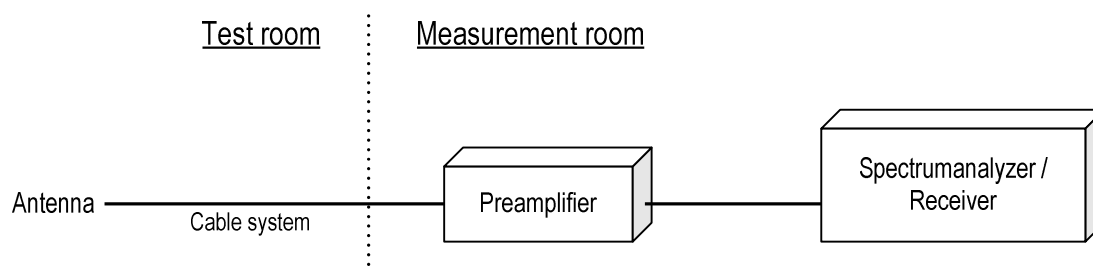

5.2 Calculation method

Result (ERP) = S.G Reading – Cable loss + Antenna Gain

Margin = Limit – Result (ERP)

Example:

Limit @ 836.6MHz : 38.4dBm

S.G Reading = 28.6dBm Cable loss = 0.7dB Ant. Gain = -10.7dBd

Result = 28.6 - 0.7 + (-10.7) = 17.2dBm

Margin = 38.4 - 17.2 = 21.2dB

5.3 Limit

7 W (38.4dBm)



Zacta

5.4 Test data

Date : June 30, 2015
 Temperature : 24.2 [°C]
 Humidity : 59.4 [%]
 Test place : 3m Semi-anechoic chamber

Test engineer :

Hikaru Shibata

Date : July 3, 2015
 Temperature : 24.8 [°C]
 Humidity : 63.6 [%]
 Test place : 3m Semi-anechoic chamber

Test engineer :

Hikaru Shibata

[WCDMA Band V]

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	826.4	-9.5	30.5	0.7	-10.7	19.1	38.4	19.3
H	836.6	-11.4	28.6	0.7	-10.7	17.2	38.4	21.2
H	846.6	-10.8	29.2	0.8	-10.7	17.8	38.4	20.6



Zacta

Date : June 18, 2015
 Temperature : 24.8 [°C]
 Humidity : 54.3 [%]
 Test place : 3m Semi-anechoic chamber

Test engineer :
 Taiki Watanabe

Date : July 3, 2015
 Temperature : 24.8 [°C]
 Humidity : 63.6 [%]
 Test place : 3m Semi-anechoic chamber

Test engineer :
 Hikaru Shibata

[LTE Band V] QPSK, BW 1.4MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
V	824.7	-13.5	31.9	0.7	-10.7	20.5	38.4	17.9
V	836.5	-12.5	33.0	0.7	-10.7	21.6	38.4	16.8
V	848.3	-12.4	31.3	0.8	-10.7	19.9	38.4	18.5

QPSK, BW 3MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
V	825.5	-13.7	31.7	0.7	-10.7	20.3	38.4	18.1
V	836.5	-13.3	32.2	0.7	-10.7	20.8	38.4	17.6
V	847.5	-13.1	30.6	0.8	-10.7	19.2	38.4	19.2

QPSK, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
V	826.5	-14.0	31.4	0.7	-10.7	20.0	38.4	18.4
V	836.5	-12.5	33.0	0.7	-10.7	21.6	38.4	16.8
V	846.5	-14.3	29.4	0.8	-10.7	18.0	38.4	20.4

QPSK, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
V	829.0	-12.9	32.5	0.7	-10.7	21.1	38.4	17.3
V	836.5	-13.0	32.5	0.7	-10.7	21.1	38.4	17.3
V	844.0	-13.8	29.9	0.7	-10.7	18.5	38.4	19.9

16QAM, BW 1.4MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
V	824.7	-13.9	31.5	0.7	-10.7	20.1	38.4	18.3
V	836.5	-14.3	31.2	0.7	-10.7	19.8	38.4	18.6
V	848.3	-12.4	31.3	0.8	-10.7	19.9	38.4	18.5

16QAM, BW 3MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
V	825.5	-13.1	32.3	0.7	-10.7	20.9	38.4	17.5
V	836.5	-13.2	32.3	0.7	-10.7	20.9	38.4	17.5
V	847.5	-12.8	30.9	0.8	-10.7	19.5	38.4	18.9

16QAM, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
V	826.5	-13.0	32.4	0.7	-10.7	21.0	38.4	17.4
V	836.5	-13.0	32.5	0.7	-10.7	21.1	38.4	17.3
V	846.5	-14.3	29.4	0.8	-10.7	18.0	38.4	20.4

16QAM, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
V	829.0	-13.0	32.4	0.7	-10.7	21.0	38.4	17.4
V	836.5	-14.4	31.1	0.7	-10.7	19.7	38.4	18.7
V	844.0	-13.1	30.6	0.7	-10.7	19.2	38.4	19.2

6. Occupied Bandwidth

6.1 Measurement procedure


[FCC 22.917(a), 2.1049]

The Occupied bandwidth was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;

- RBW=51kHz, VBW=150kHz, Span=10MHz, Sweep=auto, Detector=Peak, Trace mode=Max hold
- RBW=30kHz, VBW=91kHz, Span=3MHz, Sweep=auto, Detector=Peak, Trace mode=Max hold
- RBW=62kHz, VBW=180kHz, Span=6MHz, Sweep=auto, Detector=Peak, Trace mode=Max hold
- RBW=100kHz, VBW=300kHz, Span=10MHz, Sweep=auto, Detector=Peak, Trace mode=Max hold
- RBW=200kHz, VBW=620kHz, Span=20MHz, Sweep=auto, Detector=Peak, Trace mode=Max hold

- Test configuration

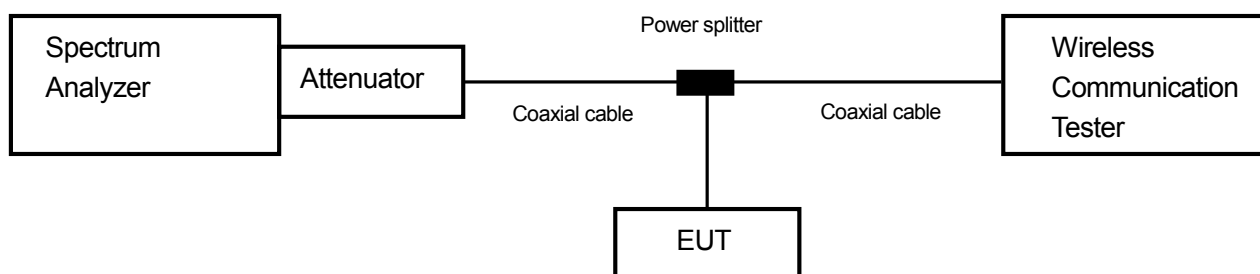

6.2 Limit

None

6.3 Measurement result

Date : June 18, 2015
 Temperature : 25.9 [°C]
 Humidity : 54.8 [%]
 Test place : Shielded room No.4


Test engineer : Hikaru Shibata

Band	Channel	Frequency (MHz)	Test Result (MHz)
W-CDMA850	4132	826.4	4.1695
	4183	836.6	4.1577
	4233	846.6	4.1638


[LTE Band V]

BW	Mode	UL RB Allocation	UL RB Start	Frequency [MHz]	26dB Bandwidth [MHz]	99% OBW [MHz]
1.4MHz	QPSK	1	0	836.5	0.418	0.2768
		1	5		0.437	0.2855
		3	1		0.925	0.6150
		6	0		1.347	1.1041
1.4MHz	16QAM	1	0	836.5	0.425	0.2744
		1	5		0.424	0.2834
		3	1		0.934	0.6258
		6	0		1.334	1.1071
3MHz	QPSK	1	0	836.5	0.528	0.3681
		1	14		0.518	0.3542
		8	4		2.183	1.5541
		15	0		3.109	2.7159
3MHz	16QAM	1	0	836.5	0.513	0.3633
		1	14		0.514	0.3613
		8	4		2.135	1.5587
		15	0		3.093	2.7198
5MHz	QPSK	1	0	836.5	0.740	0.5055
		1	24		0.753	0.5133
		12	7		3.326	2.3078
		25	0		5.058	4.5319
5MHz	16QAM	1	0	836.5	0.699	0.4792
		1	24		0.707	0.4987
		12	7		3.333	2.3477
		25	0		5.101	4.5252
10MHz	QPSK	1	0	836.5	1.016	0.7370
		1	49		1.044	0.7482
		25	12		6.490	4.7411
		50	0		10.082	9.0026
10MHz	16QAM	1	0	836.5	0.998	0.7250
		1	49		1.039	0.7579
		25	12		7.039	4.7659
		50	0		9.910	8.9920


6.4 Trace data
[WCDMA Band V]
Channel: 4132

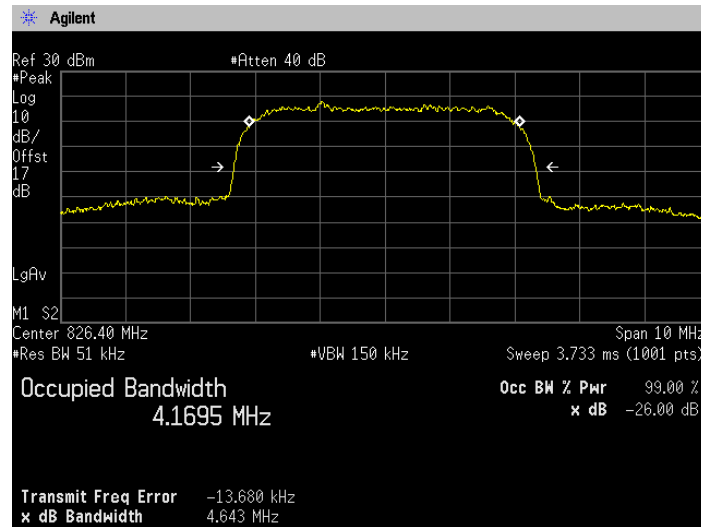

Channel: 4183

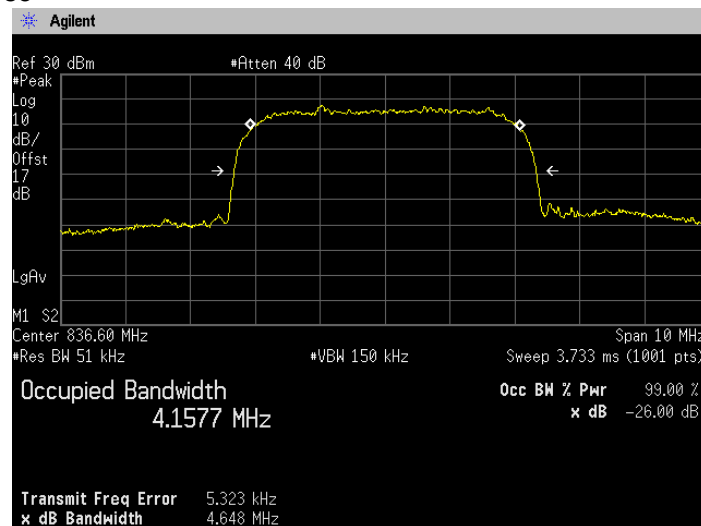


Channel: 4233

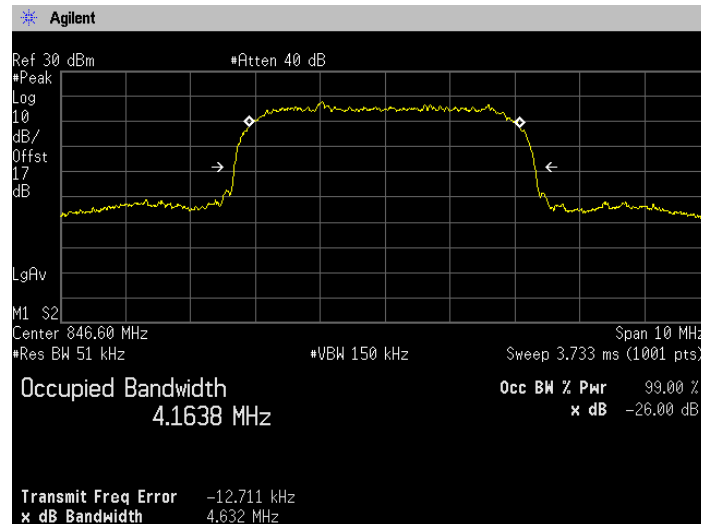




Zacta


**[LTE Band V]
Channel: 20525
QPSK, BW 1.4MHz, RB1-0**

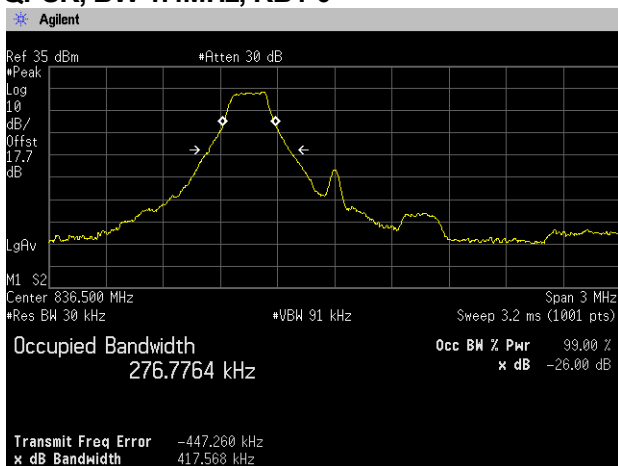


RB1-5

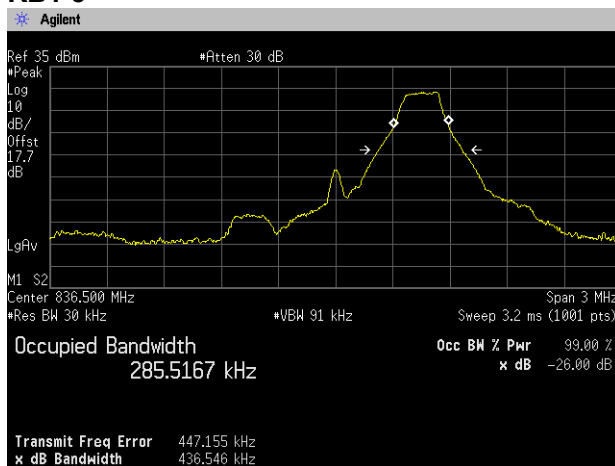

QPSK, BW 1.4MHz, RB3-1

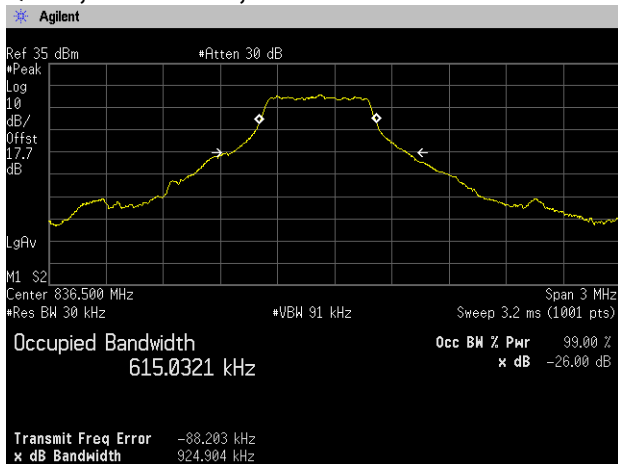


RB6-0

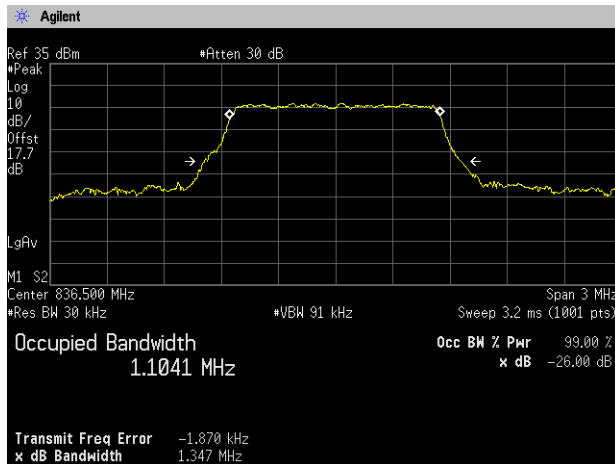




Zacta


16QAM, BW 1.4MHz, RB1-0

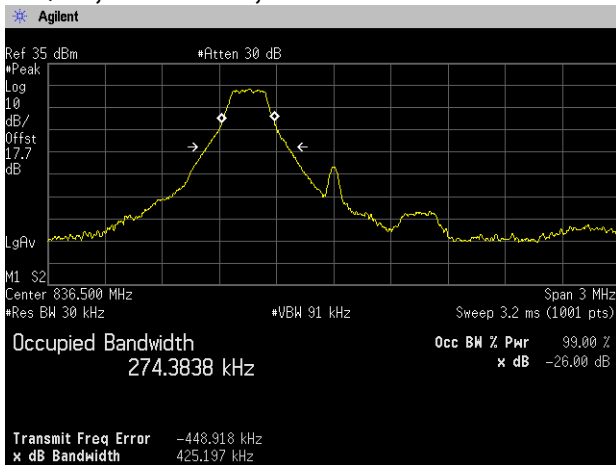


RB1-5

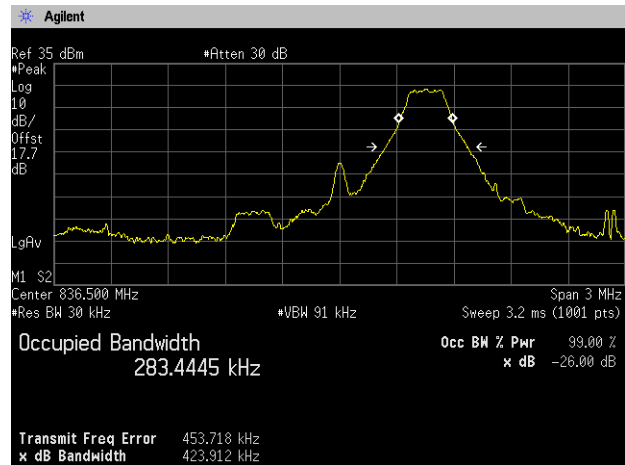

16QAM, BW 1.4MHz, RB3-1

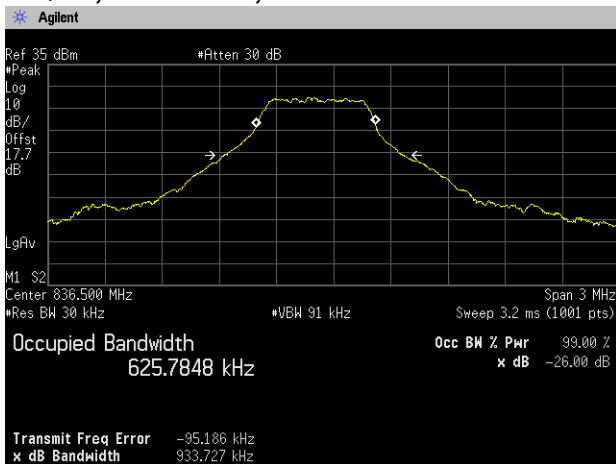


RB6-0

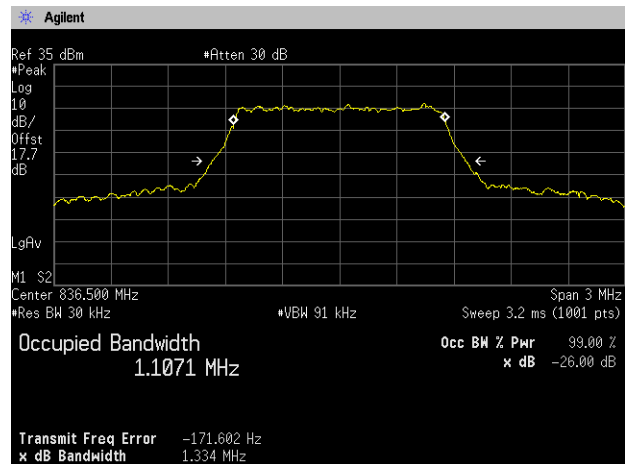




Zacta


QPSK, BW 3MHz, RB1-0

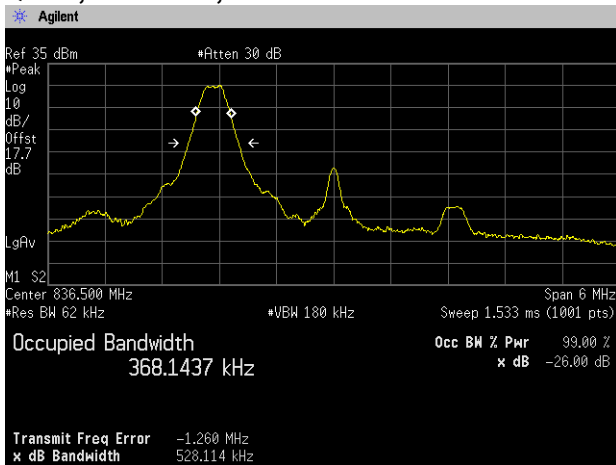


RB1-14

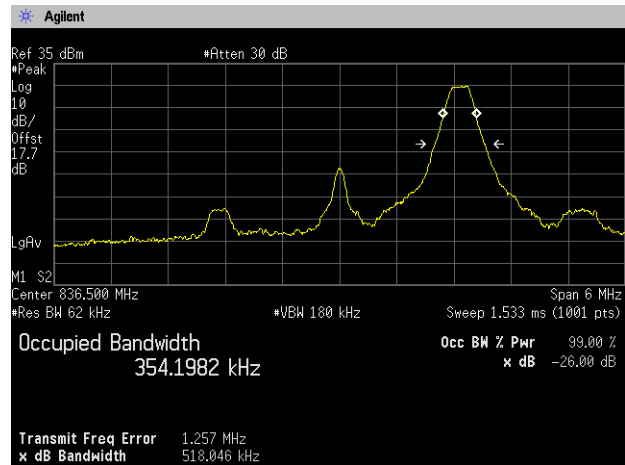

QPSK, BW 3MHz, RB8-4

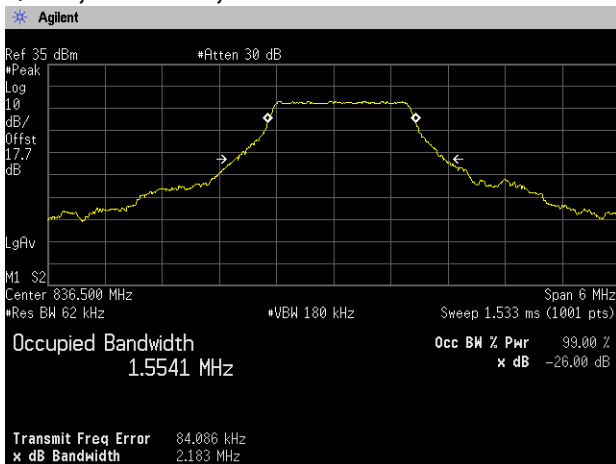


RB15-0

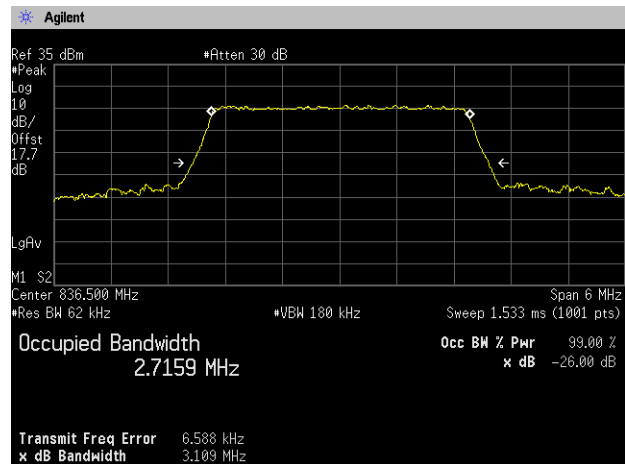




Zacta


16QAM, BW 3MHz, RB1-0

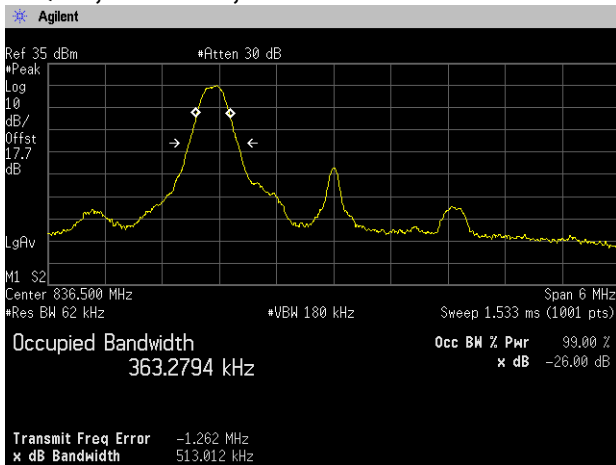


RB1-14

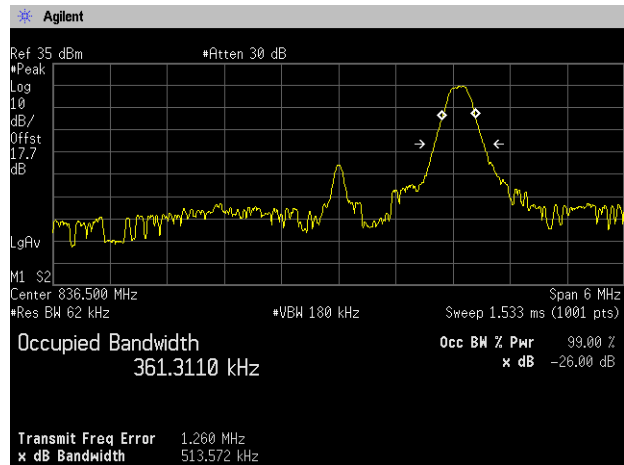

16QAM, BW 3MHz, RB8-4

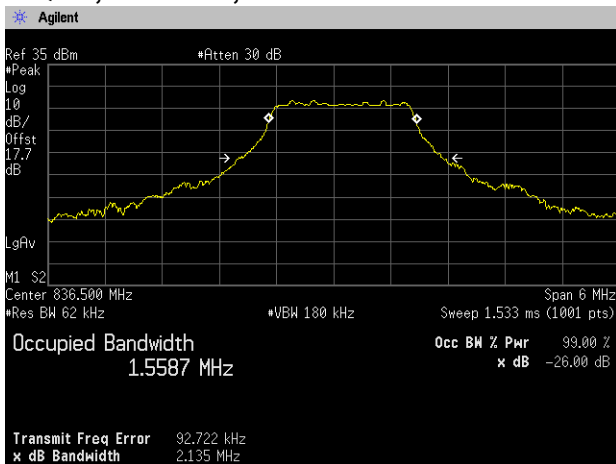


RB15-0

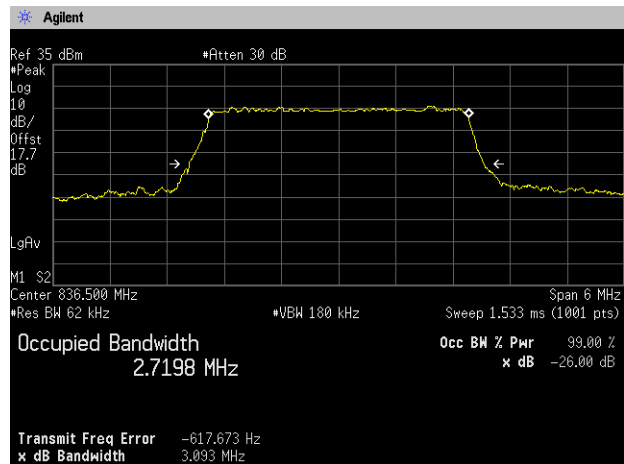




Zacta


QPSK, BW 5MHz, RB1-0

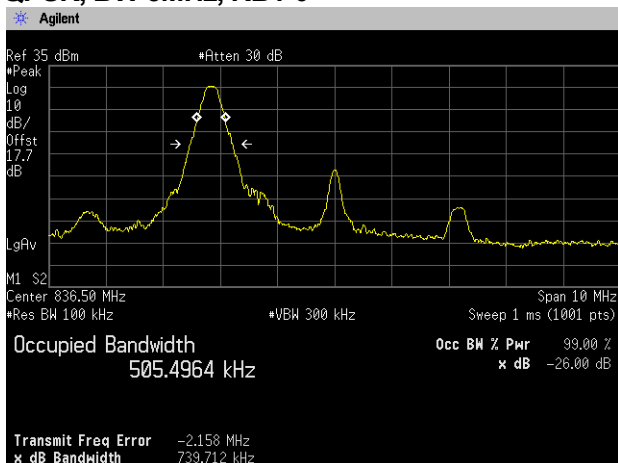


RB1-24

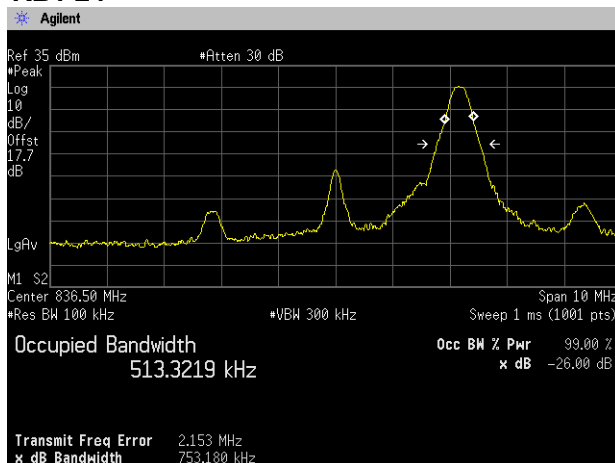

QPSK, BW 5MHz, RB12-7

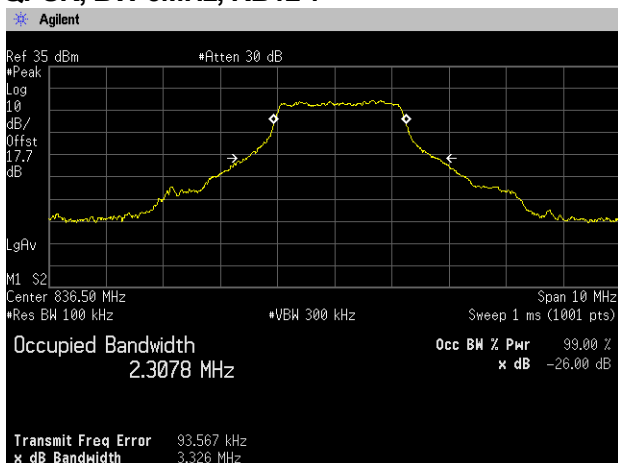


RB25-0

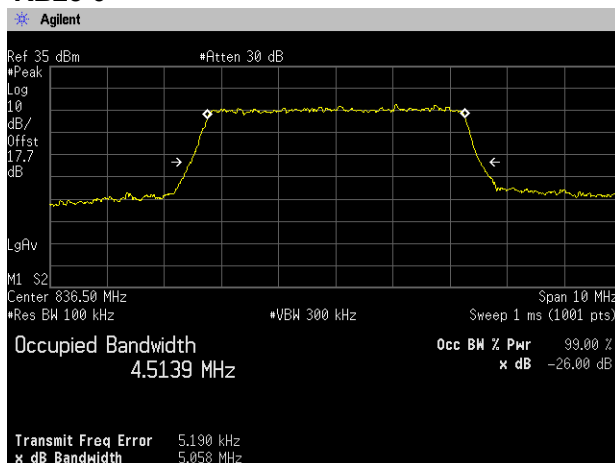




Zacta


16QAM, BW 5MHz, RB1-0

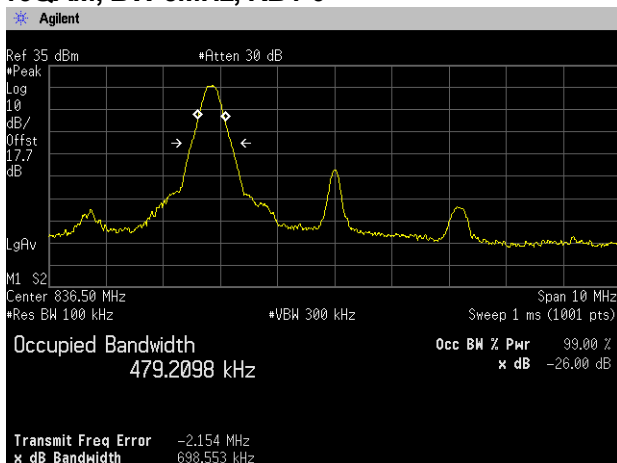


RB1-24

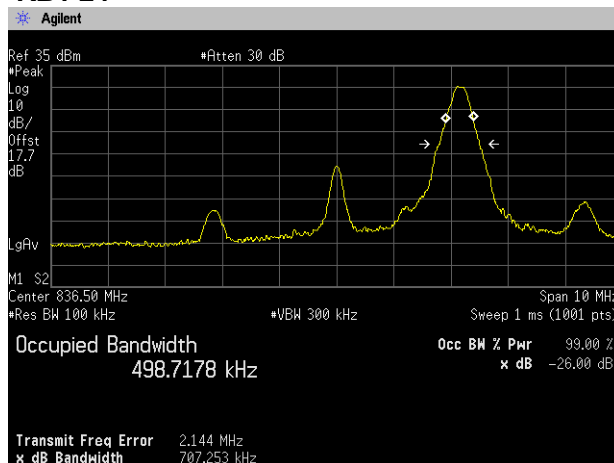

16QAM, BW 5MHz, RB12-7

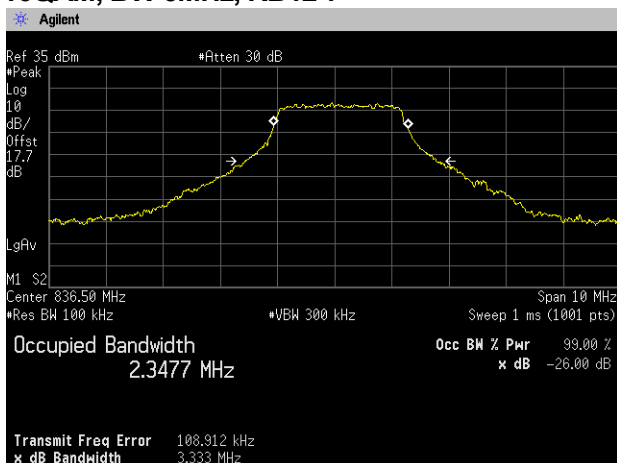


RB25-0

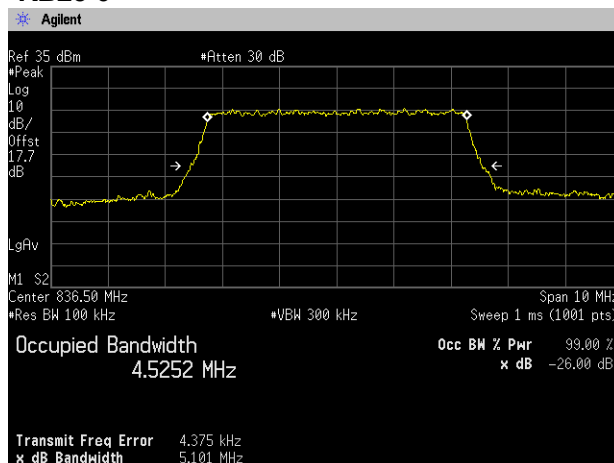




Zacta


QPSK, BW 10MHz, RB1-0

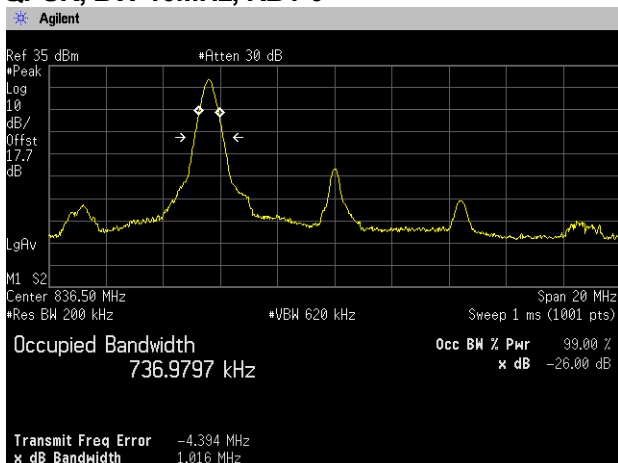


RB1-49

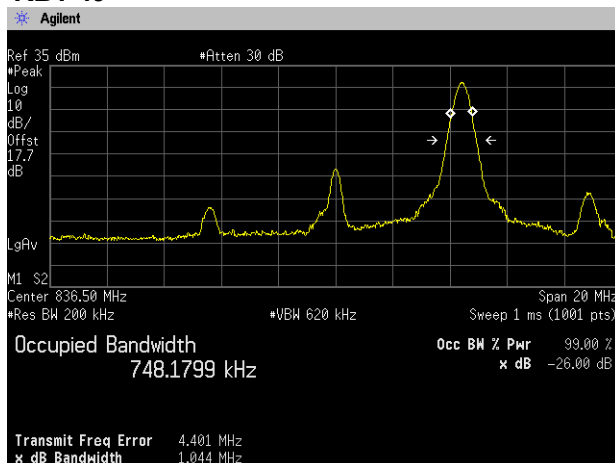

QPSK, BW 10MHz, RB25-12

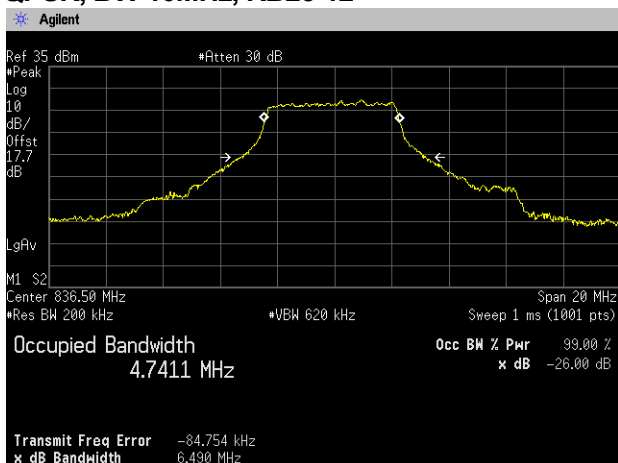


RB50-0

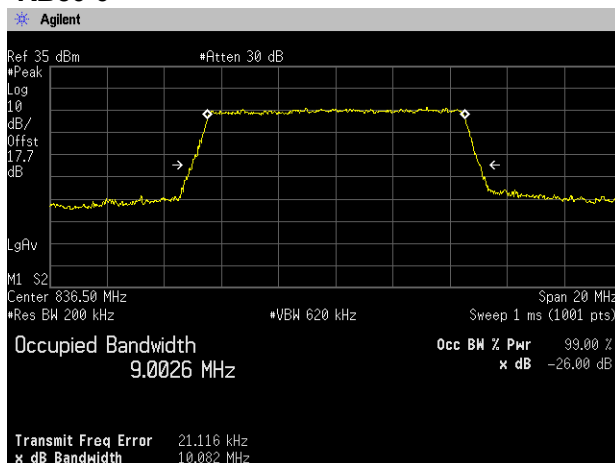




Zacta


16QAM, BW 10MHz, RB1-0

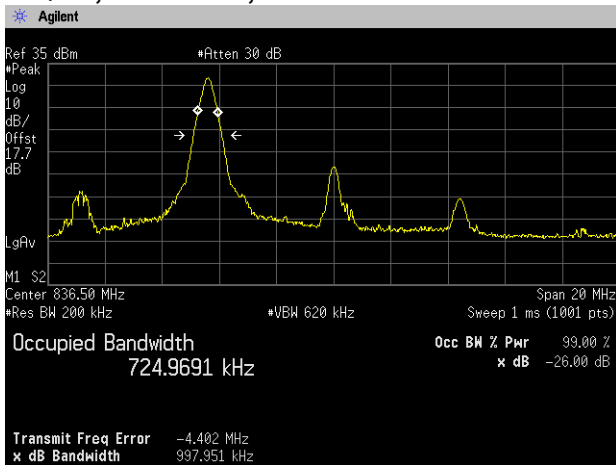


RB1-49

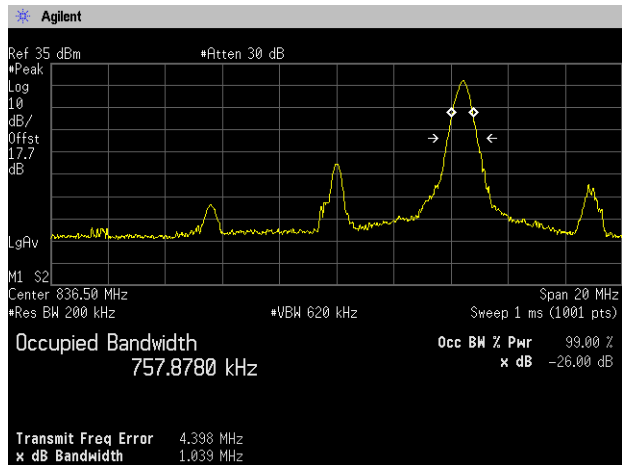

16QAM, BW 10MHz, RB25-12

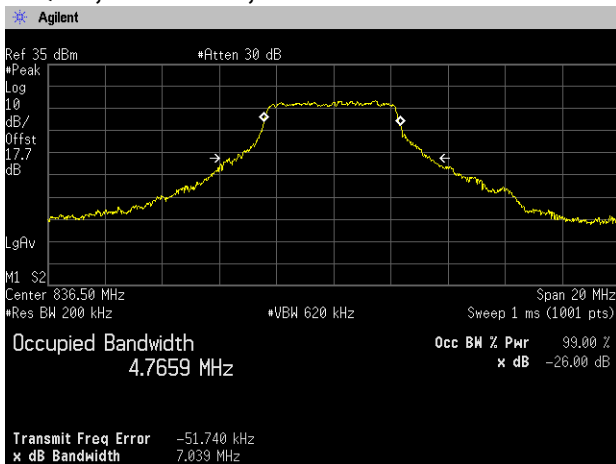

RB50-0

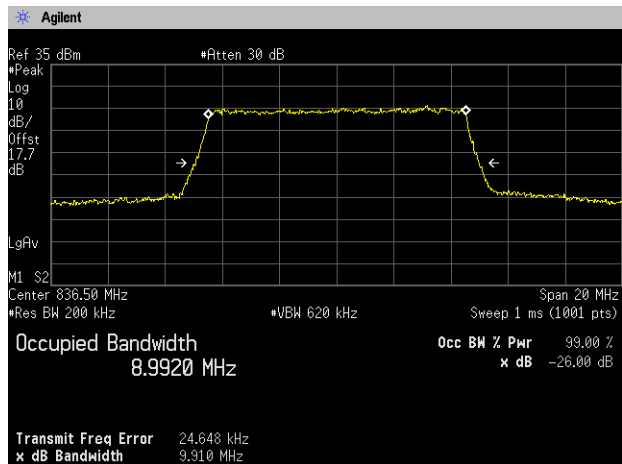

7. Band Edge Spurious and Harmonic at Antenna Terminals

7.1 Measurement procedure

[FCC 22.917(a), 2.1051, IC RSS-132 4.5.1]

The band edge spurious and harmonic was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;


<Band Edge>

- RBW=51kHz, VBW=150kHz, Span=10MHz, Sweep=auto, Detector=Average, Trace mode=Max hold
- RBW=20kHz, VBW=62kHz, Span=2.8MHz, Sweep=auto, Detector=Average, Trace mode=Max hold
- RBW=43kHz, VBW=130kHz, Span=6MHz, Sweep=auto, Detector=Average, Trace mode=Max hold
- RBW=75kHz, VBW=220kHz, Span=10MHz, Sweep=auto, Detector=Average, Trace mode=Max hold
- RBW=150kHz, VBW=430kHz, Span=20MHz, Sweep=auto, Detector=Average, Trace mode=Max hold

<Spurious Emissions>

- RBW=1MHz, VBW=3MHz, Span=Arbitrary setting, Sweep=auto, Detector=Peak, Trace mode=Max hold

- Test configuration

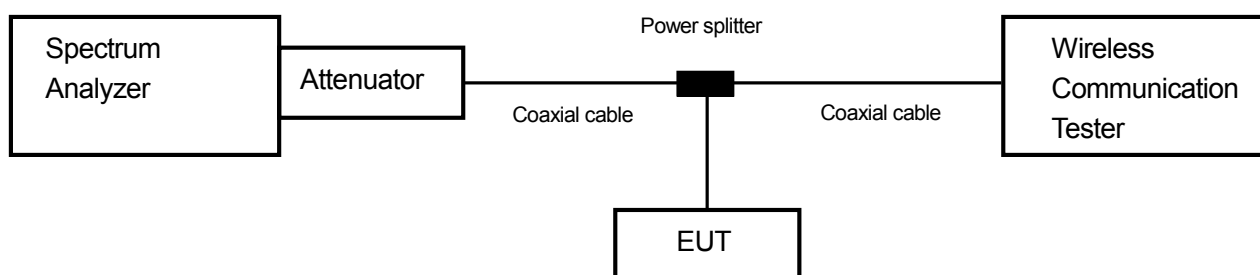

7.2 Limit

-13dBm or less

7.3 Measurement result

Date : June 18, 2015

Temperature : 25.9 [°C]

Humidity : 54.8 [%]

Test place : Shielded room No.4

Test engineer :

Hikaru Shibata

Band	Channel	Frequency [MHz]	Limit [dB]	Results	
WCDMA Band V	4132	826.4	-13.0	See the trace data	PASS
	4183	836.6	-13.0	See the trace data	PASS
	4233	846.6	-13.0	See the trace data	PASS



Zacta



Band	Modulation	Bandwidth	Limit [dB]	Results	
LTE Band V	QPSK	1.4MHz	-13.0	See the trace data	PASS
		3MHz	-13.0	See the trace data	PASS
		5MHz	-13.0	See the trace data	PASS
		10MHz	-13.0	See the trace data	PASS
	16QAM	1.4MHz	-13.0	See the trace data	PASS
		3MHz	-13.0	See the trace data	PASS
		5MHz	-13.0	See the trace data	PASS
		10MHz	-13.0	See the trace data	PASS



Zacta

7.4 Trace data
[WCDMA Band V]
(Band Edge)



Channel: 4132

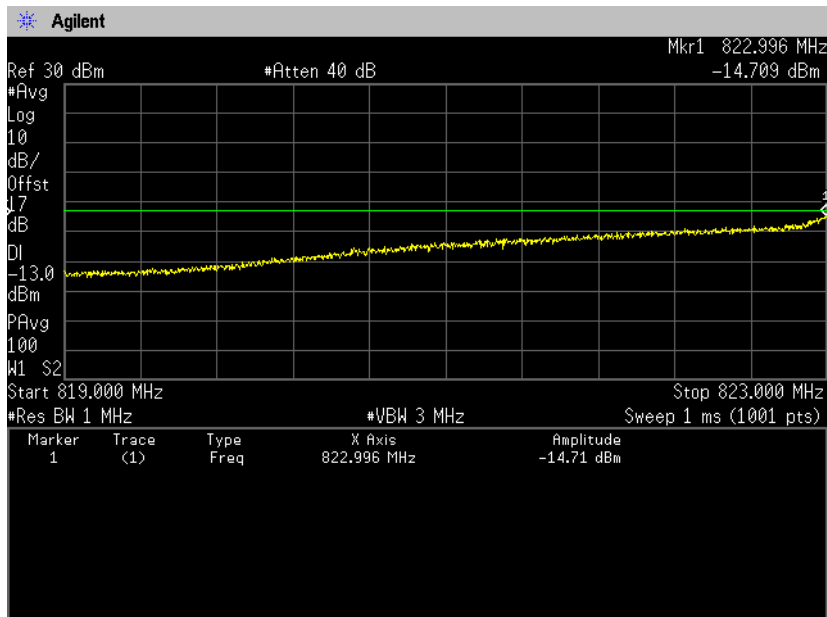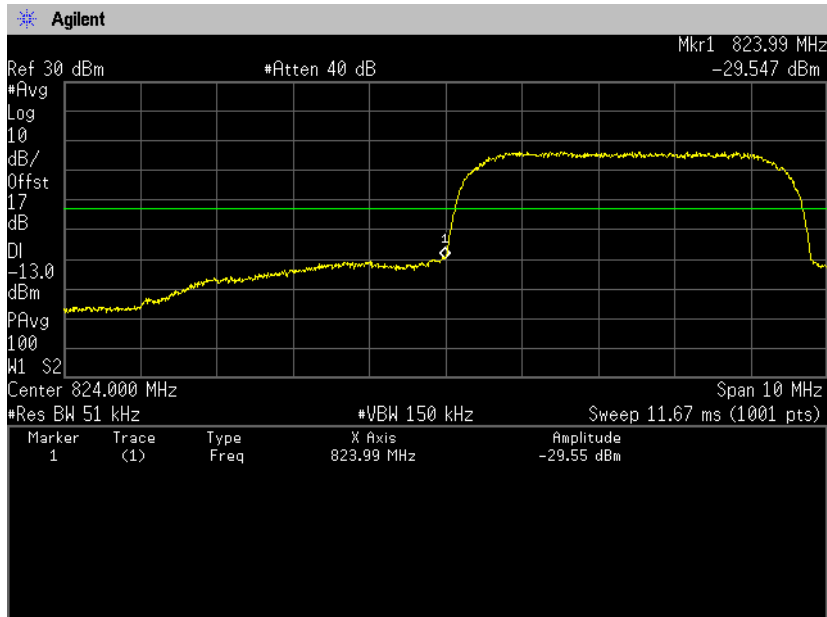



Zacta


Channel: 4233

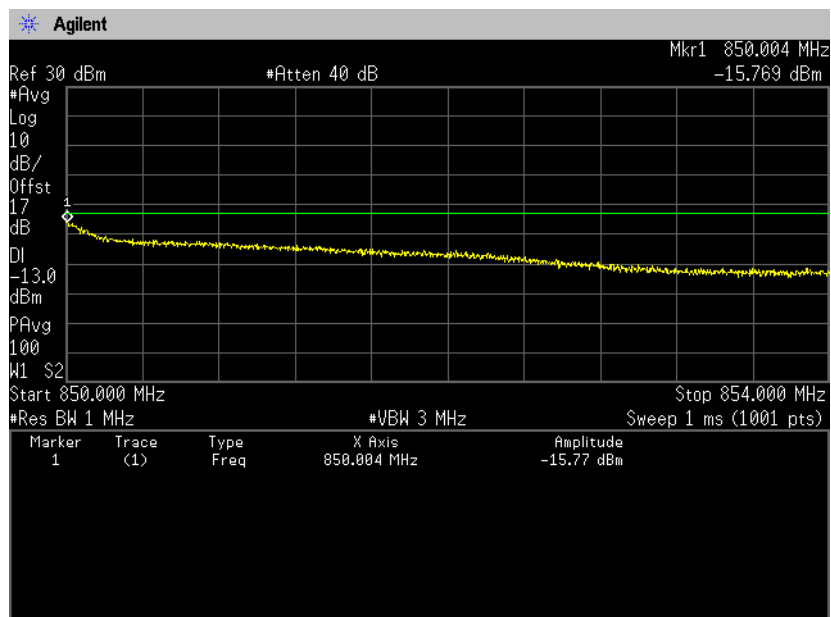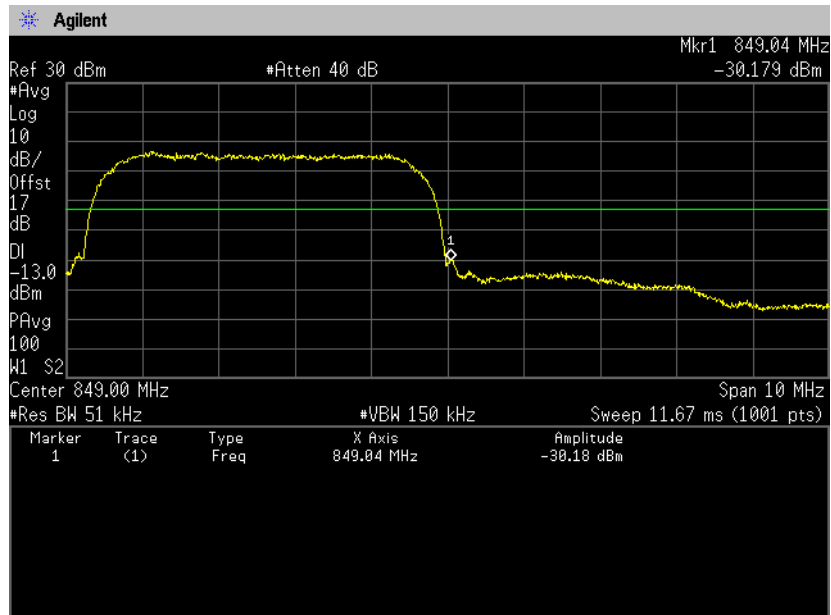


(Spurious Emissions)

Note: Conducted spurious test was measured in the worst case of conducted output power.

**Channel: 4132
30MHz-5GHz**

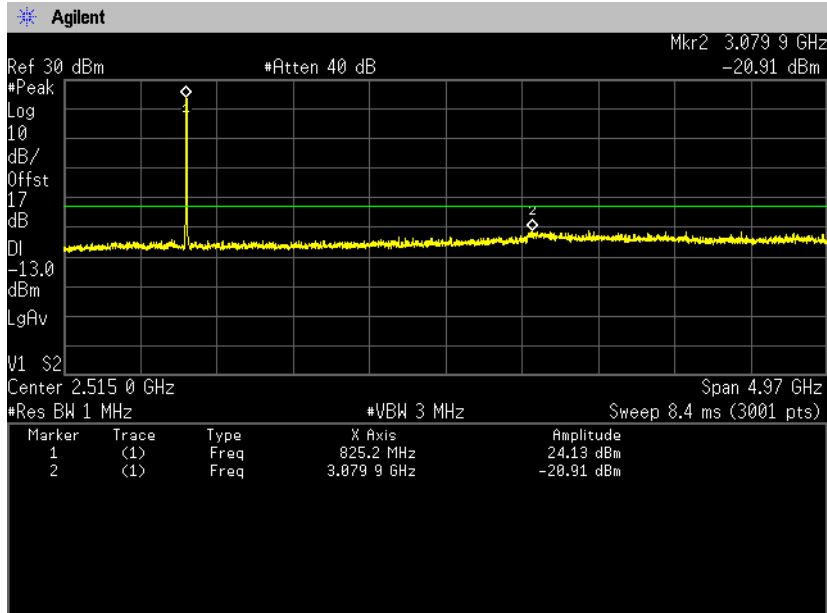


5GHz-10GHz

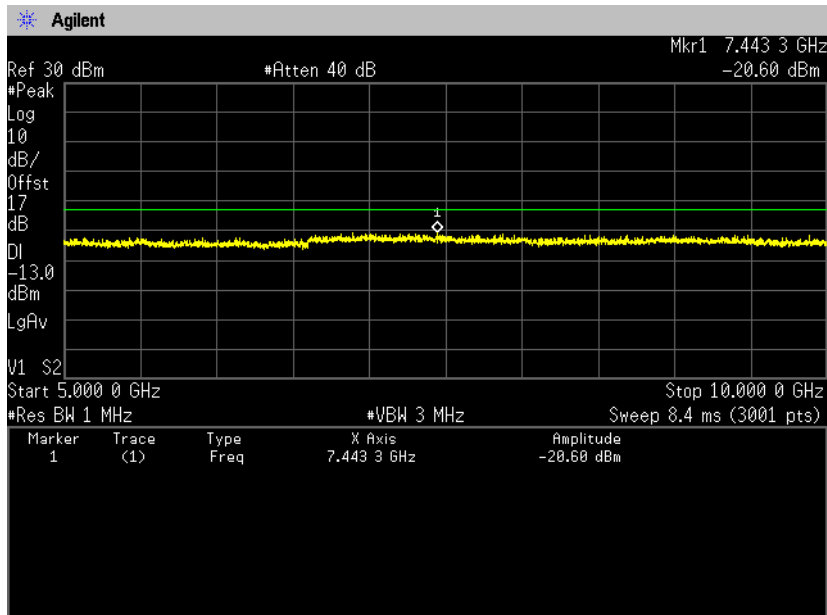




Zacta

**Channel: 4183
30MHz-5GHz**

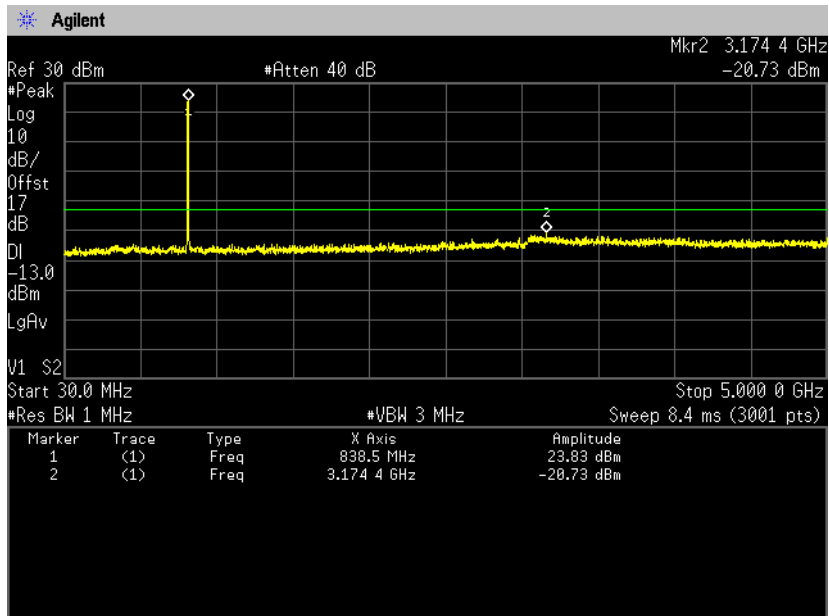


5GHz-10GHz

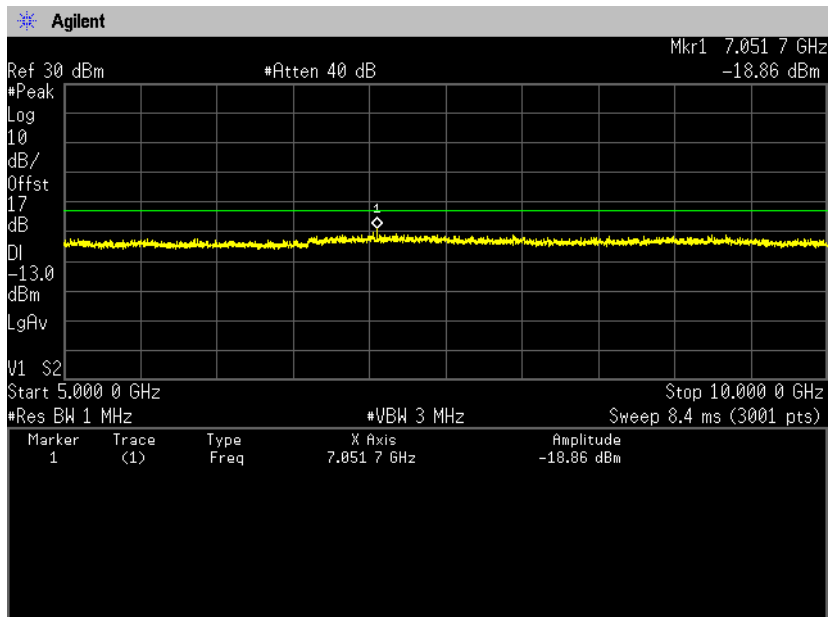




Zacta

**Channel: 4233
30MHz-5GHz**

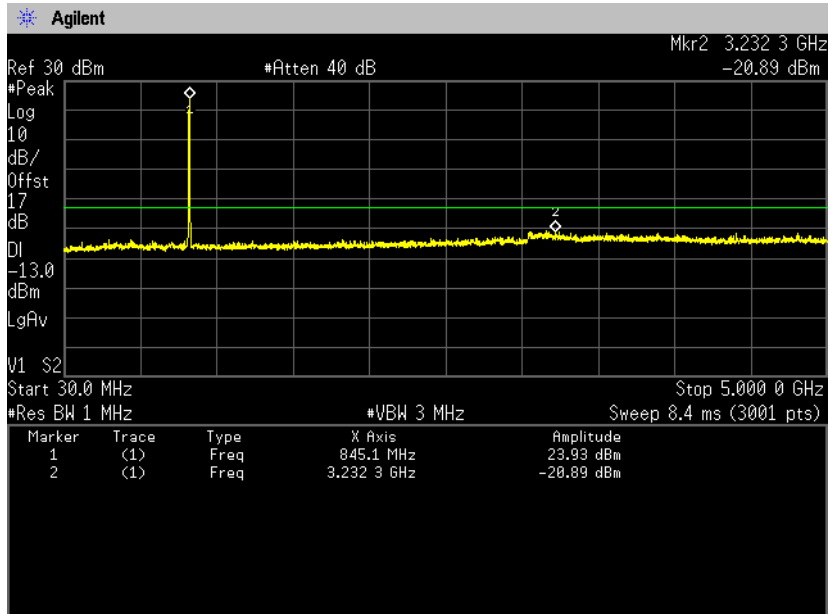


5GHz-10GHz

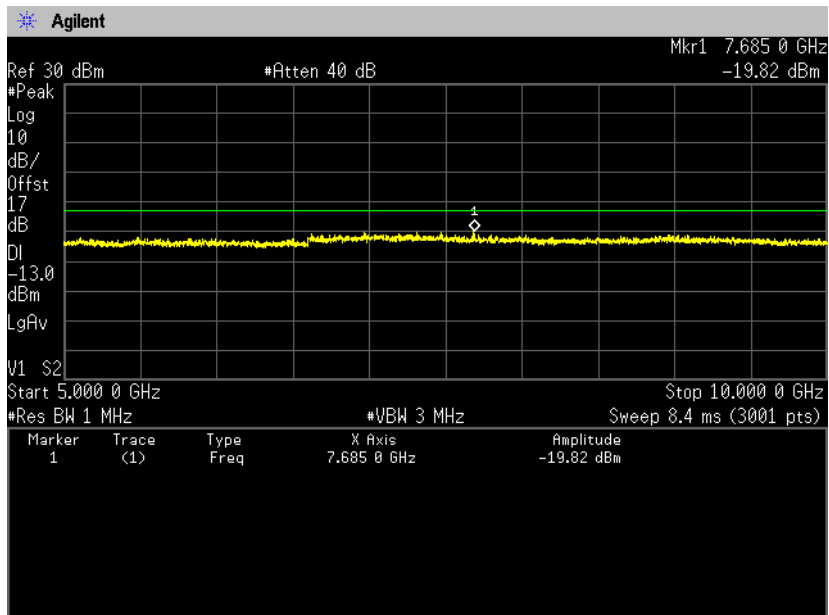




Zacta


**[LTE Band V]
(Band Edge)
QPSK, BW 1.4MHz, RB1-0
Channel: Low**

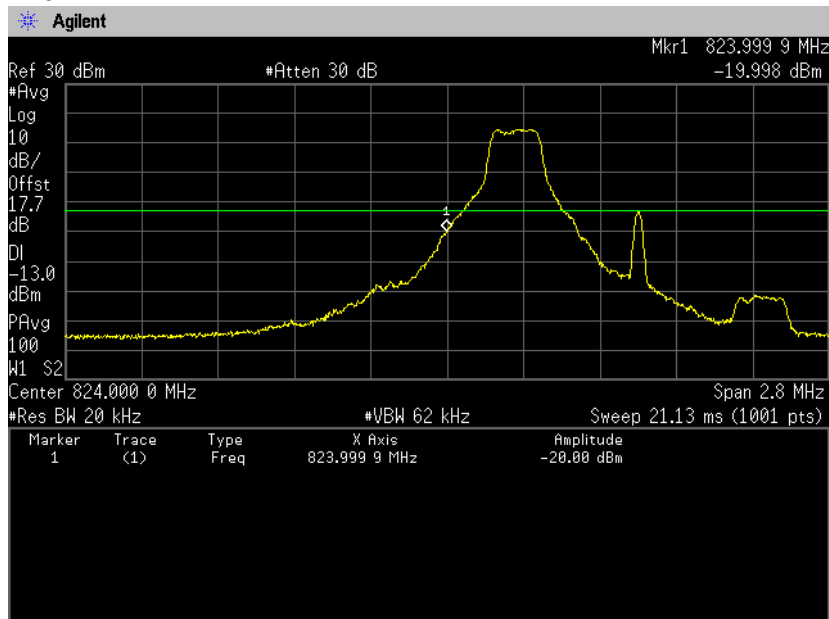


**QPSK, BW 1.4MHz, RB1-5
Channel: High**

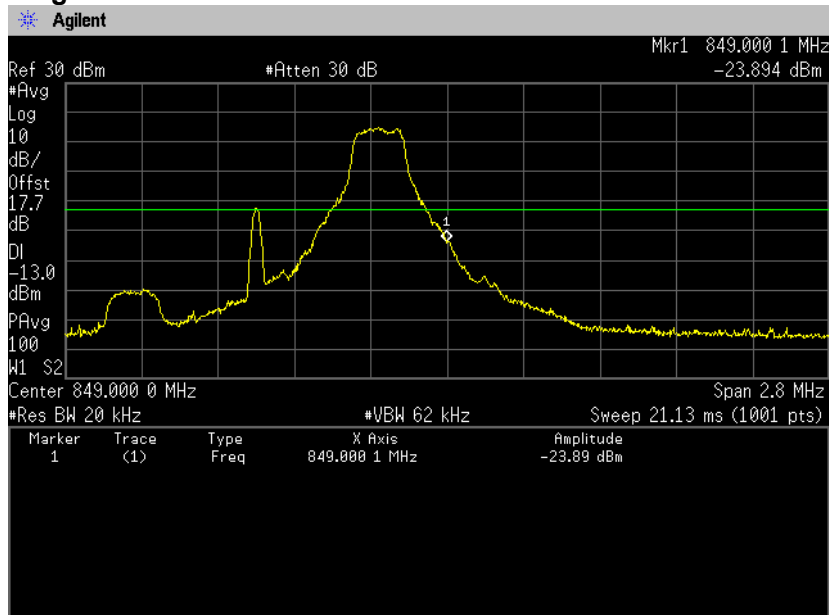


QPSK, BW 1.4MHz, RB6-0
Channel: Low

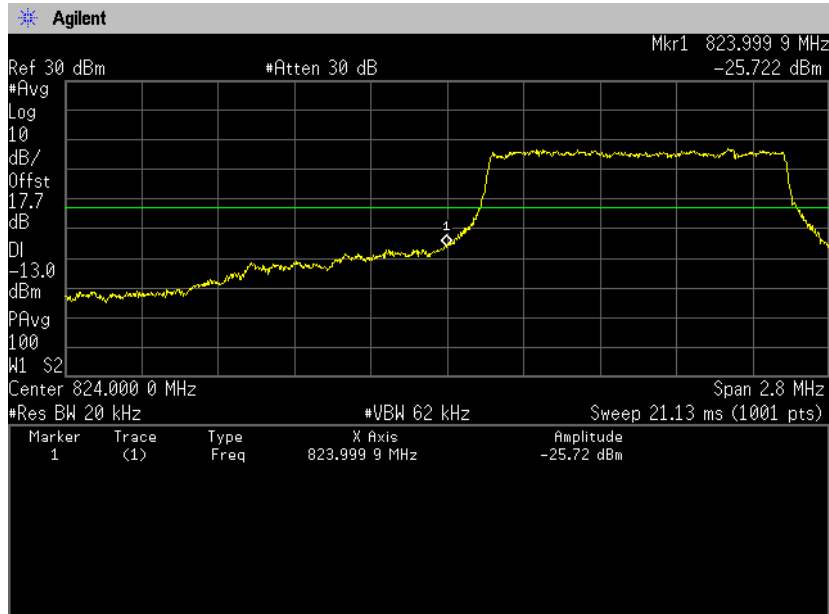


QPSK, BW 1.4MHz, RB6-0
Channel: High

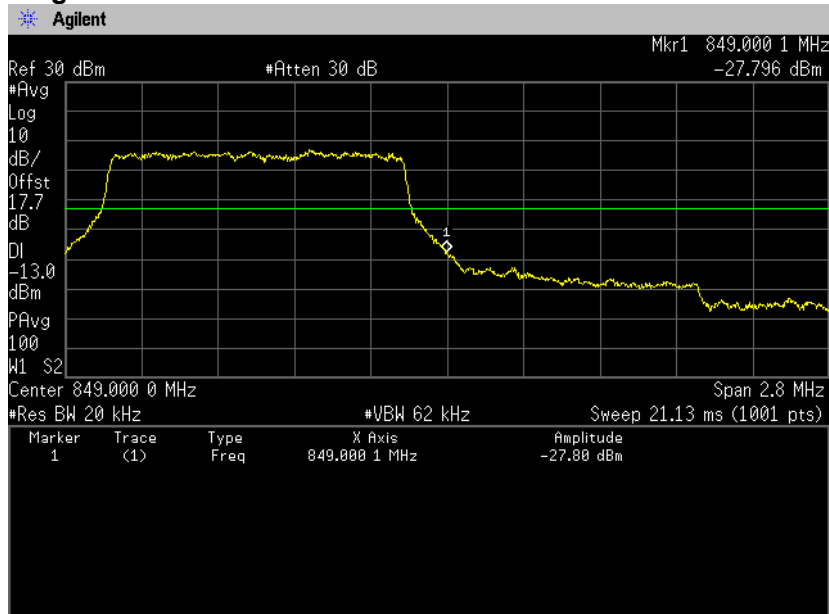

16QAM, BW 1.4MHz, RB1-0
Channel: Low

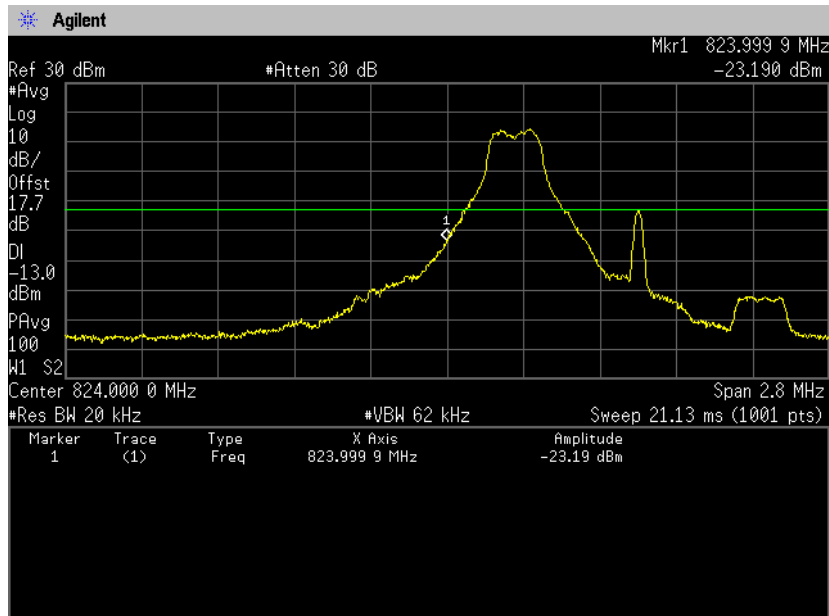


16QAM, BW 1.4MHz, RB1-5
Channel: High

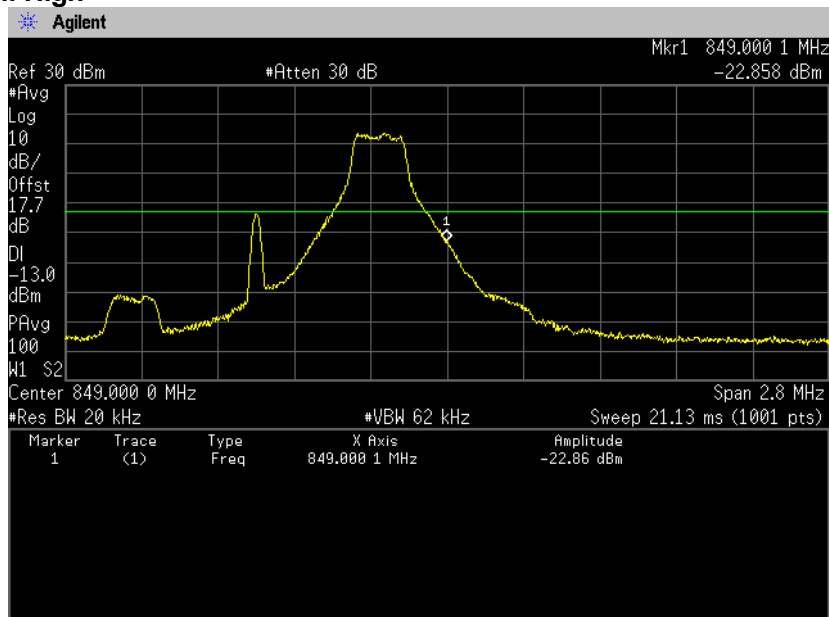




Zacta

16QAM, BW 1.4MHz, RB6-0
Channel: Low

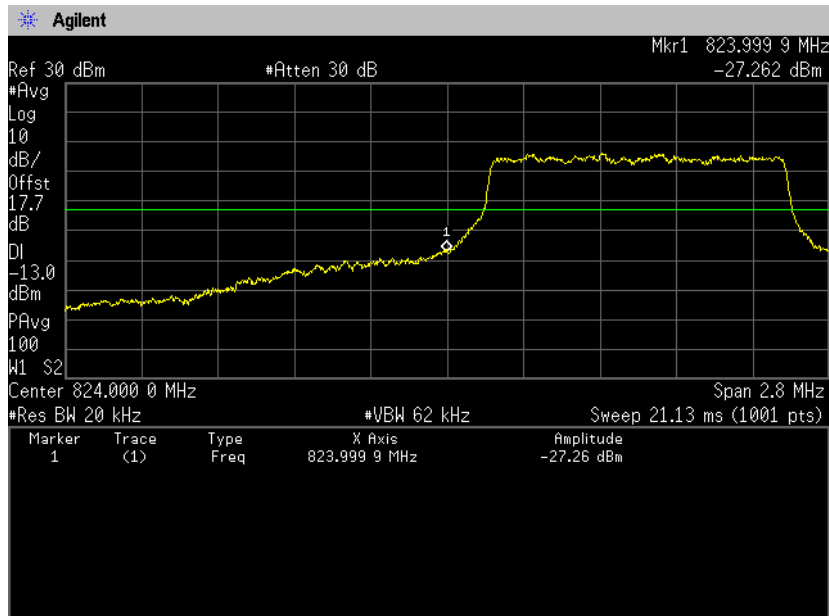


16QAM, BW 1.4MHz, RB6-0
Channel: High

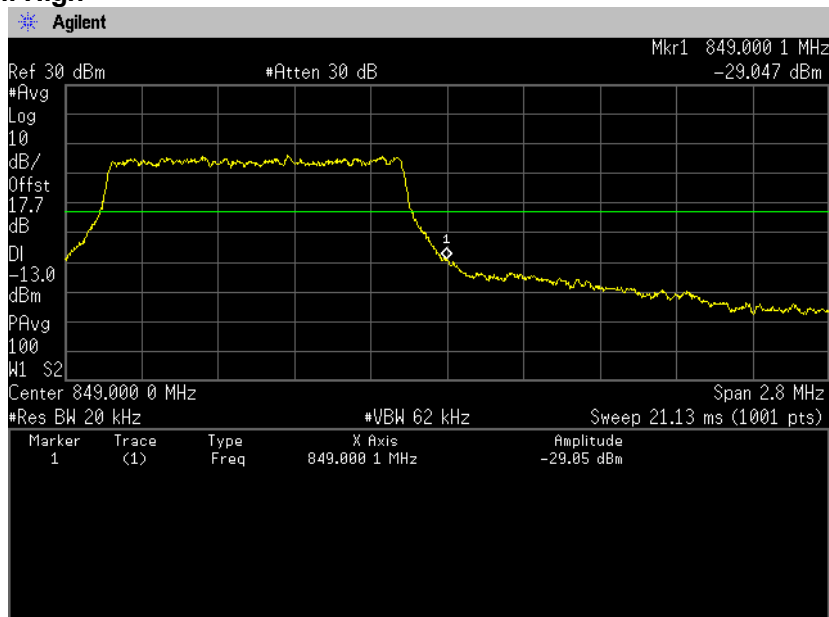




Zacta

QPSK, BW 3MHz, RB1-0
Channel: Low

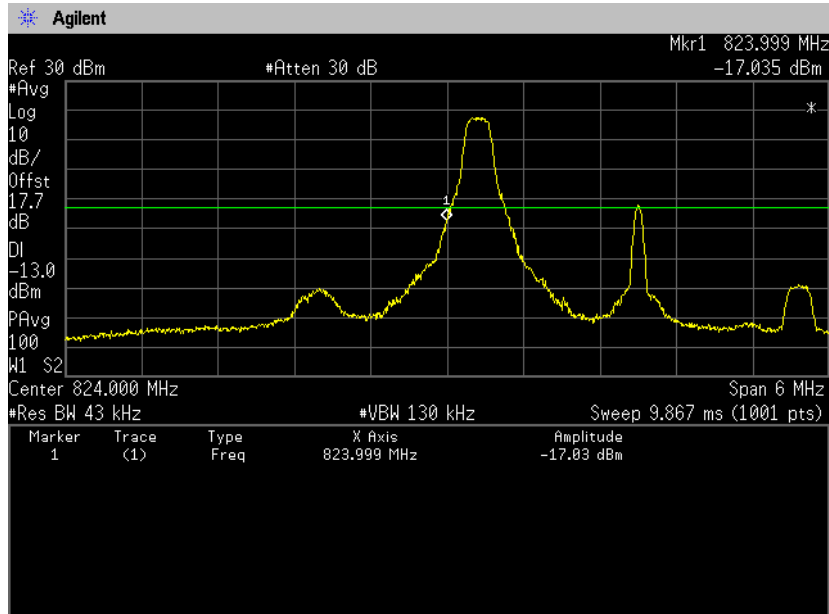


QPSK, BW 3MHz, RB1-14
Channel: High

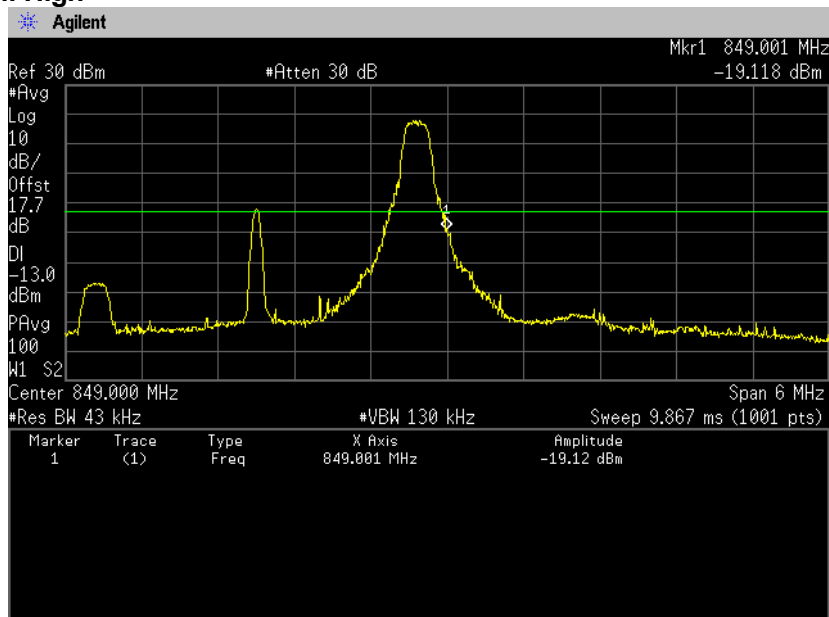




Zacta

QPSK, BW 3MHz, RB15-0
Channel: Low

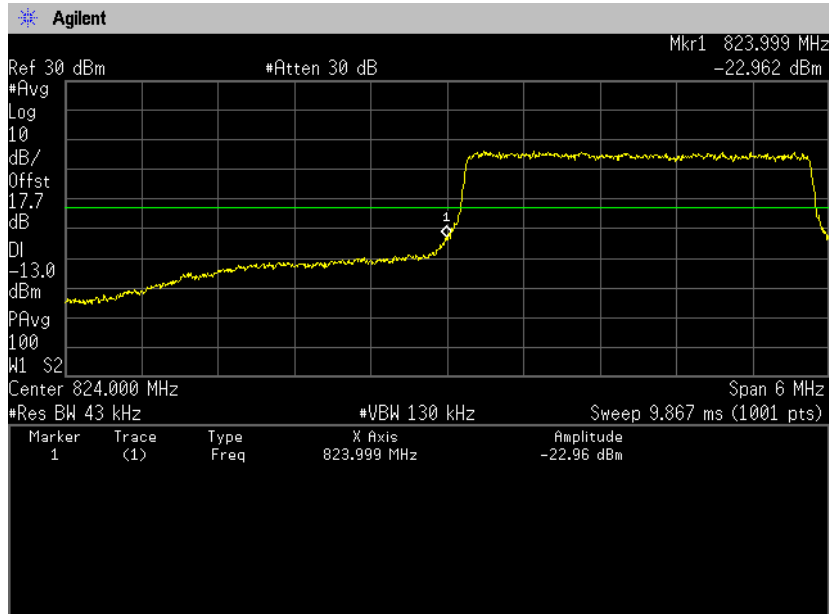


QPSK, BW 3MHz, RB15-0
Channel: High

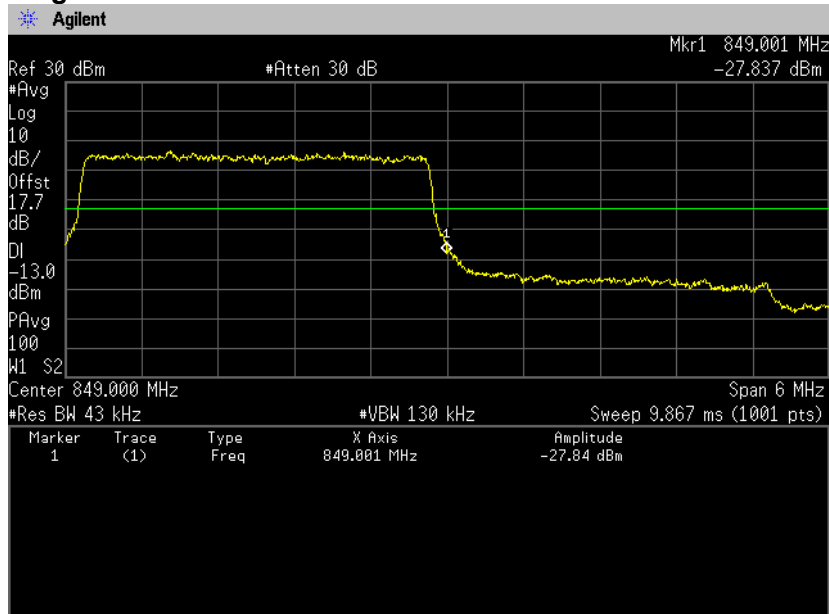




Zacta

16QAM, BW 3MHz, RB1-0
Channel: Low

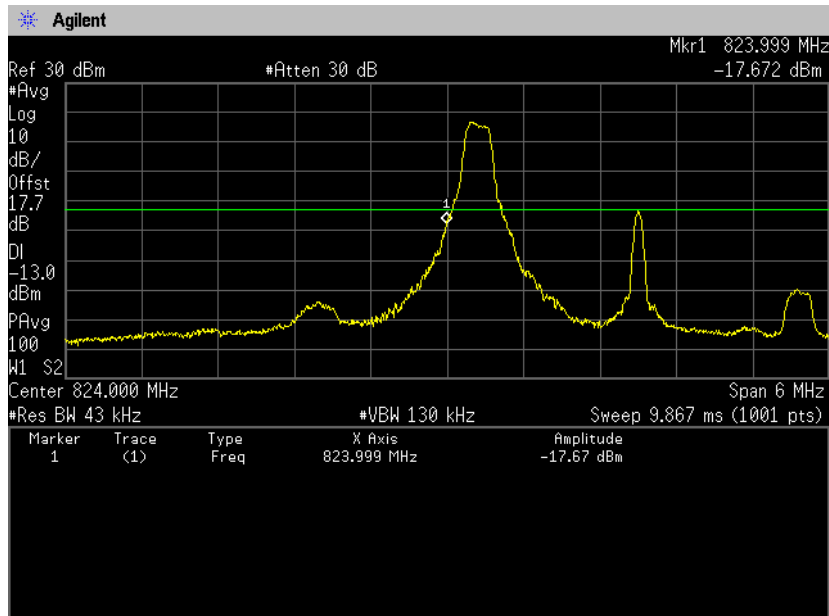


16QAM, BW 3MHz, RB1-14
Channel: High

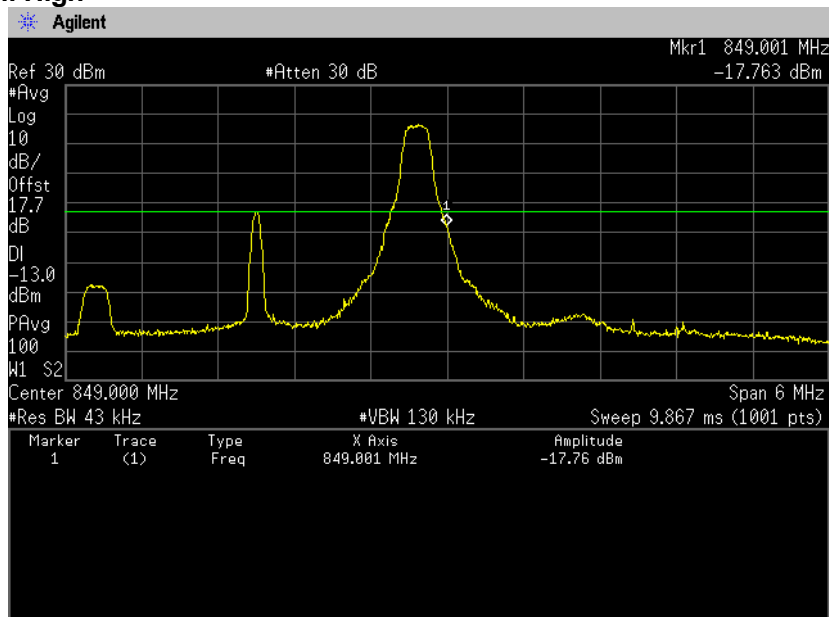




Zacta


16QAM, BW 3MHz, RB15-0
Channel: Low

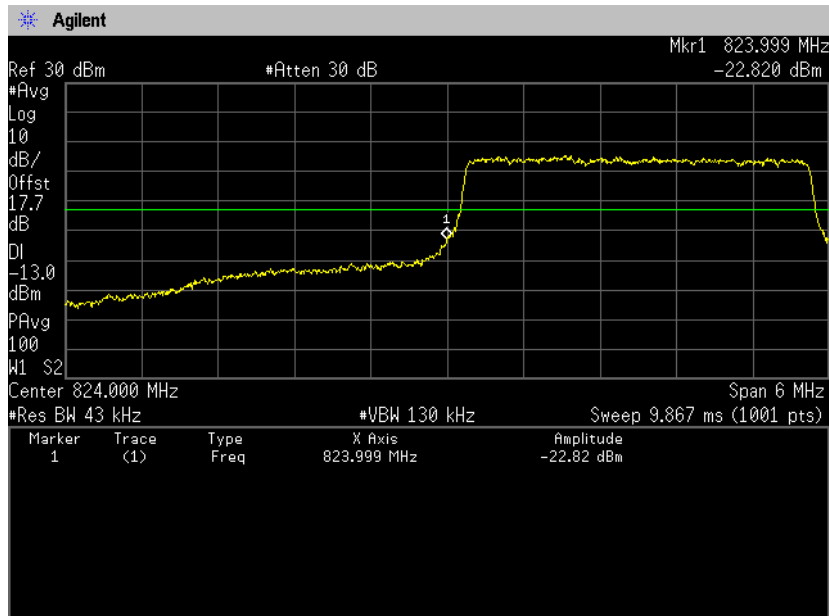


16QAM, BW 3MHz, RB15-0
Channel: High

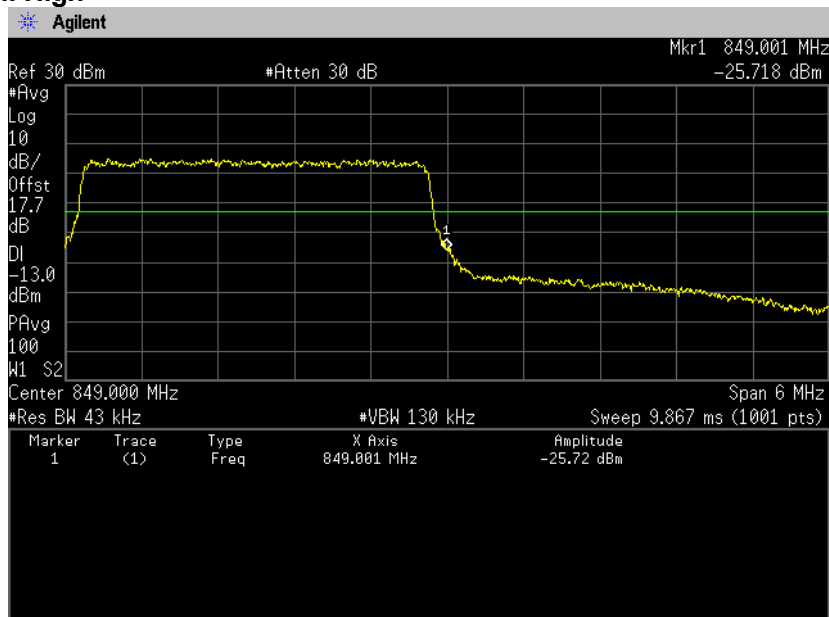

QPSK, BW 5MHz, RB1-0
Channel: Low

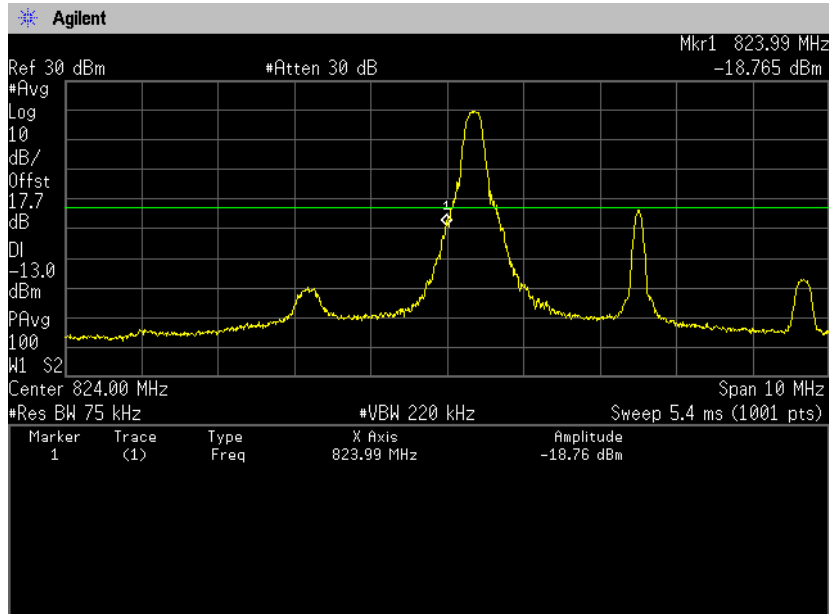


QPSK, BW 5MHz, RB1-24
Channel: High

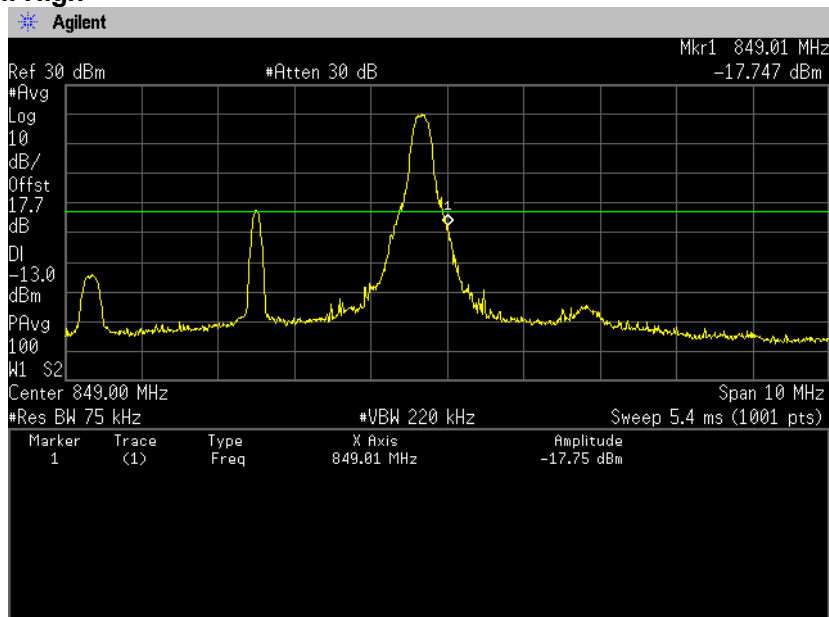




Zacta

QPSK, BW 5MHz, RB25-0 Channel: Low

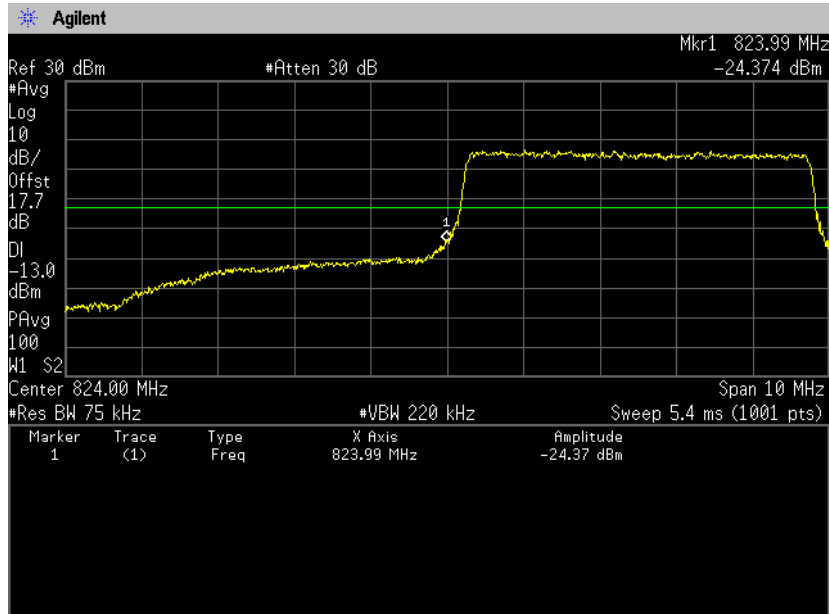


QPSK, BW 5MHz, RB25-0 Channel: High

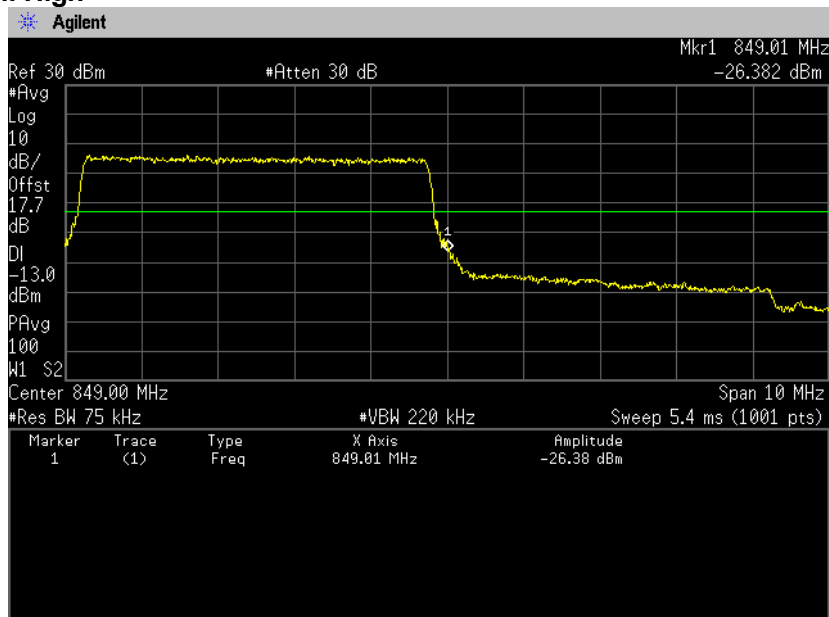




Zacta

16QAM, BW 5MHz, RB1-0
Channel: Low

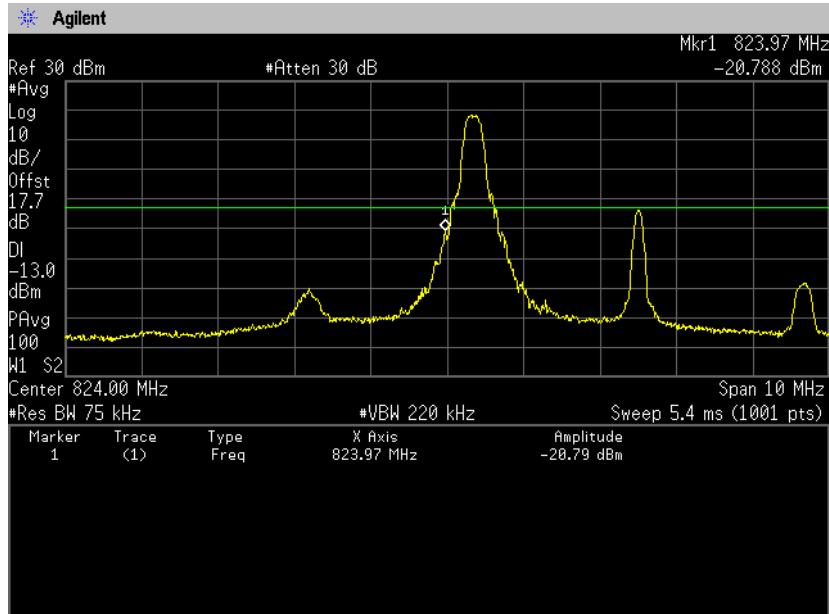


16QAM, BW 5MHz, RB1-24
Channel: High

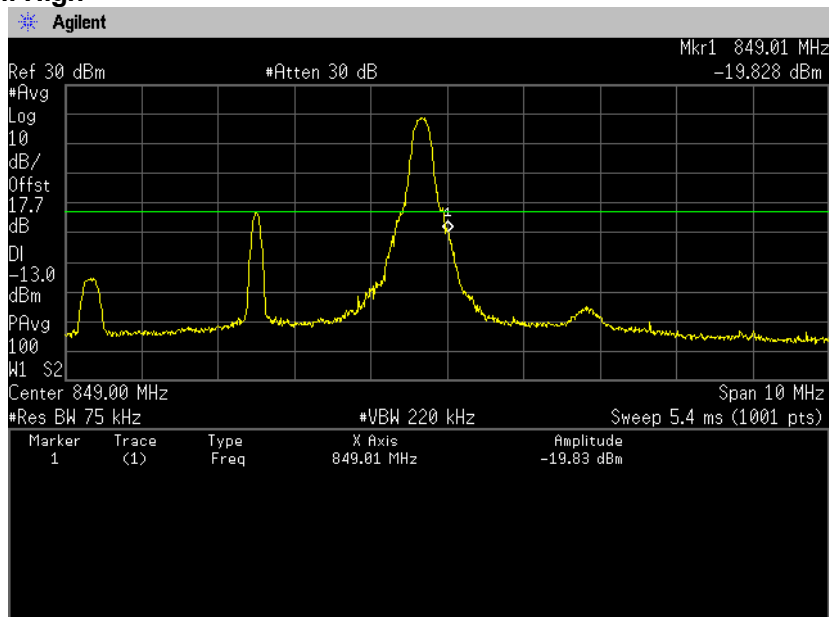




Zacta

16QAM, BW 5MHz, RB25-0
Channel: Low

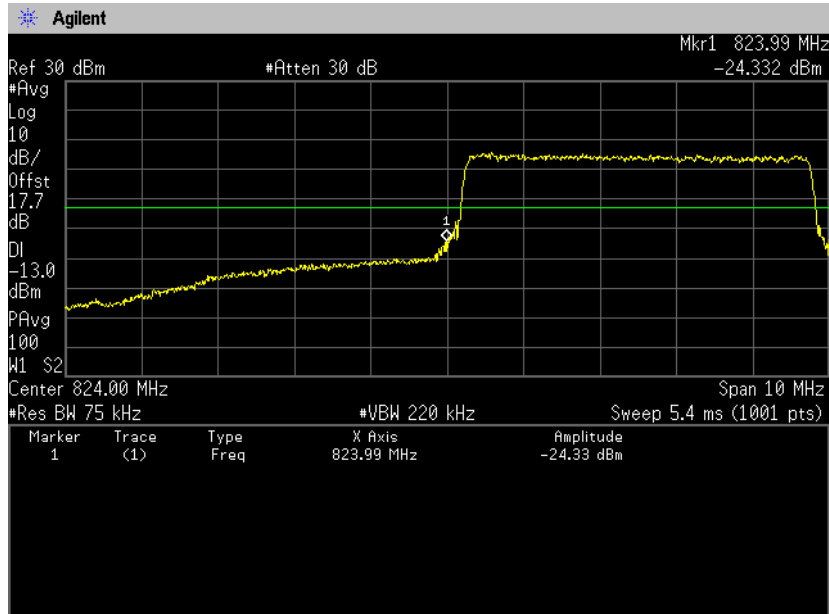


16QAM, BW 5MHz, RB25-0
Channel: High

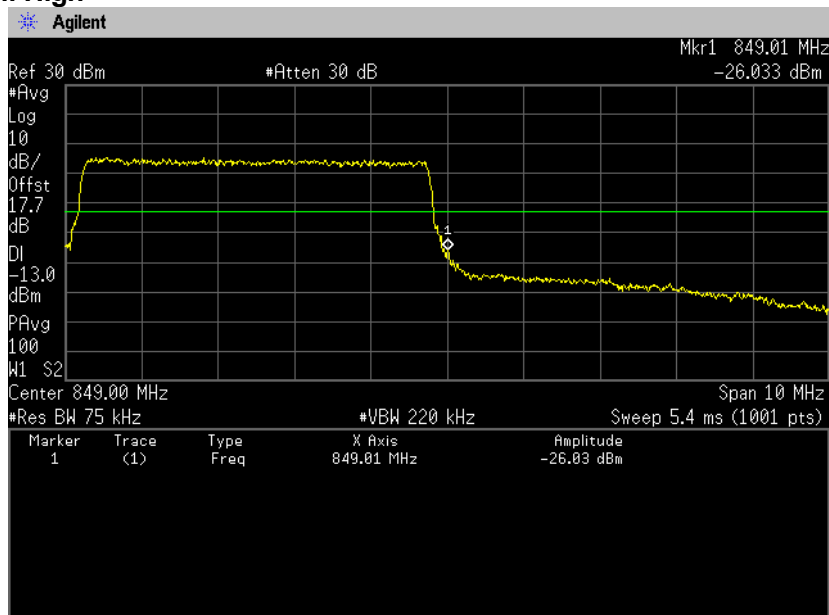




Zacta

QPSK, BW 10MHz, RB1-0
Channel: Low

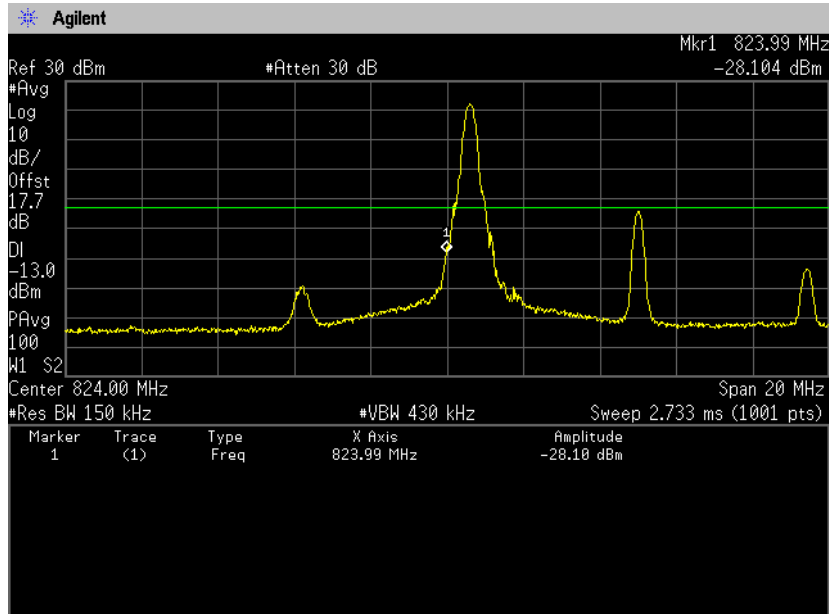


QPSK, BW 10MHz, RB1-49
Channel: High

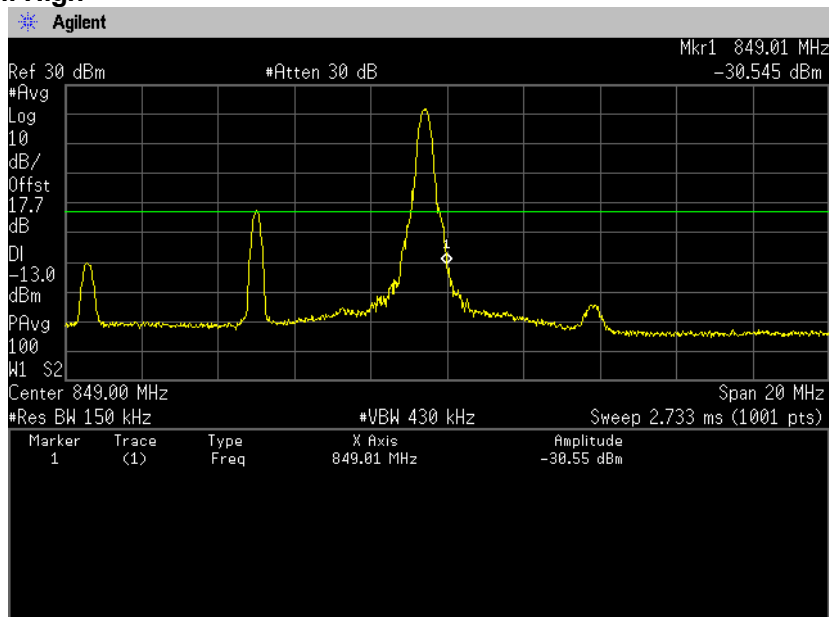




Zacta


QPSK, BW 10MHz, RB50-0
Channel: Low

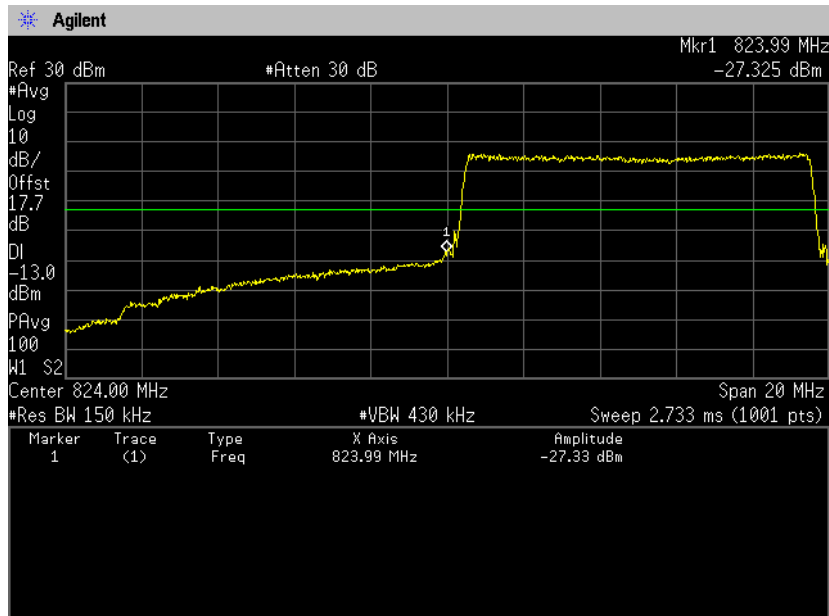


QPSK, BW 10MHz, RB50-0
Channel: High

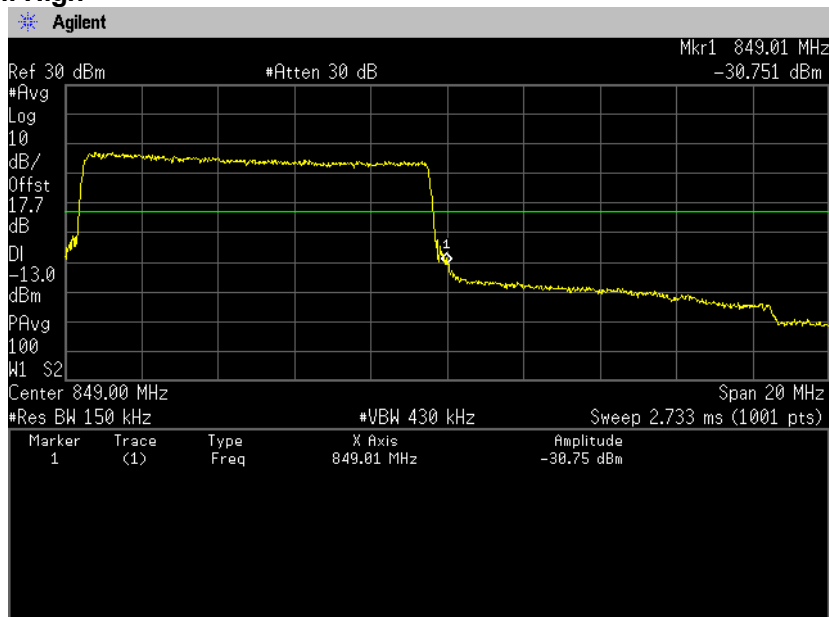

16QAM, BW 10MHz, RB1-0
Channel: Low

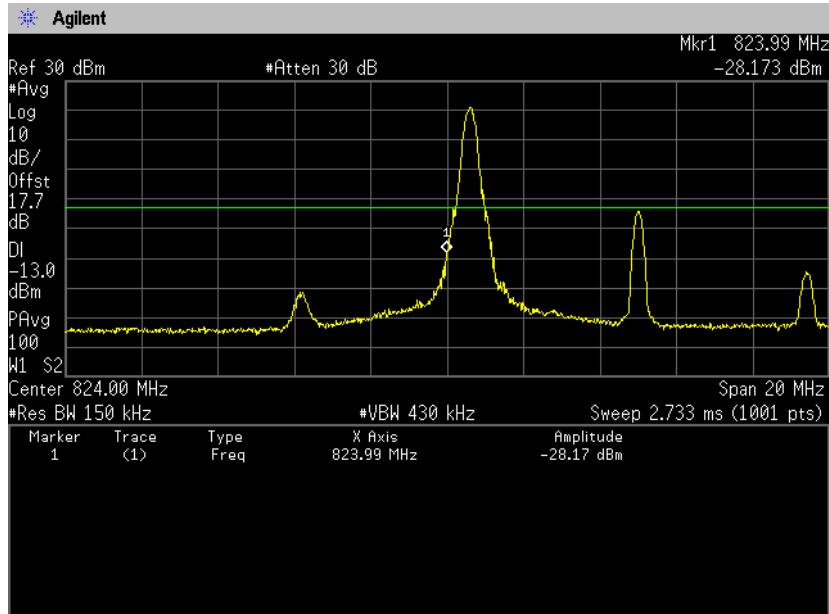


16QAM, BW 10MHz, RB1-49
Channel: High

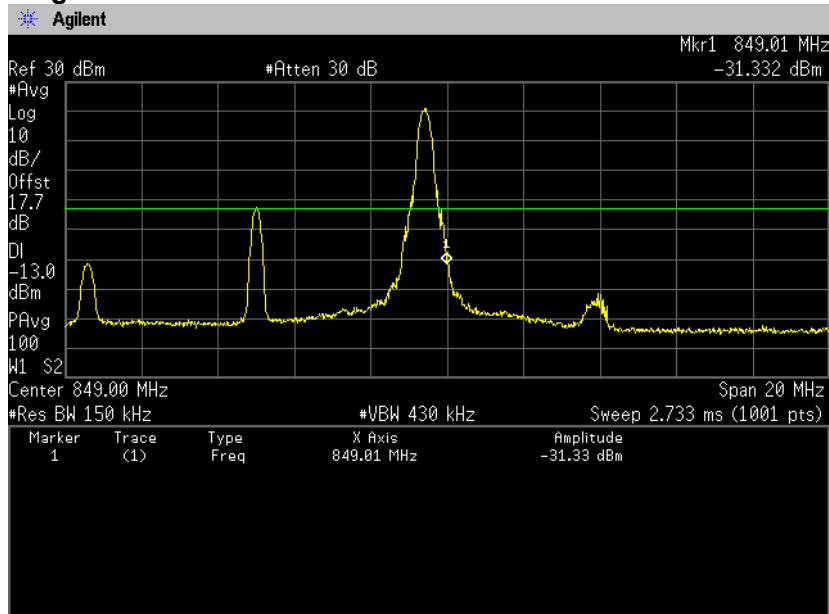




Zacta

16QAM, BW 10MHz, RB50-0
Channel: Low

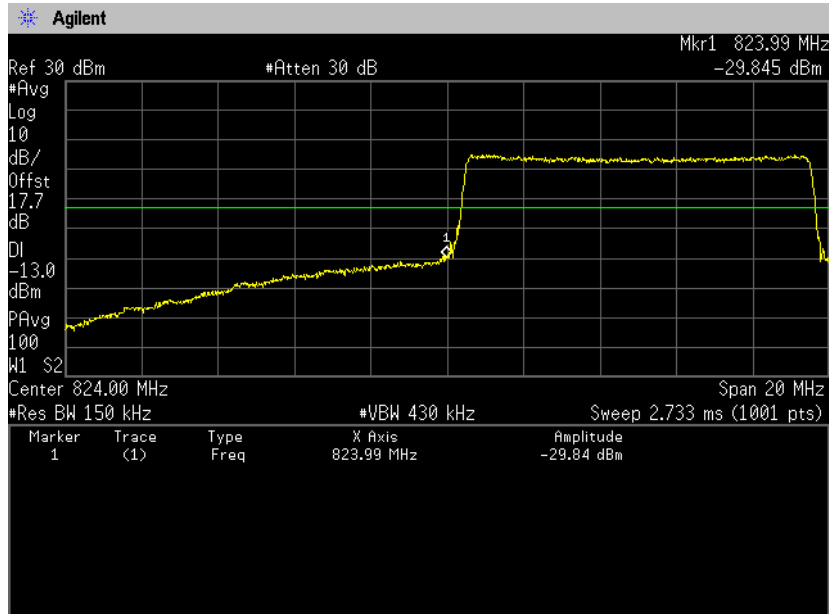


16QAM, BW 10MHz, RB50-0
Channel: High

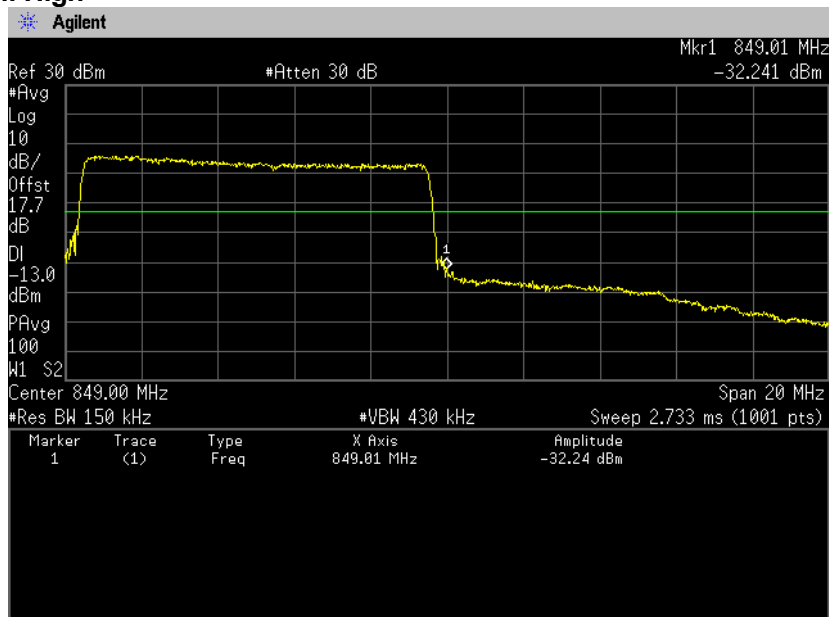


(Spurious Emissions)

Note: Conducted spurious test was measured in the worst case of conducted output power.

**QPSK, BW 5MHz, RB1-12
Channel: 23780
30MHz-5GHz**

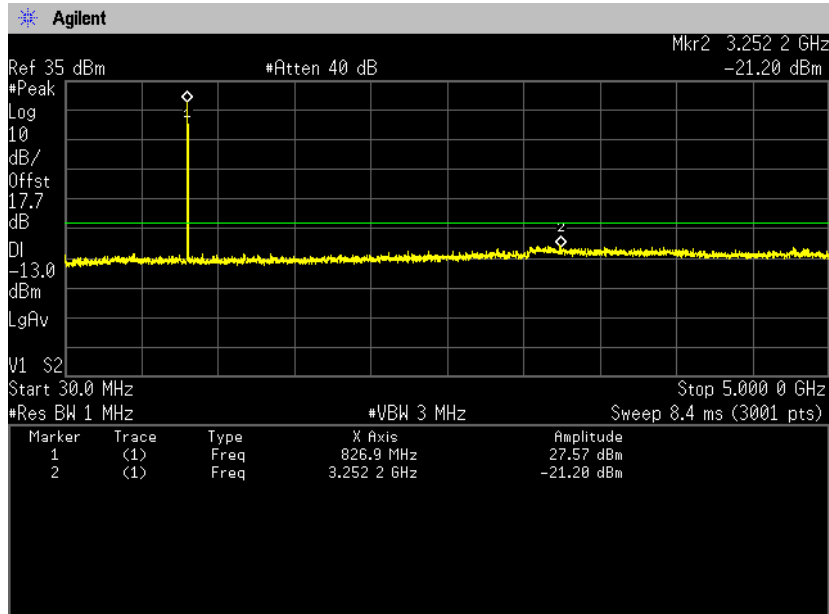


5GHz-10GHz

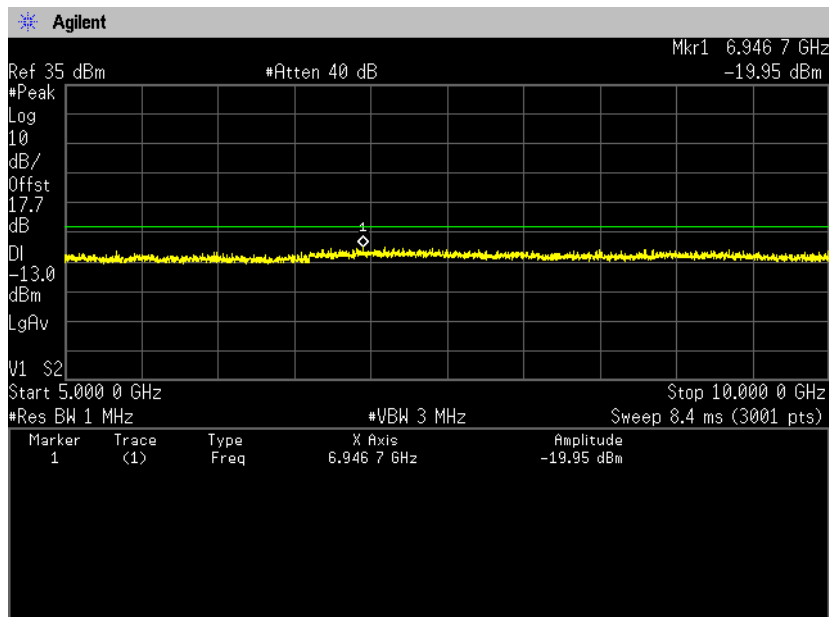




Zacta

**Channel: 23790
30MHz-5GHz**

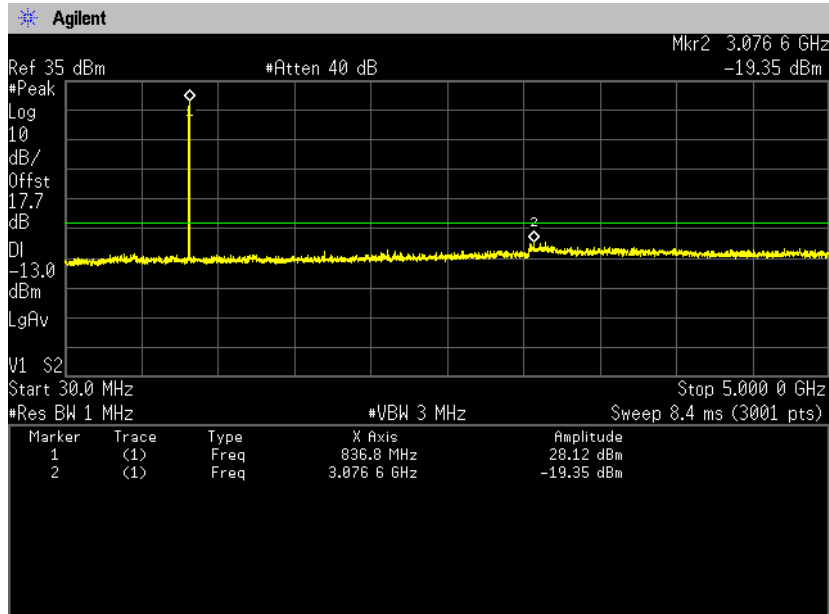


5GHz-10GHz

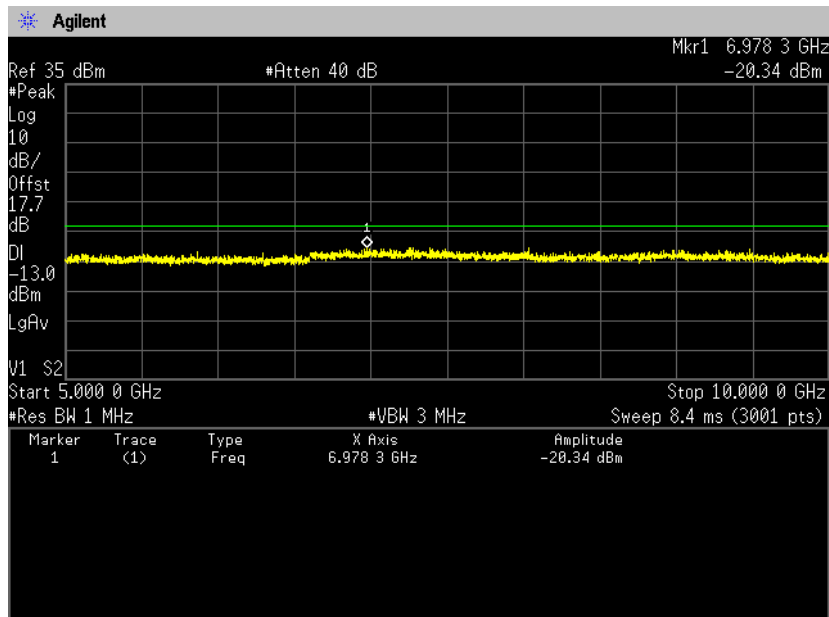




Zacta

**Channel: 23800
30MHz-5GHz**

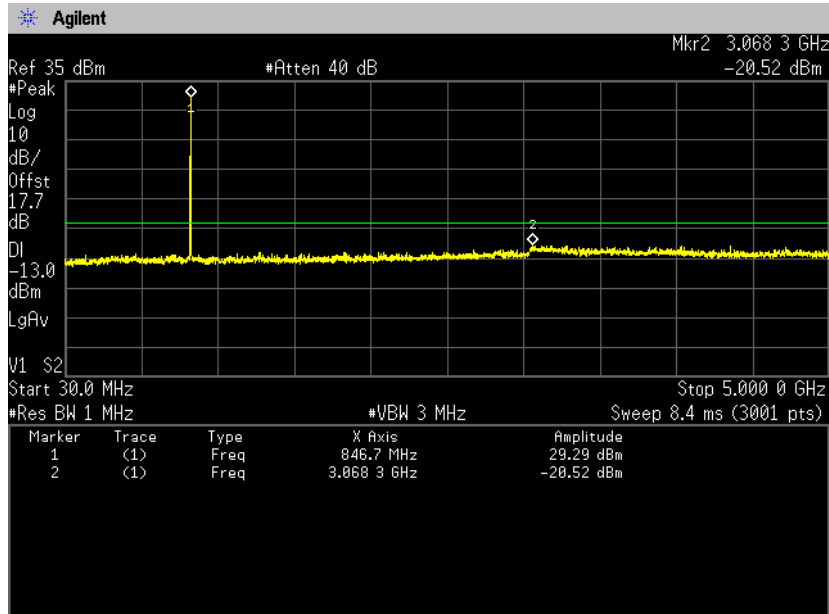


5GHz-10GHz

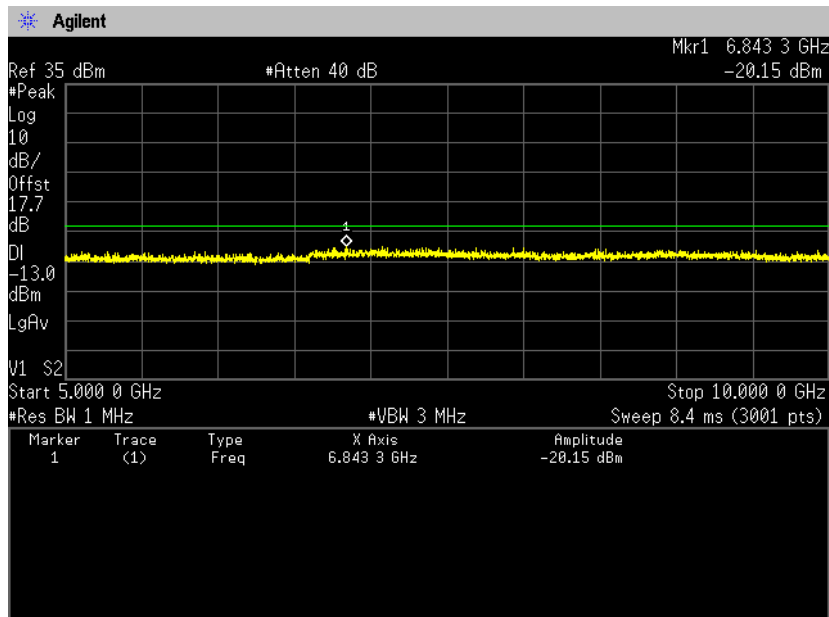




Zacta

16QAM, BW 5MHz, RB1-12
Channel: 23780
30MHz-5GHz

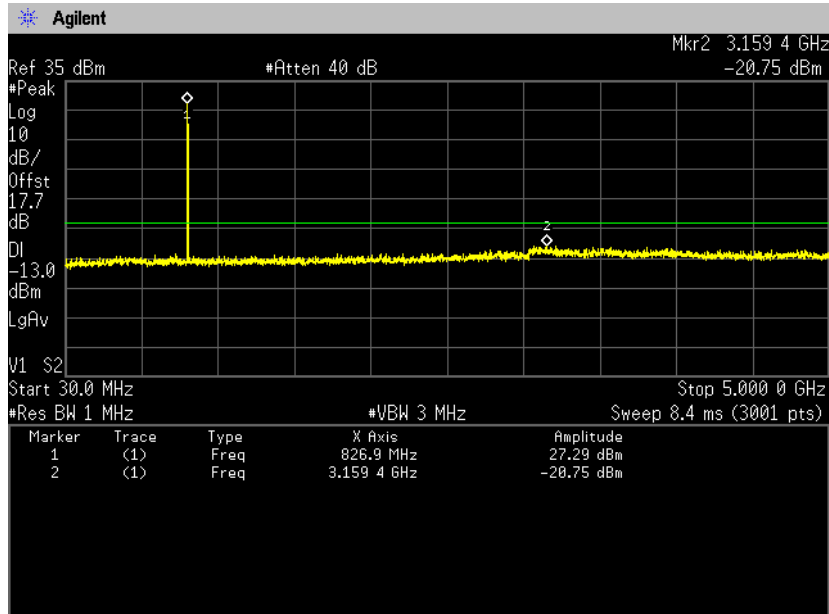


5GHz-10GHz

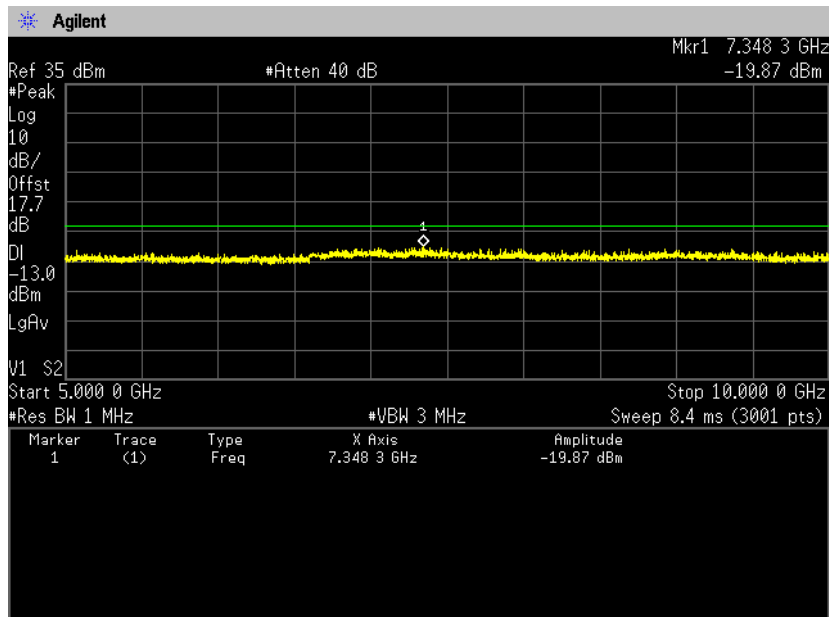




Zacta

**Channel: 23790
30MHz-5GHz**

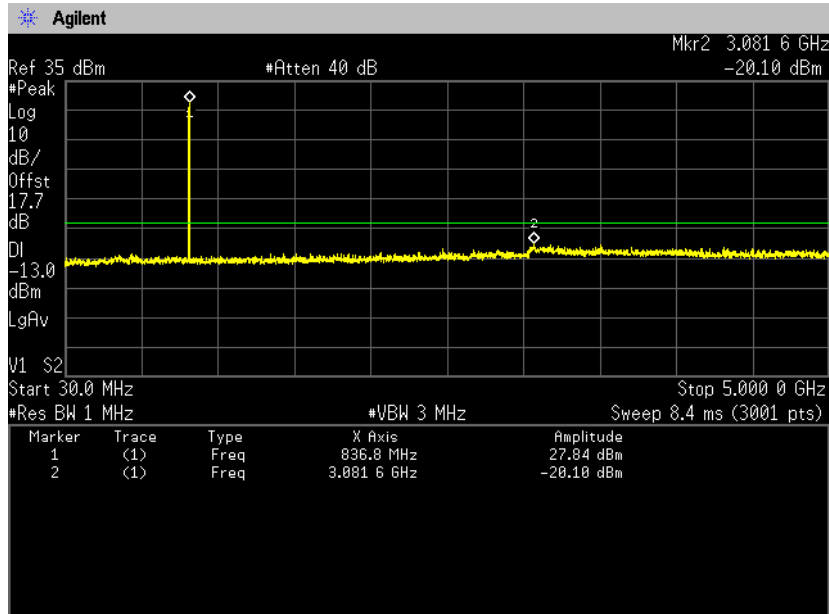


5GHz-10GHz

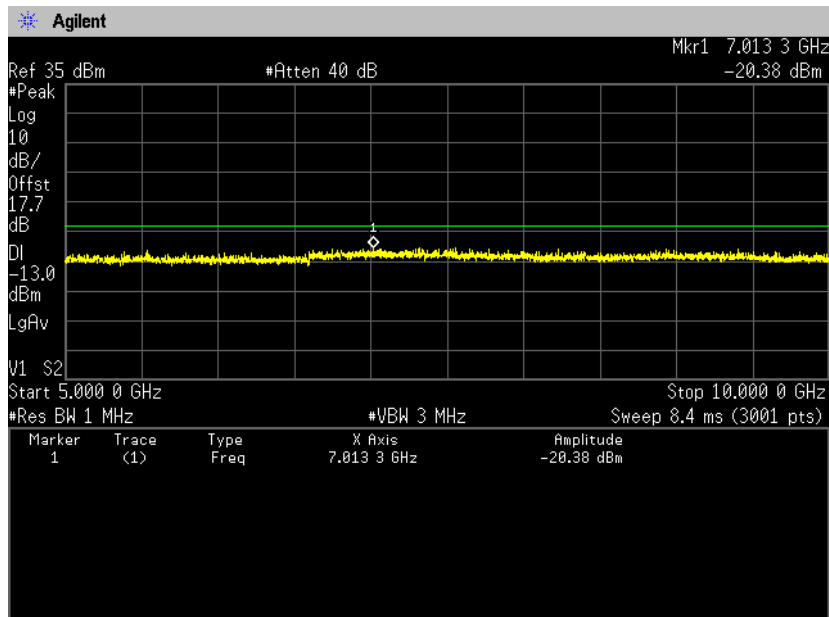




Zacta

**Channel: 23800
30MHz-5GHz**

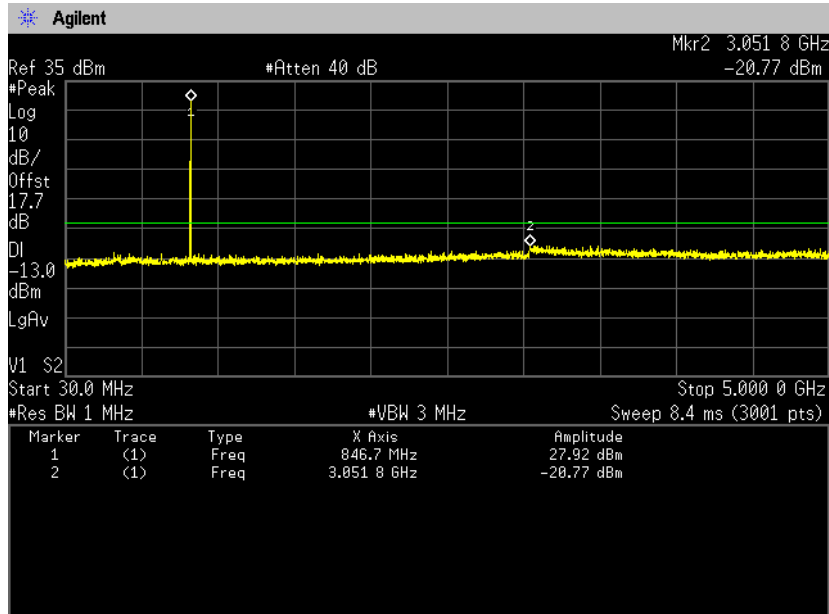

5GHz-10GHz

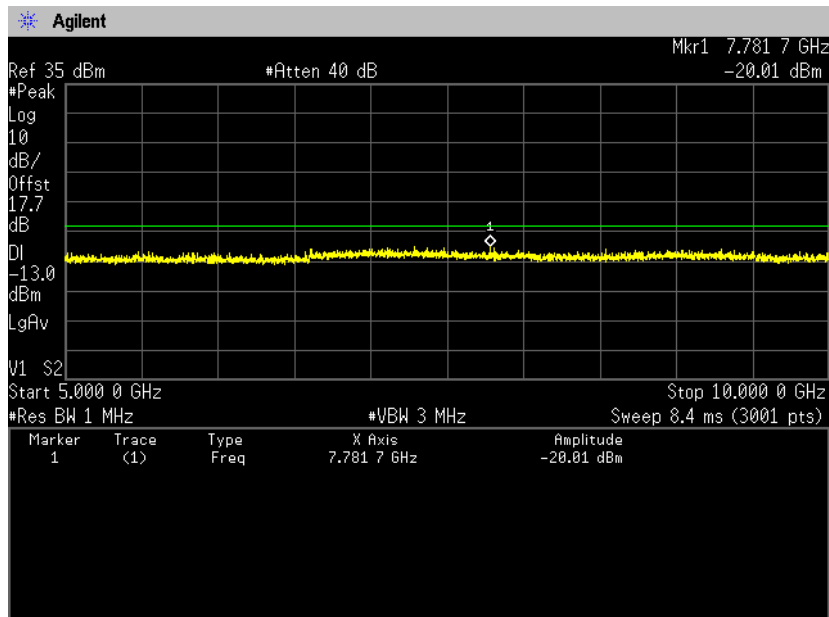

8. Radiated Emissions and Harmonic Emissions

8.1 Measurement procedure

[FCC 22.917(a), 2.1053, IC RSS-132 4.5.1]

<Step 1>

The EUT and support equipment are placed on a 1 meter x 1.5 meter surface, 0.8 meter height FRP table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (Biconical antenna, Log periodic antenna and double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission.

The bandwidth of the spectrum analyzer is set to 1MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission. The frequency is investigated up to 20GHz.

<Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT).


The frequency of the signal generator is adjusted to the measurement frequency.

Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

Spectrum analyzer setting

- Detector: Peak (RBW: 1MHz, VBW: 3MHz)

- Test configuration

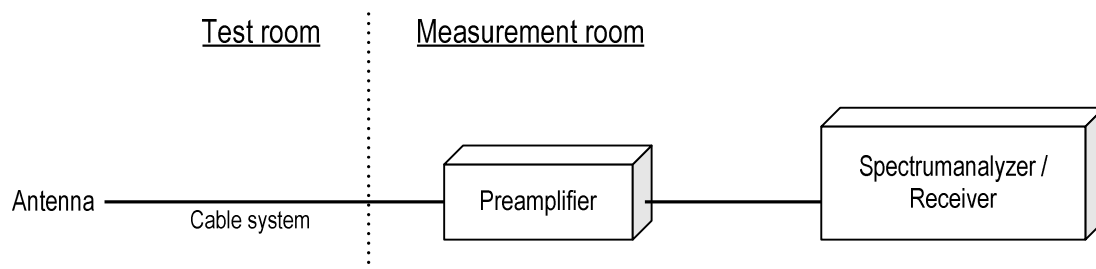

8.2 Calculation method

Result = S.G Reading – Cable loss + Antenna Gain

Margin = Limit – Result (ERP)

Example:

Limit @ 3346.6MHz : -13.0dBm

S.G Reading = -64.6dBm Cable loss = 1.5dB Ant. Gain = 7.5dB

Result = -64.6 – 1.5 + 7.5 = -58.6dBm

Margin = -13.0 - (-58.6) = 45.6dB

8.3 Limit

-13dBm or less



Zacta

8.4 Test data

Date : June 30, 2015
 Temperature : 24.2 [°C]
 Humidity : 59.4 [%]
 Test place : 3m Semi-anechoic chamber
 Test engineer : Hikaru Shibata

Date : July 3, 2015
 Temperature : 24.8 [°C]
 Humidity : 63.6 [%]
 Test place : 3m Semi-anechoic chamber
 Test engineer : Hikaru Shibata

[WCDMA Band V] (Channel: 4132)

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
V	3301.3	-62.3	-63.8	1.5	7.4	-57.9	-13.0	44.9

(Channel: 4183)

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
V	3346.6	-64.1	-64.6	1.5	7.5	-58.6	-13.0	45.6

(Channel: 4233)

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
V	3386.7	-64.0	-64.4	1.5	7.6	-58.4	-13.0	45.4



Zacta

Date : June 18, 2015
 Temperature : 24.8 [°C]
 Humidity : 54.3 [%]
 Test place : 3m Semi-anechoic chamber
 Test engineer : Taiki Watanabe

Date : June 19, 2015
 Temperature : 22.4 [°C]
 Humidity : 49.6 [%]
 Test place : 3m Semi-anechoic chamber
 Test engineer : Hikaru Shibata

Date : July 3, 2015
 Temperature : 24.8 [°C]
 Humidity : 63.6 [%]
 Test place : 3m Semi-anechoic chamber
 Test engineer : Hikaru Shibata

**[LTE Band V]
 QPSK, BW 1.4MHz
 Channel: 20407**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1648.2	-59.0	-66.6	1.0	6.9	-60.8	-13.0	47.8
V	1648.2	-60.2	-67.3	1.0	6.9	-61.5	-13.0	48.5
H	2472.8	-52.8	-55.3	1.3	7.4	-49.2	-13.0	36.2
V	2472.6	-60.1	-61.6	1.3	7.4	-55.5	-13.0	42.5
H	3297.0	-53.2	-54.8	1.5	7.4	-48.9	-13.0	35.9
V	3297.0	-53.4	-54.1	1.5	7.4	-48.2	-13.0	35.2
H	4121.2	-58.0	-57.5	1.7	8.1	-51.1	-13.0	38.1
V	4121.2	-59.1	-57.9	1.7	8.1	-51.5	-13.0	38.5
H	4945.5	-63.6	-59.4	1.9	8.7	-52.6	-13.0	39.6
V	4945.5	-62.4	-58.7	1.9	8.7	-51.9	-13.0	38.9

Channel: 20525

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1672.1	-61.3	-67.4	1.1	6.6	-61.8	-13.0	48.8
V	1672.1	-61.1	-67.6	1.1	6.6	-62.0	-13.0	49.0
H	2508.2	-48.5	-50.8	1.3	7.4	-44.7	-13.0	31.7
V	2508.2	-54.6	-79.3	1.3	7.4	-73.2	-13.0	60.2
H	3344.3	-55.2	-56.6	1.5	7.5	-50.6	-13.0	37.6
V	3344.2	-57.3	-57.8	1.5	7.5	-51.8	-13.0	38.8
H	4180.2	-59.7	-59.4	1.7	8.2	-52.9	-13.0	39.9
V	4180.2	-58.2	-57.5	1.7	8.2	-51.0	-13.0	38.0
V	5016.0	-60.5	-59.7	1.9	8.7	-52.8	-13.0	39.8



Zacta

Channel: 20643

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1695.8	-61.0	-67.2	1.1	6.3	-61.9	-13.0	48.9
V	1695.6	-59.0	-65.4	1.1	6.4	-60.1	-13.0	47.1
H	2543.6	-45.1	-37.5	1.3	7.6	-31.2	-13.0	18.2
V	2543.7	-54.9	-57.3	1.3	7.6	-51.0	-13.0	38.0
H	3391.4	-52.7	-54.4	1.5	7.6	-48.4	-13.0	35.4
V	3391.4	-52.3	-52.7	1.5	7.6	-46.7	-13.0	33.7
H	4239.3	-59.5	-59.2	1.7	8.4	-52.5	-13.0	39.5
V	4239.3	-54.8	-53.7	1.7	8.4	-47.0	-13.0	34.0
H	5087.0	-62.5	-57.3	1.9	8.7	-50.5	-13.0	37.5
V	5087.0	-54.6	-50.1	1.9	8.7	-43.3	-13.0	30.3

16QAM, BW 1.4MHz
Channel: 20407

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1649.6	-57.5	-65.1	1.0	6.9	-59.3	-13.0	46.3
V	1649.6	-60.7	-67.8	1.0	6.9	-62.0	-13.0	49.0
H	2474.4	-52.3	-54.8	1.3	7.4	-48.7	-13.0	35.7
V	2474.4	-59.0	-60.5	1.3	7.4	-54.4	-13.0	41.4
H	3329.2	-51.4	-53.0	1.5	7.5	-47.0	-13.0	34.0
V	3329.2	-54.0	-54.7	1.5	7.5	-48.7	-13.0	35.7
H	4124.0	-57.0	-56.5	1.7	8.1	-50.1	-13.0	37.1
V	4124.0	-57.0	-55.8	1.7	8.1	-49.4	-13.0	36.4
V	4948.8	-62.5	-58.8	1.9	8.7	-52.0	-13.0	39.0

Channel: 20525

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1673.1	-62.5	-68.6	1.1	6.6	-63.0	-13.0	50.0
V	1673.1	-63.8	-70.3	1.1	6.6	-64.7	-13.0	51.7
H	2509.7	-47.1	-49.4	1.3	7.4	-43.3	-13.0	30.3
V	2509.8	-54.9	-79.6	1.3	7.5	-73.5	-13.0	60.5
H	3346.2	-55.8	-57.2	1.5	7.5	-51.2	-13.0	38.2
V	3346.3	-57.6	-58.1	1.5	7.5	-52.1	-13.0	39.1
H	4182.9	-61.2	-60.9	1.7	8.2	-54.4	-13.0	41.4
V	4182.9	-60.5	-59.8	1.7	8.2	-53.3	-13.0	40.3
V	5020.0	-60.8	-60.0	1.9	8.7	-53.1	-13.0	40.1

Channel: 20643

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1696.8	-61.4	-67.6	1.1	6.3	-62.3	-13.0	49.3
V	1696.8	-59.1	-65.5	1.1	6.3	-60.2	-13.0	47.2
H	2545.2	-44.3	-36.7	1.3	7.6	-30.4	-13.0	17.4
V	2545.2	-53.9	-56.3	1.3	7.6	-50.0	-13.0	37.0
H	3393.6	-52.3	-54.0	1.5	7.6	-48.0	-13.0	35.0
V	3393.6	-55.0	-55.4	1.5	7.6	-49.4	-13.0	36.4
H	4242.0	-56.3	-56.0	1.7	8.4	-49.3	-13.0	36.3
V	4242.0	-58.5	-57.4	1.7	8.4	-50.7	-13.0	37.7
H	5090.0	-62.6	-57.4	1.9	8.7	-50.6	-13.0	37.6
V	5090.0	-54.8	-50.3	1.9	8.7	-43.5	-13.0	30.5

QPSK, BW 3MHz
Channel: 20415

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1648.5	-59.1	-66.7	1.0	6.9	-60.9	-13.0	47.9
V	1648.5	-61.9	-69.0	1.0	6.9	-63.2	-13.0	50.2
H	2472.7	-53.1	-55.6	1.3	7.4	-49.5	-13.0	36.5
V	2472.7	-58.5	-60.0	1.3	7.4	-53.9	-13.0	40.9
H	3297.0	-53.1	-54.7	1.5	7.4	-48.8	-13.0	35.8
V	3297.0	-57.0	-57.7	1.5	7.4	-51.8	-13.0	38.8
H	4121.3	-59.5	-59.0	1.7	8.1	-52.6	-13.0	39.6
V	4121.2	-59.4	-58.2	1.7	8.1	-51.8	-13.0	38.8
H	4945.5	-64.5	-60.3	1.9	8.7	-53.5	-13.0	40.5
V	4945.5	-62.0	-58.3	1.9	8.7	-51.5	-13.0	38.5

Channel: 20525

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1670.6	-61.8	-67.9	1.1	6.6	-62.3	-13.0	49.3
V	1670.6	-61.3	-67.8	1.1	6.6	-62.2	-13.0	49.2
H	2505.7	-49.8	-52.1	1.3	7.4	-46.0	-13.0	33.0
V	2505.7	-55.2	-79.9	1.3	7.4	-73.8	-13.0	60.8
H	3341.0	-56.2	-57.6	1.5	7.5	-51.6	-13.0	38.6
V	3341.0	-57.8	-58.3	1.5	7.5	-52.3	-13.0	39.3
H	4176.3	-58.7	-58.4	1.7	8.2	-51.9	-13.0	38.9
V	4176.2	-59.1	-58.4	1.7	8.2	-51.9	-13.0	38.9
V	5012.0	-58.9	-58.1	1.9	8.7	-51.2	-13.0	38.2

Channel: 20635

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1692.5	-60.1	-66.3	1.1	6.4	-60.9	-13.0	47.9
V	1692.5	-57.9	-64.3	1.1	6.4	-59.0	-13.0	46.0
H	2538.8	-46.0	-38.4	1.3	7.6	-32.1	-13.0	19.1
V	2538.8	-55.8	-58.2	1.3	7.6	-51.9	-13.0	38.9
H	3385.0	-53.8	-55.5	1.5	7.6	-49.5	-13.0	36.5
V	3385.0	-54.7	-55.1	1.5	7.6	-49.1	-13.0	36.1
H	4231.1	-58.9	-58.6	1.7	8.4	-51.9	-13.0	38.9
V	4231.1	-56.7	-58.6	1.7	8.4	-51.9	-13.0	38.9
H	5078.0	-62.2	-55.6	1.9	8.7	-48.8	-13.0	35.8
V	5078.0	-54.7	-57.0	1.9	8.7	-50.1	-13.0	37.1

16QAM, BW 3MHz
Channel: 20415

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1648.6	-58.6	-66.2	1.0	6.9	-60.4	-13.0	47.4
V	1648.6	-61.9	-69.0	1.0	6.9	-63.2	-13.0	50.2
H	2472.7	-54.7	-57.2	1.3	7.4	-51.1	-13.0	38.1
V	2472.7	-57.3	-58.8	1.3	7.4	-52.7	-13.0	39.7
H	3297.0	-50.4	-52.0	1.5	7.4	-46.1	-13.0	33.1
V	3297.0	-55.1	-55.8	1.5	7.4	-49.9	-13.0	36.9
H	4121.1	-58.8	-58.3	1.7	8.1	-51.9	-13.0	38.9
V	4121.3	-59.2	-58.0	1.7	8.1	-51.6	-13.0	38.6
V	4945.5	-62.2	-58.5	1.9	8.7	-51.7	-13.0	38.7

Channel: 20525

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1670.6	-62.2	-68.3	1.1	6.6	-62.7	-13.0	49.7
V	1670.6	-63.5	-70.0	1.1	6.6	-64.4	-13.0	51.4
H	2505.8	-49.4	-51.7	1.3	7.4	-45.6	-13.0	32.6
V	2505.8	-58.5	-83.2	1.3	7.4	-77.1	-13.0	64.1
H	3341.0	-55.7	-57.1	1.5	7.5	-51.1	-13.0	38.1
V	3341.0	-58.9	-59.4	1.5	7.5	-53.4	-13.0	40.4
H	4176.2	-59.0	-58.7	1.7	8.2	-52.2	-13.0	39.2
V	4176.4	-60.4	-59.7	1.7	8.2	-53.2	-13.0	40.2
V	5011.0	-59.2	-78.4	1.9	8.7	-71.6	-13.0	58.6

Channel: 20635

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1692.5	-62.0	-68.2	1.1	6.4	-62.8	-13.0	49.8
V	1692.5	-59.0	-65.4	1.1	6.4	-60.1	-13.0	47.1
H	2538.7	-46.8	-39.2	1.3	7.6	-32.9	-13.0	19.9
V	2538.7	-53.9	-56.3	1.3	7.6	-50.0	-13.0	37.0
H	3384.9	-54.8	-56.5	1.5	7.6	-50.5	-13.0	37.5
V	3384.9	-56.0	-56.4	1.5	7.6	-50.4	-13.0	37.4
H	4231.1	-61.5	-61.2	1.7	8.4	-54.5	-13.0	41.5
V	4231.3	-60.2	-59.1	1.7	8.4	-52.4	-13.0	39.4
H	5077.0	-62.3	-57.1	1.9	8.7	-50.2	-13.0	37.2
V	5077.0	-60.7	-56.2	1.9	8.7	-49.4	-13.0	36.4

QPSK, BW 5MHz
Channel: 20425

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1653.1	-58.7	-64.5	1.1	6.8	-58.7	-13.0	45.7
V	1653.0	-60.8	-67.7	1.1	6.8	-61.9	-13.0	48.9
H	2479.5	-52.9	-55.4	1.3	7.4	-49.3	-13.0	36.3
V	2479.5	-57.3	-54.0	1.3	7.4	-47.9	-13.0	34.9
H	3306.1	-52.7	-54.3	1.5	7.4	-48.4	-13.0	35.4
V	3306.1	-55.9	-57.4	1.5	7.4	-51.4	-13.0	38.4
H	4132.5	-59.3	-59.1	1.7	8.1	-52.7	-13.0	39.7
V	4132.5	-59.2	-58.0	1.7	8.1	-51.5	-13.0	38.5
V	4959.0	-60.3	-56.7	1.9	8.7	-49.9	-13.0	36.9

Channel: 20525

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1673.0	-61.9	-68.0	1.1	6.6	-62.4	-13.0	49.4
V	1673.0	-62.6	-69.1	1.1	6.6	-63.5	-13.0	50.5
H	2509.5	-52.6	-54.9	1.3	7.4	-48.8	-13.0	35.8
V	2509.5	-58.6	-83.3	1.3	7.4	-77.2	-13.0	64.2
H	3346.0	-56.7	-58.1	1.5	7.5	-52.1	-13.0	39.1
V	3346.0	-57.8	-58.3	1.5	7.5	-52.3	-13.0	39.3
H	4182.6	-60.1	-59.8	1.7	8.2	-53.3	-13.0	40.3
V	4182.5	-60.5	-59.8	1.7	8.2	-53.3	-13.0	40.3
H	5019.0	-62.9	-61.2	1.9	8.7	-54.3	-13.0	41.3
V	5019.0	-59.8	-59.0	1.9	8.7	-52.1	-13.0	39.1

Channel: 20625

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1693.0	-60.4	-66.6	1.1	6.4	-61.2	-13.0	48.2
V	1693.0	-58.9	-65.3	1.1	6.4	-60.0	-13.0	47.0
H	2539.6	-49.8	-42.2	1.3	7.6	-35.9	-13.0	22.9
V	2539.6	-58.5	-60.9	1.3	7.6	-54.6	-13.0	41.6
H	3386.0	-54.7	-56.4	1.5	7.6	-50.4	-13.0	37.4
V	3386.0	-54.0	-54.4	1.5	7.6	-48.4	-13.0	35.4
H	4232.5	-57.6	-57.3	1.7	8.4	-50.6	-13.0	37.6
V	4232.5	-59.7	-58.6	1.7	8.4	-51.9	-13.0	38.9
H	5079.0	-60.6	-55.4	1.9	8.7	-48.5	-13.0	35.5
V	5079.0	-55.2	-50.7	1.9	8.7	-43.9	-13.0	30.9

16QAM, BW 5MHz
Channel: 20425

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1653.0	-59.0	-64.8	1.1	6.8	-59.0	-13.0	46.0
V	1653.0	-59.8	-66.7	1.1	6.8	-60.9	-13.0	47.9
H	2479.5	-52.4	-54.9	1.3	7.4	-48.8	-13.0	35.8
V	2479.5	-57.9	-54.6	1.3	7.4	-48.5	-13.0	35.5
H	3306.0	-56.4	-58.0	1.5	7.4	-52.1	-13.0	39.1
V	3306.0	-57.0	-58.5	1.5	7.4	-52.5	-13.0	39.5
H	4132.5	-60.7	-60.5	1.7	8.1	-54.1	-13.0	41.1
V	4132.5	-61.6	-60.4	1.7	8.1	-53.9	-13.0	40.9
V	4958.9	-61.9	-58.3	1.9	8.7	-51.5	-13.0	38.5

Channel: 20525

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1672.9	-62.5	-68.6	1.1	6.6	-63.0	-13.0	50.0
V	1672.9	-62.5	-69.0	1.1	6.6	-63.4	-13.0	50.4
H	2509.6	-48.4	-50.7	1.3	7.4	-44.6	-13.0	31.6
V	2509.6	-55.1	-79.8	1.3	7.4	-73.7	-13.0	60.7
H	3346.0	-56.7	-58.1	1.5	7.5	-52.1	-13.0	39.1
V	3346.0	-59.0	-59.5	1.5	7.5	-53.5	-13.0	40.5
H	4182.5	-59.8	-59.5	1.7	8.2	-53.0	-13.0	40.0
V	4182.5	-58.7	-58.0	1.7	8.2	-51.5	-13.0	38.5
V	5018.0	-59.4	-58.6	1.9	8.7	-51.7	-13.0	38.7

Channel: 20625

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1693.0	-60.0	-66.2	1.1	6.4	-60.8	-13.0	47.8
V	1693.0	-58.2	-64.6	1.1	6.4	-59.3	-13.0	46.3
H	2539.6	-45.7	-38.1	1.3	7.6	-31.8	-13.0	18.8
V	2539.6	-53.0	-55.4	1.3	7.6	-49.1	-13.0	36.1
H	3386.0	-53.3	-55.0	1.5	7.6	-49.0	-13.0	36.0
V	3386.0	-52.6	-53.0	1.5	7.6	-47.0	-13.0	34.0
H	4232.5	-58.7	-58.4	1.7	8.4	-51.7	-13.0	38.7
V	4232.5	-58.6	-57.5	1.7	8.4	-50.8	-13.0	37.8
H	5079.0	-60.6	-55.4	1.9	8.7	-48.5	-13.0	35.5
V	5079.0	-55.1	-50.6	1.9	8.7	-43.8	-13.0	30.8

QPSK, BW 10MHz
Channel: 20450

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1649.2	-59.4	-65.2	1.0	6.9	-59.4	-13.0	46.4
V	1649.2	-62.6	-69.5	1.0	6.9	-63.7	-13.0	50.7
H	2473.5	-52.0	-54.5	1.3	7.4	-48.4	-13.0	35.4
V	2473.5	-59.1	-55.8	1.3	7.4	-49.7	-13.0	36.7
H	3298.3	-53.2	-54.8	1.5	7.4	-48.9	-13.0	35.9
V	3298.3	-53.7	-55.2	1.5	7.4	-49.3	-13.0	36.3
H	4123.0	-57.4	-57.2	1.7	8.1	-50.8	-13.0	37.8
V	4123.0	-58.7	-57.5	1.7	8.1	-51.1	-13.0	38.1
V	4947.6	-62.1	-58.5	1.9	8.7	-51.7	-13.0	38.7

Channel: 20525

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1664.1	-60.4	-66.5	1.1	6.7	-60.8	-13.0	47.8
V	1664.2	-60.2	-66.7	1.1	6.7	-61.0	-13.0	48.0
H	2496.4	-51.7	-54.0	1.3	7.4	-47.9	-13.0	34.9
V	2496.4	-58.2	-82.9	1.3	7.4	-76.8	-13.0	63.8
H	3328.3	-57.2	-58.6	1.5	7.5	-52.6	-13.0	39.6
V	3328.3	-60.4	-60.9	1.5	7.5	-54.9	-13.0	41.9
H	4160.4	-58.3	-58.0	1.7	8.2	-51.5	-13.0	38.5
V	4160.5	-59.7	-59.0	1.7	8.2	-52.5	-13.0	39.5
H	4492.6	-62.2	-60.5	1.8	8.9	-53.4	-13.0	40.4
V	4492.5	-58.1	-57.3	1.8	8.9	-50.2	-13.0	37.2

Channel: 20600

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1679.2	-62.0	-68.2	1.1	6.5	-62.7	-13.0	49.7
V	1679.2	-62.4	-68.8	1.1	6.5	-63.3	-13.0	50.3
H	2518.8	-45.3	-37.7	1.3	7.5	-31.5	-13.0	18.5
V	2518.8	-53.8	-56.2	1.3	7.5	-50.0	-13.0	37.0
H	3358.3	-54.2	-55.9	1.5	7.5	-49.9	-13.0	36.9
V	3358.3	-56.8	-57.2	1.5	7.5	-51.2	-13.0	38.2
H	4198.0	-63.7	-63.4	1.7	8.3	-56.8	-13.0	43.8
V	4198.0	-63.2	-62.1	1.7	8.3	-55.5	-13.0	42.5
V	5038.0	-63.2	-58.7	1.9	8.8	-51.8	-13.0	38.8

16QAM, BW 10MHz
Channel: 20450

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1649.0	-60.3	-66.1	1.0	6.9	-60.3	-13.0	47.3
V	1649.0	-61.7	-68.6	1.0	6.9	-62.8	-13.0	49.8
H	2473.9	-52.5	-55.0	1.3	7.4	-48.9	-13.0	35.9
V	2473.9	-59.6	-56.3	1.3	7.4	-50.2	-13.0	37.2
H	3298.4	-57.0	-58.6	1.5	7.4	-52.7	-13.0	39.7
V	3298.5	-56.4	-57.9	1.5	7.4	-52.0	-13.0	39.0
H	4123.0	-59.9	-59.7	1.7	8.1	-53.3	-13.0	40.3
V	4123.0	-60.6	-59.4	1.7	8.1	-53.0	-13.0	40.0
V	4947.5	-63.2	-59.6	1.9	8.7	-52.8	-13.0	39.8

Channel: 20525

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1664.1	-60.5	-66.6	1.1	6.7	-60.9	-13.0	47.9
V	1664.1	-61.9	-68.4	1.1	6.7	-62.7	-13.0	49.7
H	2496.3	-52.1	-54.4	1.3	7.4	-48.3	-13.0	35.3
V	2496.2	-59.3	-84.0	1.3	7.4	-77.9	-13.0	64.9
H	3328.3	-57.7	-59.1	1.5	7.5	-53.1	-13.0	40.1
V	3328.3	-58.4	-58.9	1.5	7.5	-52.9	-13.0	39.9
H	4160.4	-59.1	-58.8	1.7	8.2	-52.3	-13.0	39.3
V	4160.4	-58.9	-58.2	1.7	8.2	-51.7	-13.0	38.7
H	4492.6	-63.6	-61.9	1.8	8.9	-54.8	-13.0	41.8
V	4492.6	-61.1	-60.3	1.8	8.9	-53.2	-13.0	40.2

Channel: 20600

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1679.1	-63.4	-69.6	1.1	6.5	-64.1	-13.0	51.1
V	1679.1	-62.6	-69.0	1.1	6.5	-63.5	-13.0	50.5
H	2518.8	-46.7	-39.1	1.3	7.5	-32.9	-13.0	19.9
V	2518.8	-56.5	-58.9	1.3	7.5	-52.7	-13.0	39.7
H	3358.4	-55.0	-56.7	1.5	7.5	-50.7	-13.0	37.7
V	3358.4	-59.3	-59.7	1.5	7.5	-53.7	-13.0	40.7
H	4198.0	-62.1	-61.8	1.7	8.3	-55.2	-13.0	42.2
V	4198.0	-60.1	-59.0	1.7	8.3	-52.4	-13.0	39.4


9. Frequency Stability

9.1 Measurement procedure

[FCC 22.355, 2.1055, IC RSS-132 4.3]

The EUT was placed of an inside of an constant temperature chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10°C intervals and the unit was allowed to stabilize at each measurement. The frequency drift was measured with the normal Temperature and voltage tolerance and it is presented as the ppm unit.

- Test configuration

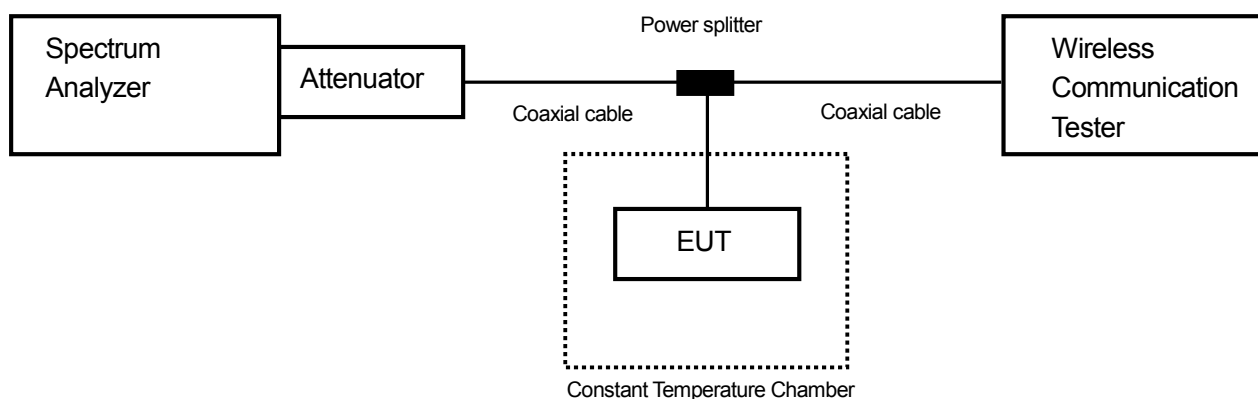

9.2 Limit

±2.5ppm

9.3 Measurement result

Date : June 24, 2015
 Temperature : 26.1 [°C]
 Humidity : 59.5 [%]
 Test place : Shielded room No.4

Test engineer : Hikaru Shibata

Date : June 25, 2015
 Temperature : 27.4 [°C]
 Humidity : 52.3 [%]
 Test place : Shielded room No.4

Test engineer : Hikaru Shibata



Zacta

**[WCDMA Band V]
(Channel: 4183)**

Limit: $\pm 0.00025\% = \pm 2.5\text{ppm}$					
Power Supply [V]	Temperature [°C]	Measurements Frequency [Hz]	Frequency Tolerance [ppm]	Limit [ppm]	Result
3.90	25(Ref.)	836,603,615	0.00000	± 2.5	Pass
	50	836,601,921	-2.02485	± 2.5	Pass
	40	836,603,245	-0.44226	± 2.5	Pass
	30	836,604,075	0.54984	± 2.5	Pass
	20	836,604,974	1.62443	± 2.5	Pass
	10	836,604,901	1.53717	± 2.5	Pass
	0	836,605,406	2.14080	± 2.5	Pass
	-10	836,603,236	-0.45302	± 2.5	Pass
	-20	836,604,604	1.18216	± 2.5	Pass
	-30	836,605,271	1.97943	± 2.5	Pass
3.315	25	836,601,904	-2.04517	± 2.5	Pass
4.485	25	836,603,237	-0.45183	± 2.5	Pass

Calculation;

$$\text{Frequency Tolerance (ppm)} = \frac{\text{Measurements Frequency (Hz)} - \text{Reference Frequency (Hz)}}{\text{Reference Frequency (Hz)}} \times 1000000$$



Zacta

**[LTE Band V]
(Channel: 20525)**

Limit: $\pm 0.00025\% = \pm 2.5\text{ppm}$					
Power Supply [V]	Temperature [°C]	Measurements Frequency [Hz]	Frequency Tolerance [ppm]	Limit [ppm]	Result
3.90	25(Ref.)	836,501,758	0.00000	± 2.5	Pass
	50	836,502,009	0.30006	± 2.5	Pass
	40	836,502,465	0.84519	± 2.5	Pass
	30	836,500,982	-0.92778	± 2.5	Pass
	20	836,503,538	2.12791	± 2.5	Pass
	10	836,501,352	-0.48535	± 2.5	Pass
	0	836,503,032	1.52301	± 2.5	Pass
	-10	836,503,520	2.10639	± 2.5	Pass
	-20	836,503,313	1.85893	± 2.5	Pass
	-30	836,503,123	1.63180	± 2.5	Pass
3.315	25	836,503,613	2.21757	± 2.5	Pass
4.485	25	836,502,452	0.82965	± 2.5	Pass

Calculation;

$$\text{Frequency Tolerance (ppm)} = \frac{\text{Measurements Frequency (Hz)} - \text{Reference Frequency (Hz)}}{\text{Reference Frequency (Hz)}} \times 1000000$$



Zacta

10. Uncertainty of measurement

Expanded uncertainties stated are calculated with a coverage Factor $k=2$.

Please note that these results are not taken into account when determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission at mains port	$\pm 3.0\text{dB}$
Radiated emission (9kHz – 30MHz)	$\pm 4.4\text{dB}$
Radiated emission (30MHz – 1000MHz)	$\pm 4.5\text{dB}$
Radiated emission (1000MHz – 26GHz)	$\pm 3.9\text{dB}$



Zacta

11. Laboratory description

1. Location:

TÜV SÜD Zacta Ltd. Yonezawa Testing Center
 4149-7 Hachimanpara 5-chome Yonezawa-shi Yamagata 992-1128 Japan
 Phone: +81-238-28-2880 Fax: +81-238-28-2888

2. Facility filing information:

1) NVLAP accreditation: NVLAP Lab. code: 200306-0

2) VLAC accreditation: Lab. code: VLAC-013

Site name	Radiated emission	Conducted emission for mains port	Conducted emission for telecom port	Radiated emission (CMAD)	Expiry Date
3m Semi-anechoic chamber	VLAC-013	VLAC-013	VLAC-013	-	Jul. 3, 2017
10m Semi-anechoic chamber No.1				VLAC-013	
10m Semi-anechoic chamber No.2				VLAC-013	
Shielded room No.1	-	VLAC-013	-	-	

3) FCC filing:

Site name	Registration Number	Expiry Date
Site 3	91065	Oct. 1, 2017
3m Semi-anechoic chamber	540072	Feb. 20, 2017
10m Semi-anechoic chamber No.1		
10m Semi-anechoic chamber No.2		
Shielded room No.1		

4) Industry Canada Oats site filing:

Site name	Sites on file: Oats 3m/10m	Expiry Date
Site 3	4224A-3	Dec. 3, 2017
3m Semi-anechoic chamber	4224A-4	
10m Semi-anechoic chamber No.1	4224A-5	
10m Semi-anechoic chamber No.2	4224A-6	Jan. 15, 2017

5) VCCI site filing:

Site name	Radiated emission	Conducted emission for mains port	Conducted emission for telecom port	Expiry Date
Site 3	R-138	C-134	T-1222	Nov. 16, 2017
3m Semi-anechoic chamber	A-0166	A-0166	A-0166	Jul. 3, 2017
10m Semi-anechoic chamber No.1				
10m Semi-anechoic chamber No.2				
Shielded room No.1	-	A-0166		

6) TÜV SÜD PS authorization:

Authorized as an EMC test laboratory

7) TÜV Rheinland authorization:

Authorized as an EMC test laboratory



Zacta

Appendix A. Test equipment

Antenna port conducted test

Equipment	Company	Model No.	Serial No.	Cal. due	Cal. date
Spectrum analyzer	Agilent Technologies	E4440A	US44302655	Jun. 30, 2016	Jun. 11, 2015
Microwave cable	RS	YH20_S1	N/A (S389)	Aug. 31, 2015	Aug. 30, 2014
Attenuator	Weinschel	56-10	J4180	Nov. 30, 2015	Nov. 12, 2014
Microwave cable	SUHNER	SUCOFLEX104/1.5m	199121/4	Oct. 31, 2015	Oct. 7, 2014
Microwave cable	SUHNER	SUCOFLEX104/1.5m	322086/4	Jul. 31, 2015	Jul. 30, 2014
Power splitter	ANRITSU	K240B	020205	Jul. 31, 2015	Jul. 12, 2014
Wideband radio frequency tester	ROHDE&SCHWARZ	CMW500	116338	Apr. 30, 2016	Apr. 2, 2015
Operation type temperature controlled bath	Espec	PL1KP	14007261	Jan. 31, 2016	Jan. 9, 2015

Radiated emission

Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100451	Dec. 31, 2015	Dec. 25, 2014
Preamplifier	ANRITSU	MH648A	M96057	Jun. 30, 2016	Jun. 12, 2015
Biconical antenna	Schwarzbeck	VHA9103/BBA9106	2125	Jun. 30, 2016	Jun. 4, 2015
Log periodic antenna	Schwarzbeck	UHALP9108A	0560	Jun. 30, 2016	Jun. 4, 2015
Attenuator	TME	CFA-01NPJ-6	N/A (S275)	Jun. 30, 2016	Jun. 23, 2015
Attenuator	TME	CFA-01NPJ-3	N/A (S272)	Jun. 30, 2016	Jun. 23, 2015
Spectrum analyzer	Agilent Technologies	E4440A	US44302655	Jun. 30, 2016	Jun. 11, 2015
Preamplifier	TSJ	MLA-100M18-B02-40	1929118	May 31, 2016	May 1, 2015
Attenuator	AEROFLEX	26A-10	081217-08	Mar. 31, 2016	Mar. 12, 2015
Dipole antenna	Schwarzbeck	VHAP	1020	Sep. 30, 2015	Sep. 5, 2014
Dipole antenna	Schwarzbeck	UHAP	994	Sep. 30, 2015	Sep. 5, 2014
Double ridged guide antenna	EMCO	3115	5205	Feb. 29, 2016	Feb. 16, 2015
Attenuator	Agilent Technologies	8491B	MY39268633	Feb. 29, 2016	Feb. 1, 2015
Double ridged guide antenna	EMCO	3115	000058532	Oct. 31, 2015	Oct. 14, 2014
Signal generator	ROHDE&SCHWARZ	SMB100A	177525	Jun. 30, 2016	Jun. 19, 2015
Power amplifier	R&K	CGA020M602-2633R	B40240	Mar.31, 2016	Mar. 23, 2015
Microwave cable	SUHNER	SUCOFELX102/2m	31648/2	Mar. 28, 2016	Mar. 10, 2015
High pass filter	Micro-Tronics	HPM50115	004	Jul. 31, 2015	Jul. 12, 2014
High pass filter	Wainwright	WHKX2.8/18G-6SS	1	Jul. 31, 2015	Jul. 17, 2014
Wideband radio frequency tester	ROHDE&SCHWARZ	CMW500	126079	Aug. 31, 2015	Aug. 28, 2014
Microwave cable	SUHNER	SUCOFLEX104/9m	346316/4	Oct. 31, 2015	Oct. 31, 2014
		SUCOFLEX104/1m	322084/4	Oct. 31, 2015	Oct. 31, 2014
		SUCOFLEX104/1.5m	317226/4	Oct. 31, 2015	Oct. 31, 2014
		SUCOFLEX104/7m	41625/6	Oct. 31, 2015	Oct. 31, 2014
PC	DELL	DIMENSION E521	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V5.3.61	N/A	N/A
3m Semi-anechoic chamber	TOKIN	N/A	N/A (9002-NSA)	Apr. 30, 2016	Apr. 27, 2015
3m Semi-anechoic chamber	TOKIN	N/A	N/A (9002-SVSWR)	Apr. 30, 2016	Apr. 27, 2015

*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.