



Japan

# TEST REPORT

Report number : JPD-TR-18162-0

Issue date : October 1, 2018

The device, as described herewith, was tested pursuant to applicable test procedure and complies with the requirements of;

## FCC Part15 Subpart C

The test results are traceable to the international or national standards.

Applicant	: KYOCERA Corporation
Equipment under test (EUT)	: Mobile Phone
Model number	: JA28
FCC ID	: JOYJA28

Date of test : August 7, 10, 11, 17, 20, 2018

Test place : TÜV SÜD Zacta Ltd. Yonezawa Testing Center  
5-4149-7, Hachimanpara, Yonezawa-shi,  
Yamagata, 992-1128 Japan  
Phone: +81-238-28-2881 Fax: +81-238-28-2888

Test results : Complied

Due to merger of TÜV SÜD Japan Ltd. and TÜV SÜD Zacta Ltd. on October 1st, 2018, this test report was issued by TÜV SÜD Japan Ltd.

The results in this report are applicable only to the equipment tested.

This report shall not be re-produced except in full without the written approval of TÜV SÜD Japan Ltd.

This test report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, ILAC-MRA, or any agency of the federal government.

Tested by : Tadahiro Seino      Taiki Watanabe  
Tadahiro Seino      Taiki Watanabe

Approved by : Hiroaki Suzuki  
Hiroaki Suzuki  
Deputy Manager of RF Group



## ***Table of contents***

---

	Page
<b>1. Summary of Test .....</b>	<b>4</b>
1.1 Purpose of test .....	4
1.2 Standards .....	4
1.3 List of applied test to the EUT .....	4
1.4 Modification to the EUT by laboratory .....	4
<b>2. Equipment Under Test .....</b>	<b>5</b>
2.1 General Description of equipment .....	5
2.2 EUT information .....	5
2.3 Variation of the family model(s) .....	6
2.4 Operating channels and frequencies .....	6
2.5 Operating mode .....	6
2.6 Operating flow .....	7
<b>3. Configuration of equipment .....</b>	<b>8</b>
3.1 Equipment(s) used .....	8
3.2 Cable(s) used .....	8
3.3 System configuration .....	8
<b>4. 6dB Bandwidth .....</b>	<b>9</b>
4.1 Measurement procedure .....	9
4.2 Limit .....	9
4.3 Measurement result .....	9
4.4 Trace data .....	10
<b>5. Maximum Peak Output Power .....</b>	<b>11</b>
5.1 Measurement procedure .....	11
5.2 Limit .....	11
5.3 Measurement result .....	11
<b>6. Band Edge Compliance of RF Conducted Emissions .....</b>	<b>12</b>
6.1 Measurement procedure .....	12
6.2 Limit .....	12
6.3 Measurement result .....	12
6.4 Trace data .....	13
<b>7. Spurious emissions - Conducted - .....</b>	<b>14</b>
7.1 Measurement procedure .....	14
7.2 Limit .....	14
7.3 Measurement result .....	14
7.4 Trace data .....	15
<b>8. Spurious Emissions - Radiated - .....</b>	<b>18</b>
8.1 Measurement procedure .....	18
8.2 Calculation method .....	19
8.3 Limit .....	19
8.4 Test data .....	20
<b>9. Restricted Band of Operation .....</b>	<b>30</b>
9.1 Measurement procedure .....	30
9.2 Limit .....	30



Japan

9.3 Measurement Result.....	31
9.4 Test data.....	31
<b>10. Transmitter Power Spectral Density.....</b>	<b>34</b>
10.1 Measurement procedure.....	34
10.2 Limit.....	34
10.3 Measurement result.....	34
10.4 Trace data.....	35
<b>11. AC Power Line Conducted Emissions.....</b>	<b>36</b>
11.1 Measurement procedure.....	36
11.2 Calculation method.....	36
11.3 Limit.....	37
11.4 Test data.....	37
<b>12. Antenna requirement.....</b>	<b>38</b>
<b>13. Uncertainty of measurement.....</b>	<b>39</b>
<b>14. Laboratory Information.....</b>	<b>40</b>
<b>Appendix A. Test equipment.....</b>	<b>41</b>
<b>Appendix B. Duty Cycle.....</b>	<b>42</b>

## 1. Summary of Test

---

### 1.1 Purpose of test

It is the original test in order to verify conformance to FCC Part 15 Subpart C.

### 1.2 Standards

CFR47 FCC Part 15 Subpart C

#### 1.2.1 Test Methods

ANSI C63.10-2013, KDB558074 D01 DTS Meas Guidance v04

#### 1.2.2 Deviation from standards

None

### 1.3 List of applied test to the EUT

Test items Section	Test items	Condition	Result
15.247(a)(2)	6dB Bandwidth	Conducted	PASS
15.247(b)(3)	Maximum Peak Output Power	Conducted	PASS
15.247(d)	Band Edge Compliance of RF Conducted Emissions	Conducted	PASS
15.247(d) 15.205 15.209	Spurious Emissions	Conducted Radiated	PASS
15.247(d) 15.205 15.209	Restricted Bands of Operation	Radiated	PASS
15.247(e)	Transmitter Power Spectral Density	Conducted	PASS
15.207	AC Power Line Conducted Emissions	Conducted	PASS

#### 1.3.1 Test set up

Table-Top

### 1.4 Modification to the EUT by laboratory

None



Japan

## **2. Equipment Under Test**

---

### **2.1 General Description of equipment**

EUT is the Mobile Phone.

### **2.2 EUT information**

Applicant	:	KYOCERA Corporation Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa, Japan Phone: +81-45-943-6253 Fax: +81-45-943-6314
Equipment under test	:	Mobile Phone
Trade name	:	Kyocera
Model number	:	JA28
Serial number	:	N/A
EUT condition	:	Pre-Production
Power ratings	:	Battery: DC 3.8V
Size	:	(W) 48.0mm × (D) 14.0mm × (H) 138.0mm
Environment	:	Indoor and Outdoor use
Operating environment	:	Temperature: 5°C to 35°C Humidity: 35% to 85%
RF Specification Protocol	:	Bluetooth 4.2 + EDR
Frequency range	:	2402MHz-2480MHz
Number of RF Channels	:	40 Channels
Modulation method/ Data rate	:	GFSK (1Mbps)
Channel separation	:	2MHz
Conducted power	:	0.795mW
Antenna type	:	Internal antenna
Antenna gain	:	-0.5dBi

## 2.3 Variation of the family model(s)

Not applicable

## 2.4 Operating channels and frequencies

Channel	Frequency [MHz]	Channel	Frequency [MHz]
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

## 2.5 Operating mode

The EUT had been tested under operating condition.  
There are three channels have been tested as following:

Tested Channel	Frequency [MHz]
Low	2402
Middle	2440
High	2480

The pre-test has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates.

Tested Channel	Modulation Type	Data Rate
Low, Middle, High	GFSK	1Mbps

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in Y axis and the worst case recorded.

## 2.6 Operating flow

### [Tx mode]

- i) Test program setup to the DM tool
- ii) Select a Test mode  
Operating frequency: Channel Low: 2402MHz, Channel Middle: 2440MHz, Channel High: 2480MHz
- iii) Start test mode

### [Rx mode]

- i) Test program setup to the DM tool
- ii) Select a Test mode  
Operating frequency: Channel Low: 2402MHz, Channel Middle: 2440MHz, Channel High: 2480MHz
- iii) Start test mode

### 3. Configuration of equipment

#### 3.1 Equipment(s) used

No.	Equipment	Company	Model No.	Serial No.	FCC ID / DoC	Comment
1	Mobile Phone	KYOCERA	JA28	N/A	JOYJA28	EUT
2	AC Adapter	au	N/A	N/A	N/A	*


\*: AC power line Conducted Emission Test.

#### 3.2 Cable(s) used

No.	Cable	Length[m]	Shield	Connector	Comment
a	USB cable (for AC Adapter)	0.8	Yes	Metal	*

\*: AC power line Conducted Emission Test.

#### 3.3 System configuration

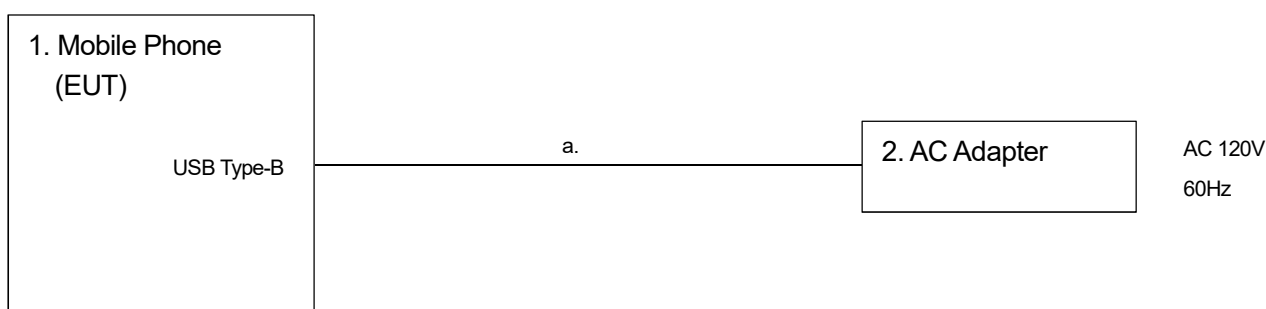

Note1: Numbers assigned to equipment or cables on this diagram correspond to the list in "3.1 Equipment(s) used" and "3.2 Cable(s) used".



## 4. 6dB Bandwidth

### 4.1 Measurement procedure


[FCC 15.247(a)(2), KDB558074 D01 v04, Section 8.2]

The bandwidth at 6dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) RBW = 100kHz.
- b) VBW  $\geq$  3 x RBW.
- c) Sweep time = auto-couple.
- d) Detector = peak.
- e) Trace mode = max hold.

- Test configuration

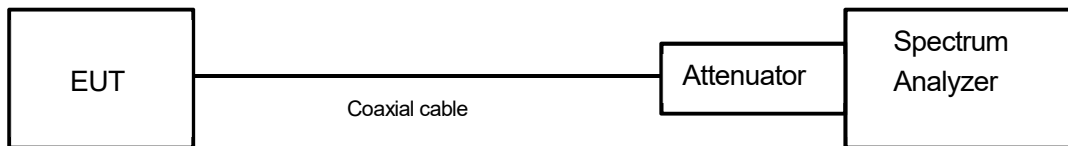

### 4.2 Limit

The minimum permissible 6dB bandwidth is 500kHz.

### 4.3 Measurement result

Date : August 7, 2018  
 Temperature : 24.8 [°C]  
 Humidity : 55.5 [%]  
 Test place : Shielded room No.4

Test engineer : Tadahiro Seino


Channel	Frequency [MHz]	6dB bandwidth [MHz]
Low	2402	0.676
Middle	2440	0.673
High	2480	0.676




Japan

### 4.4 Trace data


#### Channel Low

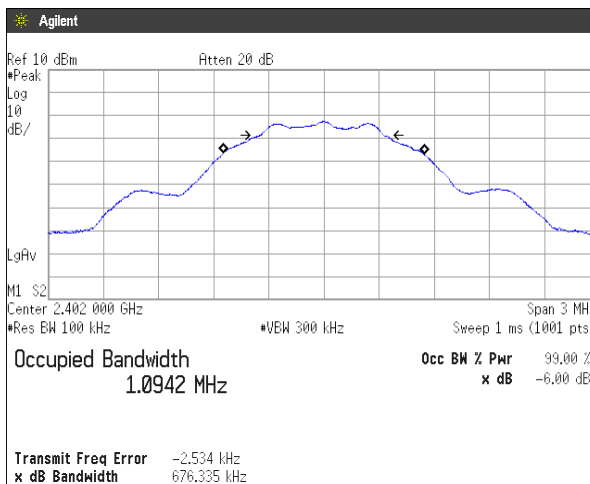

#### Channel Middle

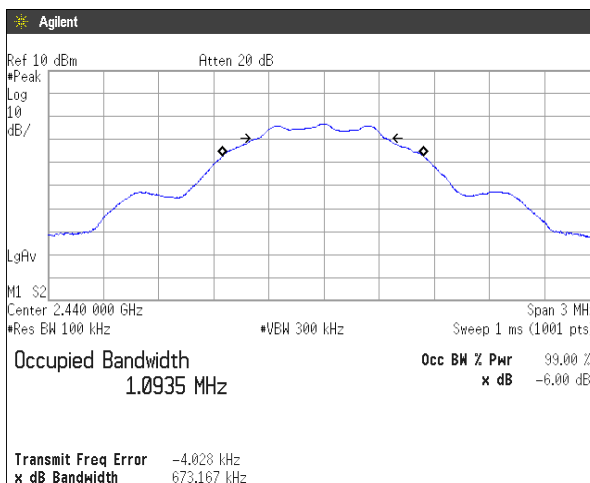

#### Channel High

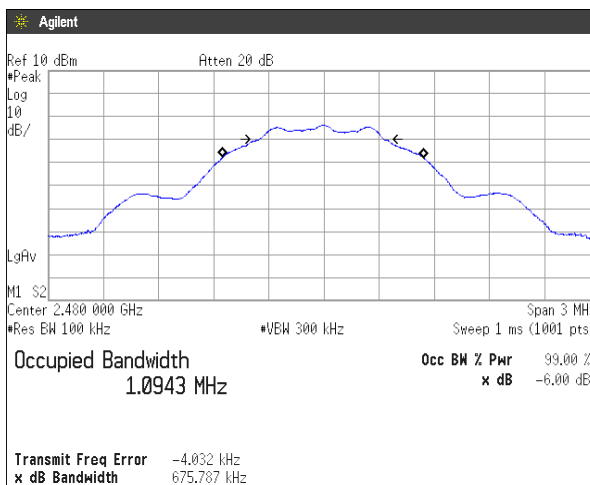


## 5. Maximum Peak Output Power

### 5.1 Measurement procedure

[FCC 15.247(b)(3), KDB558074 D01 v04, Section 9.1.3]

The peak power is measured with a power sensor connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

- Test configuration

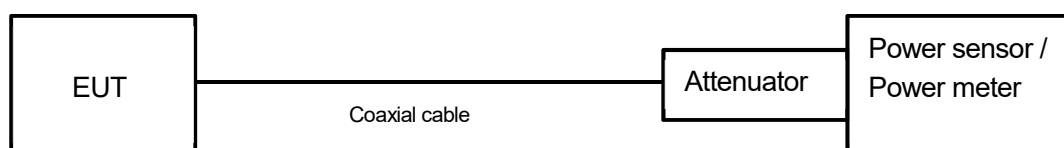

### 5.2 Limit

1W(1000mW) or less

### 5.3 Measurement result

Date : August 20, 2018

Temperature : 24.4 [°C]

Humidity : 59.2 [%]

Test place : Shielded room No.4

Test engineer :

Tadahiro Seino

### Battery Full

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Peak Output Power (mW)	Limit (mW)	Result
Low	2402	-11.92	10.92	-1.00	0.795	≤1000	PASS
Middle	2440	-12.38	10.92	-1.46	0.715	≤1000	PASS
High	2480	-12.99	10.92	-2.07	0.621	≤1000	PASS

Calculation;

$$\text{Reading (dBm)} + \text{Factor (dB)} = \text{Level (dBm)}$$

$$10\log P = \text{Level (dBm)}$$

$$P = 10^{(\text{Maximum Peak Output Power} / 10)} \text{ (mW)}$$

## 6. Band Edge Compliance of RF Conducted Emissions

### 6.1 Measurement procedure


[FCC 15.247(d), KDB558074 D01 v04, Section 11.0]

The Band Edge is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- Span = Arbitrary setting. (Setting suitable for measurement.)
- RBW = 100kHz.
- VBW  $\geq 3 \times$  RBW
- Sweep time = auto-couple.
- Detector = peak.
- Trace mode = max hold.

- Test configuration

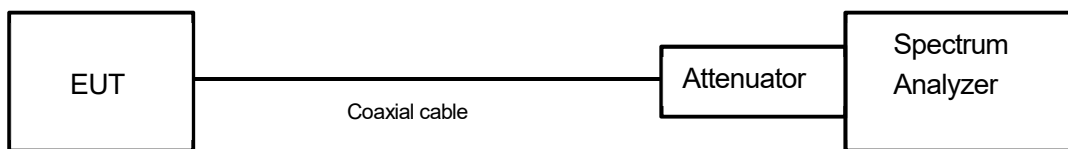

### 6.2 Limit

In any 100kHz bandwidth outside the frequency band the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

### 6.3 Measurement result

Date : August 7, 2018

Temperature : 24.8 [°C]

Humidity : 55.5 [%]

Test place : Shielded room No.4

Test engineer :

Tadahiro Seino


Channel	Frequency (MHz)	RF Power Level (dBm)	Band-edge Frequency (MHz)	Band-edge Level (dBm)	Difference Level (dBm)	Limit (dBm)	Result
Low	2402	-12.51	2400.00	-65.79	53.28	At least 20dB below from peak of RF	PASS
High	2480	-13.62	2483.80	-70.39	56.77	At least 20dB below from peak of RF	PASS




Japan

## 6.4 Trace data

### Channel Low

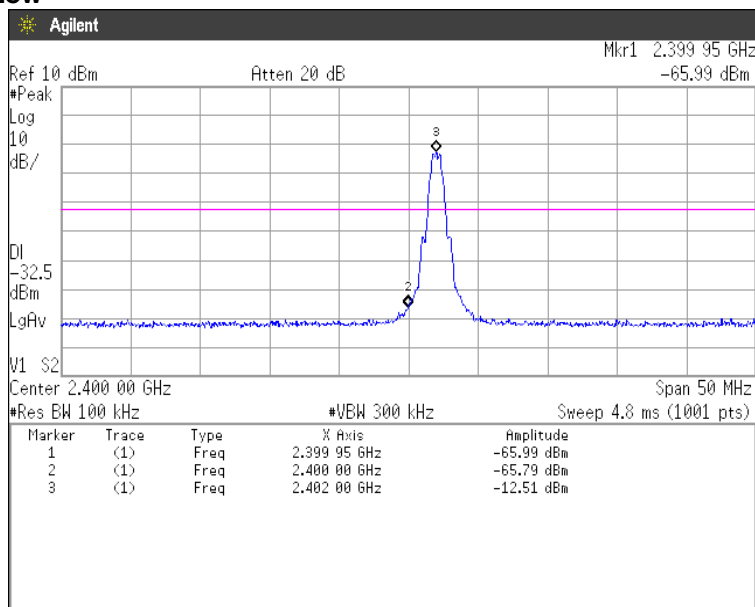

### Channel High

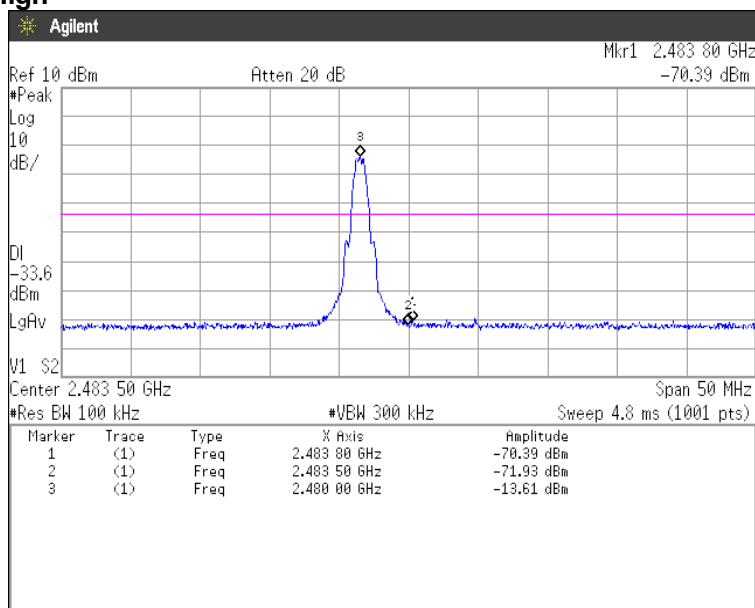

## 7. Spurious emissions - Conducted -

### 7.1 Measurement procedure


[FCC 15.247(d), KDB558074 D01 v04, Section 11.0]

The spurious emissions (Conducted) are measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- Span = wide enough to fully capture the emission being measured.
- RBW = 100 kHz.
- VBW  $\geq$  RBW.
- Sweep time = auto-couple.
- Detector = peak.
- Trace mode = max hold.

- Test configuration

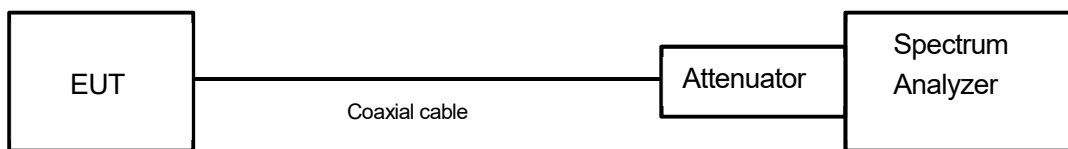

### 7.2 Limit

In any 100kHz bandwidth outside the frequency band the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

### 7.3 Measurement result

Date : August 7, 2018

Temperature : 24.8 [°C]

Humidity : 55.5 [%]

Test place : Shielded room No.4


Test engineer :

Tadahiro Seino


Channel	Frequency [MHz]	Limit [dB]	Results Chart	Result
Low	2402	At least 20dB below from peak of RF	See the trace Data	PASS
Middle	2440	At least 20dB below from peak of RF	See the trace Data	PASS
High	2480	At least 20dB below from peak of RF	See the trace Data	PASS

## 7.4 Trace data


### Channel Low 30MHz-1GHz

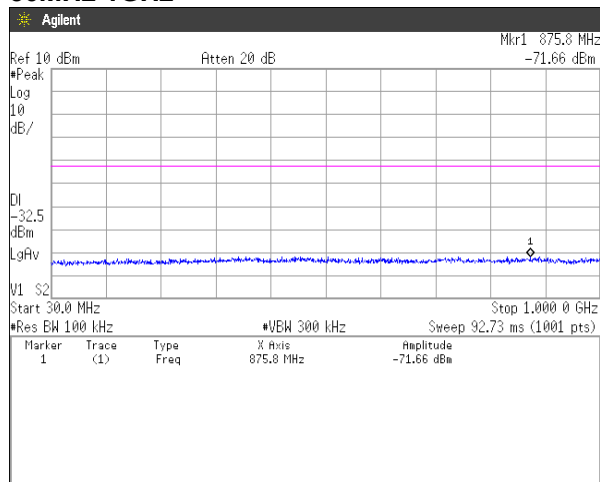


### 1GHz-5GHz

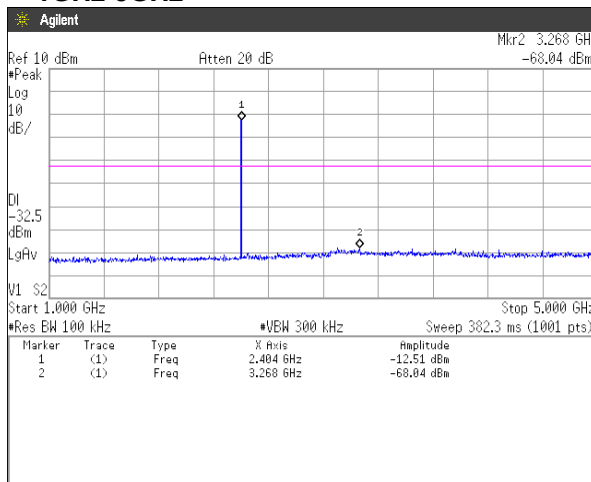


### 5GHz-10GHz

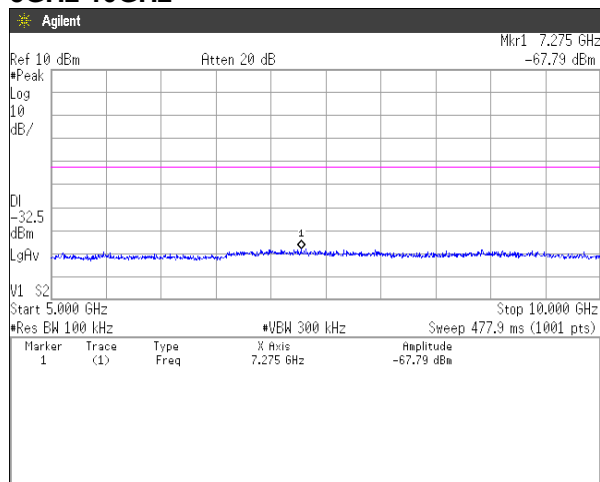


### 10GHz-15GHz

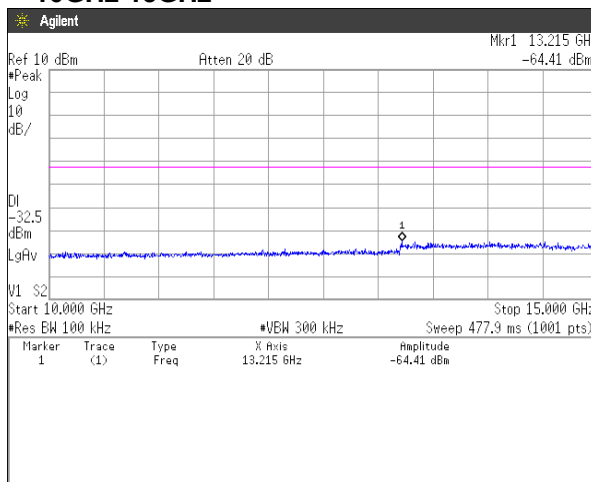

### 15GHz-20GHz

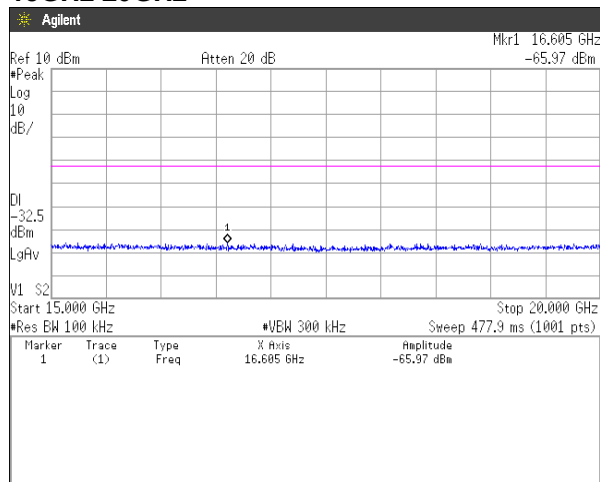


### 20GHz-25GHz

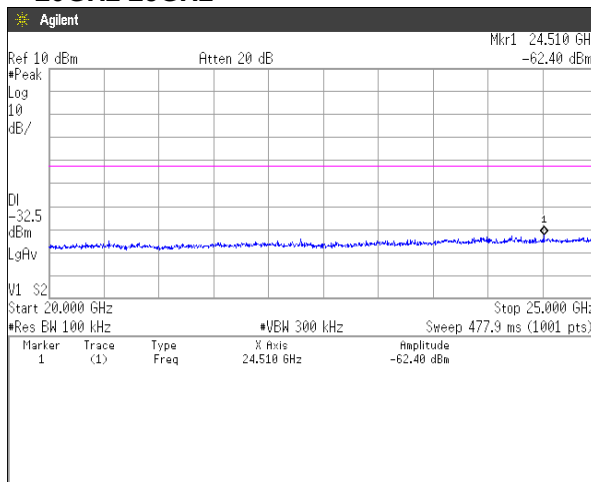




Japan


### Channel Middle 30MHz-1GHz

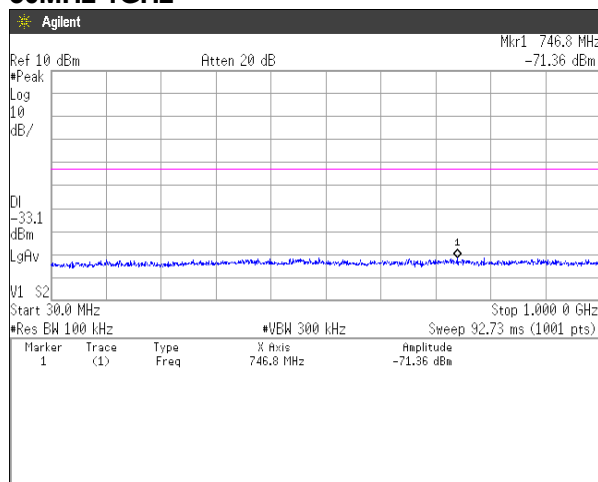


### 1GHz-5GHz

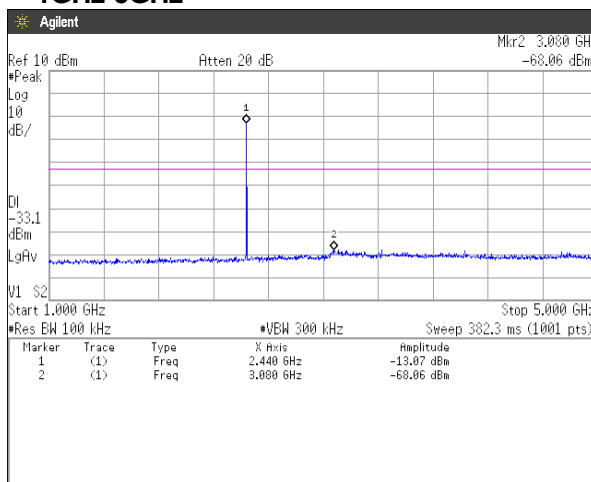


### 5GHz-10GHz

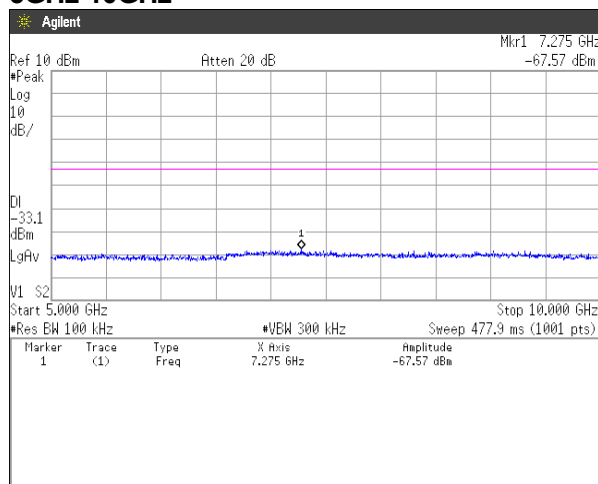


### 10GHz-15GHz

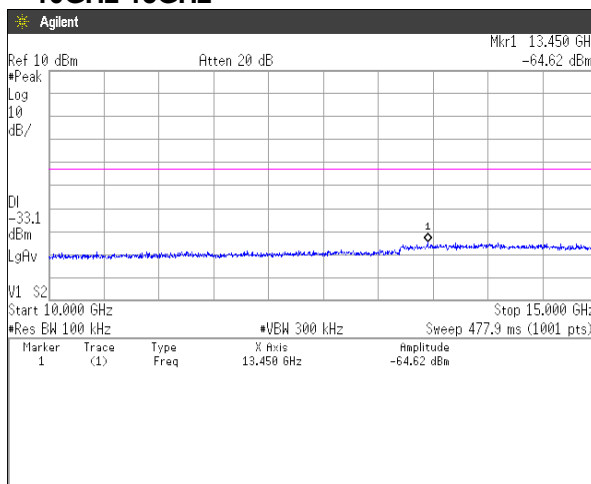

### 15GHz-20GHz

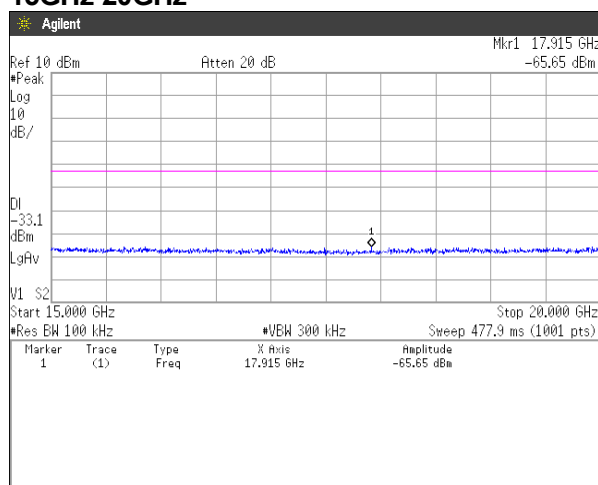

### 20GHz-25GHz

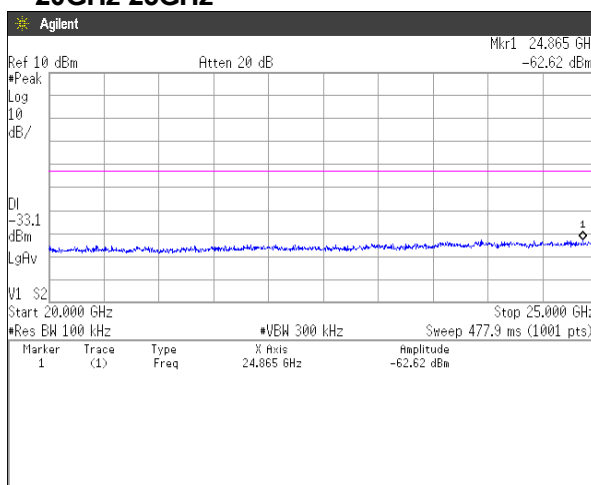







Japan


### Channel High 30MHz-1GHz

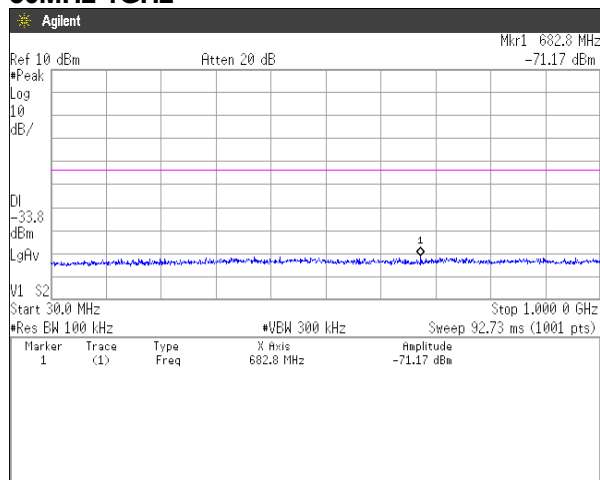


### 1GHz-5GHz

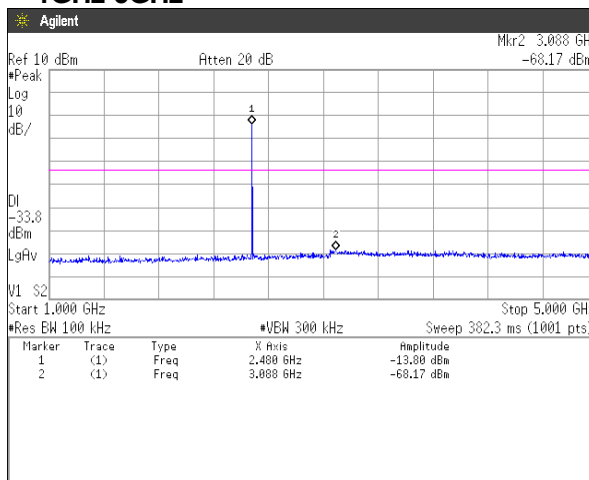


### 5GHz-10GHz

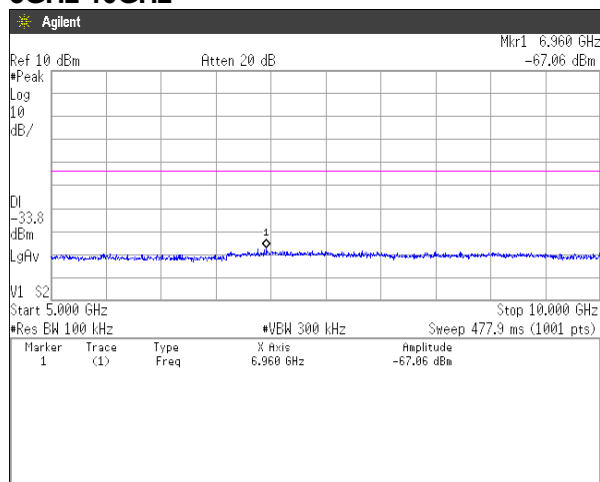


### 10GHz-15GHz

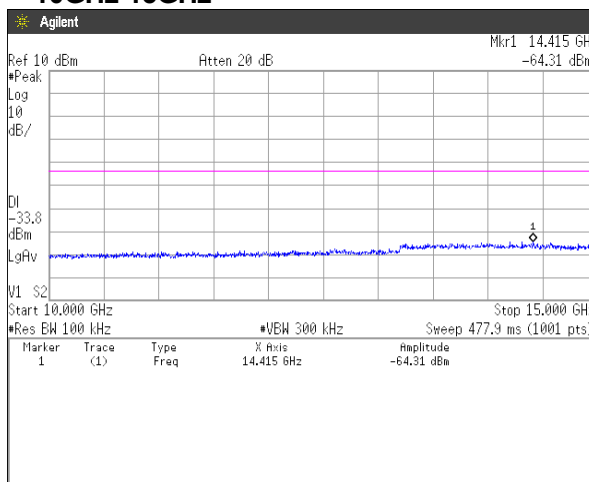

### 15GHz-20GHz

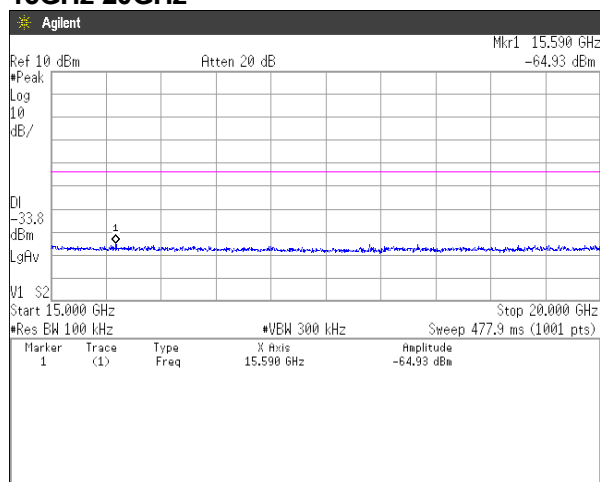

### 20GHz-25GHz

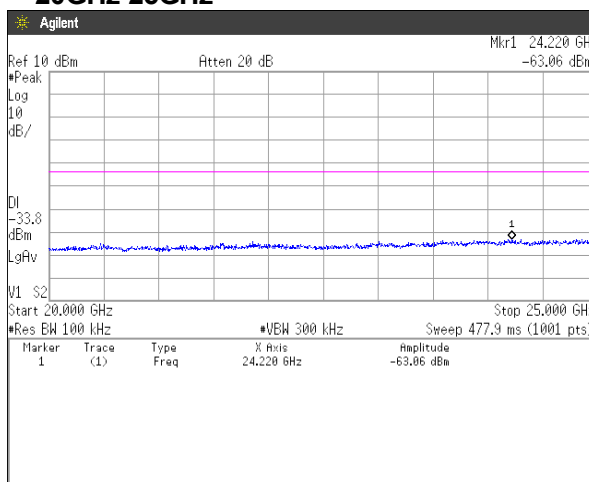

## 8. Spurious Emissions - Radiated -

### 8.1 Measurement procedure

[FCC 15.247(d), 15.205, 15.209, KDB 558074 D01 v04, Section 12.0]

Test was applied by following conditions.

Test method	:	ANSI C63.10
Frequency range	:	9kHz to 25GHz
Test place	:	3m Semi-anechoic chamber
EUT was placed on	:	Styrofoam table / (W)1.0m × (D)1.0m × (H)0.8m (below 1GHz) Styrofoam table / (W)0.6m × (D)0.6m × (H)1.5m (above 1GHz)
Antenna distance	:	3m
Test receiver setting	:	Below 1GHz
- Detector	:	Average (9kHz-90kHz, 110kHz-490kHz), Quasi-peak
- Bandwidth	:	200Hz, 120kHz
Spectrum analyzer setting	:	Above 1GHz
- Peak	:	RBW=1MHz, VBW=3MHz, Span=0Hz, Sweep=auto
- Average	:	RBW=1MHz, VBW=3kHz, Span=0Hz, Sweep=auto Display mode=Linear

#### Average Measurement Setting [VBW]

Mode	Duty Cycle (%)	T <sub>on</sub> (us)	T <sub>off</sub> (us)	1/T <sub>on</sub> (kHz)	Determined VBW Setting
Bluetooth 4.2 LE	62.18	388	236	2.577	3kHz


Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open area test site.

Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

Radiated emission measurements are performed at 3m distance with the broadband antenna (Loop antenna, Biconical antenna, Log periodic antenna, Double ridged guide antenna and Broad-band horn Antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1m to 4m and stopped at height producing the maximum emission. As for the Loop antenna, it is positioned with its plane vertical, and the center of the Loop antenna is 1m above the ground plane.

The EUT is Placed on a turntable, which is 0.8m/1.5m above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. The test results represent the worst case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation. Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.

#### - Test configuration

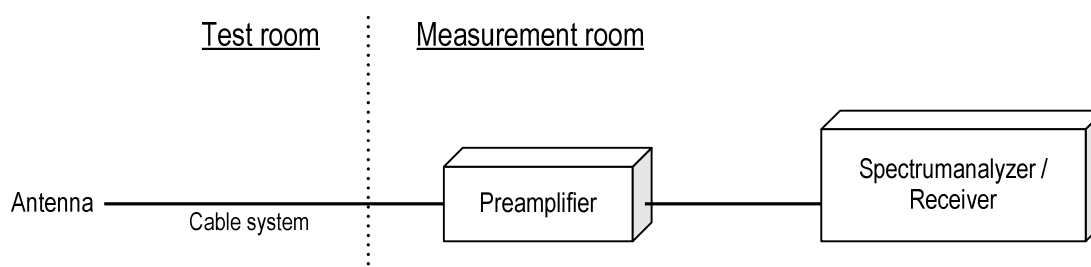

## 8.2 Calculation method

[9kHz to 150kHz]

Emission level = Reading + (Ant factor + Cable system loss)

Margin = Limit – Emission level

[150kHz to 25GHz]

Emission level = Reading + (Ant factor + Cable system loss - Amp. Gain)

Margin = Limit – Emission level

Example:

Limit @ 4804.0MHz : 74.0dBuV/m (Peak Limit)

S.A Reading = 39.9dBuV Cable system loss = 8.3dB

Result = 39.9 + 8.3 = 48.2dBuV/m

Margin = 74.0 - 48.2 = 25.8dB

## 8.3 Limit

Frequency [MHz]	Field strength		Distance [m]
	[uV/m]	[dBuV/m]	
0.009-0.490	2400 / F [kHz]	20logE [uV/m]	300
0.490-1.705	24000 / F [kHz]	20logE [uV/m]	30
1.705-30	30	29.5	30
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level [dBuV/m] = 20log Emission [uV/m]
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition modulation.



Japan

#### 8.4 Test data

Date	:	August 10, 2018		
Temperature	:	23.4 [°C]		
Humidity	:	65.9 [%]	Test engineer	:
Test place	:	3m Semi-anechoic chamber		<u>Taiki Watanabe</u>
Date	:	August 11, 2018		
Temperature	:	24.7 [°C]		
Humidity	:	65.2 [%]	Test engineer	:
Test place	:	3m Semi-anechoic chamber		<u>Taiki Watanabe</u>




Japan

### 8.4.1 Transmission mode

#### Channel Low BELOW 1GHz

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

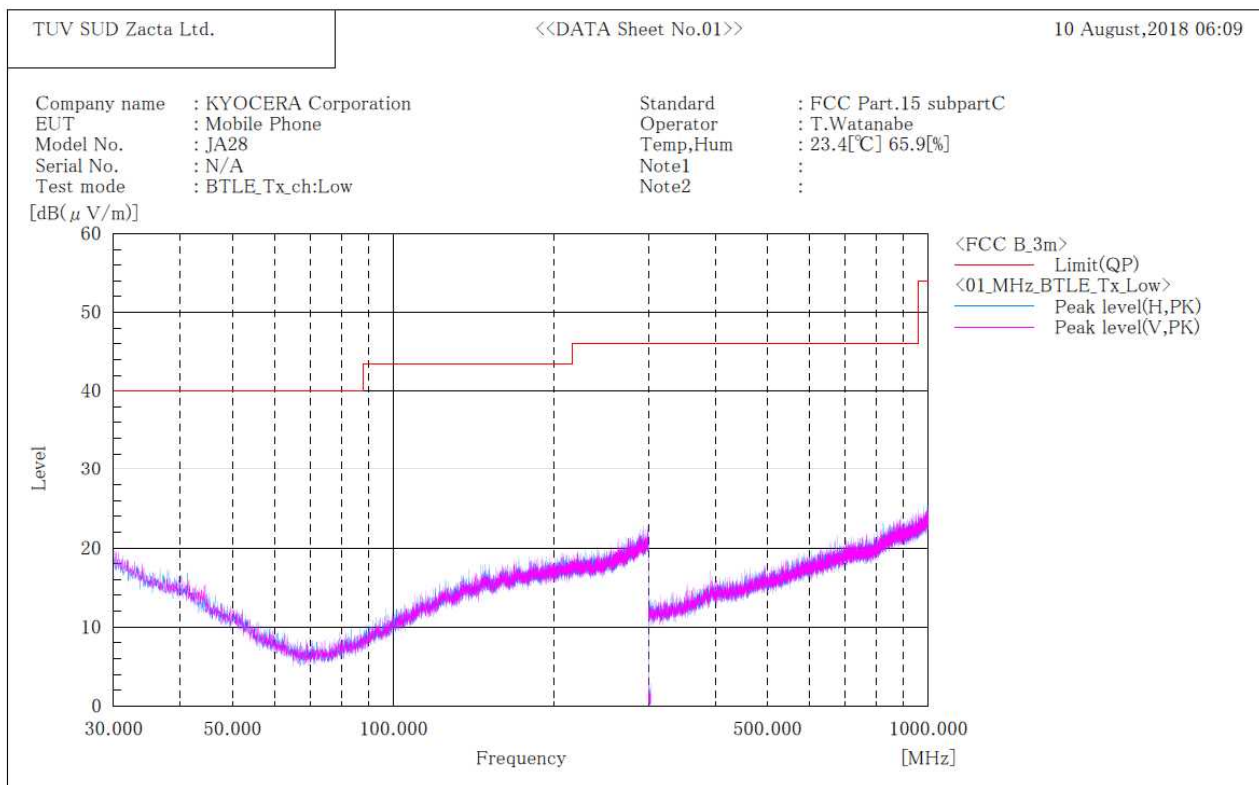

Final Result

No.	Frequency (P)	c. f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[° ]

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 30MHz at the 3 meters distance.



Japan

**Channel Low  
ABOVE 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

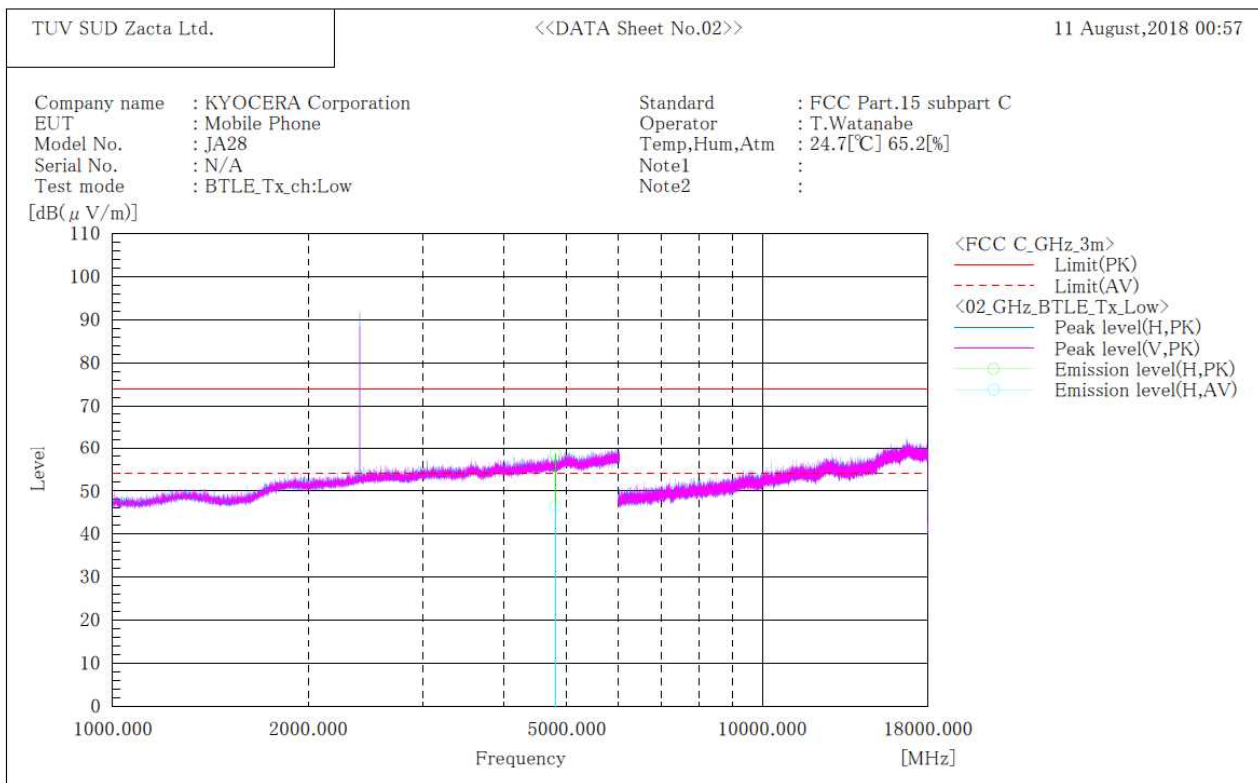

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]
1	4804.000	H	49.6	37.6	8.9	58.5	46.5	74.0	54.0	15.5	7.5	151.0	113.0

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.



Japan

**Channel Middle  
BELOW 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

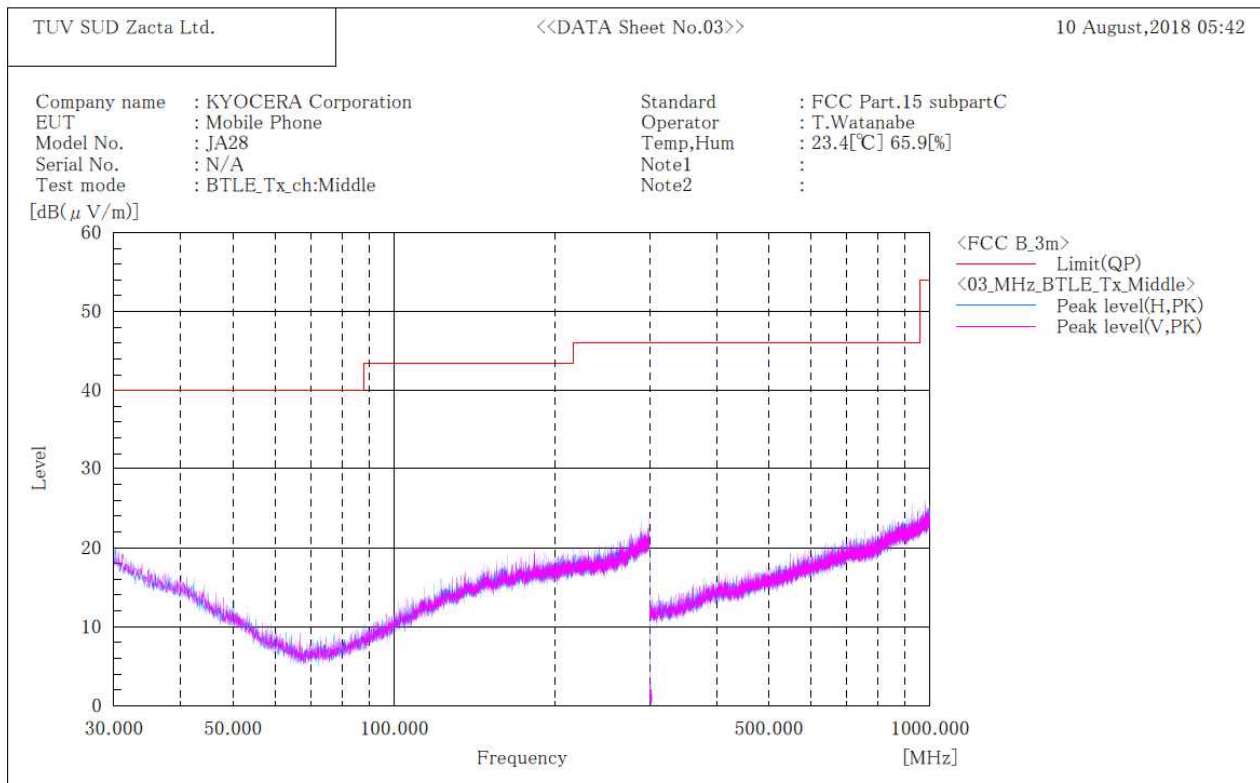

Final Result

No.	Frequency (P)	c. f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[° ]

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 30MHz at the 3 meters distance.



Japan

**Channel Middle  
ABOVE 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

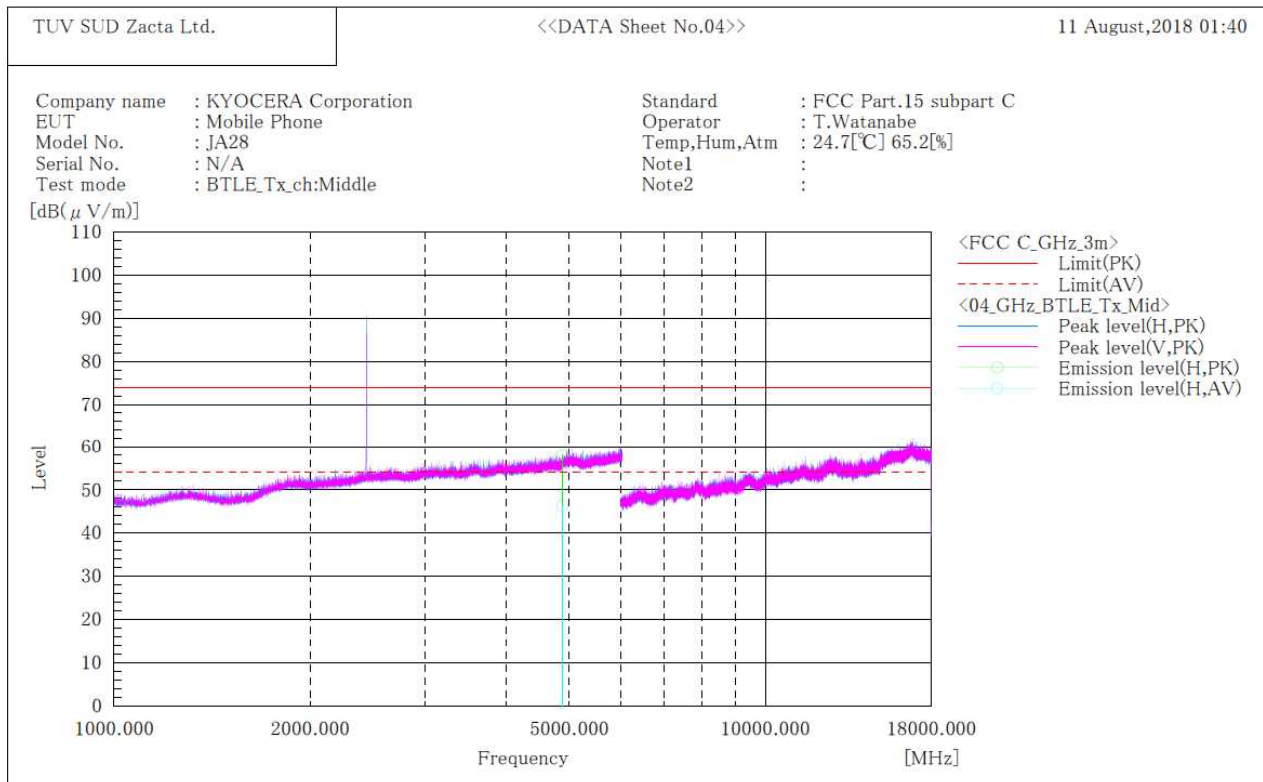

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]
1	4880.000	H	49.0	37.2	9.2	58.2	46.4	74.0	54.0	15.8	7.6	137.0	175.0

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.






Japan

**Channel High  
BELOW 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

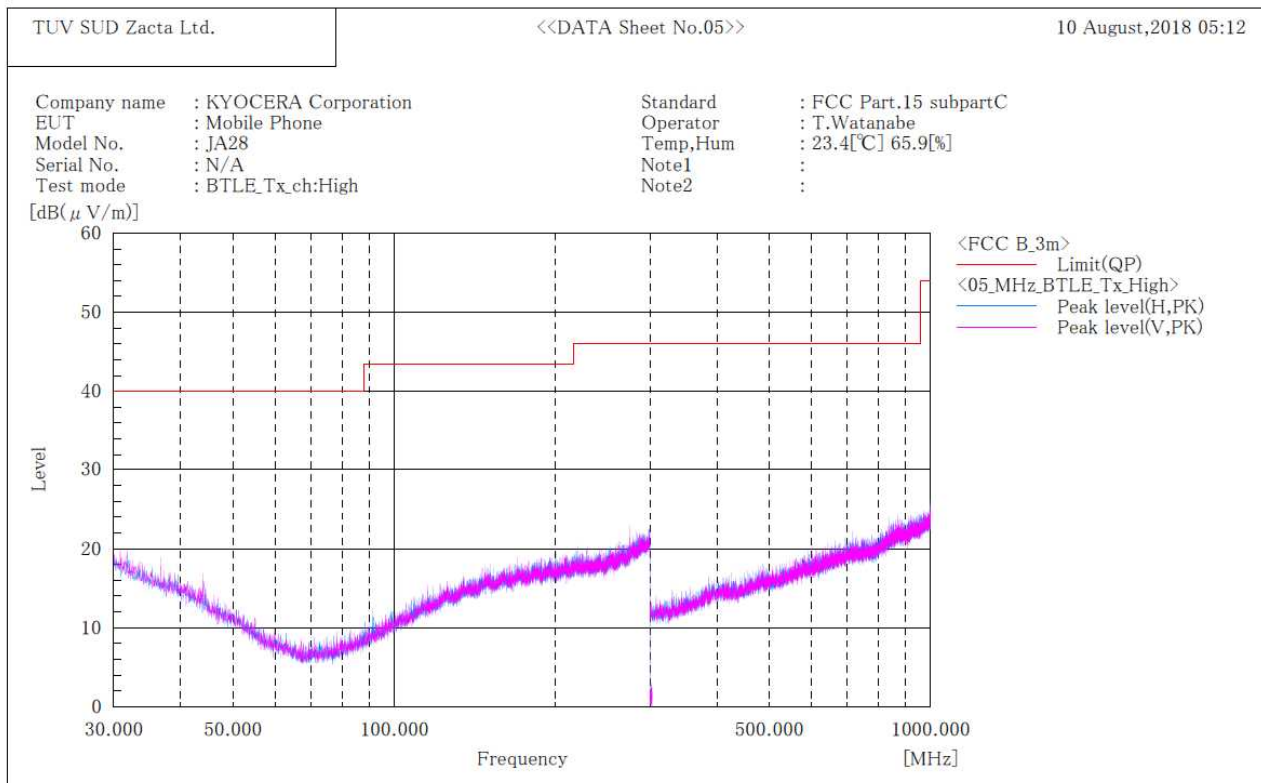

Final Result

No.	Frequency (P)	c. f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[° ]

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 30MHz at the 3 meters distance.



Japan

**Channel High  
ABOVE 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

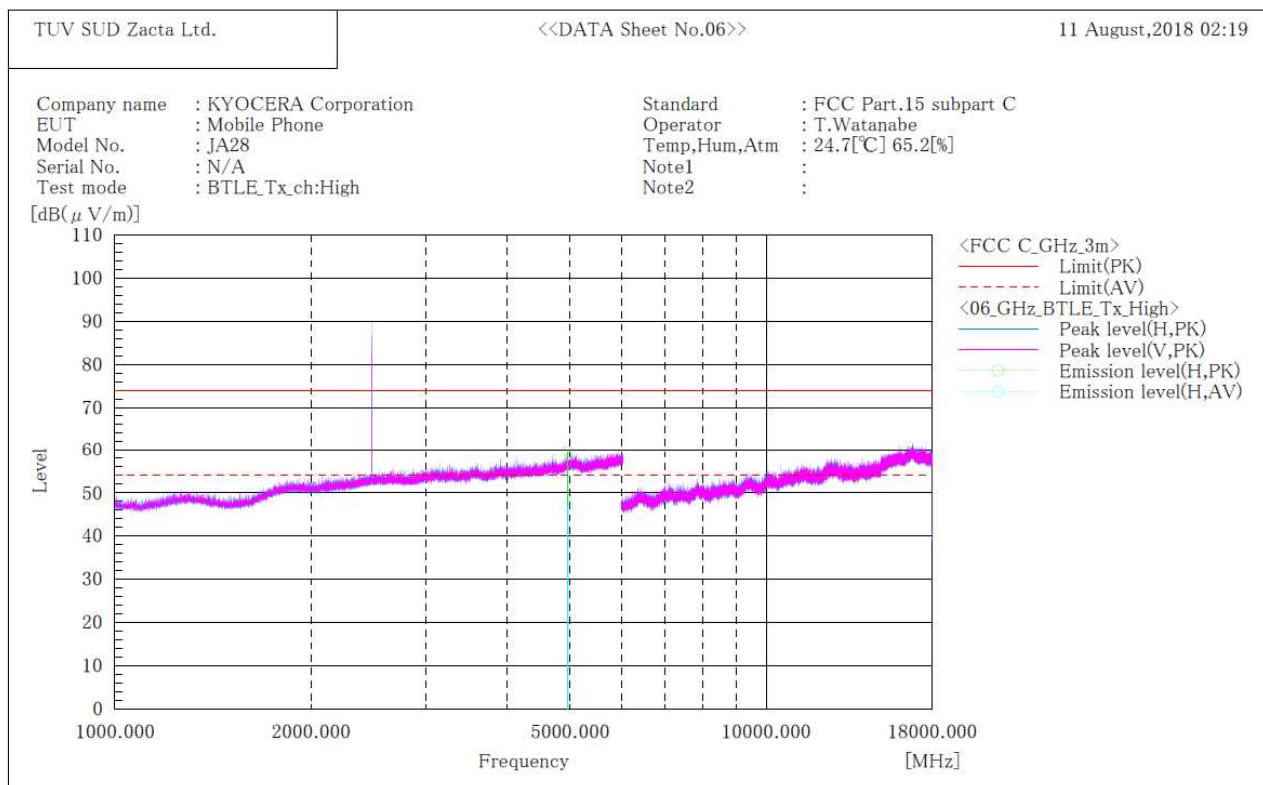

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]
1	4960.000	H	49.9	37.1	9.8	59.7	46.9	74.0	54.0	14.3	7.1	139.0	131.0

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.




Japan

### 8.4.2 Receive mode

#### Channel Low BELOW 1GHz

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

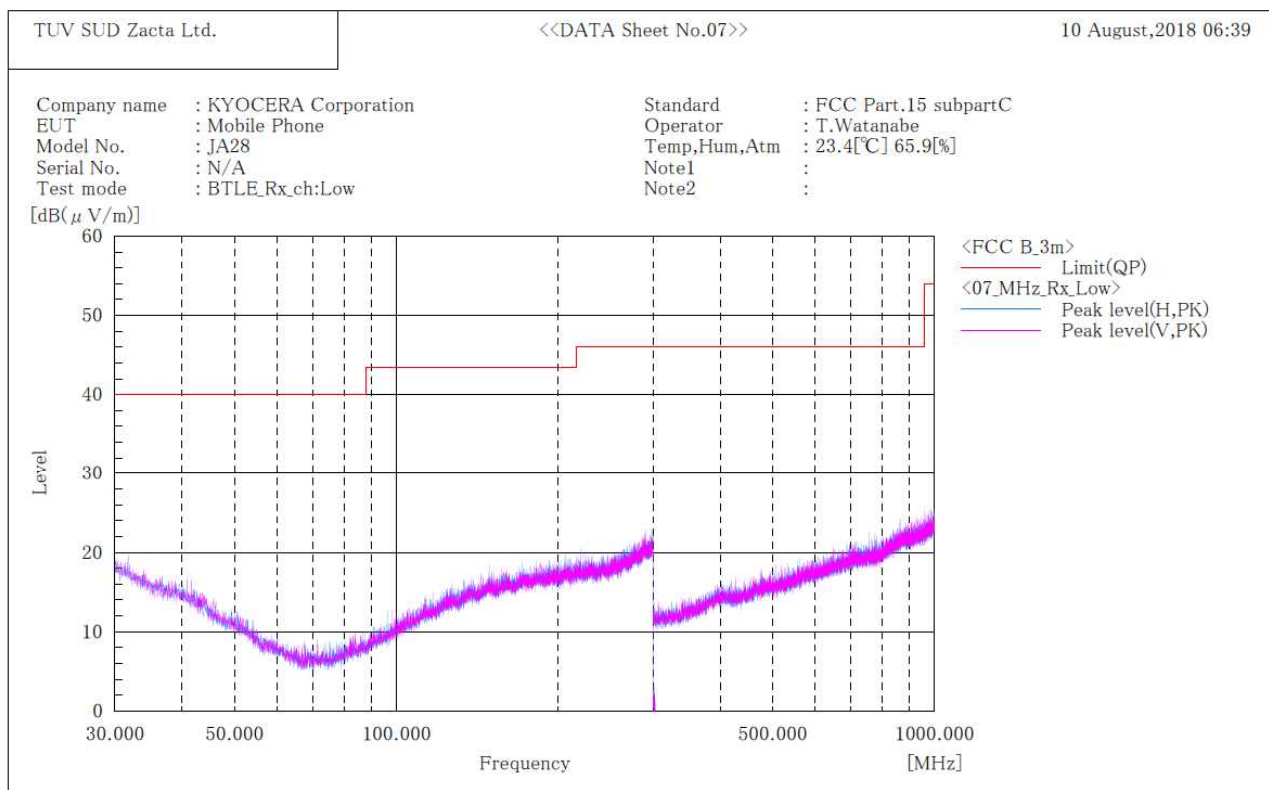

Final Result

No.	Frequency (P)	c. f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[°]

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 30MHz and 1GHz to 25GHz at the 3 meters distance.



Japan

**Channel Middle  
BELOW 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

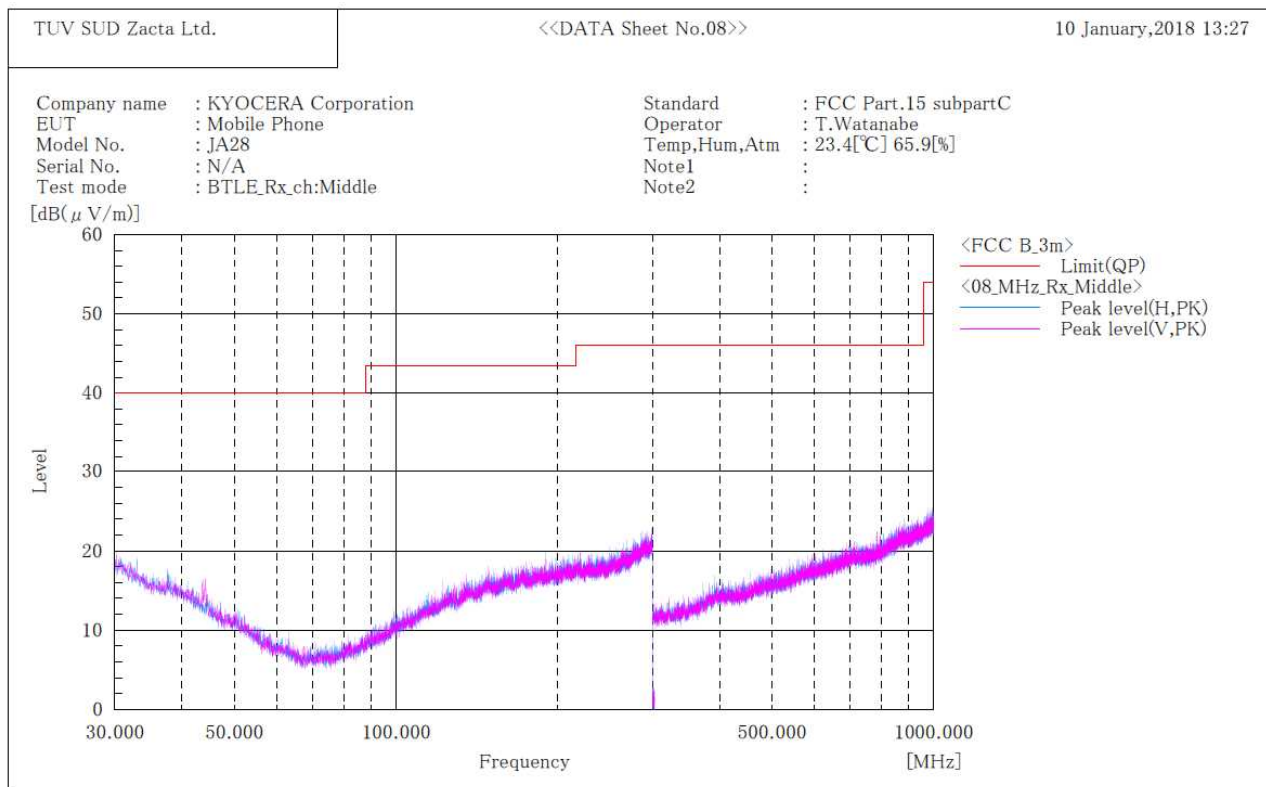

Final Result

No.	Frequency (P)	c. f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[° ]

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 30MHz and 1GHz to 25GHz at the 3 meters distance.



Japan

**Channel High  
BELOW 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

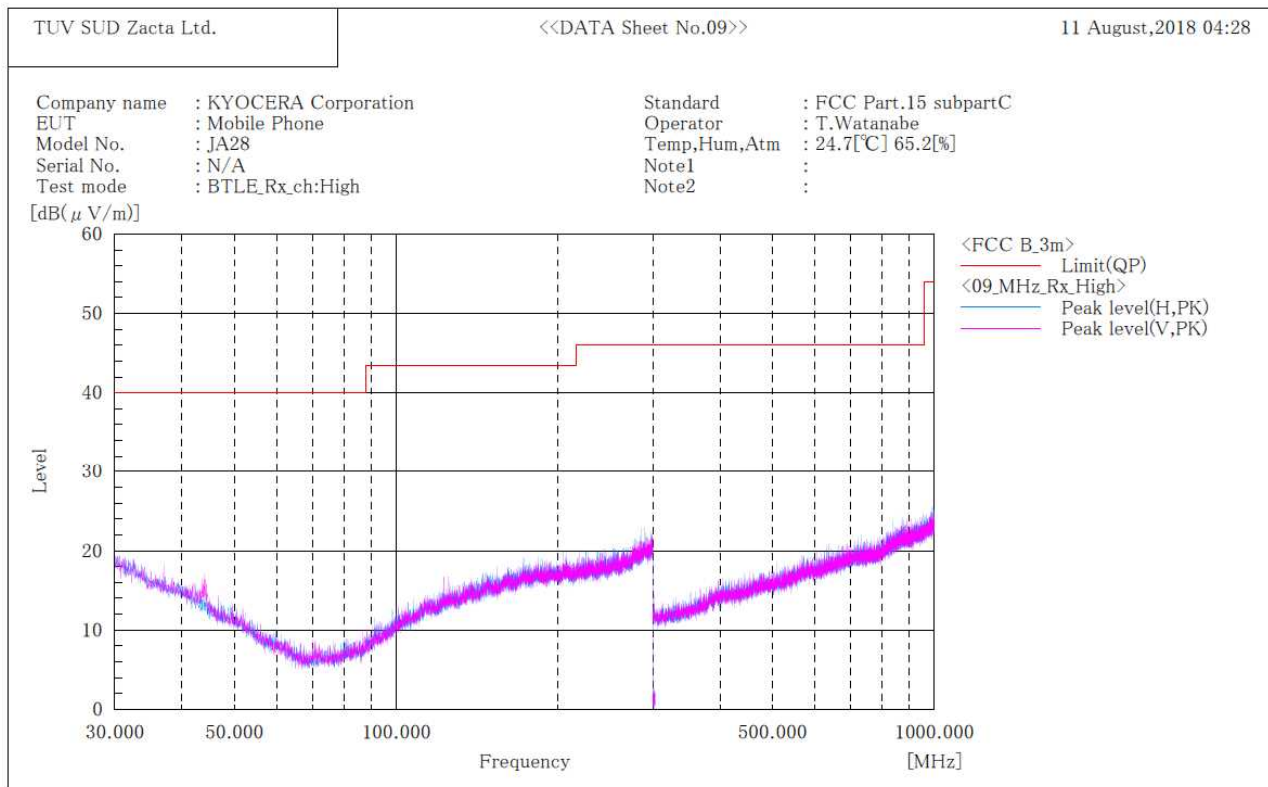

Final Result

No.	Frequency (P)	c. f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[° ]

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 30MHz and 1GHz to 25GHz at the 3 meters distance.

## 9. Restricted Band of Operation

### 9.1 Measurement procedure

[FCC 15.247(d), 15.205, 15.209, KDB 558074 D01 v04, Section 12.0]

Test was applied by following conditions.

Test method	:	ANSI C63.10
Test place	:	3m Semi-anechoic chamber
EUT was placed on	:	Styrofoam table / (W)1.0m × (D)1.0m × (H)0.8m (below 1GHz) Styrofoam table / (W)0.6m × (D)0.6m × (H)1.5m (above 1GHz)
Antenna distance	:	3m
Spectrum analyzer setting	:	
- Peak	:	RBW=1MHz, VBW=3MHz, Span=Arbitrary setting, Sweep=auto
- Average	:	RBW=1MHz, VBW=10kHz, Span=Arbitrary setting, Sweep=auto Display mode=Linear

#### Average Measurement Setting [VBW]

Mode	Duty Cycle (%)	T <sub>on</sub> (us)	T <sub>off</sub> (us)	1/T <sub>on</sub> (kHz)	Determined VBW Setting
Bluetooth 4.2 LE	62.18	388	236	2.577	10kHz


Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open area test site.

Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

Radiated emission measurements are performed at 3m distance with the broadband antenna (Double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1m to 4m and stopped at height producing the maximum emission.

The EUT is Placed on a turntable, which is 0.8m/1.5m above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. The test results represent the worst case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation. Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.

#### - Test configuration

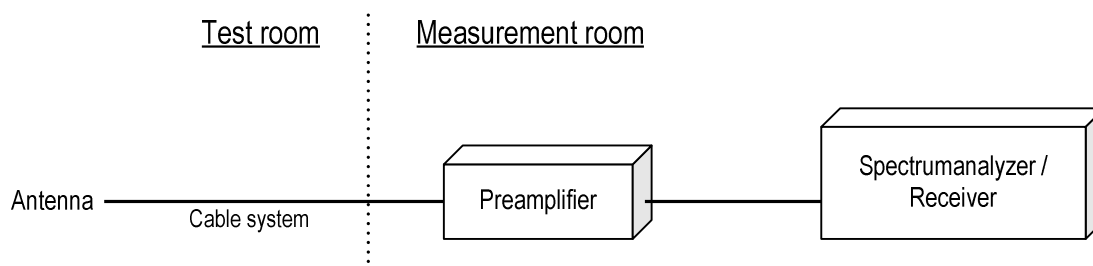

### 9.2 Limit

Emission at the boundary of the restricted band provided by 15.205 shall be lower than 15.209 limit.



Japan

### 9.3 Measurement Result

Channel	Frequency [MHz]	Results Chart	Result
Low	2402	See the Trace Data	Pass
High	2480	See the Trace Data	Pass

### 9.4 Test data

Date : August 17, 2018

Temperature : 22.5 [°C]

Humidity : 45.5 [%]

Test place : 3m Semi-anechoic chamber


Test engineer :

Tadahiro Seino




Japan


### Channel Low Horizontal Peak

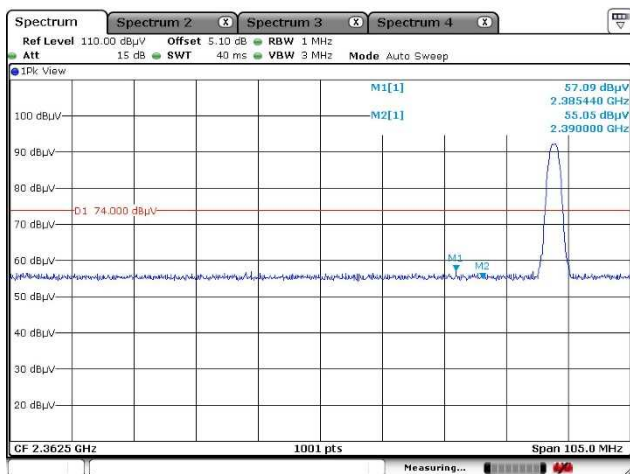


### Average

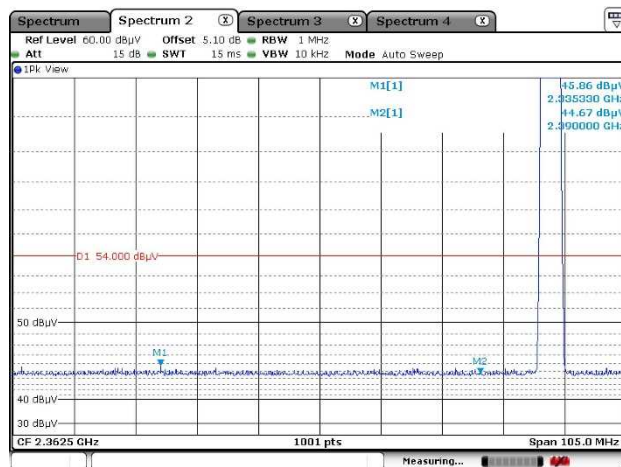

### Vertical Peak

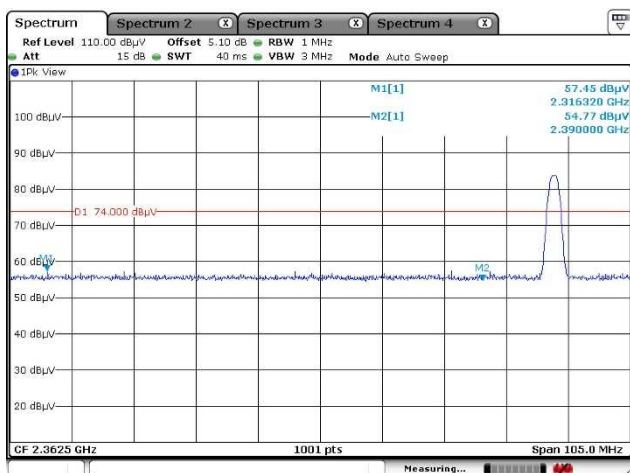

### Average

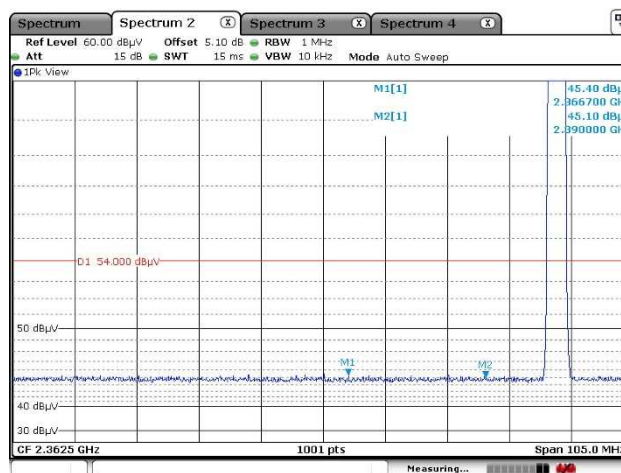







Japan


### Channel High Horizontal Peak

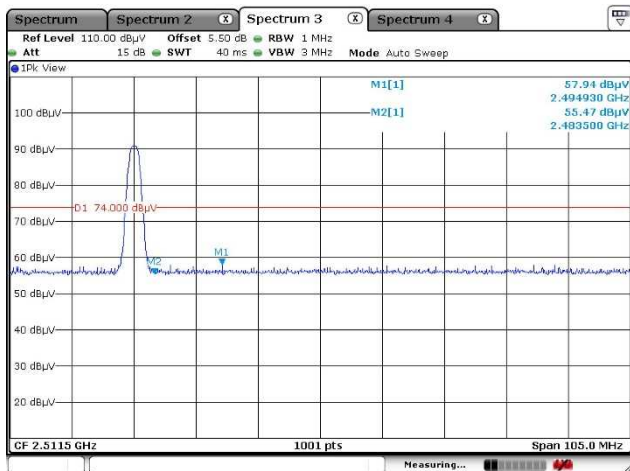


### Average

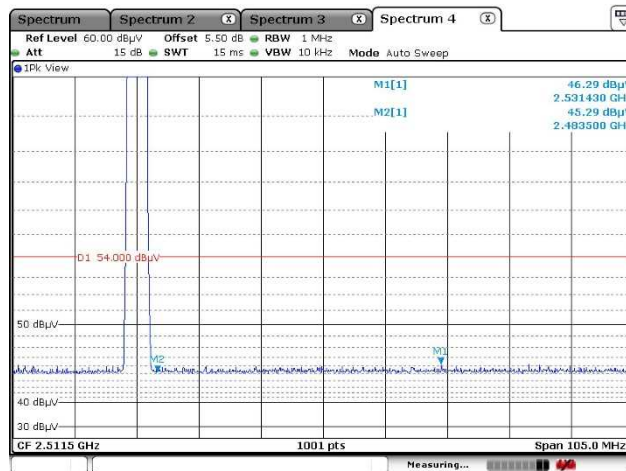

### Vertical Peak

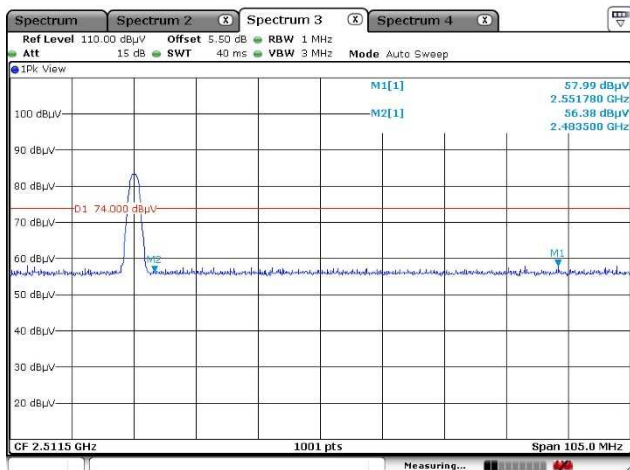

### Average

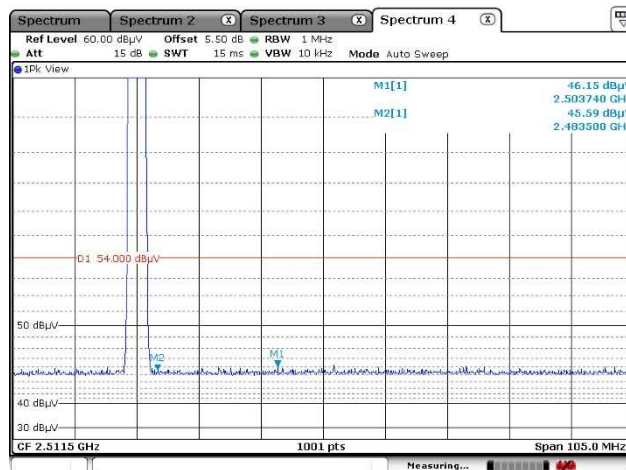

## 10. Transmitter Power Spectral Density

### 10.1 Measurement procedure


[FCC 15.247(e), KDB558074 D01 v04, Section 10.2]

The peak power is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) Span = 1.5 times the 6 dB bandwidth.
- b) RBW = 3kHz - 100kHz.
- c) VBW  $\geq$  3 x RBW.
- d) Sweep time = auto-couple.
- e) Detector = peak.
- f) Trace mode = max hold.

- Test configuration

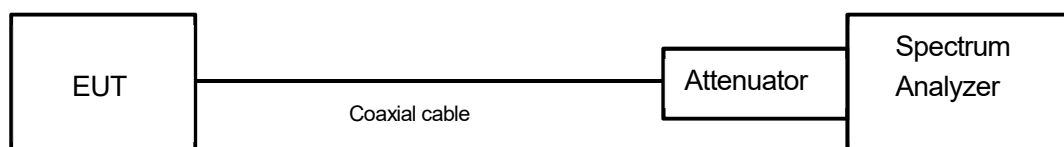

### 10.2 Limit

The peak power spectral density shall not be greater than 8dBm in any 3kHz band.

### 10.3 Measurement result

Date : August 7, 2018

Temperature : 24.8 [°C]

Humidity : 55.5 [%]

Test place : Shielded room No.4

Test engineer :

Tadahiro Seino


Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dBm)	Result
Low	2402	-27.83	10.92	-16.91	8.00	24.91	PASS
Middle	2440	-28.34	10.92	-17.42	8.00	25.42	PASS
High	2480	-28.95	10.92	-18.03	8.00	26.03	PASS

Calculation;


Transmitter Power Spectral Density Level (Margin) = Limit – (Reading + Factor)

## 10.4 Trace data


### Channel Low

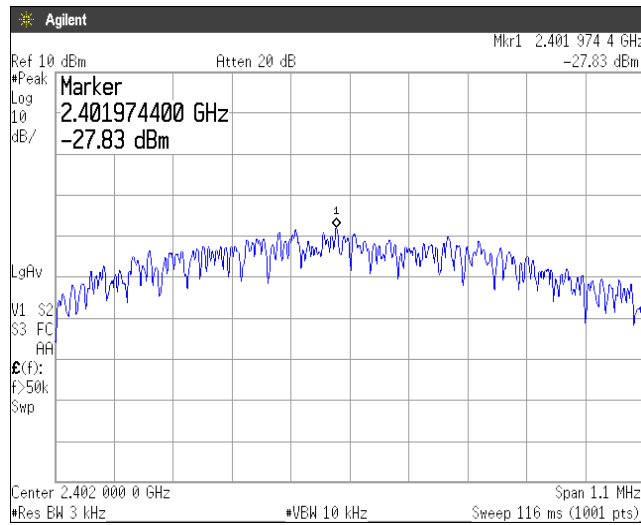

### Channel Middle

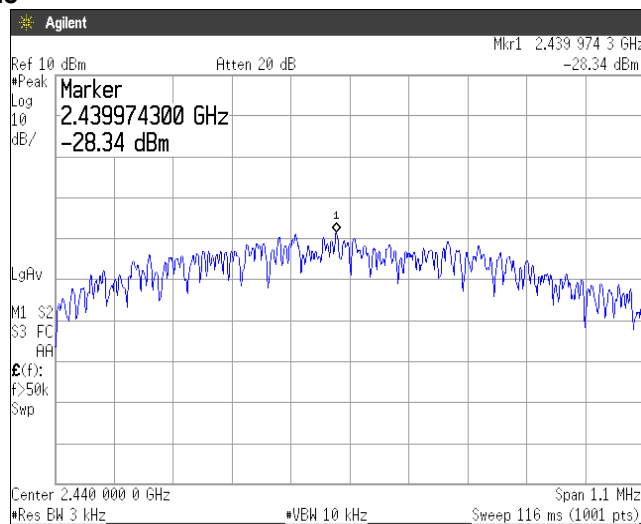

### Channel High

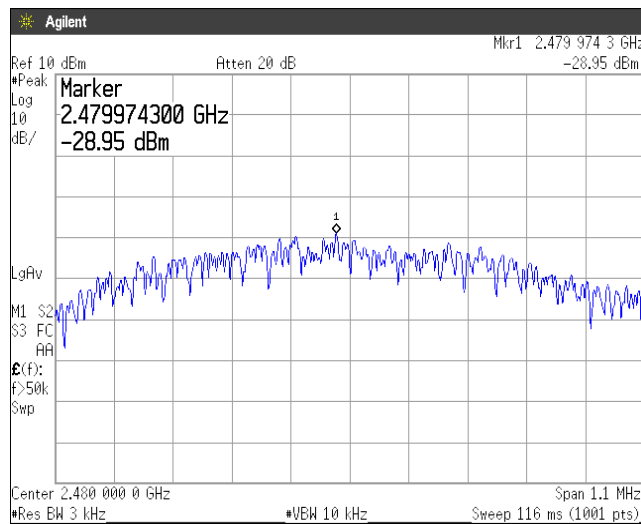

## 11. AC Power Line Conducted Emissions

### 11.1 Measurement procedure [FCC 15.207]

Test was applied by following conditions.


Test method	: ANSI C63.10
Frequency range	: 0.15MHz to 30MHz
Test place	: 3m Semi-anechoic chamber
EUT was placed on	: FRP table / (W)2.0m × (D)1.0m × (H)0.8m
Vertical Metal Reference Plane	: (W)2.0m × (H)2.0m 0.4m away from EUT
Test receiver setting	
- Detector	: Quasi-peak, Average
- Bandwidth	: 9kHz

EUT and peripherals are connected to 50Ω/50μH Line Impedance Stabilization Network (LISN) which are connected to reference ground plane, and are placed 80cm away from EUT. Excess of AC power cable is bundled in center.

LISN for peripheral is terminated in 50Ω.

EUT operating mode is selected to emit the maximum noise. Overall frequency range is investigated with spectrum analyzer using peak detector. Maximum emission configuration is determined by manipulating the EUT, peripherals, interconnecting cables. Then, emission measurements are performed with test receiver in above setting to each current-carrying conductor of the mains port. Sufficient time for EUT, peripherals and test equipment is provided in order for them to warm up to their normal operating condition. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits.

- Test configuration

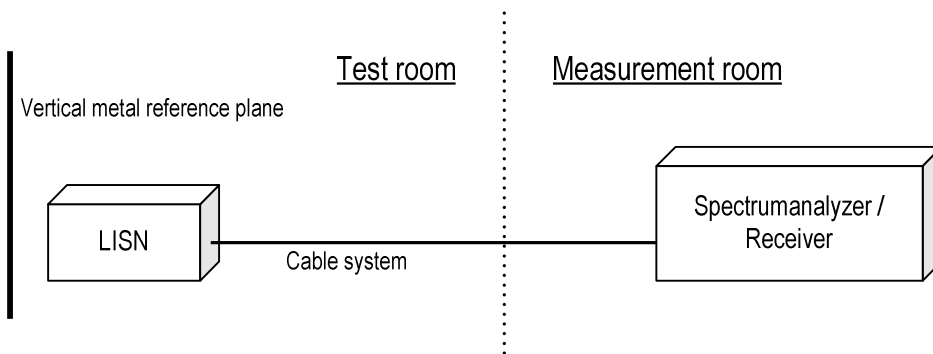

### 11.2 Calculation method

Emission level = Reading + (LISN. Factor + Cable system loss)

Margin = Limit – Emission level

Example:

Limit @ 6.770MHz : 60.0dBμV(Quasi-peak)  
: 50.0dBμV(Average)

(Quasi peak) Reading = 41.2dBμV c.f = 10.3dB

Emission level = 41.2 + 10.3 = 51.5dBμV

Margin = 60.0 – 51.5 = 8.5dB

(Average) Reading = 35.0dBμV c.f = 10.3dB

Emission level = 35.0 + 10.3 = 45.3dBμV

Margin = 50.0 – 45.3 = 4.7dB




### 11.3 Limit

Frequency [MHz]	Limit	
	QP [dBuV]	AV [dBuV]
0.15-0.5	66-56*	56-46*
0.5-5	56	46
5-30	60	50

\*: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 11.4 Test data

\*\*\*\*\* CONDUCTED EMISSION at MAINS PORT \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

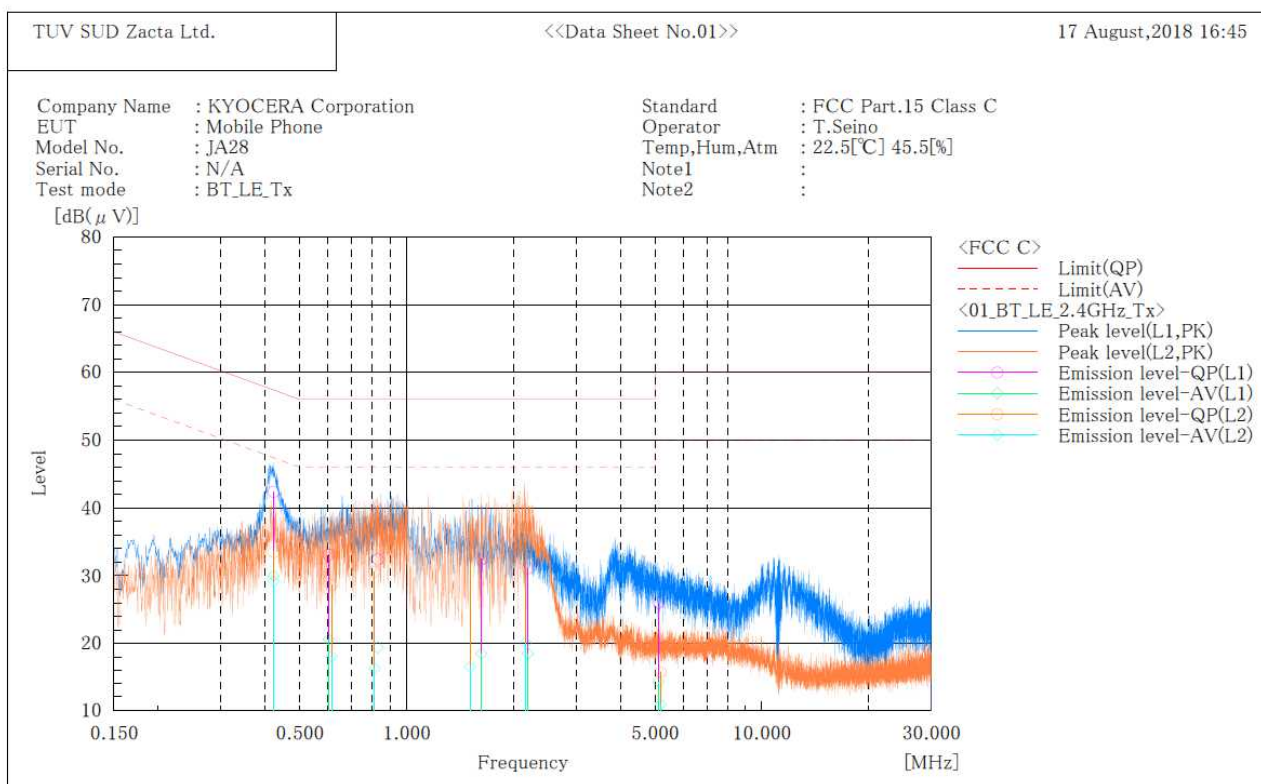

#### Final Result

--- L1 Phase ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	0.422	32.0	19.6	10.4	42.4	30.0	57.4	47.4	15.0	17.4
2	0.604	22.7	10.2	10.4	33.1	20.6	56.0	46.0	22.9	25.4
3	0.830	22.0	9.0	10.4	32.4	19.4	56.0	46.0	23.6	26.6
4	1.624	22.0	8.1	10.4	32.4	18.5	56.0	46.0	23.6	27.5
5	2.193	20.6	8.0	10.5	31.1	18.5	56.0	46.0	24.9	27.5
6	5.122	15.3	3.5	10.7	26.0	14.2	60.0	50.0	34.0	35.8

--- L2 Phase ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	0.423	23.1	18.8	10.4	33.5	29.2	57.4	47.4	23.9	18.2
2	0.615	18.2	7.7	10.4	28.6	18.1	56.0	46.0	27.4	27.9
3	0.812	20.2	5.9	10.4	30.6	16.3	56.0	46.0	25.4	29.7
4	1.510	23.0	6.1	10.4	33.4	16.5	56.0	46.0	22.6	29.5
5	2.166	24.8	9.6	10.5	35.3	20.1	56.0	46.0	20.7	25.9
6	5.195	5.0	0.2	10.7	15.7	10.9	60.0	50.0	44.3	39.1



Japan

## ***12. Antenna requirement***

---

According to FCC section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The antenna is a special antenna mounted inside of the EUT. Therefore, the EUT complies with the antenna requirement of FCC section 15.203.

### ***13. Uncertainty of measurement***

Expanded uncertainties stated are calculated with a coverage Factor  $k=2$ .

Please note that these results are not taken into account when measurement uncertainty considerations contained in ETSI TR 100 028-0011 determining compliance or non-compliance with test result

<b>Test item</b>	<b>Measurement uncertainty</b>
Conducted emission, AMN (9kHz – 150kHz)	$\pm 3.8\text{dB}$
Conducted emission, AMN (150kHz – 30MHz)	$\pm 3.3\text{dB}$
Radiated emission (9kHz – 30MHz)	$\pm 3.0\text{dB}$
Radiated emission (30MHz – 1000MHz)	$\pm 4.7\text{dB}$
Radiated emission (1GHz – 6GHz)	$\pm 4.9\text{dB}$
Radiated emission (6GHz – 18GHz)	$\pm 5.2\text{dB}$
Radiated emission (18GHz – 40GHz)	$\pm 5.8\text{dB}$



Japan

## 14. Laboratory Information

### 1. Location

Testing done by September 30th, 2018 was performed at:

Name: TÜV SÜD Zacta Ltd. Yonezawa Testing Center  
 Address: 5-4149-7, Hachimanpara, Yonezawa-shi, Yamagata, 992-1128 Japan  
 Phone: +81-238-28-2881  
 Fax: +81-238-28-2888

Testing done after October 1st, 2018 was performed and the test report was issued at:

Name: TÜV SÜD Japan Ltd. Yonezawa Testing Center  
 Address: 5-4149-7, Hachimanpara, Yonezawa-shi, Yamagata, 992-1128 Japan  
 Phone: +81-238-28-2881  
 Fax: +81-238-28-2888

### 2. Accreditation and Registration

- 1) VLAC  
Accreditation No.: VLAC-013
- 2) NVLAP  
LAB CODE: 200306-0
- 3) BSMI  
Laboratory Code: SL2-IN-E-6018, SL2-A1-E-6018

#### 4) Industry Canada

Site number	Facility	Expiration date
4224A-4	3m Semi-anechoic chamber	2020-11-27
4224A-5	10m Semi-anechoic chamber No.1	2020-11-27
4224A-6	10m Semi-anechoic chamber No.2	2019-12-14

#### 5) VCCI Council

Registration number	Expiration date
A-0166	2019-07-03



## Appendix A. Test equipment

### Antenna port conducted test

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
Spectrum analyzer	Agilent Technologies	E4440A	US44302655	Oct. 31, 2018	Oct. 19, 2017
Attenuator	Agilent Technologies	6810.19.A	N/A(S450)	Jan. 31, 2019	Jan. 18, 2018
Power meter	ROHDE&SCHWARZ	NRP2	103269	Aug. 31, 2019	Aug. 1, 2018
Power sensor	ROHDE&SCHWARZ	NRP-Z81	102467	Aug. 31, 2019	Aug. 1, 2018

### Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100765	Sep. 30, 2019	Sep. 13, 2017
Spectrum analyzer	Agilent Technologies	E4440A	US40420937	Oct. 31, 2018	Oct. 19, 2017
Spectrum analyzer	ROHDE&SCHWARZ	FSV40	101731	Dec. 31, 2018	Dec. 20, 2017
Preamplifier	SONOMA	310	372170	Sep. 30, 2018	Sep. 12, 2017
Loop antenna	ROHDE&SCHWARZ	HFH2-Z2	100515	Feb. 28, 2019	Feb. 20, 2018
Attenuator	TDC	TAT-43B-06	N/A(S209)	Jul. 31, 2019	Jul. 11, 2018
Biconical antenna	Schwarzbeck	VHA9103/BBA9106	2155	Aug. 31, 2019	Aug. 6, 2018
Log periodic antenna	Schwarzbeck	UHALP9108A	0560	Aug. 31, 2019	Aug. 6, 2018
Attenuator	TME	CFA-01NPJ-6	N/A(S275)	Jan. 31, 2019	Jan. 18, 2018
Attenuator	TME	CFA-01NPJ-3	N/A(S272)	Jan. 31, 2019	Jan. 18, 2018
Preamplifier	TSJ	MLA-100M18-B02-40	1929118	Jan. 31, 2019	Jan. 18, 2018
Attenuator	AEROFLEX	26A-10	081217-08	Jan. 31, 2019	Jan. 18, 2018
Double ridged guide antenna	ETS LINDGREN	3117	00052315	Mar. 31, 2019	Mar. 14, 2018
DRGH antenna	A.H.Systems Inc.	SAS-574	469	Aug. 31, 2019	Aug. 24, 2018
Preamplifier	TSJ	MLA-1840-B03-35	1240332	Aug. 31, 2019	Aug. 24, 2018
Notch filter	Micro-Tronics	BRM50702	045	May 30, 2019	May 16, 2018
Microwave cable	HUBER+SUHNER	SUCOFLEX104/9m	MY30037/4	Jan. 31, 2019	Jan. 18, 2018
		SUCOFLEX104/1m	my24610/4	Jan. 31, 2019	Jan. 18, 2018
		SUCOFLEX104/8m	SN MY30031/4	Jan. 31, 2019	Jan. 18, 2018
		SUCOFLEX104	MY32976/4	Jan. 31, 2019	Jan. 18, 2018
		SUCOFLEX104/1.5m	MY19309/4	Jan. 31, 2019	Jan. 19, 2018
		SUCOFLEX104/7m	41625/6	Jan. 31, 2019	Jan. 19, 2018
PC	DELL	DIMENSION E521	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V5.6.0	N/A	N/A
Absorber	RIKEN	PPF30	N/A	N/A	N/A
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-NSA)	May 31, 2019	May 21, 2018
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-SVSWR)	May 31, 2019	May 22, 2018


### Conducted emission at mains port

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100765	Sep. 30, 2019	Sep. 13, 2017
Attenuator	HUBER+SUHNER	6810.01.A	N/A(S411)	Jan. 31, 2019	Jan. 18, 2018
Line impedance stabilization network	Kyoritsu Electrical Works, Ltd.	KNW-407F	8-2003-1	Feb. 28, 2019	Feb. 28, 2018
Coaxial cable	FUJIKURA	5D-2W/4m	N/A(S350)	Jan. 31, 2019	Jan. 18, 2018
Coaxial cable	FUJIKURA	5D-2W/1m	N/A(S193)	Jan. 31, 2019	Jan. 18, 2018
Coaxial cable	HUBER+SUHNER	RG214U/10m	N/A(S194)	Jan. 31, 2019	Jan. 18, 2018
PC	DELL	DIMENSION	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/CE-AJ	0611193/V5.4.11	N/A	N/A

\*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.

## Appendix B. Duty Cycle

### [Plot & Calculation]

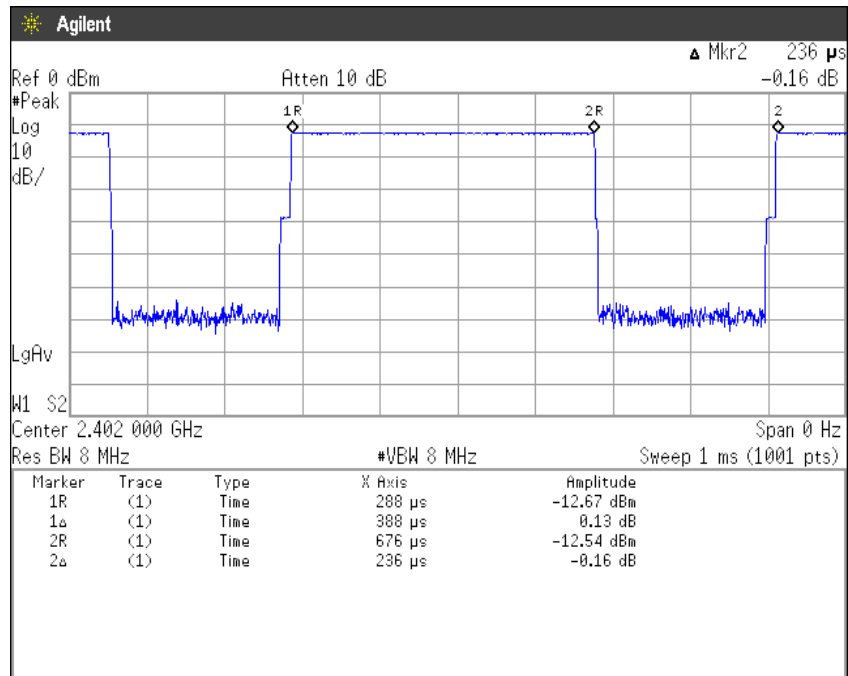

$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff}) = 388[\mu\text{s}] / (388[\mu\text{s}] + 236[\mu\text{s}]) = 62.18[\%]$$