

TEST REPORT

Report number : Z101C-15033

Issue date : May 15, 2015

The device, as described herewith, was tested pursuant to applicable test procedure and complies with the requirements of;

FCC Part 22 Subpart H

The test results are traceable to the international or national standards.

Applicant	: KYOCERA Corporation
Equipment under test (EUT)	: Mobile Phone
Model number	: KA43
FCC ID	: JOYKA43

Date of test : March 23, 24, 30, 31 April 2, 3, 6, 14-16, 2015
Test place : TÜV SÜD Zacta Ltd. Yonezawa Testing Center
4149-7 Hachimanpara 5-chome
Yonezawa-shi Yamagata 992-1128 Japan
Phone: +81-238-28-2880 Fax: +81-238-28-2888
Test results : Complied

The results in this report are applicable only to the equipment tested.

This report shall not be re-produced except in full without the written approval of TÜV SÜD Zacta Ltd.
This test report must not be used by the client to claim product certification, approval, or endorsement
by NVLAP, NIST, or any agency of the federal government.

Tested by : Taiki Watanabe
Taiki Watanabe

Hikaru Shibata
Hikaru Shibata

Authorized by : Eiji Akiba
Eiji Akiba
Deputy General Manager of EMC Technical Department

NVLAP[®]
NVLAP LAB CODE 200306-0

Table of contents

	Page
1. Summary of Test	3
1.1 Purpose of test.....	3
1.2 Standards	3
1.3 List of applied test to the EUT	3
1.4 Modification to the EUT by laboratory.....	3
2. Equipment Under Test	4
2.1 General Description of equipment.....	4
2.2 EUT information	4
2.3 Variation of the family model(s).....	5
2.4 Description of Test mode	5
3. Configuration of equipment	6
3.1 Equipment(s) used.....	6
3.2 System configuration	6
4. Conducted Output Power	7
4.1 Measurement procedure.....	7
4.2 Measurement result.....	7
5. Effective Radiated Power.....	11
5.1 Measurement procedure.....	11
5.2 Calculation method.....	11
5.3 Limit.....	11
5.4 Test data.....	12
6. Occupied Bandwidth.....	15
6.1 Measurement procedure.....	15
6.2 Limit.....	15
6.3 Measurement result.....	15
6.4 Trace data	17
7. Band Edge Spurious and Harmonic at Antenna Terminals	27
7.1 Measurement procedure.....	27
7.2 Limit.....	27
7.3 Measurement result.....	27
7.4 Trace data	29
8. Radiated Emissions and Harmonic Emissions.....	60
8.1 Measurement procedure.....	60
8.2 Calculation method.....	60
8.3 Limit.....	60
8.4 Test data.....	61
9. Frequency Stability	68
9.1 Measurement procedure.....	68
9.2 Limit.....	68
9.3 Measurement result.....	69
10. Uncertainty of measurement.....	71
11. Laboratory description.....	72
Appendix A. Test equipment	73

1. Summary of Test

1.1 Purpose of test

It is the original test in order to verify conformance to FCC Part 22 Subpart H.

1.2 Standards

CFR47 FCC Part 22 Subpart H

1.2.1 Test Methods

ANSI/TIA/EIA-603-C-2004

1.2.2 Deviation from standards

None

1.3 List of applied test to the EUT

Test items Section	Test items	Condition	Result
2.1046	Conducted Output Power	Conducted	PASS
22.913(a)	Effective Radiated Power	Radiated	PASS
22.917(a) 2.1049	Occupied Bandwidth	Conducted	PASS
22.917(a) 2.1051	Band Edge Spurious and Harmonic at Antenna Terminal	Conducted	PASS
22.917(a) 2.1053	Radiated emissions and Harmonic Emissions	Radiated	PASS
22.355 2.1055	Frequency Stability	Conducted	PASS

1.3.1 Test set up

Table-Top

1.4 Modification to the EUT by laboratory

None

2. Equipment Under Test

2.1 General Description of equipment

EUT is the Mobile Phone.

2.2 EUT information

Applicant	:	KYOCERA Corporation Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa, Japan Phone: +81-45-943-6253 Fax: +81-45-943-6314
Equipment under test	:	Mobile Phone
Trade name	:	Kyocera
Model number	:	KA43
Serial number	:	N/A
EUT condition	:	Pre-Production
Power ratings	:	Battery: DC 3.8V
Size	:	(W) 72.2 × (D) 15.5 × (H) 147.2 mm
Environment	:	Indoor and Outdoor use
Terminal limitation	:	-20°C to 60°C
RF Specification Frequency of Operation	:	Up Link GSM850: 824.2-848.8MHz WCDMA Band V: 826.4-846.6MHz LTE Band V: 824-849MHz
Modulation type	:	Down Link GSM850: 869.20-893.8MHz WCDMA Band V: 871.4-891.6MHz LTE Band V: 869-894MHz
Emission designator	:	GSM850: 245KGXW WCDMA Band V: 4M15F9W LTE Band V: QPSK: 9M01G7D, 16QAM: 9M01W7D
Output power	:	GSM850: 1.122W ERP (30.5dBm) WCDMA Band V: 0.083W ERP (19.2dBm) LTE Band V: QPSK 0.229W ERP (23.6dBm), 16QAM 0.234W ERP (23.7dBm)
Antenna type	:	Internal antenna
Antenna gain	:	GSM850: -0.1dBi WCDMA Band V: -0.1dBi LTE Band V: -0.1dBi

2.3 Variation of the family model(s)

Not applicable

2.4 Description of Test mode

The EUT had been tested under operating condition.
 There are three channels have been tested as following:

Band	Channel	Frequency
GSM850	128	824.2MHz
	190	836.6MHz
	251	848.8MHz
WCDMA Band V	4132	826.4MHz
	4183	836.6MHz
	4233	846.6MHz

Band	Modulation	Bandwidth	Channel	Frequency [MHz]
LTE Band V	QPSK	1.4MHz	20407	824.7
			20525	836.5
			20643	848.3
		3MHz	20415	825.5
			20525	836.5
			20635	847.5
		5MHz	20425	826.5
			20525	836.5
			20625	846.5
		10MHz	20450	829.0
			20525	836.5
			20600	844.0
	16QAM	1.4MHz	20407	824.7
			20525	836.5
			20643	848.3
		3MHz	20415	825.5
			20525	836.5
			20635	847.5
		5MHz	20425	826.5
			20525	836.5
			20625	846.5
		10MHz	20450	829.0
			20525	836.5
			20600	844.0

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in Z(GSM850, LTE Band V) and X(WCDMA Band V) axis and the worst case recorded.

3. Configuration of equipment

3.1 Equipment(s) used

No.	Equipment	Company	Model No.	Serial No.	FCC ID / DoC	Comment
1	Mobile Phone	KYOCERA	KA43	N/A	JOYKA43	EUT

3.2 System configuration

1. Mobile Phone
(EUT)

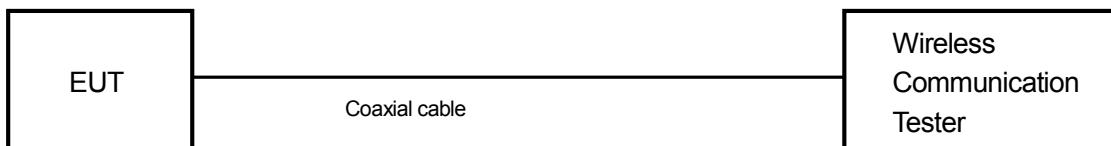
Note1: Numbers assigned to equipment on this diagram correspond to the list in "3.1 Equipment(s) used".

4. Conducted Output Power

4.1 Measurement procedure [FCC 2.1046]

The conducted output power was measured with a wireless communication tester connected to the antenna terminal. The wireless communication tester parameters were set to produce the maximum power from the EUT.

- Test configuration



4.2 Measurement result

Date : March 23, 2015
 Temperature : 21.0 [°C]
 Humidity : 46.0 [%]
 Test place : Shielded room No.4

Test engineer :

Hikaru Shibata

Band	Channel	Frequency [MHz]	Maximum Burst-Averaged Output Power [dBm]				
			GPRS/EDGE(GMSK)Data				
			Voice GSM CS 1slot	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot
GSM 850	128	824.2	<u>32.14</u>	32.13	31.45	29.60	29.05
	190	836.6	32.12	32.02	31.36	29.45	29.02
	251	848.8	32.08	32.11	30.92	29.11	28.60

Date : March 23, 2015
 Temperature : 21.0 [°C]
 Humidity : 46.0 [%]
 Test place : Shielded room No.4

Test engineer : Hikaru Shibata

3GPP Release Version	Mode		Sub- Test	Power [dBm]			MPR	Bc	βd	Bc/βd	
	Channel			4132	4183	4233					
	Frequency [MHz]			826.4	836.6	846.6					
99	W-CDMA	RMC	-	23.40	23.50	23.49	-	-	-	-	
		AMR		23.30	23.37	23.41					
5	HSDPA (Cellular)		1	22.40	22.51	22.50	0	2/15	15/15	2/15	
5			2	22.58	22.54	22.55	0	12/15	15/15	12/15	
5			3	22.09	22.11	22.11	0.5	15/15	8/15	15/8	
5			4	22.07	22.04	22.08	0.5	15/15	4/15	15/4	
6	HSUPA		1	22.14	22.01	22.40	0	11/15	15/15	11/15	
6			2	21.21	21.04	20.99	2	6/15	15/15	6/15	
6			3	21.35	21.18	21.53	1	15/15	9/15	15/9	
6			4	21.48	21.42	20.80	2	2/15	15/15	2/15	
6			5	22.52	22.46	22.54	0	15/15	15/15	15/15	

Date : March 24, 2015
 Temperature : 22.0 [°C]
 Humidity : 46.3 [%]
 Test place : Shielded room No.4

Test engineer : Hikaru Shibata

Band	BW [MHz]	Mode	RB Allocation	RB offset	Target MPR	Avg Power[dBm]		
						20407	20525	20643
						824.7 MHz	836.5 MHz	848.3 MHz
LTE Band 5	1.4	QPSK	1	0	0	23.38	23.40	21.89
			1	3	0	23.40	23.38	21.86
			1	5	0	22.76	23.33	21.85
			3	0	0	23.27	23.39	21.89
			3	1	0	23.29	23.37	21.87
			3	3	0	23.39	23.34	21.90
			6	0	1	22.46	22.41	20.90
		16QAM	1	0	1	22.32	22.41	21.08
			1	3	1	22.30	22.32	21.00
			1	5	1	22.28	22.40	20.95
			3	0	1	22.20	22.43	20.94
			3	1	1	22.24	22.39	20.86
			3	3	1	22.36	22.41	20.89
			6	0	2	21.42	21.34	19.83

Band	BW [MHz]	Mode	RB Allocation	RB offset	Target MPR	Avg Power[dBm]		
						20415	20525	20635
						825.5 MHz	836.5 MHz	847.5 MHz
LTE Band 5	3	QPSK	1	0	0	23.30	23.33	21.84
			1	8	0	23.39	22.83	21.86
			1	14	0	23.42	22.84	21.90
			8	0	1	22.40	22.37	20.85
			8	4	1	22.36	22.35	20.84
			8	7	1	22.37	22.39	20.85
			15	0	1	22.41	22.38	20.84
		16QAM	1	0	1	22.38	22.60	20.66
			1	8	1	22.36	22.48	20.83
			1	14	1	22.39	22.53	20.98
			8	0	2	21.43	21.32	19.89
			8	4	2	21.38	21.30	19.88
			8	7	2	21.40	21.31	19.89
			15	0	2	21.35	21.34	19.88



Zacta

Band	BW [MHz]	Mode	RB Allocation	RB offset	Target MPR	Avg Power[dBm]		
						20425	20525	20625
						826.5 MHz	836.5 MHz	846.5 MHz
LTE Band 5	5	QPSK	1	0	0	23.28	23.35	21.75
			1	12	0	23.33	23.34	21.76
			1	24	0	23.40	23.32	21.88
			12	0	1	22.41	22.36	20.74
			12	7	1	22.34	22.35	20.87
			12	13	1	22.41	22.39	20.88
			25	0	1	22.39	22.38	20.85
		16QAM	1	0	1	22.20	22.22	20.77
			1	12	1	22.29	22.18	20.83
			1	24	1	22.32	22.20	20.95
			12	0	2	21.43	21.36	19.75
			12	7	2	21.42	21.30	19.89
			12	13	2	21.40	21.35	19.84
			25	0	2	21.38	21.37	19.88

Band	BW [MHz]	Mode	RB Allocation	RB offset	Target MPR	Avg Power[dBm]		
						20450	20525	20600
						829.0 MHz	836.5 MHz	844.0 MHz
LTE Band 5	10	QPSK	1	0	0	23.26	23.40	<u>23.42</u>
			1	25	0	23.37	23.34	21.88
			1	49	0	23.35	22.80	21.97
			25	0	1	22.43	22.40	21.53
			25	12	1	22.44	22.34	20.89
			25	25	1	22.40	22.35	20.86
			50	0	1	22.41	22.37	21.21
		16QAM	1	0	1	22.25	22.33	22.45
			1	25	1	22.36	22.30	20.90
			1	49	1	22.35	21.76	20.99
			25	0	2	21.41	21.39	20.51
			25	12	2	21.35	21.38	19.87
			25	25	2	21.38	21.33	19.90
			50	0	2	21.43	21.36	20.21

5. Effective Radiated Power

5.1 Measurement procedure

[FCC 22.913(a)]

<Step 1>

The EUT and support equipment are placed on a 1 meter x 1.5 meter surface, 0.8 meter height FRP table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission.

The bandwidth of the spectrum analyzer is set to 1MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission.

<Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT).

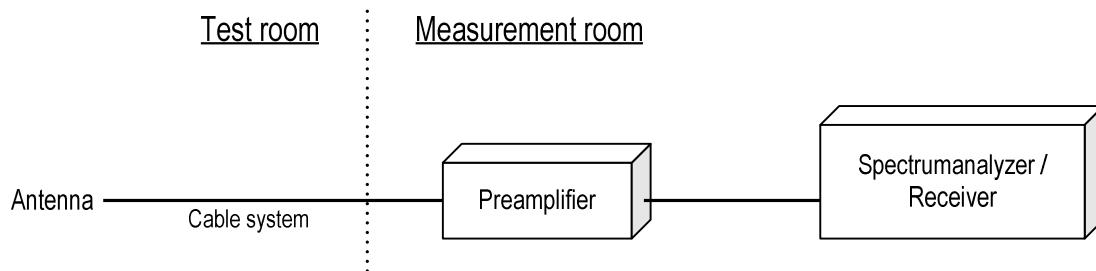
The frequency of the signal generator is adjusted to the measurement frequency.

Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

Spectrum analyzer setting

- Detector: Peak (RBW: 3MHz, VBW: 8MHz): GSM
- Detector: Peak (RBW: 5MHz, VBW: 8MHz): WCDMA

- Test configuration



5.2 Calculation method

Result (ERP) = S.G Reading – Cable loss + Antenna Gain

Margin = Limit – Result (ERP)

5.3 Limit

7 W (38.45dBm)

5.4 Test data

Date	:	March 30, 2015					
Temperature	:	22.3 [°C]					
Humidity	:	27.8 [%]	Test engineer	:			
Test place	:	3m Semi-anechoic chamber				Taiki Watanabe	
Date	:	March 31, 2015					
Temperature	:	20.9 [°C]					
Humidity	:	20.9 [%]	Test engineer	:			
Test place	:	3m Semi-anechoic chamber				Taiki watanabe	
Date	:	April 16, 2015					
Temperature	:	21.6 [°C]					
Humidity	:	36.7 [%]	Test engineer	:			
Test place	:	3m Semi-anechoic chamber				Taiki watanabe	

[GSM850]

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	824.2	-4.1	41.9	0.7	-10.7	30.5	38.4	7.9
H	836.6	-5.1	41.6	0.7	-10.7	30.2	38.4	8.2
H	848.8	-5.4	40.8	0.8	-10.7	29.4	38.4	9.0

[WCDMA Band V]

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	826.4	-11.5	30.6	0.7	-10.7	19.2	38.4	19.2
H	836.6	-12.9	30.2	0.7	-10.7	18.8	38.4	19.6
H	846.6	-13.3	29.3	0.8	-10.7	17.9	38.4	20.5

Date	:	April 2, 2015					
Temperature	:	24.3 [°C]					
Humidity	:	36.7 [%]	Test engineer	:			
Test place	:	3m Semi-anechoic chamber				Hikaru Shibata	
Date	:	April 16, 2015					
Temperature	:	21.6 [°C]					
Humidity	:	36.7 [%]	Test engineer	:			
Test place	:	3m Semi-anechoic chamber				Taiki watanabe	

[LTE Band V]
QPSK, BW 1.4MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	824.2	-8.8	34.5	0.7	-10.7	23.1	34.7	11.6
H	836.0	-11.4	32.0	0.7	-10.7	20.6	34.7	14.1
H	847.8	-11.4	32.0	0.8	-10.7	20.6	34.7	14.1

QPSK, BW 3MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	826.8	-9.9	33.5	0.7	-10.7	22.1	34.7	12.6
H	837.7	-9.6	34.5	0.7	-10.7	23.1	34.7	11.6
H	848.4	-11.3	32.0	0.8	-10.7	20.6	34.7	14.1

QPSK, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	824.4	-8.7	34.6	0.7	-10.7	23.2	34.7	11.5
H	834.4	-11.9	32.0	0.7	-10.7	20.6	34.7	14.1
H	844.4	-12.7	30.5	0.7	-10.7	19.1	34.7	15.6

QPSK, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	824.6	-8.4	35.0	0.7	-10.7	23.6	34.7	11.1
H	832.1	-11.9	31.5	0.7	-10.7	20.1	34.7	14.6
H	839.6	-9.1	34.5	0.7	-10.7	23.1	34.7	11.6



Zacta

16QAM, BW 1.4MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	824.2	-8.2	35.1	0.7	-10.7	23.7	34.7	11.0
H	836.0	-10.6	32.8	0.7	-10.7	21.4	34.7	13.3
H	848.1	-11.6	31.8	0.8	-10.7	20.4	34.7	14.3

16QAM, BW 3MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	824.2	-8.5	34.8	0.7	-10.7	23.4	34.7	11.3
H	835.3	-11.7	31.7	0.7	-10.7	20.3	34.7	14.4
H	846.3	-12.7	30.7	0.8	-10.7	19.3	34.7	15.4

16QAM, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	828.7	-10.8	32.5	0.7	-10.7	21.1	34.7	13.6
H	838.6	-9.5	33.5	0.7	-10.7	22.1	34.7	12.6
H	848.7	-11.4	31.5	0.8	-10.7	20.1	34.7	14.6

16QAM, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	824.6	-8.4	35.0	0.7	-10.7	23.6	34.7	11.1
H	832.1	-11.9	31.5	0.7	-10.7	20.1	34.7	14.6
H	839.6	-9.0	34.6	0.7	-10.7	23.2	34.7	11.5

6. Occupied Bandwidth

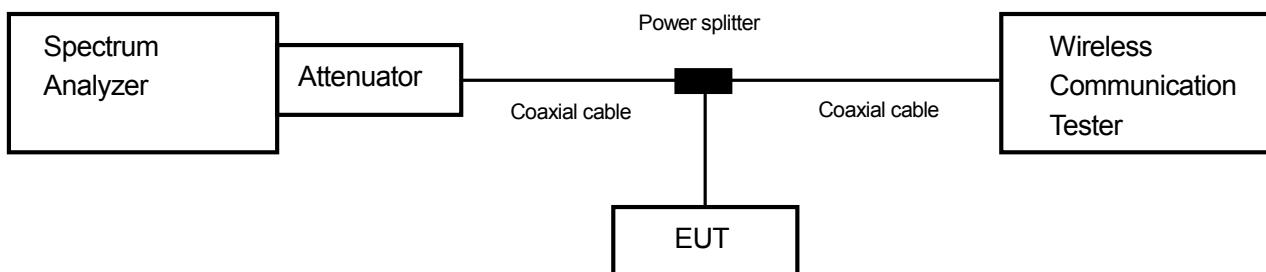
6.1 Measurement procedure [FCC 22.917(a), 2.1049]

The Occupied bandwidth was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;

- RBW=3kHz, VBW=9.1kHz, Span=1MHz, Sweep=auto, Detector=Peak, Trace mode=Max hold
- RBW=51kHz, VBW=150kHz, Span=10MHz, Sweep=auto, Detector=Peak, Trace mode=Max hold
- RBW=30kHz, VBW=91kHz, Span=3MHz, Sweep=auto, Detector=Peak, Trace mode=Max hold
- RBW=62kHz, VBW=180kHz, Span=6MHz, Sweep=auto, Detector=Peak, Trace mode=Max hold
- RBW=100kHz, VBW=300kHz, Span=10MHz, Sweep=auto, Detector=Peak, Trace mode=Max hold
- RBW=200kHz, VBW=620kHz, Span=20MHz, Sweep=auto, Detector=Peak, Trace mode=Max hold

- Test configuration



6.2 Limit

None

6.3 Measurement result

Date : April 14, 2015
 Temperature : 21.7 [°C]
 Humidity : 56.3 [%]
 Test place : Shielded room No.4

Test engineer : Hikaru Shibata

Date : April 16, 2015
 Temperature : 21.6 [°C]
 Humidity : 36.7 [%]
 Test place : Shielded room No.4

Test engineer : Hikaru Shibata

Band	Channel	Frequency (MHz)	Test Result (kHz)
GSM850	128	824.2	245.1441
	190	836.6	242.7124
	251	848.8	243.3628

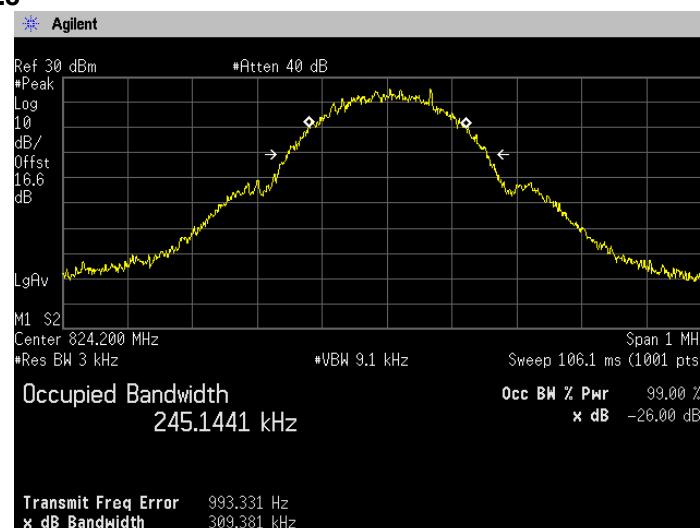
Band	Channel	Frequency (MHz)	Test Result (MHz)
W-CDMA850	4132	826.4	4.1523
	4183	836.6	4.1512
	4233	846.6	4.1409

[LTE Band V]

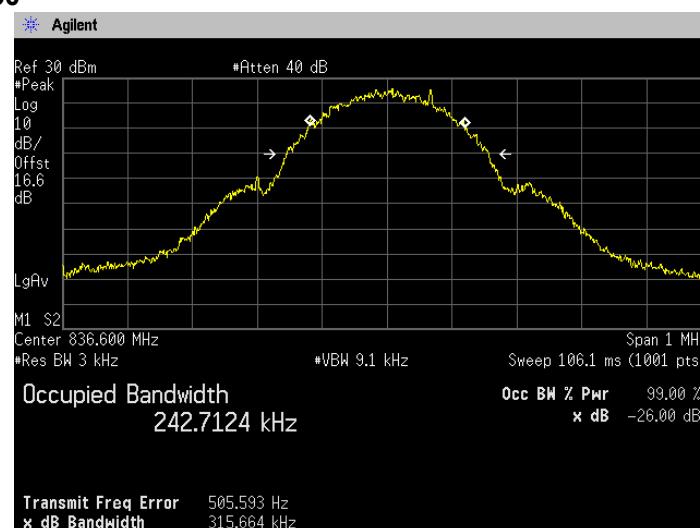
BW	Mode	UL RB Allocation	UL RB Start	Frequency [MHz]	99% OBW [MHz]
1.4MHz	QPSK	1	0	836.5	0.2735
		1	5		0.2782
		3	1		0.6112
		6	0		0.9292
1.4MHz	16QAM	1	0	836.5	0.2722
		1	5		0.2768
		3	1		0.6230
		6	0		0.9264
3MHz	QPSK	1	0	836.5	0.3585
		1	14		0.3454
		8	4		1.5421
		15	0		2.7056
3MHz	16QAM	1	0	836.5	0.3576
		1	14		0.3495
		8	4		1.5416
		15	0		2.7141
5MHz	QPSK	1	0	836.5	0.5113
		1	24		0.5166
		12	7		2.3101
		25	0		4.5160
5MHz	16QAM	1	0	836.5	0.4859
		1	24		0.5020
		12	7		2.3279
		25	0		4.5254
10MHz	QPSK	1	0	836.5	0.8023
		1	49		0.7283
		25	12		4.6561
		50	0		9.0139
10MHz	16QAM	1	0	836.5	0.7707
		1	49		0.7209
		25	12		4.6683
		50	0		9.0052

6.4 Trace data [GSM850]

Channel: 128



Channel: 190

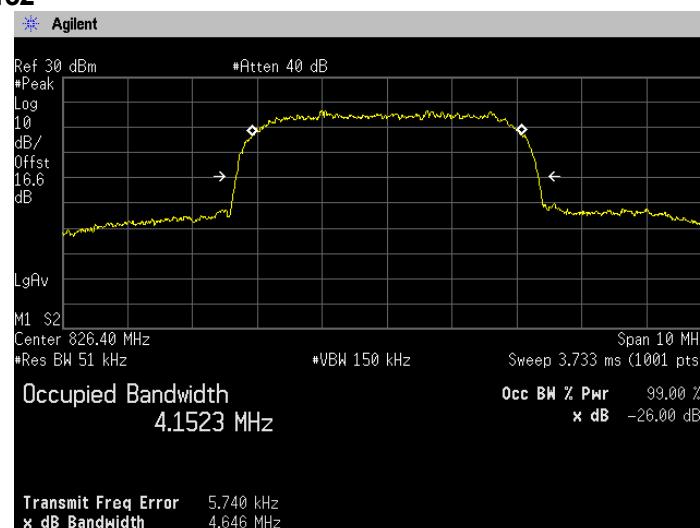


Channel: 251

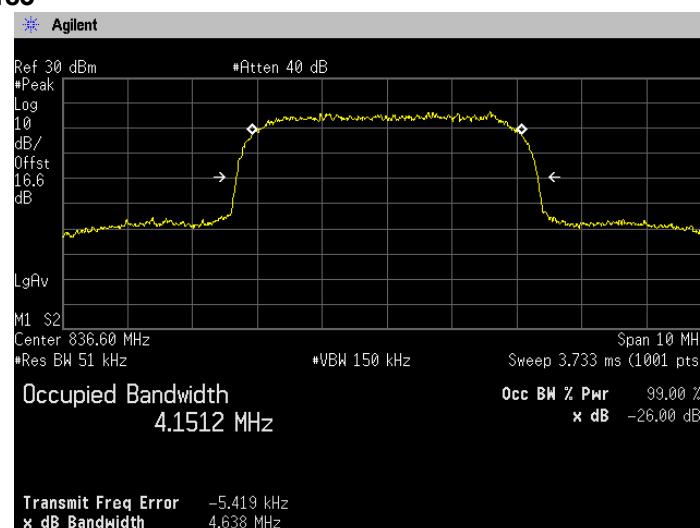


[WCDMA Band V]

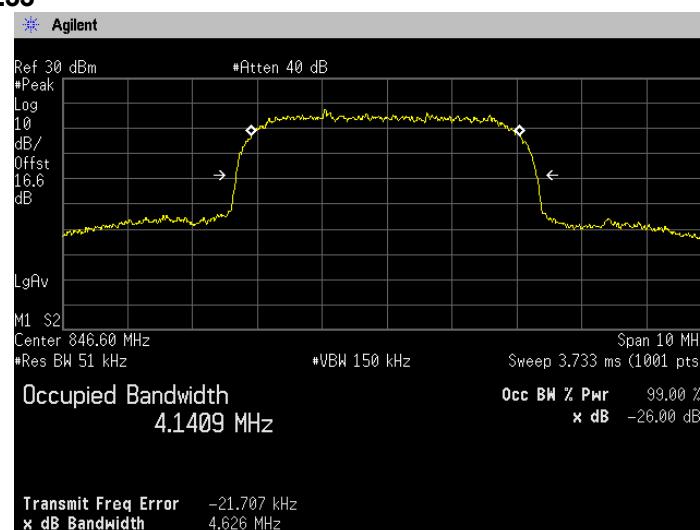
Channel: 4132

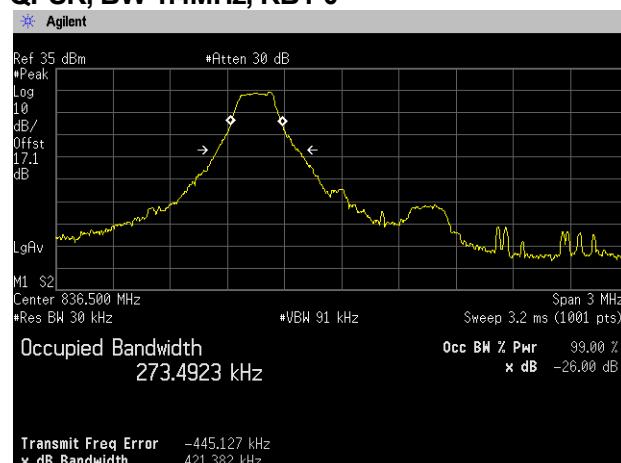
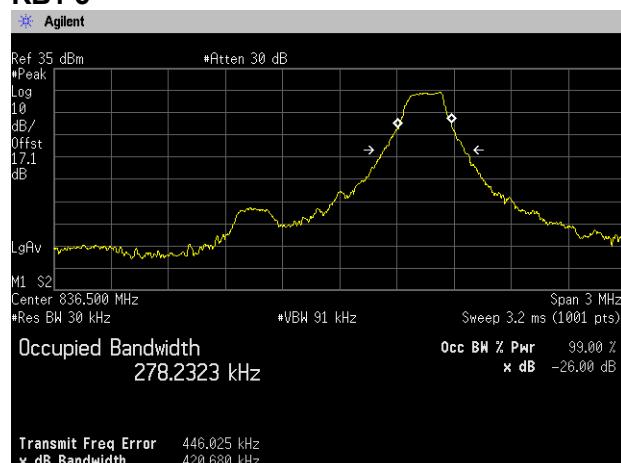
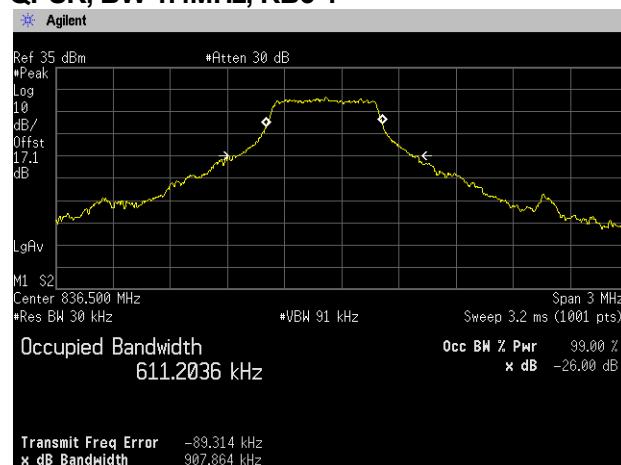
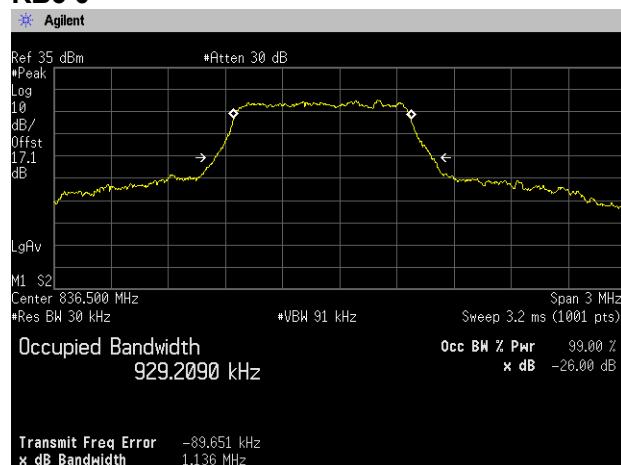


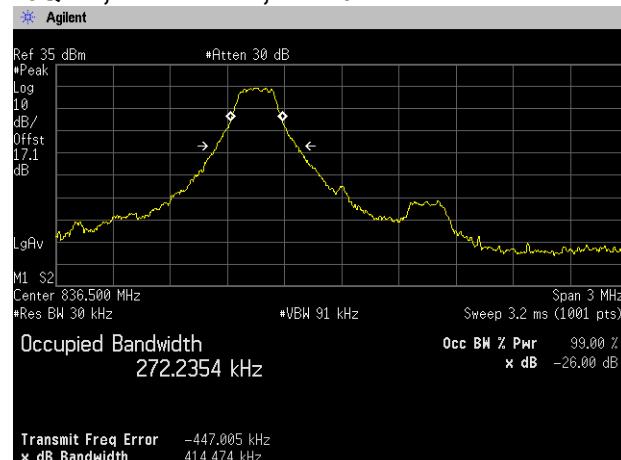
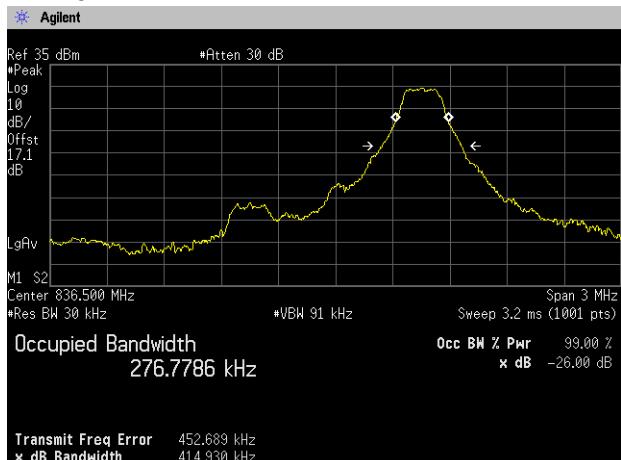
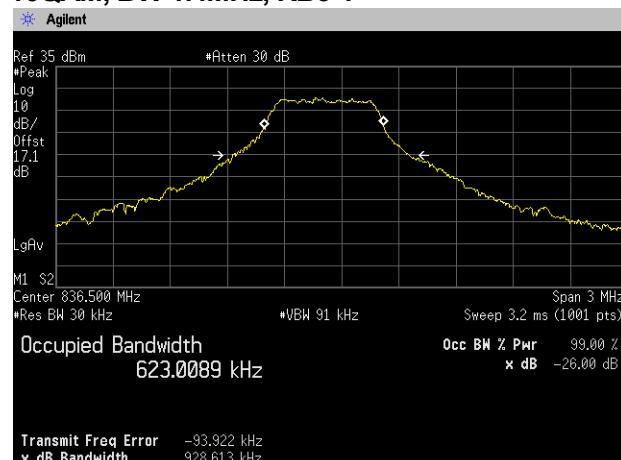
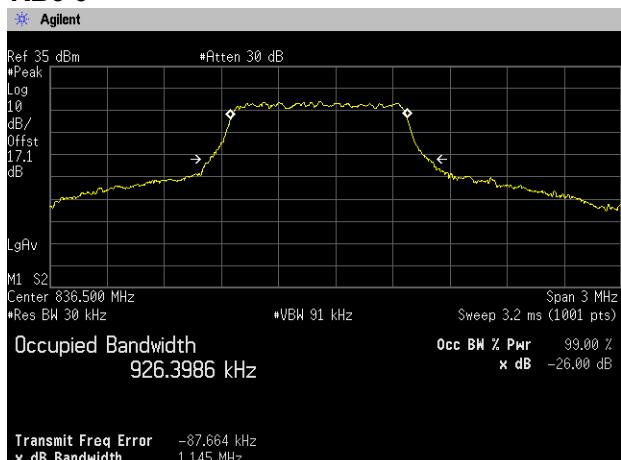
Channel: 4183

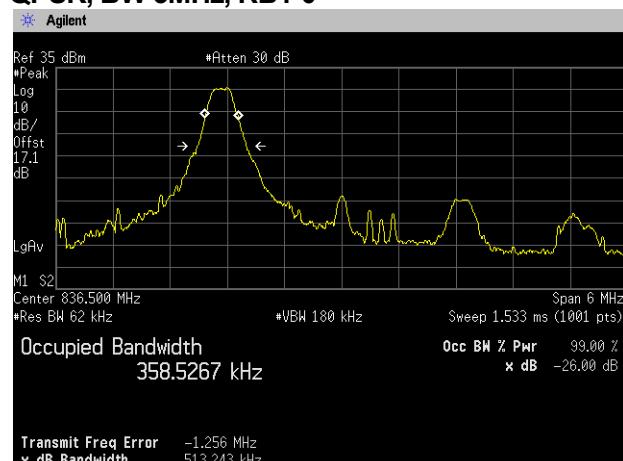
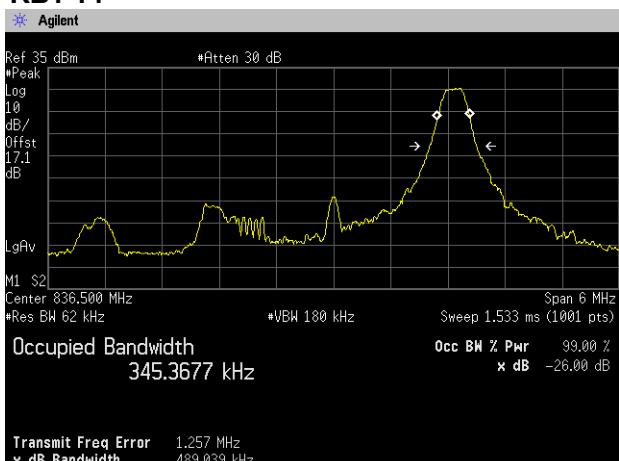
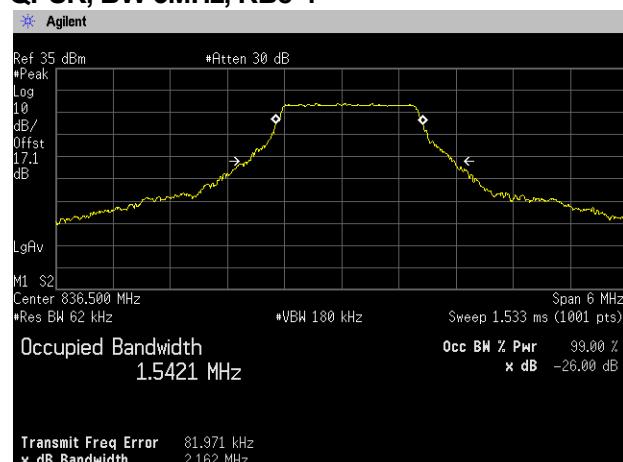
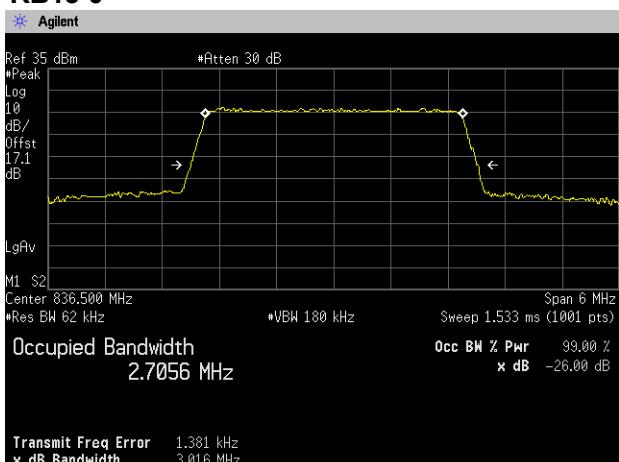


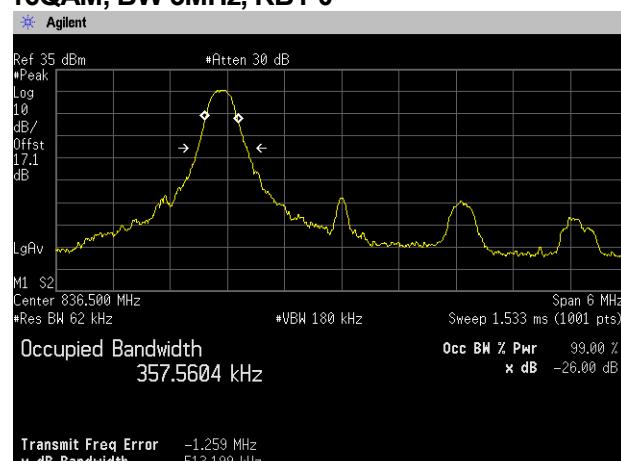
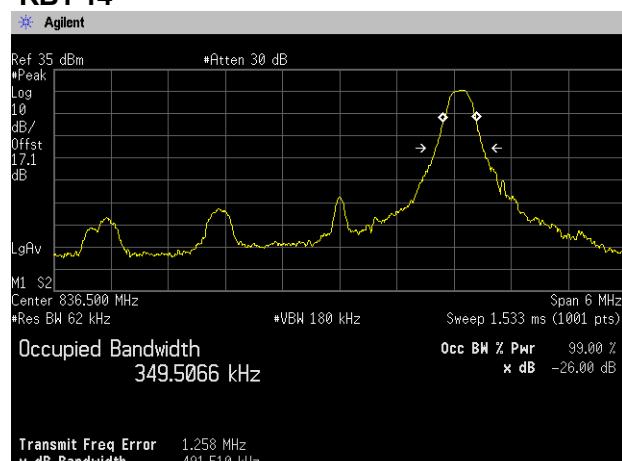
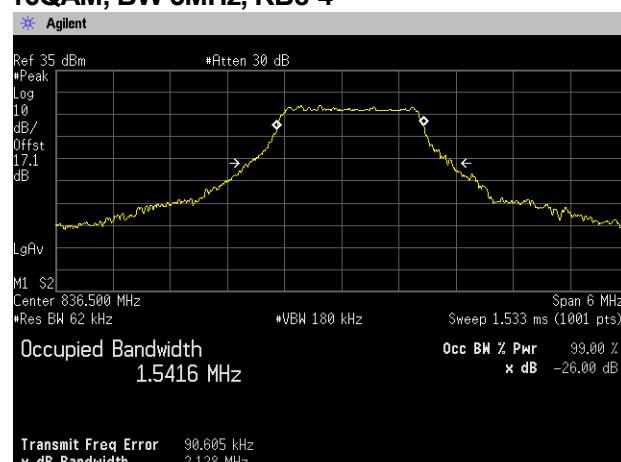
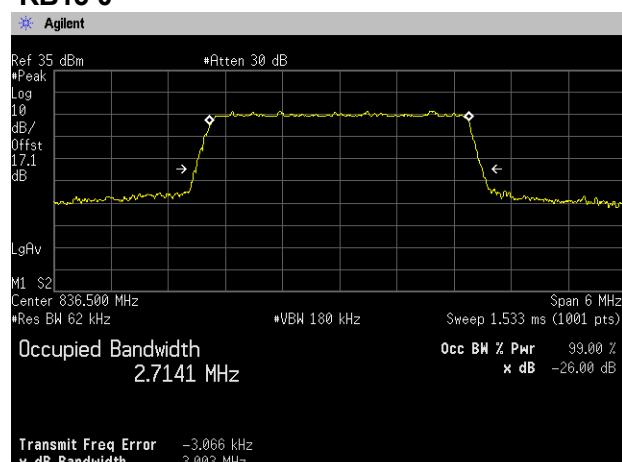
Channel: 4233

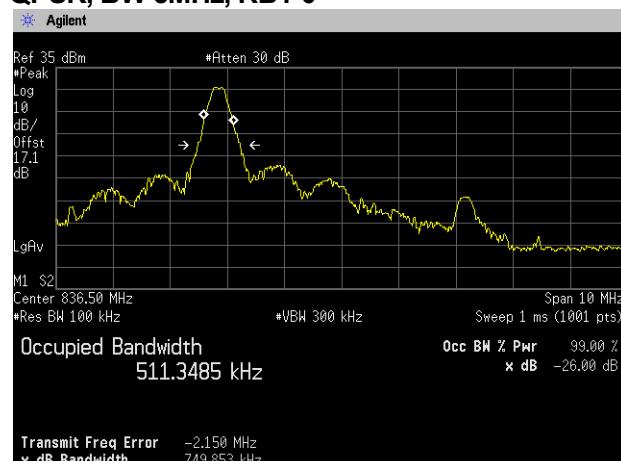
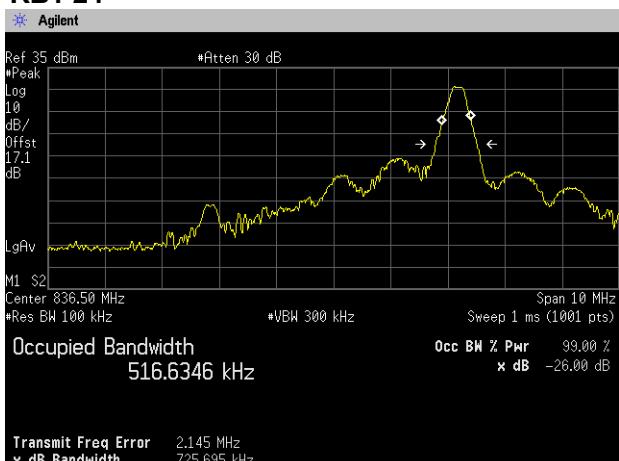
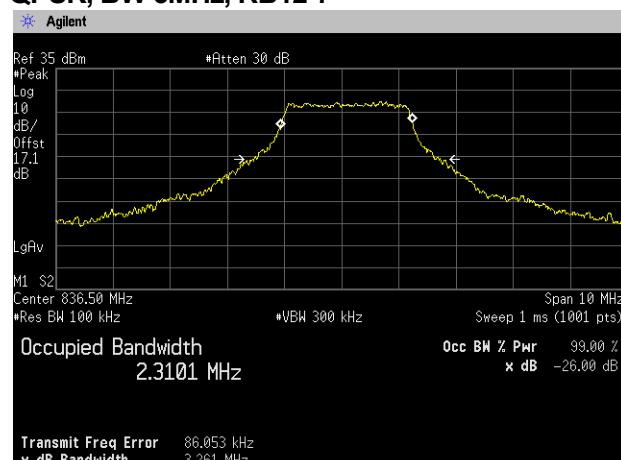
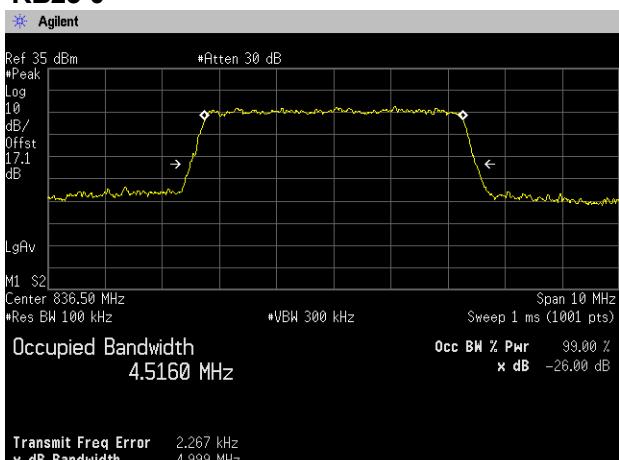


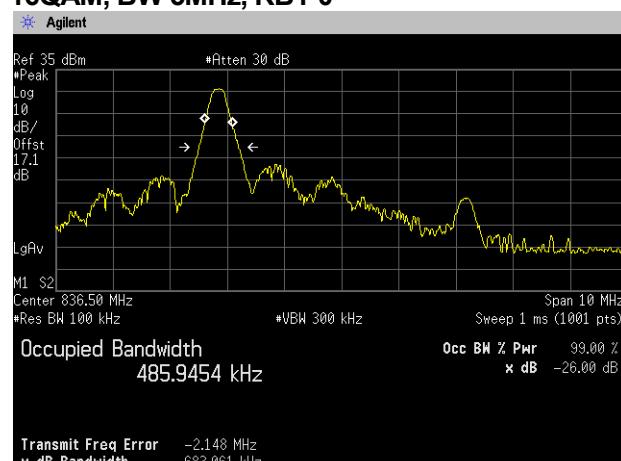
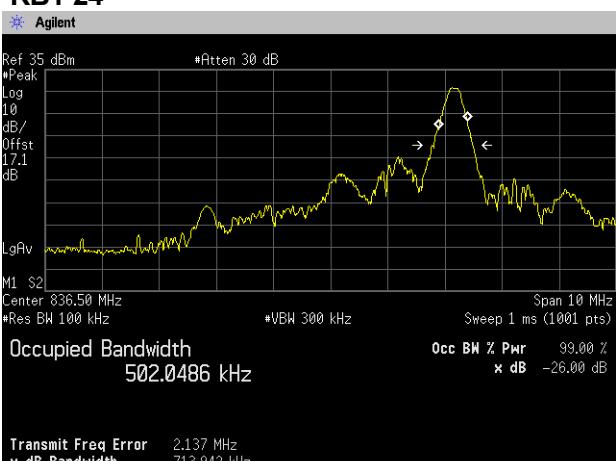
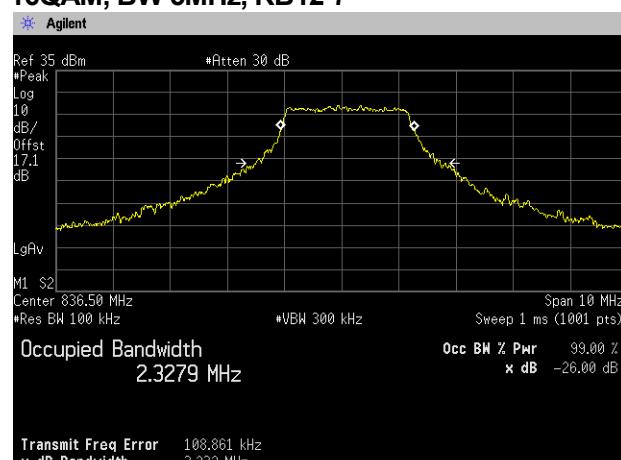
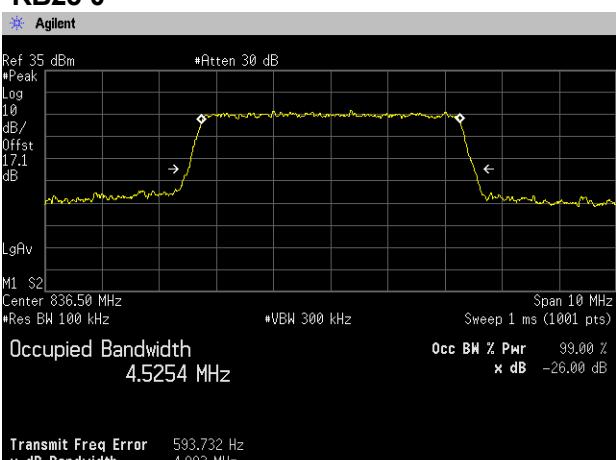
[LTE Band V]**Channel: 20525****QPSK, BW 1.4MHz, RB1-0****RB1-5****QPSK, BW 1.4MHz, RB3-1****RB6-0**

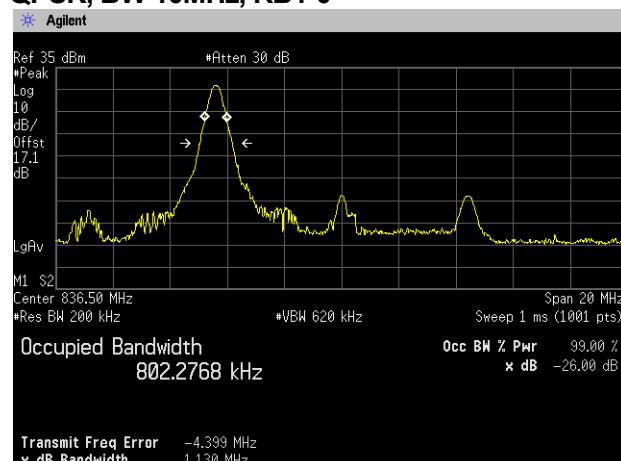
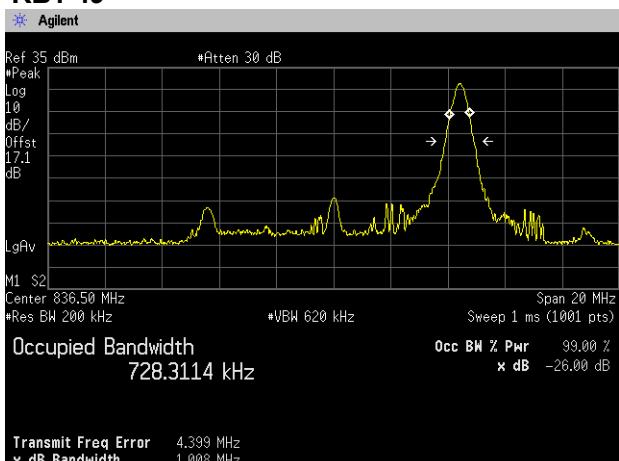
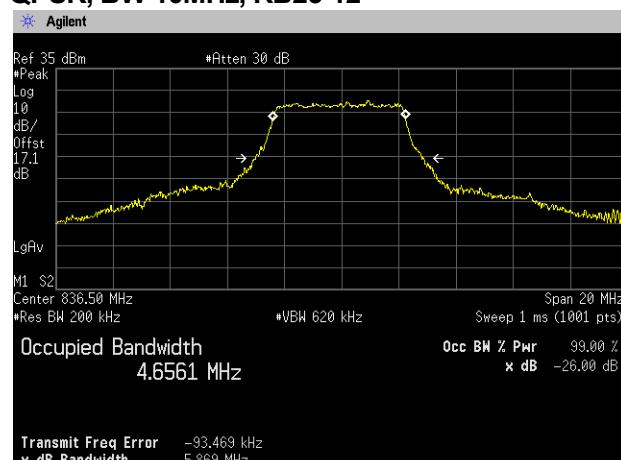
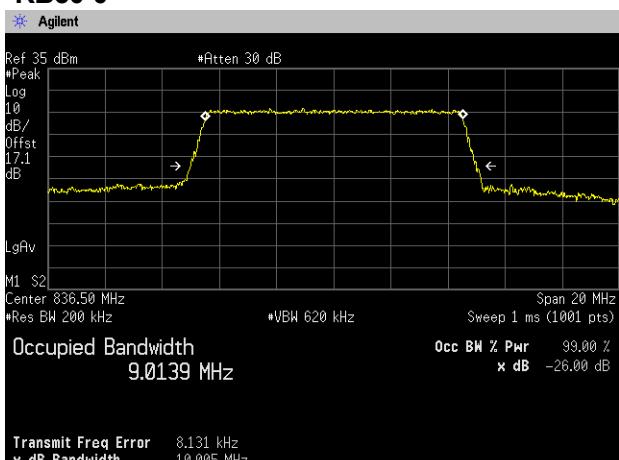
16QAM, BW 1.4MHz, RB1-0**RB1-5****16QAM, BW 1.4MHz, RB3-1****RB6-0**

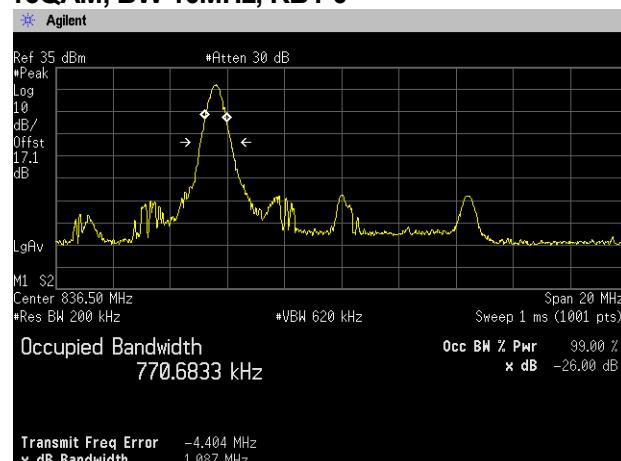
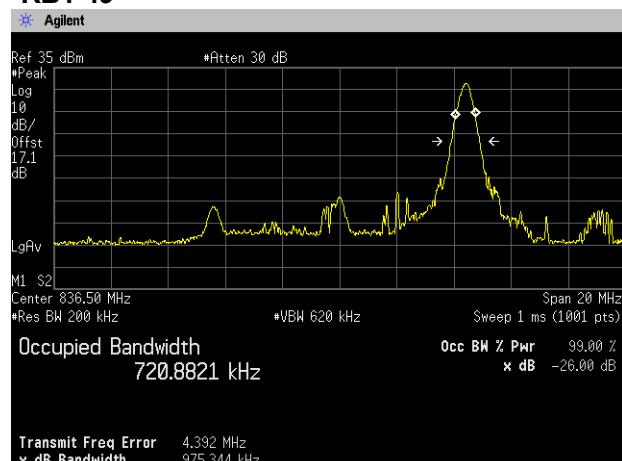
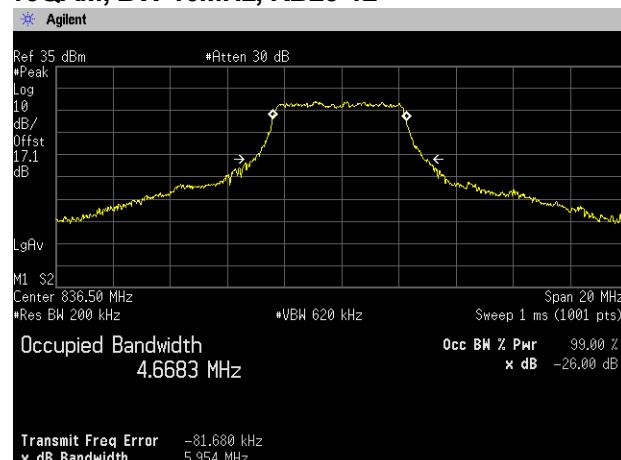
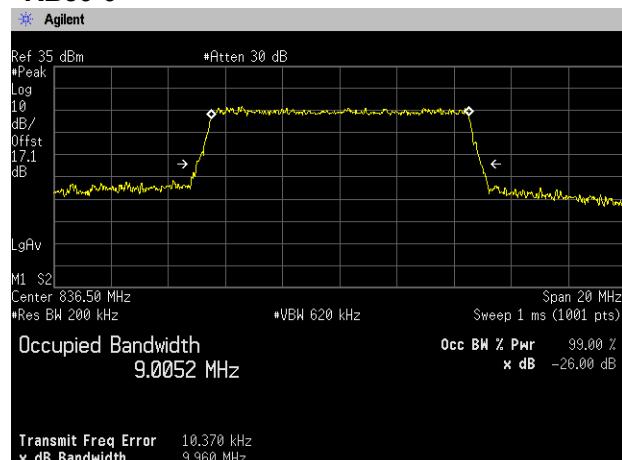
QPSK, BW 3MHz, RB1-0**RB1-14****QPSK, BW 3MHz, RB8-4****RB15-0**

16QAM, BW 3MHz, RB1-0**RB1-14****16QAM, BW 3MHz, RB8-4****RB15-0**

QPSK, BW 5MHz, RB1-0**RB1-24****QPSK, BW 5MHz, RB12-7****RB25-0**

16QAM, BW 5MHz, RB1-0**RB1-24****16QAM, BW 5MHz, RB12-7****RB25-0**

QPSK, BW 10MHz, RB1-0**RB1-49****QPSK, BW 10MHz, RB25-12****RB50-0**

16QAM, BW 10MHz, RB1-0**RB1-49****16QAM, BW 10MHz, RB25-12****RB50-0**

7. Band Edge Spurious and Harmonic at Antenna Terminals

7.1 Measurement procedure [FCC 22.917(a), 2.1051]

The band edge spurious and harmonic was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;

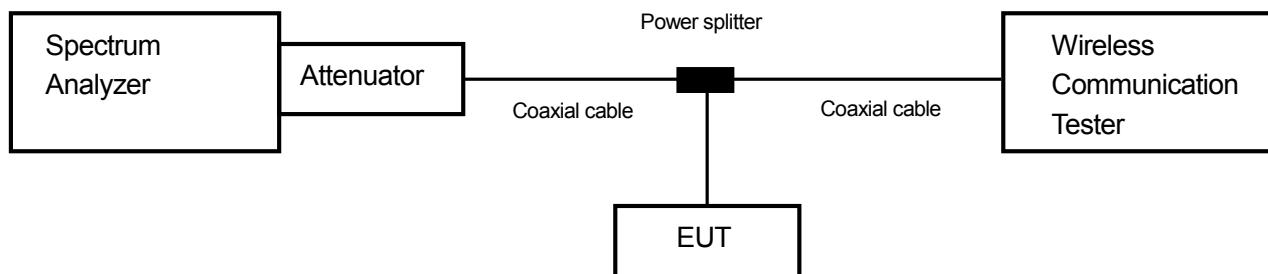
<Band Edge>

- RBW=3kHz, VBW=9.1kHz, Span=1MHz, Sweep=auto, Detector=Average, Trace mode=Max hold
- RBW=51kHz, VBW=150kHz, Span=10MHz, Sweep=auto, Detector=Average, Trace mode=Max hold
- RBW=20kHz, VBW=62kHz, Span=2.8MHz, Sweep=auto, Detector=Average, Trace mode=Max hold
- RBW=43kHz, VBW=130kHz, Span=6MHz, Sweep=auto, Detector=Average, Trace mode=Max hold
- RBW=75kHz, VBW=220kHz, Span=10MHz, Sweep=auto, Detector=Average, Trace mode=Max hold
- RBW=150kHz, VBW=430kHz, Span=20MHz, Sweep=auto, Detector=Average, Trace mode=Max hold

<Spurious Emissions>

- RBW=1MHz, VBW=3MHz, Span=Arbitrary setting, Sweep=auto, Detector=Peak, Trace mode=Max hold

- Test configuration



7.2 Limit

-13dBm or less

7.3 Measurement result

Date	:	April 14, 2015		
Temperature	:	21.7 [°C]		
Humidity	:	56.3 [%]		
Test place	:	Shielded room No.4	Test engineer	:

Hikaru Shibata

Band	Channel	Frequency [MHz]	Limit [dB]	Results	
GSM850	128	824.2	-13.0	See the trace data	PASS
	190	836.6	-13.0	See the trace data	PASS
	251	848.8	-13.0	See the trace data	PASS
WCDMA Band V	4132	826.4	-13.0	See the trace data	PASS
	4183	836.6	-13.0	See the trace data	PASS
	4233	846.6	-13.0	See the trace data	PASS

Date : April 16 2015
 Temperature : 21.6 [°C]
 Humidity : 36.7 [%]
 Test place : Shielded room No.4

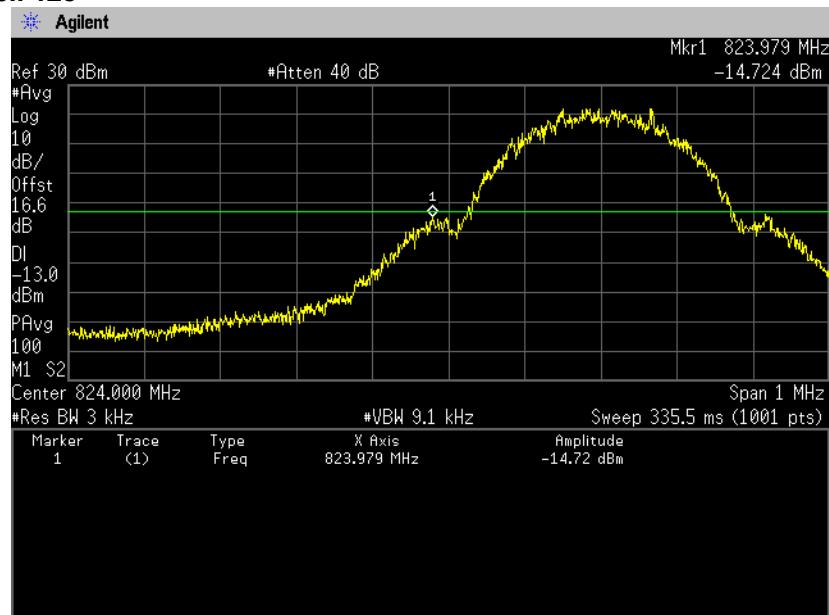
Test engineer :

Hikaru Shibata

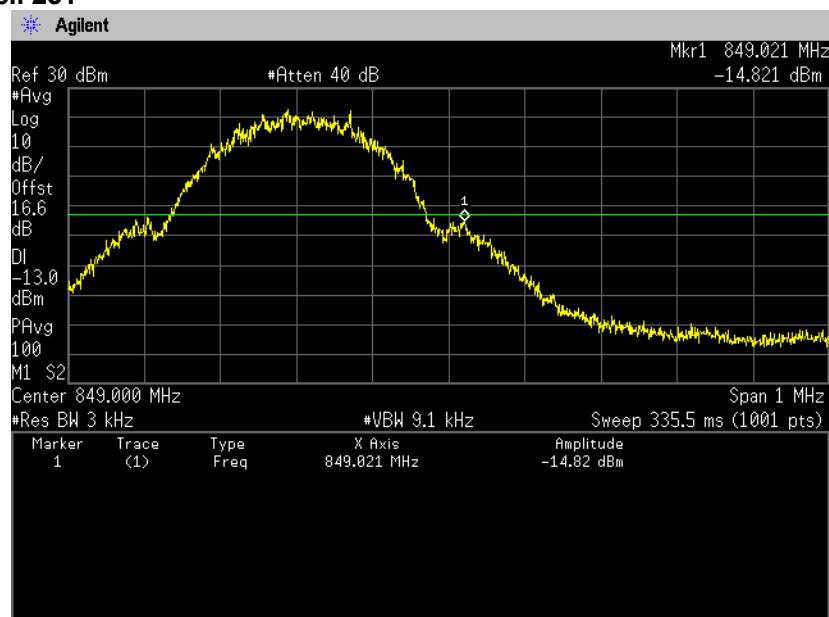
Band	Modulation	Bandwidth	Limit [dB]	Results	
LTE Band V	QPSK	1.4MHz	-13.0	See the trace data	PASS
		3MHz	-13.0	See the trace data	PASS
		5MHz	-13.0	See the trace data	PASS
		10MHz	-13.0	See the trace data	PASS
	16QAM	1.4MHz	-13.0	See the trace data	PASS
		3MHz	-13.0	See the trace data	PASS
		5MHz	-13.0	See the trace data	PASS
		10MHz	-13.0	See the trace data	PASS

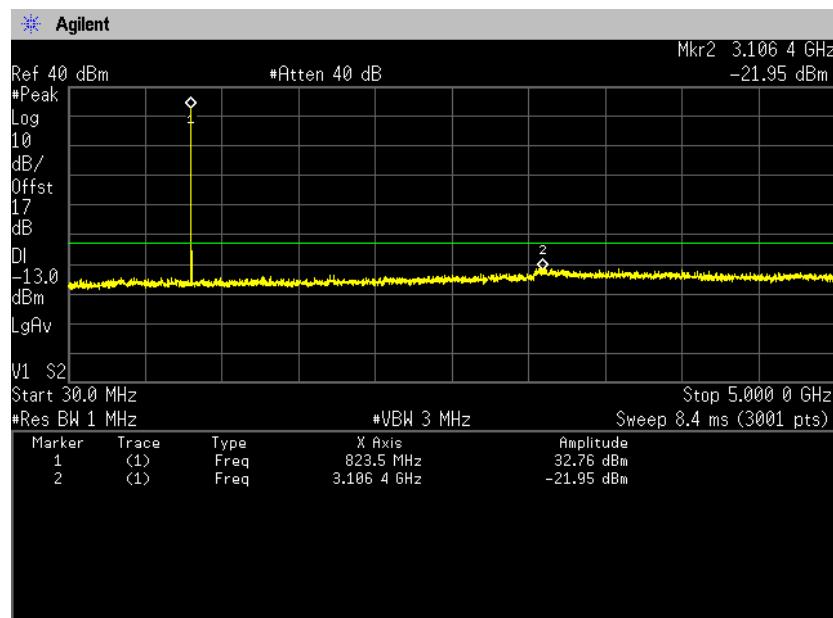
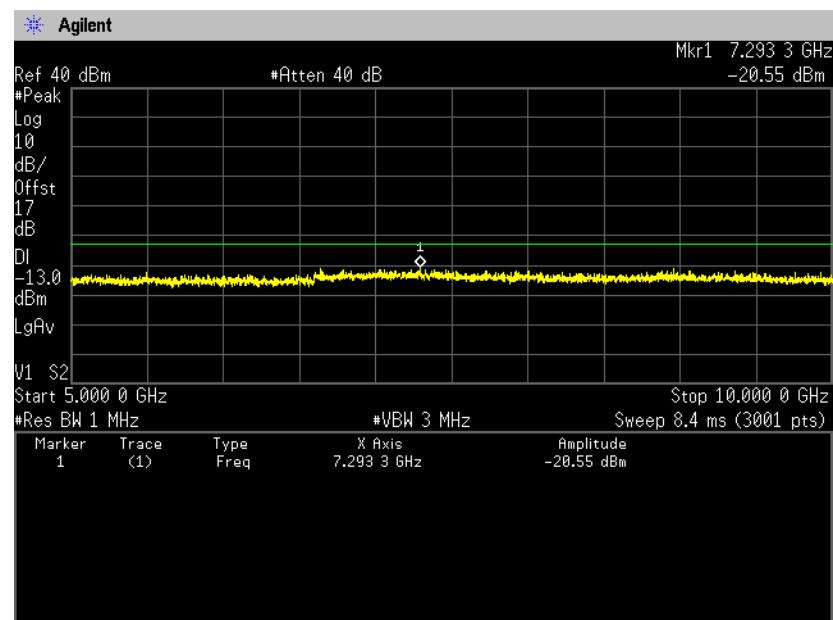
7.4 Trace data [GSM850] (Band Edge)

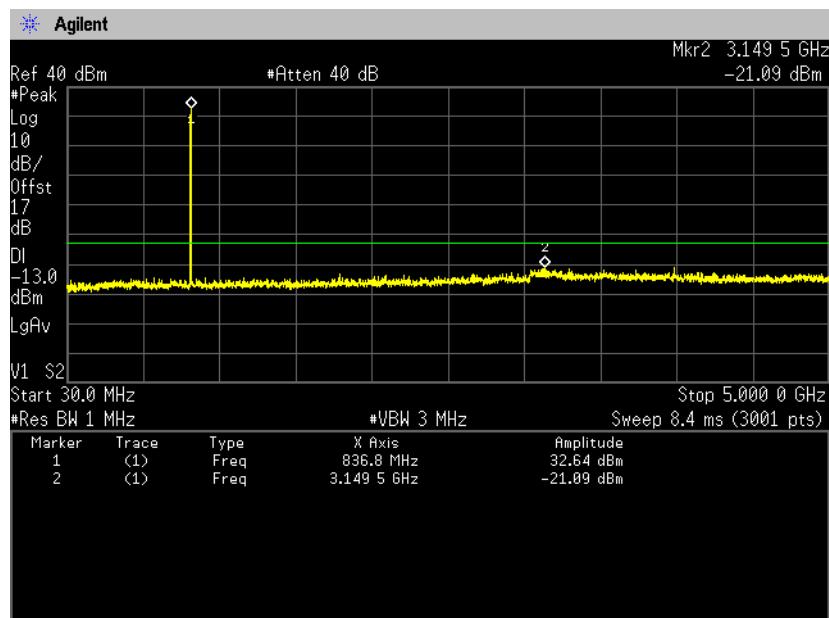
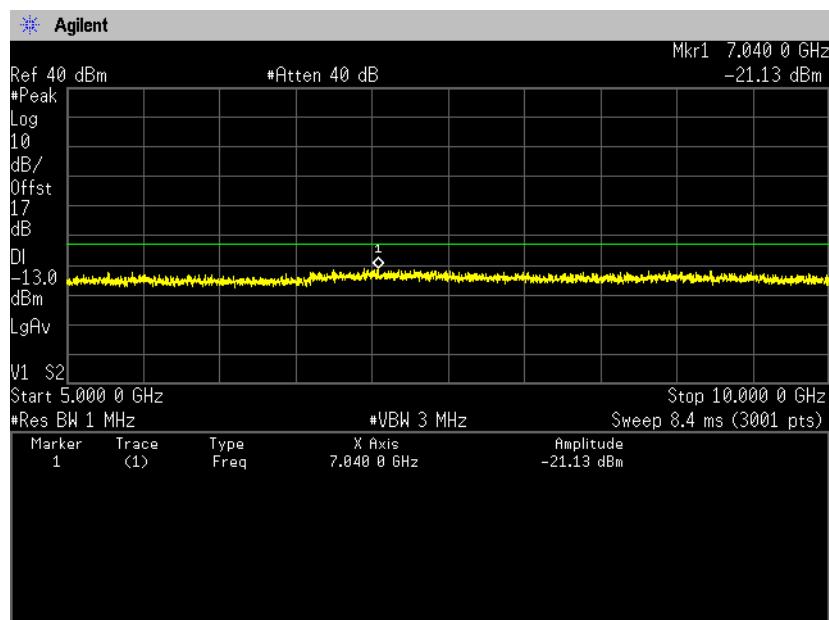
Channel: 128



Channel: 251



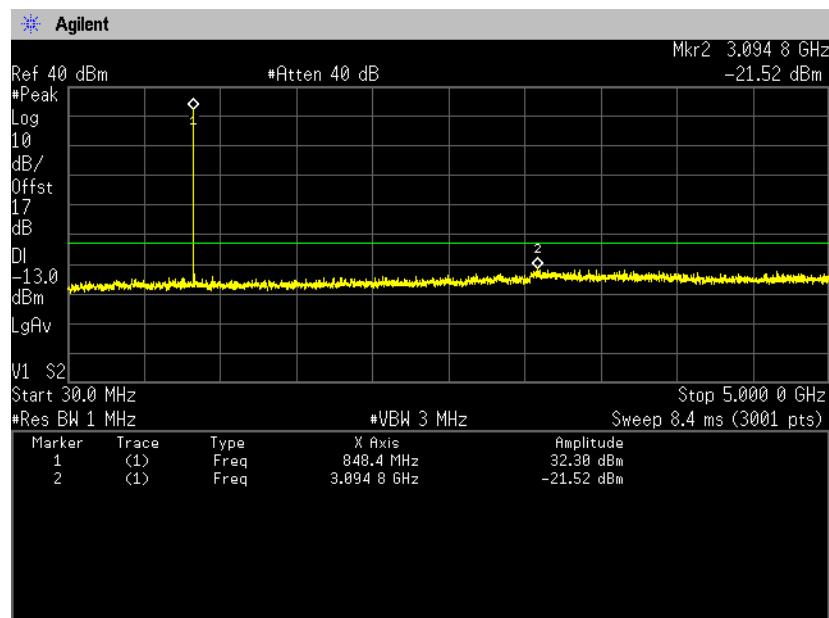
(Spurious Emissions)**Channel: 128****30MHz-5GHz****5GHz-10GHz**

Channel: 190
30MHz-5GHz

5GHz-10GHz


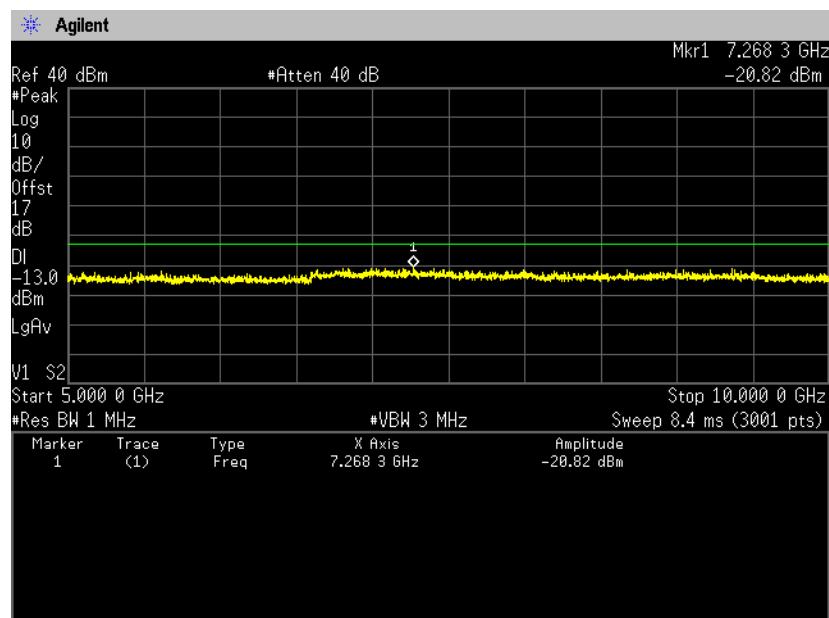


Zacta

Channel: 251 30MHz-5GHz



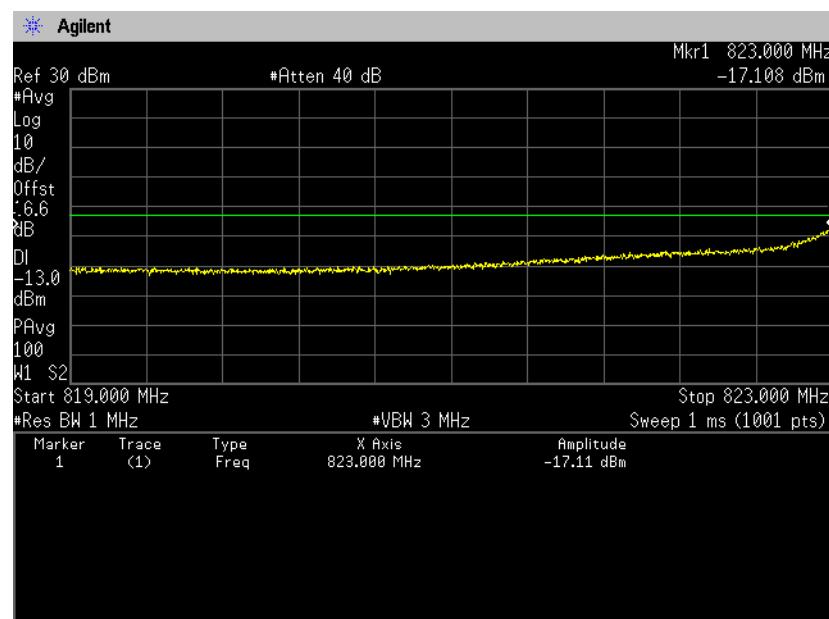
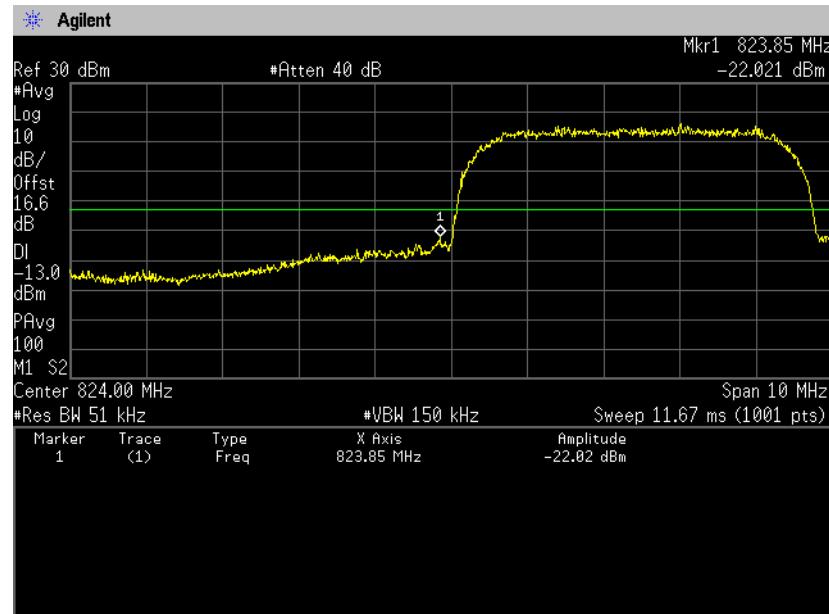
5GHz-10GHz

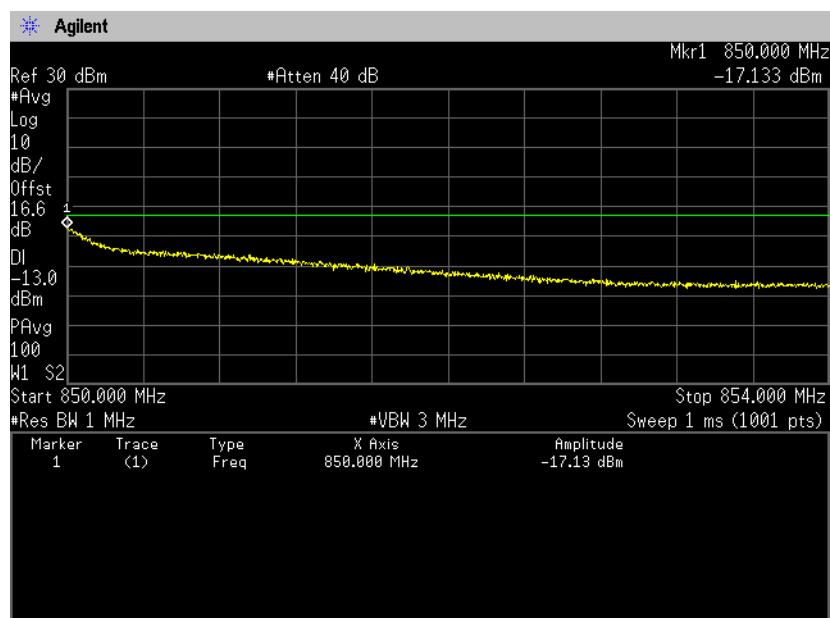
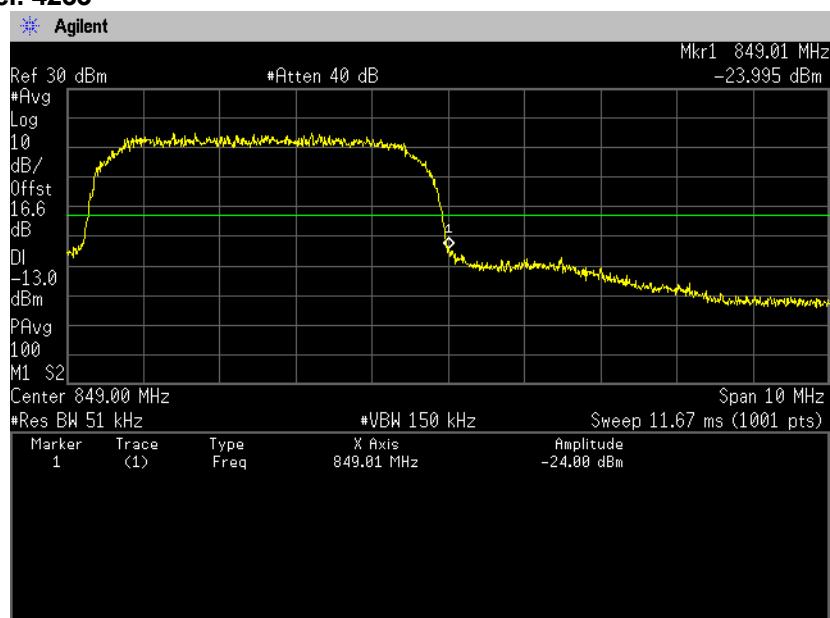


[WCDMA Band V]

(Band Edge)

Channel: 4132

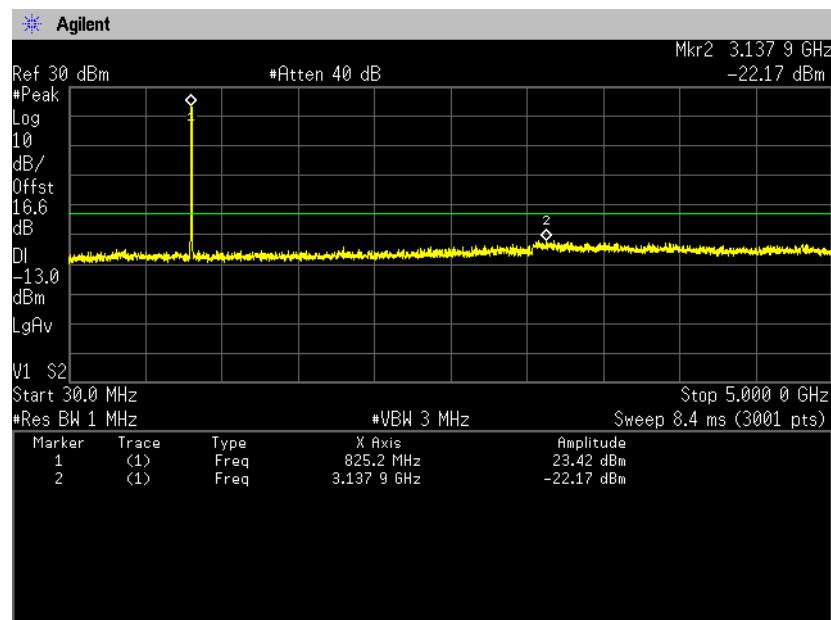


Channel: 4233

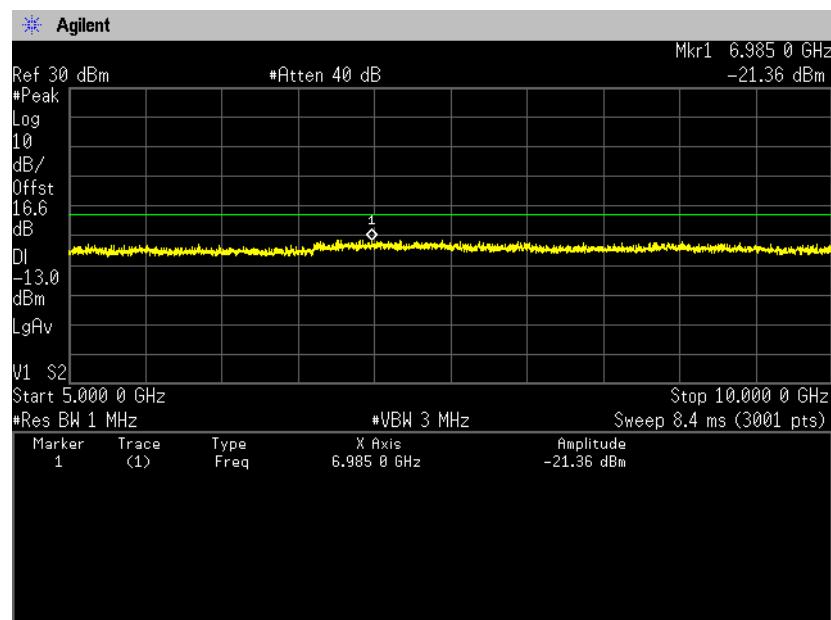
(Spurious Emissions)

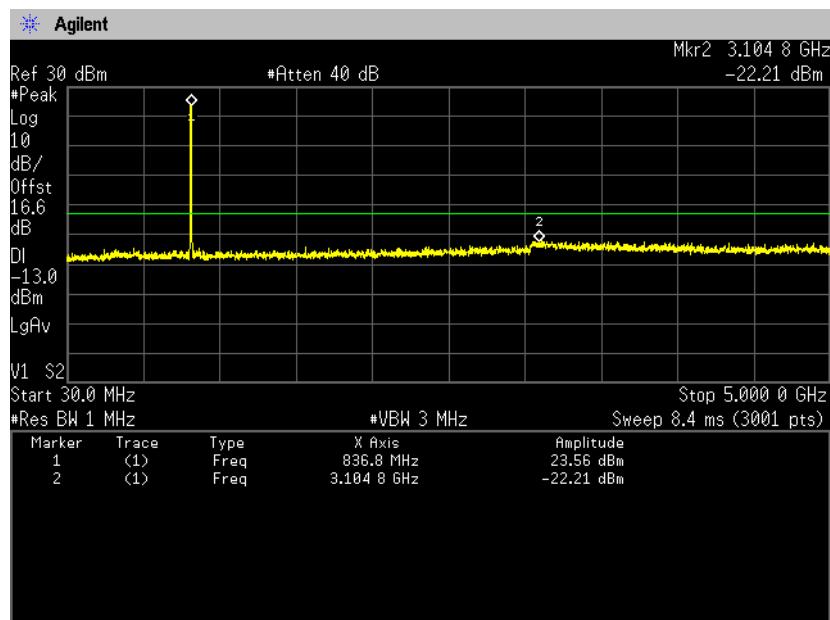
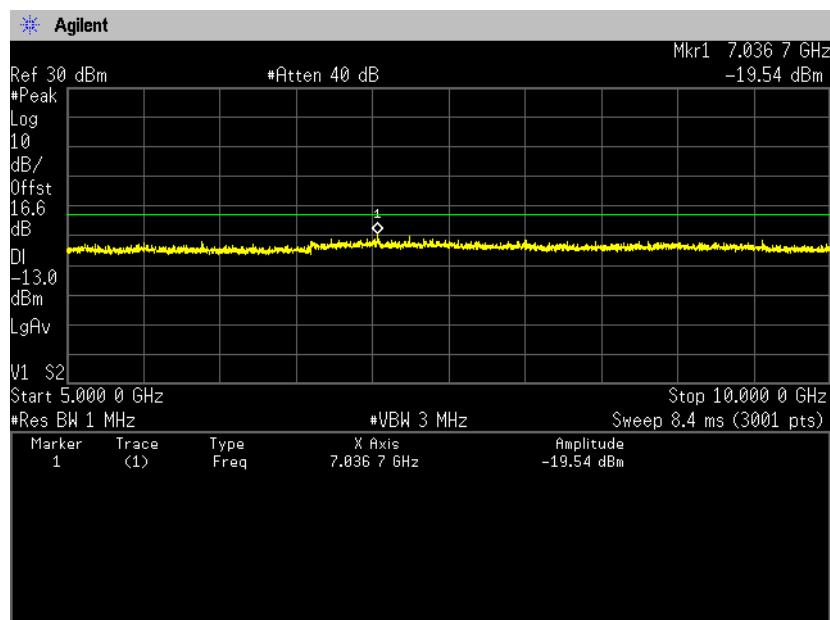
Channel: 4132

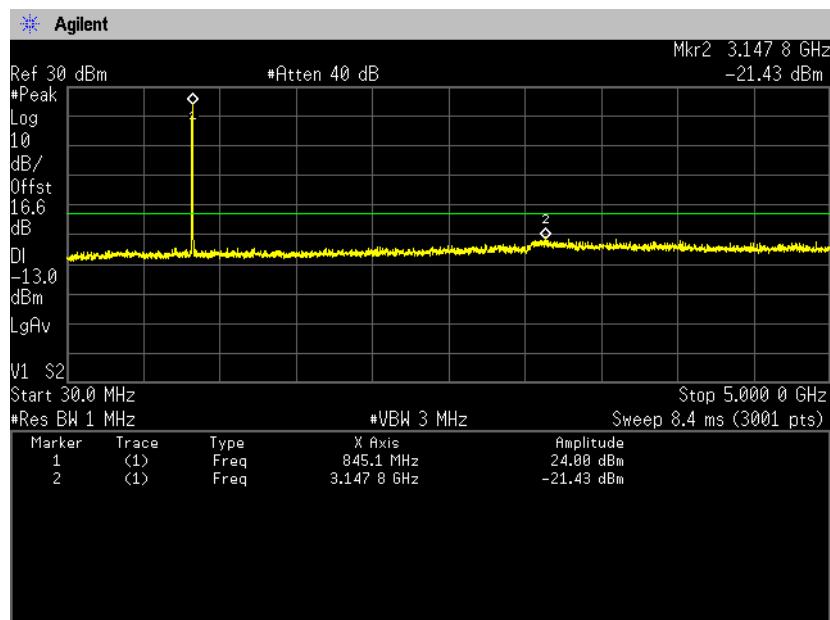
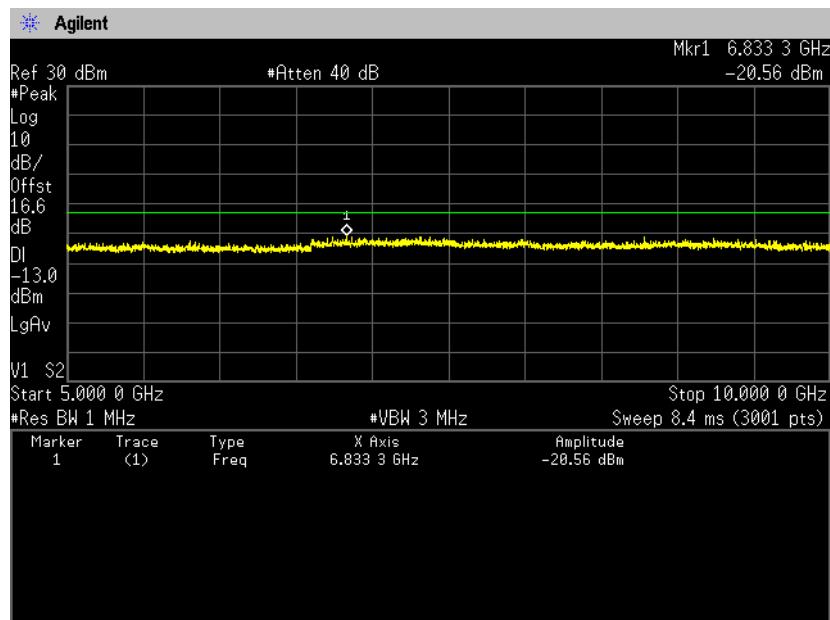
30MHz-5GHz



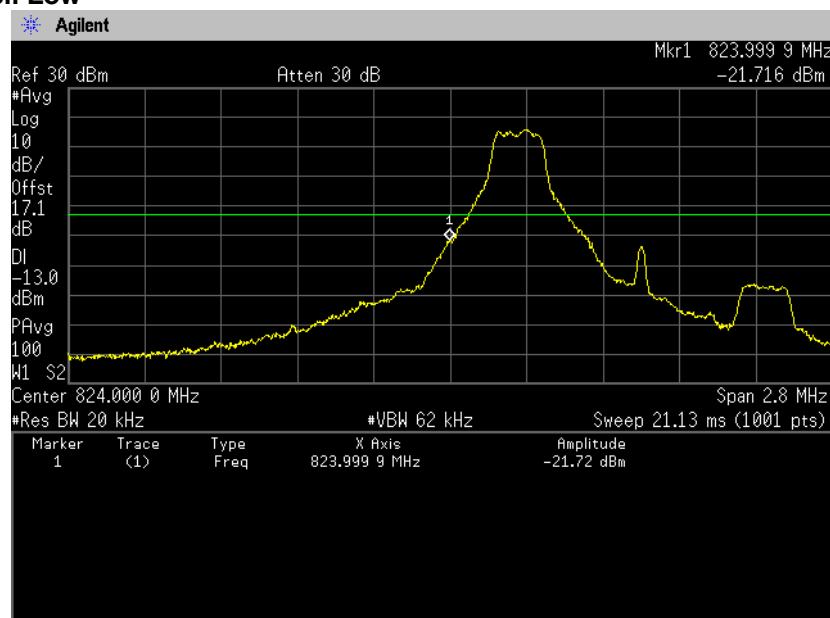
5GHz-10GHz



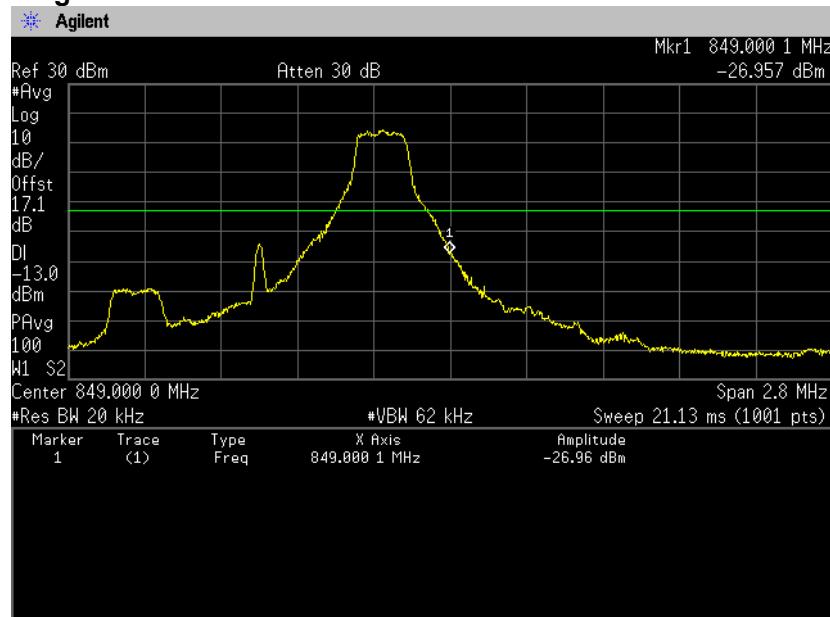
Channel: 4183
30MHz-5GHz

5GHz-10GHz


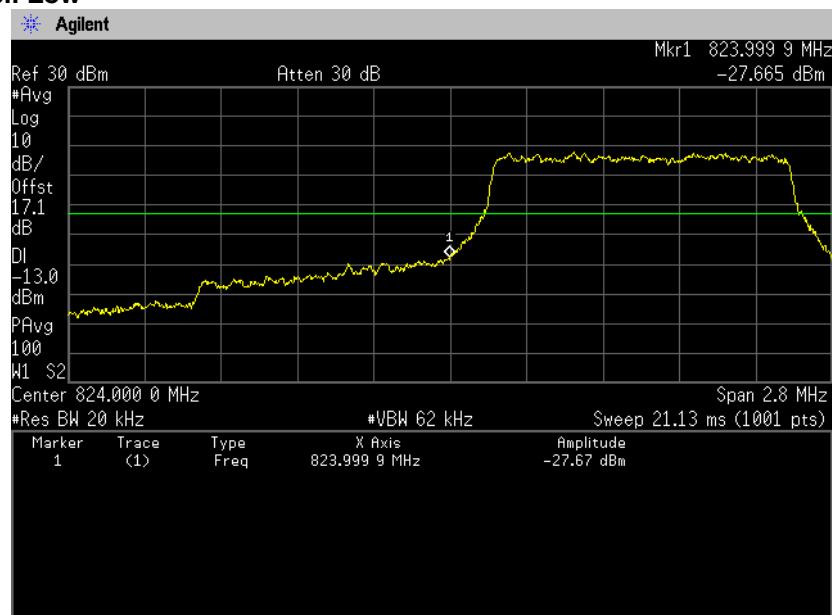
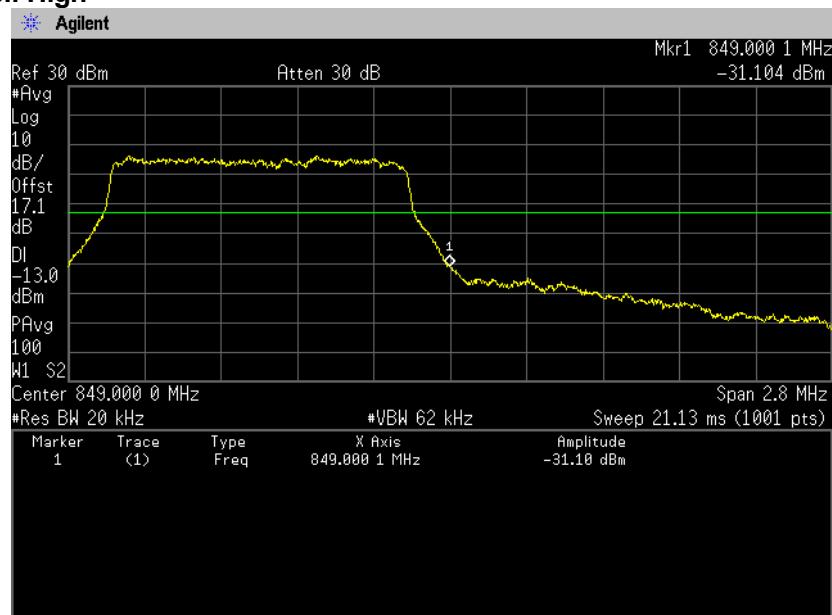
Channel: 4233
30MHz-5GHz

5GHz-10GHz


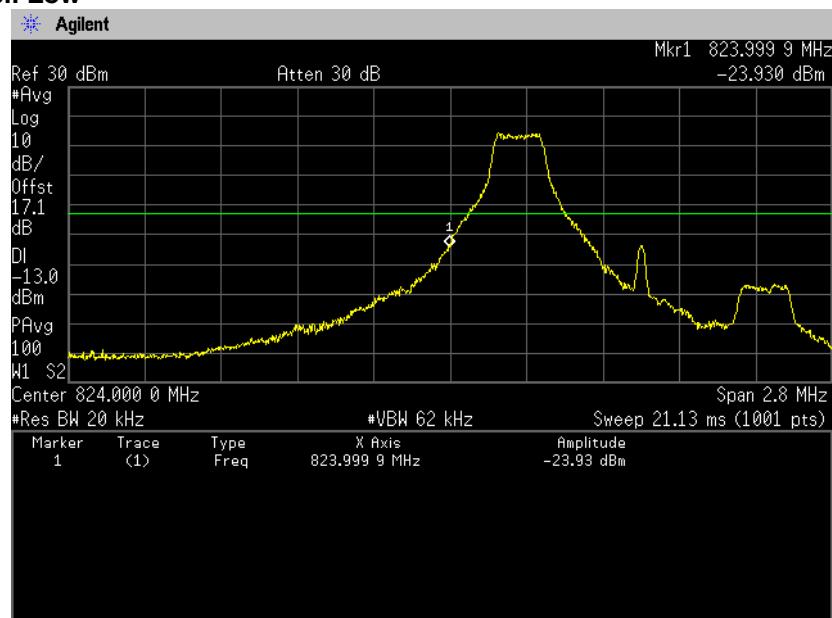
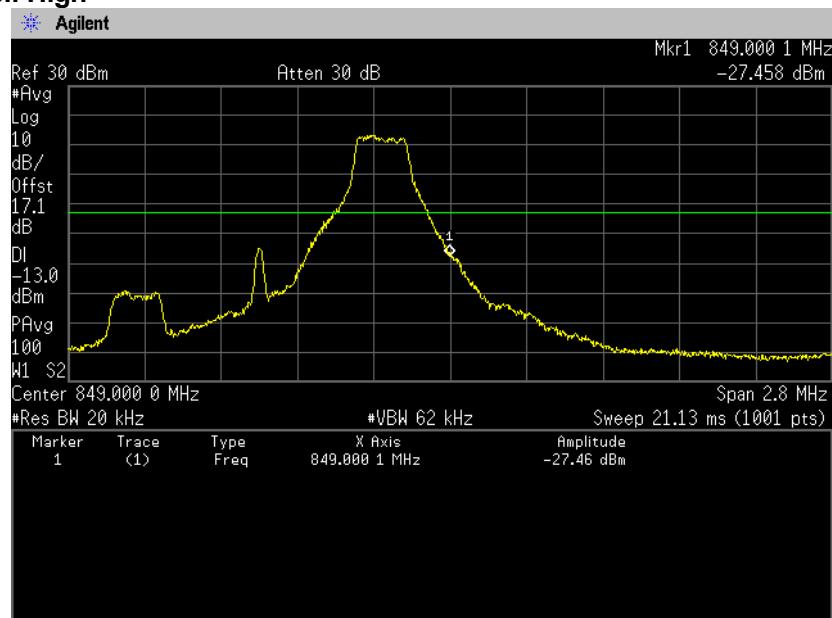
[LTE Band V]
(Band Edge)
QPSK, BW 1.4MHz, RB1-0
Channel: Low

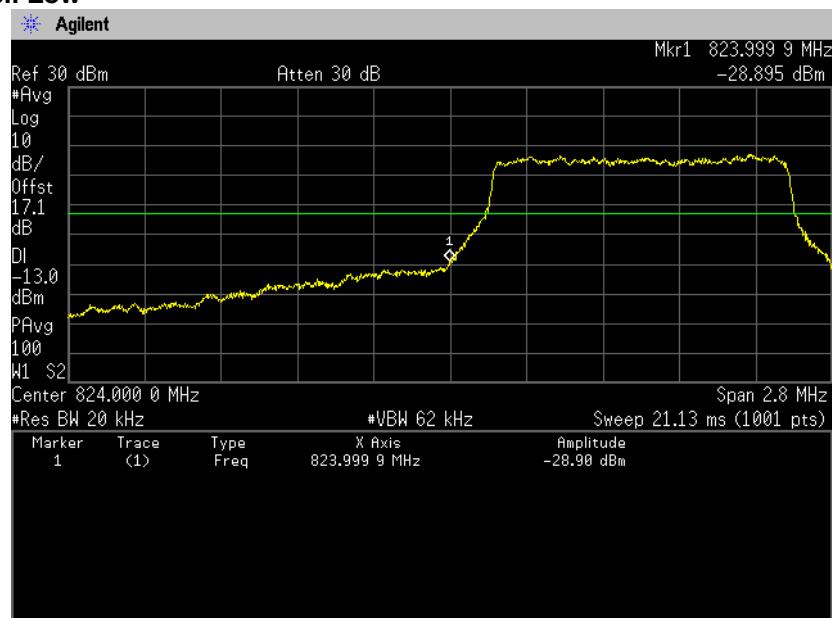
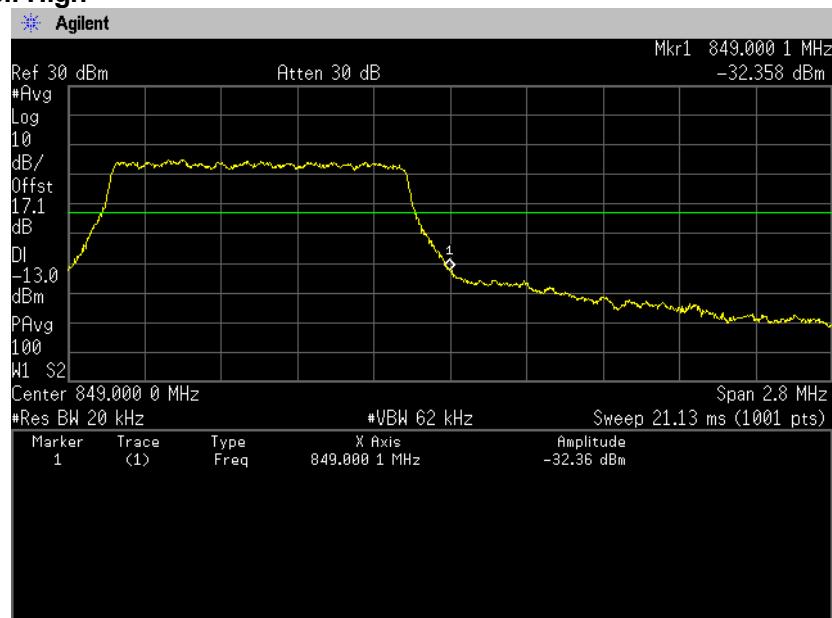


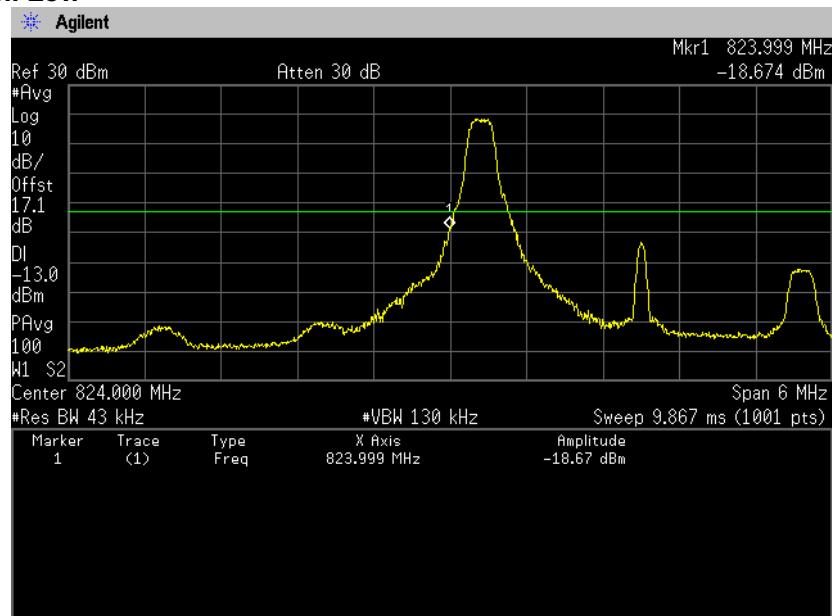
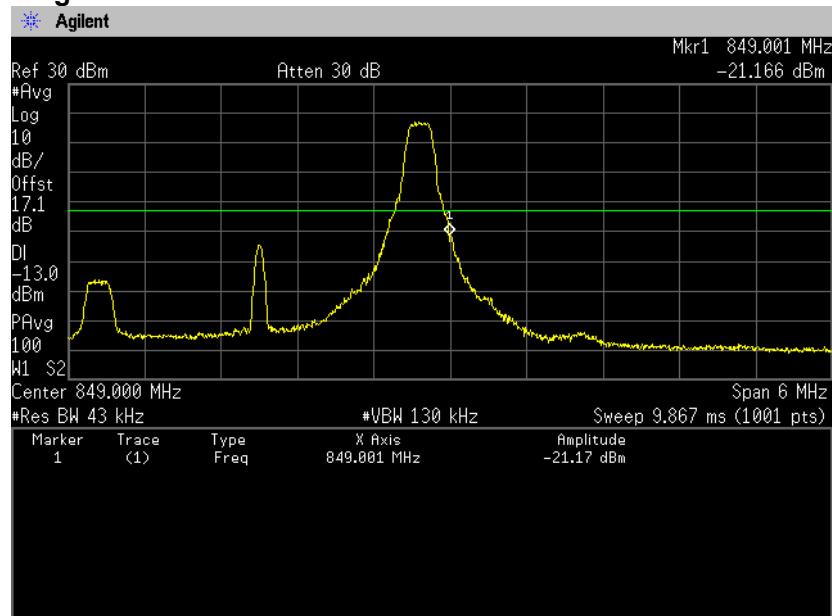
QPSK, BW 1.4MHz, RB1-5
Channel: High

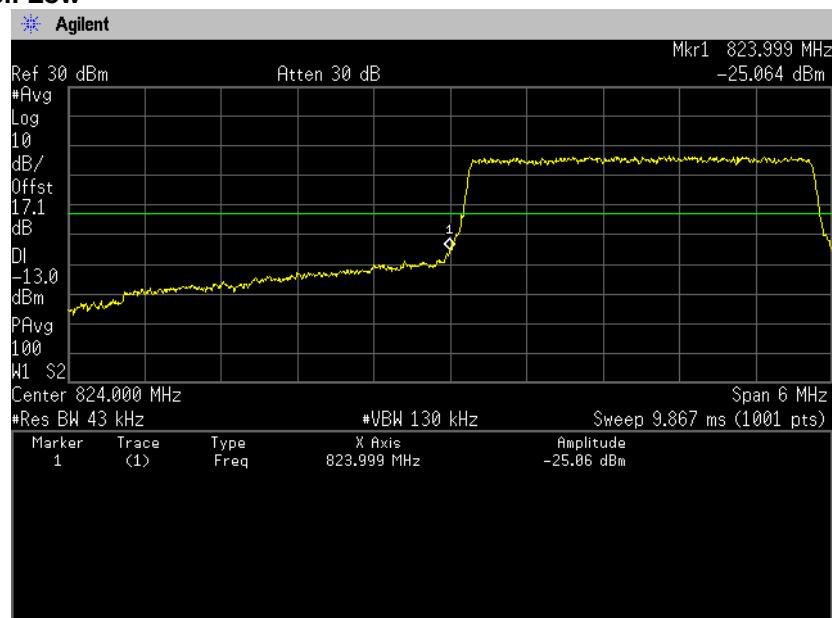
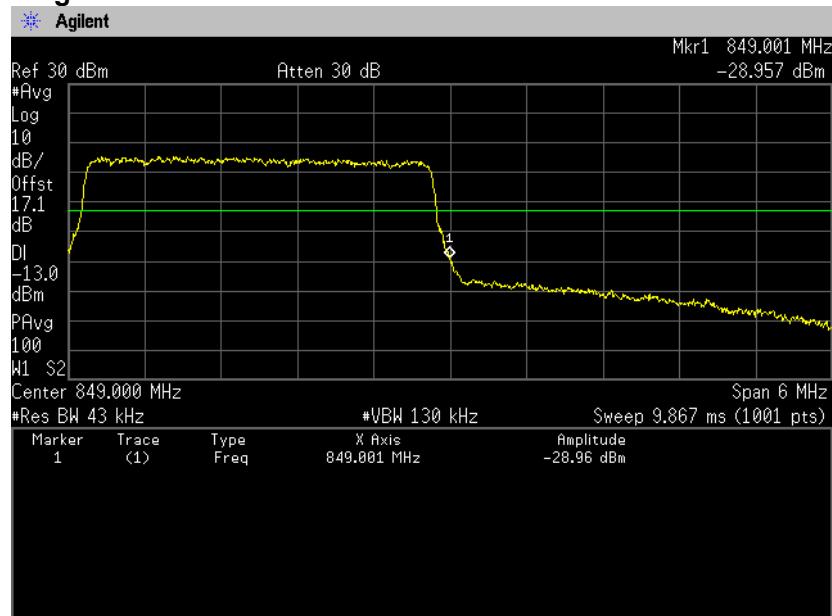


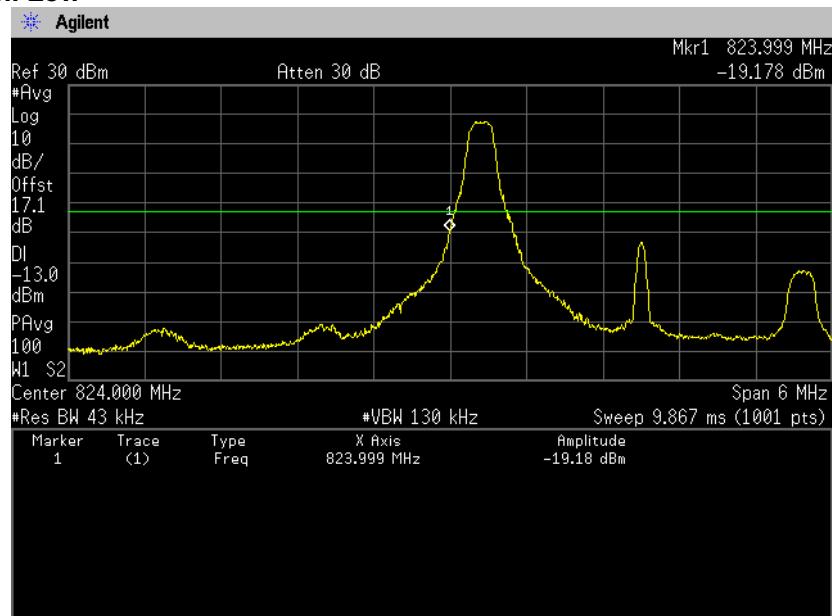
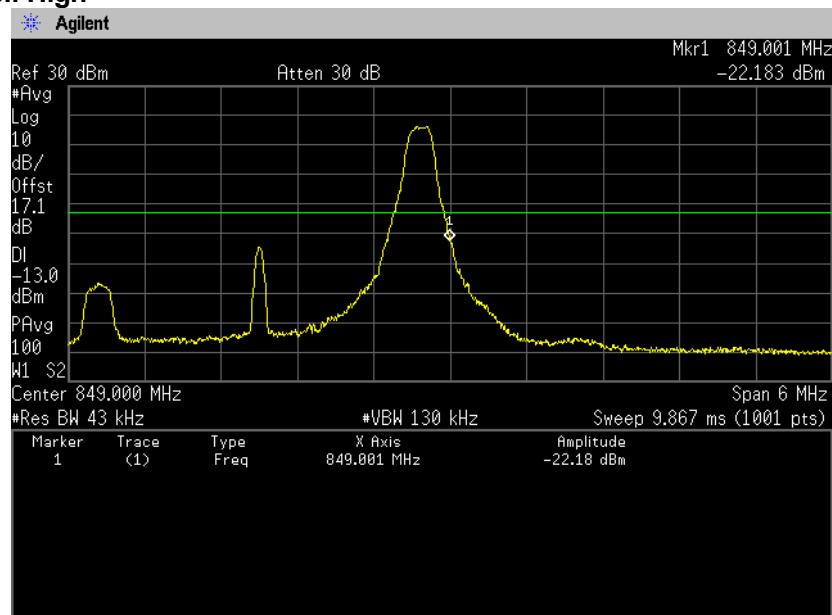
QPSK, BW 1.4MHz, RB6-0
Channel: Low

QPSK, BW 1.4MHz, RB6-0
Channel: High


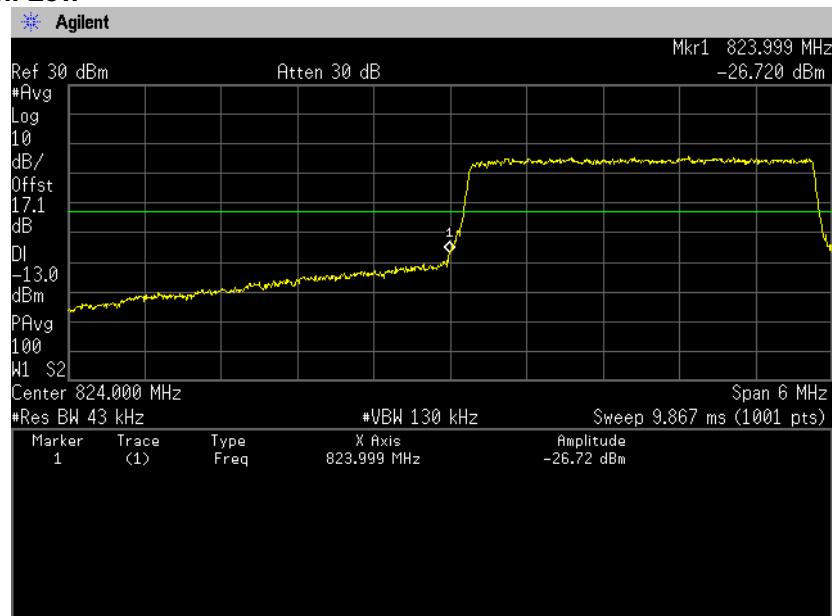
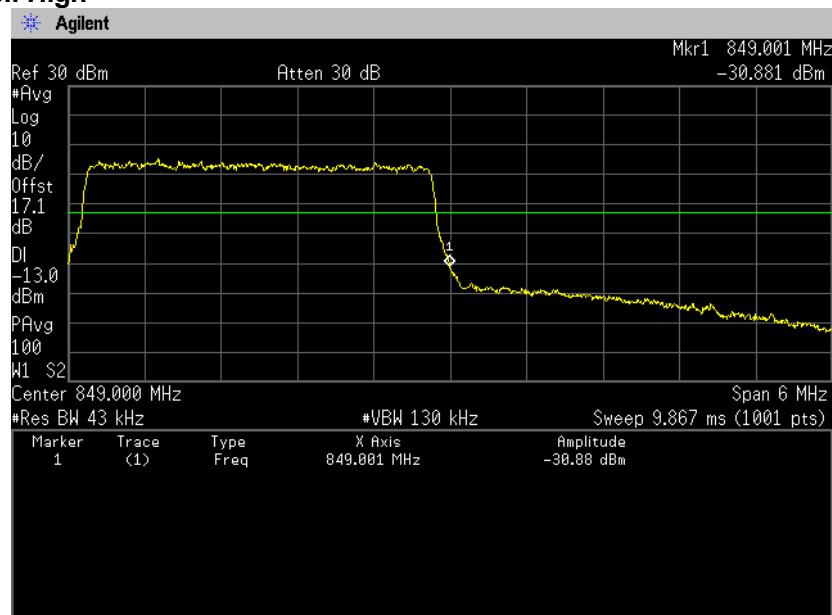
16QAM, BW 1.4MHz, RB1-0
Channel: Low

16QAM, BW 1.4MHz, RB1-5
Channel: High


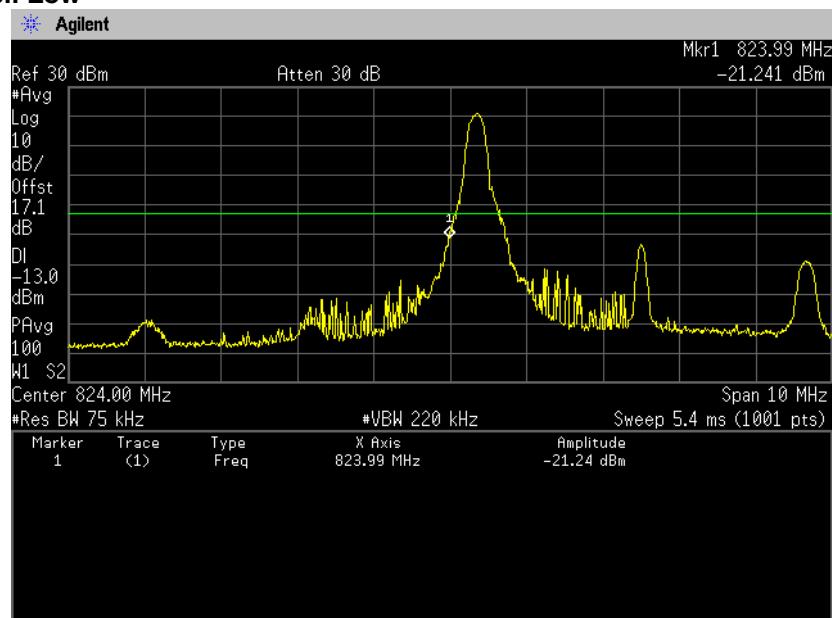
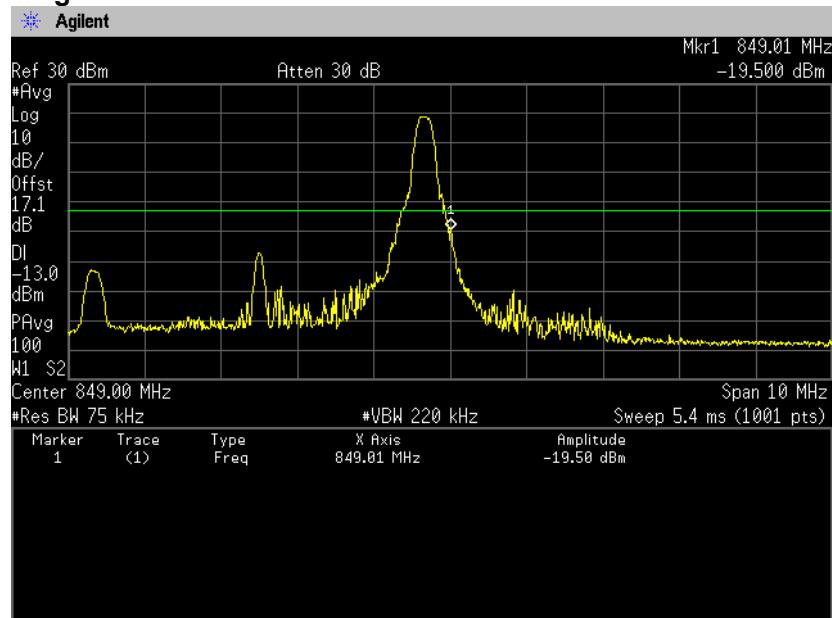
16QAM, BW 1.4MHz, RB6-0
Channel: Low

16QAM, BW 1.4MHz, RB6-0
Channel: High


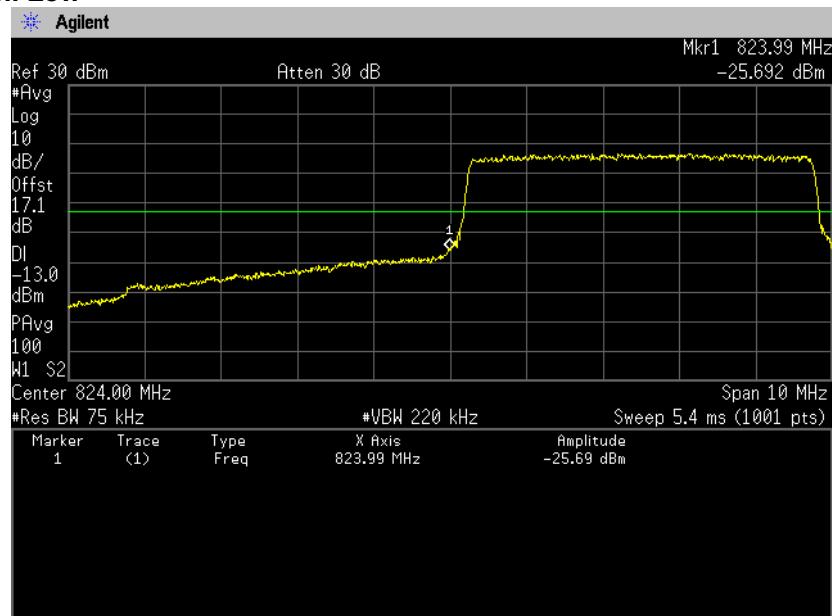
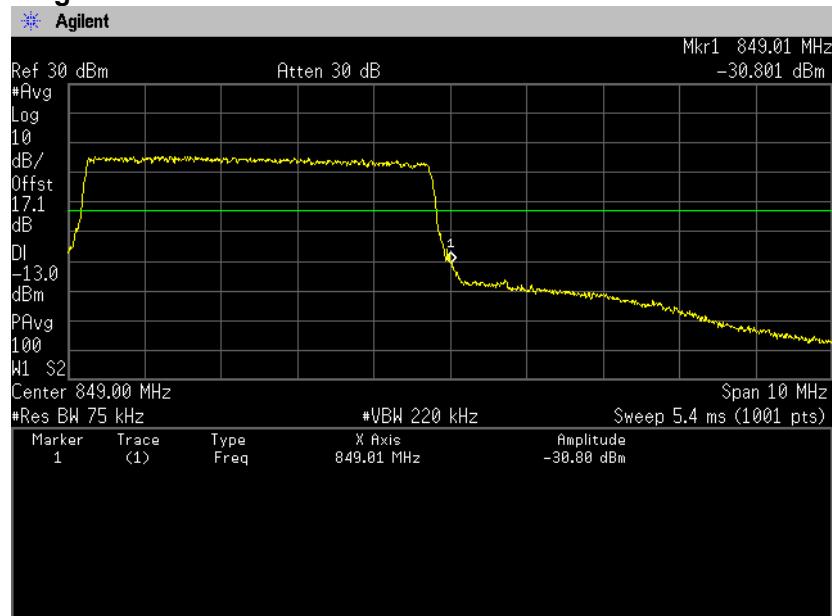
QPSK, BW 3MHz, RB1-0
Channel: Low

QPSK, BW 3MHz, RB1-14
Channel: High


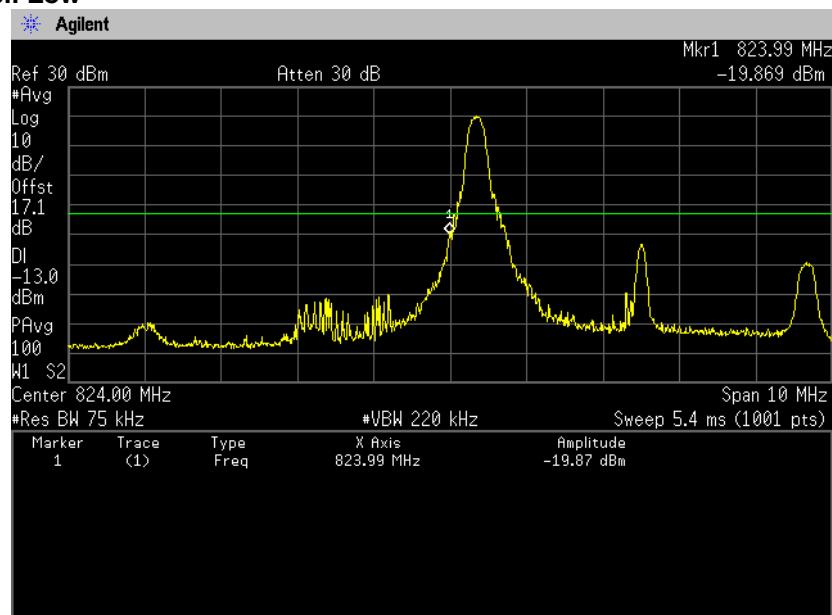
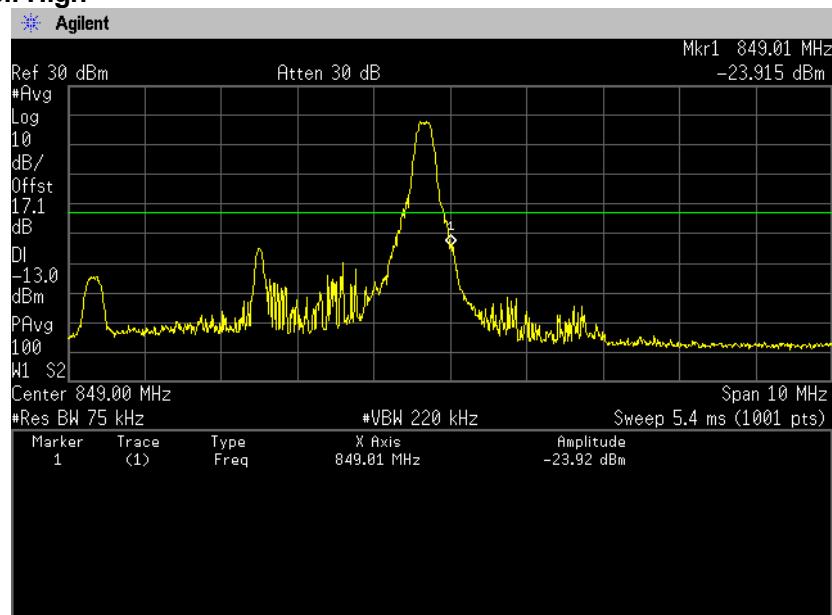
QPSK, BW 3MHz, RB15-0**Channel: Low****QPSK, BW 3MHz, RB15-0****Channel: High**

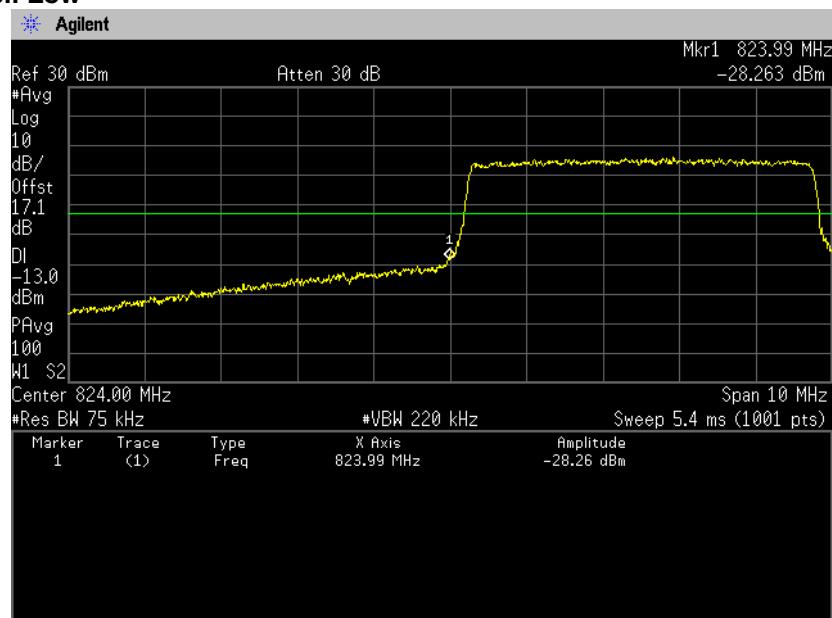
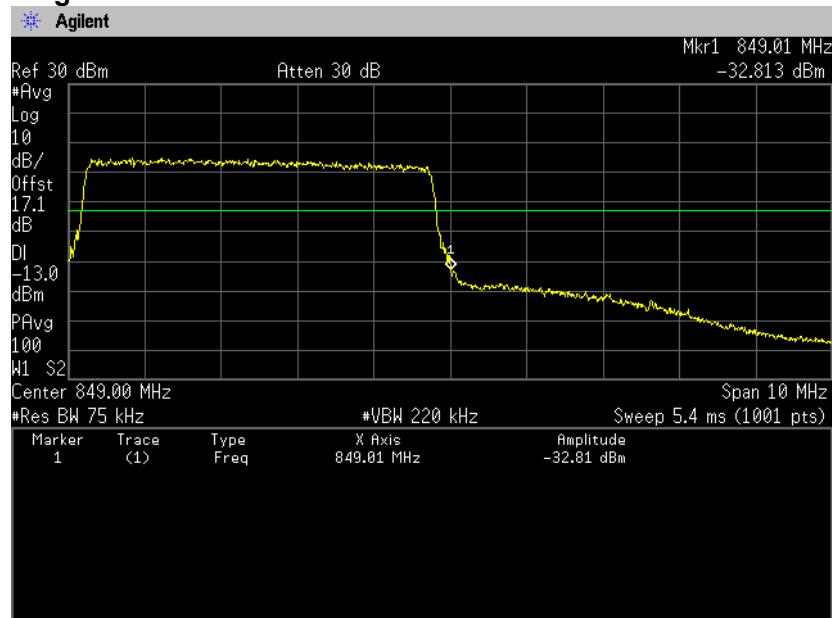
16QAM, BW 3MHz, RB1-0**Channel: Low****16QAM, BW 3MHz, RB1-14****Channel: High**

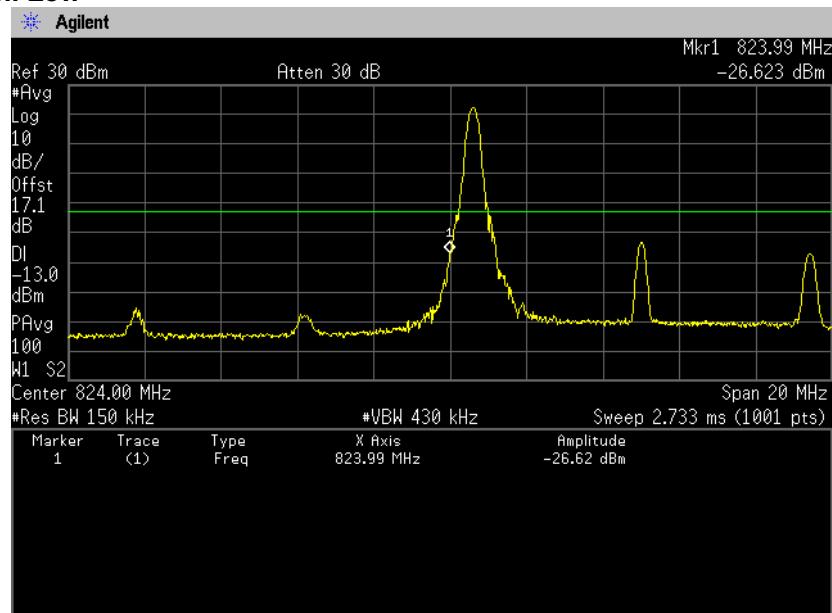
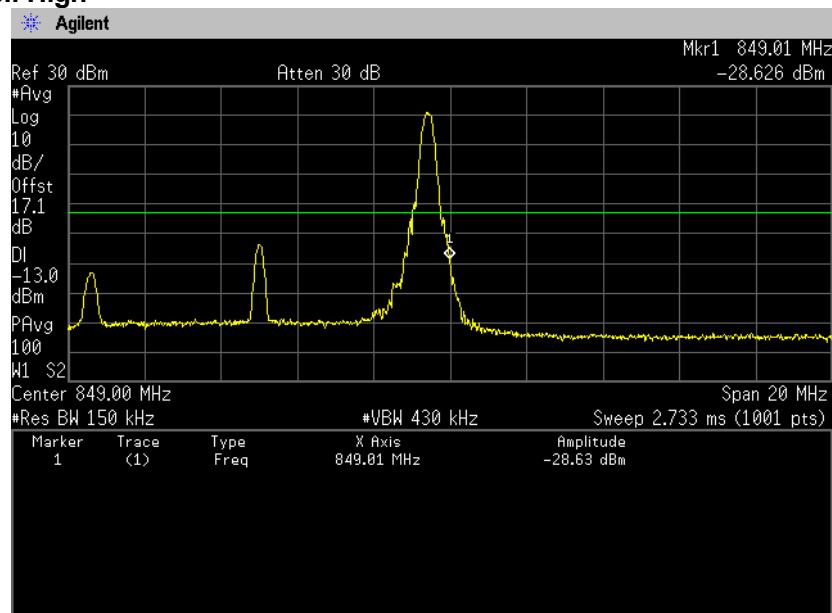
16QAM, BW 3MHz, RB15-0**Channel: Low****16QAM, BW 3MHz, RB15-0****Channel: High**

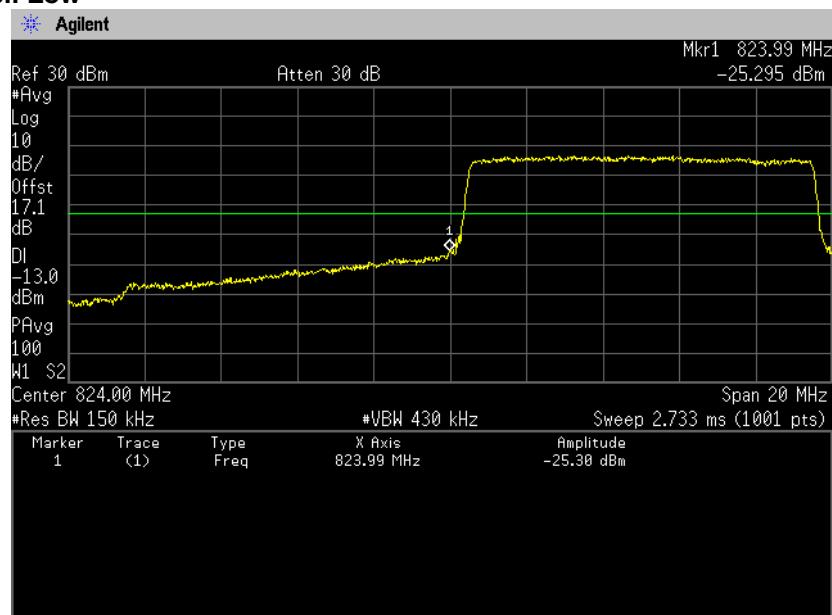
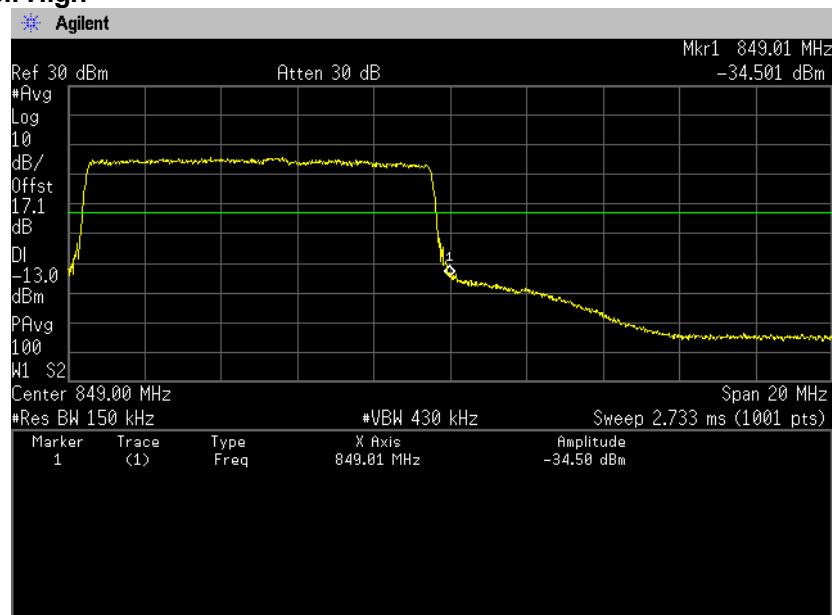
QPSK, BW 5MHz, RB1-0
Channel: Low

QPSK, BW 5MHz, RB1-24
Channel: High


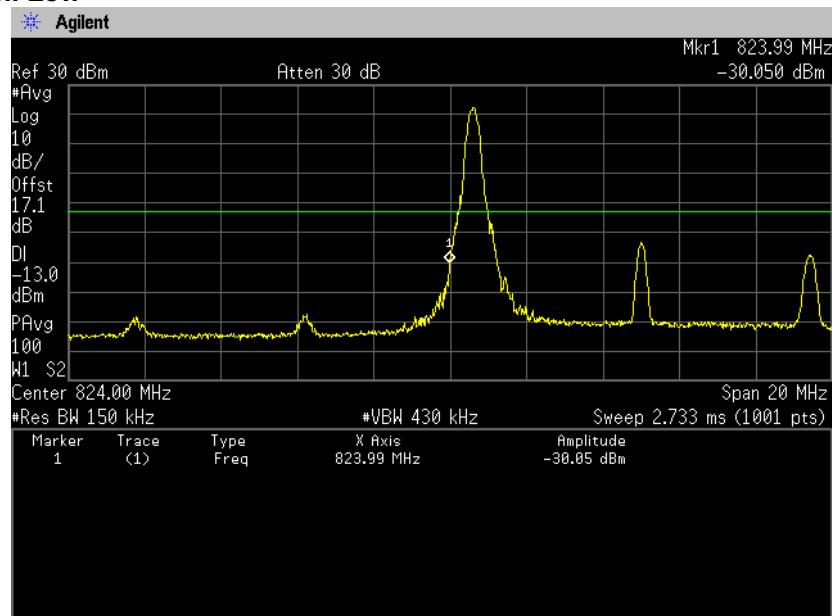
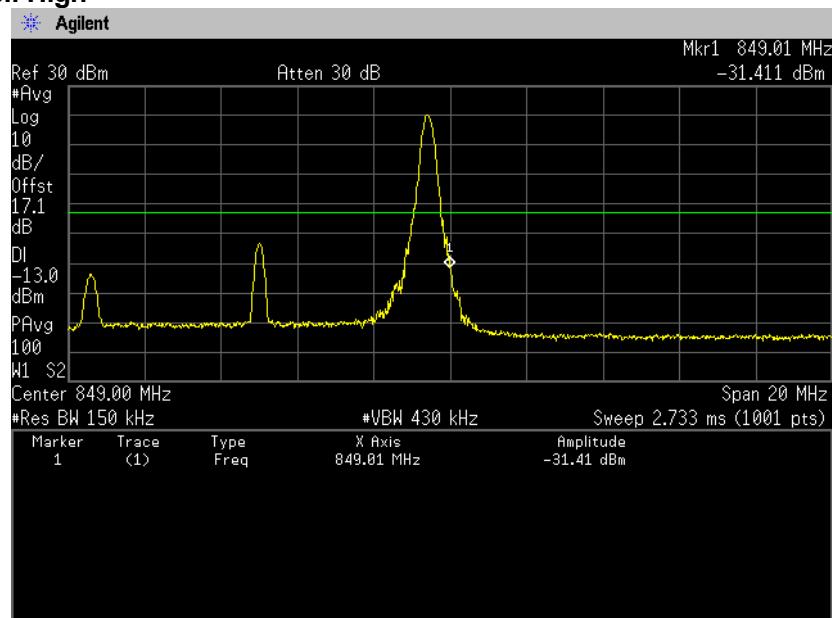
QPSK, BW 5MHz, RB25-0**Channel: Low****QPSK, BW 5MHz, RB25-0****Channel: High**

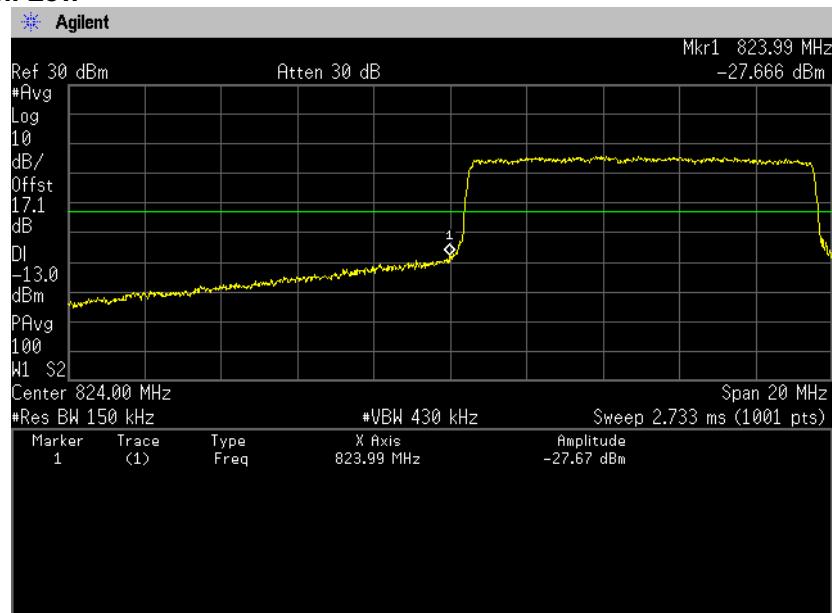
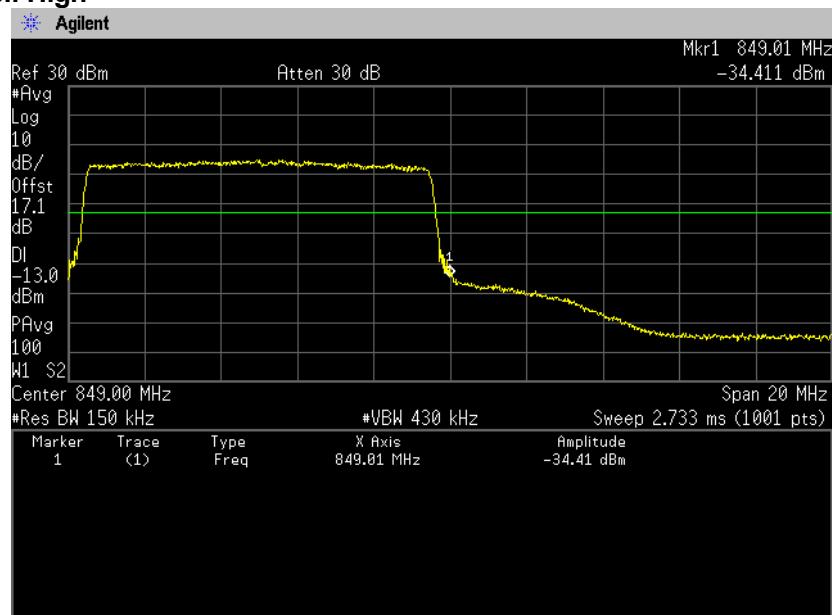
16QAM, BW 5MHz, RB1-0**Channel: Low****16QAM, BW 5MHz, RB1-24****Channel: High**

16QAM, BW 5MHz, RB25-0**Channel: Low****16QAM, BW 5MHz, RB25-0****Channel: High**

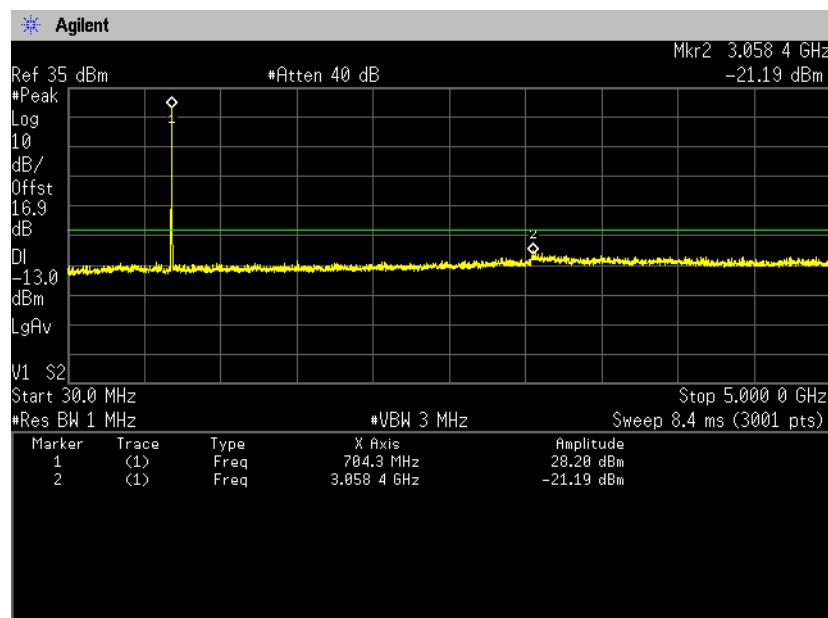
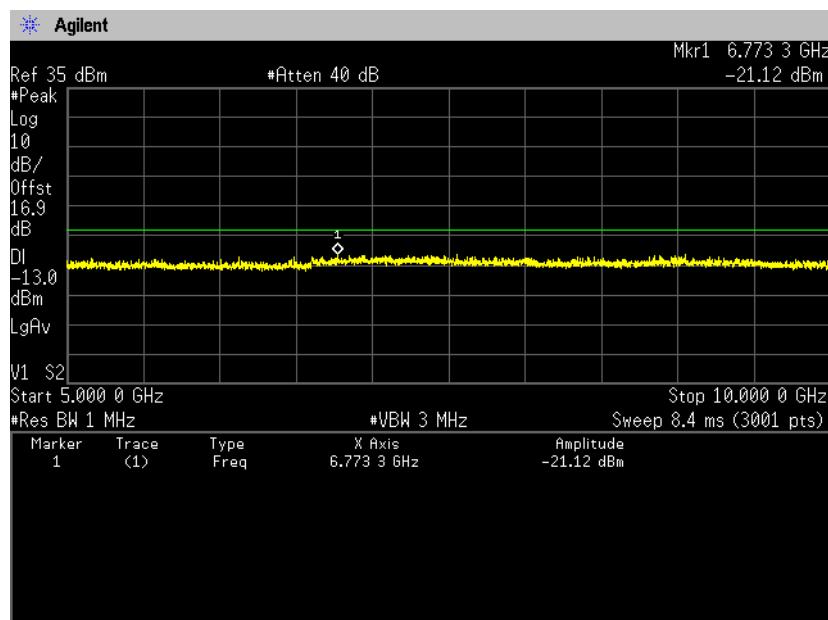
QPSK, BW 10MHz, RB1-0**Channel: Low****QPSK, BW 10MHz, RB1-49****Channel: High**

QPSK, BW 10MHz, RB50-0**Channel: Low****QPSK, BW 10MHz, RB50-0****Channel: High**

16QAM, BW 10MHz, RB1-0
Channel: Low

16QAM, BW 10MHz, RB1-49
Channel: High


16QAM, BW 10MHz, RB50-0**Channel: Low****16QAM, BW 10MHz, RB50-0****Channel: High**

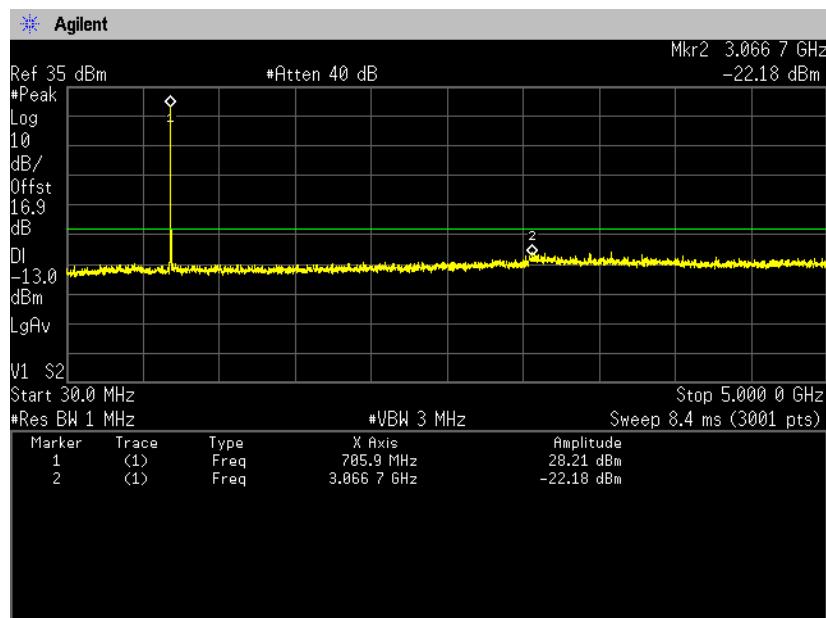
(Spurious Emissions)
QPSK, BW 10MHz, RB1-0
Channel: 23780
30MHz-5GHz

**5GHz-10GHz**

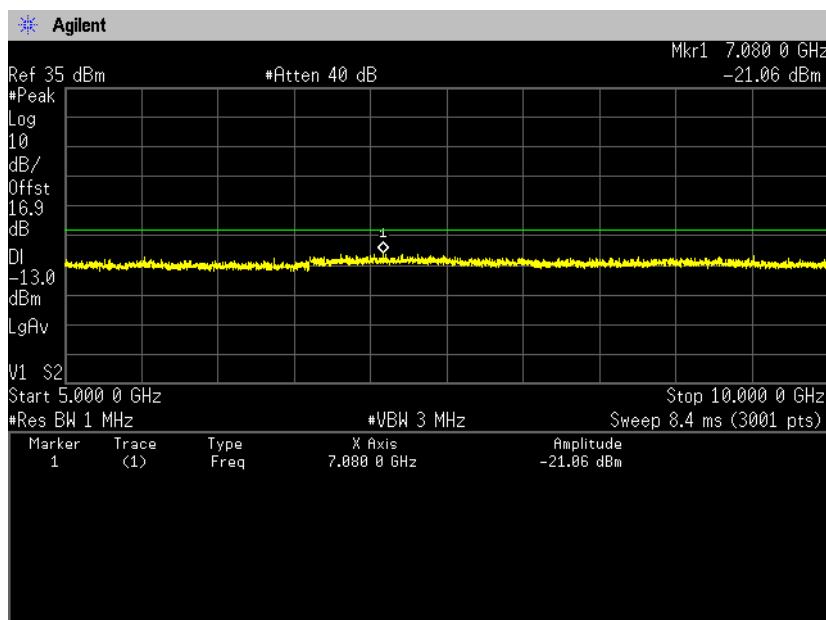


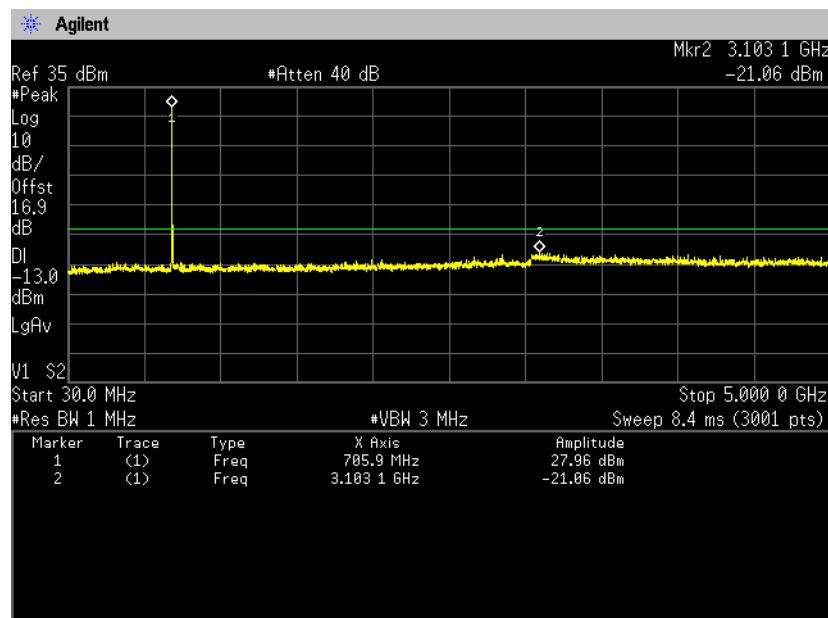
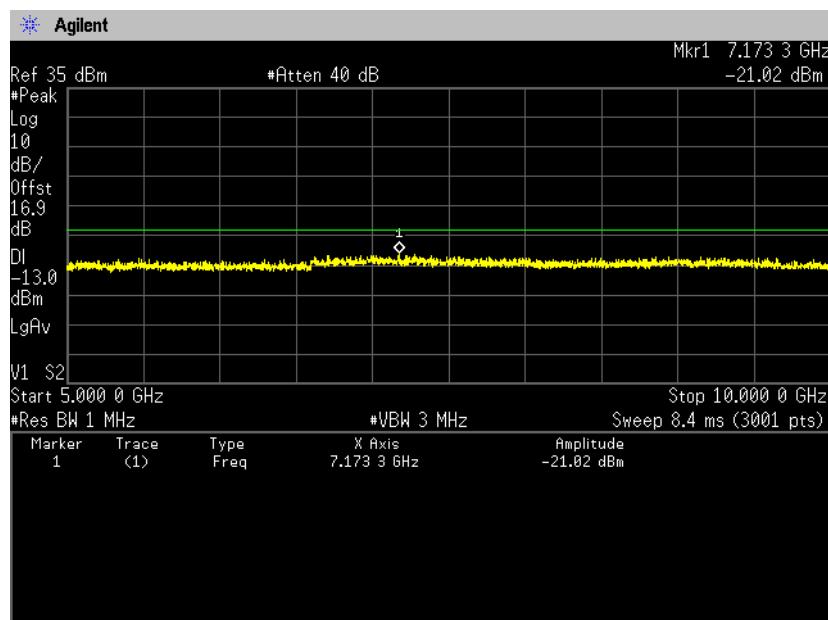
Zacta

Channel: 23790
30MHz-5GHz

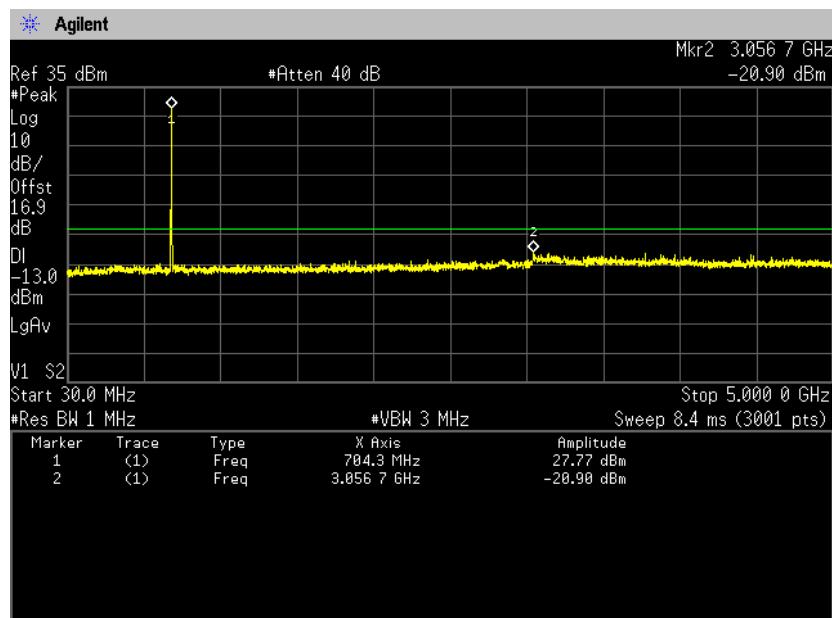


5GHz-10GHz

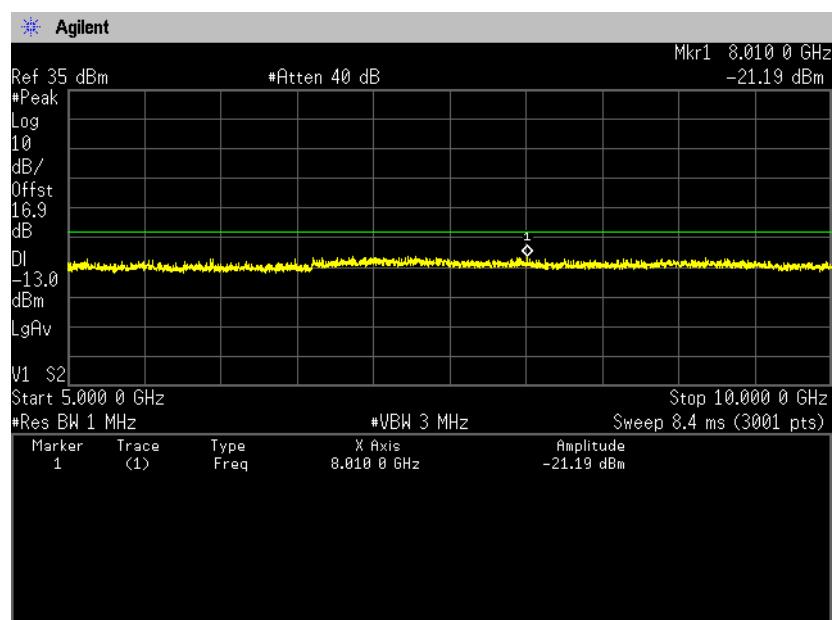


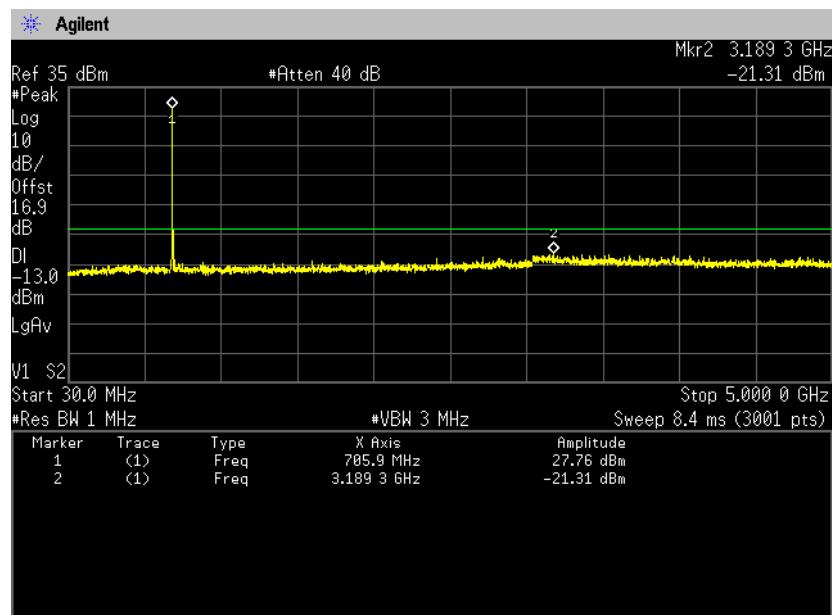
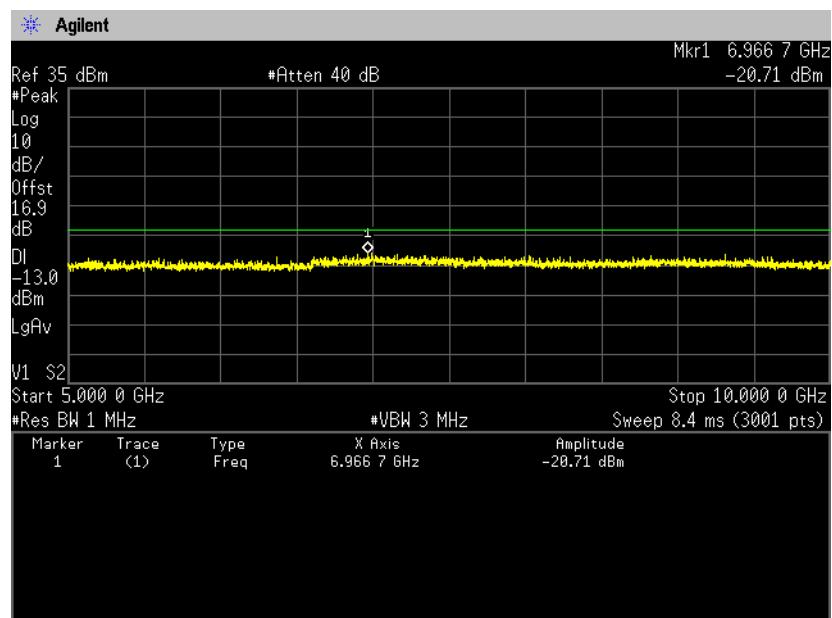
Channel: 23800
30MHz-5GHz

5GHz-10GHz


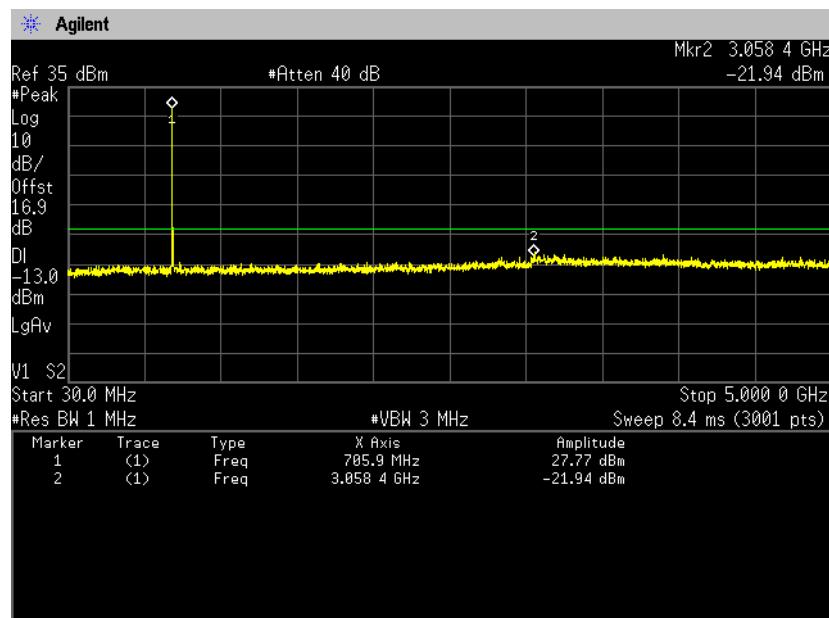
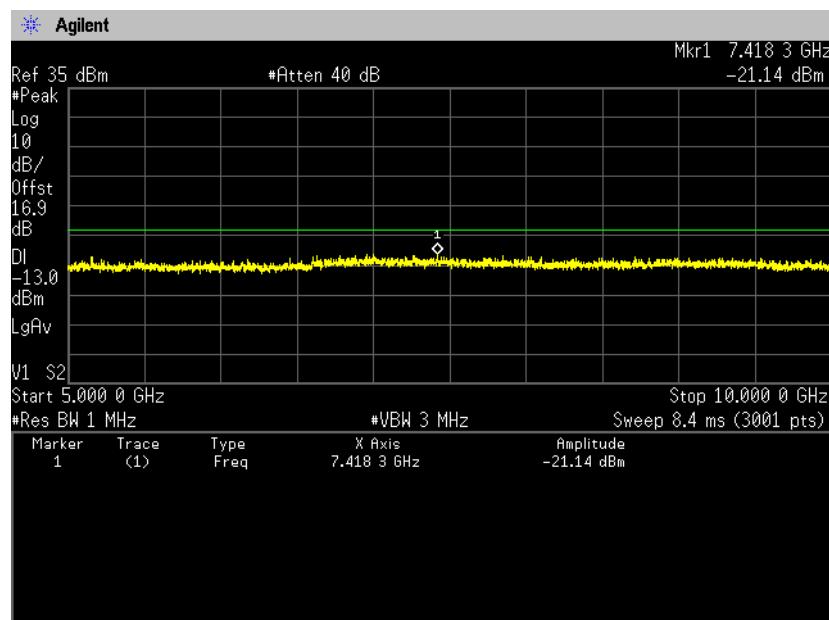
16QAM, BW 10MHz, RB1-49
Channel: 23780
30MHz-5GHz



5GHz-10GHz



Channel: 23790
30MHz-5GHz

5GHz-10GHz


Channel: 23800
30MHz-5GHz

5GHz-10GHz


8. Radiated Emissions and Harmonic Emissions

8.1 Measurement procedure

[FCC 22.917(a), 2.1053]

<Step 1>

The EUT and support equipment are placed on a 1 meter x 1.5 meter surface, 0.8 meter height FRP table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (Biconical antenna, Log periodic antenna and double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission.

The bandwidth of the spectrum analyzer is set to 1MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission. The frequency is investigated up to 20GHz.

<Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT).

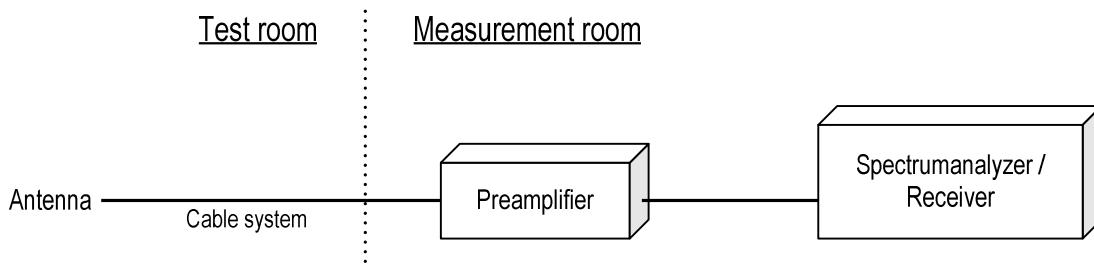
The frequency of the signal generator is adjusted to the measurement frequency.

Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

Spectrum analyzer setting

- Detector: Peak (RBW: 1MHz, VBW: 3MHz)

- Test configuration



8.2 Calculation method

Result = S.G Reading – Cable loss + Antenna Gain

Margin = Limit – Result (ERP)

8.3 Limit

-13dBm or less

8.4 Test data

Date	:	March 30, 2015						
Temperature	:	22.3 [°C]						
Humidity	:	27.8 [%]						
Test place	:	3m Semi-anechoic chamber						
			Test engineer	:				
						Taiki Watanabe		
Date	:	March 31, 2015						
Temperature	:	20.9 [°C]						
Humidity	:	20.9 [%]						
Test place	:	3m Semi-anechoic chamber						
			Test engineer	:				
						Taiki watanabe		
Date	:	April 16, 2015						
Temperature	:	21.6 [°C]						
Humidity	:	36.7 [%]						
Test place	:	3m Semi-anechoic chamber						
			Test engineer	:				
						Taiki watanabe		

[GSM850]

(Channel: 128)

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1648.4	-62.1	-69.0	1.0	6.9	-63.2	-13.0	50.2

(Channel: 190)

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1673.2	-62.0	-67.0	1.1	6.6	-61.4	-13.0	48.4

(Channel: 251)

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1697.6	-62.4	-69.0	1.1	6.3	-63.7	-13.0	50.7
V	1697.6	-61.2	-68.0	1.1	6.3	-62.7	-13.0	49.7

[WCDMA Band V]

(Channel: 4132)

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1652.8	-62.1	-69.0	1.1	6.8	-63.2	-13.0	50.2

(Channel: 4183)

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1673.2	-60.7	-67.0	1.1	6.6	-61.4	-13.0	48.4

(Channel: 4233)

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1693.2	-61.3	-69.0	1.1	6.4	-63.7	-13.0	50.7

Date	:	April 3, 2015					
Temperature	:	24.1 [°C]					
Humidity	:	33.3 [%]					
Test place	:	3m Semi-anechoic chamber					
			Test engineer	:			
						Hikaru Shibata	
Date	:	April 6, 2015					
Temperature	:	20.3 [°C]					
Humidity	:	41.4 [%]					
Test place	:	3m Semi-anechoic chamber					
			Test engineer	:			
						HikaruShibata	
Date	:	April 16, 2015					
Temperature	:	21.6 [°C]					
Humidity	:	36.7 [%]					
Test place	:	3m Semi-anechoic chamber					
			Test engineer	:			
						Taiki watanabe	

**[LTE Band V]
QPSK, BW 1.4MHz
Channel: 20407**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1648.6	-60.7	-68.0	1.0	6.9	-62.2	-13.0	49.2
V	1648.6	-60.5	-66.0	1.0	6.9	-60.2	-13.0	47.2
H	2472.6	-61.6	-63.0	1.3	7.4	-56.9	-13.0	43.9
V	2472.6	-57.8	-55.0	1.3	7.4	-48.9	-13.0	35.9

Channel: 20525

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1672.3	-59.9	-66.5	1.1	6.6	-60.9	-13.0	47.9
V	1672.3	-60.4	-66.0	1.1	6.6	-60.4	-13.0	47.4
H	2508.0	-61.3	-64.0	1.3	7.4	-57.9	-13.0	44.9
V	2508.0	-58.8	-57.0	1.3	7.4	-50.9	-13.0	37.9

Channel: 20643

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
V	1685.8	-60.5	-68.0	1.1	6.5	-62.6	-13.0	49.6
H	2543.4	-62.1	-65.0	1.3	7.6	-58.7	-13.0	45.7
V	2543.4	-62.3	-64.0	1.3	7.6	-57.7	-13.0	44.7

16QAM, BW 1.4MHz**Channel: 20407**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1648.4	-60.9	-68.2	1.0	6.9	-62.4	-13.0	49.4
V	1648.4	-60.1	-65.6	1.0	6.9	-59.8	-13.0	46.8
H	2473.6	-61.3	-62.7	1.3	7.4	-56.6	-13.0	43.6
V	2473.6	-58.1	-55.3	1.3	7.4	-49.2	-13.0	36.2

Channel: 20525

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1672.4	-60.5	-67.1	1.1	6.6	-61.5	-13.0	48.5
V	1672.4	-60.4	-66.0	1.1	6.6	-60.4	-13.0	47.4
H	2508.6	-62.1	-64.8	1.3	7.4	-58.7	-13.0	45.7
V	2508.6	-59.4	-57.6	1.3	7.4	-51.5	-13.0	38.5

Channel: 20643

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1696.2	-61.4	-68.0	1.1	6.3	-62.7	-13.0	49.7
V	1696.2	-60.5	-69.0	1.1	6.3	-63.7	-13.0	50.7
H	2544.2	-61.9	-64.8	1.3	7.6	-58.5	-13.0	45.5
V	2544.2	-60.6	-62.3	1.3	7.6	-56.0	-13.0	43.0

QPSK, BW 3MHz**Channel: 20415**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1653.6	-61.3	-68.6	1.1	6.8	-62.8	-13.0	49.8
V	1653.6	-60.7	-66.2	1.1	6.8	-60.4	-13.0	47.4
H	2480.4	-60.5	-61.9	1.3	7.4	-55.8	-13.0	42.8
V	2480.4	-58.1	-55.3	1.3	7.4	-49.2	-13.0	36.2
H	3307.2	-62.3	-63.0	1.5	7.4	-57.1	-13.0	44.1

Channel: 20525

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1675.4	-59.7	-66.3	1.1	6.6	-60.8	-13.0	47.8
V	1675.4	-60.2	-65.8	1.1	6.6	-60.3	-13.0	47.3
H	2513.1	-62.9	-65.6	1.3	7.5	-59.4	-13.0	46.4
V	2513.4	-59.7	-57.9	1.3	7.5	-51.7	-13.0	38.7

Channel: 20635

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1697.6	-61.2	-67.8	1.1	6.3	-62.5	-13.0	49.5
V	1697.6	-59.9	-68.4	1.1	6.3	-63.1	-13.0	50.1
H	2546.4	-61.1	-64.0	1.3	7.6	-57.7	-13.0	44.7
V	2546.4	-59.5	-61.2	1.3	7.6	-54.9	-13.0	41.9

16QAM, BW 3MHz
Channel: 20415

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1652.4	-61.4	-68.7	1.1	6.9	-62.9	-13.0	49.9
V	1652.4	-61.2	-66.7	1.1	6.9	-60.9	-13.0	47.9
H	2478.6	-60.2	-61.6	1.3	7.4	-55.5	-13.0	42.5
V	2478.6	-57.2	-54.4	1.3	7.4	-48.3	-13.0	35.3
V	3304.8	-62.2	-63.0	1.5	7.4	-57.1	-13.0	44.1

Channel: 20525

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
V	1692.6	-61.4	-68.0	1.1	6.4	-62.7	-13.0	49.7
H	2538.9	-61.7	-64.0	1.3	7.6	-57.7	-13.0	44.7
V	2538.9	-58.7	-58.0	1.3	7.6	-51.7	-13.0	38.7

Channel: 20635

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1697.6	-61.2	-67.8	1.1	6.3	-62.5	-13.0	49.5
V	1697.6	-59.9	-68.4	1.1	6.3	-63.1	-13.0	50.1
H	2546.4	-61.1	-64.0	1.3	7.6	-57.7	-13.0	44.7
V	2546.4	-59.5	-61.2	1.3	7.6	-54.9	-13.0	41.9

QPSK, BW 5MHz
Channel: 20425

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1657.3	-60.9	-66.0	1.1	6.8	-60.3	-13.0	47.3
V	1657.2	-61.3	-67.0	1.1	6.8	-61.3	-13.0	48.3
H	2485.8	-60.3	-63.5	1.3	7.4	-57.4	-13.0	44.4
V	2486.1	-58.2	-63.0	1.3	7.4	-56.9	-13.0	43.9
H	3314.7	-61.8	-60.5	1.5	7.4	-54.6	-13.0	41.6

Channel: 20525

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1677.3	-60.4	-65.0	1.1	6.6	-59.5	-13.0	46.5
V	1677.3	-59.3	-65.0	1.1	6.6	-59.5	-13.0	46.5
H	2516.1	-61.8	-64.5	1.3	7.5	-58.3	-13.0	45.3
V	2516.1	-60.7	-62.5	1.3	7.5	-56.3	-13.0	43.3
V	3354.8	-63.3	-67.0	1.5	7.5	-61.0	-13.0	48.0

Channel: 20625

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1697.4	-61.5	-66.5	1.1	6.3	-61.2	-13.0	48.2
V	1697.4	-60.4	-65.5	1.1	6.3	-60.2	-13.0	47.2
H	2546.3	-60.4	-60.5	1.3	7.6	-54.2	-13.0	41.2
V	2546.0	-59.1	-59.0	1.3	7.6	-52.7	-13.0	39.7

16QAM, BW 5MHz**Channel: 20425**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1657.4	-61.3	-66.4	1.1	6.8	-60.7	-13.0	47.7
V	1657.1	-60.8	-66.5	1.1	6.8	-60.8	-13.0	47.8
H	2485.8	-60.2	-63.4	1.3	7.4	-57.3	-13.0	44.3
V	2485.9	-58.1	-62.9	1.3	7.4	-56.8	-13.0	43.8
H	3315.1	-64.3	-63.0	1.5	7.4	-57.1	-13.0	44.1

Channel: 20525

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1677.3	-60.9	-65.5	1.1	6.6	-60.0	-13.0	47.0
V	1677.3	-58.7	-64.4	1.1	6.6	-58.9	-13.0	45.9
H	2516.1	-61.8	-64.5	1.3	7.5	-58.3	-13.0	45.3
V	2516.1	-60.5	-62.3	1.3	7.5	-56.1	-13.0	43.1
H	3354.9	-64.1	-67.8	1.5	7.5	-61.8	-13.0	48.8

Channel: 20625

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1697.0	-61.4	-66.4	1.1	6.3	-61.1	-13.0	48.1
V	1697.4	-60.3	-65.4	1.1	6.3	-60.1	-13.0	47.1
H	2546.1	-61.5	-61.6	1.3	7.6	-55.3	-13.0	42.3
V	2546.1	-59.6	-59.5	1.3	7.6	-53.2	-13.0	40.2

QPSK, BW 10MHz
Channel: 20450

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1649.1	-60.9	-68.0	1.0	6.9	-62.2	-13.0	49.2
V	1649.0	-60.1	-68.0	1.0	6.9	-62.2	-13.0	49.2
H	2473.9	-61.5	-64.5	1.3	7.4	-58.4	-13.0	45.4
V	2473.8	-58.6	-58.0	1.3	7.4	-51.9	-13.0	38.9

Channel: 20525

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1664.0	-61.9	-68.5	1.1	6.7	-62.8	-13.0	49.8
V	1664.1	-61.3	-69.0	1.1	6.7	-63.3	-13.0	50.3
H	2496.3	-61.0	-64.0	1.3	7.4	-57.9	-13.0	44.9
V	2496.3	-58.9	-58.0	1.3	7.4	-51.9	-13.0	38.9
V	3328.2	-62.6	-61.0	1.5	7.5	-55.0	-13.0	42.0

Channel: 20600

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1679.2	-59.6	-66.0	1.1	6.5	-60.5	-13.0	47.5
V	1679.4	-59.9	-64.0	1.1	6.5	-58.5	-13.0	45.5
H	2518.8	-62.5	-66.0	1.3	7.5	-59.8	-13.0	46.8
V	2519.0	-60.1	-59.0	1.3	7.5	-52.8	-13.0	39.8

QPSK, BW 10MHz**Channel: 20450**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1649.3	-61.0	-68.1	1.0	6.9	-62.3	-13.0	49.3
V	1649.3	-61.7	-69.6	1.0	6.9	-63.8	-13.0	50.8
H	2473.7	-60.4	-63.4	1.3	7.4	-57.3	-13.0	44.3
V	2473.8	-58.1	-57.5	1.3	7.4	-51.4	-13.0	38.4

Channel: 20525

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1664.0	-61.8	-68.4	1.1	6.7	-62.7	-13.0	49.7
V	1664.0	-61.2	-68.9	1.1	6.7	-63.2	-13.0	50.2
H	2496.2	-61.0	-64.0	1.3	7.4	-57.9	-13.0	44.9
V	2496.3	-59.0	-58.1	1.3	7.4	-52.0	-13.0	39.0



Zacta

Channel: 20600

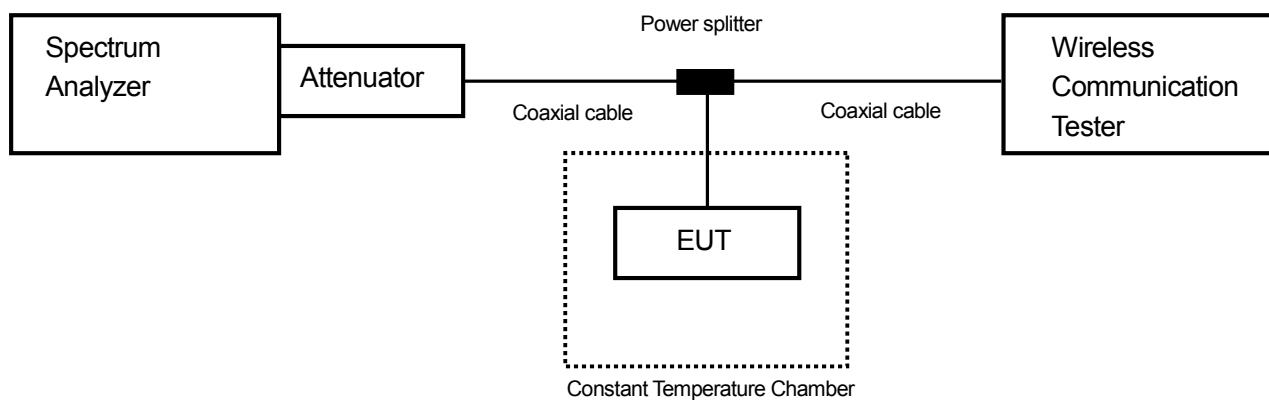
H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1679.3	-60.3	-66.7	1.1	6.5	-61.2	-13.0	48.2
V	1697.2	-59.8	-63.9	1.1	6.3	-58.6	-13.0	45.6
H	2518.6	-62.7	-66.2	1.3	7.5	-60.0	-13.0	47.0
V	2518.7	-60.3	-59.2	1.3	7.5	-53.0	-13.0	40.0

9. Frequency Stability

9.1 Measurement procedure [FCC 22.355, 2.1055]

The EUT was placed of an inside of an constant temperature chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10°C intervals and the unit was allowed to stabilize at each measurement. The frequency drift was measured with the normal Temperature and voltage tolerance and it is presented as the ppm unit.

- Test configuration



9.2 Limit

$\pm 2.5\text{ppm}$

9.3 Measurement result

Date : April 15, 2015
 Temperature : 21.3 [°C]
 Humidity : 41.6 [%]
 Test place : Shielded room No.4

Test engineer : Hikaru Shibata

[GSM850]

(Channel: 190)

Limit: ±0.00025% = ±2.5ppm					
Power Supply [V]	Temperature [°C]	Measurements Frequency [Hz]	Frequency Tolerance [ppm]	Limit [ppm]	Result
3.80	25(Ref.)	836,600,506	0.00000	±2.5	PASS
	50	836,600,554	0.05803	±2.5	PASS
	40	836,600,278	-0.27163	±2.5	PASS
	30	836,600,652	0.17474	±2.5	PASS
	20	836,600,216	-0.34671	±2.5	PASS
	10	836,600,275	-0.27614	±2.5	PASS
	0	836,600,438	-0.08098	±2.5	PASS
	-10	836,600,551	0.05436	±2.5	PASS
	-20	836,600,575	0.08288	±2.5	PASS
	-30	836,600,506	0.00024	±2.5	PASS
3.230	25	836,600,384	-0.14582	±2.5	PASS
4.370	25	836,600,156	-0.41737	±2.5	PASS

[WCDMA Band V]

(Channel: 4183)

Limit: ±0.00025% = ±2.5ppm					
Power Supply [V]	Temperature [°C]	Measurements Frequency [Hz]	Frequency Tolerance [ppm]	Limit [ppm]	Result
3.80	25(Ref.)	836,594,581	0.00000	±2.5	PASS
	50	836,594,452	-0.15420	±2.5	PASS
	40	836,594,765	0.21994	±2.5	PASS
	30	836,594,233	-0.41597	±2.5	PASS
	20	836,595,089	0.60722	±2.5	PASS
	10	836,595,284	0.84031	±2.5	PASS
	0	836,594,363	-0.26058	±2.5	PASS
	-10	836,594,135	-0.53311	±2.5	PASS
	-20	836,594,875	0.35142	±2.5	PASS
	-30	836,594,263	-0.38011	±2.5	PASS
3.230	25	836,595,247	0.79608	±2.5	PASS
4.370	25	836,594,012	-0.68014	±2.5	PASS

Calculation;

Frequency Tolerance (ppm) = Measurements Frequency (Hz) – Reference Frequency (Hz) / Reference Frequency (Hz) × 1000000

Date : April 16, 2015
 Temperature : 21.6 [°C]
 Humidity : 36.7 [%]
 Test place : Shielded room No.4

Test engineer :

Hikaru Shibata

[LTE Band V]
(Channel: 20525)

Limit: ±0.00025% = ±2.5ppm					
Power Supply [V]	Temperature [°C]	Measurements Frequency [Hz]	Frequency Tolerance [ppm]	Limit [ppm]	Result
3.80	25(Ref.)	836,496,215	0.00000	±2.5	PASS
	50	836,496,881	0.79618	±2.5	PASS
	40	836,496,840	0.74716	±2.5	PASS
	30	836,496,479	0.31560	±2.5	PASS
	20	836,496,124	-0.10879	±2.5	PASS
	10	836,496,215	0.00000	±2.5	PASS
	0	836,496,274	0.07053	±2.5	PASS
	-10	836,496,420	0.24507	±2.5	PASS
	-20	836,495,749	-0.55709	±2.5	PASS
	-30	836,496,035	-0.21518	±2.5	PASS
3.230	25	836,496,170	-0.05380	±2.5	PASS
4.370	25	836,496,125	-0.10759	±2.5	PASS

Calculation;

Frequency Tolerance (ppm) = Measurements Frequency (Hz) – Reference Frequency (Hz) / Reference Frequency (Hz) × 1000000

10. Uncertainty of measurement

Expanded uncertainties stated are calculated with a coverage Factor k=2.

Please note that these results are not taken into account when determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission at mains port	±3.0dB
Radiated emission (9kHz – 30MHz)	±4.4dB
Radiated emission (30MHz – 1000MHz)	±4.5dB
Radiated emission (1000MHz – 26GHz)	±3.9dB

11. Laboratory description

1. Location:

TÜV SÜD Zacta Ltd. Yonezawa Testing Center
 4149-7 Hachimanpara 5-chome Yonezawa-shi Yamagata 992-1128 Japan
 Phone: +81-238-28-2880 Fax: +81-238-28-2888

2. Facility filing information:

1) NVLAP accreditation: NVLAP Lab. code: 200306-0

2) VLAC accreditation: Lab. code: VLAC-013

Site name	Radiated emission	Conducted emission for mains port	Conducted emission for telecom port	Radiated emission (CMAD)	Expiry Date
3m Semi-anechoic chamber	VLAC-013	VLAC-013	VLAC-013	-	Jul. 3, 2015
10m Semi-anechoic chamber No.1					
10m Semi-anechoic chamber No.2					
Shielded room No.1	-	VLAC-013		-	

3) FCC filing:

Site name	Registration Number	Expiry Date
Site 3	91065	Oct. 1, 2017
3m Semi-anechoic chamber	540072	Feb. 20, 2017
10m Semi-anechoic chamber No.1		
10m Semi-anechoic chamber No.2		
Shielded room No.1		

4) Industry Canada Oats site filing:

Site name	Sites on file: Oats 3m/10m	Expiry Date
Site 3	4224A-3	Dec. 3, 2017
3m Semi-anechoic chamber	4224A-4	
10m Semi-anechoic chamber No.1	4224A-5	
10m Semi-anechoic chamber No.2	4224A-6	

5) VCCI site filing:

Site name	Radiated emission	Conducted emission for mains port	Conducted emission for telecom port	Expiry Date	
Site 3	R-138	C-134	T-1222	Nov. 16, 2017	
3m Semi-anechoic chamber	A-0166	A-0166	A-0166		
10m Semi-anechoic chamber No.1					
10m Semi-anechoic chamber No.2					
Shielded room No.1	-	A-0166		Jul. 3, 2015	

6) TÜV SÜD PS authorization:

Authorized as an EMC test laboratory

7) TÜV Rheinland authorization:

Authorized as an EMC test laboratory

Appendix A. Test equipment

Antenna port conducted test

Equipment	Company	Model No.	Serial No.	Cal. due	Cal. date
Spectrum analyzer	Agilent Technologies	E4440A	US44302655	May 31, 2015	May 30, 2014
Microwave cable	RS	YH_13S5	N/A (S403)	May 31, 2015	May 10, 2014
Attenuator	Weinschel	56-10	J4180	Nov. 30, 2015	Nov. 12, 2014
Microwave cable	SUHNER	SUCOFLEX104/1.5m	199121/4	Oct. 31, 2015	Oct. 7, 2014
Microwave cable	SUHNER	SUCOFLEX104/1.5m	322086/4	Jul. 31, 2015	Jul. 30, 2014
Power splitter	ANRITSU	K240B	020205	Jul. 31, 2015	Jul. 12, 2014
Wideband radio frequency tester	ROHDE&SCHWARZ	CMW500	116338	Aug. 31, 2015	Aug. 28, 2014
Operation type temperature controlled bath	Espec	PL1KP	14007261	Jan. 31, 2016	Jan. 9, 2015

Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100451	Dec. 31, 2015	Dec. 25, 2014
Preamplifier	ANRITSU	MH648A	M96057	Jun. 30, 2015	Jun. 12, 2014
Biconical antenna	Schwarzbeck	VHA9103/BBA9106	2125	May 31, 2015	May 7, 2014
Log periodic antenna	Schwarzbeck	UHALP9108A	0560	May 31, 2015	May 7, 2014
Attenuator	TME	CFA-01NPJ-6	N/A (S275)	Jun. 30, 2015	Jun. 9, 2014
Attenuator	TME	CFA-01NPJ-3	N/A (S272)	Jun. 30, 2015	Jun. 9, 2014
Spectrum analyzer	Agilent Technologies	E4440A	US44302655	May 31, 2015	May 30, 2014
Preamplifier	Agilent Technologies	8449B	3008A1008	Dec. 31, 2015	Dec. 5, 2014
Dipole antenna	Schwarzbeck	VHAP	1020	Sep. 30, 2015	Sep. 5, 2014
Dipole antenna	Schwarzbeck	UHAP	994	Sep. 30, 2015	Sep. 5, 2014
Double ridged guide antenna	EMCO	3115	5205	Feb. 29, 2016	Feb. 16, 2015
Attenuator	Agilent Technologies	8491B	MY39268633	Feb. 29, 2016	Feb. 1, 2015
Double ridged guide antenna	EMCO	3115	000058532	Oct. 31, 2015	Oct. 14, 2014
Signal generator	ROHDE&SCHWARZ	SMB100A	177525	May 31, 2015	May 30, 2014
Power amplifier	R&K	CGA020M602-2633R	B40240	Mar.31, 2016	Mar. 23, 2015
Microwave cable	SUHNER	SUCOFELX102/2m	31648/2	Mar. 28, 2016	Mar. 10, 2015
High pass filter	Micro-Tronics	HPM50115	004	Jul. 31, 2015	Jul. 12, 2014
High pass filter	Wainwright	WHKX2.8/18G-6SS	1	Jul. 31, 2015	Jul. 17, 2014
Wideband radio frequency tester	ROHDE&SCHWARZ	CMW500	126079	Aug. 31, 2015	Aug. 28 2014
Microwave cable	SUHNER	SUCOFLEX104/9m	346316/4	Oct. 31, 2015	Oct. 31, 2014
		SUCOFLEX104/1m	322084/4	Oct. 31, 2015	Oct. 31, 2014
		SUCOFLEX104/1.5m	317226/4	Oct. 31, 2015	Oct. 31, 2014
		SUCOFLEX104/7m	41625/6	Oct. 31, 2015	Oct. 31, 2014
PC	DELL	DIMENSION E521	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V5.3.61	N/A	N/A
3m Semi-anechoic chamber	TOKIN	N/A	N/A (9002-NSA)	May 31, 2015	May 6, 2014
3m Semi-anechoic chamber	TOKIN	N/A	N/A (9002-SVSWR)	May 31, 2015	May 6, 2014

*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.