

RF TEST REPORT

Test item : Mobile Phone
Model No. : KYL22
Order No. : DEMC1309-02848
Date of receipt : 2013-09-10
Test duration : 2013-10-01 ~ 2013-10-16
Date of issue : 2013-10-21
Use of report : FCC Original Grant

Applicant : KYOCERA Corporation
2-1-1 Kagahara, Tsuzuki-ku, Yokohama-Shi, Kanagawa 224-8502, Japan

Test laboratory : Digital EMC Co., Ltd.
683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Gyeonggi-Do, 449-080, Korea

Test specification : §22(H), §24(E)
Test environment : See appended test report
Test result : Pass Fail

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DIGITAL EMC CO., LTD.

Tested by:



Engineer
HyunSu Son

Witnessed by:

N/A

Reviewed by:



Deputy General Manager
WonJung Lee

Test Report Version

Test Report No.	Date	Description
DRTFCC1310-1008	Oct. 21, 2013	Initial issue

Table of Contents

1. GENERAL INFORMATION	4
2. INTRODUCTION	5
2.1. EUT DESCRIPTION	5
2.2. MEASURING INSTRUMENT CALIBRATION	5
2.3. TEST FACILITY	5
3. DESCRIPTION OF TESTS	6
3.1 ERP&EIRP	6
3.2 PEAK TO AVERAGE RATIO	7
3.3 OCCUPIED BANDWIDTH	8
3.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	9
3.5 RADIATED SPURIOUS EMISSIONS	10
3.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	11
4. LIST OF TEST EQUIPMENT	12
5. SUMMARY OF TEST RESULTS	13
6. SAMPLE CALCULATION	14
7. TEST DATA	15
7.1 CONDUCTED OUTPUT POWER	15
7.2 PEAKTOAVERAGERATIO	17
7.3 OCCUPIED BANDWIDTH	17
7.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	17
7.5 BAND EDGE	17
7.6 EFFECTIVE RADIATED POWER	18
7.7 EQUIVALENT ISOTROPIC RADIATED POWER	19
7.8 RADIATED SPURIOUS EMISSIONS	20
7.8.1 RADIATED SPURIOUS EMISSIONS (GSM850)	20
7.8.2 RADIATED SPURIOUS EMISSIONS (WCDMA850)	21
7.8.3 RADIATED SPURIOUS EMISSIONS (HSUPA850)	22
7.8.4 RADIATED SPURIOUS EMISSIONS (GSM1900)	23
7.8.5 RADIATED SPURIOUS EMISSIONS (WCDMA1900)	24
7.8.6 RADIATED SPURIOUS EMISSIONS (HSUPA1900)	25
7.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	26
7.9.1 FREQUENCY STABILITY (GSM850)	26
7.9.2 FREQUENCY STABILITY (WCDMA850)	27
7.9.3 FREQUENCY STABILITY (HSUPA850)	28
7.9.4 FREQUENCY STABILITY (GSM1900)	29
7.9.5 FREQUENCY STABILITY (WCDMA1900)	30
7.9.6 FREQUENCY STABILITY (HSUPA1900)	31
8. TEST PLOTS	32
8.1 Peak to Average Ratio	32
8.2 Occupied Bandwidth 99 % Bandwidth	34
8.3 Spurious Emissions at Antenna Terminal	46
8.4 Band Edge	73

1. GENERAL INFORMATION

Applicant Name: KYOCERA Corporation

Address: 2-1-1 Kagahara, Tsuzuki-ku, Yokohama-Shi, Kanagawa 224-8502, Japan

FCC ID	:	JOYKYL22
FCC Classification	:	Licensed Portable Transmitter Held to Ear (PCE)
EUT Type	:	Mobile Phone
Model Name	:	KYL22
Add Model Name	:	N/A
Supplying power	:	Standard Battery - Type: Li-Polymey Battery - M/N: UPF395689T - Rating: DC 3.8V & 2600mAh / 9.9Wh
Antenna Information	:	Internal Antenna - Type: Built-In type
Tx Frequency	:	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA850: 826.4 MHz ~ 846.6 MHz WCDMA1900: 1852.4 MHz ~ 1907.6 MHz HSUPA850: 826.4 MHz ~ 846.6 MHz HSUPA1900: 1852.4 MHz ~ 1907.6 MHz
Rx Frequency	:	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA850: 871.4 MHz ~ 891.6 MHz WCDMA1900: 1932.4 MHz ~ 1987.6 MHz HSUPA850: 871.4 MHz ~ 891.6 MHz HSUPA1900: 1932.4 MHz ~ 1987.6 MHz
Max. RF Output Power	:	GSM850: 1.687 W ERP (32.27 dBm) GSM1900: 0.989 W EIRP (29.95 dBm) WCDMA850: 0.206 W ERP (23.13 dBm) WCDMA1900: 0.240 W EIRP (23.80 dBm) HSUPA850: 0.199 W ERP (22.99 dBm) HSUPA1900: 0.214 W EIRP (23.30 dBm)
Emission Designator(s)	:	GSM850: 248KGXW GSM1900: 247KGXW WCDMA850: 4M15F9W WCDMA1900: 4M15F9W HSUPA850: 4M17F9W HSUPA1900: 4M15F9W

2. INTRODUCTION

2.1. EUT DESCRIPTION

The Equipment under Test(EUT) supports a GSM/GPRS/WCDMA/HSDPA/HSUPA of dual band (Cellular/PCS) with Bluetooth, WLAN and NFC

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY


The 3 & 10M test site and conducted measurement facility used to collect the radiated data are located at the 683-3, Yubang-Dong, Yongin-Si, Gyunggi-Do, 449-080, South Korea. The site is constructed in conformance with the requirements.

- 3&10M test site registration Number: 678747

3. DESCRIPTION OF TESTS

3.1 ERP&EIRP (Effective Radiated Power & Equivalent Isotropic Radiated Power)

Test Set-up

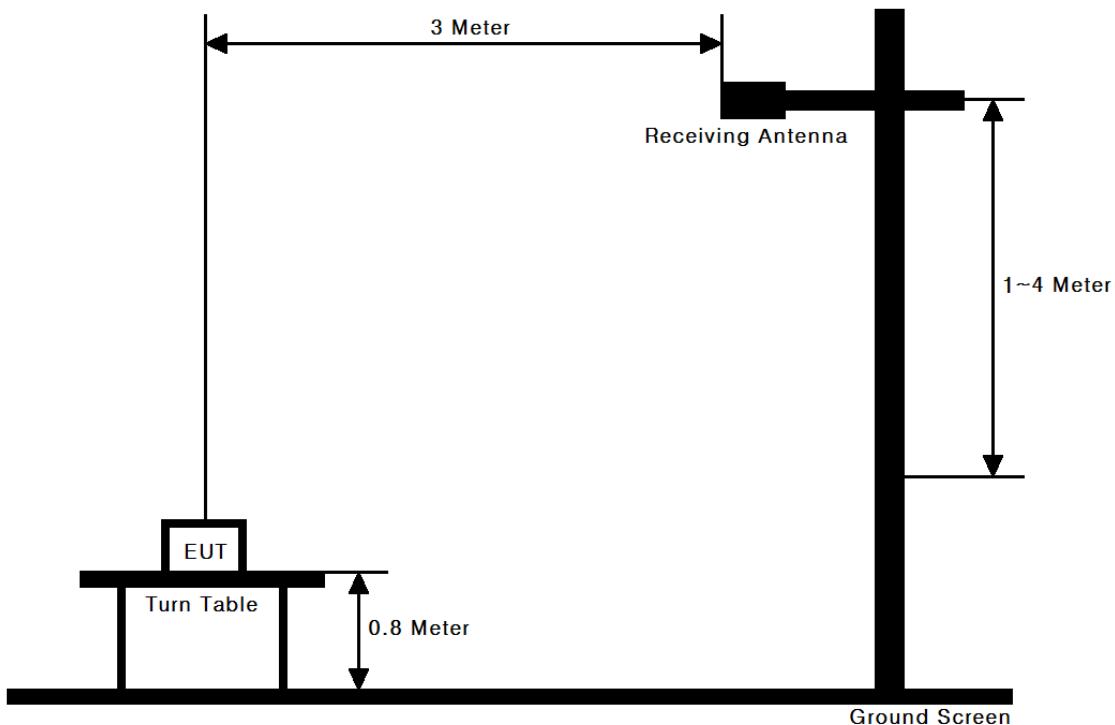

Test Procedure

These measurements were performed at 3 & 10m test site. The equipment under test is placed on a wooden turntable 0.8-meters above the ground plane and 3-meters from the receive antenna.


The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading.

For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

3.2 PEAK TO AVERAGE RATIO

Test set-up

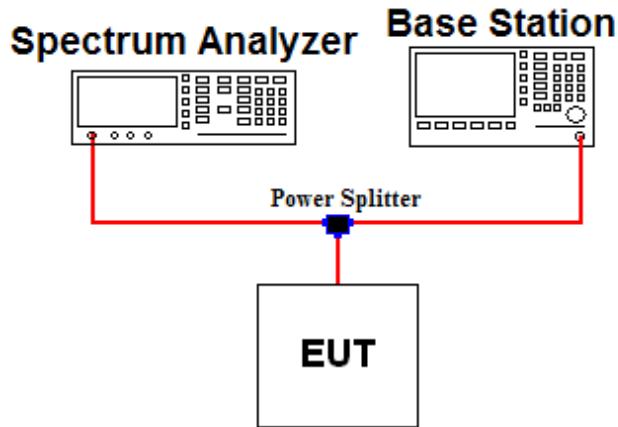

Test Procedure


A peak to average ratio measurement is performed at the conducted port of the EUT.

The spectrum analyzers Complementary Cumulative Distribution Function(CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The present of time the signal spends at or above the level defines the probability for that particular power level.

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth
2. Set the number of counts to a value that stabilizes the measured CCDF curve
3. Set the measurement interval as follows:
 - 1) For continuous transmissions, set to 1 ms
 - 2) For burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1%

3.3 OCCUPIED BANDWIDTH.

Test set-up

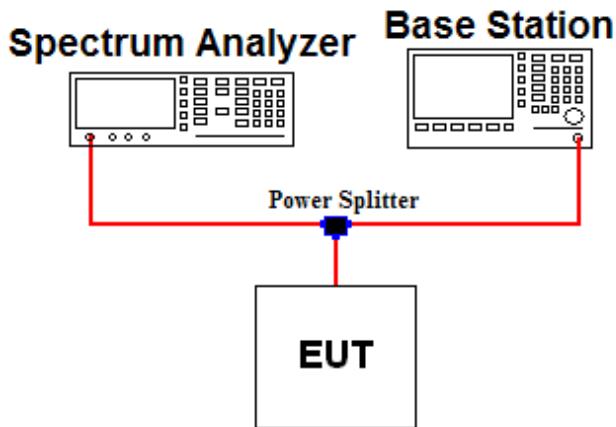

Offset value information

Frequency (MHz)	Offset Value (dB)	Frequency (MHz)	Offset Value (dB)
824.2	6.96	1850.2	7.34
826.4	6.97	1852.4	7.35
836.6	7.01	1880.0	7.39
846.6	7.05	1907.6	7.43
848.8	7.06	1909.8	7.44

Note. 1: The offset values from EUT to Spectrum analyzer were measured and used for test.
 Offset value = Cable A + Splitter + Cable B


Test Procedure

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power of a given emission.

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 ~ 5% of the expected OBW & VBW \geq 3 X RBW
3. Detector = Peak
4. Trace mode = Max hold
5. Sweep = Auto couple
6. The trace was allowed to stabilize
7. If necessary, step 2 ~ 7 were repeated after changing the RBW such that it would be within 1 ~ 5% of the 99% occupied bandwidth observed in step 7.

3.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.

Test set-up

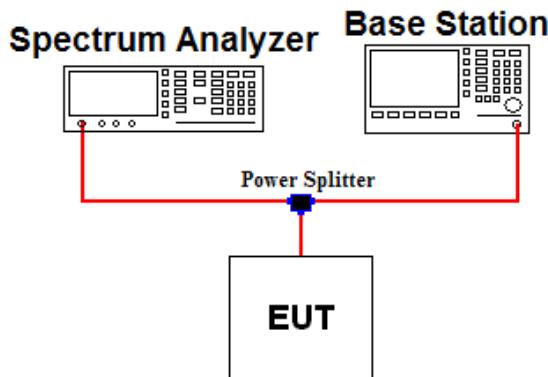

Offset value information

Frequency (MHz)	Offset Value (dB)	Frequency (MHz)	Offset Value (dB)	Frequency (MHz)	Offset Value (dB)
823.0	6.94	1849.0	7.32	5000.0	8.11
824.0	6.95	1850.0	7.33	10000.0	8.78
849.0	7.07	1910.0	7.45	15000.0	9.11
850.0	7.08	1915.0	7.46	20000.0	9.42

Note. 1: The offset value from EUT to Spectrum analyzer was measured and used for test.

Offset value = Cable A + Splitter + Cable B

Test Procedure

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.

The EUT was setup to maximum output power at its lowest channel. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.

1. RBW = 1MHz & VBW \geq 3MHz
2. Detector = Positive peak
3. Trace mode = Max hold
4. Sweep time = Auto
5. The trace was allowed to stabilize

The highest, lowest and a middle channel were tested for out of band measurements.


The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

Note 1: In the 1MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter was employed to measure the out of band Emissions.

Note 2: Compliance with the applicable limits is based on the use of measurement instrumentation employing a RBW of 100 KHz or greater for Part 22 and 1 MHz or greater for Part 24.

3.5 RADIATED SPURIOUS EMISSIONS

Test Set-up

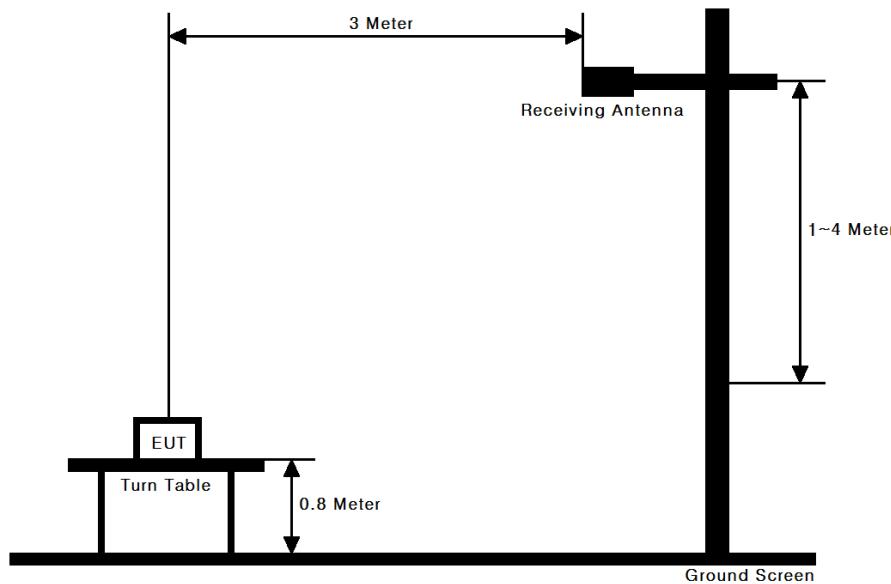

Test Procedure

This measurement was performed at 3-meter test range. The equipment under test is placed on a wooden turntable 0.8-meters above the ground plane and 3-meters from the receive antenna.

The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer.


For radiated power measurements below 1GHz, a half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading.

For radiated power measurements above 1GHz, a Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. The difference between the gain of the horn and an isotropic antenna are taken into consideration.

This measurement was performed with the EUT oriented in 3 orthogonal axis.

3.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

Test Set-up

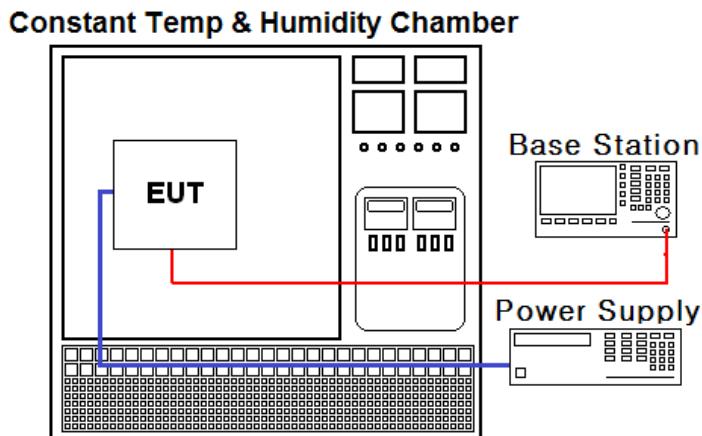

Test Procedure

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from battery end point to 115 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification - the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.000\ 25\% (\pm 2.5\ ppm)$ of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature. (25°C to provide a reference).
2. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

NOTE: The EUT is tested down to the battery endpoint.

4. LIST OF TEST EQUIPMENT

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal. Date (yy/mm/dd)	S/N
Multimeter	H.P	34401A	13/02/27	14/02/27	3146A13475
DC Power Supply	H.P	6622A	13/02/27	14/02/27	3448A03760
Power Splitter	Anritsu	K241B	13/09/12	14/09/12	020611
Attenuator	Aeroflex/Weinschel	56-3	13/09/12	14/09/12	Y2342
Thermohygrometer	BODYCOM	BJ5478	13/01/14	14/01/14	090205-4
Dipole Antenna	Schwarzbeck	VHA9103	12/03/12	14/03/12	2116
Dipole Antenna	Schwarzbeck	VHA9103	12/03/22	14/03/22	2117
Dipole Antenna	Schwarzbeck	UHA9105	12/03/12	14/03/12	2261
Dipole Antenna	Schwarzbeck	UHA9105	12/03/22	14/03/22	2262
Bilog Antenna	SCHAFFNER	CBL6112B	12/11/06	14/11/06	2737
HORN ANT	ETS	3115	12/02/20	14/02/20	6419
HORN ANT	ETS	3115	13/02/28	15/02/28	00021097
HORN ANT	A.H.Systems	SAS-574	13/03/20	15/03/20	154
HORN ANT	A.H.Systems	SAS-574	13/05/27	15/05/27	155
Amplifier	Agilent	8447E	13/01/08	14/01/08	2945A02865
Amplifier	Agilent	8449B	13/02/27	14/02/27	3008A00370
High-pass filter	Wainwright Instruments	WHKX1.0	13/09/12	14/09/12	9
High-Pass Filter	Wainwright	WHNX2.1	13/09/12	14/09/12	1
8960 Series 10 Wireless Comms Test Set	Agilent	E5515C	13/02/28	14/02/28	GB43461134
Universal Radio Communication Tester	Rohde Schwarz	CMU200	13/02/28	14/02/28	106760
Vector Signal Generator	Rohde Schwarz	SMJ100A	13/01/08	14/01/08	100148
Signal Generator	Rohde Schwarz	SMF100A	13/07/22	14/07/22	102341
Amplifier	EMPOWER	BBS3Q7ELU	13/09/12	14/09/12	1020
Spectrum Analyzer	Agilent	E4440A	12/10/22	13/10/22	US45303051

5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	RSS Section(s)	Parameter	Status Note 1
2.1046	RSS-132 (4.4) RSS-133 (4.1)	Conducted Output Power	C
22.913(a) 24.232(c)	RSS-132 (4.4) [SRSP-503(5.1.3)] RSS-133 (6.4) [SRSP-510(5.1.2)]	Effective Radiated Power Equivalent Isotropic Radiated Power	C
22.917(a) 24.238(a) 2.1049	RSS-Gen (4.6.1) RSS-133 (2.3)	Occupied Bandwidth	C
22.917(a) 24.238(a) 2.1051	RSS-132 (4.5.1) RSS-133 (6.5.1)	Band Edge Spurious and Harmonic Emissions at Antenna Terminal	C
24.232(d)	RSS-133 (6.4)	Peak to Average Ratio	C
22.917(a) 24.238(a) 2.1053	RSS-132 (4.5.1) RSS-133 (6.5.1)	Radiated Spurious and Harmonic Emissions	C
22.355 24.235 2.1055	RSS-132 (4.3) RSS-133 (6.3)	Frequency Stability	C
Note 1: C=Comply NC=Not Comply NT=Not Tested NA=Not Applicable			

The sample was tested according to the following specification:

ANSI/TIA/EIA-603-C-2004 and KDB 971168 D01 v02r01

6. SAMPLE CALCULATION

A. Emission Designator

GSM850 Emission Designator

Emission Designator = **248KGXW**

GSM OBW = 248.0306 kHz

(Measured at the 99.75 % power bandwidth)

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

GSM1900 Emission Designator

Emission Designator = **247KGXW**

GSM OBW = 247.4338 kHz

(Measured at the 99.75 % power bandwidth)

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

WCDMA850 Emission Designator

Emission Designator = **4M15F9W**

WCDMA OBW = 4.1454 MHz

(Measured at the 99.75 % power bandwidth)

F = Frequency Modulation

9 = Composite Digital Information

W = Combination (Audio/Data)

HSUPA850 Emission Designator

Emission Designator = **4M17F9W**

HSUPA OBW = 4.1679 MHz

(Measured at the 99.75 % power bandwidth)

F = Frequency Modulation

9 = Composite Digital Information

W = Combination (Audio/Data)

WCDMA1900 Emission Designator

Emission Designator = **4M15F9W**

WCDMA OBW = 4.1453 MHz

(Measured at the 99.75 % power bandwidth)

F = Frequency Modulation

9 = Composite Digital Information

W = Combination (Audio/Data)

HSUPA1900 Emission Designator

Emission Designator = **4M15F9W**

HSUPA OBW = 4.1484 MHz

(Measured at the 99.75 % power bandwidth)

F = Frequency Modulation


9 = Composite Digital Information

W = Combination (Audio/Data)

7. TEST DATA

7.1 CONDUCTED OUTPUT POWER

A base station simulator was used to establish communication with the EUT. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported. Conducted Output Powers of EUT are reported below.

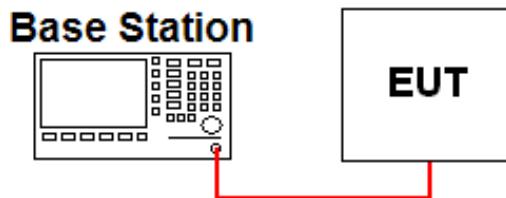

- GSM / GPRS / EDGE

Band	Channel	Test Result(dBm)								
		GSM	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
Cellular	128	33.00	33.00	31.90	30.00	29.40	N/A	N/A	N/A	N/A
	190	33.00	33.00	31.90	30.00	29.40	N/A	N/A	N/A	N/A
	251	33.00	32.90	31.80	29.90	29.50	N/A	N/A	N/A	N/A
PCS	512	30.00	30.00	28.70	27.20	26.00	N/A	N/A	N/A	N/A
	661	30.00	30.00	28.70	27.10	26.00	N/A	N/A	N/A	N/A
	810	29.90	29.80	28.70	27.10	25.90	N/A	N/A	N/A	N/A

The output power was measured using the Agilent E5515C

▪ WCDMA

3GPP Release Version	Mode		Power (dBm)			MPR	Bc	β_d	B_c/β_d	Sub-Test
	Channel		4132	4183	4233					
99	WCDMA	RMC	22.47	22.50	22.46	-	-	-	-	-
		ARM	22.46	22.48	22.41					
5	HSDPA (Cellular)	22.43	22.45	22.39	0	2/15	15/15	2/15	1	
5		22.43	22.44	22.38	0	12/15	15/15	12/15	2	
5		21.94	21.95	21.93	0.5	15/15	8/15	15/8	3	
5		21.91	21.95	21.92	0.5	15/15	4/15	15/4	4	
-	Channel		9262	9400	9538	-	-	-	-	-
99	WCDMA	RMC	22.45	22.49	22.41	-	-	-	-	-
		ARM	22.41	22.48	22.39					
5	HSDPA (PCS)	22.41	22.46	22.38	0	2/15	15/15	2/15	1	
5		22.40	22.40	22.35	0	12/15	15/15	12/15	2	
5		21.99	21.94	21.91	0.5	15/15	8/15	15/8	3	
5		21.97	21.93	21.89	0.5	15/15	4/15	15/4	4	

The output power was measured using the Agilent E5515C

▪ HSUPA

3GPP Release Version	Mode		Power (dBm)			MPR	Bc	β_d	B_c/β_d	Sub-Test
	Channel		4132	4183	4233					
6	HSUPA (Cellular)	22.41	22.43	22.37	0	11/15	15/15	11/15	1	
		20.42	20.43	20.39	2	6/15	15/15	6/15	2	
		21.48	21.45	21.41	1	15/15	9/15	15/9	3	
		20.41	20.41	20.38	2	2/15	15/15	2/15	4	
		22.40	22.41	22.39	0	15/15	15/15	15/15	5	
-	Channel		9262	9400	9538	-	-	-	-	-
6	HSUPA (PCS)	22.39	22.42	22.33	0	11/15	15/15	11/15	1	
		20.49	20.45	20.39	2	6/15	15/15	6/15	2	
		21.45	21.46	21.39	1	15/15	9/15	15/9	3	
		20.45	20.43	20.39	2	2/15	15/15	2/15	4	
		22.38	22.40	22.31	0	15/15	15/15	15/15	5	

The power was measured E5515C

7.2 PEAKTOAVERAGERATIO

- Plots of the EUT's Peak- to- Average Ratio are shown in Clause 8.1

7.3 OCCUPIED BANDWIDTH

Band	Channel	Test Result(KHz)
GSM850	128	244.96
	190	244.74
	251	248.03
GSM1900	512	245.30
	661	244.24
	810	247.43
WCDMA850	4132	4142.2
	4183	4145.4
	4233	4132.0
HSUPA850	4132	4167.9
	4183	4134.6
	4233	4136.8
WCDMA1900	9262	4145.3
	9400	4141.7
	9538	4142.3
HSUPA1900	9262	4135.5
	9400	4148.4
	9538	4145.8

- Plots of the EUT's Occupied Bandwidth are shown in Clause 8.2

7.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

- Plots of the EUT's Conducted Spurious Emissions are shown in Clause 8.3

7.5 BAND EDGE

- Plots of the EUT's Band Edge are shown in Clause 8.4

7.6 EFFECTIVE RADIATED POWER

- GSM850 data

CH.	EUT Position (Axis)	Test Conditions							
		Reading Value (dBm)	Pol. (H/V)	Level at Substitute Antenna Terminal (dBm)	Substitute Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Power Supply	Note.
824.2 (128 CH)	X	- 4.92	V	30.51	1.20	31.71	1.483	DC 3.8V	-
836.6 (190 CH)	X	- 3.56	V	31.12	1.15	32.27	1.687	DC 3.8V	-
848.8 (251 CH)	X	- 5.87	V	30.27	1.05	31.32	1.355	DC 3.8V	-

- WCDMA850 data

CH.	EUT Position (Axis)	Test Conditions							
		Reading Value (dBm)	Pol. (H/V)	Level at Substitute Antenna Terminal (dBm)	Substitute Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Power Supply	Note.
826.4 (4132 CH)	X	-15.11	V	21.19	1.19	22.38	0.173	DC 3.8V	-
836.6 (4183 CH)	X	-12.77	V	21.98	1.15	23.13	0.206	DC 3.8V	-
846.6 (4233 CH)	X	-12.56	V	21.68	1.10	22.78	0.190	DC 3.8V	-

- HSUPA850 data

CH.	EUT Position (Axis)	Test Conditions							
		Reading Value (dBm)	Pol. (H/V)	Level at Substitute Antenna Terminal (dBm)	Substitute Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Power Supply	Note.
826.4 (4132 CH)	X	- 15.34	V	20.96	1.19	22.15	0.164	DC 3.8V	-
836.6 (4183 CH)	X	- 12.91	V	21.84	1.15	22.99	0.199	DC 3.8V	-
846.6 (4233 CH)	X	- 12.80	V	21.44	1.10	22.54	0.179	DC 3.8V	-

NOTES:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz.

A half-wave dipole is substituted in place of the EUT. This dipole antenna is driven by a signal generator and the level of the signal generator is adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This EUT was tested under all configurations and the highest power is reported in GSM mode and WCDMA mode with HSDPA inactive at 12.2 kbps RMC and TPC bits set to "1" and in GSM mode using a Power Control Level of "0" in PCS Band and "5" in the Cellular Band. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

7.7 EQUIVALENT ISOTROPIC RADIATED POWER

- GSM1900 data

CH.	EUT Position (Axis)	TEST CONDITIONS						
		Reading Value (dBm)	Pol. (H/V)	Level at Substitute Antenna Terminal (dBm)	Substitute Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Power Supply
1850.2 (512 CH)	Y	- 6.65	H	21.41	8.06	29.47	0.884	DC 3.8V
1880.0 (661 CH)	Y	- 7.14	H	21.45	8.12	29.57	0.905	DC 3.8V
1909.8 (810 CH)	Y	- 5.98	H	21.77	8.18	29.95	0.989	DC 3.8V

- WCDMA1900 data

CH.	EUT Position (Axis)	TEST CONDITIONS						
		Reading Value (dBm)	Pol. (H/V)	Level at Substitute Antenna Terminal (dBm)	Substitute Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Power Supply
1852.4 (9262 CH)	X	- 12.46	H	15.49	8.06	23.55	0.226	DC 3.8V
1880.0 (9400 CH)	Y	- 13.36	H	15.23	8.12	23.35	0.216	DC 3.8V
1907.6 (9538 CH)	Y	- 12.80	H	15.62	8.18	23.80	0.240	DC 3.8V

- HSUPA1900 data

CH.	EUT Position (Axis)	TEST CONDITIONS						
		Reading Value (dBm)	Pol. (H/V)	Level at Substitute Antenna Terminal (dBm)	Substitute Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Power Supply
1852.4 (9262 CH)	X	- 12.87	H	15.08	8.06	23.14	0.206	DC 3.8V
1880.0 (9400 CH)	Y	- 13.77	H	14.82	8.12	22.94	0.197	DC 3.8V
1907.6 (9538 CH)	Y	- 13.30	H	15.12	8.18	23.30	0.214	DC 3.8V

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz.

A half-wave dipole is substituted in place of the EUT. This dipole antenna is driven by a signal generator and the level of the signal generator is adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This EUT was tested under all configurations and the highest power is reported in GSM mode and WCDMA mode with HSDPA inactive at 12.2 kbps RMC and TPC bits set to "1" and in GSM mode using a Power Control Level of "0" in PCS Band and "5" in the Cellular Band. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

7.8 RADIATED SPURIOUS EMISSIONS

7.8.1 RADIATED SPURIOUS EMISSIONS (GSM850)

Channel (ERP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	Level at Substitute Antenna Terminal (dBm)	Substitute Antenna Gain (dBD)	Correct Generator Level (dBm)	Result (dBc)	Limit (dBc)
128 (1.483W)	1648.58	Z	V	-55.08	5.48	-49.60	81.31	44.71
	2472.63	Z	V	-60.49	6.56	-53.93	85.64	
	-	-	-	-	-	-	-	
190 (1.687W)	1673.31	Z	V	-54.63	5.53	-49.10	81.37	45.27
	2509.75	Z	V	-62.05	6.58	-55.47	87.74	
	-	-	-	-	-	-	-	
251 (1.355W)	1697.26	Z	V	-55.05	5.59	-49.46	80.78	44.32
	2546.33	Z	V	-62.10	6.61	-55.49	86.81	
	-	-	-	-	-	-	-	

- Limit Calculation= $43 + 10 \log_{10}(\text{ERP [W]})$ [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This EUT was tested under all configurations and the highest power is reported in GSM mode and WCDMA mode with HSDPA inactive at 12.2 kbps RMC and TPC bits set to "1" and in GSM mode using a Power Control Level of "0" in PCS Band and "5" in the Cellular Band. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

7.8.2 RADIATED SPURIOUS EMISSIONS (WCDMA850)

Channel (ERP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	Level at Substitute Antenna Terminal (dBm)	Substitute Antenna Gain (dBd)	Correct Generator Level (dBm)	Result (dBc)	Limit (dBc)
4132 (0.173W)	1653.83	X	V	-62.71	6.56	-56.15	78.53	35.38
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
4183 (0.206W)	1674.38	X	V	-62.40	6.58	-55.82	78.95	36.13
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
4233 (0.190W)	1696.83	X	V	-62.77	6.60	-56.17	78.95	35.78
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	

- Limit Calculation = $43 + 10 \log_{10}(\text{ERP [W]})$ [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This EUT was tested under all configurations and the highest power is reported in GSM mode and WCDMA mode with HSDPA inactive at 12.2 kbps RMC and TPC bits set to "1" and in GSM mode using a Power Control Level of "0" in PCS Band and "5" in the Cellular Band. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

7.8.3 RADIATED SPURIOUS EMISSIONS (HSUPA850)

Channel (ERP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	Level at Substitute Antenna Terminal (dBm)	Substitute Antenna Gain (dBd)	Correct Generator Level (dBm)	Result (dBc)	Limit (dBc)
4132 (0.164W)	1653.67	X	V	-63.02	6.56	-56.46	78.61	35.15
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
4183 (0.199W)	1675.20	X	V	-62.23	6.58	-55.65	78.64	35.99
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
4233 (0.179W)	1694.44	X	V	-63.16	6.60	-56.56	79.10	35.54
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	

- Limit Calculation = $43 + 10 \log_{10} (\text{ERP [W]}) [\text{dBc}]$

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This EUT was tested under all configurations and the highest power is reported in GSM mode and WCDMA mode with HSDPA inactive at 12.2 kbps RMC and TPC bits set to "1" and in GSM mode using a Power Control Level of "0" in PCS Band and "5" in the Cellular Band. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

7.8.4 RADIATED SPURIOUS EMISSIONS (GSM1900)

Channel (EIRP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	Level at Substitute Antenna Terminal (dBm)	Substitute Antenna Gain (dBi)	Correct Generator Level (dBm)	Result (dBc)	Limit (dBc)
512 (0.884W)	3700.64	Y	V	- 52.52	9.90	- 42.62	72.09	42.47
	9251.12	Z	H	- 45.56	14.16	- 31.40	60.86	
	-	-	-	-	-	-	-	
661 (0.905W)	3759.28	Y	V	- 53.36	9.90	- 43.46	73.02	42.57
	9399.83	Z	H	- 45.86	14.27	- 31.59	61.15	
	-	-	-	-	-	-	-	
810 (0.989W)	3819.54	Y	V	- 52.31	9.91	- 42.40	72.35	42.95
	9549.73	Z	H	- 44.42	14.39	- 30.03	59.98	
	-	-	-	-	-	-	-	

- Limit Calculation = $43 + 10 \log_{10}(\text{EIRP [W]})$ [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This EUT was tested under all configurations and the highest power is reported in GSM mode and WCDMA mode with HSDPA inactive at 12.2 kbps RMC and TPC bits set to "1" and in GSM mode using a Power Control Level of "0" in PCS Band and "5" in the Cellular Band. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

7.8.5 RADIATED SPURIOUS EMISSIONS (WCDMA1900)

Channel (EIRP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	Level at Substitute Antenna Terminal (dBm)	Substitute Antenna Gain (dBi)	Correct Generator Level (dBm)	Result (dBc)	Limit (dBc)
9262 (0.226W)	3705.40	X	V	- 53.56	9.90	- 43.66	67.21	36.55
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
9400 (0.216W)	3760.24	X	V	- 56.19	9.90	- 46.29	69.63	36.35
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
9538 (0.240W)	3815.10	X	V	- 54.63	9.91	- 44.72	68.52	36.80
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	

- Limit Calculation = $43 + 10 \log_{10} (\text{EIRP [W]}) [\text{dBc}]$

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This EUT was tested under all configurations and the highest power is reported in GSM mode and WCDMA mode with HSDPA inactive at 12.2 kbps RMC and TPC bits set to "1" and in GSM mode using a Power Control Level of "0" in PCS Band and "5" in the Cellular Band. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

7.8.6 RADIATED SPURIOUS EMISSIONS (HSUPA1900)

Channel (EIRP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	Level at Substitute Antenna Terminal (dBm)	Substitute Antenna Gain (dBi)	Correct Generator Level (dBm)	Result (dBc)	Limit (dBc)
9262 (0.206W)	3704.57	X	H	- 55.74	9.90	- 45.84	68.98	36.14
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
9400 (0.197W)	3760.88	X	H	- 56.44	9.90	- 46.54	69.47	35.94
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
9538 (0.214W)	3816.23	X	H	- 55.24	9.91	- 45.33	68.63	36.30
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	

- Limit Calculation = $43 + 10 \log_{10} (\text{EIRP [W]}) [\text{dBc}]$

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This EUT was tested under all configurations and the highest power is reported in GSM mode and WCDMA mode with HSDPA inactive at 12.2 kbps RMC and TPC bits set to "1" and in GSM mode using a Power Control Level of "0" in PCS Band and "5" in the Cellular Band. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.


The worst case data is reported.

7.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

7.9.1 FREQUENCY STABILITY (GSM850)

OPERATING FREQUENCY : 836,599,985 Hz
 CHANNEL : 190(Mid)
 REFERENCE VOLTAGE : 3.80 V DC
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm


VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100 %	3.80	+ 25(Ref)	836,599,985	0.000	0.00000000
100 %		- 30	836,599,993	0.010	0.00000096
100 %		- 20	836,599,996	0.013	0.00000131
100 %		- 10	836,599,995	0.012	0.00000120
100 %		0	836,599,987	0.002	0.00000024
100 %		+ 10	836,599,983	- 0.002	- 0.00000024
100 %		+ 20	836,599,984	- 0.001	- 0.00000012
100 %		+ 30	836,599,987	0.002	0.00000024
100 %		+ 40	836,599,994	0.011	0.00000108
100 %		+ 50	836,599,986	0.001	0.00000012
85 %	3.23	+ 25	836,599,995	0.012	0.00000120
115 %	4.37	+ 25	836,599,986	0.001	0.00000012
BATT.ENDPOINT	2.80	+ 25	836,599,994	0.011	0.00000108

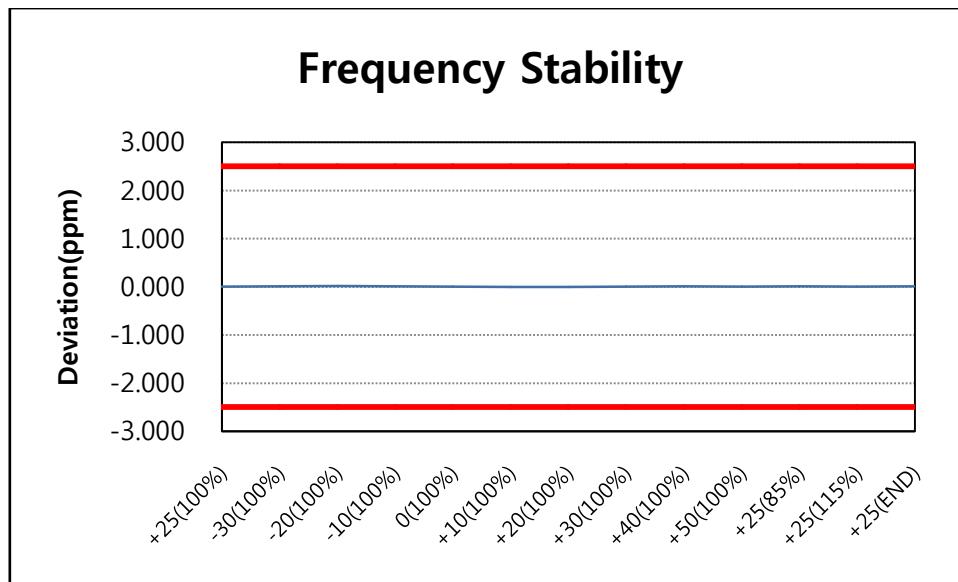

7.9.2 FREQUENCY STABILITY (WCDMA850)

OPERATING FREQUENCY : 836,599,992 Hz
 CHANNEL : 4183(Mid)
 REFERENCE VOLTAGE : 3.80 V DC
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm


VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100 %	3.80	+ 25(Ref)	836,599,992	0.000	0.000000000
100 %		- 30	836,600,004	0.014	0.00000143
100 %		- 20	836,599,994	0.002	0.00000024
100 %		- 10	836,599,992	0.000	0.000000000
100 %		0	836,599,989	- 0.004	- 0.00000036
100 %		+ 10	836,599,994	0.002	0.00000024
100 %		+ 20	836,599,987	- 0.006	- 0.00000060
100 %		+ 30	836,599,984	- 0.010	- 0.00000096
100 %		+ 40	836,599,992	0.000	0.000000000
100 %		+ 50	836,600,007	0.018	0.00000179
85 %	3.23	+ 25	836,599,984	- 0.010	- 0.00000096
115 %	4.37	+ 25	836,599,978	- 0.017	- 0.00000167
BATT.ENDPOINT	2.80	+ 25	836,599,983	- 0.011	- 0.00000108

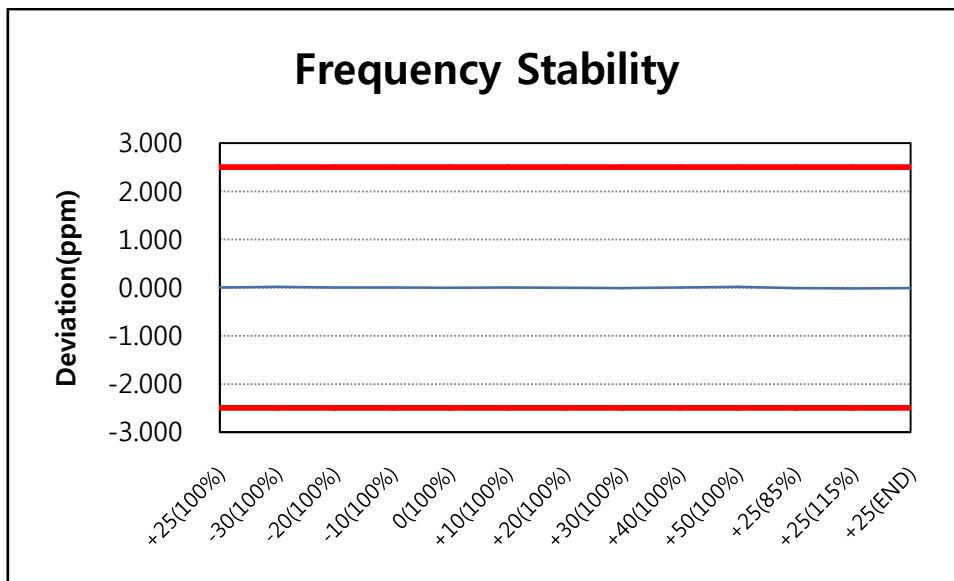

7.9.3 FREQUENCY STABILITY (HSUPA850)

OPERATING FREQUENCY : 836,599,986 Hz
 CHANNEL : 4183(Mid)
 REFERENCE VOLTAGE : 3.80 V DC
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm


VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100 %	3.80	+ 25(Ref)	836,599,986	0.000	0.000000000
100 %		- 30	836,599,995	0.011	0.00000108
100 %		- 20	836,599,989	0.004	0.00000036
100 %		- 10	836,599,982	- 0.005	- 0.00000048
100 %		0	836,599,979	- 0.008	- 0.00000084
100 %		+ 10	836,599,987	0.001	0.00000012
100 %		+ 20	836,599,985	- 0.001	- 0.00000012
100 %		+ 30	836,599,989	0.004	0.00000036
100 %		+ 40	836,599,979	- 0.008	- 0.00000084
100 %		+ 50	836,600,008	0.026	0.00000263
85 %	3.23	+ 25	836,599,980	- 0.007	- 0.00000072
115 %	4.37	+ 25	836,599,983	- 0.004	- 0.00000036
BATT.ENDPOINT	2.80	+ 25	836,599,992	0.007	0.00000072

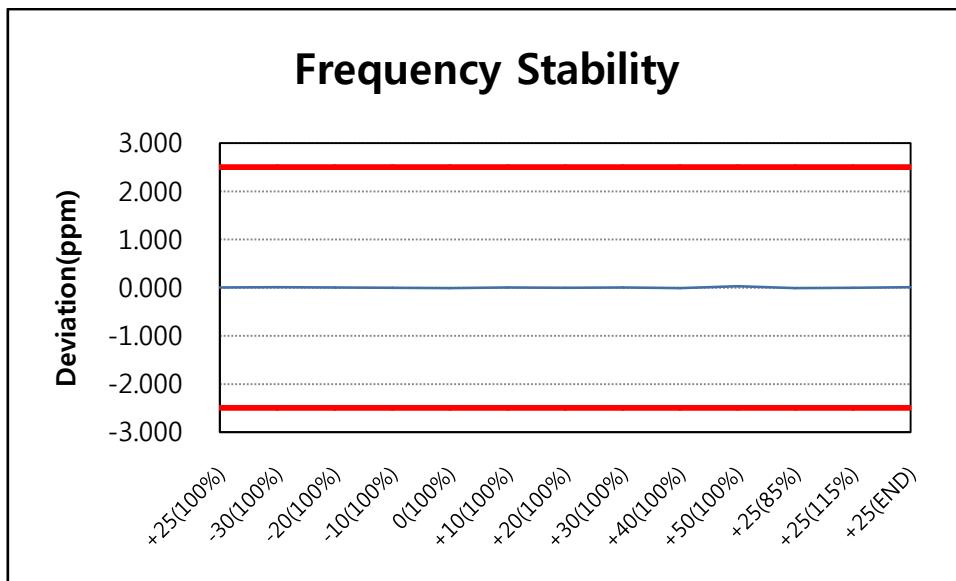

7.9.4 FREQUENCY STABILITY (GSM1900)

OPERATING FREQUENCY : 1,879,999,978 Hz
 CHANNEL : 661(Mid)
 REFERENCE VOLTAGE : 3.80 V DC
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm


VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100 %	3.80	+ 25(Ref)	1,879,999,978	0.000	0.000000000
100 %		- 30	1,879,999,989	0.006	0.00000059
100 %		- 20	1,879,999,992	0.007	0.00000074
100 %		- 10	1,879,999,986	0.004	0.00000043
100 %		0	1,879,999,974	- 0.002	- 0.00000021
100 %		+ 10	1,879,999,986	0.004	0.00000043
100 %		+ 20	1,879,999,982	0.002	0.00000021
100 %		+ 30	1,879,999,991	0.007	0.00000069
100 %		+ 40	1,879,999,985	0.004	0.00000037
100 %		+ 50	1,879,999,996	0.010	0.00000096
85 %	3.23	+ 25	1,879,999,976	- 0.001	- 0.00000011
115 %	4.37	+ 25	1,879,999,978	0.000	0.000000000
BATT.ENDPOINT	2.80	+ 25	1,879,999,983	0.003	0.00000027

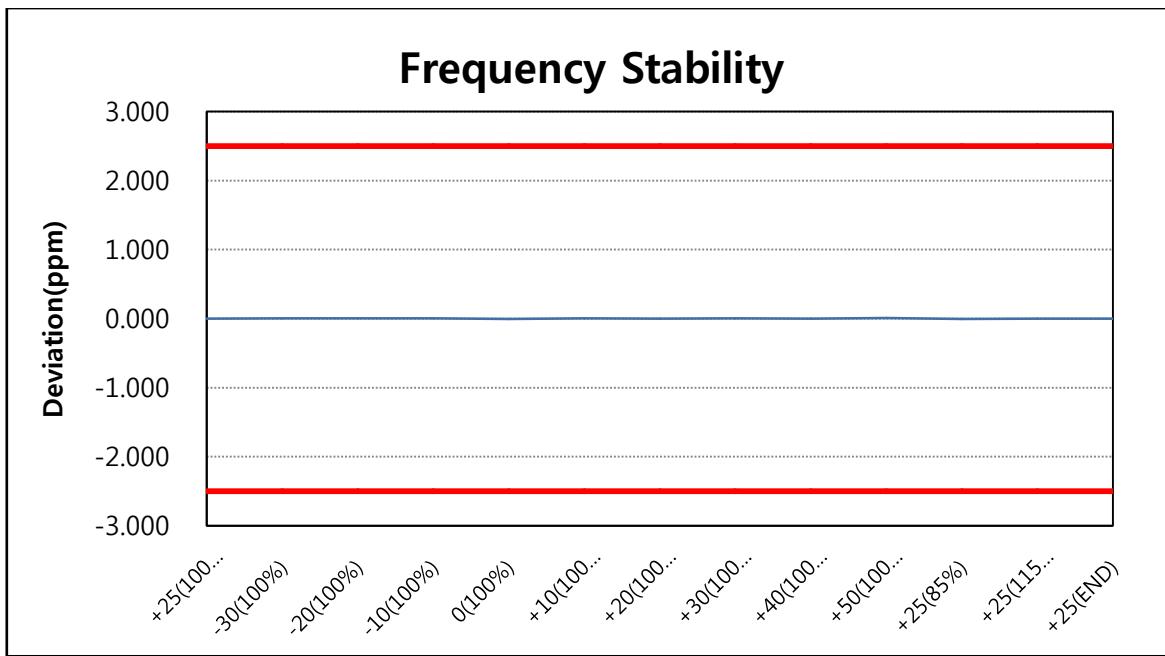

7.9.5 FREQUENCY STABILITY (WCDMA1900)

OPERATING FREQUENCY : 1,880,000,017 Hz
 CHANNEL : 9400(Mid)
 REFERENCE VOLTAGE : 3.80 V DC
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm


VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100 %	3.80	+ 25(Ref)	1,880,000,017	0.000	0.000000000
100 %		- 30	1,879,999,976	- 0.022	- 0.00000218
100 %		- 20	1,879,999,989	- 0.015	- 0.00000149
100 %		- 10	1,880,000,014	- 0.002	- 0.00000016
100 %		0	1,879,999,980	- 0.020	- 0.00000197
100 %		+ 10	1,879,999,975	- 0.022	- 0.00000223
100 %		+ 20	1,879,999,977	- 0.021	- 0.00000213
100 %		+ 30	1,879,999,968	- 0.026	- 0.00000261
100 %		+ 40	1,879,999,970	- 0.025	- 0.00000250
100 %		+ 50	1,879,999,978	- 0.021	- 0.00000207
85 %	3.23	+ 25	1,880,000,022	0.003	0.00000027
115 %	4.37	+ 25	1,880,000,013	- 0.002	- 0.00000021
BATT.ENDPOINT	2.80	+ 25	1,880,000,009	- 0.004	- 0.00000043

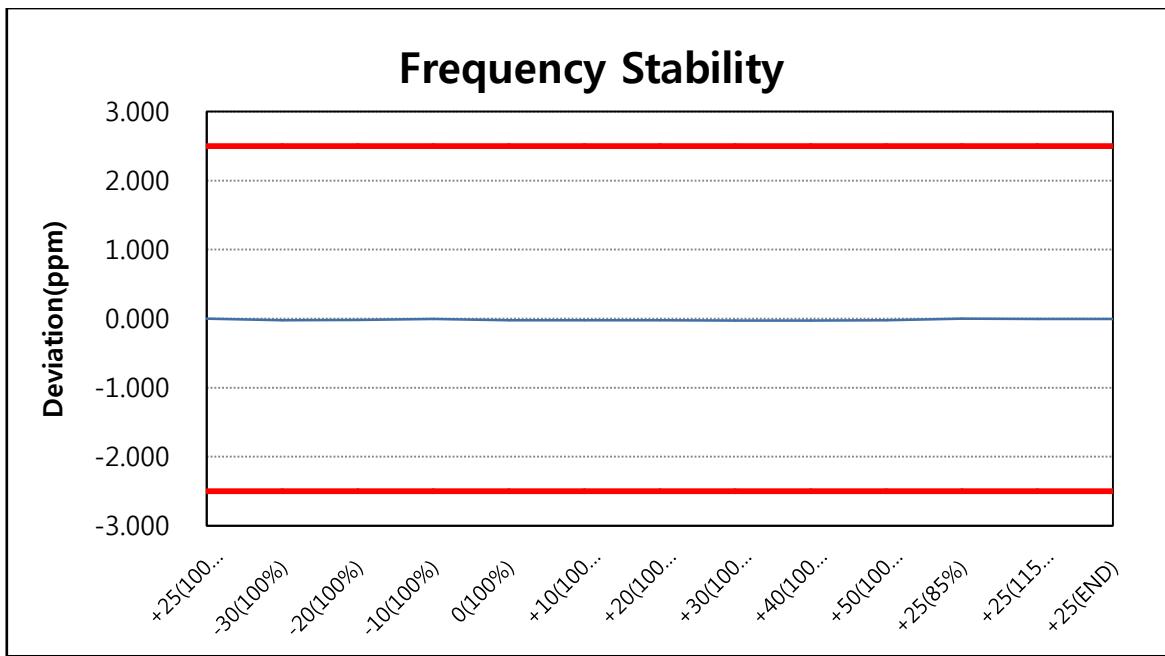

7.9.6 FREQUENCY STABILITY (HSUPA1900)


OPERATING FREQUENCY : 1,880,000,020 Hz
 CHANNEL : 9400(Mid)
 REFERENCE VOLTAGE : 3.80 V DC
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm


VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100 %	3.80	+ 25(Ref)	1,880,000,020	0.000	0.000000000
100 %		- 30	1,879,999,979	- 0.022	- 0.00000218
100 %		- 20	1,879,999,980	- 0.021	- 0.00000213
100 %		- 10	1,880,000,007	- 0.007	- 0.00000069
100 %		0	1,879,999,987	- 0.018	- 0.00000176
100 %		+ 10	1,879,999,982	- 0.020	- 0.00000202
100 %		+ 20	1,879,999,981	- 0.021	- 0.00000207
100 %		+ 30	1,879,999,978	- 0.022	- 0.00000223
100 %		+ 40	1,879,999,986	- 0.018	- 0.00000181
100 %		+ 50	1,879,999,982	- 0.020	- 0.00000202
85 %	3.23	+ 25	1,880,000,013	- 0.004	- 0.00000037
115 %	4.37	+ 25	1,880,000,006	- 0.007	- 0.00000074
BATT.ENDPOINT	2.80	+ 25	1,880,000,012	- 0.004	- 0.00000043

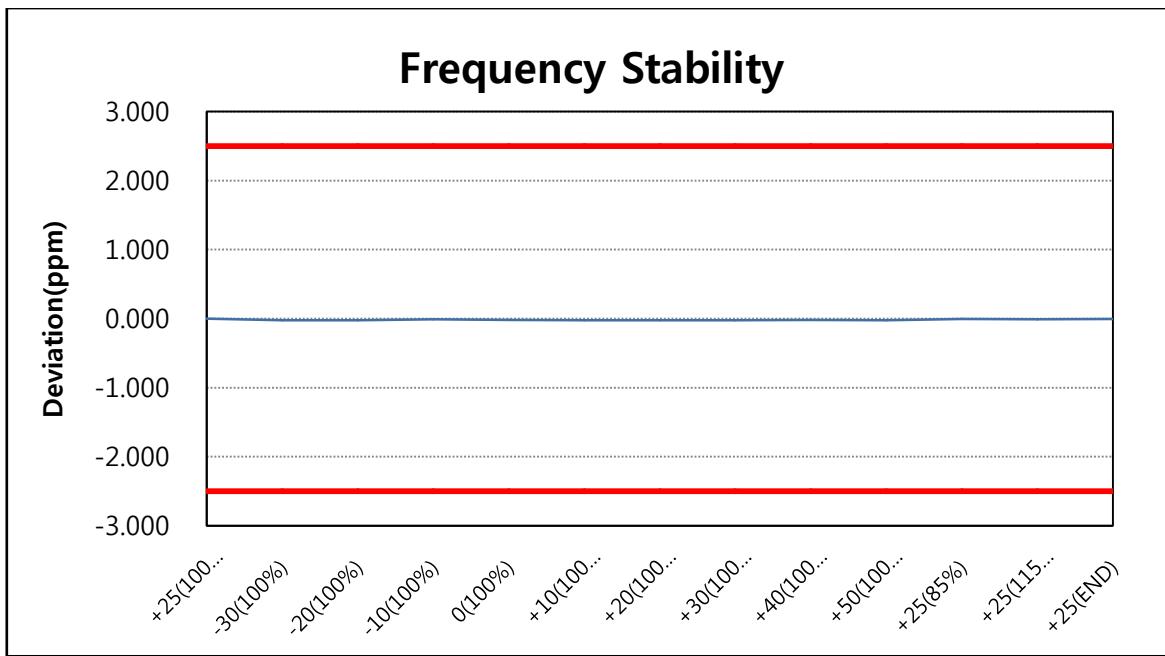

8. TEST PLOTS


8.1 Peak to Average Ratio

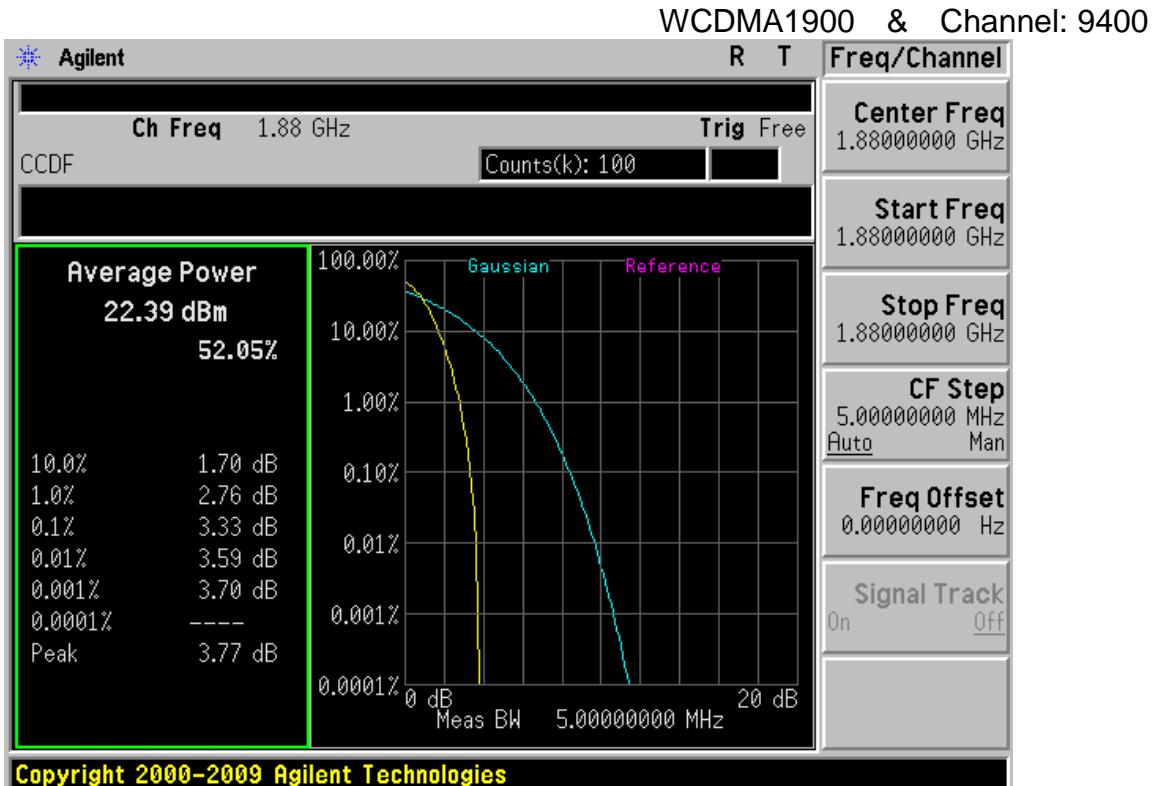

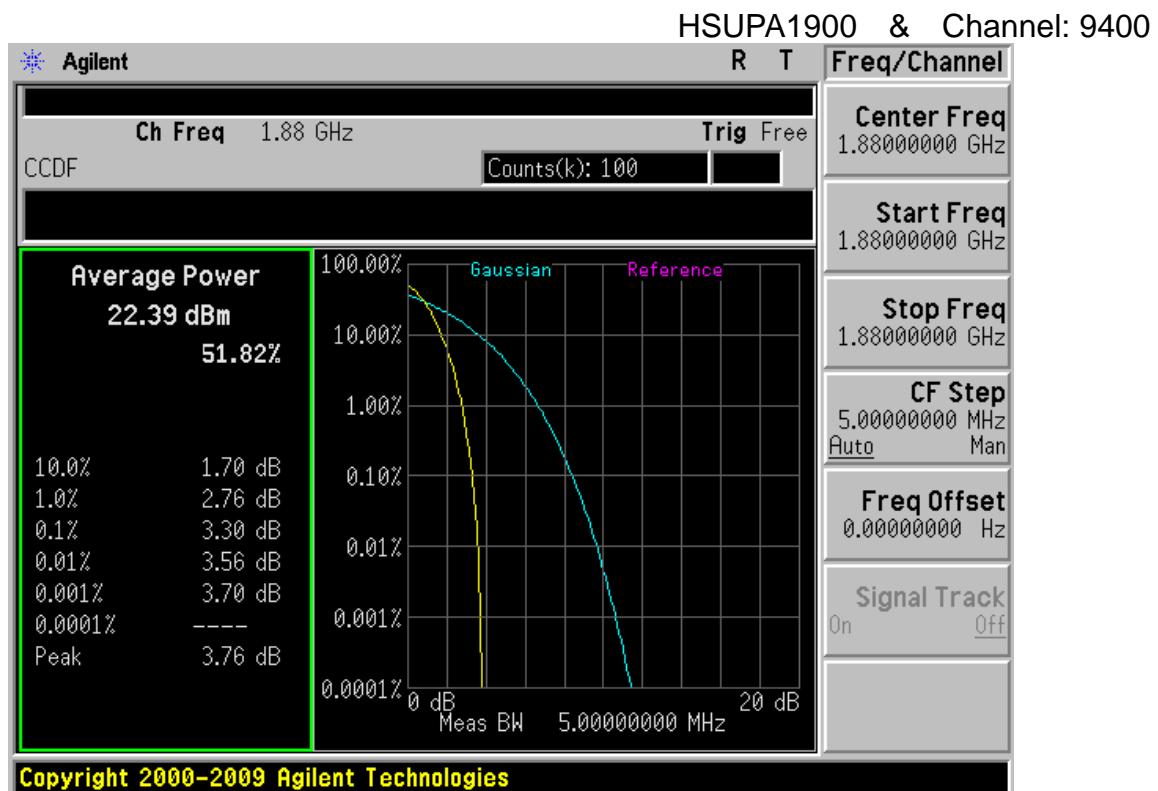



8.2 Occupied Bandwidth 99 % Bandwidth



GSM850 & Channel: 128

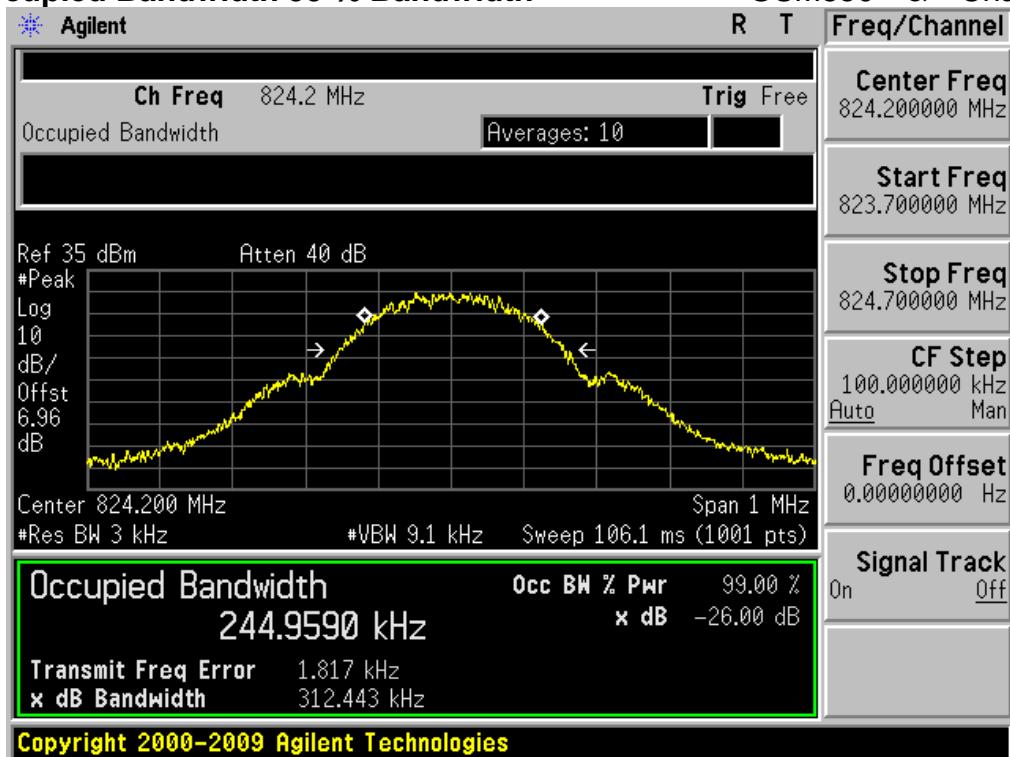




GSM850 & Channel: 190

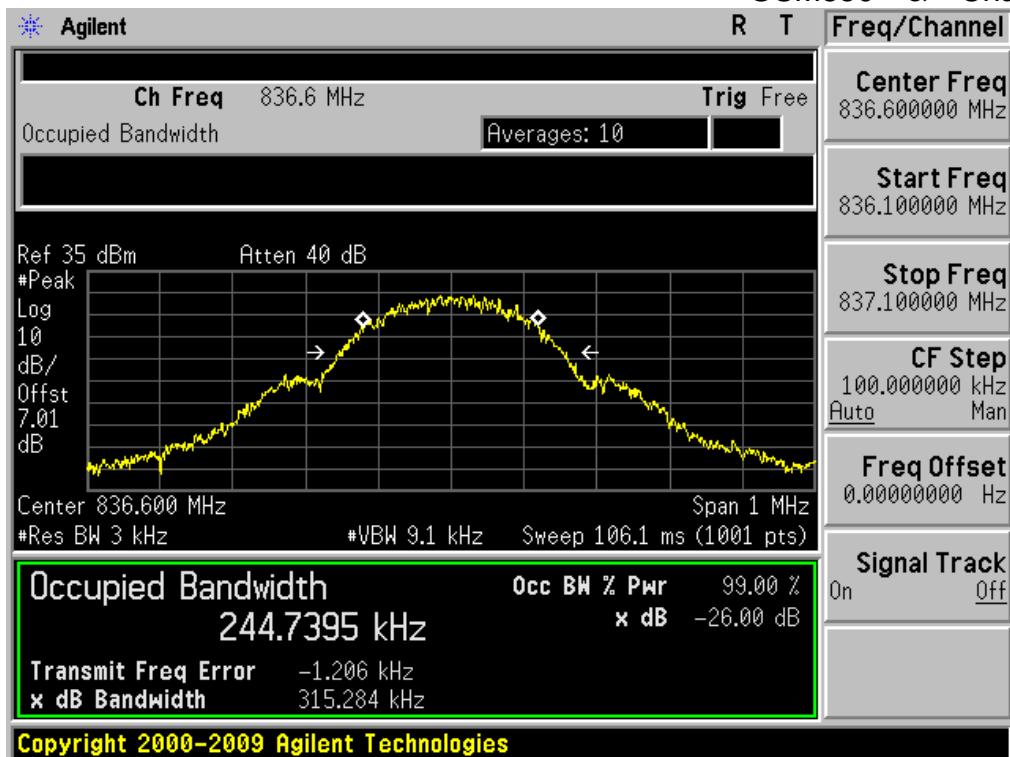



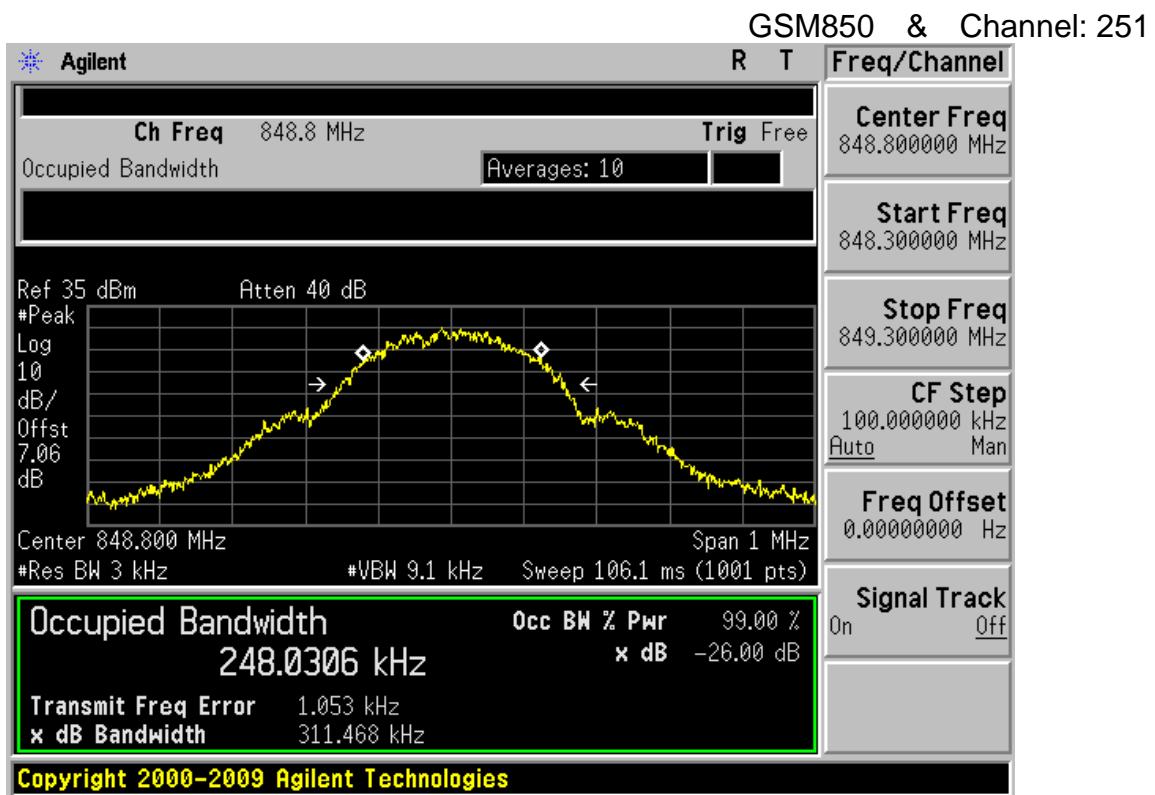


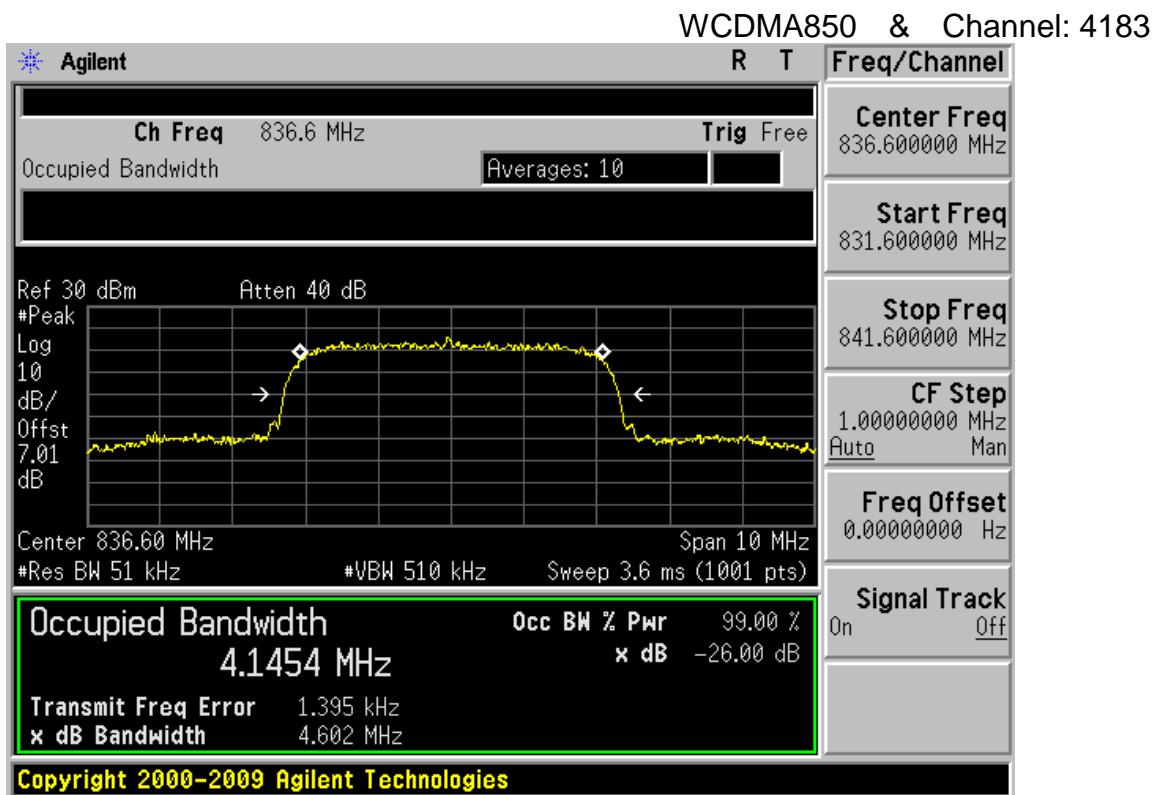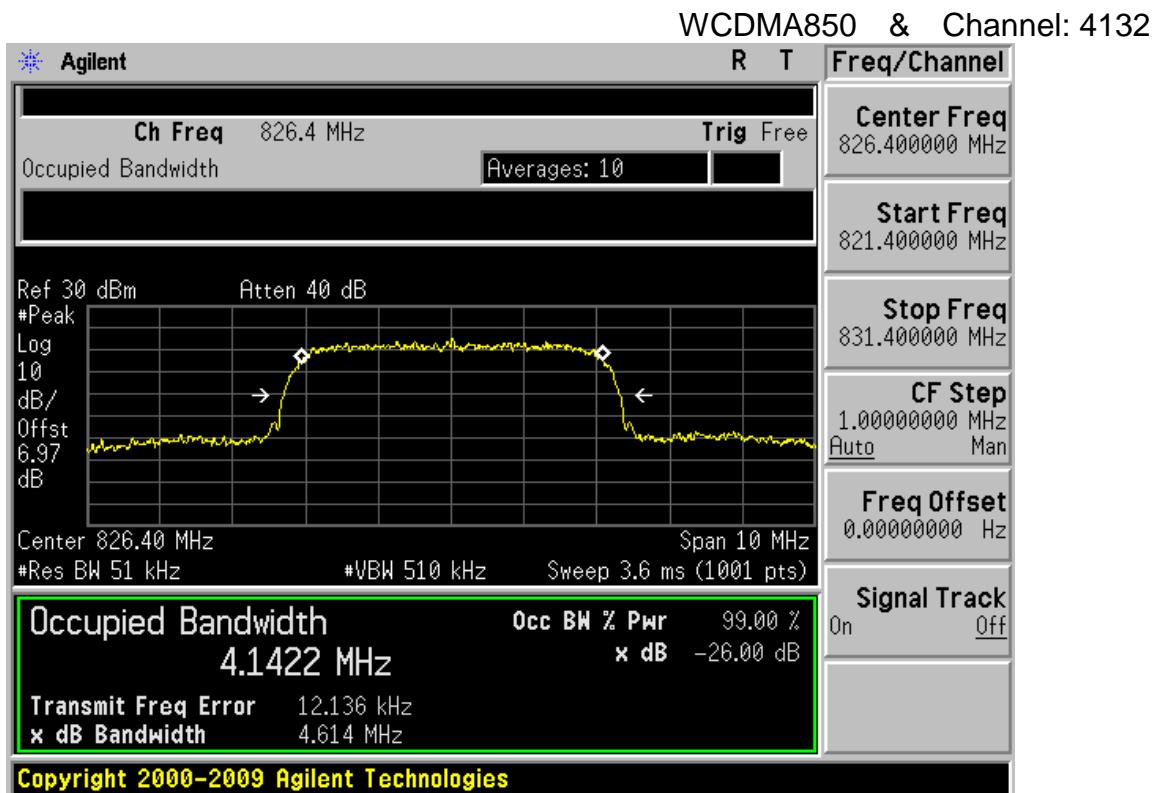



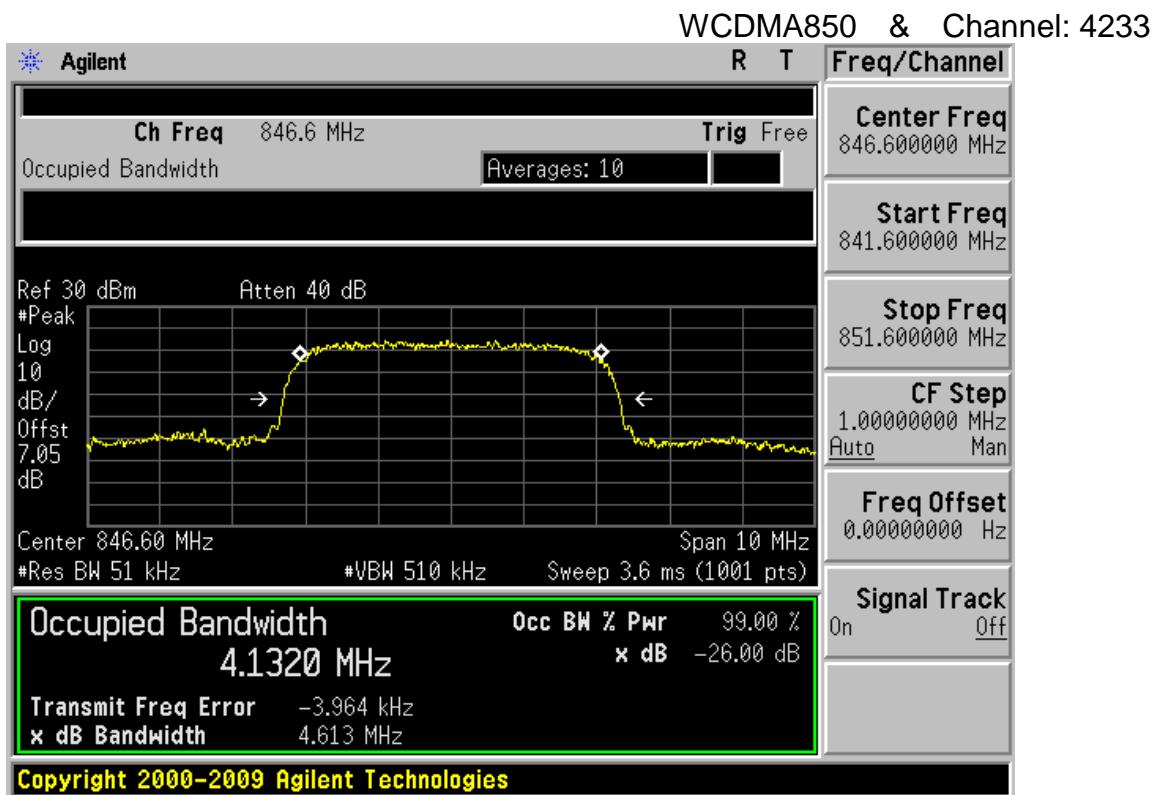


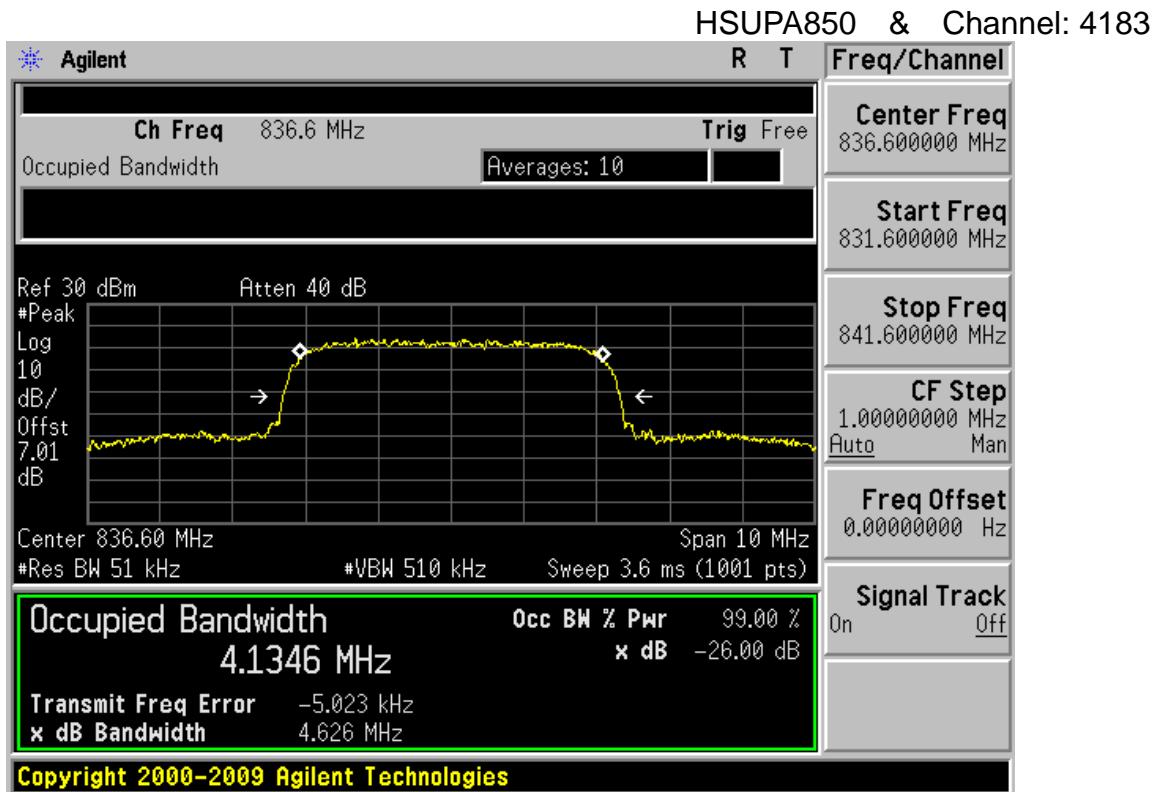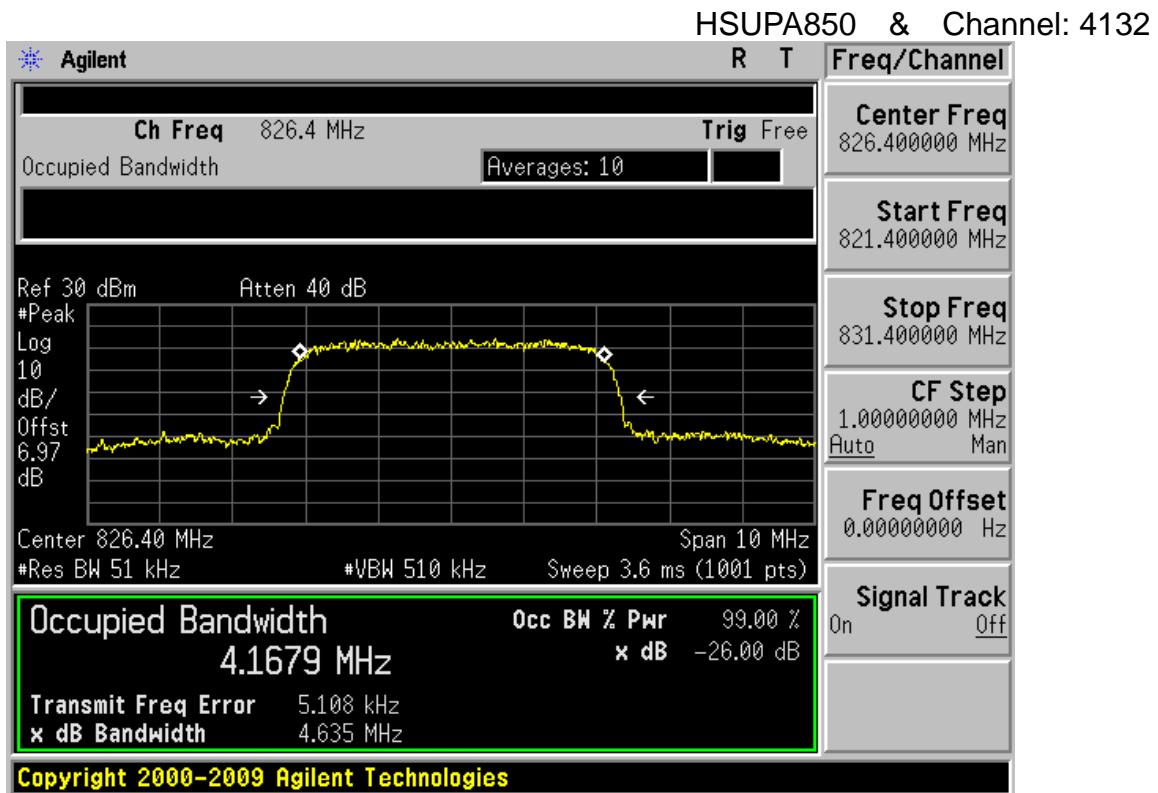



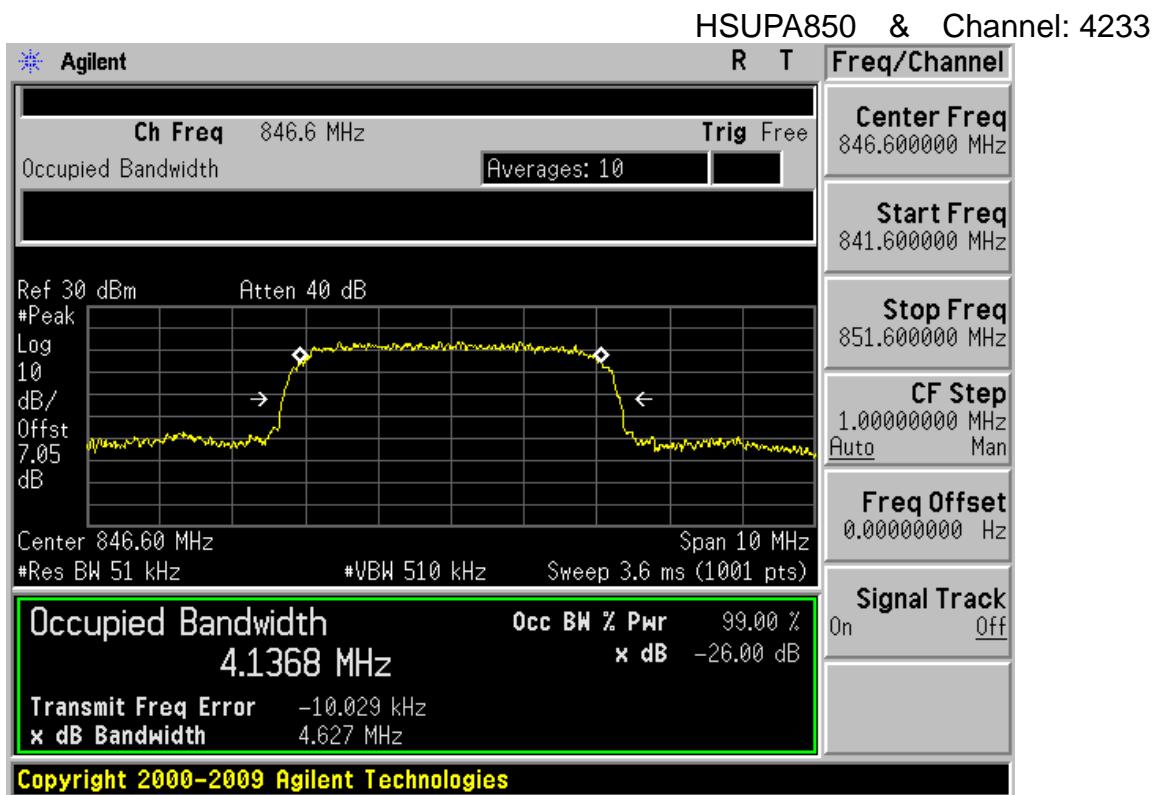


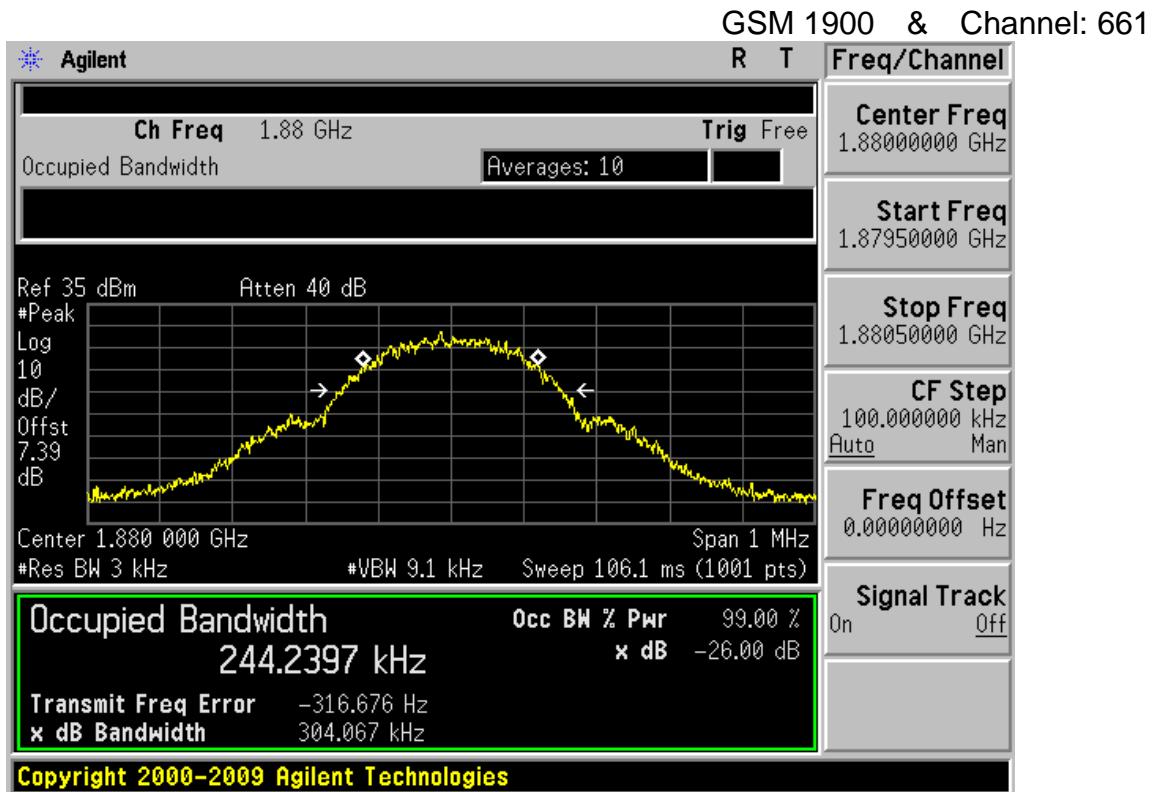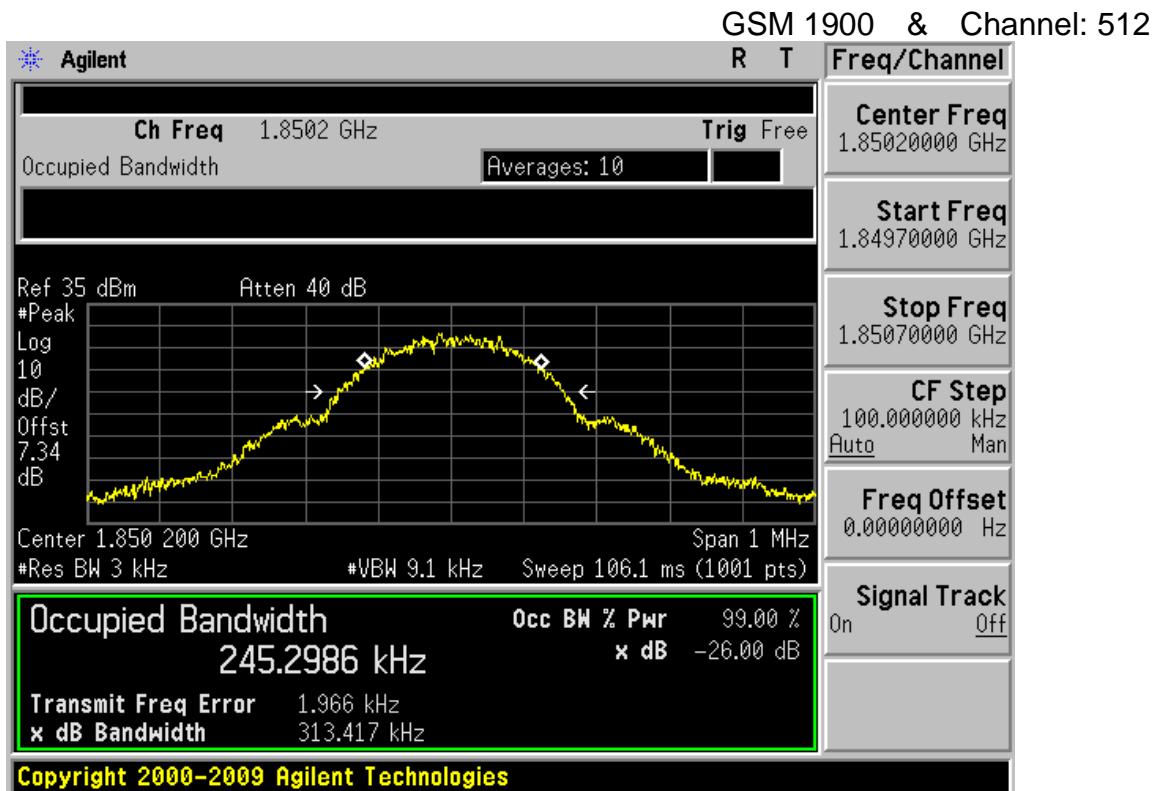


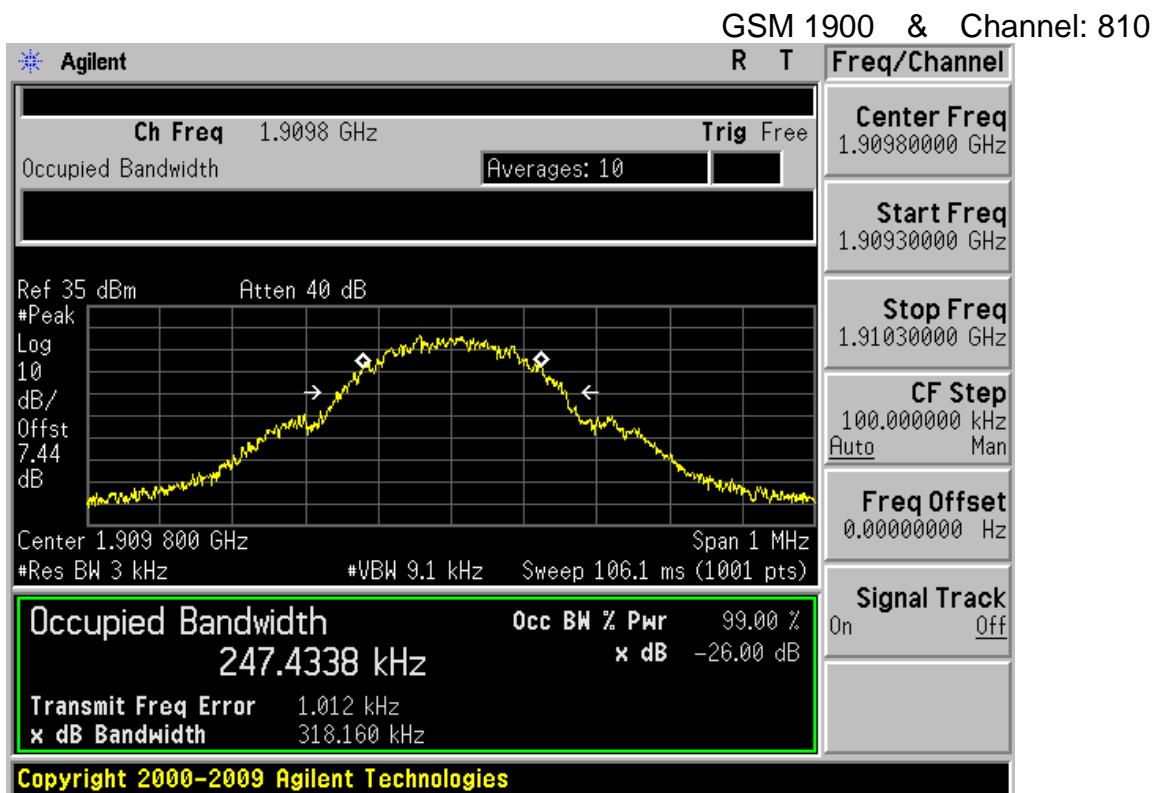

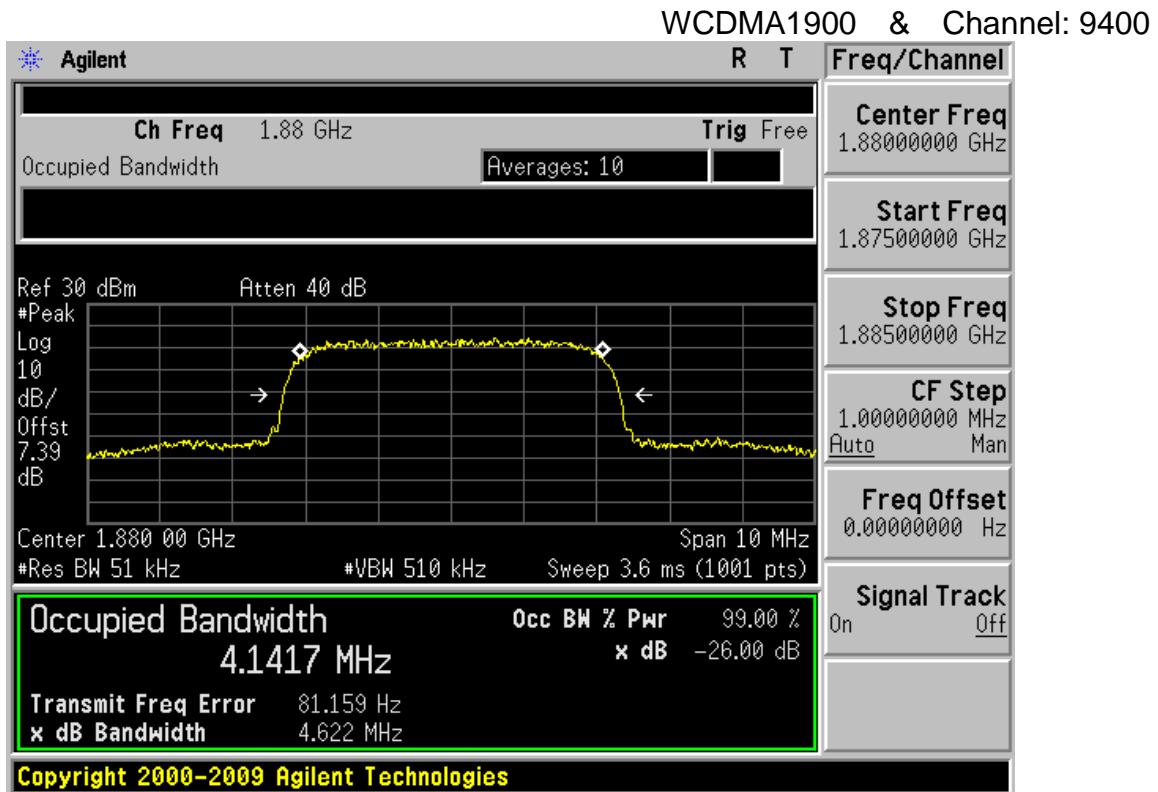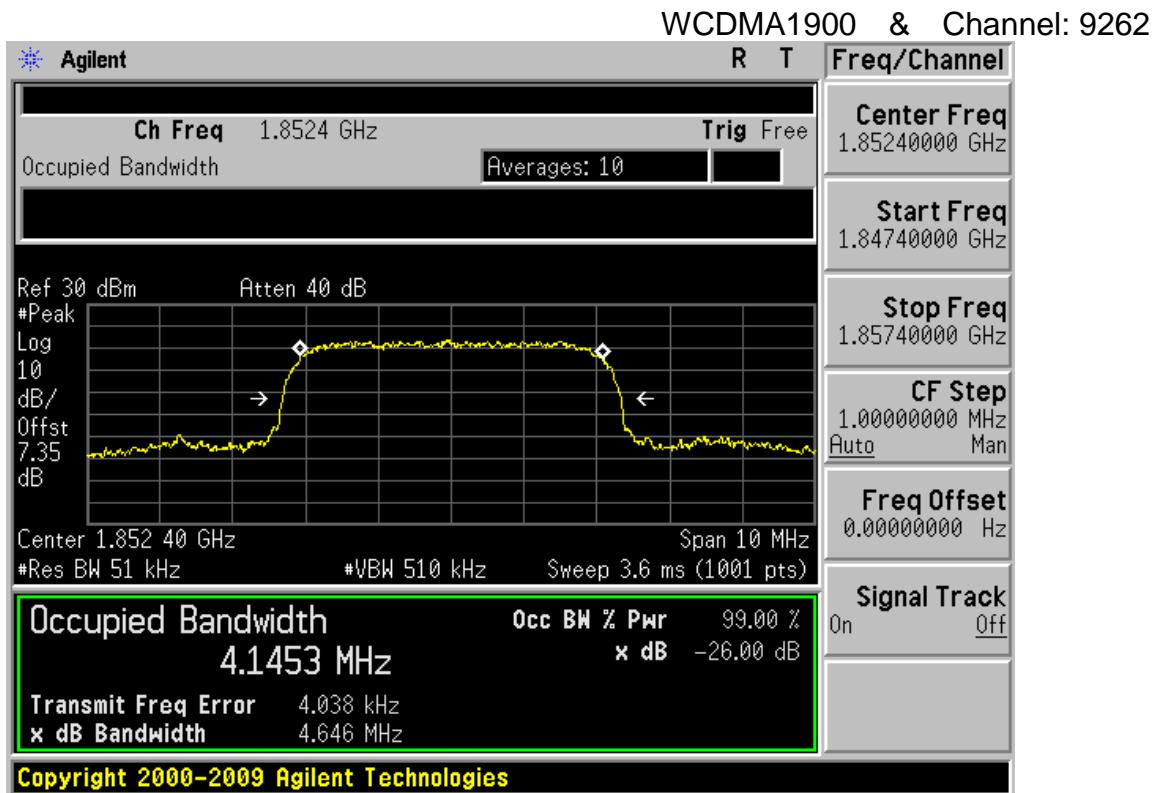


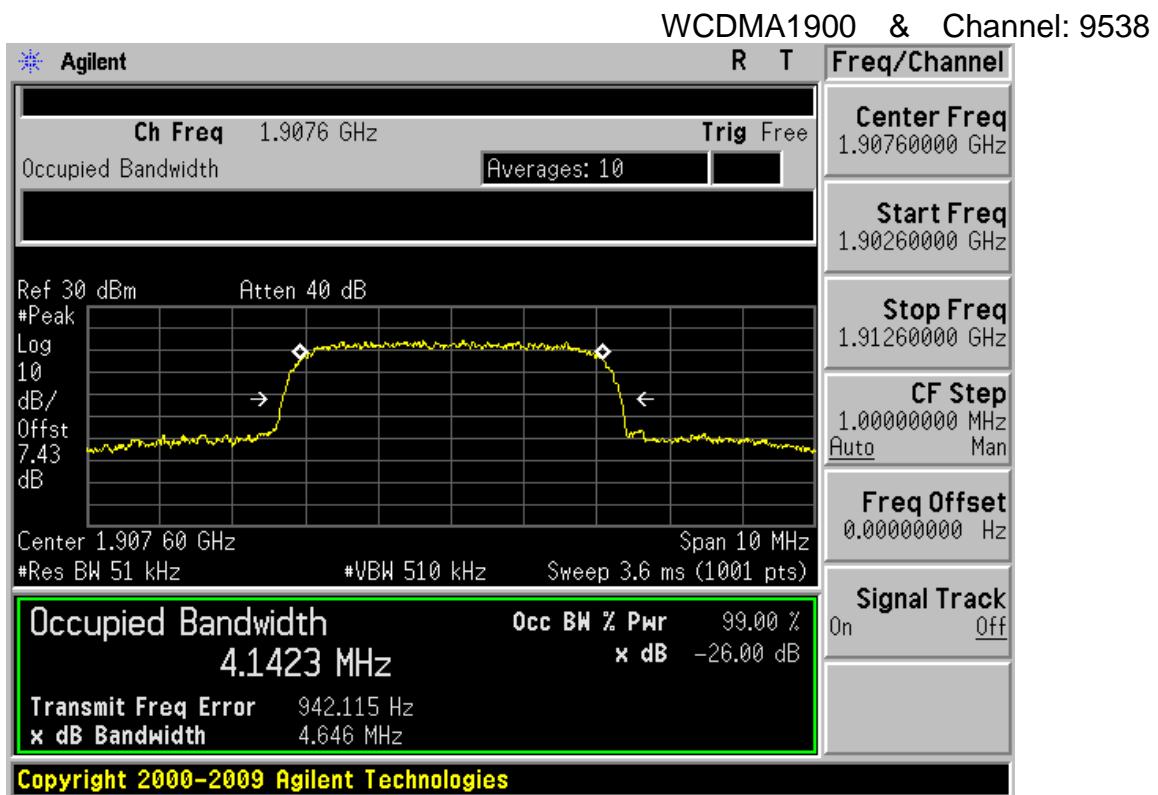


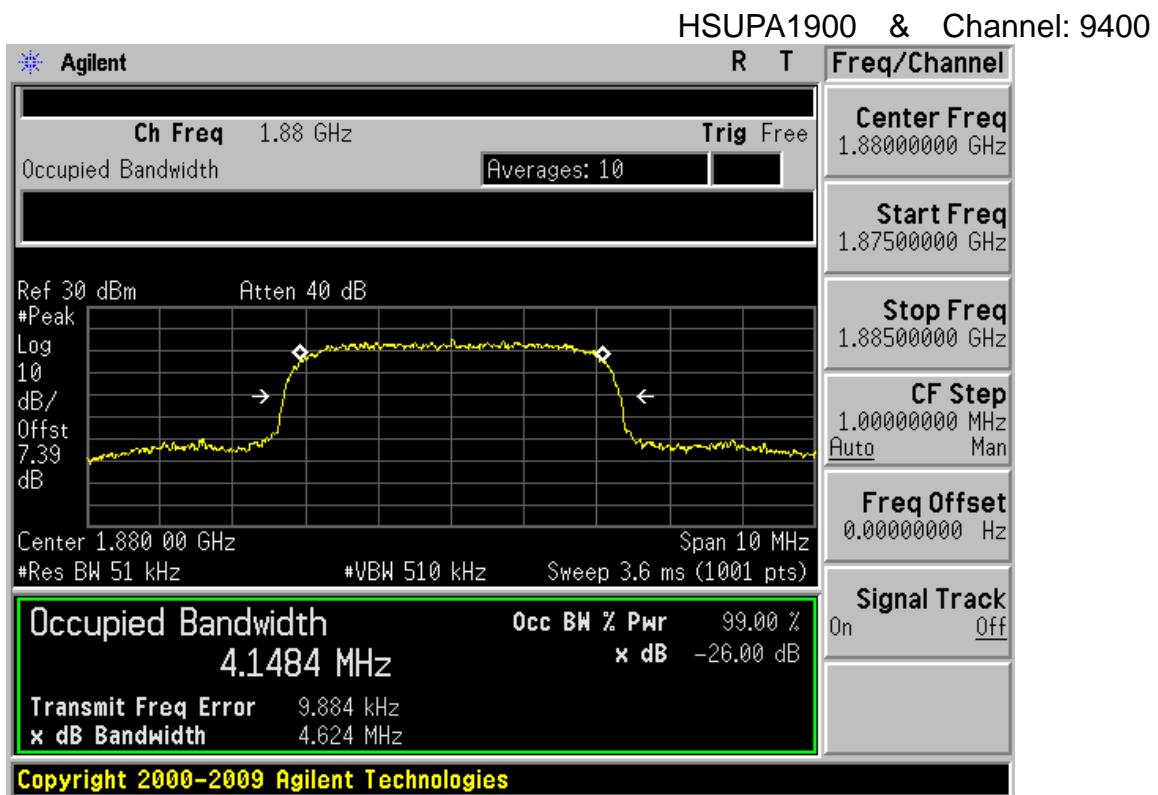
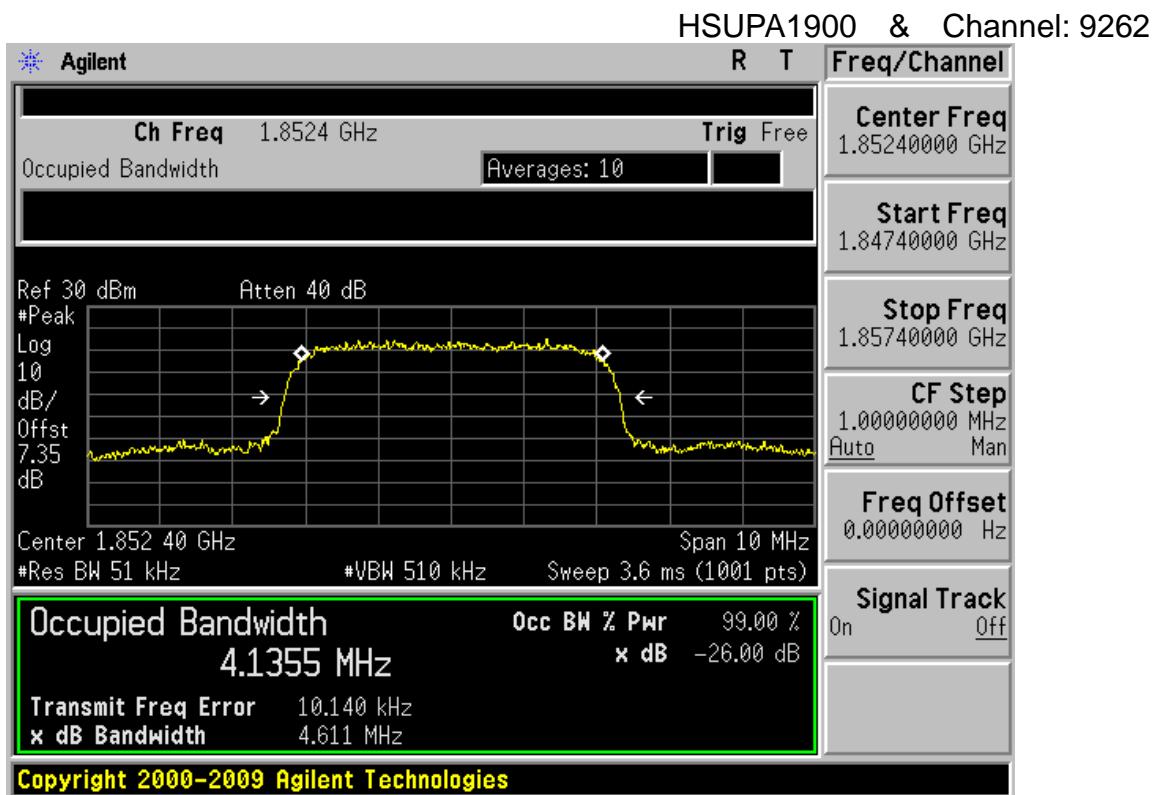



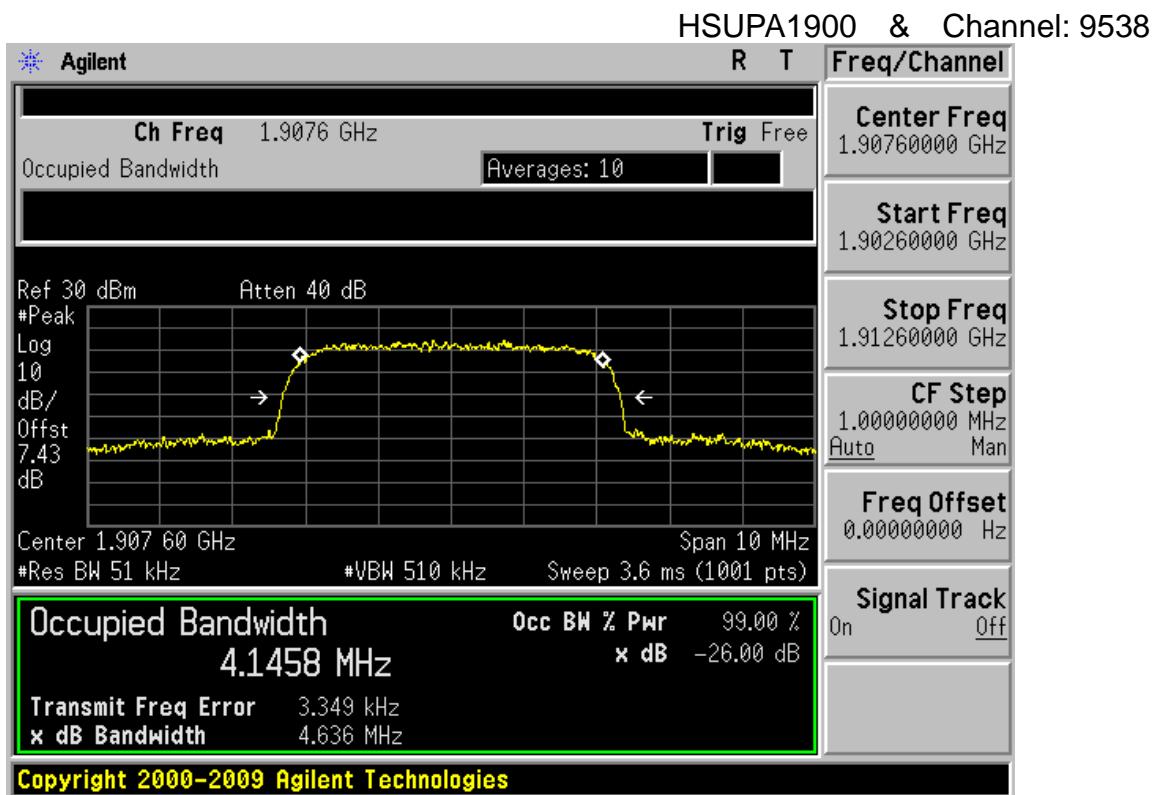




8.3 Spurious Emissions at Antenna Terminal



GSM850 & Channel: 128

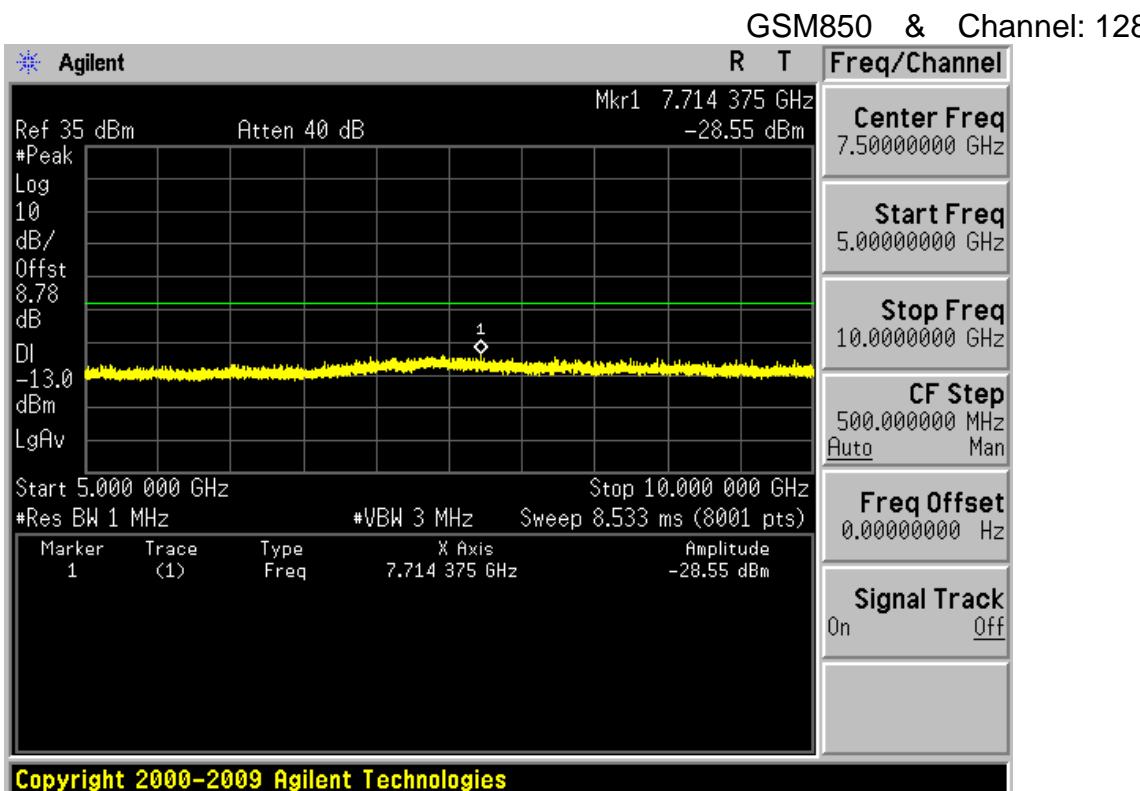
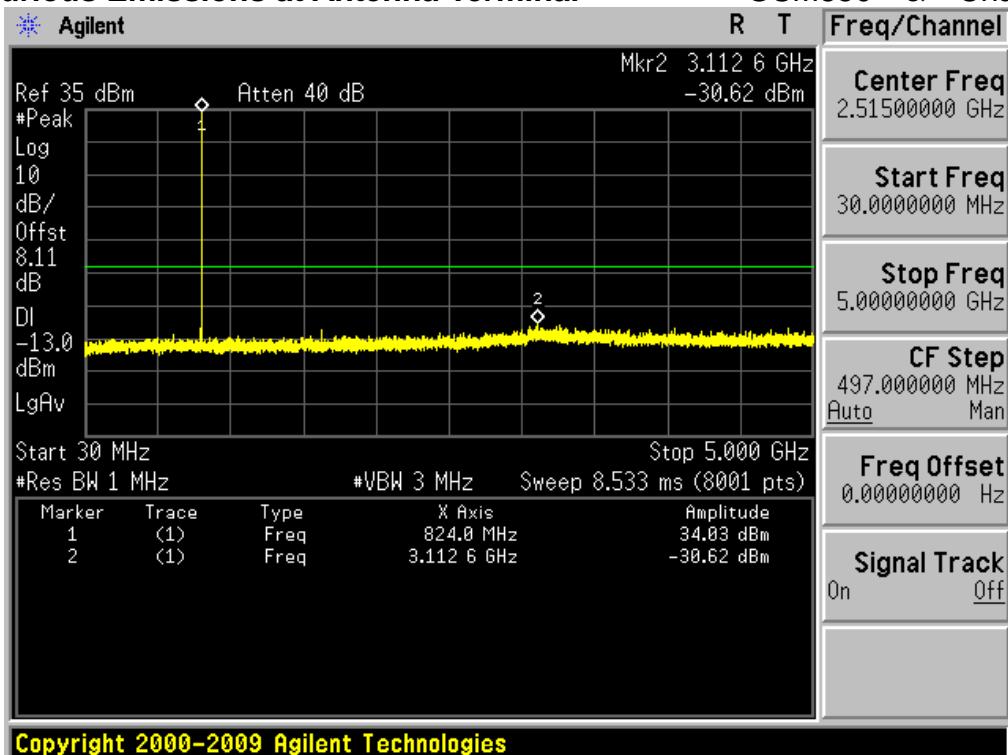


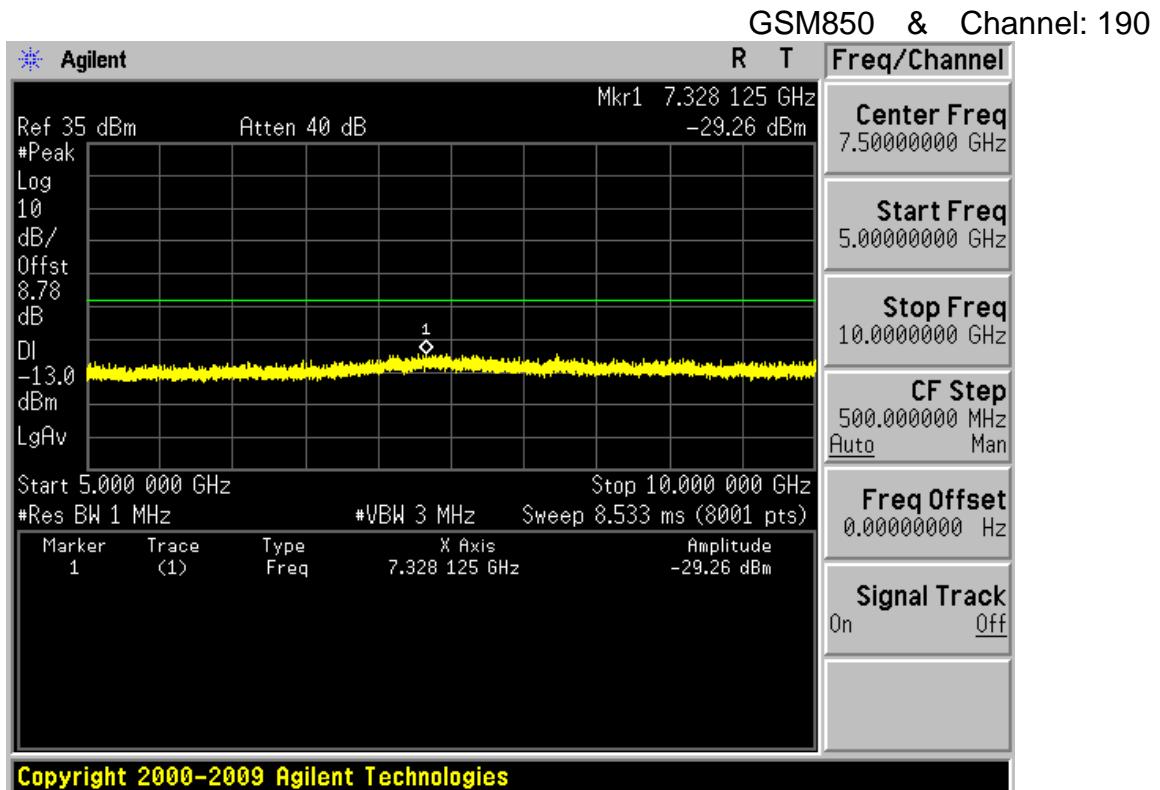
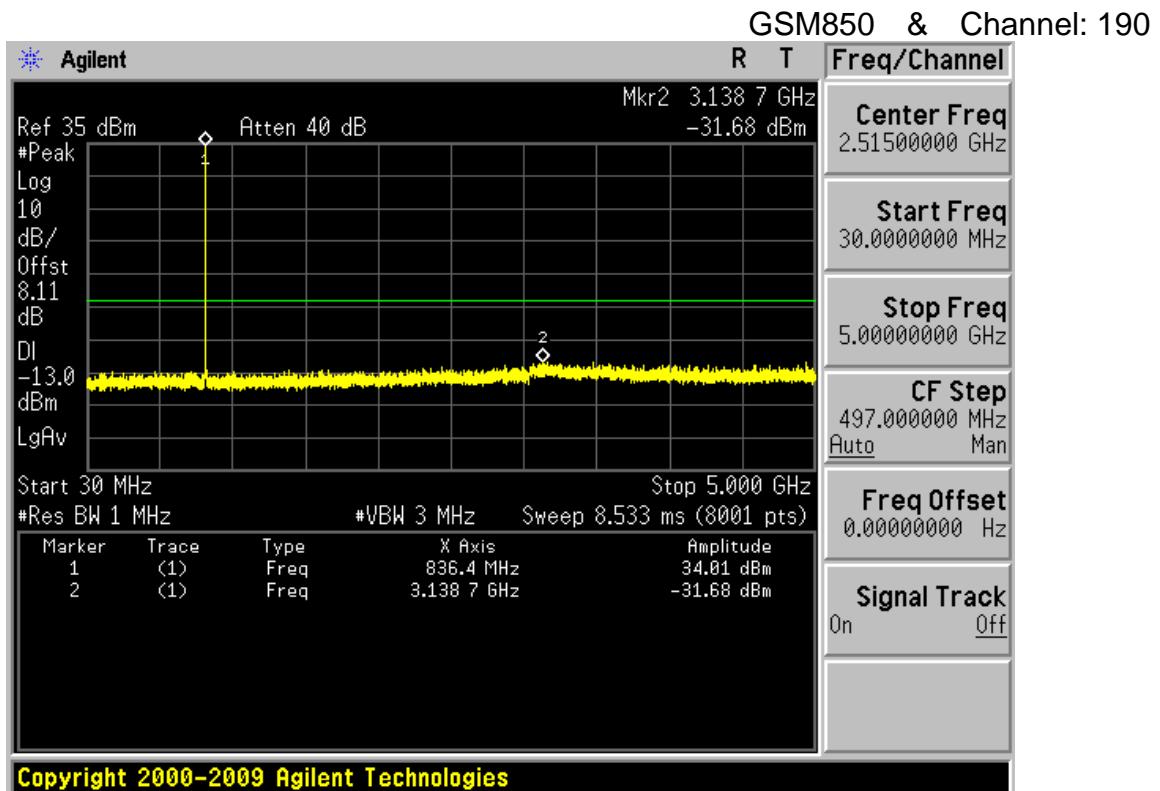


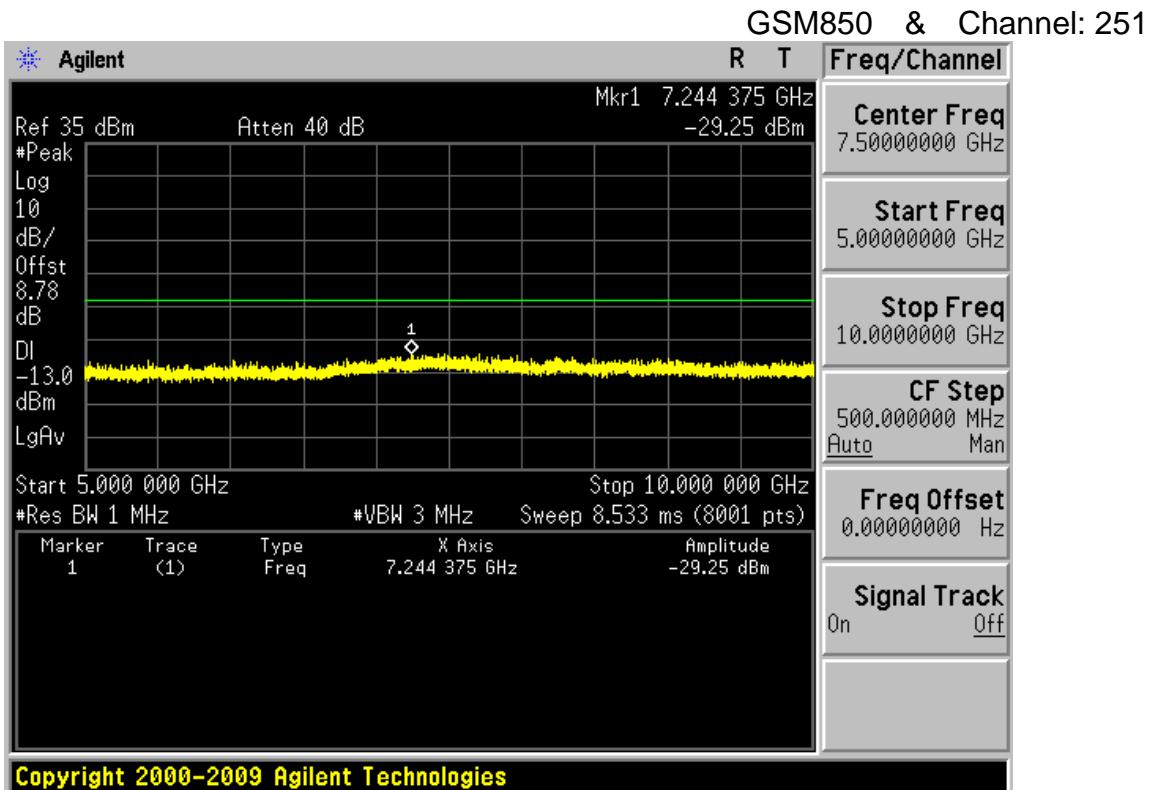
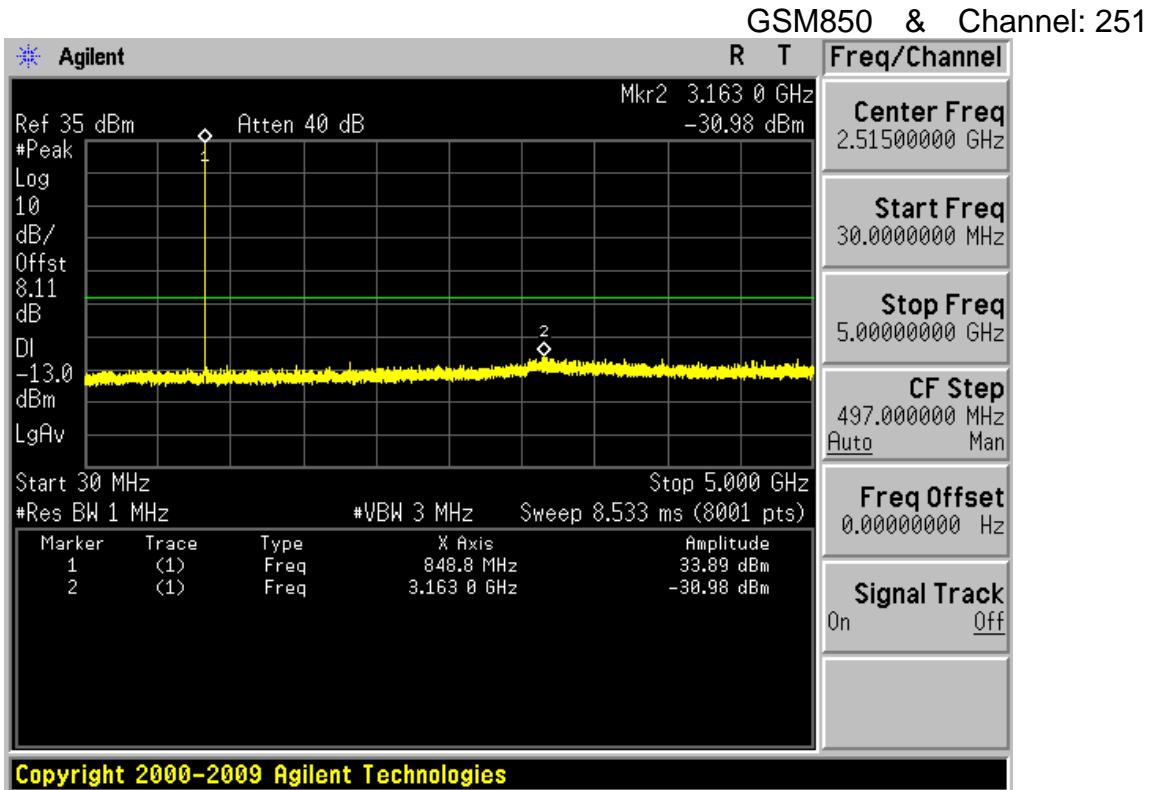


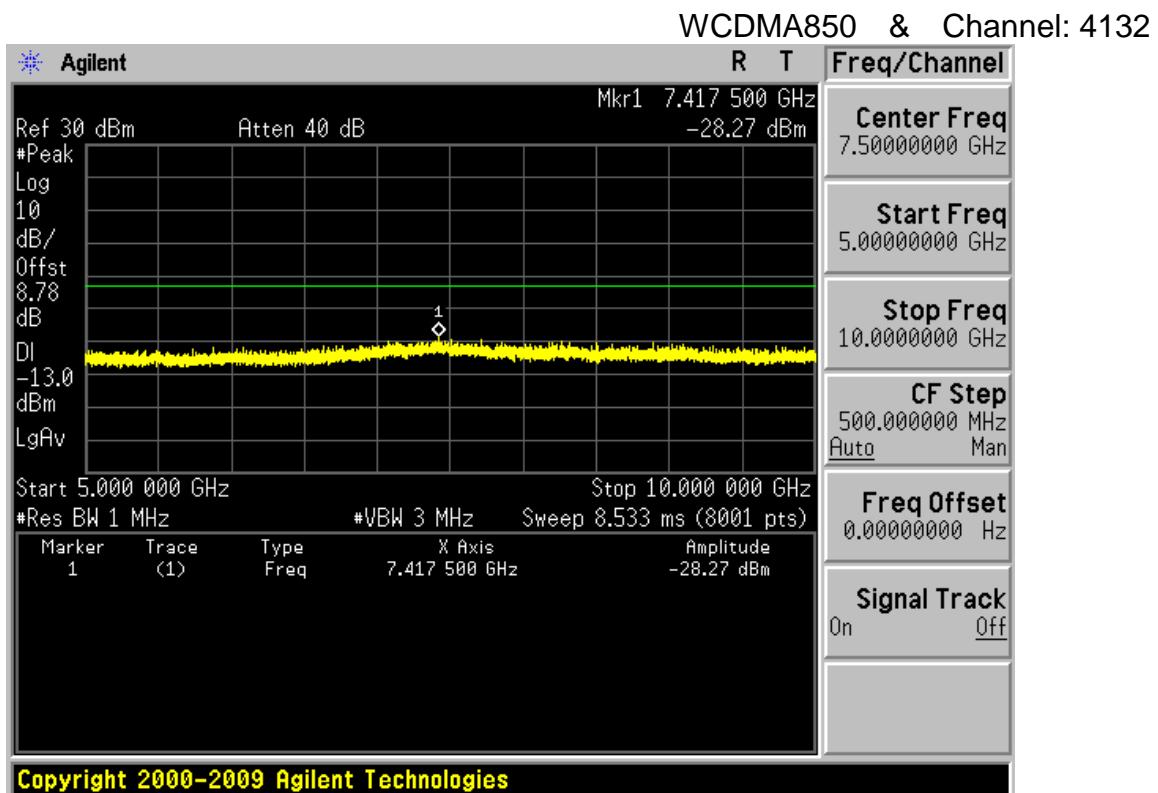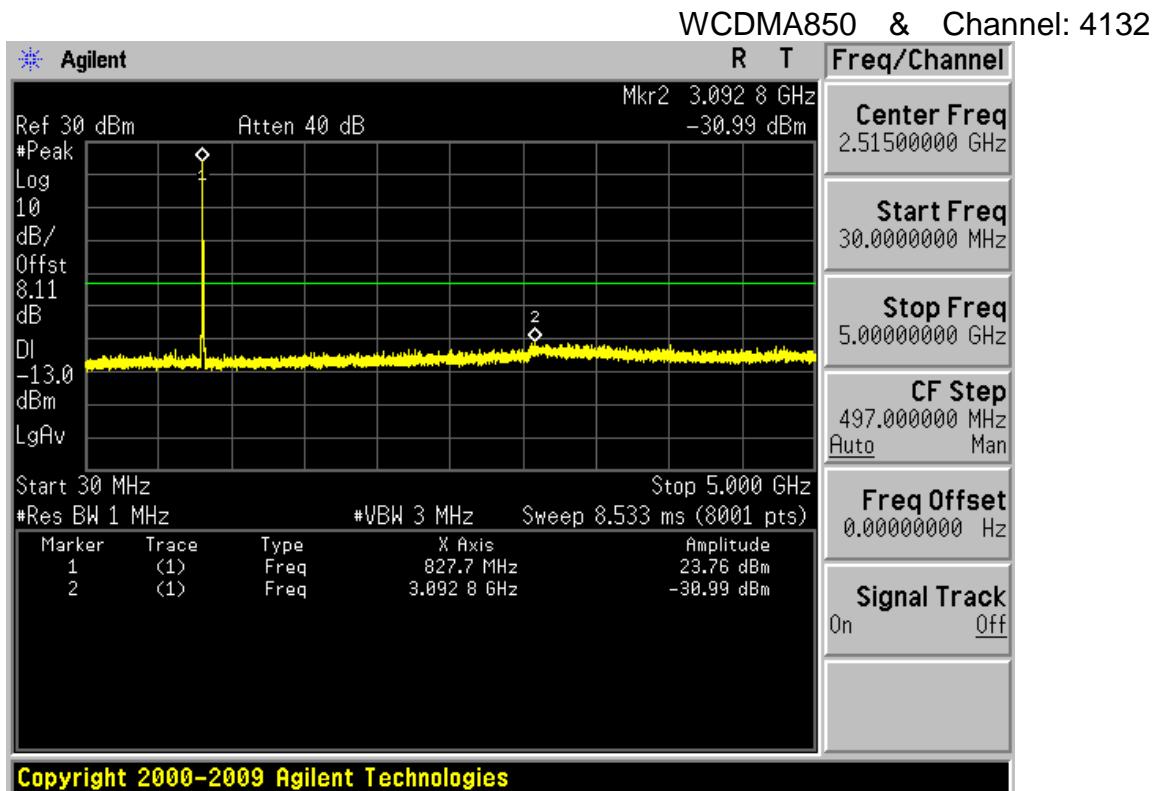

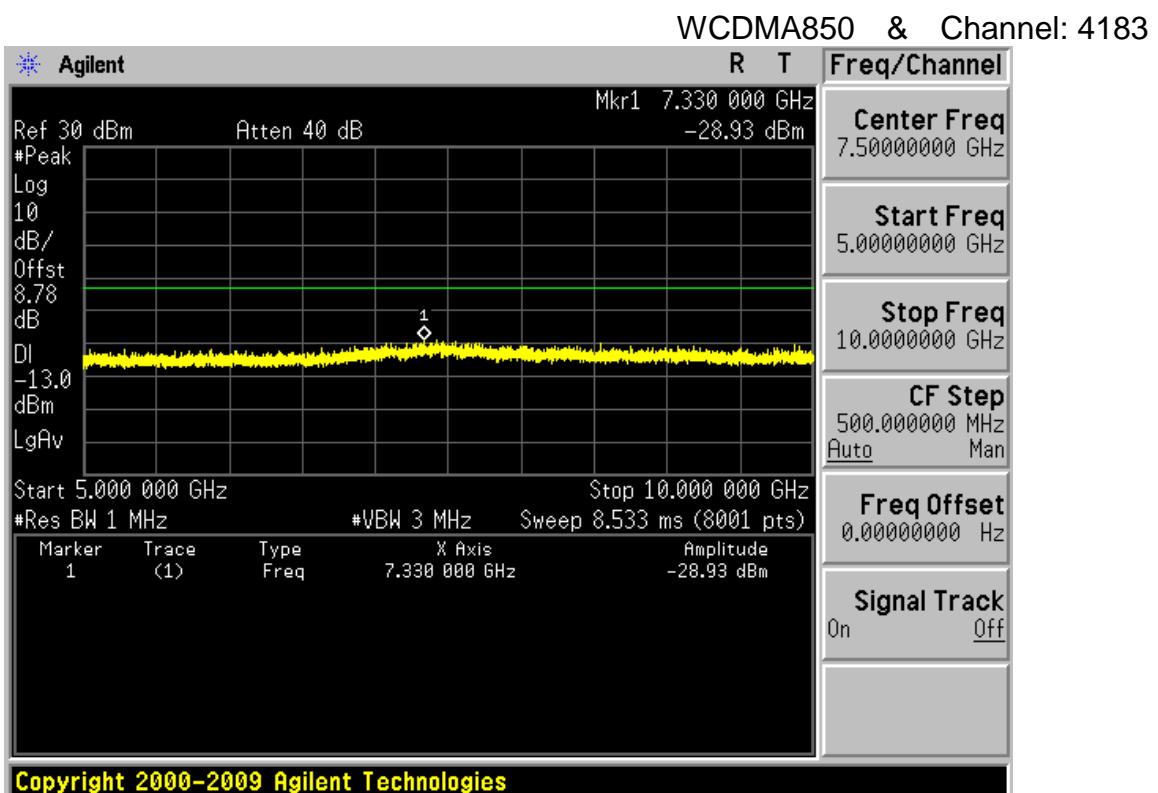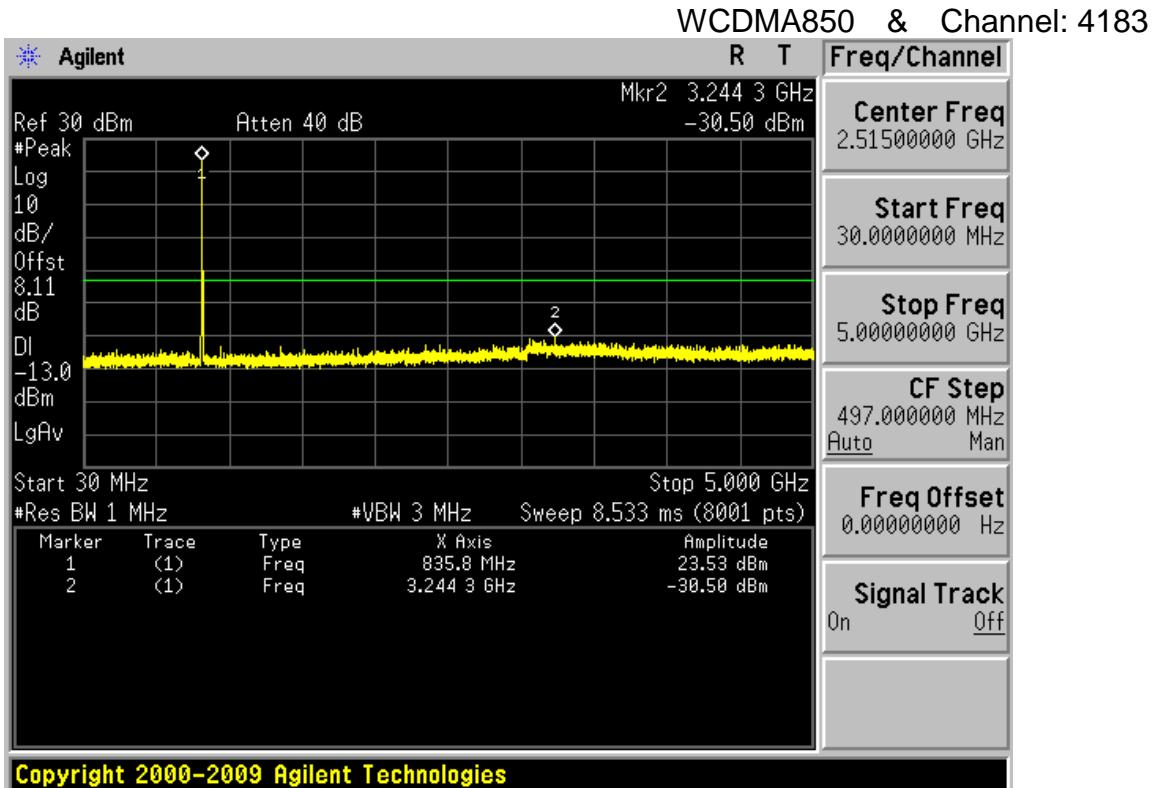


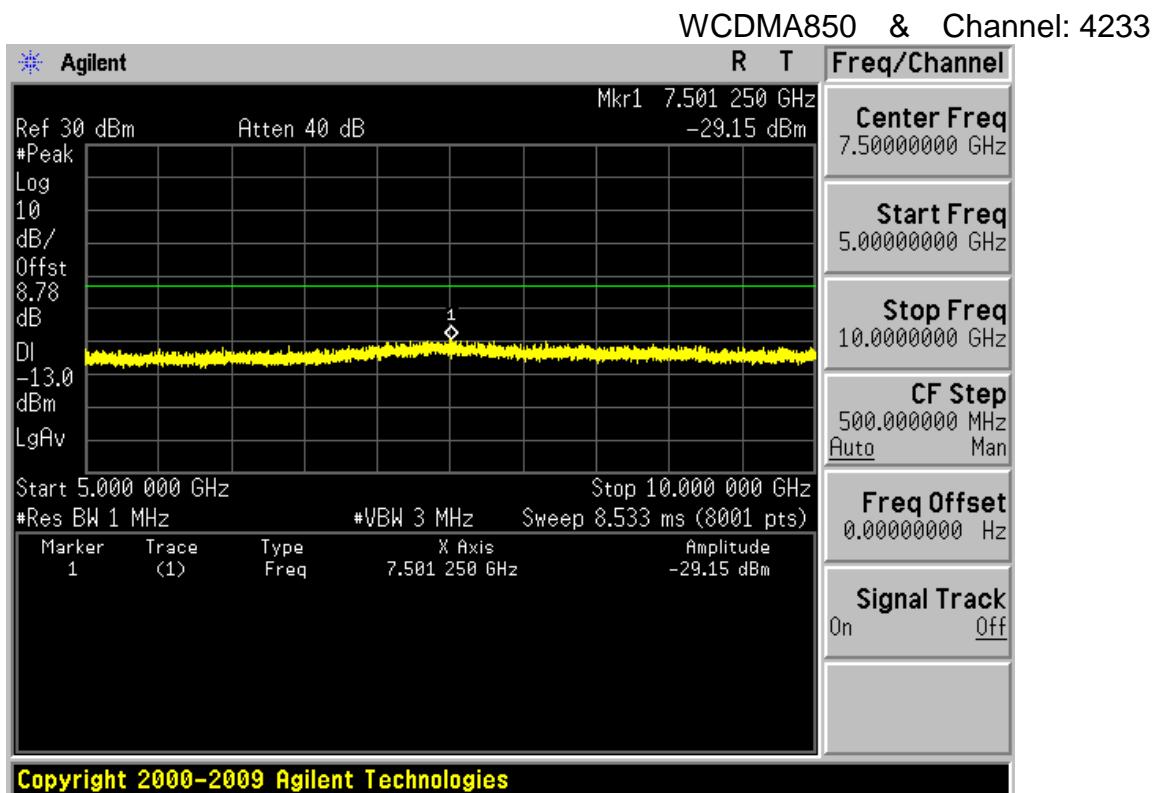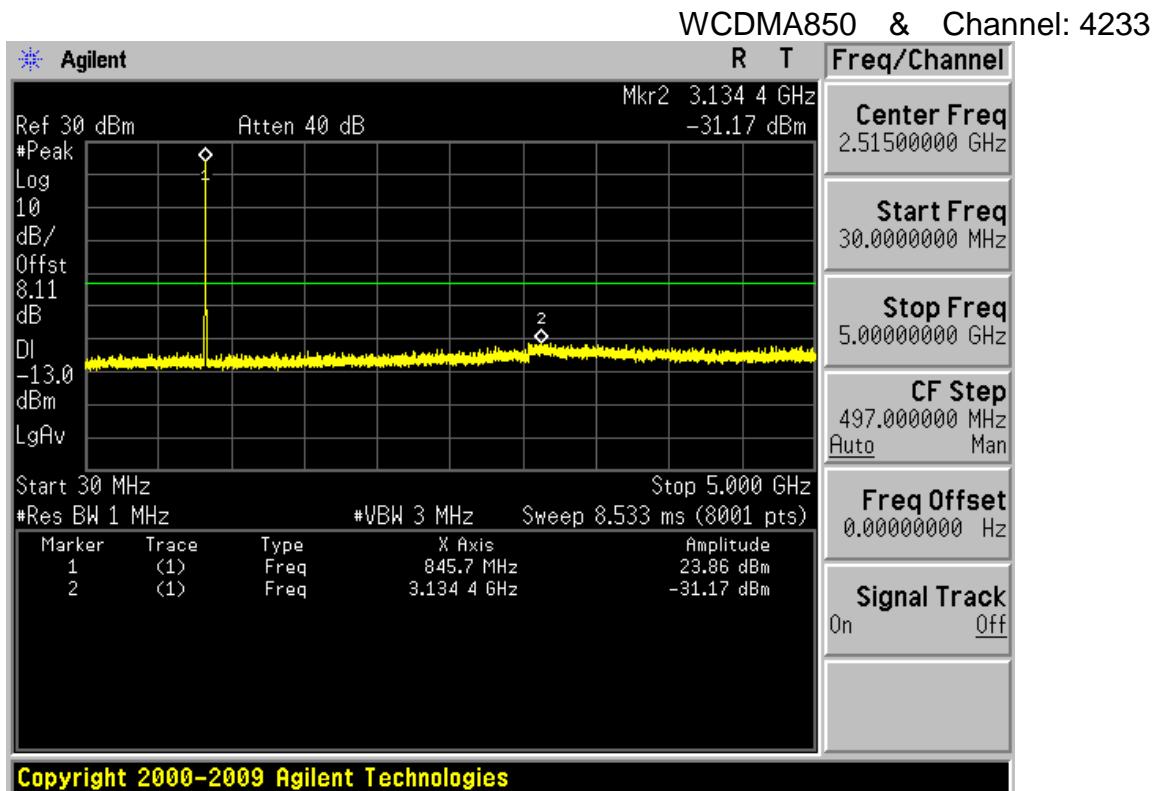

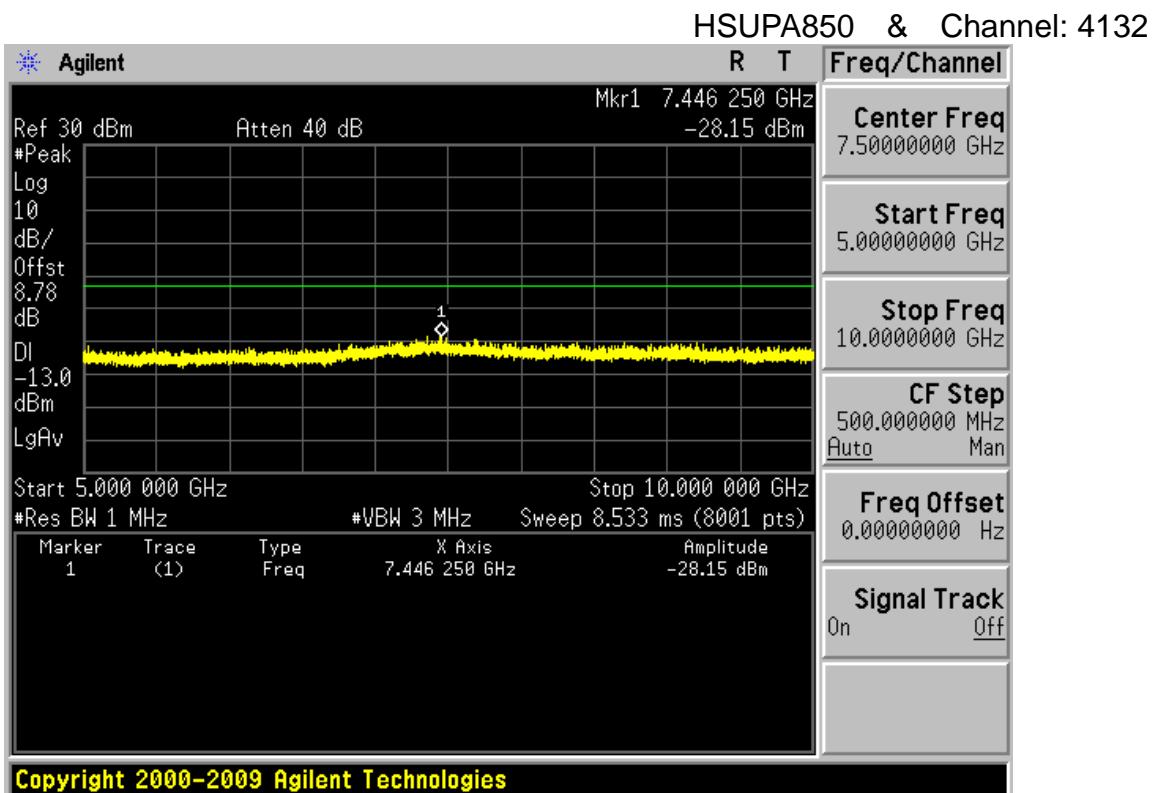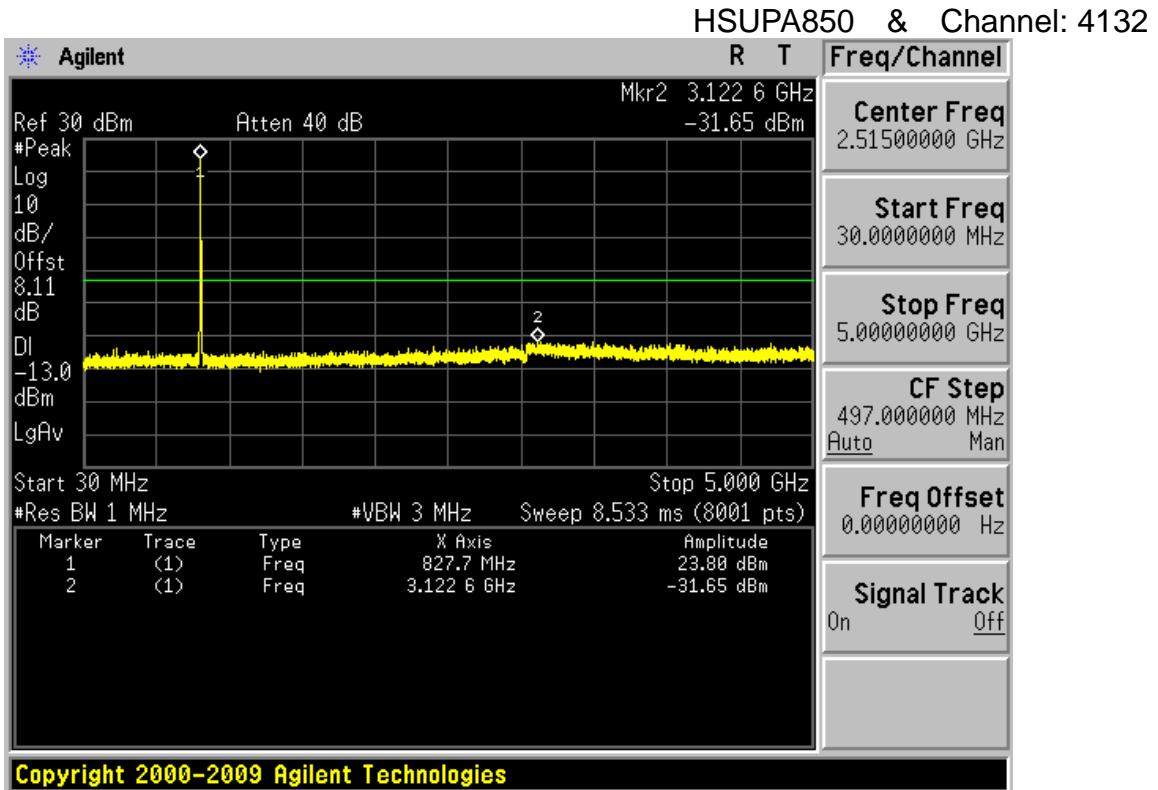


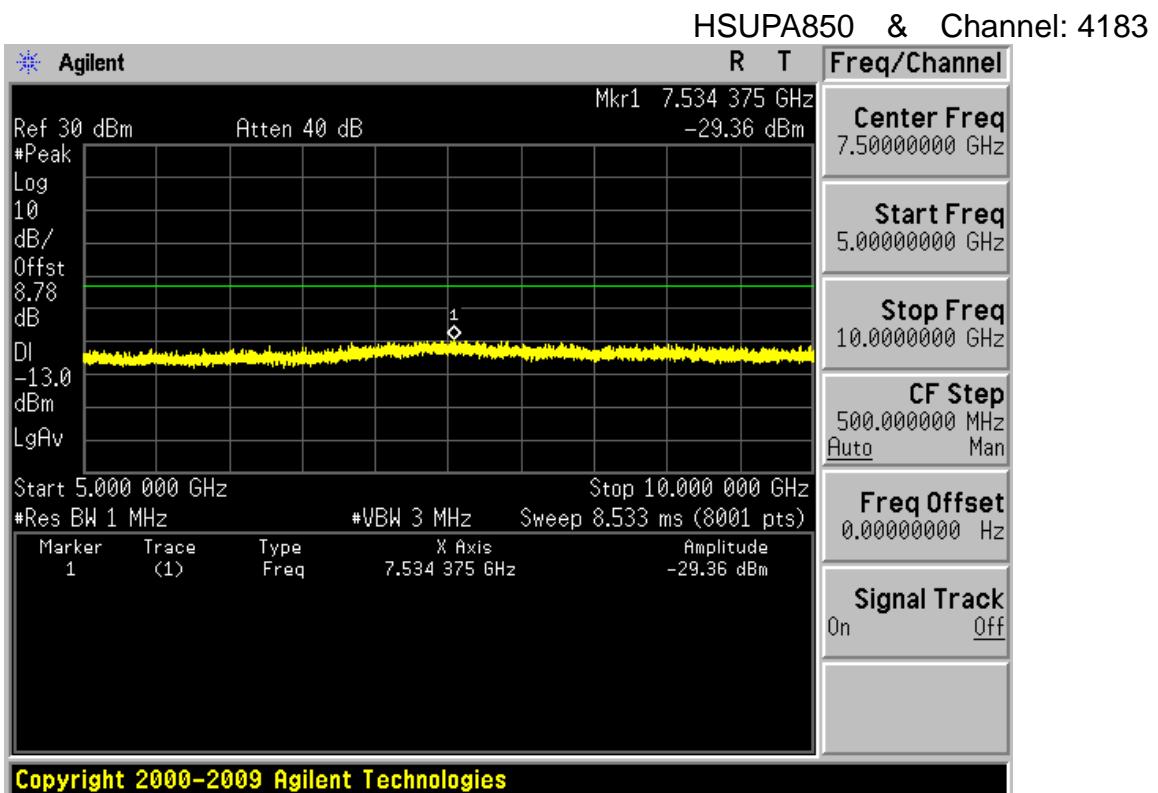
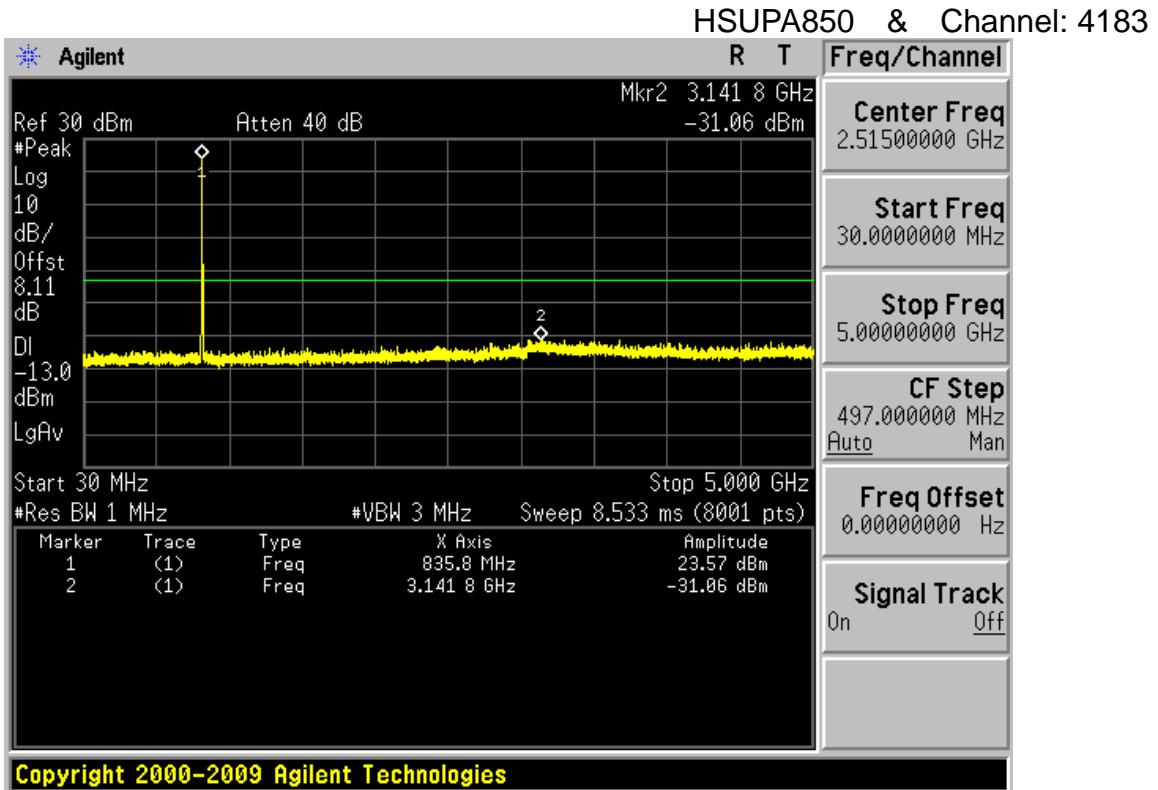




HSUPA850 & Channel: 4233


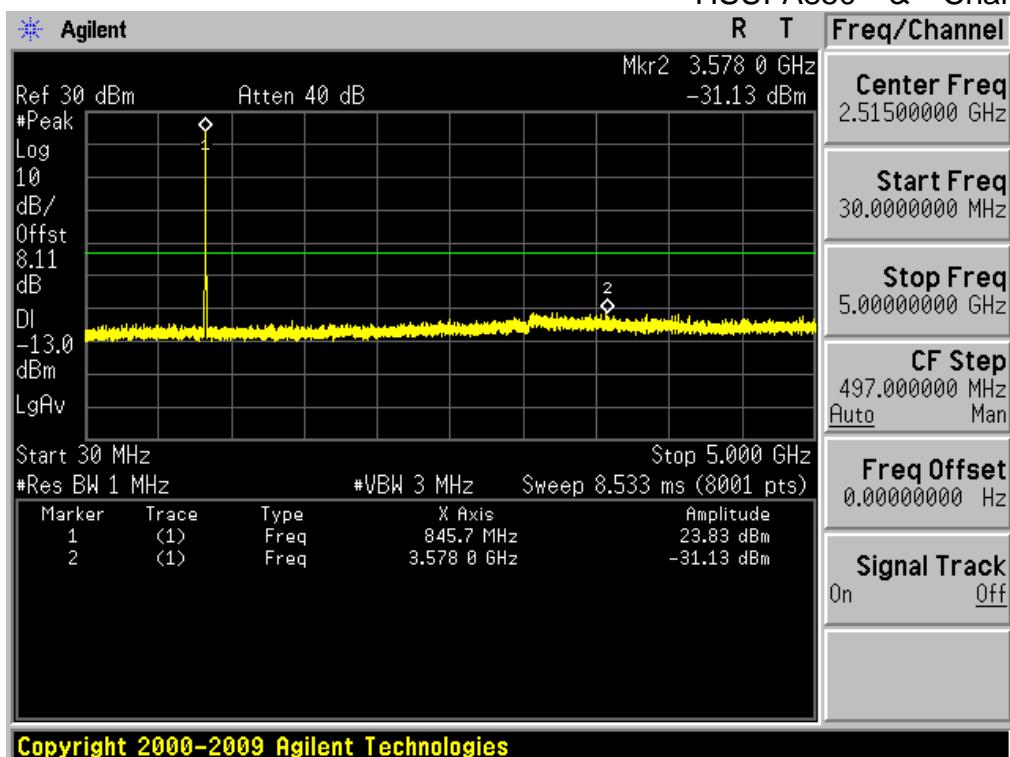




HSUPA850 & Channel: 4233


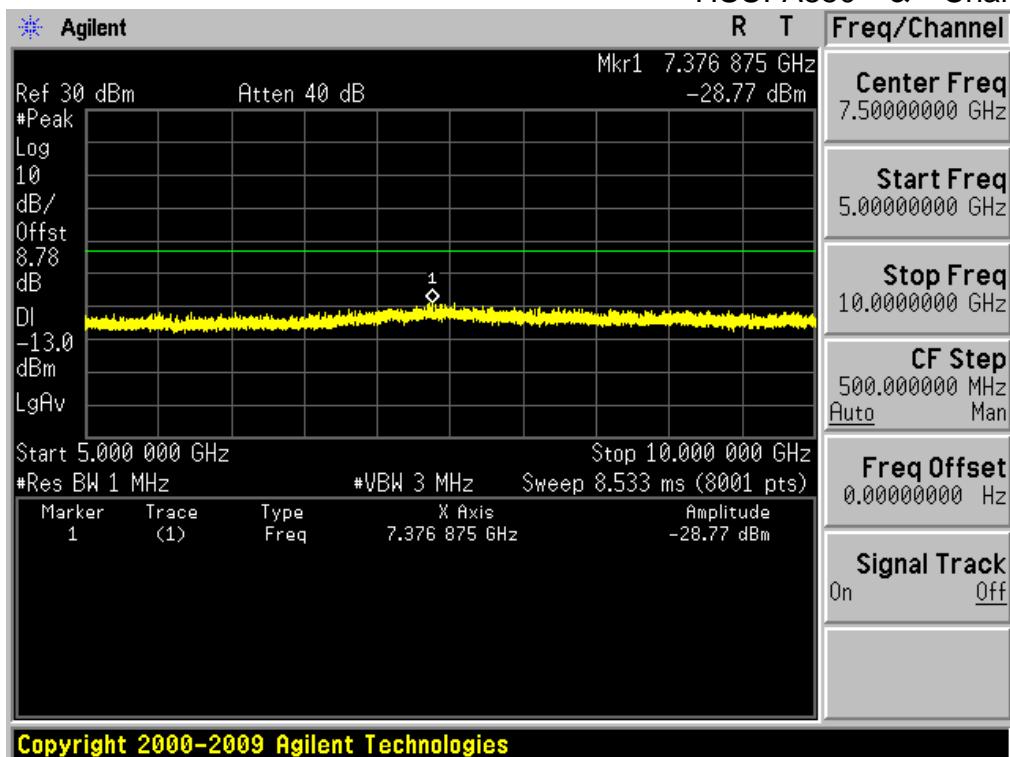


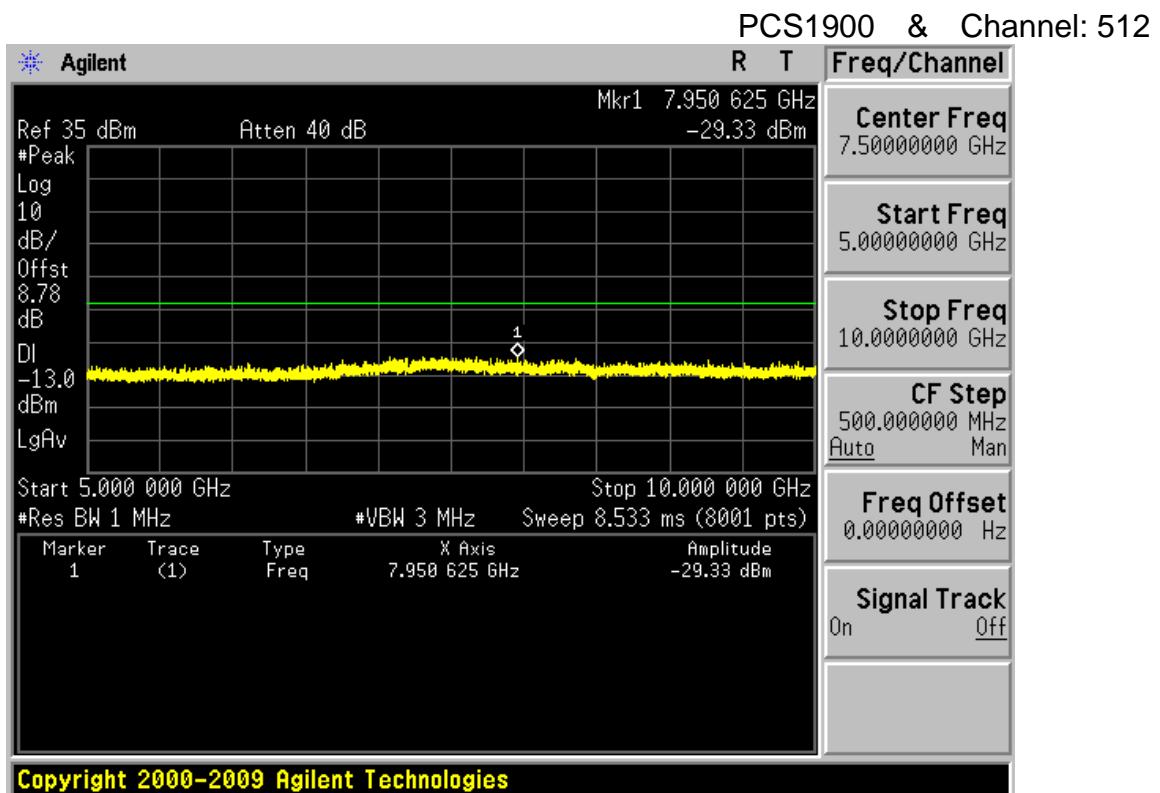
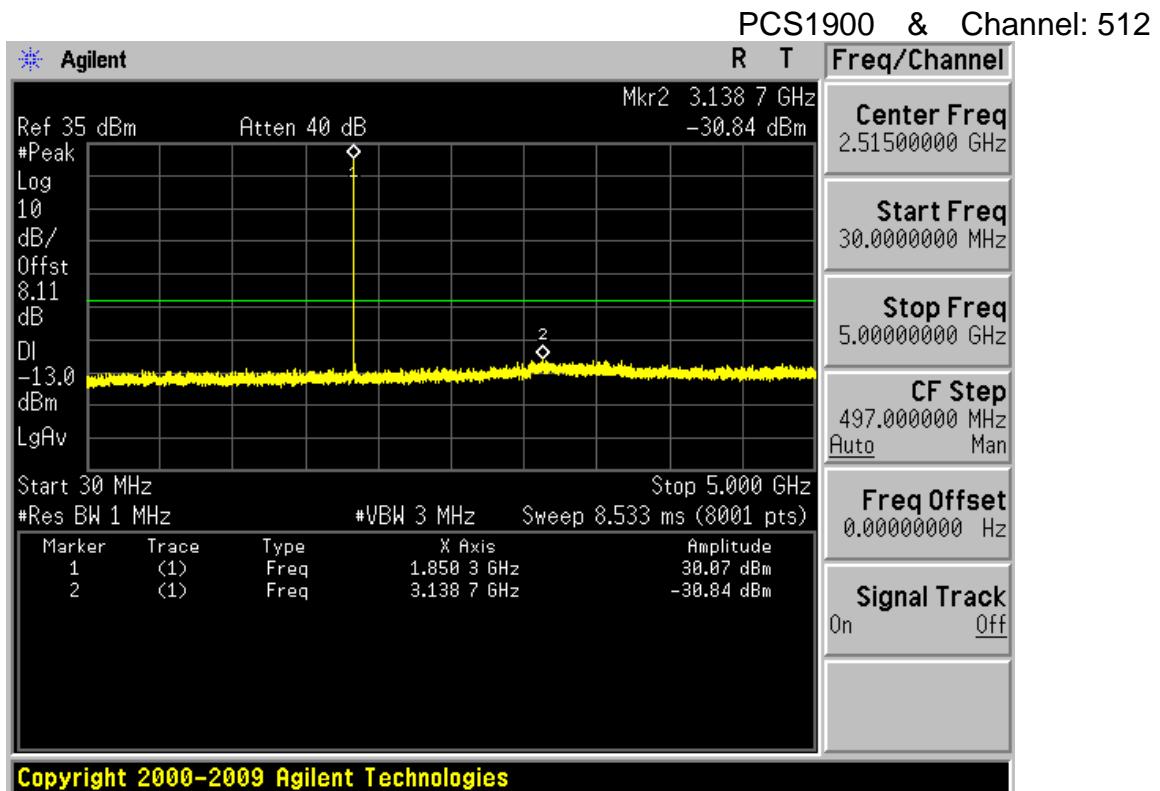


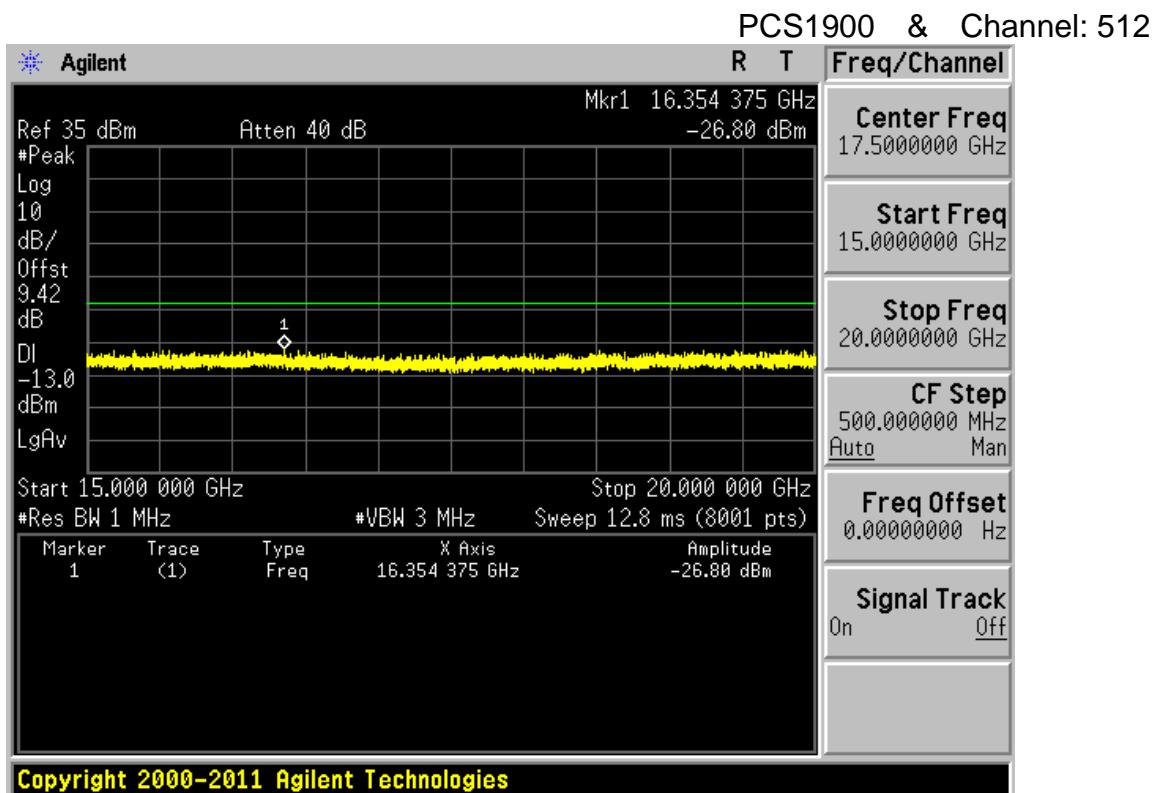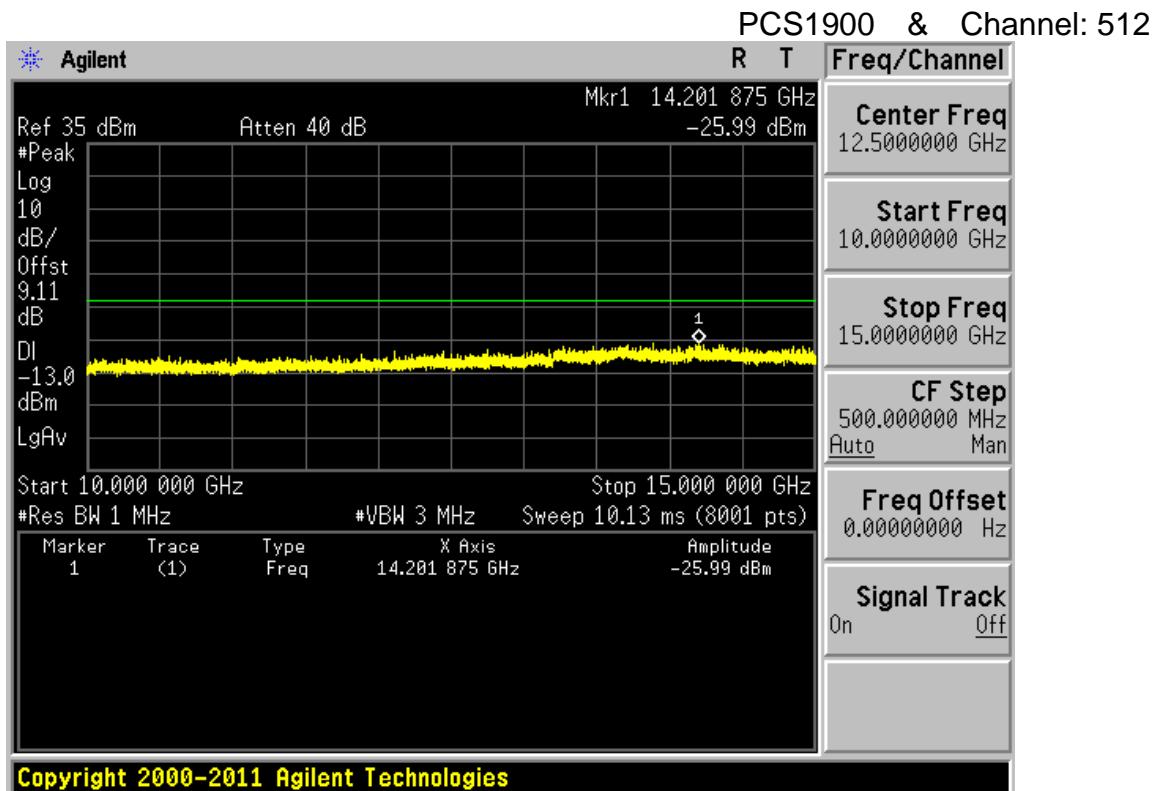

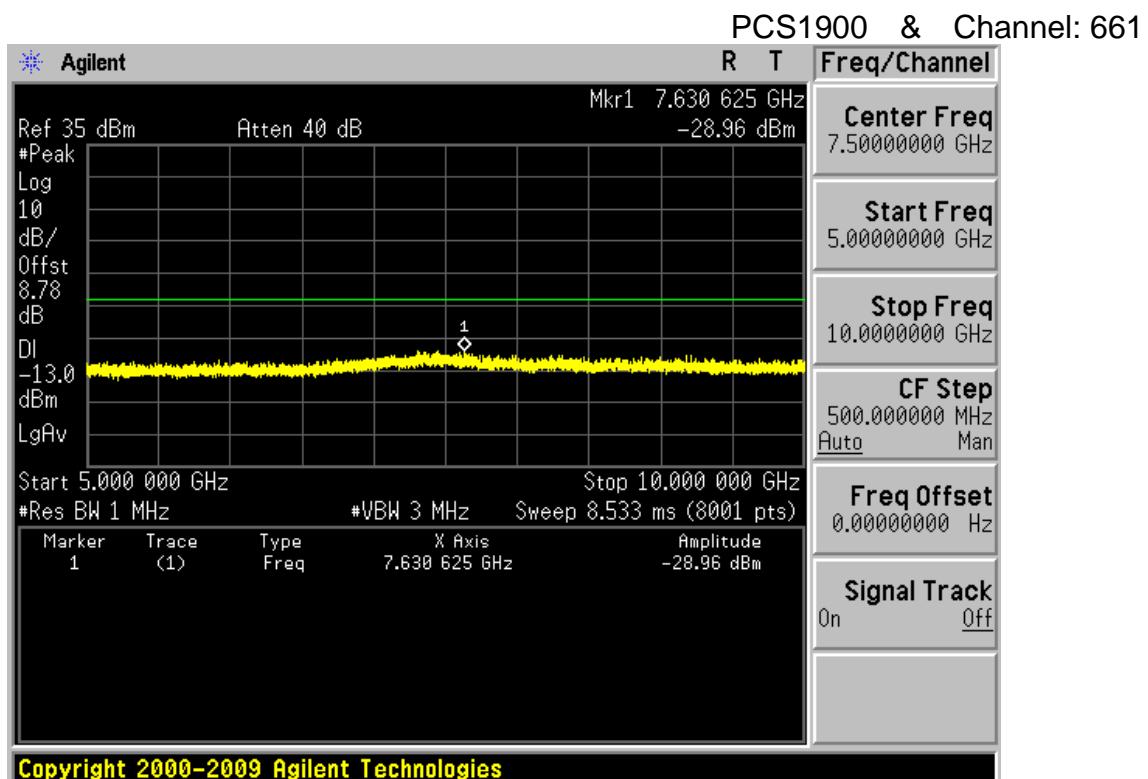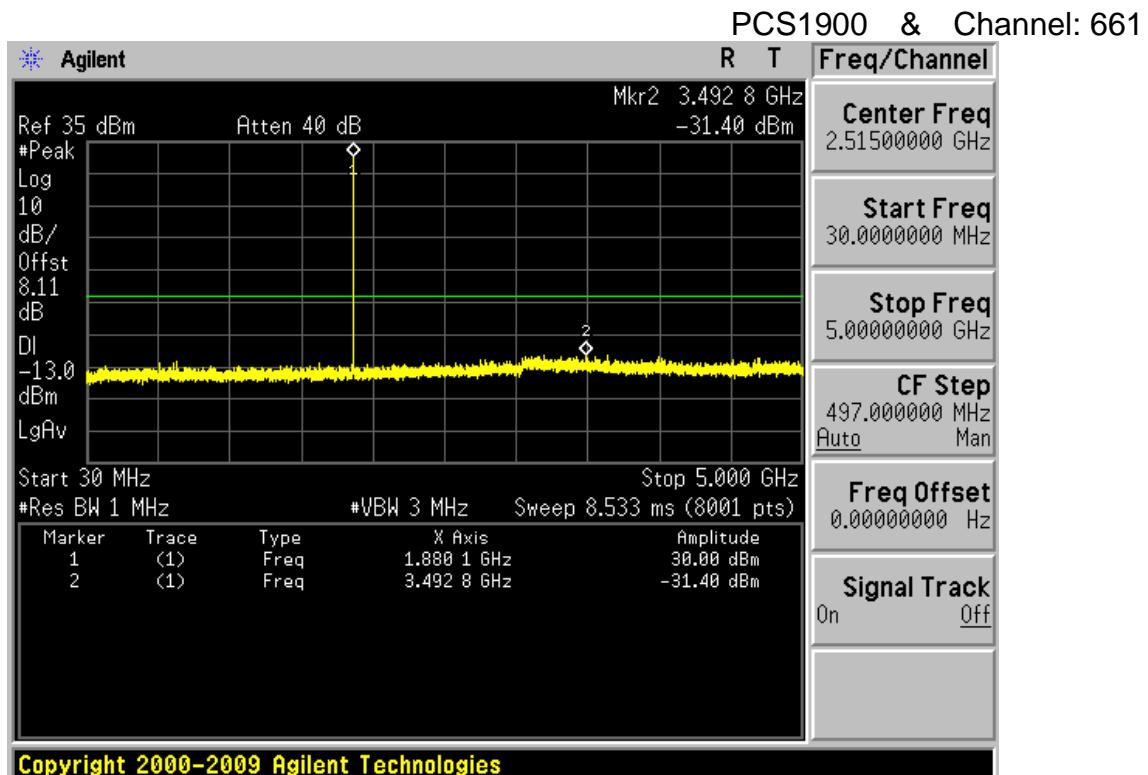


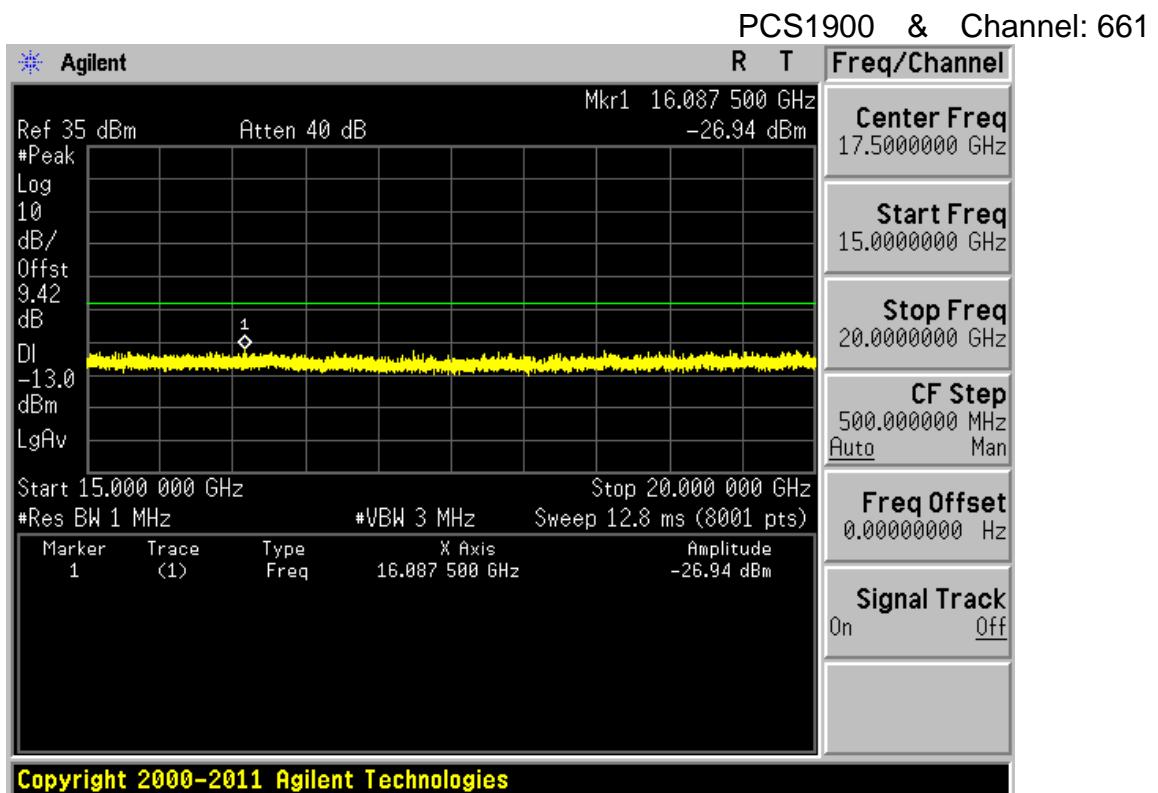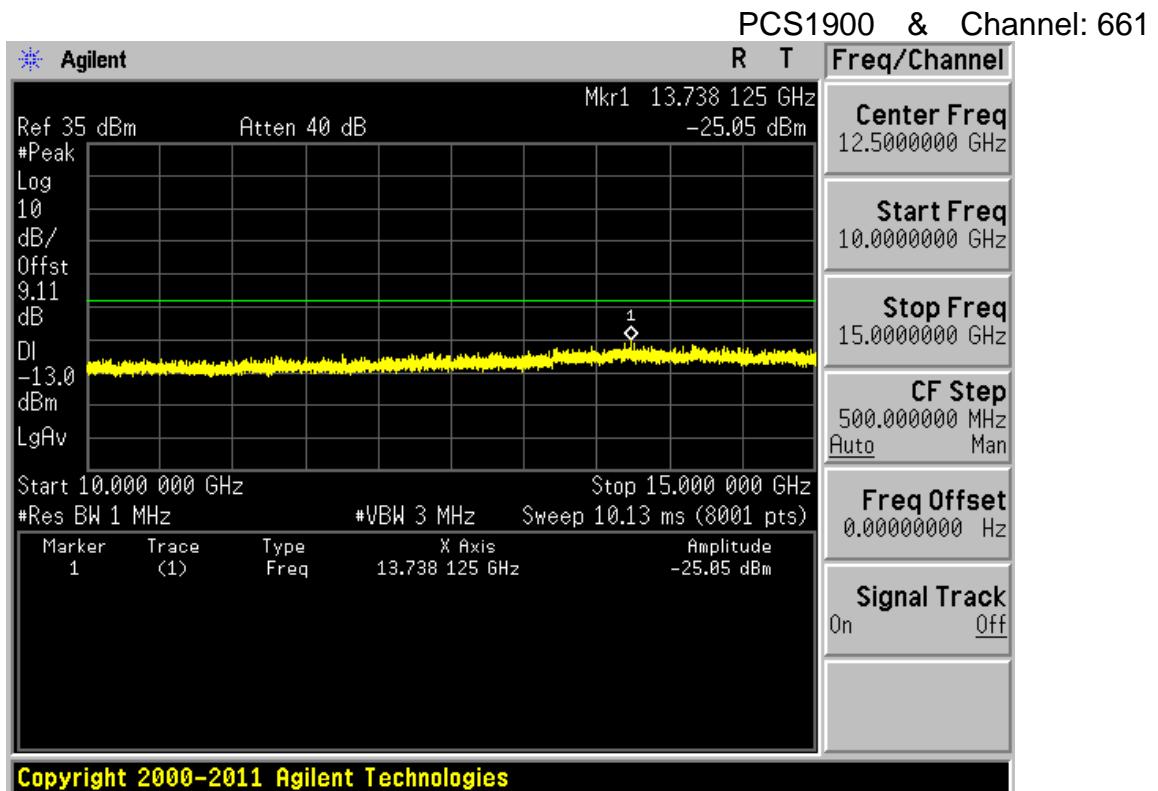

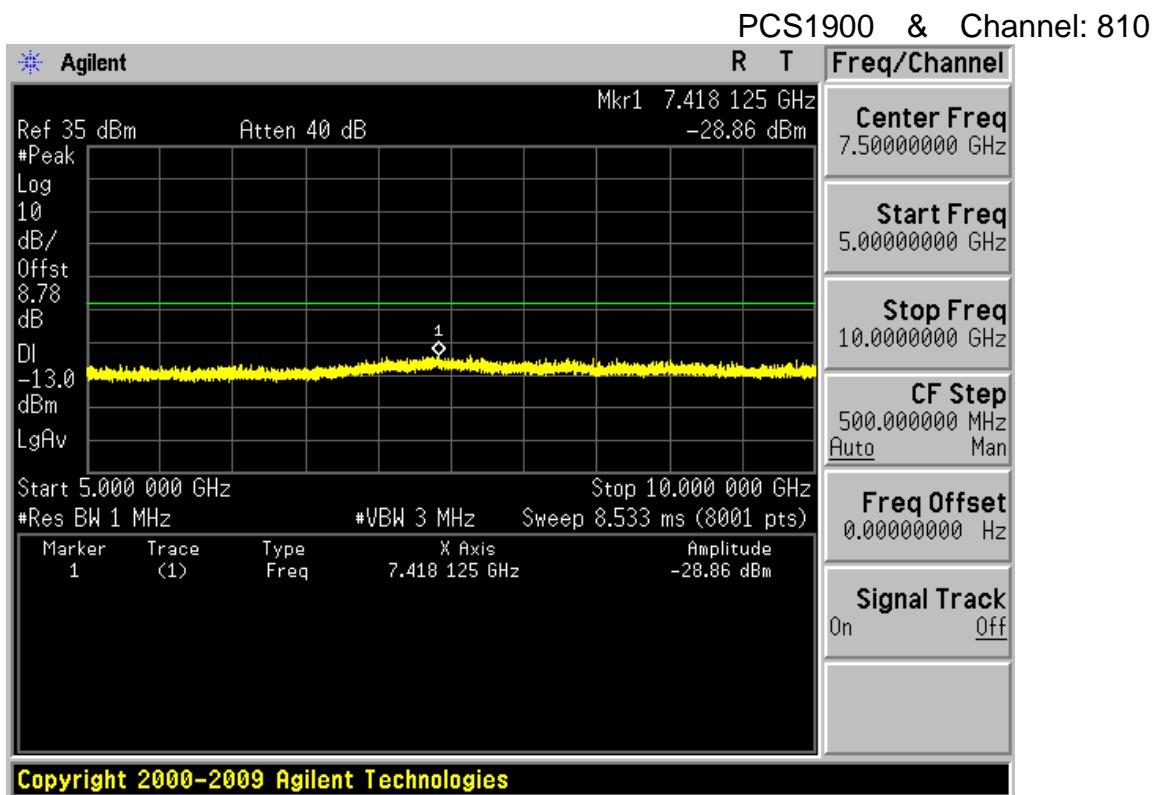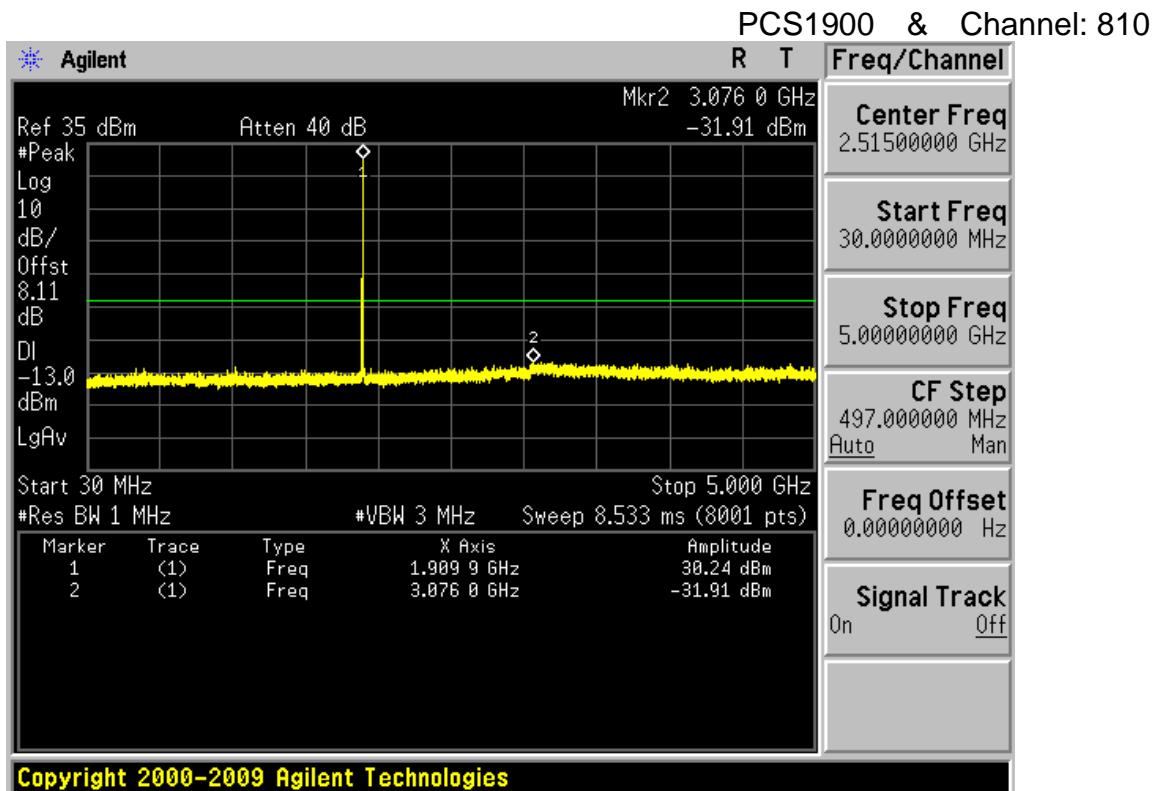


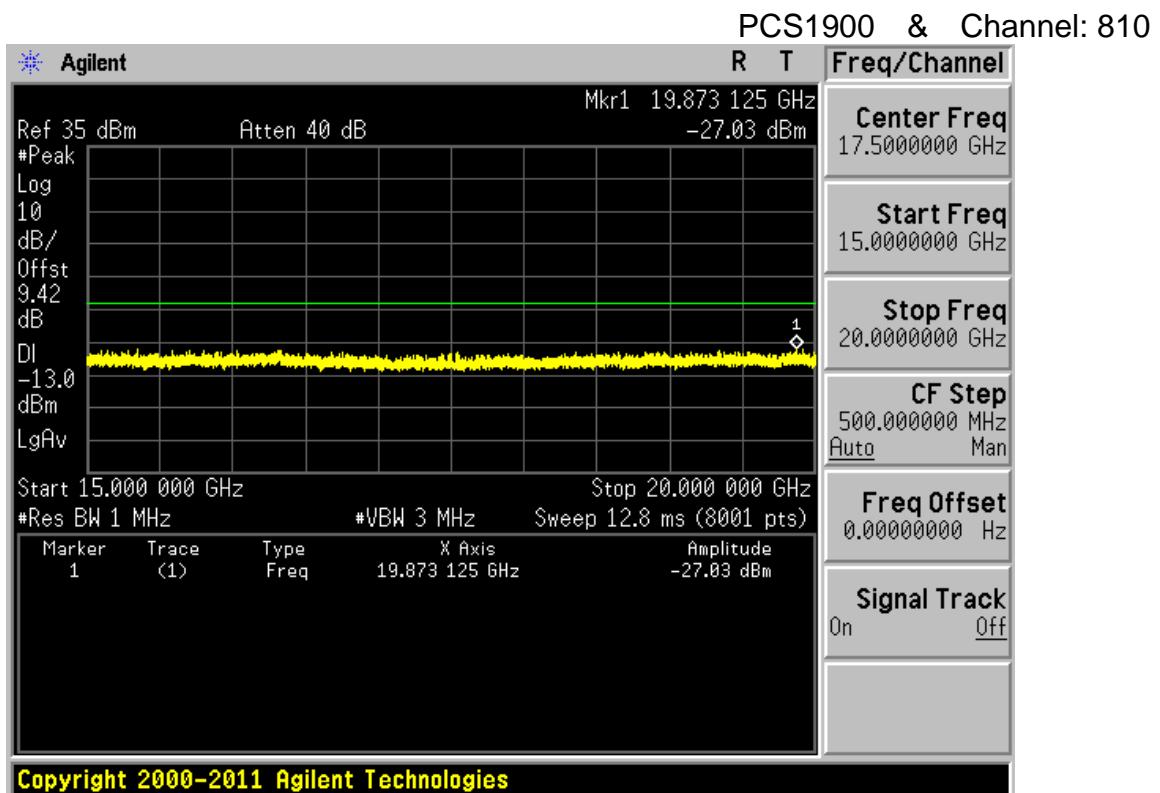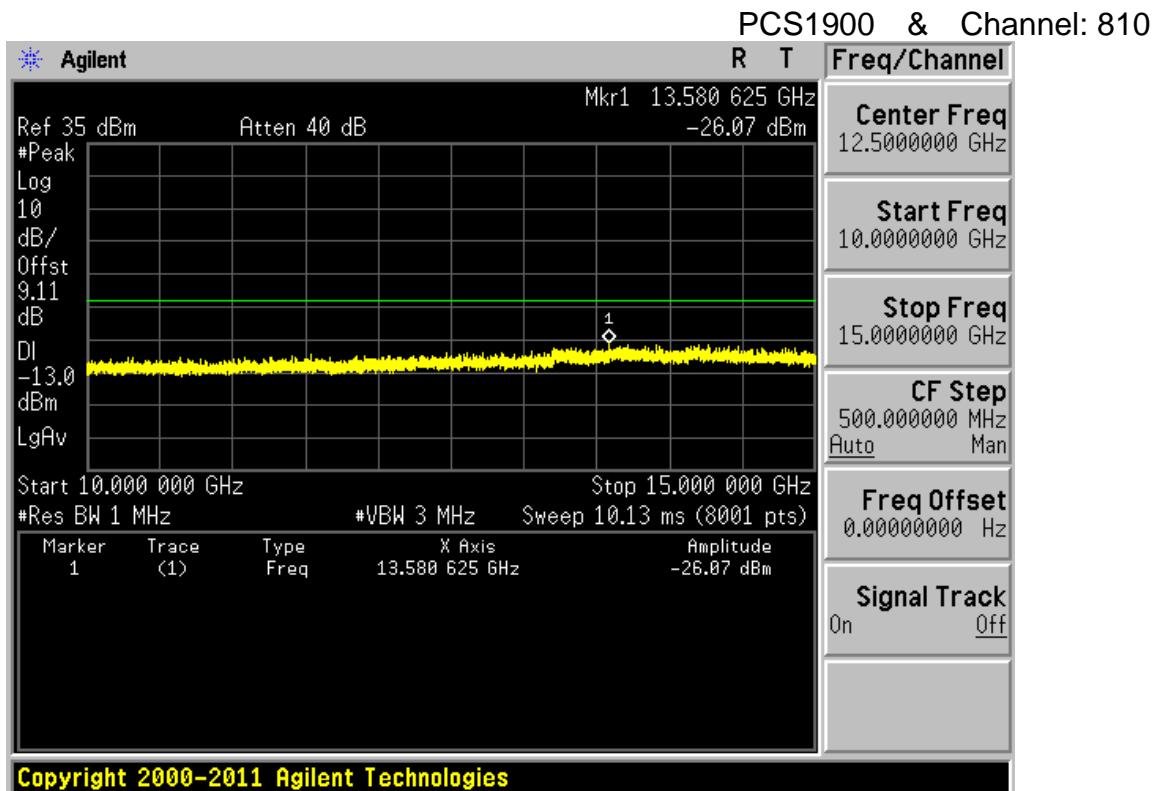


WCDMA1900 & Channel: 9262

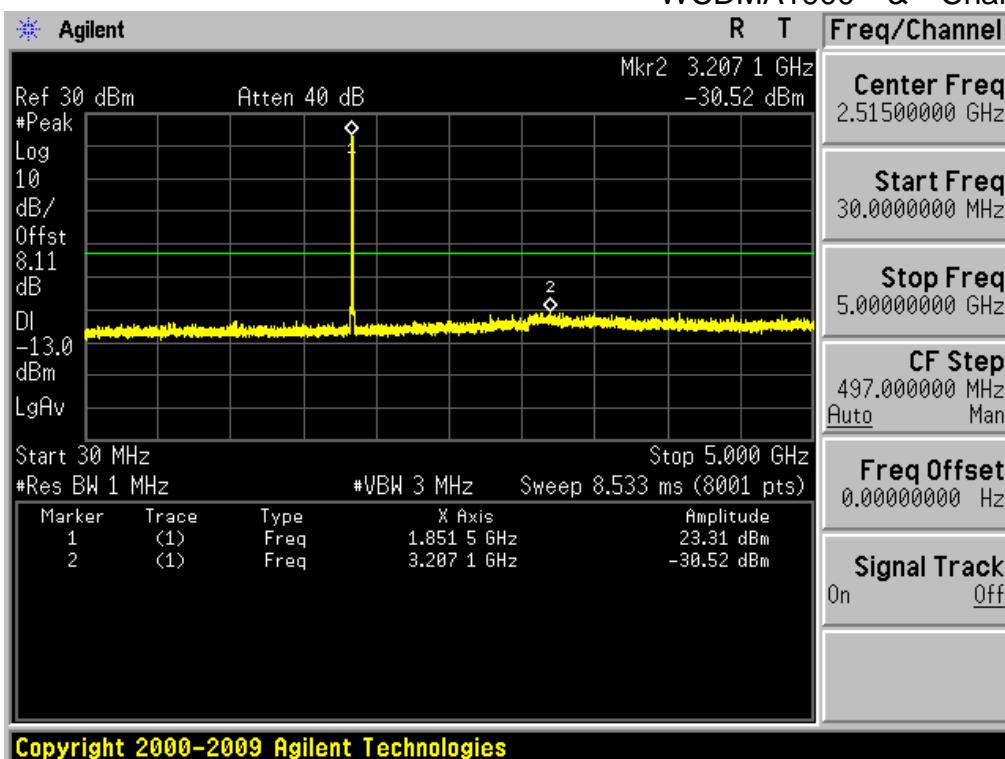


WCDMA1900 & Channel: 9262


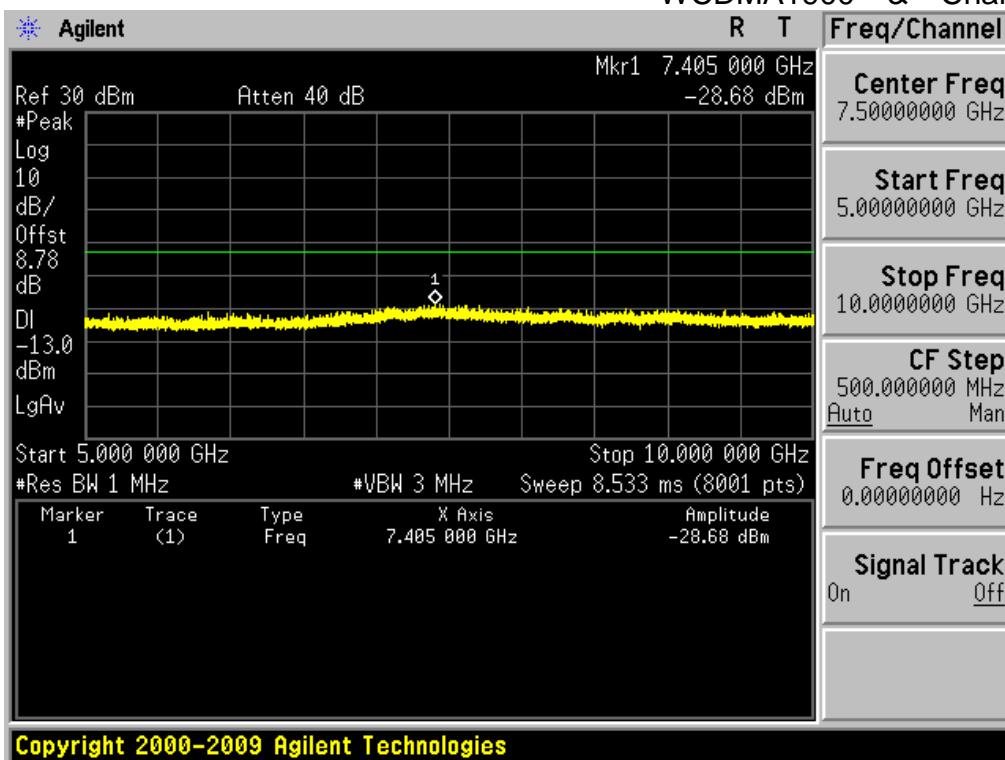




WCDMA1900 & Channel: 9262


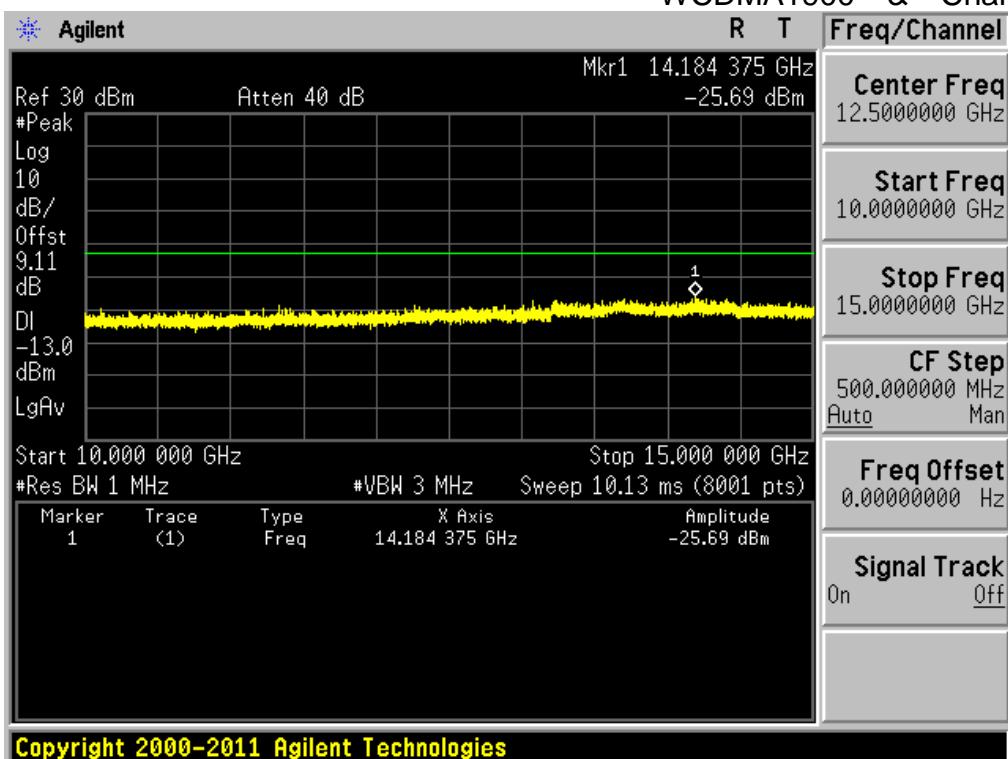


WCDMA1900 & Channel: 9262

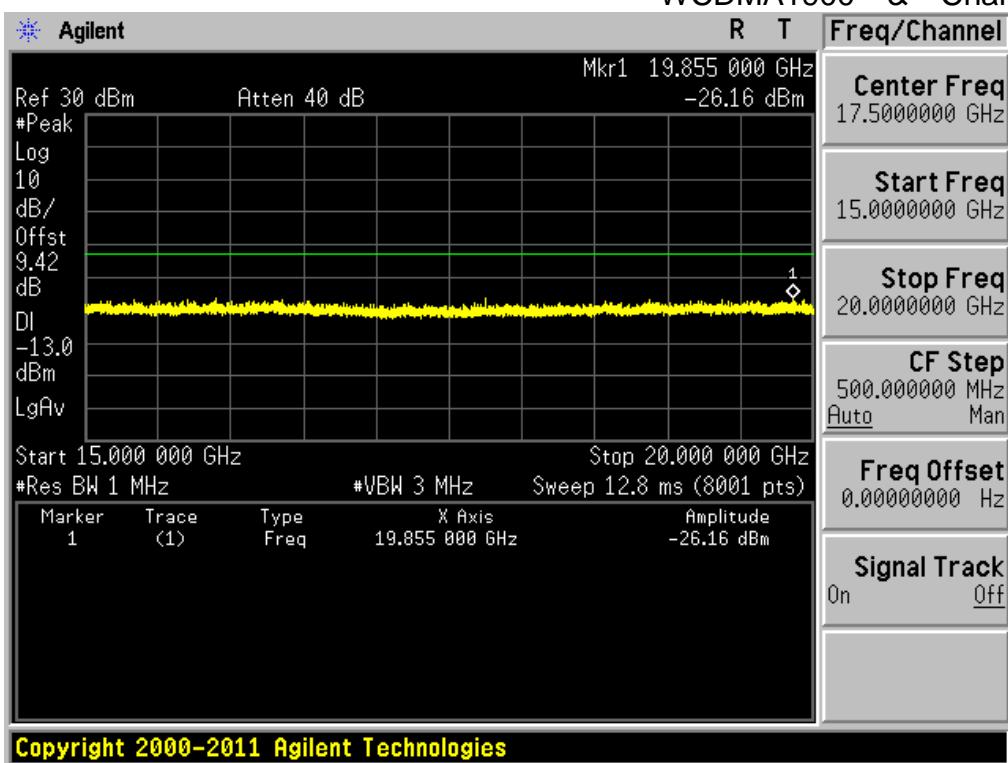


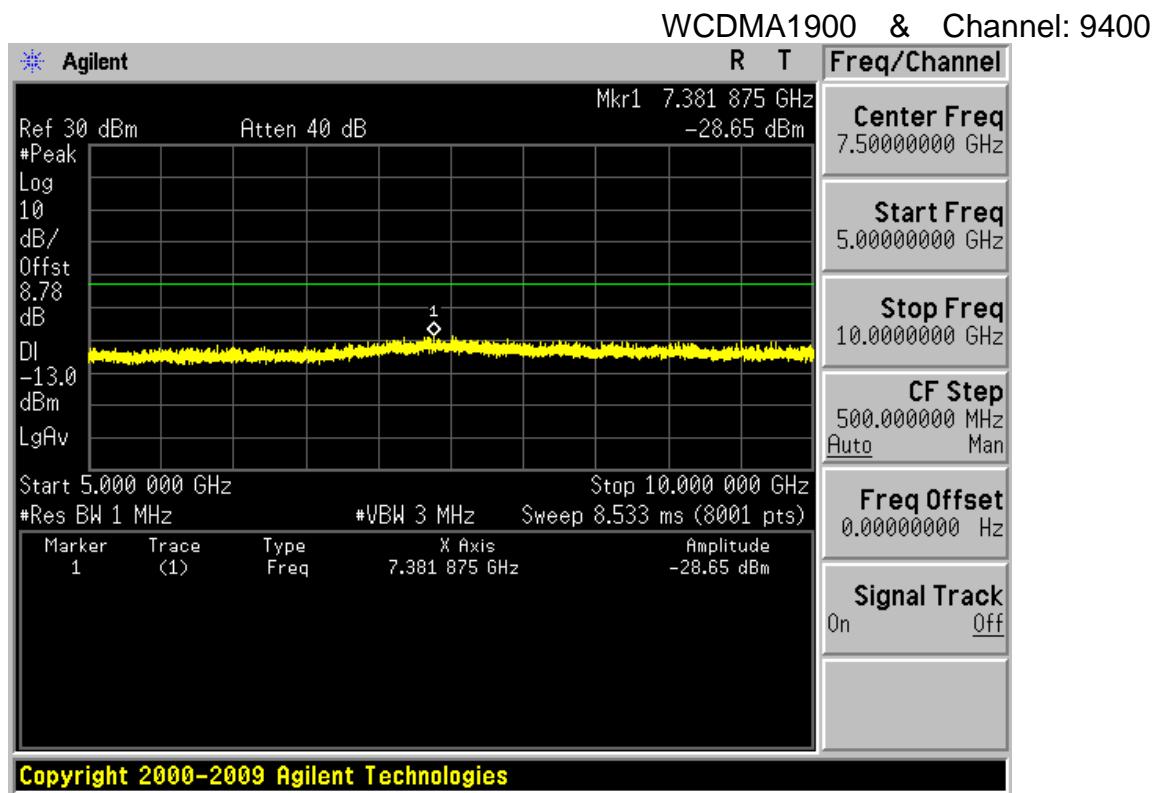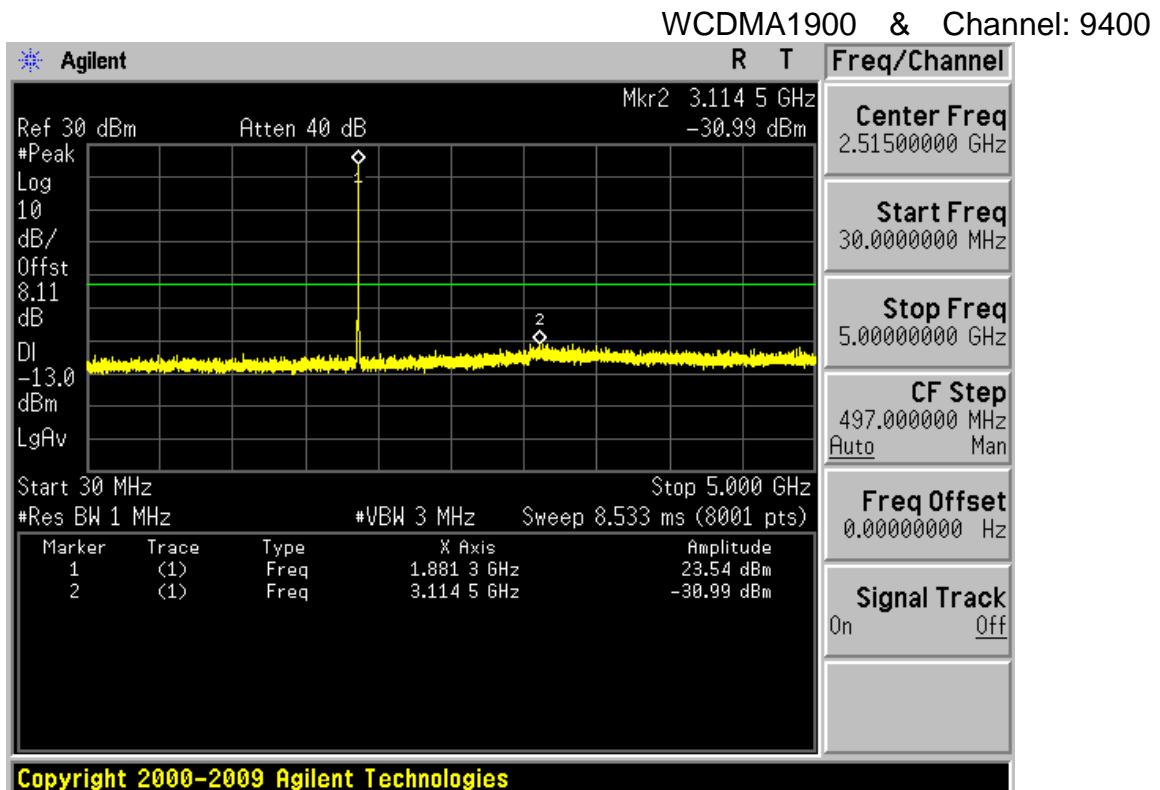

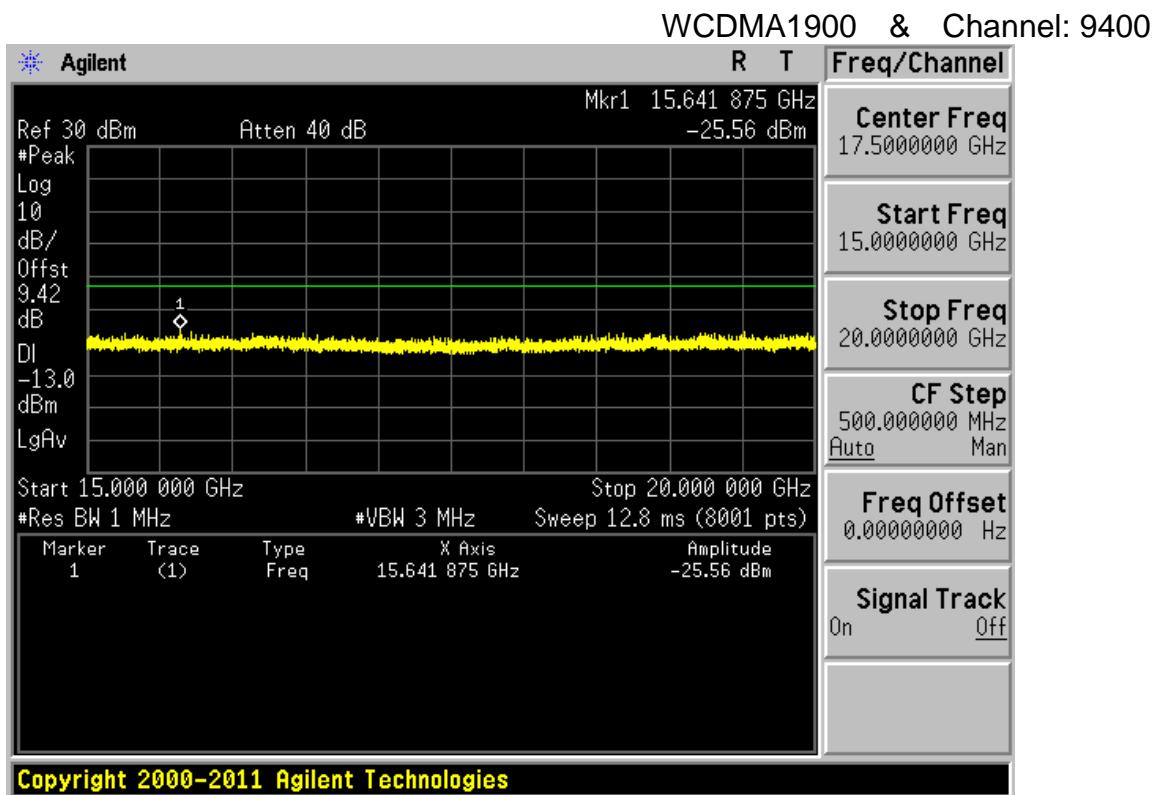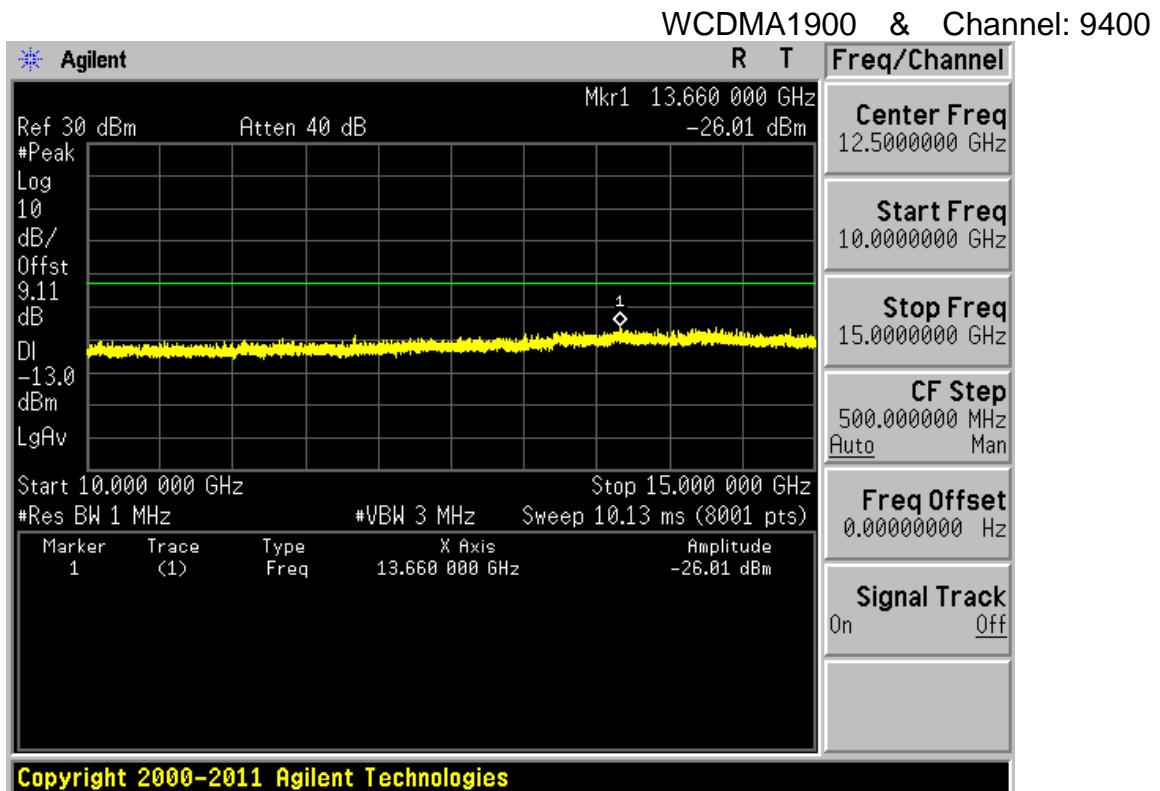


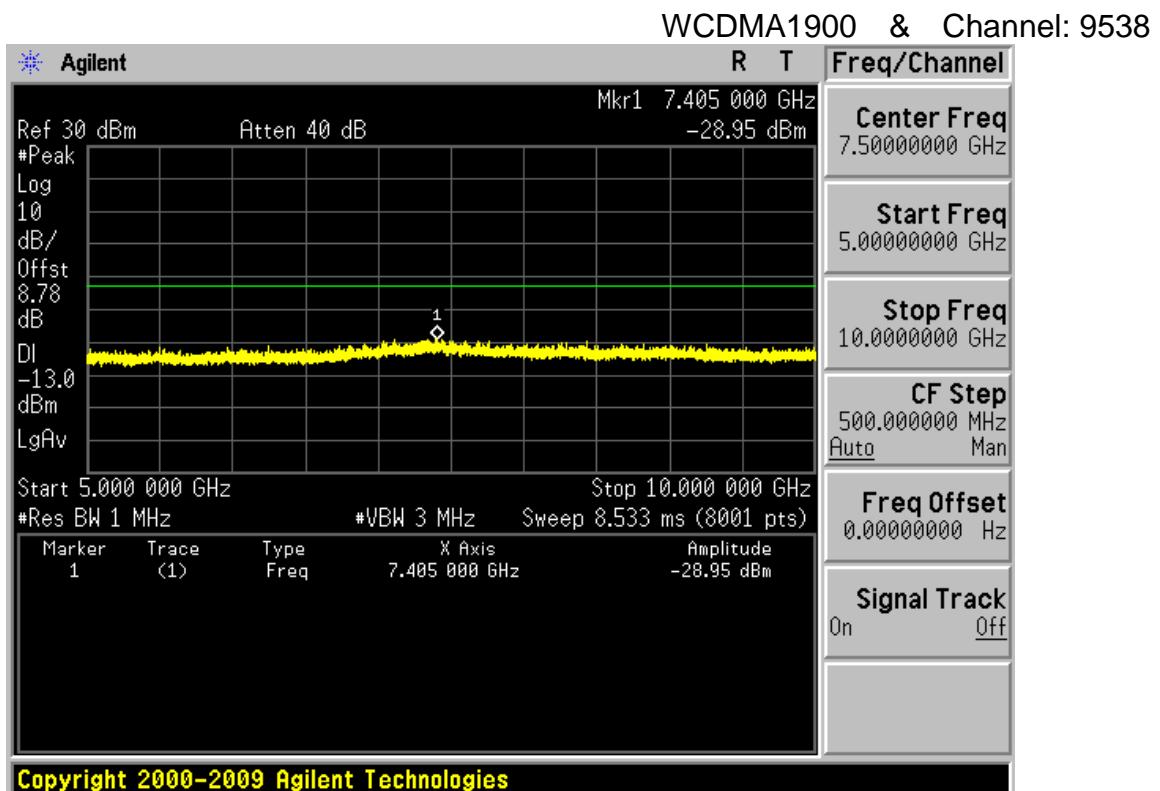
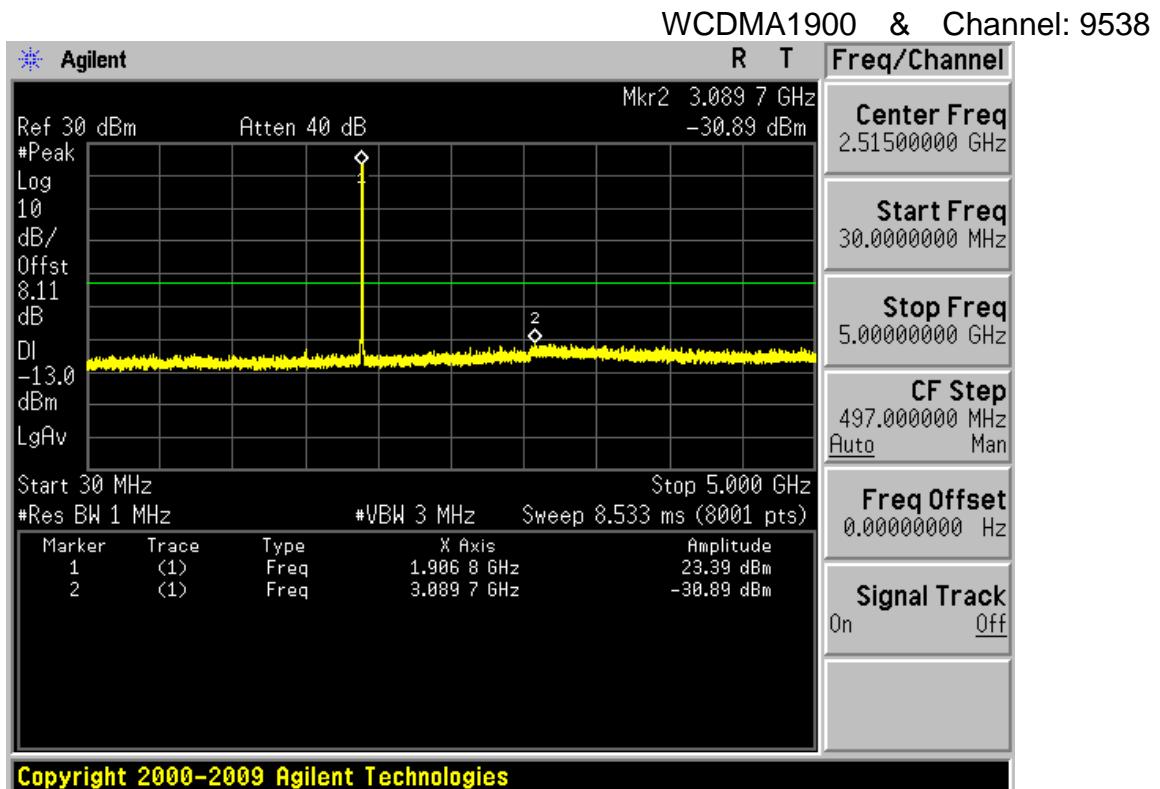




WCDMA1900 & Channel: 9538


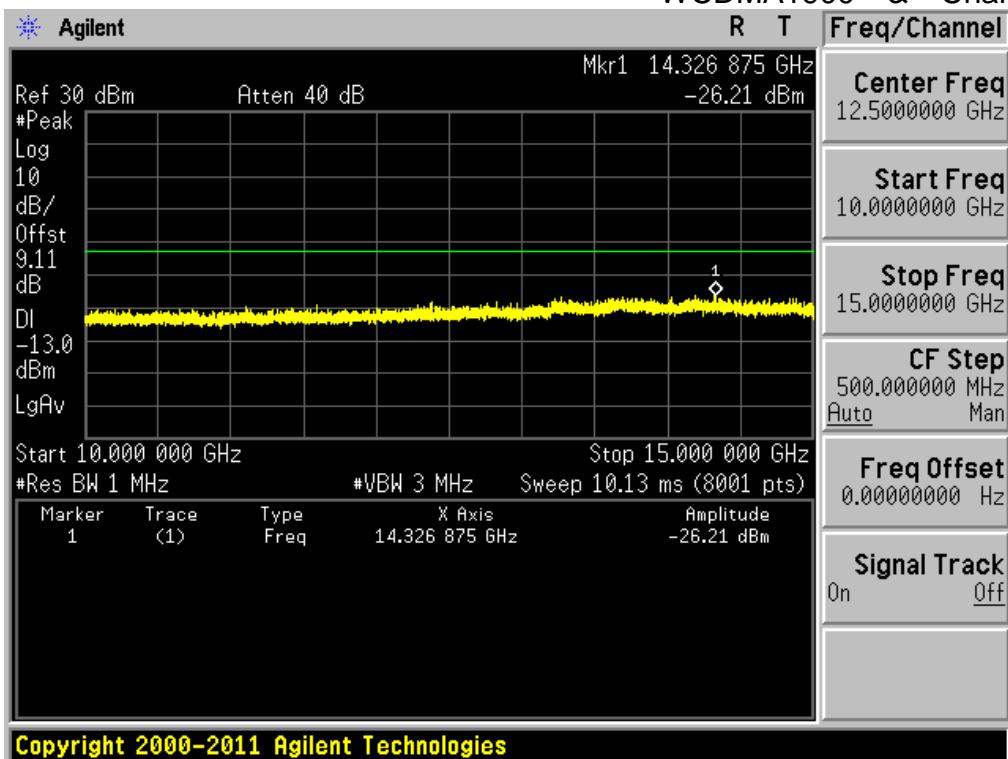




WCDMA1900 & Channel: 9538


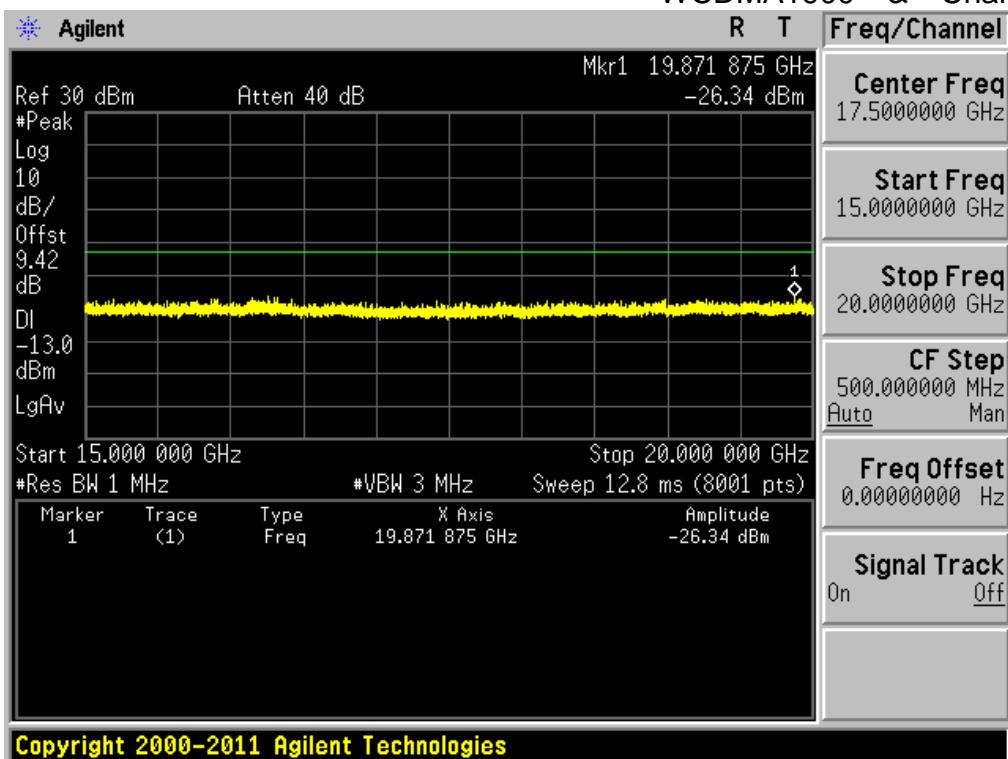


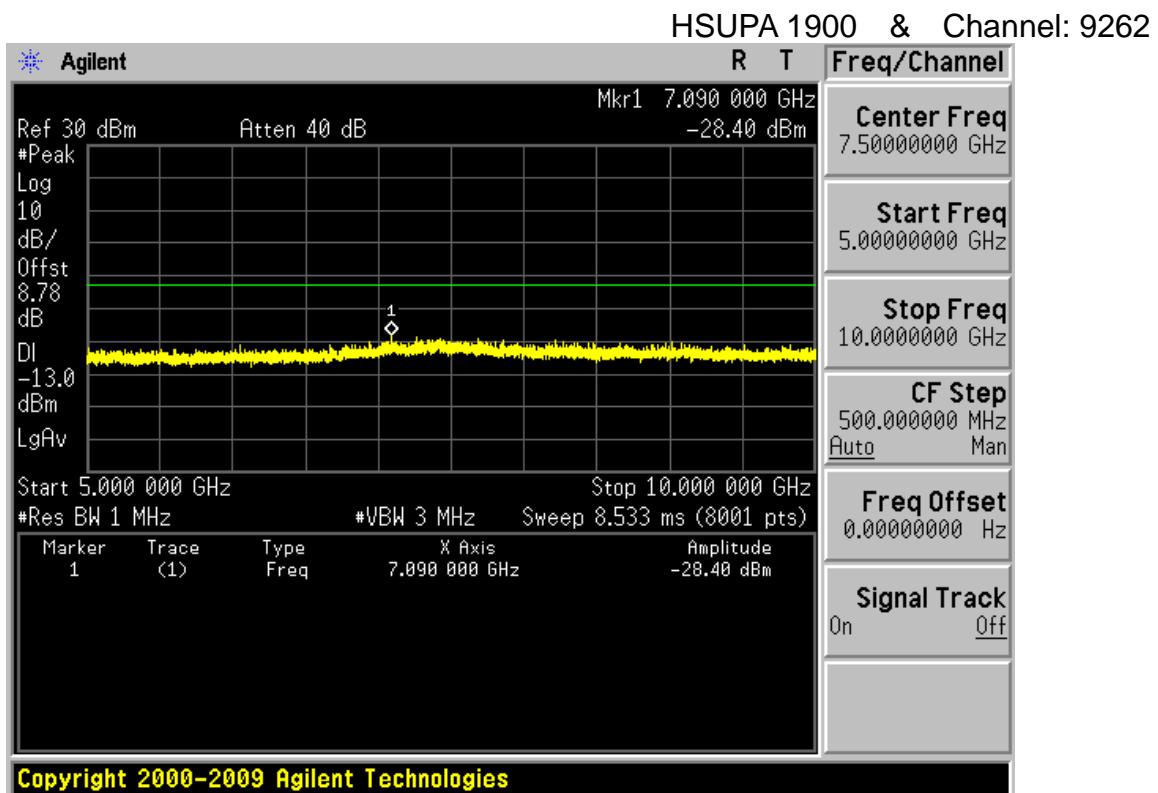
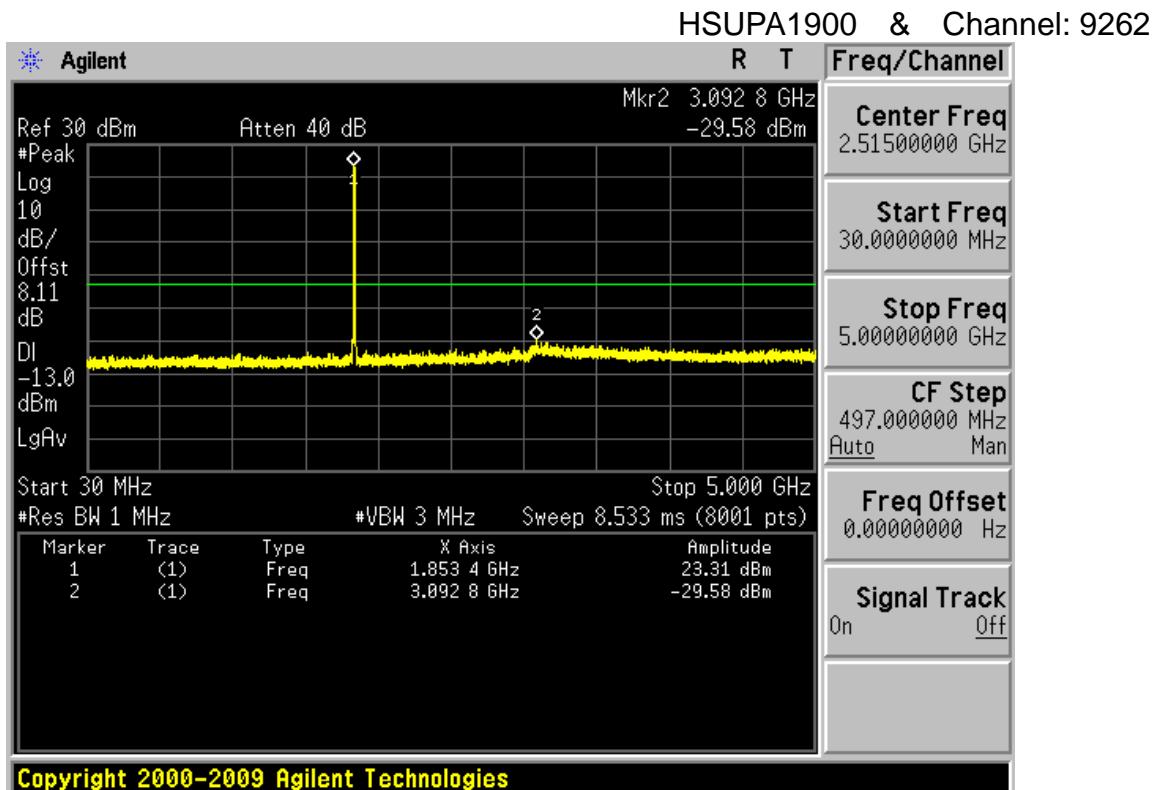


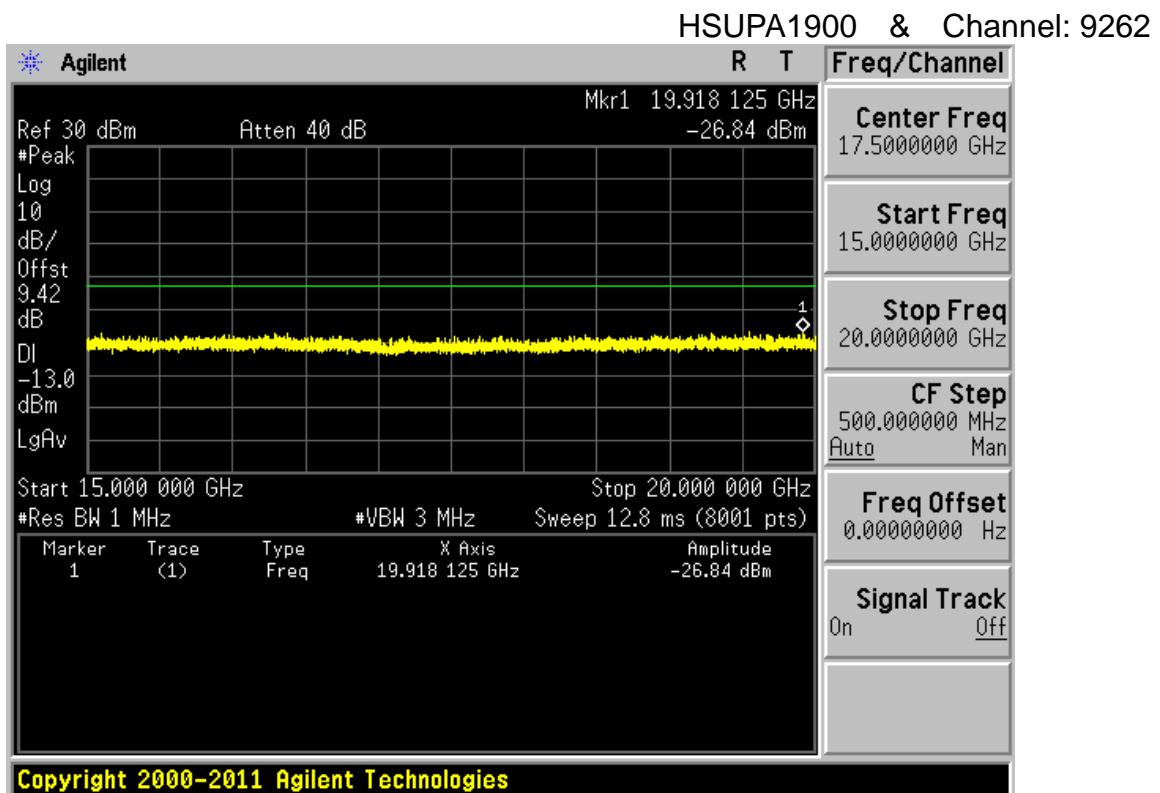
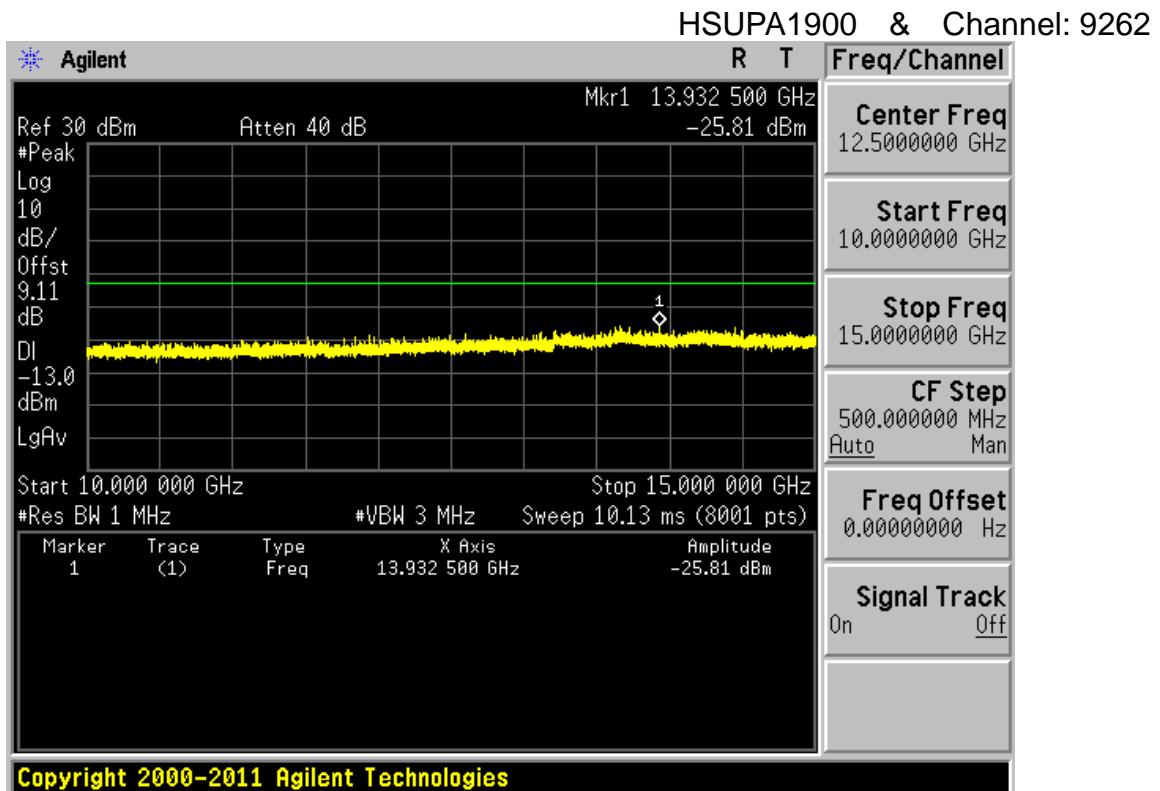


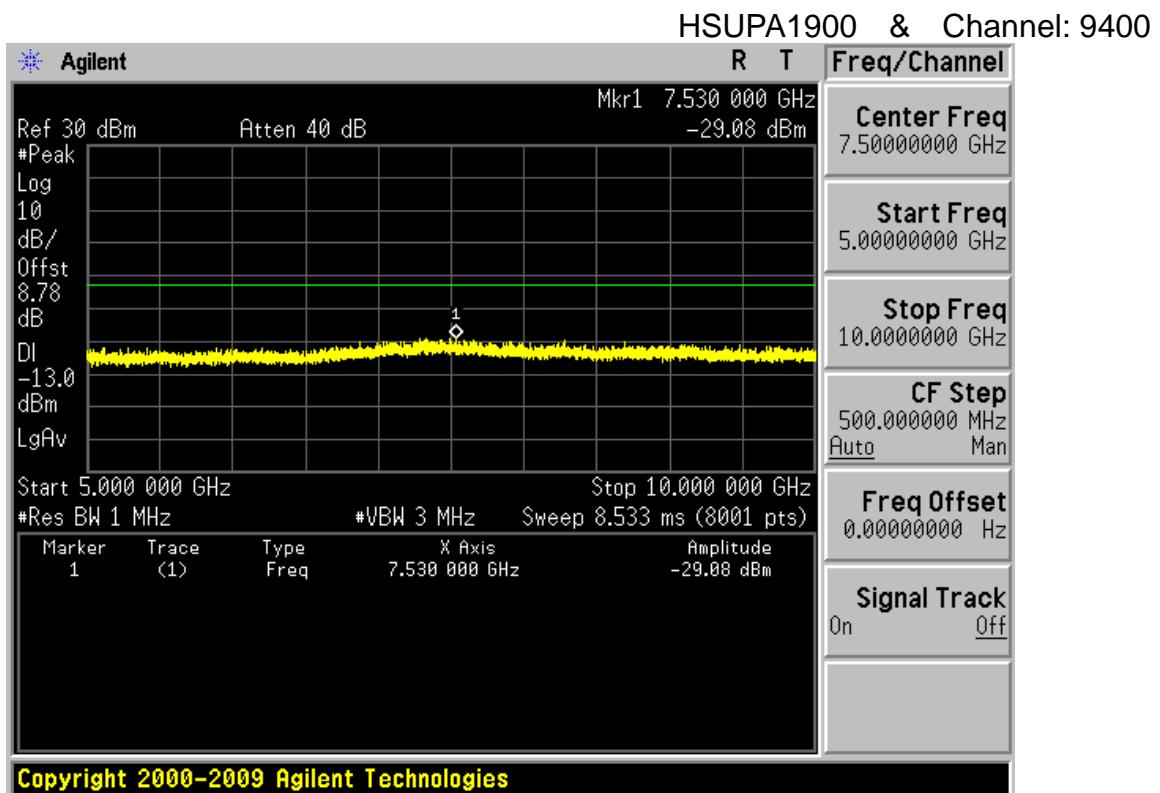
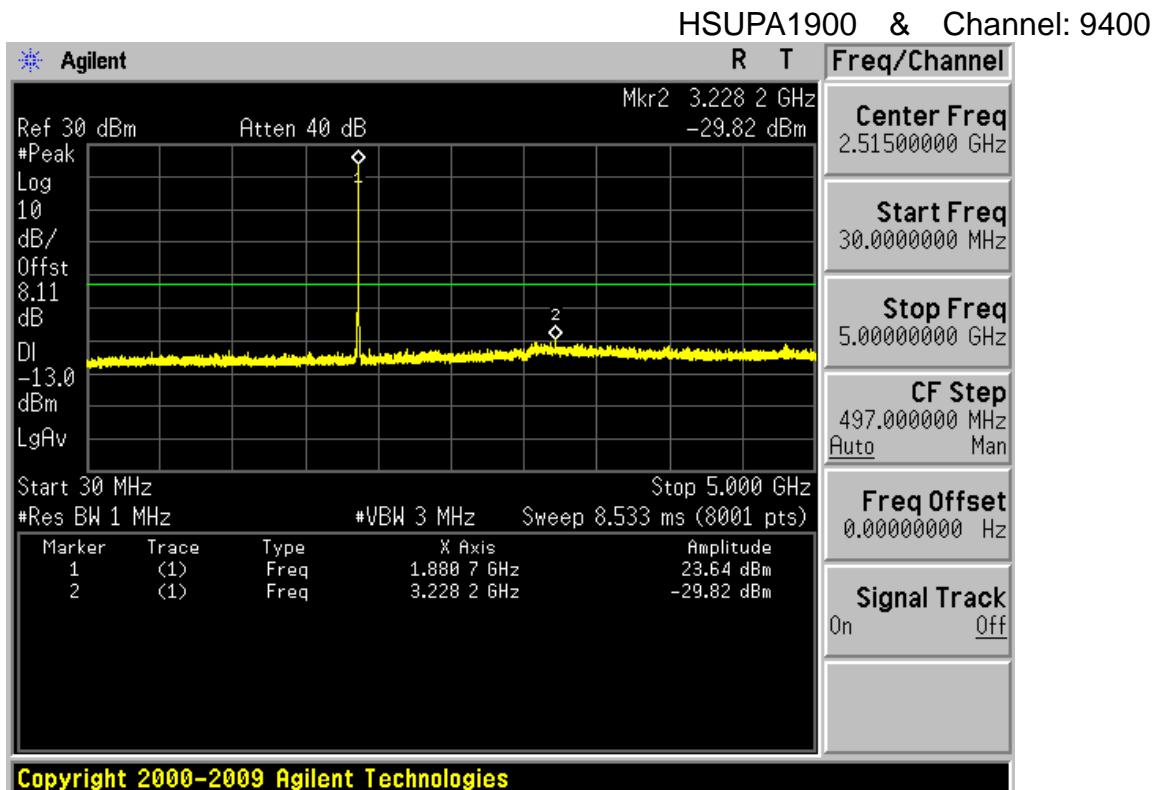


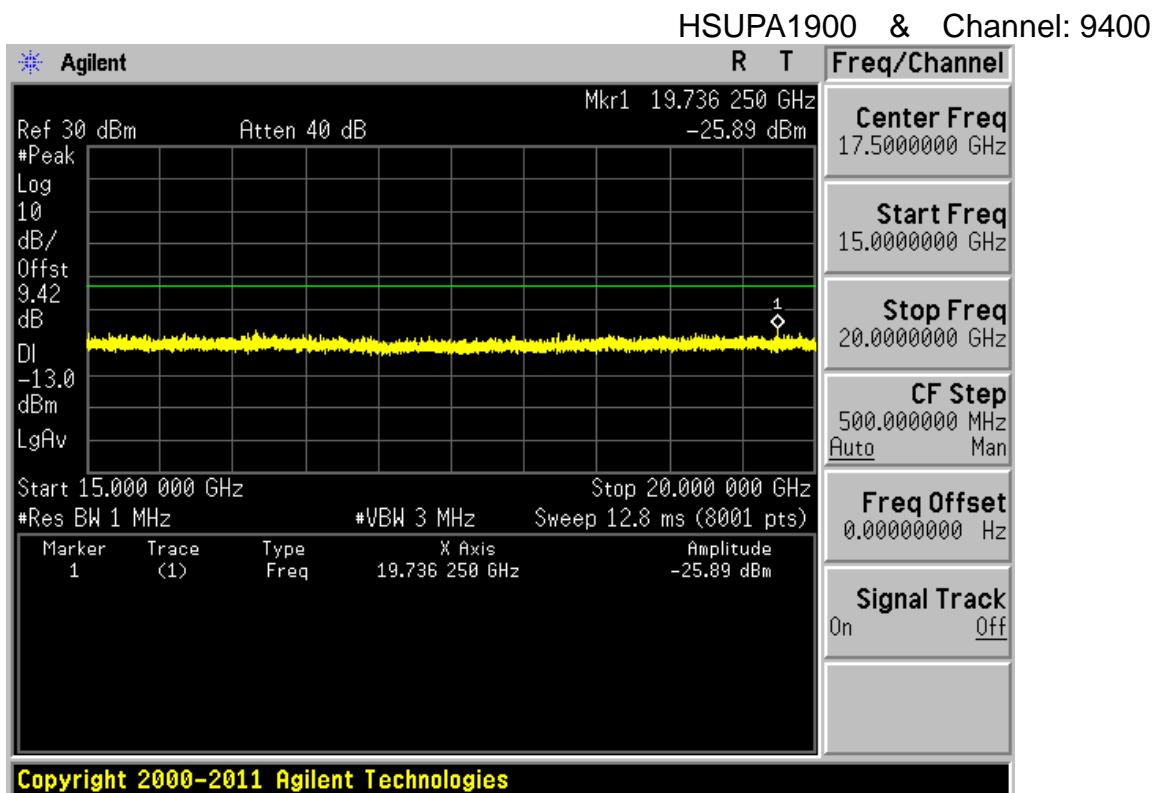
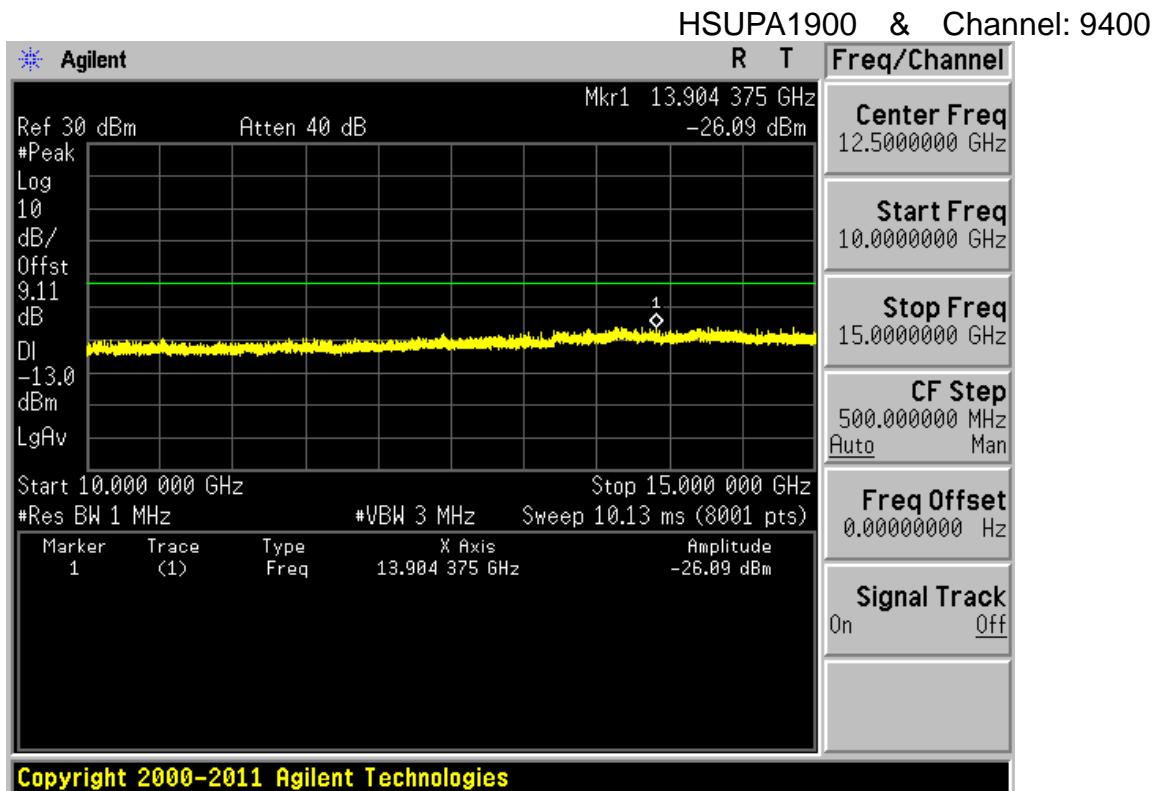


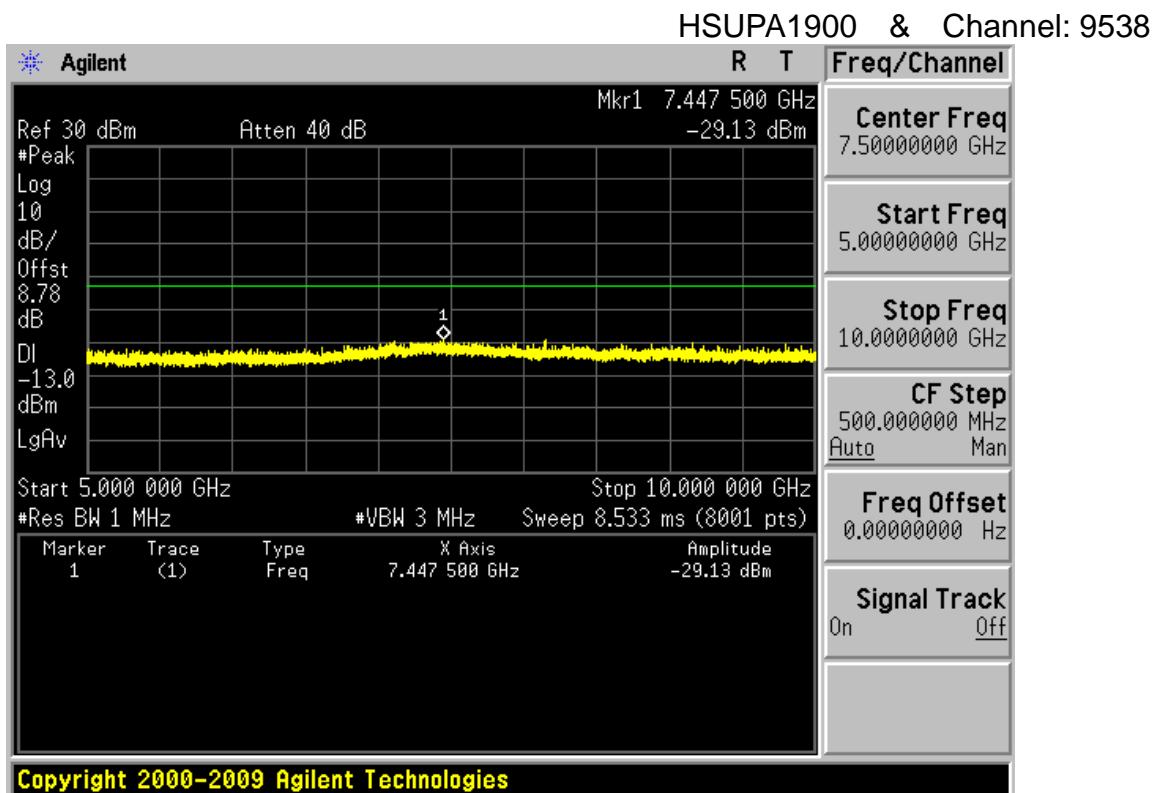
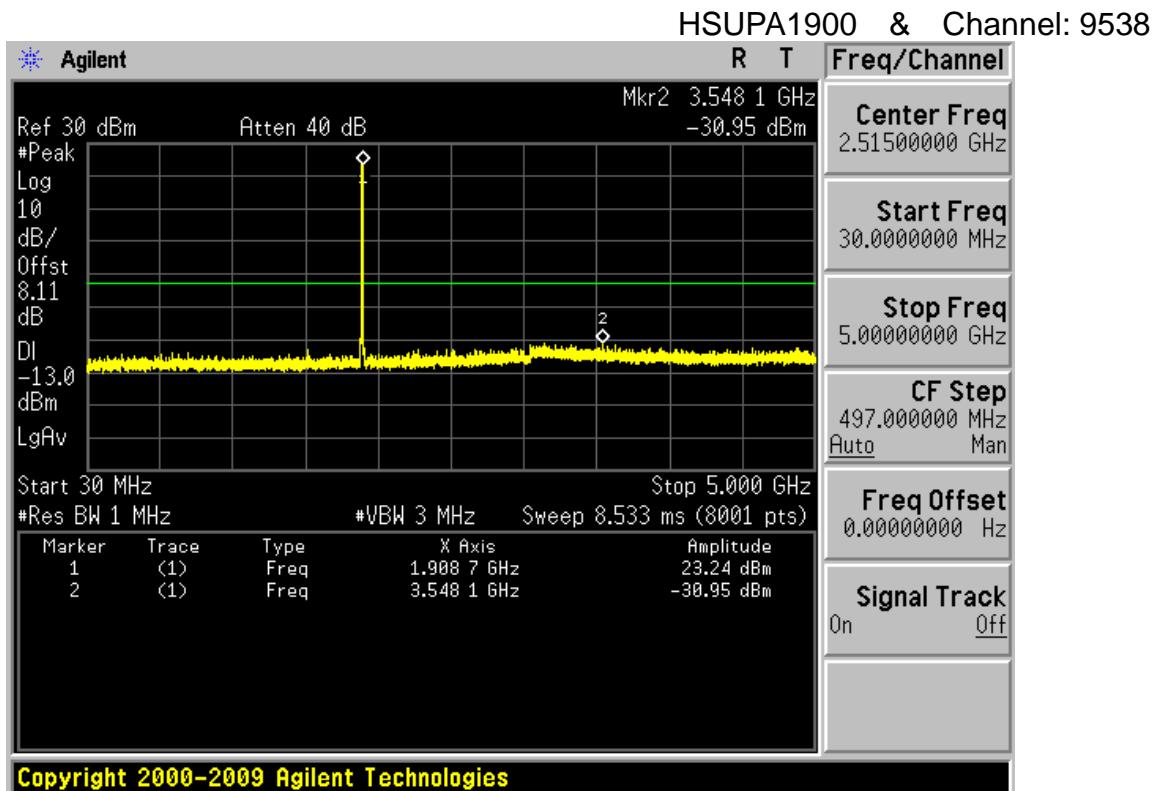


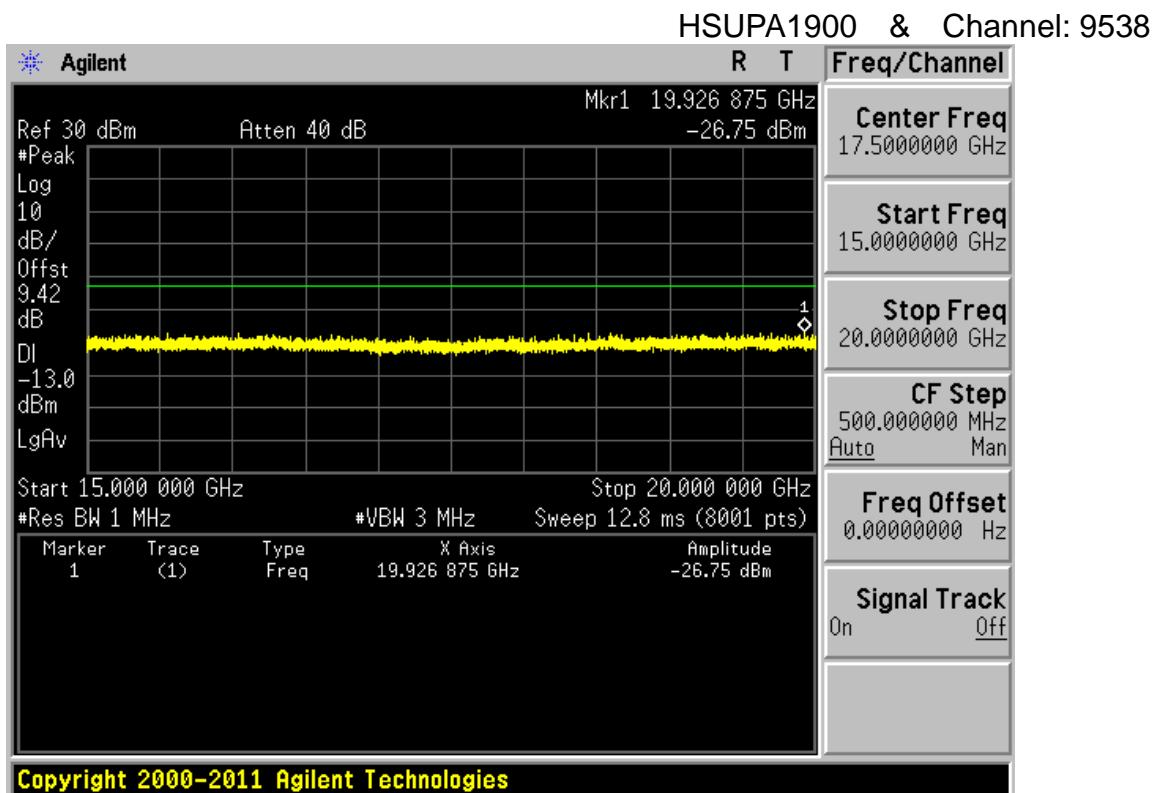
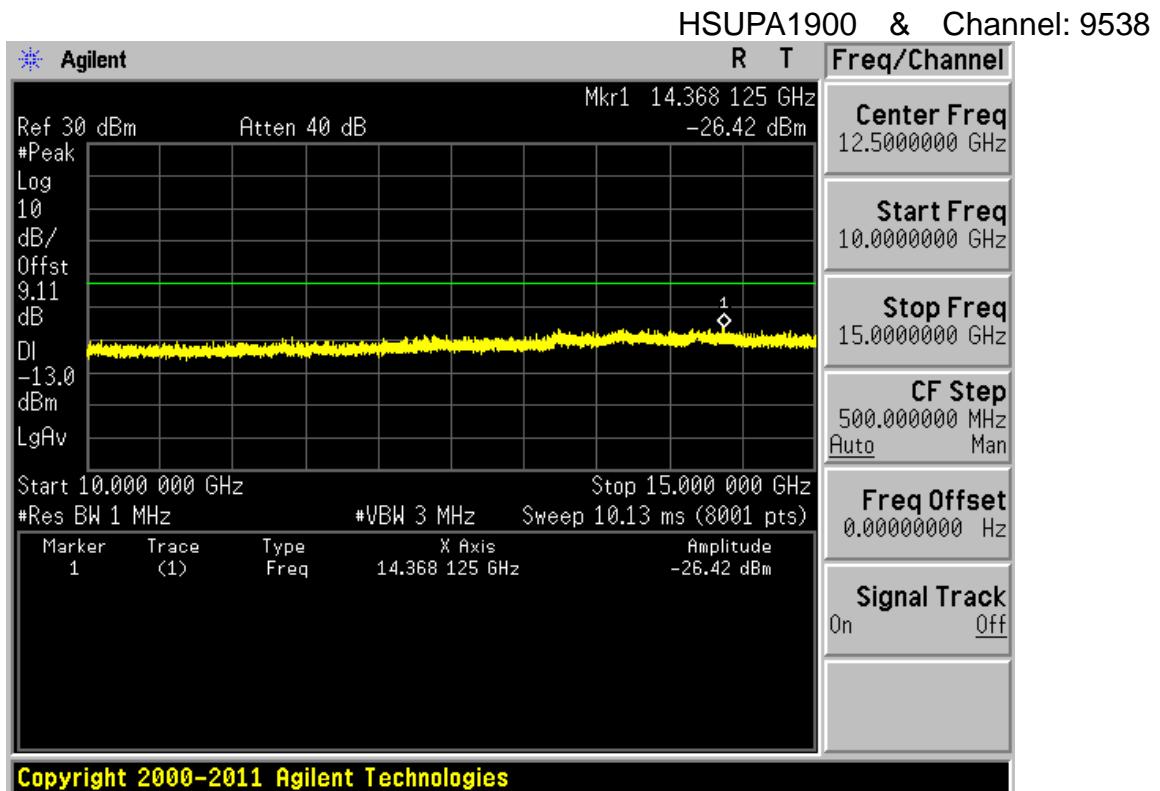


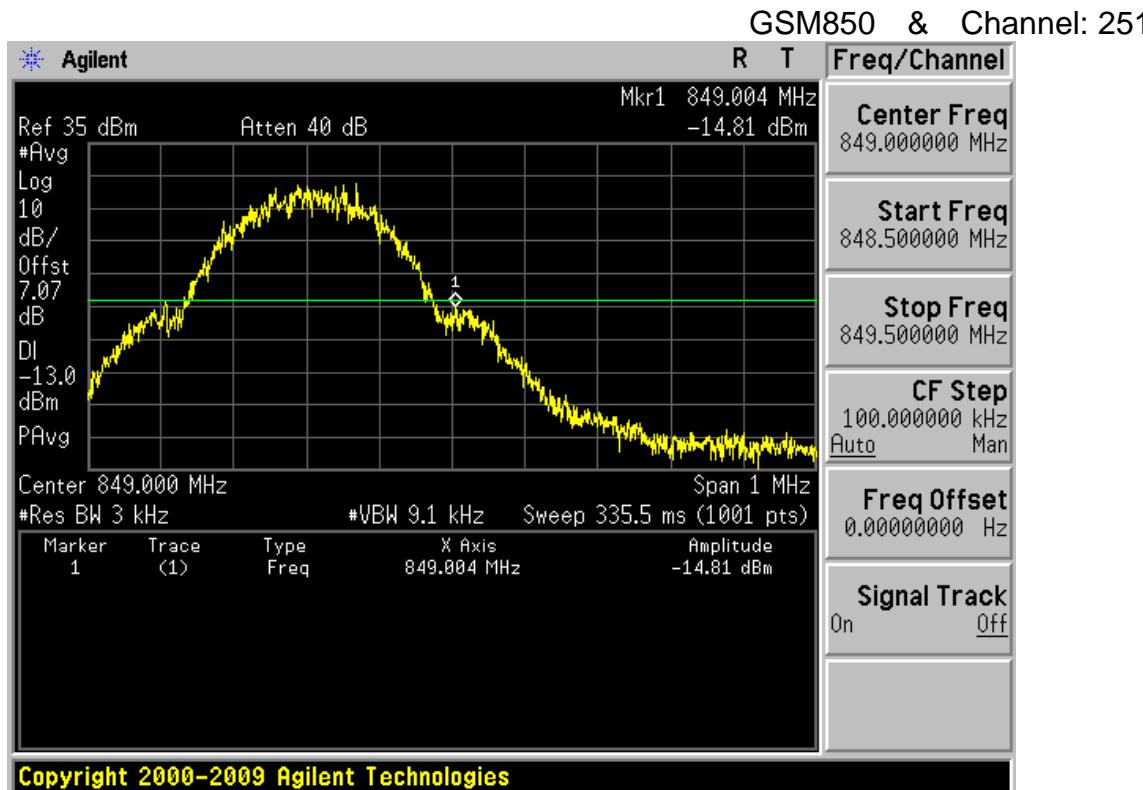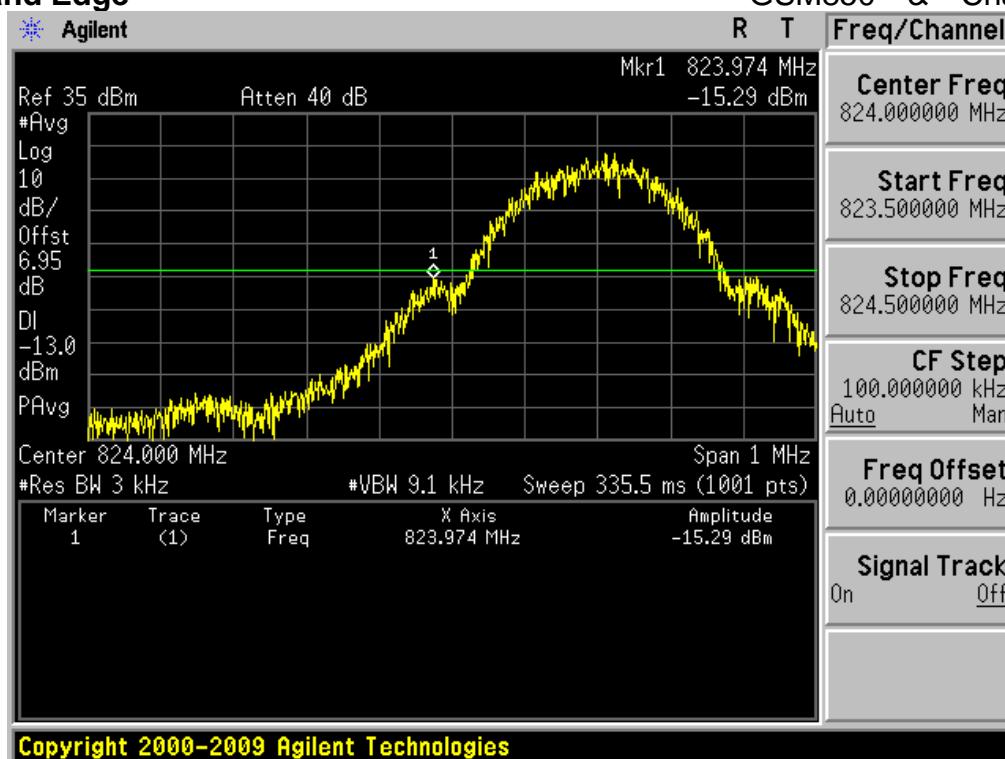8.4 Band Edge

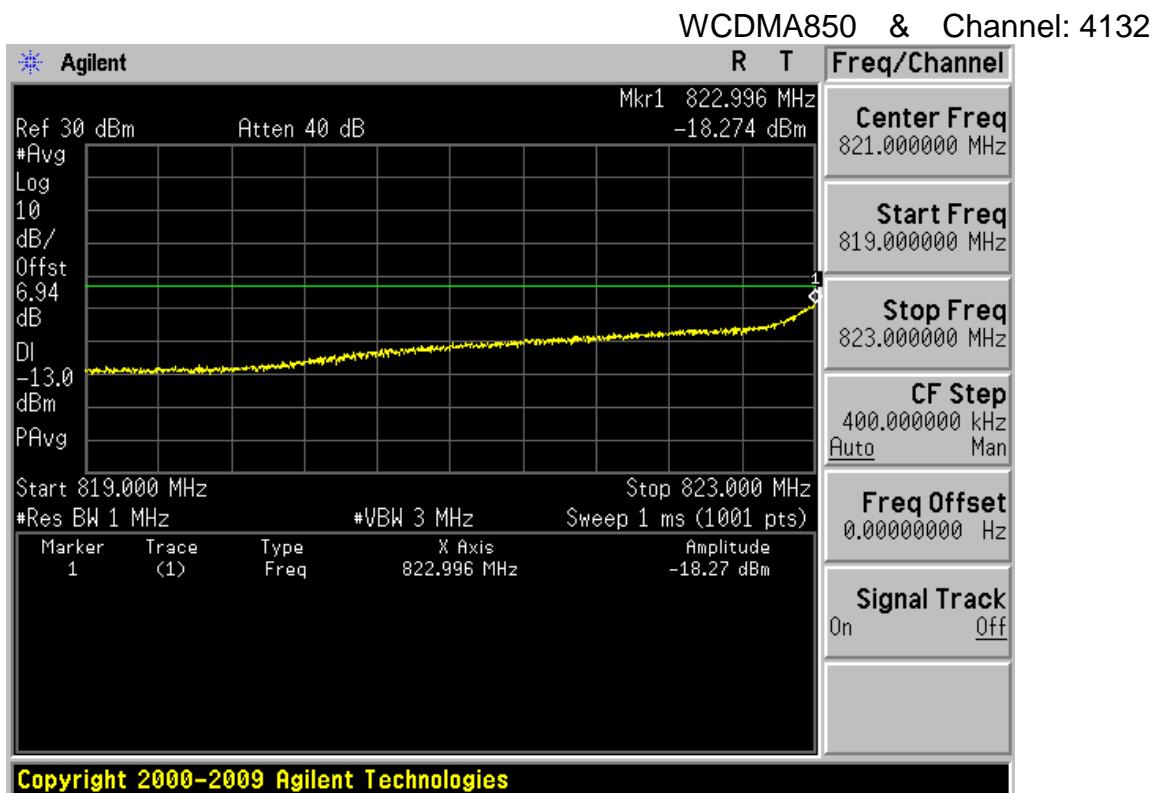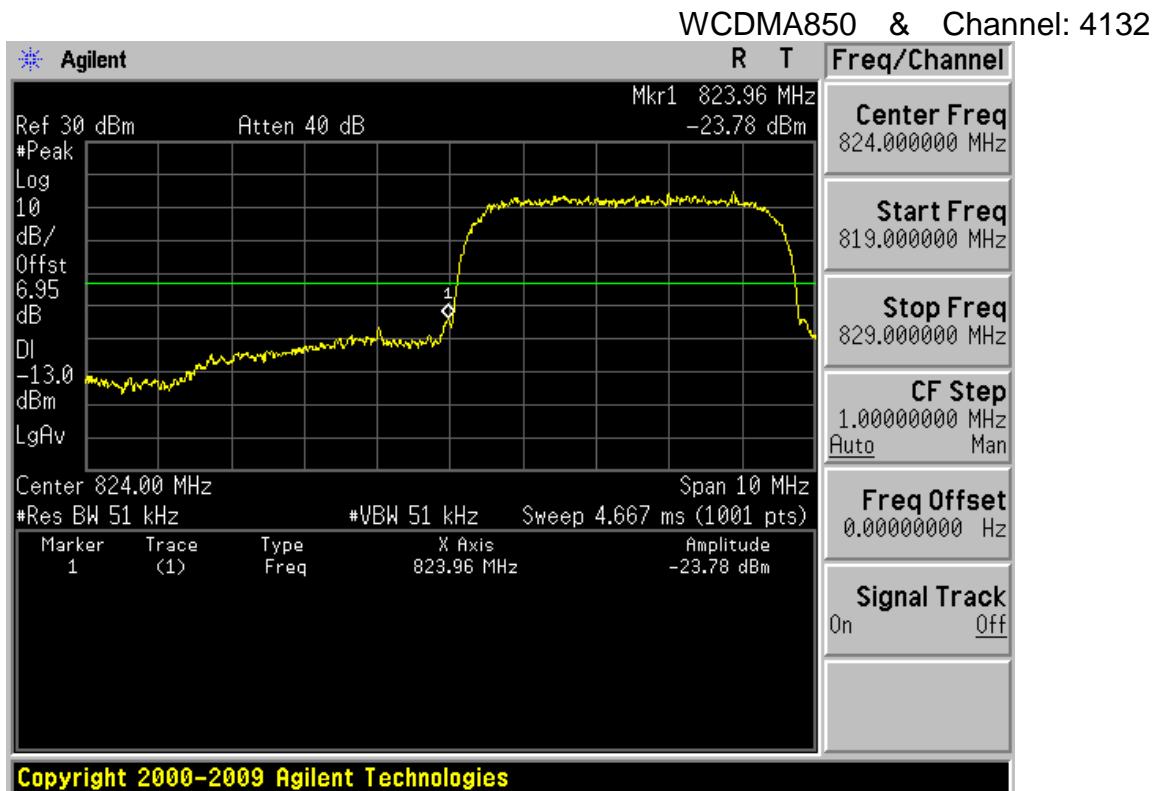


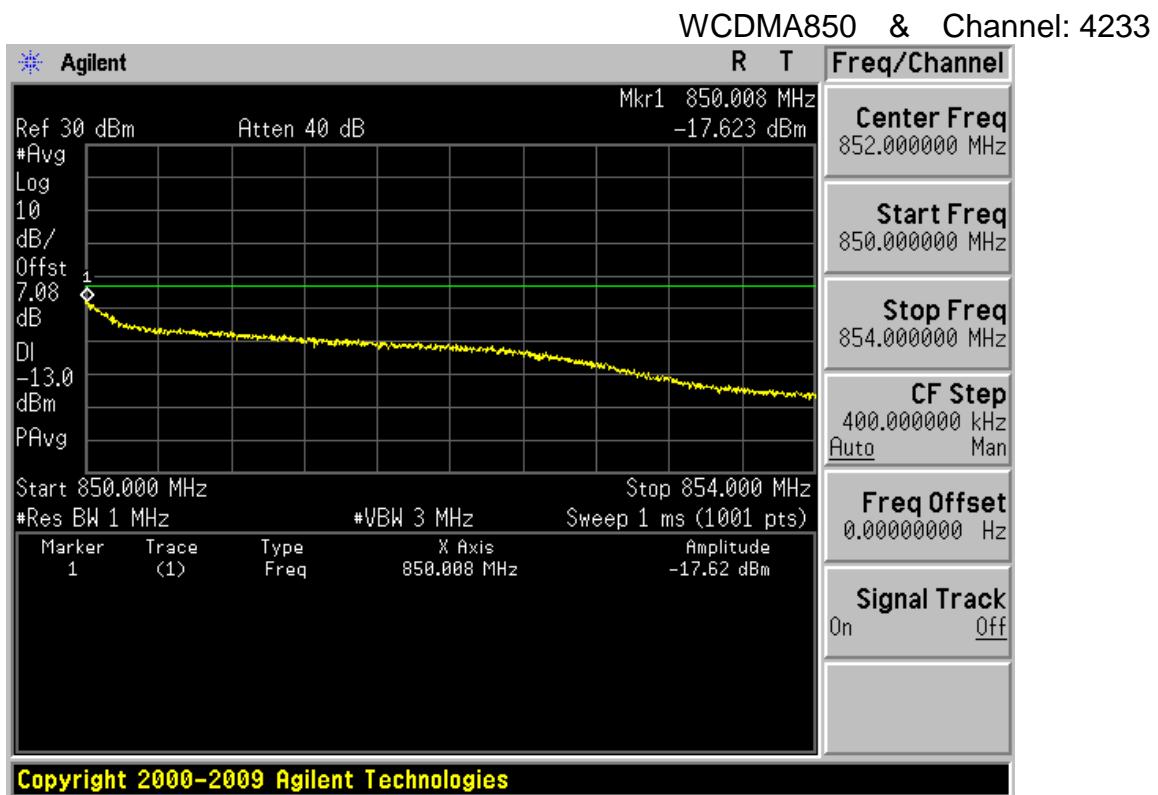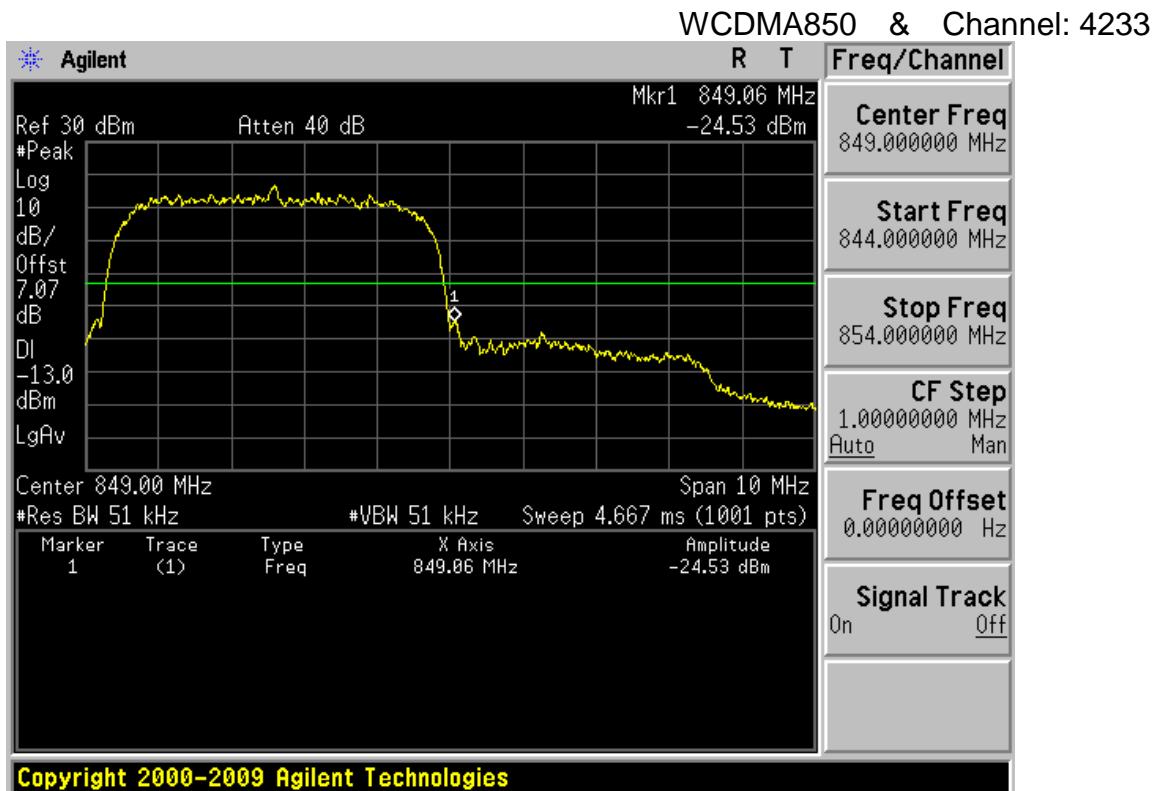

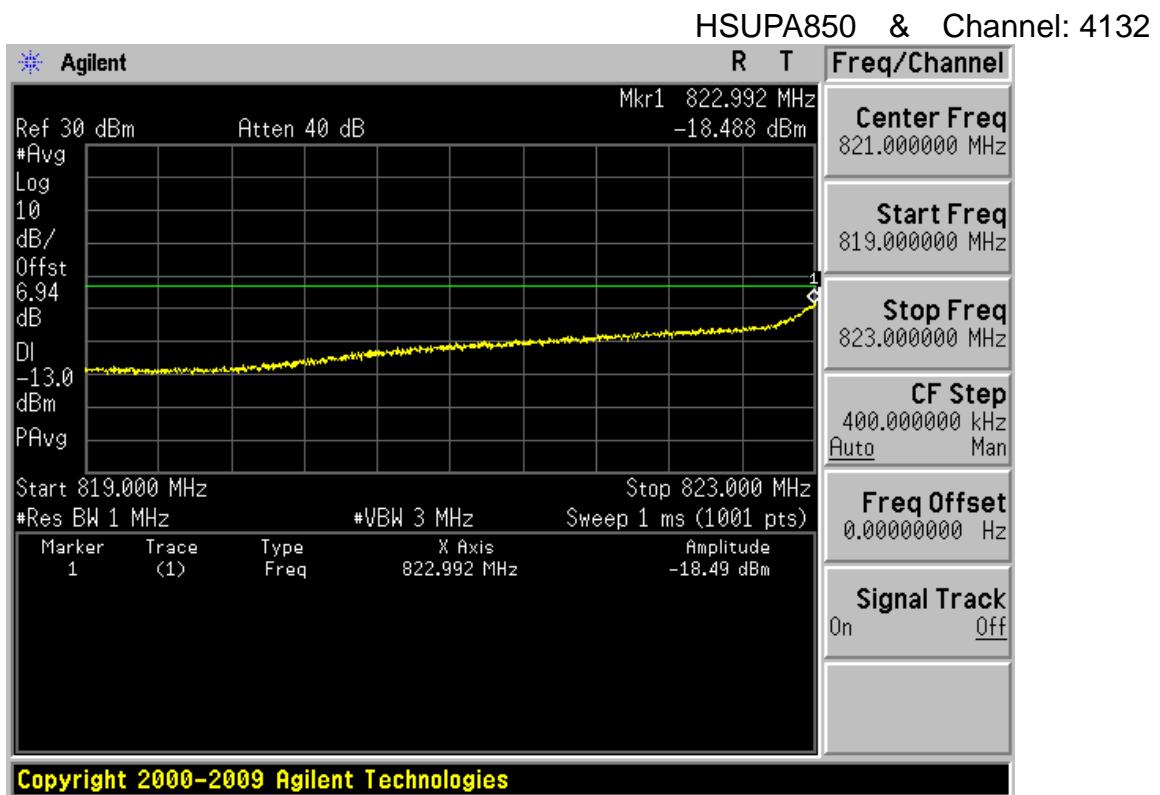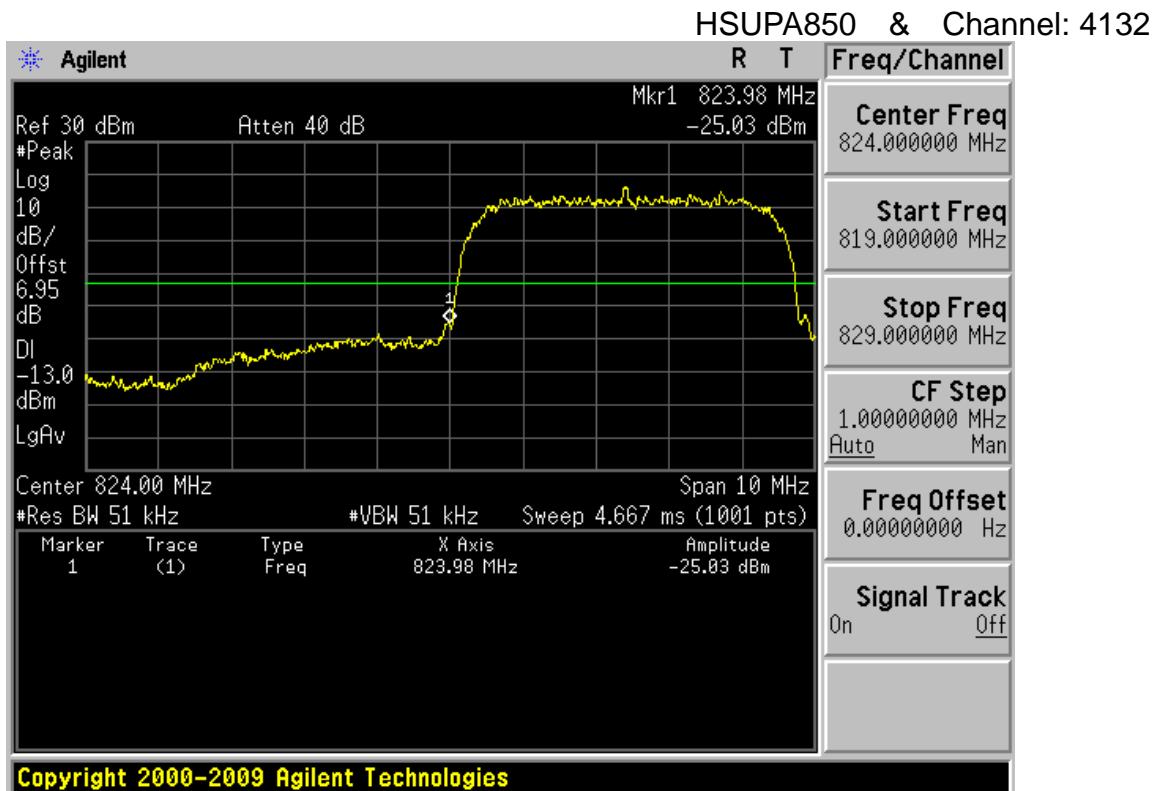


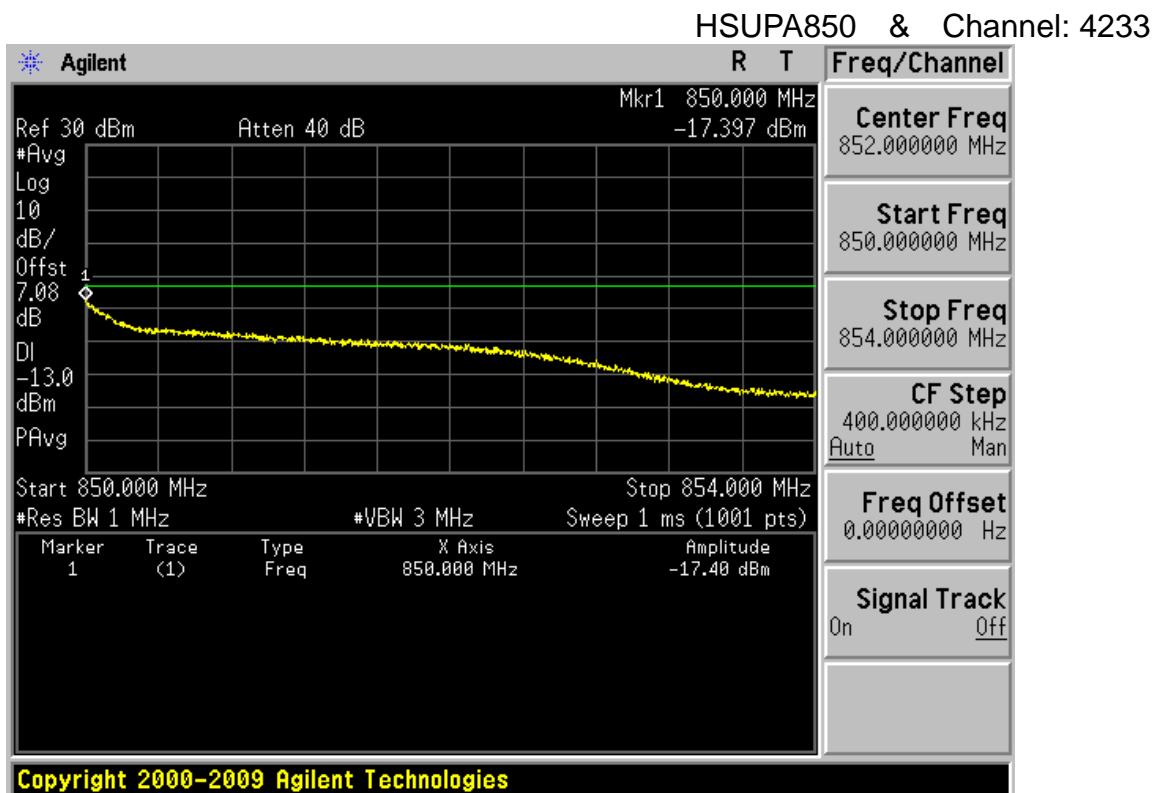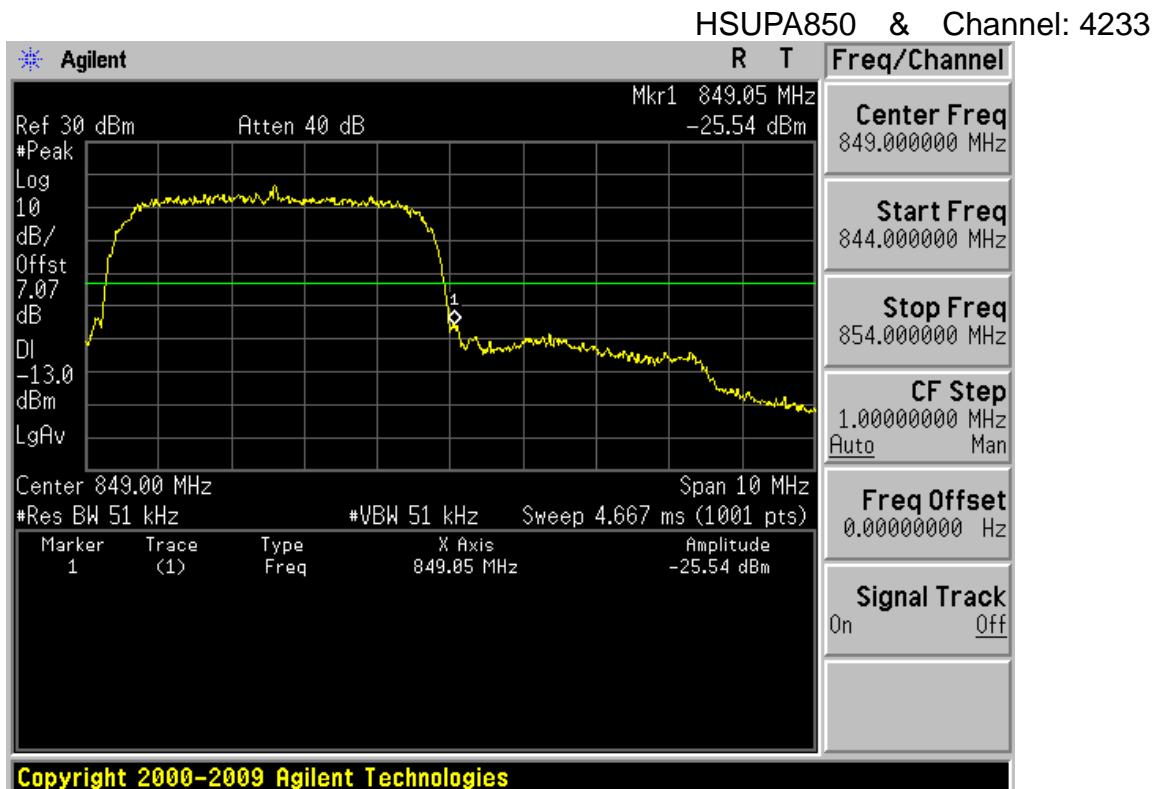


PCS1900 & Channel: 512

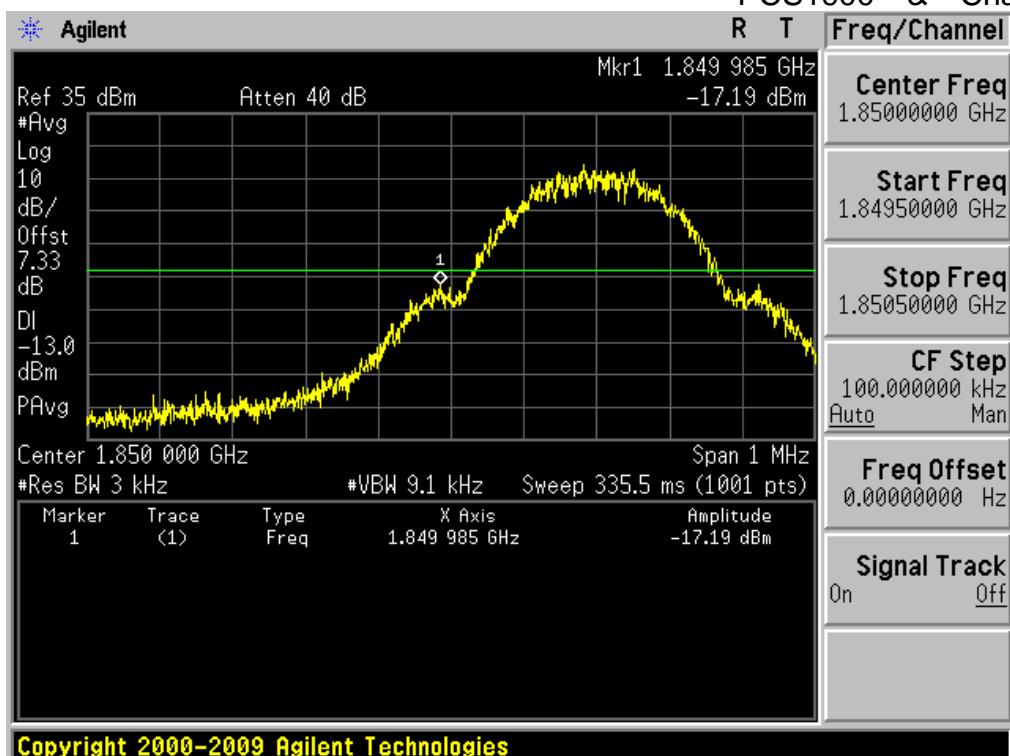


PCS1900 & Channel: 810


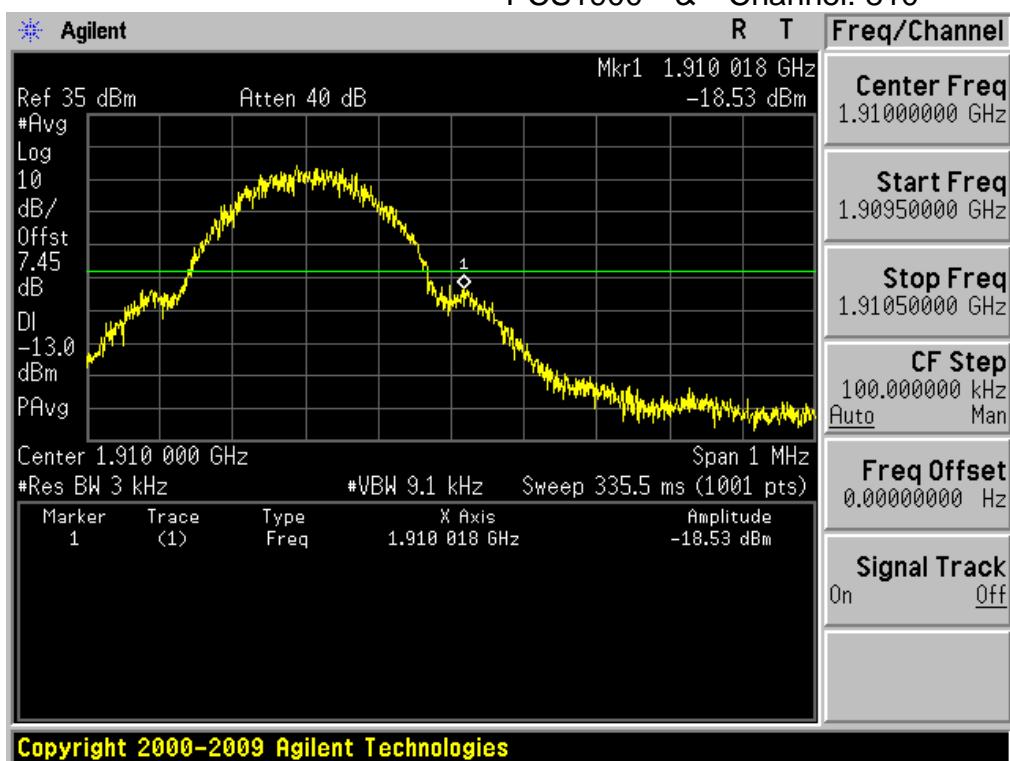


WCDMA1900 & Channel: 9262

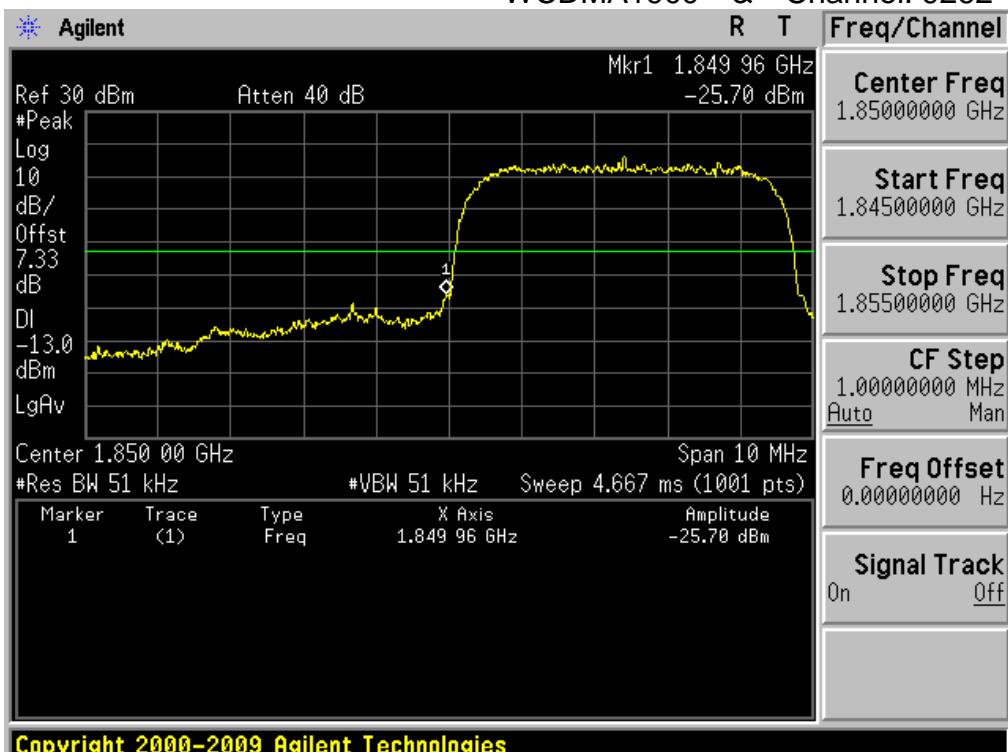


WCDMA1900 & Channel: 9262

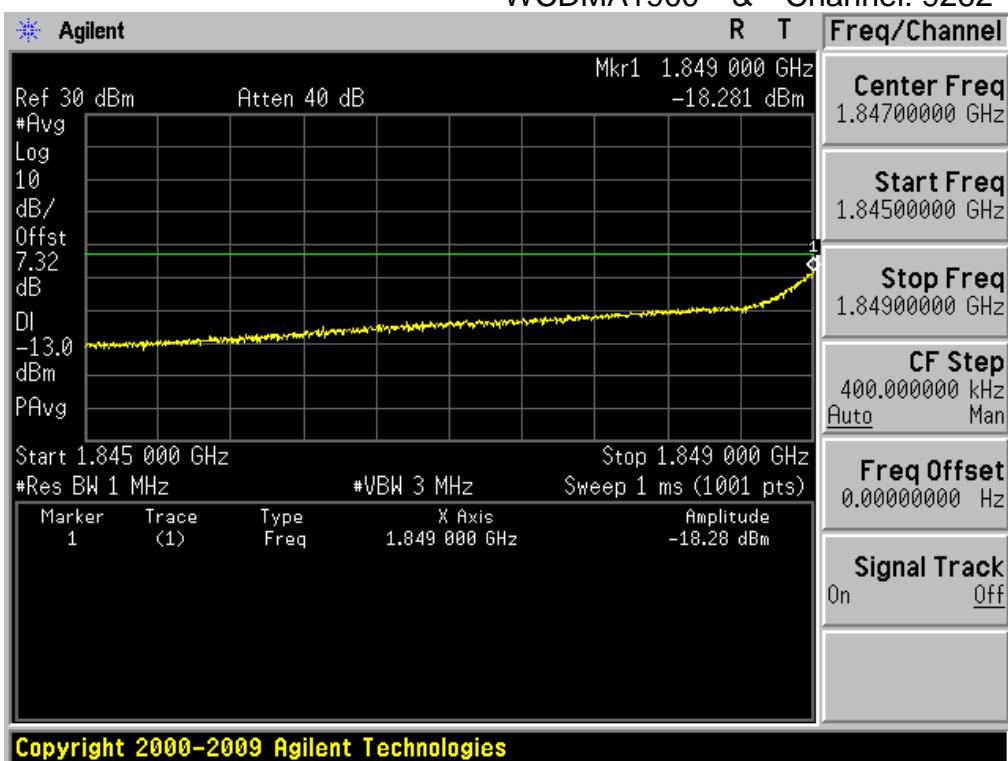

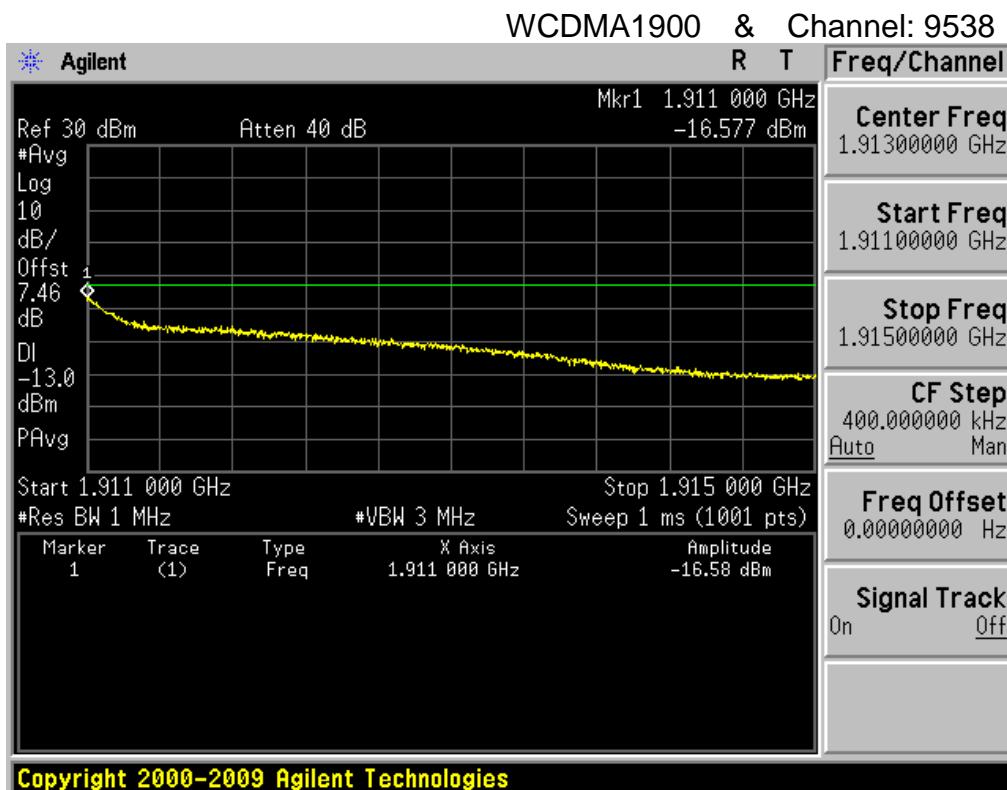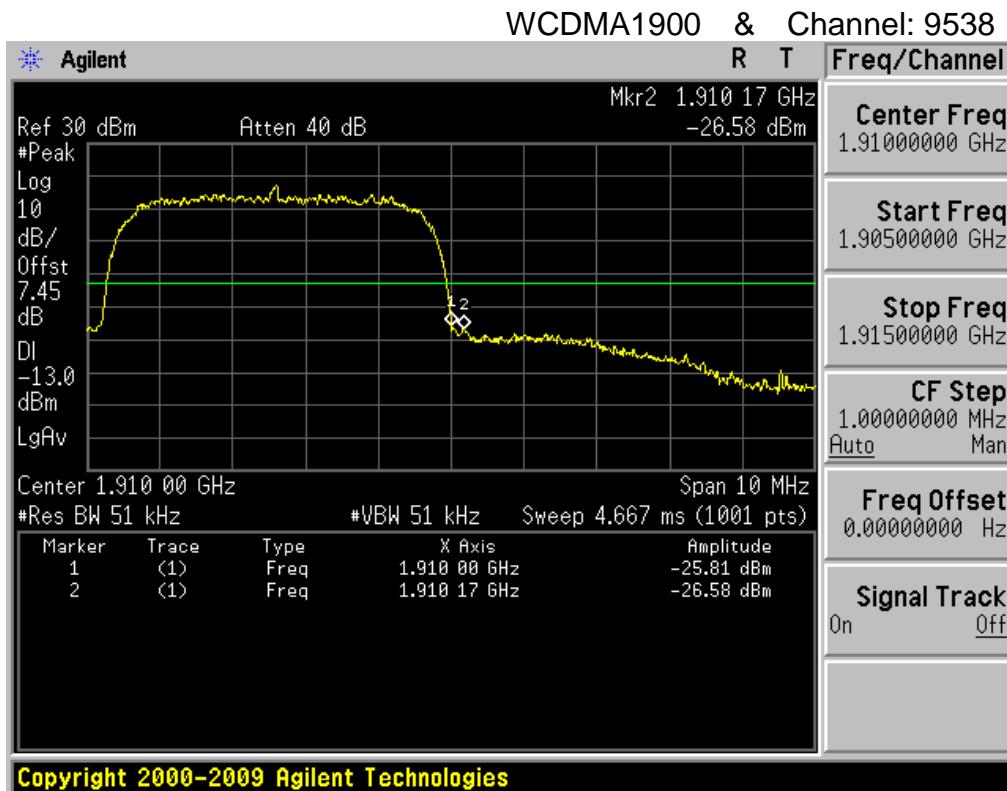

HSUPA1900 & Channel: 9262

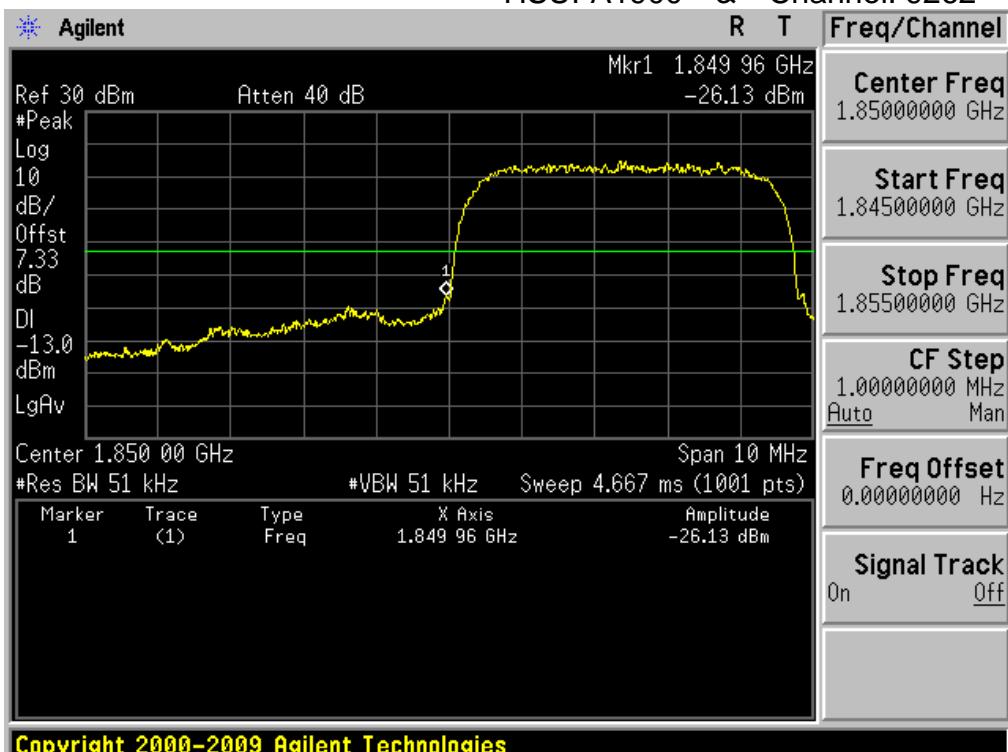

HSUPA1900 & Channel: 9262



HSUPA1900 & Channel: 9538



HSUPA1900 & Channel: 9538

