

1900MHz Body

Error Description	Uncertainty Value ± %	Probability distribution	Divisor	ci (1g)	Standard uncertainty ±%,(1g)	vi or v _{eff}
Measurement System						
Probe Calibration	± 6.0	N	1	1	± 6.0	∞
Axial Isotropy	± 4.7	R	$\sqrt{3}$	0.7	± 1.9	∞
Hemispherical Isotropy	± 9.6	R	$\sqrt{3}$	0.7	± 3.9	∞
Boundary Effect	± 1.0	R	$\sqrt{3}$	1	± 0.6	∞
Linearity	± 4.7	R	$\sqrt{3}$	1	± 2.7	∞
System Detection Limits	± 1.0	R	$\sqrt{3}$	1	± 0.6	∞
Readout Electronics	± 0.3	N	1	1	± 0.3	∞
Response Time	± 0.8	R	$\sqrt{3}$	1	± 0.5	∞
Integration Time	± 2.6	R	$\sqrt{3}$	1	± 1.5	∞
RF Ambient Noise	± 3.0	R	$\sqrt{3}$	1	± 1.7	∞
RF Ambient Reflections	± 3.0	R	$\sqrt{3}$	1	± 1.7	∞
Probe Positioner	± 0.4	R	$\sqrt{3}$	1	± 0.2	∞
Probe Positioning	± 2.9	R	$\sqrt{3}$	1	± 1.7	∞
Max. SAR Eval.	± 1.0	R	$\sqrt{3}$	1	± 0.6	∞
Test sample related						
Device Positioning	± 2.9	N	1	1	± 2.9	145
Device Holder	± 3.6	N	1	1	± 3.6	5
Power Drift	± 5.0	R	$\sqrt{3}$	1	± 2.9	∞
Phantom and set-up						
Phantom Uncertainty	± 4.0	R	$\sqrt{3}$	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	R	$\sqrt{3}$	0.64	± 1.8	∞
Liquid conductivity (meas.)	± 2.5	R	1	0.64	± 1.6	∞
Liquid permittivity (target)	± 5.0	R	$\sqrt{3}$	0.6	± 1.7	∞
Liquid permittivity (meas.)	± 2.2	R	1	0.6	± 1.3	∞
Combined Std. Uncertainty					± 12.0	387
Expanded uncertainty (95% confidence interval)					± 24.0	

2450MHz Head

Error Description	Uncertainty Value ± %	Probability distribution	Divisor	ci (1g)	Standard uncertainty ±%,(1g)	vi or veff
Measurement System						
Probe Calibration	± 6.0	N	1	1	± 6.0	∞
Axial Isotropy	± 4.7	R	$\sqrt{3}$	0.7	± 1.9	∞
Hemispherical Isotropy	± 9.6	R	$\sqrt{3}$	0.7	± 3.9	∞
Boundary Effect	± 1.0	R	$\sqrt{3}$	1	± 0.6	∞
Linearity	± 4.7	R	$\sqrt{3}$	1	± 2.7	∞
System Detection Limits	± 1.0	R	$\sqrt{3}$	1	± 0.6	∞
Readout Electronics	± 0.3	N	1	1	± 0.3	∞
Response Time	± 0.8	R	$\sqrt{3}$	1	± 0.5	∞
Integration Time	± 2.6	R	$\sqrt{3}$	1	± 1.5	∞
RF Ambient Noise	± 3.0	R	$\sqrt{3}$	1	± 1.7	∞
RF Ambient Reflections	± 3.0	R	$\sqrt{3}$	1	± 1.7	∞
Probe Positioner	± 0.4	R	$\sqrt{3}$	1	± 0.2	∞
Probe Positioning	± 2.9	R	$\sqrt{3}$	1	± 1.7	∞
Max. SAR Eval.	± 1.0	R	$\sqrt{3}$	1	± 0.6	∞
Test sample related						
Device Positioning	± 2.9	N	1	1	± 2.9	145
Device Holder	± 3.6	N	1	1	± 3.6	5
Power Drift	± 5.0	R	$\sqrt{3}$	1	± 2.9	∞
Phantom and set-up						
Phantom Uncertainty	± 4.0	R	$\sqrt{3}$	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	R	$\sqrt{3}$	0.64	± 1.8	∞
Liquid conductivity (meas.)	± 0.6	R	1	0.64	± 0.4	∞
Liquid permittivity (target)	± 5.0	R	$\sqrt{3}$	0.6	± 1.7	∞
Liquid permittivity (meas.)	± 2.3	R	1	0.6	± 1.4	∞
Combined Std. Uncertainty					± 10.9	387
Expanded uncertainty (95% confidence interval)					± 21.8	

2450MHz Body

Error Description	Uncertainty Value ± %	Probability distribution	Divisor	ci (1g)	Standard uncertainty ±%,(1g)	vi or veff
Measurement System						
Probe Calibration	± 6.0	N	1	1	± 6.0	∞
Axial Isotropy	± 4.7	R	$\sqrt{3}$	0.7	± 1.9	∞
Hemispherical Isotropy	± 9.6	R	$\sqrt{3}$	0.7	± 3.9	∞
Boundary Effect	± 1.0	R	$\sqrt{3}$	1	± 0.6	∞
Linearity	± 4.7	R	$\sqrt{3}$	1	± 2.7	∞
System Detection Limits	± 1.0	R	$\sqrt{3}$	1	± 0.6	∞
Readout Electronics	± 0.3	N	1	1	± 0.3	∞
Response Time	± 0.8	R	$\sqrt{3}$	1	± 0.5	∞
Integration Time	± 2.6	R	$\sqrt{3}$	1	± 1.5	∞
RF Ambient Noise	± 3.0	R	$\sqrt{3}$	1	± 1.7	∞
RF Ambient Reflections	± 3.0	R	$\sqrt{3}$	1	± 1.7	∞
Probe Positioner	± 0.4	R	$\sqrt{3}$	1	± 0.2	∞
Probe Positioning	± 2.9	R	$\sqrt{3}$	1	± 1.7	∞
Max. SAR Eval.	± 1.0	R	$\sqrt{3}$	1	± 0.6	∞
Test sample related						
Device Positioning	± 2.9	N	1	1	± 2.9	145
Device Holder	± 3.6	N	1	1	± 3.6	5
Power Drift	± 5.0	R	$\sqrt{3}$	1	± 2.9	∞
Phantom and set-up						
Phantom Uncertainty	± 4.0	R	$\sqrt{3}$	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	R	$\sqrt{3}$	0.64	± 1.8	∞
Liquid conductivity (meas.)	± 3.3	R	1	0.64	± 2.1	∞
Liquid permittivity (target)	± 5.0	R	$\sqrt{3}$	0.6	± 1.7	∞
Liquid permittivity (meas.)	± 0.8	R	1	0.6	± 0.5	∞
Combined Std. Uncertainty					± 11.6	387
Expanded uncertainty (95% confidence interval)					± 23.2	

5200MHz Head

Error Description	Uncertainty Value ± %	Probability distribution	Divisor	ci (1g)	Standard uncertainty ±%,(1g)	vi or veff
Measurement System						
Probe Calibration	± 6.55	N	1	1	± 6.55	∞
Axial Isotropy	± 4.7	R	$\sqrt{3}$	0.7	± 1.9	∞
Hemispherical Isotropy	± 9.6	R	$\sqrt{3}$	0.7	± 3.9	∞
Boundary Effect	± 2.0	R	$\sqrt{3}$	1	± 1.2	∞
Linearity	± 4.7	R	$\sqrt{3}$	1	± 2.7	∞
System Detection Limits	± 1.0	R	$\sqrt{3}$	1	± 0.6	∞
Readout Electronics	± 0.3	N	1	1	± 0.3	∞
Response Time	± 0.8	R	$\sqrt{3}$	1	± 0.5	∞
Integration Time	± 2.6	R	$\sqrt{3}$	1	± 1.5	∞
RF Ambient Noise	± 3.0	R	$\sqrt{3}$	1	± 1.7	∞
RF Ambient Reflections	± 3.0	R	$\sqrt{3}$	1	± 1.7	∞
Probe Positioner	± 0.8	R	$\sqrt{3}$	1	± 0.5	∞
Probe Positioning	± 6.7	R	$\sqrt{3}$	1	± 3.9	∞
Max. SAR Eval.	± 4.0	R	$\sqrt{3}$	1	± 2.3	∞
Test sample related						
Device Positioning	± 2.9	N	1	1	± 2.9	145
Device Holder	± 3.6	N	1	1	± 3.6	5
Power Drift	± 5.0	R	$\sqrt{3}$	1	± 2.9	∞
Phantom and set-up						
Phantom Uncertainty	± 4.0	R	$\sqrt{3}$	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	R	$\sqrt{3}$	0.64	± 1.8	∞
Liquid conductivity (meas.)	± 3.8	R	1	0.64	± 2.4	∞
Liquid permittivity (target)	± 5.0	R	$\sqrt{3}$	0.6	± 1.7	∞
Liquid permittivity (meas.)	± 1.1	R	1	0.6	± 0.7	∞
Combined Std. Uncertainty					± 12.7	330
Expanded uncertainty (95% confidence interval)					± 25.4	

5200MHz Body

Error Description	Uncertainty Value ± %	Probability distribution	Divisor	ci (1g)	Standard uncertainty ±%,(1g)	vi or veff
Measurement System						
Probe Calibration	± 6.55	N	1	1	± 6.55	∞
Axial Isotropy	± 4.7	R	$\sqrt{3}$	0.7	± 1.9	∞
Hemispherical Isotropy	± 9.6	R	$\sqrt{3}$	0.7	± 3.9	∞
Boundary Effect	± 2.0	R	$\sqrt{3}$	1	± 1.2	∞
Linearity	± 4.7	R	$\sqrt{3}$	1	± 2.7	∞
System Detection Limits	± 1.0	R	$\sqrt{3}$	1	± 0.6	∞
Readout Electronics	± 0.3	N	1	1	± 0.3	∞
Response Time	± 0.8	R	$\sqrt{3}$	1	± 0.5	∞
Integration Time	± 2.6	R	$\sqrt{3}$	1	± 1.5	∞
RF Ambient Noise	± 3.0	R	$\sqrt{3}$	1	± 1.7	∞
RF Ambient Reflections	± 3.0	R	$\sqrt{3}$	1	± 1.7	∞
Probe Positioner	± 0.8	R	$\sqrt{3}$	1	± 0.5	∞
Probe Positioning	± 6.7	R	$\sqrt{3}$	1	± 3.9	∞
Max. SAR Eval.	± 4.0	R	$\sqrt{3}$	1	± 2.3	∞
Test sample related						
Device Positioning	± 2.9	N	1	1	± 2.9	145
Device Holder	± 3.6	N	1	1	± 3.6	5
Power Drift	± 5.0	R	$\sqrt{3}$	1	± 2.9	∞
Phantom and set-up						
Phantom Uncertainty	± 4.0	R	$\sqrt{3}$	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	R	$\sqrt{3}$	0.64	± 1.8	∞
Liquid conductivity (meas.)	± 0.7	R	1	0.64	± 0.4	∞
Liquid permittivity (target)	± 5.0	R	$\sqrt{3}$	0.6	± 1.7	∞
Liquid permittivity (meas.)	± 0.3	R	1	0.6	± 0.2	∞
Combined Std. Uncertainty					± 10.8	330
Expanded uncertainty (95% confidence interval)					± 21.6	

5300MHz Head

Error Description	Uncertainty Value ± %	Probability distribution	Divisor	ci (1g)	Standard uncertainty ±%,(1g)	vi or veff
Measurement System						
Probe Calibration	± 6.55	N	1	1	± 6.55	∞
Axial Isotropy	± 4.7	R	$\sqrt{3}$	0.7	± 1.9	∞
Hemispherical Isotropy	± 9.6	R	$\sqrt{3}$	0.7	± 3.9	∞
Boundary Effect	± 2.0	R	$\sqrt{3}$	1	± 1.2	∞
Linearity	± 4.7	R	$\sqrt{3}$	1	± 2.7	∞
System Detection Limits	± 1.0	R	$\sqrt{3}$	1	± 0.6	∞
Readout Electronics	± 0.3	N	1	1	± 0.3	∞
Response Time	± 0.8	R	$\sqrt{3}$	1	± 0.5	∞
Integration Time	± 2.6	R	$\sqrt{3}$	1	± 1.5	∞
RF Ambient Noise	± 3.0	R	$\sqrt{3}$	1	± 1.7	∞
RF Ambient Reflections	± 3.0	R	$\sqrt{3}$	1	± 1.7	∞
Probe Positioner	± 0.8	R	$\sqrt{3}$	1	± 0.5	∞
Probe Positioning	± 6.7	R	$\sqrt{3}$	1	± 3.9	∞
Max. SAR Eval.	± 4.0	R	$\sqrt{3}$	1	± 2.3	∞
Test sample related						
Device Positioning	± 2.9	N	1	1	± 2.9	145
Device Holder	± 3.6	N	1	1	± 3.6	5
Power Drift	± 5.0	R	$\sqrt{3}$	1	± 2.9	∞
Phantom and set-up						
Phantom Uncertainty	± 4.0	R	$\sqrt{3}$	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	R	$\sqrt{3}$	0.64	± 1.8	∞
Liquid conductivity (meas.)	± 3.7	R	1	0.64	± 2.4	∞
Liquid permittivity (target)	± 5.0	R	$\sqrt{3}$	0.6	± 1.7	∞
Liquid permittivity (meas.)	± 1.0	R	1	0.6	± 0.6	∞
Combined Std. Uncertainty					± 13.1	330
Expanded uncertainty (95% confidence interval)					± 26.2	

5300MHz Body

Error Description	Uncertainty Value ± %	Probability distribution	Divisor	ci (1g)	Standard uncertainty ±%,(1g)	vi or veff
Measurement System						
Probe Calibration	± 6.55	N	1	1	± 6.55	∞
Axial Isotropy	± 4.7	R	$\sqrt{3}$	0.7	± 1.9	∞
Hemispherical Isotropy	± 9.6	R	$\sqrt{3}$	0.7	± 3.9	∞
Boundary Effect	± 2.0	R	$\sqrt{3}$	1	± 1.2	∞
Linearity	± 4.7	R	$\sqrt{3}$	1	± 2.7	∞
System Detection Limits	± 1.0	R	$\sqrt{3}$	1	± 0.6	∞
Readout Electronics	± 0.3	N	1	1	± 0.3	∞
Response Time	± 0.8	R	$\sqrt{3}$	1	± 0.5	∞
Integration Time	± 2.6	R	$\sqrt{3}$	1	± 1.5	∞
RF Ambient Noise	± 3.0	R	$\sqrt{3}$	1	± 1.7	∞
RF Ambient Reflections	± 3.0	R	$\sqrt{3}$	1	± 1.7	∞
Probe Positioner	± 0.8	R	$\sqrt{3}$	1	± 0.5	∞
Probe Positioning	± 6.7	R	$\sqrt{3}$	1	± 3.9	∞
Max. SAR Eval.	± 4.0	R	$\sqrt{3}$	1	± 2.3	∞
Test sample related						
Device Positioning	± 2.9	N	1	1	± 2.9	145
Device Holder	± 3.6	N	1	1	± 3.6	5
Power Drift	± 5.0	R	$\sqrt{3}$	1	± 2.9	∞
Phantom and set-up						
Phantom Uncertainty	± 4.0	R	$\sqrt{3}$	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	R	$\sqrt{3}$	0.64	± 1.8	∞
Liquid conductivity (meas.)	± 1.0	R	1	0.64	± 0.6	∞
Liquid permittivity (target)	± 5.0	R	$\sqrt{3}$	0.6	± 1.7	∞
Liquid permittivity (meas.)	± 0.1	R	1	0.6	± 0.1	∞
Combined Std. Uncertainty					± 10.7	330
Expanded uncertainty (95% confidence interval)					± 21.4	

5500MHz Head

Error Description	Uncertainty Value ± %	Probability distribution	Divisor	ci (1g)	Standard uncertainty ±%,(1g)	vi or veff
Measurement System						
Probe Calibration	± 6.55	N	1	1	± 6.55	∞
Axial Isotropy	± 4.7	R	$\sqrt{3}$	0.7	± 1.9	∞
Hemispherical Isotropy	± 9.6	R	$\sqrt{3}$	0.7	± 3.9	∞
Boundary Effect	± 2.0	R	$\sqrt{3}$	1	± 1.2	∞
Linearity	± 4.7	R	$\sqrt{3}$	1	± 2.7	∞
System Detection Limits	± 1.0	R	$\sqrt{3}$	1	± 0.6	∞
Readout Electronics	± 0.3	N	1	1	± 0.3	∞
Response Time	± 0.8	R	$\sqrt{3}$	1	± 0.5	∞
Integration Time	± 2.6	R	$\sqrt{3}$	1	± 1.5	∞
RF Ambient Noise	± 3.0	R	$\sqrt{3}$	1	± 1.7	∞
RF Ambient Reflections	± 3.0	R	$\sqrt{3}$	1	± 1.7	∞
Probe Positioner	± 0.8	R	$\sqrt{3}$	1	± 0.5	∞
Probe Positioning	± 6.7	R	$\sqrt{3}$	1	± 3.9	∞
Max. SAR Eval.	± 4.0	R	$\sqrt{3}$	1	± 2.3	∞
Test sample related						
Device Positioning	± 2.9	N	1	1	± 2.9	145
Device Holder	± 3.6	N	1	1	± 3.6	5
Power Drift	± 5.0	R	$\sqrt{3}$	1	± 2.9	∞
Phantom and set-up						
Phantom Uncertainty	± 4.0	R	$\sqrt{3}$	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	R	$\sqrt{3}$	0.64	± 1.8	∞
Liquid conductivity (meas.)	± 3.0	R	1	0.64	± 1.9	∞
Liquid permittivity (target)	± 5.0	R	$\sqrt{3}$	0.6	± 1.7	∞
Liquid permittivity (meas.)	± 1.2	R	1	0.6	± 0.7	∞
Combined Std. Uncertainty					± 12.8	330
Expanded uncertainty (95% confidence interval)					± 25.6	

5500MHz Body

Error Description	Uncertainty Value ± %	Probability distribution	Divisor	ci (1g)	Standard uncertainty ±%,(1g)	vi or veff
Measurement System						
Probe Calibration	± 6.55	N	1	1	± 6.55	∞
Axial Isotropy	± 4.7	R	$\sqrt{3}$	0.7	± 1.9	∞
Hemispherical Isotropy	± 9.6	R	$\sqrt{3}$	0.7	± 3.9	∞
Boundary Effect	± 2.0	R	$\sqrt{3}$	1	± 1.2	∞
Linearity	± 4.7	R	$\sqrt{3}$	1	± 2.7	∞
System Detection Limits	± 1.0	R	$\sqrt{3}$	1	± 0.6	∞
Readout Electronics	± 0.3	N	1	1	± 0.3	∞
Response Time	± 0.8	R	$\sqrt{3}$	1	± 0.5	∞
Integration Time	± 2.6	R	$\sqrt{3}$	1	± 1.5	∞
RF Ambient Noise	± 3.0	R	$\sqrt{3}$	1	± 1.7	∞
RF Ambient Reflections	± 3.0	R	$\sqrt{3}$	1	± 1.7	∞
Probe Positioner	± 0.8	R	$\sqrt{3}$	1	± 0.5	∞
Probe Positioning	± 6.7	R	$\sqrt{3}$	1	± 3.9	∞
Max. SAR Eval.	± 4.0	R	$\sqrt{3}$	1	± 2.3	∞
Test sample related						
Device Positioning	± 2.9	N	1	1	± 2.9	145
Device Holder	± 3.6	N	1	1	± 3.6	5
Power Drift	± 5.0	R	$\sqrt{3}$	1	± 2.9	∞
Phantom and set-up						
Phantom Uncertainty	± 4.0	R	$\sqrt{3}$	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	R	$\sqrt{3}$	0.64	± 1.8	∞
Liquid conductivity (meas.)	± 1.0	R	1	0.64	± 0.6	∞
Liquid permittivity (target)	± 5.0	R	$\sqrt{3}$	0.6	± 1.7	∞
Liquid permittivity (meas.)	± 0.1	R	1	0.6	± 0.1	∞
Combined Std. Uncertainty					± 9.7	330
Expanded uncertainty (95% confidence interval)					± 19.4	



Zacta

16. Conclusion

Measurement Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC. These measurements are taken to simulate the RF effects exposure under the worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested. Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role impossible biological effect are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

17. References

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] Federal Communications Commission, OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields, June 2001.
- [6] IEEE Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [7] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [8] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [9] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. -124.
- [10] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [11] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [12] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [13] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [14] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [15] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [16] W. Gander, Computer mathematick, Birkhaeuser, Basel, 1992.
- [17] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [18] Federal Communications Commission, OET Bulletin 65, Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields. Supplement C, Dec. 1997.
- [19] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [20] CENELEC CLC/SC111B, European Pre standard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [21] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [22] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.
- [23] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radio communication Apparatus (All Frequency Bands) Issue 4, March 2010.
- [24] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [25] FCC Public Notice DA-02-1438. Office of Engineering and Technology Announces a Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65, June 19, 2002
- [26] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01 v03, D05 v02r03, D05A v01r01, D06 v02
- [27] SAR Measurement procedures for IEEE 802.11a/b/g KDB Publication 248227 D01v01r02
- [28] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D02-D04



Zacta

- [29] FCC SAR Evaluation Considerations for Laptop, Notebook, Net book and Tablet Computers, FCC KDB Publication 616217 D04
- [30] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [31] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [32] 615223 D01 802 16e WiMax SAR Guidance v01, Nov. 13, 2009
- [33] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [34] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

Attachment 1. Probe calibration data

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PTT**

Certificate No: **EX3-3745_Apr14/2**

CALIBRATION CERTIFICATE (Replacement of No: EX3-3745_Apr14)

Object **EX3DV4 - SN:3745**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-12.v9, QA CAL-14.v4, QA CAL-23.v5,
QA CAL-25.v6
Calibration procedure for dosimetric E-field probes**



Calibration date: **April 15, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	03-Apr-14 (No. 217-01911)	Apr-15
Power sensor E4412A	MY41498067	03-Apr-14 (No. 217-01911)	Apr-15
Reference 3 dB Attenuator	SN: S5054 (3c)	03-Apr-14 (No. 217-01915)	Apr-15
Reference 20 dB Attenuator	SN: S5277 (20a)	03-Apr-14 (No. 217-01919)	Apr-15
Reference 30 dB Attenuator	SN: S5129 (30b)	03-Apr-14 (No. 217-01920)	Apr-15
Reference Probe ES3DV2	SN: 3013	30-Dec-13 (No. ES3-3013 Dec13)	Dec-14
DAE4	SN: 680	13-Dec-13 (No. DAE4-680 Dec13)	Dec-14
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8548C	US3642U01700	4-Aug-09 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	LIS37390595	18-Oct-01 (in house check Oct-13)	In house check: Oct-14

Calibrated by:	Name Jeton Kastrati	Function Laboratory Technician	Signature 
Approved by:	Name Katja Pokovic	Function Technical Manager	
			Issued: April 24, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Zacta

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices; Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E^2 -field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).



Zacta

EX3DV4 – SN:3745

April 15, 2014

Probe EX3DV4

SN:3745

Manufactured: March 26, 2010
Calibrated: April 15, 2014

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

EX3DV4- SN:3745

April 15, 2014

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3745

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.48	0.44	0.48	± 10.1 %
DCP (mV) ^B	100.8	99.0	97.5	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	134.8	±2.7 %
		Y	0.0	0.0	1.0		145.0	
		Z	0.0	0.0	1.0		147.8	
10010- CAA	SAR Validation (Square, 100ms, 10ms)	X	8.20	74.3	15.9	10.00	42.3	±0.9 %
		Y	3.04	66.1	13.0		42.6	
		Z	2.97	61.9	11.2		50.3	
10011- CAB	UMTS-FDD (WCDMA)	X	3.47	67.5	18.7	2.91	143.5	±0.9 %
		Y	3.12	64.8	16.8		135.6	
		Z	3.02	64.0	15.9		140.6	
10021- DAB	GSM-FDD (TDMA, GMSK)	X	4.35	75.0	18.6	9.39	126.1	±1.9 %
		Y	1.94	63.6	13.2		81.3	
		Z	5.74	77.3	19.5		134.1	
10028- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	X	45.90	99.7	21.8	3.55	141.7	±1.7 %
		Y	3.84	75.1	14.5		132.4	
		Z	2.54	66.4	10.7		150.0	
10062- CAA	IEEE 802.11a/n WiFi 5 GHz (OFDM, 6 Mbps)	X	10.42	68.9	21.6	11.68	134.8	±3.3 %
		Y	10.08	68.0	20.9		124.5	
		Z	10.65	69.2	21.5		147.4	
10081- CAB	CDMA2000 (1xRTT, RC3)	X	4.09	66.5	18.7	3.97	140.1	±1.2 %
		Y	3.91	65.2	17.6		148.5	
		Z	3.80	64.3	16.7		142.6	
10177- CAC	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	5.10	66.7	19.5	5.73	134.0	±1.7 %
		Y	4.89	65.6	18.6		137.8	
		Z	5.02	65.5	18.3		137.4	
10237- CAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	6.95	72.5	24.7	9.21	148.9	±3.5 %
		Y	6.19	69.5	22.8		147.2	
		Z	7.00	71.2	23.4		129.7	
10274- CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	X	6.11	67.0	18.9	4.87	133.5	±1.7 %
		Y	5.78	65.7	17.9		124.9	
		Z	5.06	65.6	17.7		130.2	
10291- AAB	CDMA2000, RC3, SO55, Full Rate	X	3.77	67.0	18.7	3.46	130.3	±0.9 %
		Y	3.49	65.0	17.2		138.6	
		Z	3.41	64.2	16.4		132.8	
10292- AAB	CDMA2000, RC3, SO32, Full Rate	X	3.72	67.1	18.7	3.39	132.0	±0.9 %
		Y	3.45	65.1	17.1		144.5	
		Z	3.34	64.0	16.2		134.1	

Certificate No: EX3-3745_Apr14/2

Page 4 of 12

EX3DV4– SN:3745

April 15, 2014

10302-AAA	IEEE 802.16e WIMAX (20MHz, 5ms, QPSK, PUSC, 3 CTRL symbols)	X	12.42	73.2	27.5	12.57	127.0	±3.5 %
		Y	11.20	69.6	24.7		125.9	
		Z	13.11	74.8	28.1		136.8	
10315-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	X	3.10	70.0	19.4	1.71	137.6	±0.7 %
		Y	2.45	64.8	16.1		130.3	
		Z	2.33	63.5	14.8		139.4	
10316-AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)	X	10.24	68.8	21.4	8.36	137.3	±3.5 %
		Y	10.22	68.7	21.1		149.7	
		Z	10.25	68.5	21.0		140.8	
10317-AAA	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)	X	10.26	68.9	21.4	8.36	139.5	±3.5 %
		Y	9.87	67.8	20.6		124.8	
		Z	10.30	68.7	21.0		143.4	
10403-AAB	CDMA2000 (1xEV-DO, Rev. 0)	X	5.12	69.1	19.1	3.76	145.9	±0.9 %
		Y	4.64	67.0	17.6		134.0	
		Z	4.59	65.9	16.9		148.4	
10404-AAB	CDMA2000 (1xEV-DO, Rev. A)	X	5.03	69.1	19.2	3.77	142.2	±0.9 %
		Y	4.56	67.1	17.7		131.0	
		Z	4.59	66.2	17.0		145.7	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

⁴ The uncertainties of Norm X, Y, Z do not affect the E²-field uncertainty inside TSE (see Pages 6 and 7).

⁵ Numerical linearization parameter: uncertainty not required.

⁶ Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4- SN:3745

April 15, 2014

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3745

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
300	45.3	0.87	10.94	10.94	10.94	0.10	1.10	± 13.3 %
450	43.5	0.87	9.21	9.21	9.21	0.18	1.20	± 13.3 %
750	41.9	0.89	9.38	9.38	9.38	0.31	1.07	± 12.0 %
900	41.5	0.97	8.92	8.92	8.92	0.42	0.86	± 12.0 %
1450	40.5	1.20	8.10	8.10	8.10	0.77	0.61	± 12.0 %
1750	40.1	1.37	7.64	7.64	7.64	0.71	0.65	± 12.0 %
1950	40.0	1.40	7.12	7.12	7.12	0.76	0.61	± 12.0 %
2450	39.2	1.80	6.70	6.70	6.70	0.37	0.86	± 12.0 %
5250	35.9	4.71	4.68	4.68	4.68	0.35	1.80	± 13.1 %
5600	35.5	5.07	4.34	4.34	4.34	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.23	4.23	4.23	0.40	1.80	± 13.1 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-8 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4– SN:3745

April 15, 2014

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3745

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^e	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha ^g	Depth (mm) ^g	Unct. (k=2)
750	55.5	0.96	8.96	8.96	8.96	0.41	0.90	± 12.0 %
900	55.0	1.05	8.67	8.67	8.67	0.45	0.84	± 12.0 %
1450	54.0	1.30	7.60	7.60	7.60	0.56	0.73	± 12.0 %
1750	53.4	1.49	7.25	7.25	7.25	0.80	0.62	± 12.0 %
1950	53.3	1.52	7.21	7.21	7.21	0.58	0.71	± 12.0 %
2450	52.7	1.95	6.66	6.66	6.66	0.80	0.50	± 12.0 %
5250	48.9	5.36	4.19	4.19	4.19	0.40	1.90	± 13.1 %
5600	48.5	5.77	3.70	3.70	3.70	0.50	1.90	± 13.1 %
5800	48.2	6.00	3.88	3.88	3.88	0.50	1.90	± 13.1 %

^c Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^e At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.




Zacta

EX3DV4- SN:3745

April 15, 2014

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

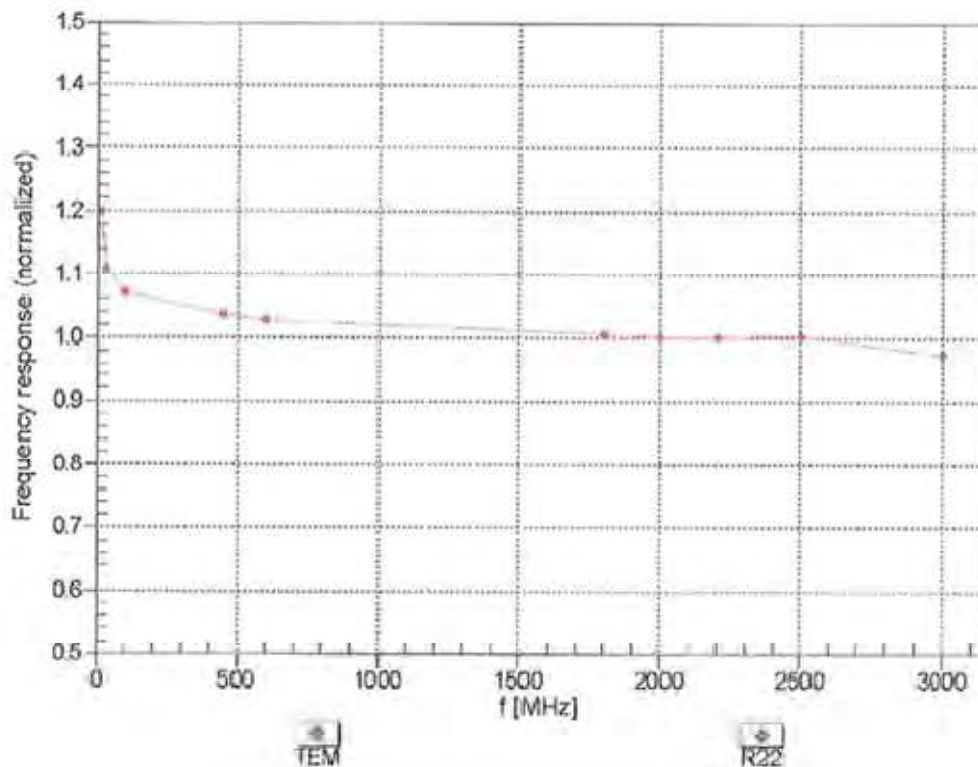

Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)



EX3DV4- SN:3745

April 15, 2014

Receiving Pattern (ϕ), $\theta = 0^\circ$



f=600 MHz,TEM

f=1800 MHz,R22

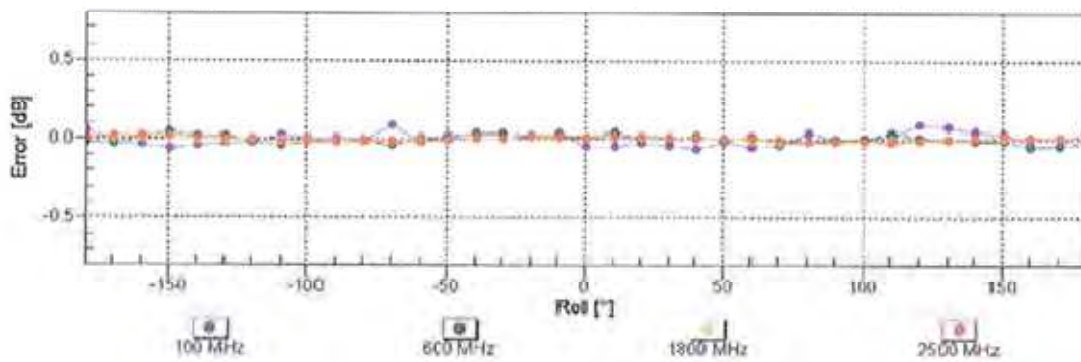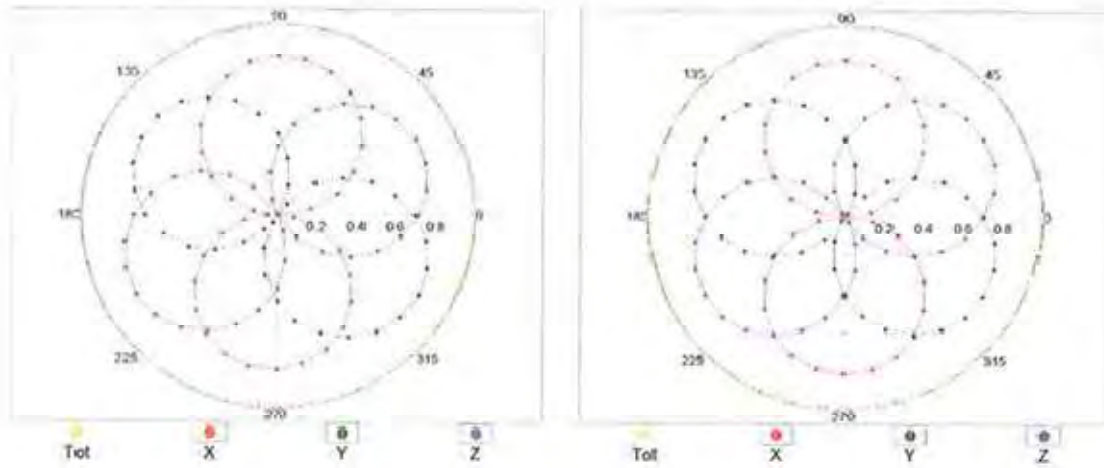

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

Dynamic Range f(SAR_{head}) (TEM cell , f_{eval}= 1900 MHz)

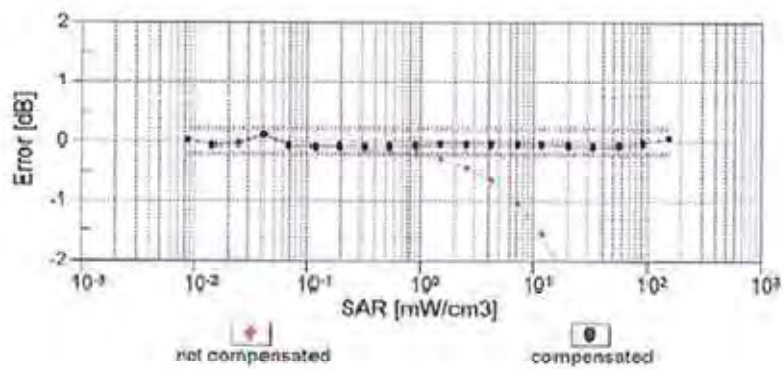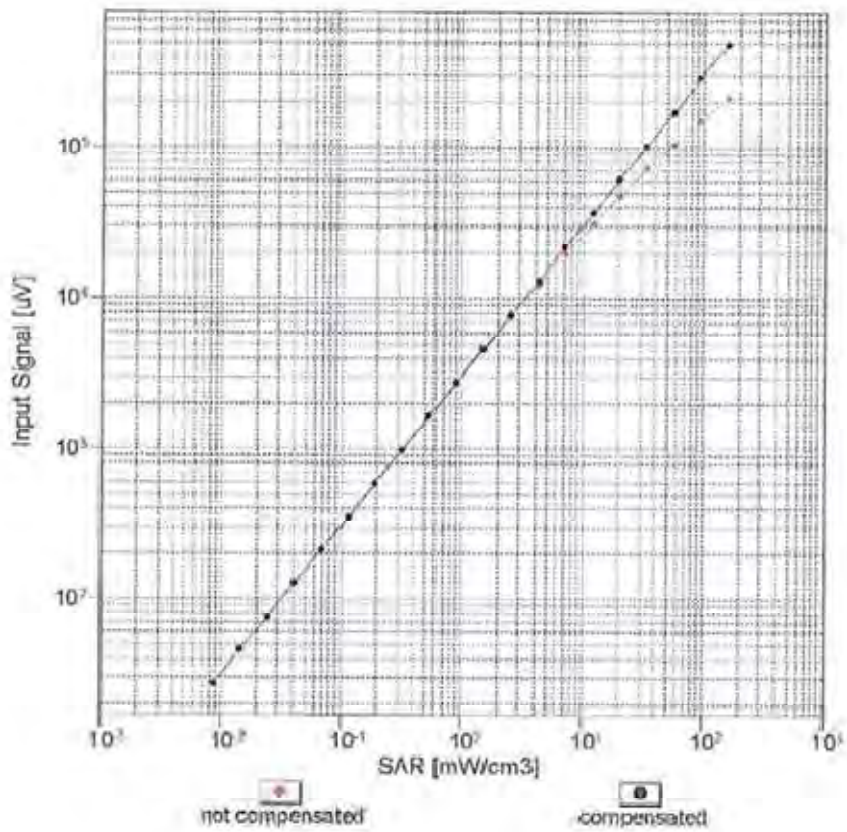


Uncertainty of Linearity Assessment: ± 0.6% (k=2)



EX3DV4-- SN:3745

April 15, 2014

Conversion Factor Assessment

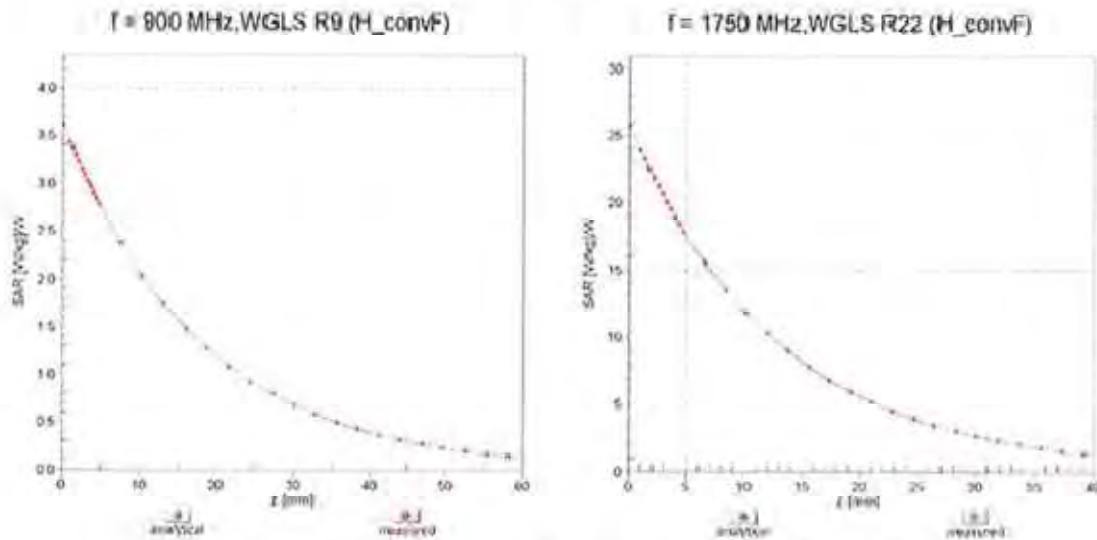

Deviation from Isotropy in Liquid Error (ϕ, θ), f = 900 MHz

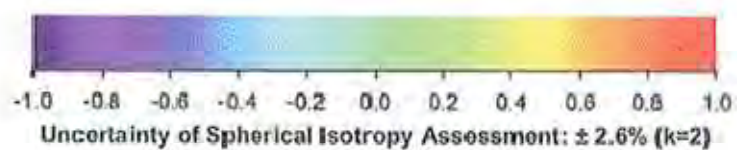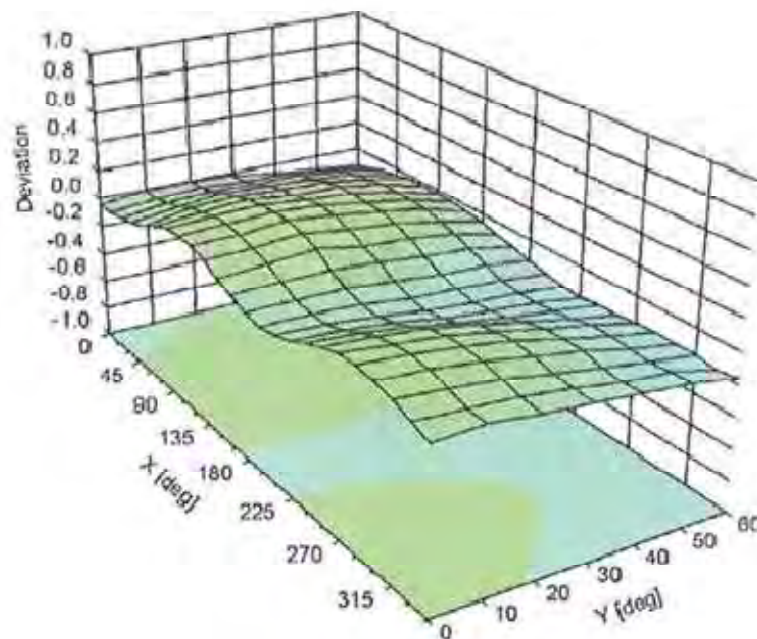



Zacta

EX3DV4– SN:3745

April 15, 2014

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3745

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-119.6
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	2 mm



Zacta

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates.

Accreditation No.: **SCS 108**Client **TUV SUD Zacta (Vitec)**Certificate No: **EX3-3957_Dec14**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3957**Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6
Calibration procedure for dosimetric E-field probes**Calibration date: **December 16, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	03-Apr-14 (No. 217-01911)	Apr-15
Power sensor E4412A	MY41498087	03-Apr-14 (No. 217-01911)	Apr-15
Reference 3 dB Attenuator	SN: S5054 (3c)	03-Apr-14 (No. 217-01915)	Apr-15
Reference 20 dB Attenuator	SN: S5277 (29c)	03-Apr-14 (No. 217-01919)	Apr-15
Reference 30 dB Attenuator	SN: S5129 (30b)	03-Apr-14 (No. 217-01920)	Apr-15
Reference Probe ES3DV2	SN: 3013	30-Dec-13 (No. ES3-3013_Dec13)	Dec-14
DAE4	SN: 789	30-Apr-14 (No. DAE4-789_Apr14)	Apr-15
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

	Name	Function	Signature
Calibrated by:	Claudio Leubler	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: December 16, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f < 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).



Zacta

EX3DV4 – SN:3957

December 16, 2014

Probe EX3DV4

SN:3957

Manufactured: August 6, 2013
Calibrated: December 16, 2014

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)



Zacta

EX3DV4- SN:3957

December 16, 2014

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3957

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^{\text{m}}$) ^A	0.46	0.45	0.48	$\pm 10.1 \%$
D _{CP} (mV) ^B	103.9	103.7	102.0	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^L (k=2)
0	CW	X	0.0	0.0	1.0	0.00	155.3	$\pm 3.0 \%$
		Y	0.0	0.0	1.0		147.9	
		Z	0.0	0.0	1.0		156.5	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^L Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4– SN:3957

December 16, 2014

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3957

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth (mm) ^D	Unct. (k=2)
750	41.9	0.89	10.45	10.45	10.45	0.60	0.64	± 12.0 %
835	41.5	0.90	9.97	9.97	9.97	0.61	0.69	± 12.0 %
900	41.5	0.97	9.99	9.99	9.99	0.63	0.67	± 12.0 %
1450	40.5	1.20	8.95	8.95	8.95	0.51	0.82	± 12.0 %
1750	40.1	1.37	8.45	8.45	8.45	0.80	0.57	± 12.0 %
1900	40.0	1.40	8.23	8.23	8.23	0.71	0.57	± 12.0 %
1950	40.0	1.40	7.92	7.92	7.92	0.75	0.57	± 12.0 %
2450	39.2	1.80	7.43	7.43	7.43	0.35	0.82	± 12.0 %
2600	39.0	1.96	7.20	7.20	7.20	0.33	0.92	± 12.0 %
5200	36.0	4.66	5.34	5.34	5.34	0.30	1.80	± 13.1 %
5300	35.9	4.76	5.08	5.08	5.08	0.30	1.80	± 13.1 %
5500	35.6	4.96	4.93	4.93	4.93	0.35	1.80	± 13.1 %
5600	35.5	5.07	4.72	4.72	4.72	0.35	1.80	± 13.1 %
5800	35.3	5.27	4.69	4.69	4.69	0.40	1.80	± 13.1 %

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^d At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^e Alpha/Depth are determined during calibration. SIPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:3957

December 16, 2014

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3957

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth (mm) ^H	Unct. (k=2)
750	55.5	0.96	10.25	10.25	10.25	0.49	0.81	± 12.0 %
835	55.2	0.97	9.84	9.84	9.84	0.77	0.61	± 12.0 %
900	55.0	1.05	9.86	9.86	9.86	0.47	0.79	± 12.0 %
1450	54.0	1.30	8.55	8.55	8.55	0.44	1.04	± 12.0 %
1750	53.4	1.49	8.18	8.18	8.18	0.56	0.71	± 12.0 %
1900	53.3	1.52	7.81	7.81	7.81	0.34	0.95	± 12.0 %
1950	53.3	1.52	7.95	7.95	7.95	0.44	0.82	± 12.0 %
2450	52.7	1.95	7.40	7.40	7.40	0.80	0.58	± 12.0 %
2600	52.5	2.16	7.18	7.18	7.18	0.80	0.50	± 12.0 %
5200	49.0	5.30	4.49	4.49	4.49	0.40	1.90	± 13.1 %
5300	48.9	5.42	4.32	4.32	4.32	0.40	1.90	± 13.1 %
5500	48.6	5.65	4.01	4.01	4.01	0.45	1.90	± 13.1 %
5600	48.5	5.77	3.84	3.84	3.84	0.45	1.90	± 13.1 %
5800	48.2	6.00	4.03	4.03	4.03	0.50	1.90	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.




Zacta

EX3DV4- SN:3957

December 16, 2014

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

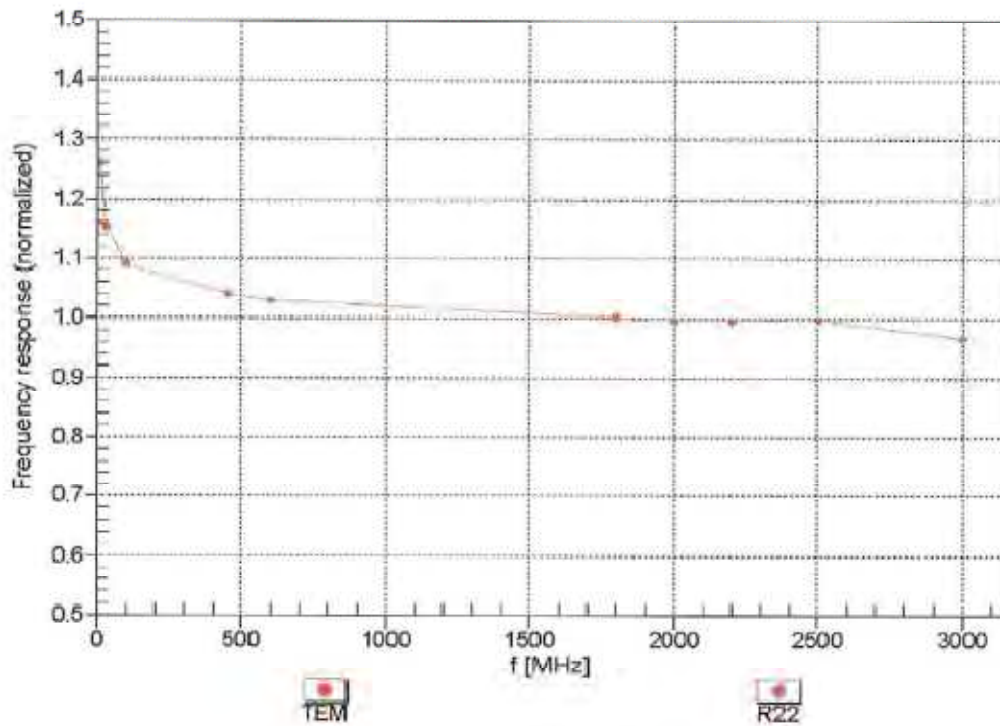


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

EX3DV4-SN:3957



December 16, 2014

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz, TEM

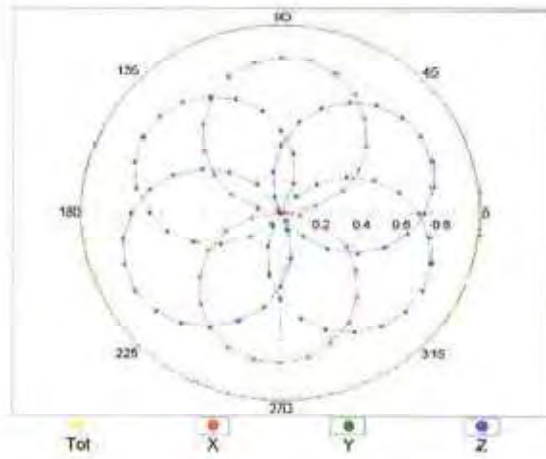

f=1800 MHz, R22

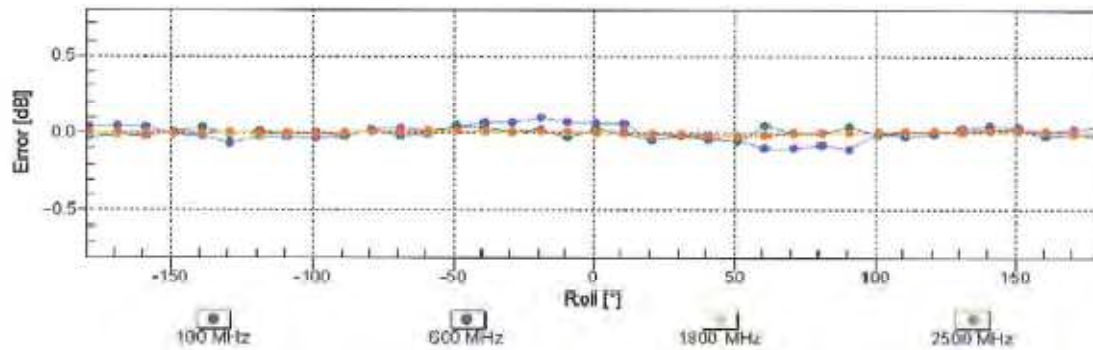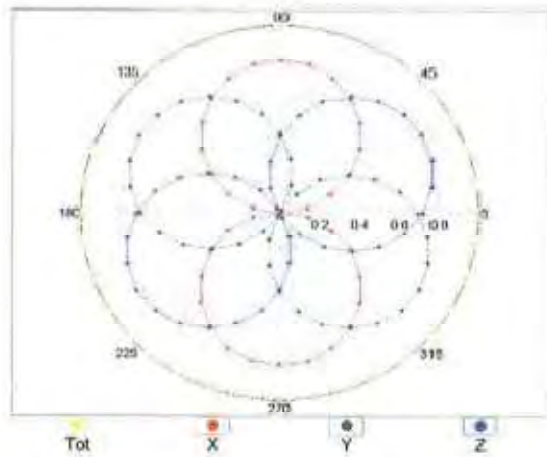

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)





Zacta

EX3DV4 – SN:3957

December 16, 2014

Dynamic Range f(SAR_{head}) (TEM cell, f_{eval}= 1900 MHz)

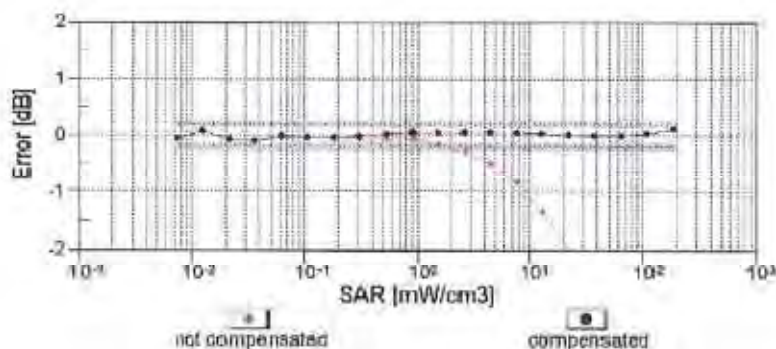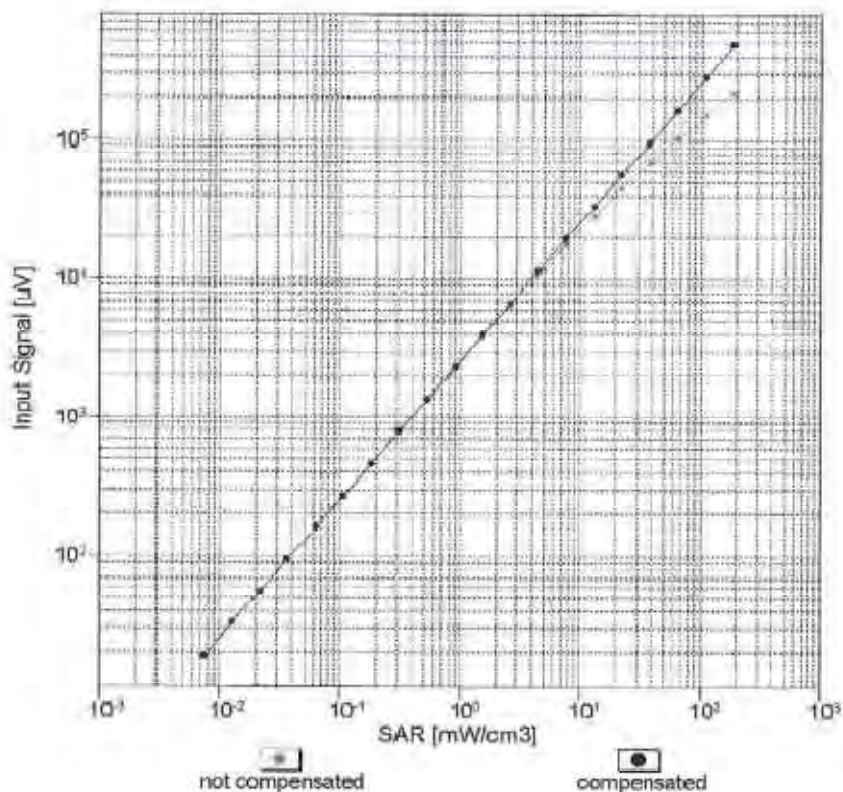


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

EX3DV4- SN:3957


December 16, 2014

Conversion Factor Assessment

f = 900 MHz, WGLS R9 (H_convF)


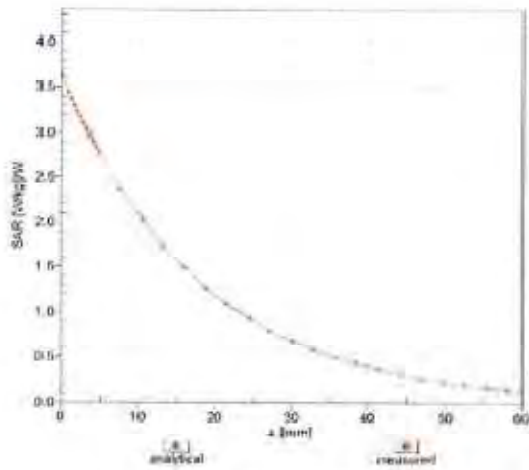


f = 1750 MHz, WGLS R22 (H_convF)

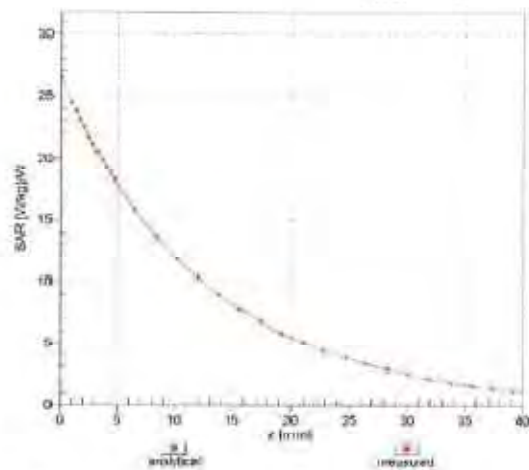

Deviation from Isotropy in Liquid

Error (ϕ, θ), f = 900 MHz

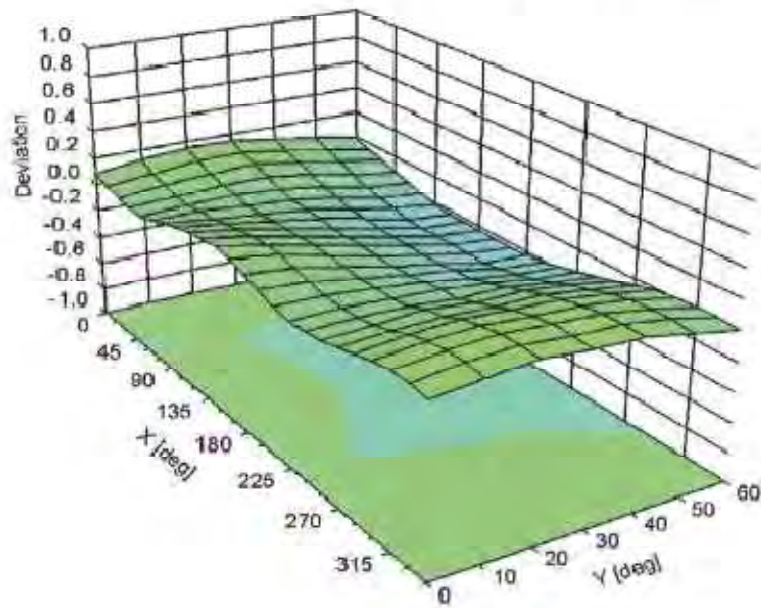

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ (k=2)



Zacta

EX3DV4- SN:3957

December 16, 2014

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3957

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-19
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm



Zacta

Attachment 2. Dipole calibration data

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zoughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client **PTT**

Certificate No: **D750V3-1115_Jun14**

CALIBRATION CERTIFICATE

Object **D750V3 - SN: 1115**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **June 12, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	LIS37292783	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	MY41082317	09-Oct-13 (No. 217-01828)	Oct-14
Reference 20 dB Attenuator	SN: 505B (20k)	03-Apr-14 (No. 217-0191A)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 08327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Probe ES3DV3	SN: 3205	30-Dec-13 (No. ES3-3205_Dec13)	Dec-14
DAE4	SN: 601	30-Apr-14 (No. DAE4-601_Apr14)	Apr-15
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37300585 S4206	18-Oct-01 (in house check Oct-13)	In house check: Oct-14

Calibrated by: **Name** **Function**
Israe El-Naouq **Laboratory Technician**

Approved by: **Name** **Function**
Katja Pokovic **Technical Manager**

Signature

Issued: June 12, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D750V3-1115_Jun14

Page 1 of 8



Zacta

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.B.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	40.4 \pm 6 %	0.92 mho/m \pm 8 %
Head TSL temperature change during test	< 0.5 °C	----	-----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.10 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.13 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.36 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.30 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.5	0.96 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	55.4 \pm 6 %	0.99 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	-----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.17 W/kg
SAR for nominal Body TSL parameters.	normalized to 1W	8.48 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.42 W/kg
SAR for nominal Body TSL parameters:	normalized to 1W	5.57 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.4 Ω - 2.8 j Ω
Return Loss	- 27.4 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	48.0 Ω - 5.2 j Ω
Return Loss	- 24.9 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.033 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	March 15, 2014

DASY5 Validation Report for Head TSL

Date: 12.06.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1115

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.37, 6.37, 6.37); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 53.44 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.19 W/kg


SAR(1 g) = 2.1 W/kg; SAR(10 g) = 1.36 W/kg

Maximum value of SAR (measured) = 2.45 W/kg

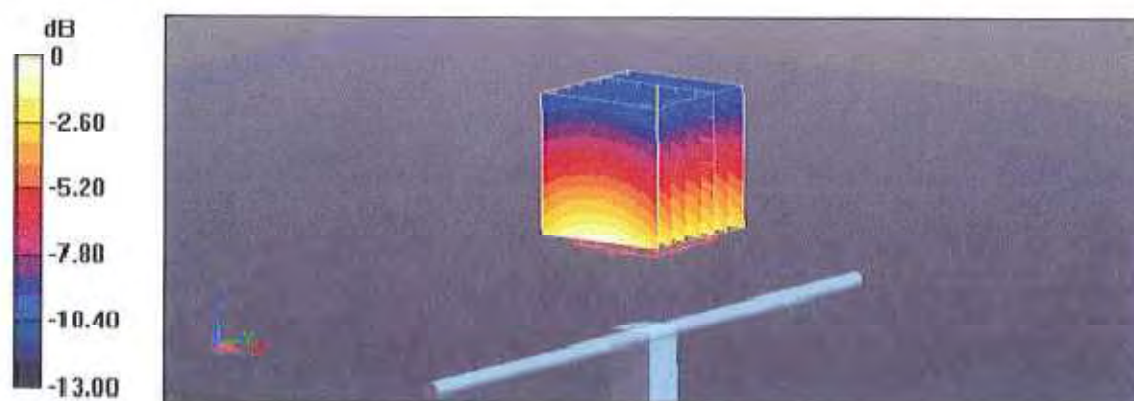

0 dB = 2.45 W/kg = 3.89 dBW/kg

Impedance Measurement Plot for Head TSL

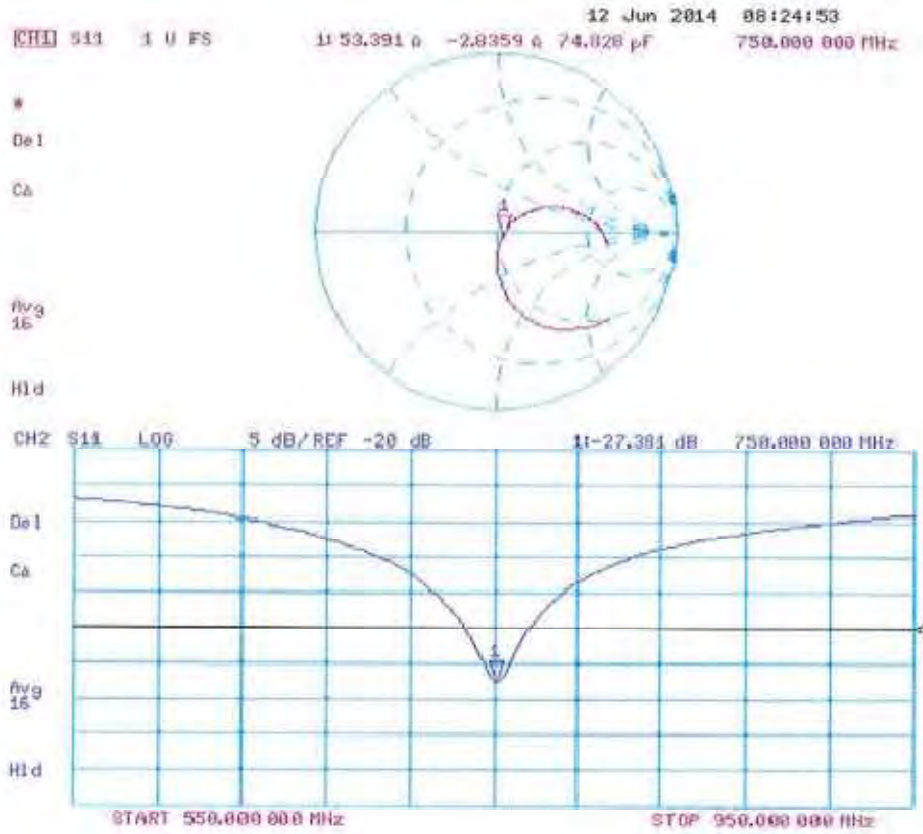

DASY5 Validation Report for Body TSL

Date: 12.06.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1115

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0,99$ S/m; $\epsilon_r = 55,4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.13, 6.13, 6.13); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.43 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.21 W/kg


SAR(1 g) = 2.17 W/kg; SAR(10 g) = 1.42 W/kg

Maximum value of SAR (measured) = 2.53 W/kg

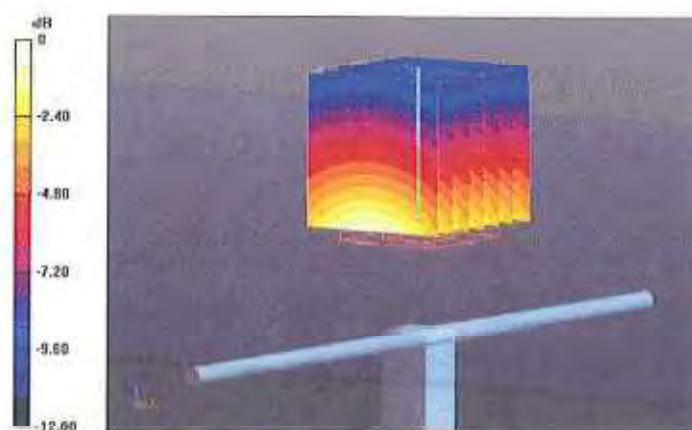

0 dB = 2.53 W/kg = 4.03 dBW/kg

Impedance Measurement Plot for Body TSL

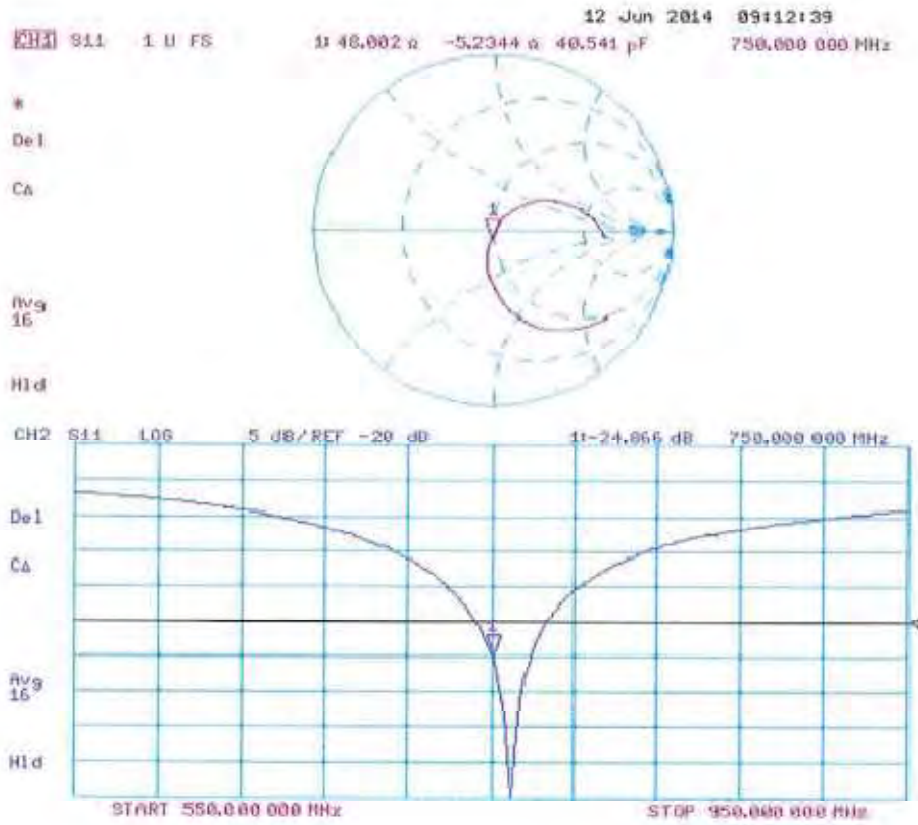



Zacta

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PTT**

Certificate No: **D835V2-4d104_Jun14**

CALIBRATION CERTIFICATE

Object **DB35V2 - SN: 4d104**

Calibration procedure(s) **QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **June 12, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&PE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	US37292783	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	MY41092317	09-Oct-13 (No. 217-01828)	Oct-14
Reference 20 dB Attenuator	SN: 505B (20k)	03-Apr-14 (No. 217-01918)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 06327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Probe ES3DV3	SN: 3205	30-Dec-13 (No. ES3-3205_Dec13)	Dec-14
DAE4	SN: 601	30-Apr-14 (No. DAE4-601_Apr14)	Apr-15
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator B&S SMT-06	100005	04-Aug-09 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-13)	In house check: Oct-14

Calibrated by:	Name Leif Klyaner	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Technical Manager	

Issued: June 16, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Zacta

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	41.5 \pm 6 %	0.94 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.18 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.52 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.93 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	55.2 \pm 6 %	1.01 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.42 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.43 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.57 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.15 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	52.3 Ω - 1.9 j Ω
Return Loss	- 30.7 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.7 Ω - 5.4 j Ω
Return Loss	- 23.7 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.399 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	May 26, 2010

DASY5 Validation Report for Head TSL

Date: 12.06.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d104

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.22, 6.22, 6.22); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.20 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.58 W/kg

SAR(1 g) = 2.37 W/kg; SAR(10 g) = 1.52 W/kg


Maximum value of SAR (measured) = 2.79 W/kg

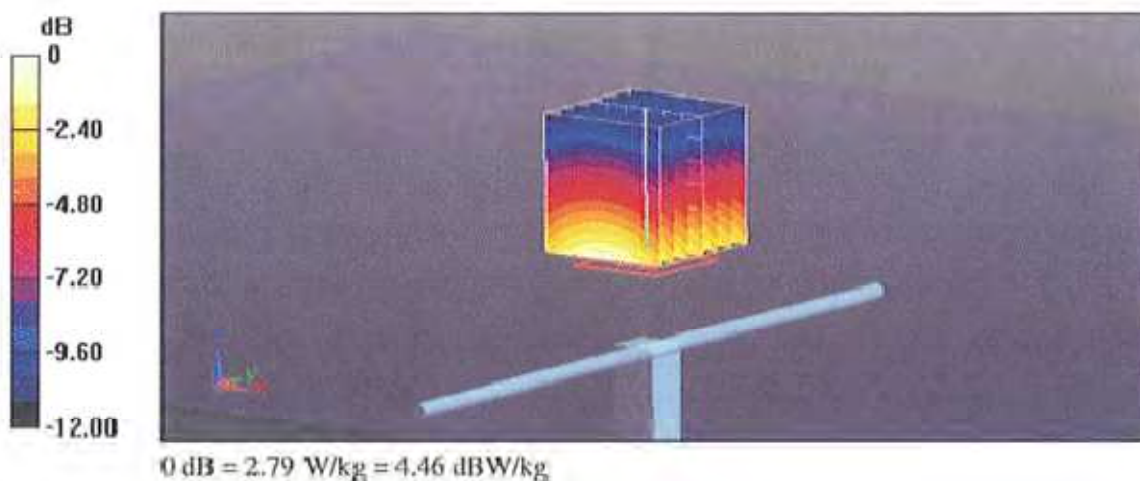



Zacta

Impedance Measurement Plot for Head TSL

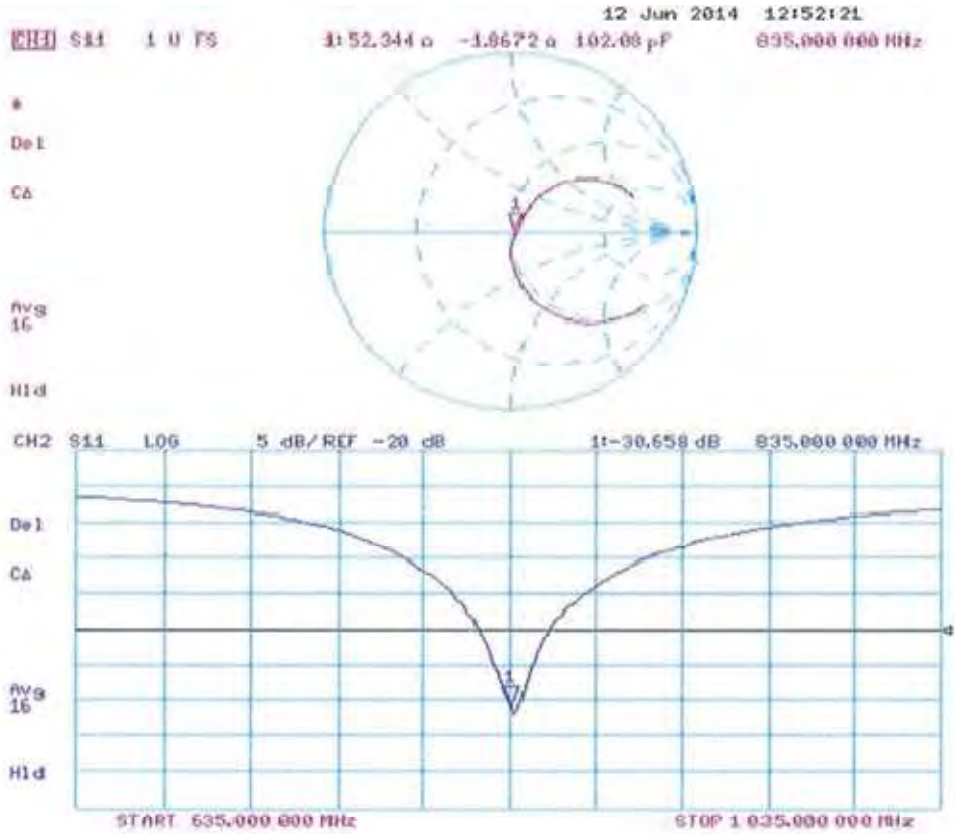

DASY5 Validation Report for Body TSL

Date: 12.06.2014

Test Laboratory: The name of your organization

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d104

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 1.005$ S/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.09, 6.09, 6.09); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.94 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 3.60 W/kg

SAR(1 g) = 2.42 W/kg; SAR(10 g) = 1.57 W/kg

Maximum value of SAR (measured) = 2.82 W/kg

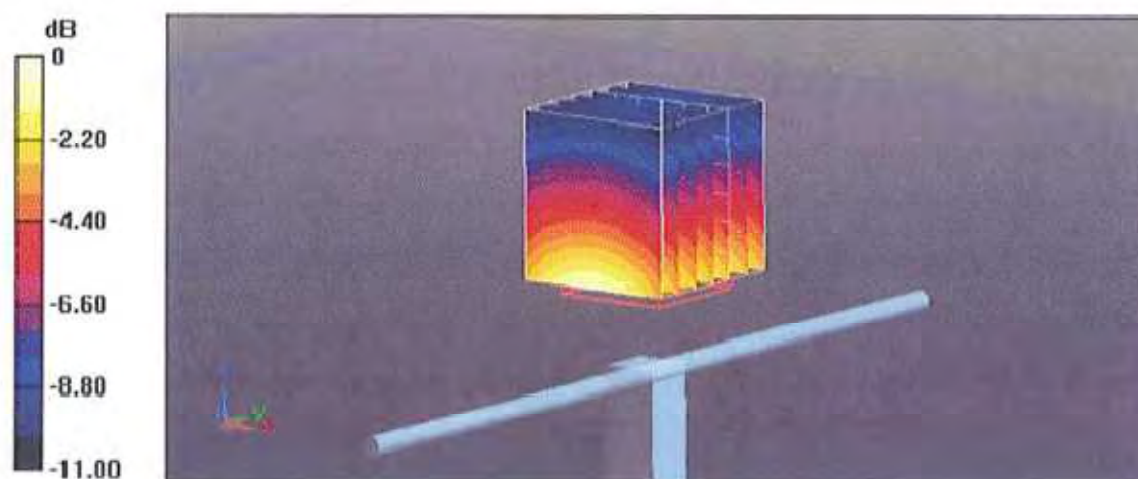


0 dB = 2.82 W/kg = 4.50 dBW/kg



Zacta

Impedance Measurement Plot for Body TSL

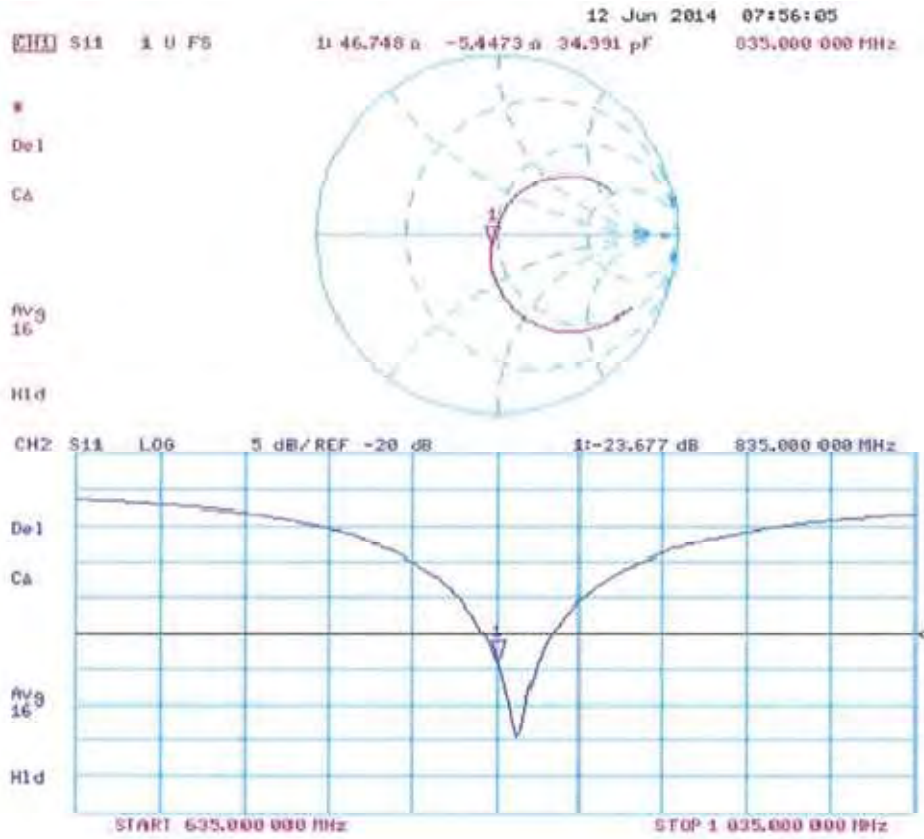



Zacta

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**Client **TÜV Süd Zacta (Vitec)**Certificate No: **D835V2-4d163_Dec14**

CALIBRATION CERTIFICATE

Object **D835V2 - SN: 4d163**

Calibration procedure(s) **QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **December 09, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration):

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	US37292783	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	MY41092317	07-Oct-14 (No. 217-02021)	Oct-15
Reference 20 dB Attenuator	SN: 5058 (20K)	03-Apr-14 (No. 217-01918)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 06327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Probe ES3DV3	SN: 3205	30-Dec-13 (No. ES3-3205_Dec13)	Dec-14
DAE4	SN: 601	18-Aug-14 (No. DAE4-601_Aug14)	Aug-15
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by: **Name** Michael Weber **Function** Laboratory Technician

Signature

Approved by: **Name** Katja Pokovic **Function** Technical Manager

Issued: December 10, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: **D835V2-4d163_Dec14**

Page 1 of 8



Zacta

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates.

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.