



Zacta

# TEST REPORT

Report number : Z071C-13262

Issue date : July 29, 2013

The device, as described herewith, was tested pursuant to applicable test procedure and complies with the requirements of;

## FCC Part22 Subpart H

The test results are traceable to the international or national standards.

Applicant	: KYOCERA Corporation
Equipment under test (EUT)	: Mobile Phone
Model number	: KYY06
FCC ID	: JOYKYY06

Date of test : July 11, 12, 19, 2013  
 Test place : TÜV SÜD Zacta Ltd. Yonezawa Testing Center  
 4149-7 Hachimanpara 5-chome  
 Yonezawa-shi Yamagata 992-1128 Japan  
 Phone: +81-238-28-2880 Fax: +81-238-28-2888  
 Test results : Complied

The results in this report are applicable only to the equipment tested.  
 This report shall not be re-produced except in full without the written approval of TÜV SÜD Zacta Ltd.  
 This test report must not be used by client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Tested by : Chiaki Kanno  
 Chiaki Kanno

Authorized by : Eiji Akiba  
 Eiji Akiba  
 Deputy Manager of EMC Technical Department



## ***Table of contents***

---

	<b>Page</b>
<b>1. Summary of Test .....</b>	<b>3</b>
1.1 Purpose of test .....	3
1.2 Standards .....	3
1.3 List of applied test to the EUT .....	3
1.4 Modification to the EUT by laboratory .....	3
<b>2. Equipment Under Test .....</b>	<b>4</b>
2.1 General Description of equipment .....	4
2.2 EUT information .....	4
2.3 Variation of the family model(s) .....	5
2.4 Description of Test mode .....	5
<b>3. Configuration of equipment .....</b>	<b>6</b>
3.1 Equipment(s) used .....	6
3.2 System configuration .....	6
<b>4. Conducted Output Power .....</b>	<b>7</b>
4.1 Measurement procedure .....	7
4.2 Measurement result .....	7
<b>5. Effective Radiated Power .....</b>	<b>8</b>
5.1 Measurement procedure .....	8
5.2 Calculation method .....	8
5.3 Limit .....	8
5.4 Test data .....	9
<b>6. Occupied Bandwidth .....</b>	<b>10</b>
6.1 Measurement procedure .....	10
6.2 Limit .....	10
6.3 Measurement result .....	10
6.4 Trace data .....	11
<b>7. Band Edge Spurious and Harmonic at Antenna Terminals .....</b>	<b>12</b>
7.1 Measurement procedure .....	12
7.2 Limit .....	12
7.3 Measurement result .....	12
7.4 Trace data .....	13
<b>8. Radiated Emissions and Harmonic Emissions .....</b>	<b>18</b>
8.1 Measurement procedure .....	18
8.2 Calculation method .....	18
8.3 Limit .....	18
8.4 Test data .....	19
<b>9. Frequency Stability .....</b>	<b>20</b>
9.1 Measurement procedure .....	20
9.2 Limit .....	20
9.3 Measurement result .....	21
<b>10. Uncertainty of measurement .....</b>	<b>22</b>
<b>11. Laboratory description .....</b>	<b>23</b>
<b>Appendix A. Test equipment .....</b>	<b>24</b>

## 1. Summary of Test

---

### 1.1 Purpose of test

It is the original test in order to verify conformance to FCC Part 22 Subpart H.

### 1.2 Standards

CFR47 FCC Part 22 Subpart H

#### 1.2.1 Test Methods

ANSI/TIA/EIA-603-C-2004

#### 1.2.2 Deviation from standards

None

### 1.3 List of applied test to the EUT

Test items Section	Test items	Condition	Result
2.1046	Conducted Output Power	Conducted	PASS
22.913(a)	Effective Radiated Power	Radiated	PASS
22.917(a) 2.1049	Occupied Bandwidth	Conducted	PASS
22.917(a) 2.1051	Band Edge Spurious and Harmonic at Antenna Terminal	Conducted	PASS
22.917(a) 2.1053	Radiated emissions and Harmonic Emissions	Radiated	PASS
22.355 2.1055	Frequency Stability	Conducted	PASS

#### 1.3.1 Test set up

Table-Top

### 1.4 Modification to the EUT by laboratory

None



## ***2. Equipment Under Test***

---

### **2.1 General Description of equipment**

EUT is the Mobile Phone.

### **2.2 EUT information**

Applicant : KYOCERA Corporation  
Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa,  
Japan  
Phone: +81-45-943-6253 Fax: +81-45-943-6314

Equipment under test : Mobile Phone

Trade name : Kyocera

Model number : KYY06

Serial number : N/A

EUT condition : Pre-Production

Max. frequency : 696MHz

Power ratings : Battery: DC 3.7V

Size : (W) 49 x (D) 17.5 x (H) 110 mm

Environment : Indoor and Outdoor use

Terminal limitation : -20°C to 60°C

RF Specification  
<CDMA>  
Equipment type : Transceiver

Frequency of Operation : Up Link: CDMA2000 824.70-848.31MHz  
Down Link: CDMA2000 869.70-893.31MHz

Modulation type : GMSK

Emission designator : 1M28F9W

Output power : 0.145W EIRP (21.6dBm)

Antenna type : Internal antenna

Antenna gain : 1dBi

### 2.3 Variation of the family model(s)

Not applicable

### 2.4 Description of Test mode

The EUT had been tested under operating condition.  
There are three channels have been tested as following:

Band	Channel	Frequency
Cellular CDMA	1013	824.70MHz
	384	836.52MHz
	777	848.31MHz

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in Y axis and the worst case recorded.



Zacta


### ***3. Configuration of equipment***

---

#### **3.1 Equipment(s) used**

<b>No.</b>	<b>Equipment</b>	<b>Company</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>FCC ID / DoC</b>	<b>Comment</b>
1	Mobile Phone	KYOCERA	KYY06	N/A	JOYKYY06	EUT

#### **3.2 System configuration**




Note1: Numbers assigned to equipment on this diagram correspond to the list in "3.1 Equipment(s) used".

## 4. Conducted Output Power

### 4.1 Measurement procedure [FCC 2.1046]

The conducted output power was measured with a wireless communication tester connected to the antenna terminal. The wireless communication tester parameters were set to produce the maximum power from the EUT.

- Test configuration

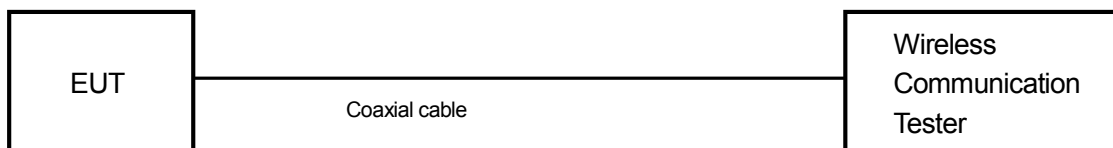

### 4.2 Measurement result

Date : Jul. 11, 2013  
 Temperature : 24.0 [°C]  
 Humidity : 64.0 [%]  
 Test place : Shielded room

Test personnel :

Tested by :

Chiaki Kanno

Band	Channel	Frequency [MHz]	1X RTT [dBm]							
			RC1	RC3	RC4	RC1	RC3	RC4	RC2	RC5
			SO55	SO55	SO02	SO55	SO55	SO55	SO9	SO9
Cellular CDMA	1013	824.70	24.05	23.85	24.07	24.05	23.85	23.92	23.89	23.84
	384	836.52	23.97	23.77	23.92	23.97	23.77	23.82	23.78	23.75
	777	848.31	24.10	23.96	24.01	24.10	23.96	24.03	23.98	23.97

## 5. Effective Radiated Power

---

### 5.1 Measurement procedure [FCC 22.913(a)]


#### <Step 1>

The EUT and support equipment are placed on a 1 meter x 1.5 meter surface, 0.8 meter height FRP table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission. The bandwidth of the spectrum analyzer is set to 1MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission.

#### <Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT). The frequency of the signal generator is adjusted to the measurement frequency. Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

#### - Test configuration

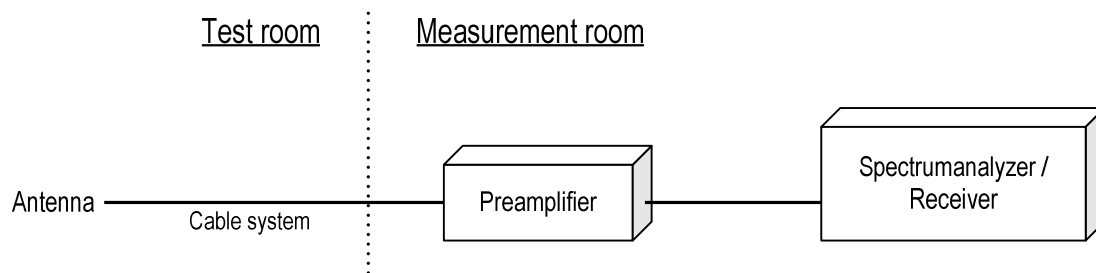

### 5.2 Calculation method

Result (ERP) = S.G Reading – Cable loss + Antenna Gain  
Margin = Limit – Result (ERP)

### 5.3 Limit

7 W (38.45dBm)





Zacta

#### 5.4 Test data

Date : Jul. 19, 2013  
 Temperature : 23.0 [°C]  
 Humidity : 58.0 [%]  
 Test place : 3m Semi-anechoic chamber

Test personnel :  
 Tested by : Chiaki kanno

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	824.7	12.2	30.8	0.7	-10.7	19.5	38.5	19.0
V	836.5	12.4	33.0	0.7	-10.7	21.6	38.5	16.9
H	848.3	12.3	31.0	0.7	-10.8	19.5	38.5	19.0

## 6. Occupied Bandwidth

### 6.1 Measurement procedure


[FCC 22.917(a), 2.1049]

The Occupied bandwidth was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;

- RBW=15kHz, VBW=43kHz, Span=3MHz, Sweep=auto, Detector=Peak, Trace mode=Max hold

- Test configuration

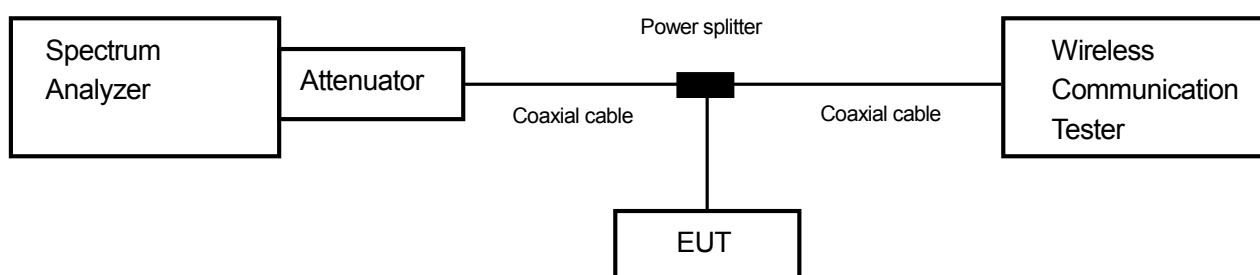

### 6.2 Limit

None

### 6.3 Measurement result

Date : Jul. 11, 2013  
 Temperature : 24.0 [°C]  
 Humidity : 64.0 [%]  
 Test place : Shielded room

Test personnel :

Tested by :

Chiaki Kanno


Band	Channel	Frequency (MHz)	Test Result (MHz)
Cellular CDMA	1013	824.70	1.2701
	384	836.52	1.2718
	777	848.31	1.2773




Zacta

6.4 Trace data  
[Cellular CDMA]


Channel: 1013

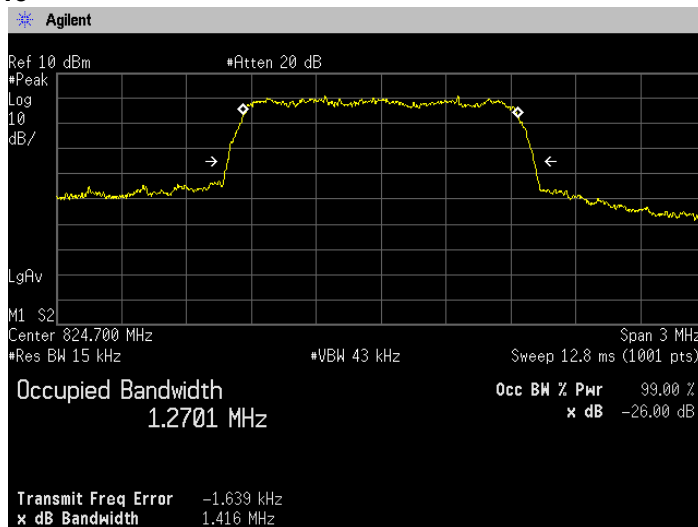

Channel: 384

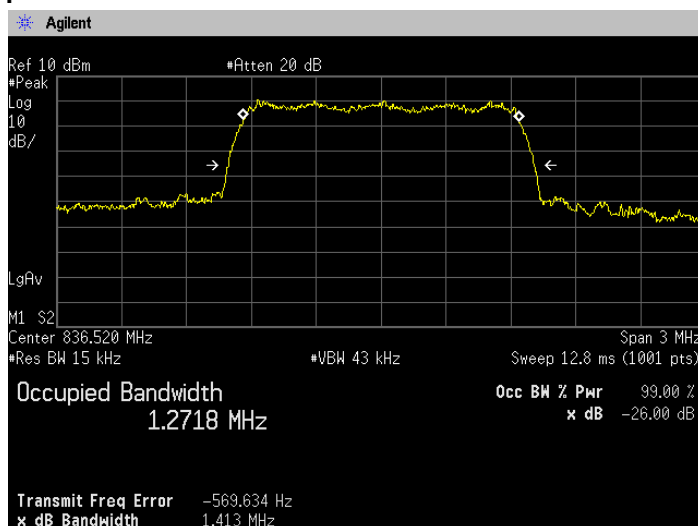

Channel: 777

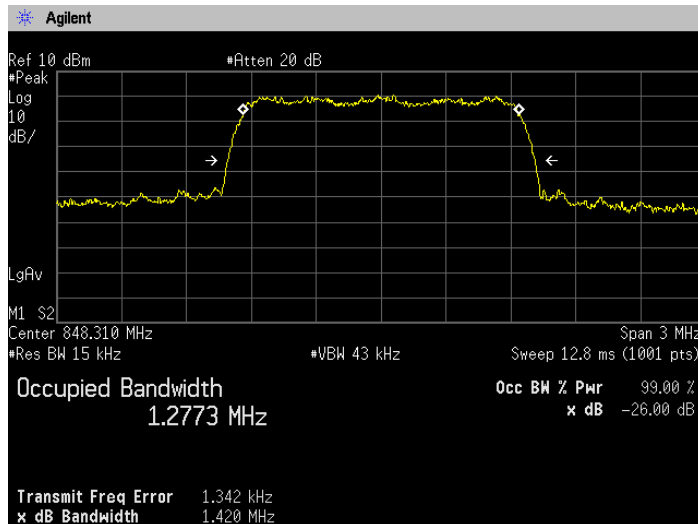

## 7. Band Edge Spurious and Harmonic at Antenna Terminals

### 7.1 Measurement procedure [FCC 22.917(a), 2.1051]

The band edge spurious and harmonic was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;


<Band Edge>

- RBW=15kHz, 100kHz, VBW=43kHz, 300kHz, Span=1MHz, Sweep=auto, Detector=Average,  
Trace mode=Max hold

<Spurious Emissions>

- RBW=1MHz, VBW=3MHz, Span=Arbitrary setting, Sweep=auto, Detector=Peak, Trace mode=Max hold

- Test configuration

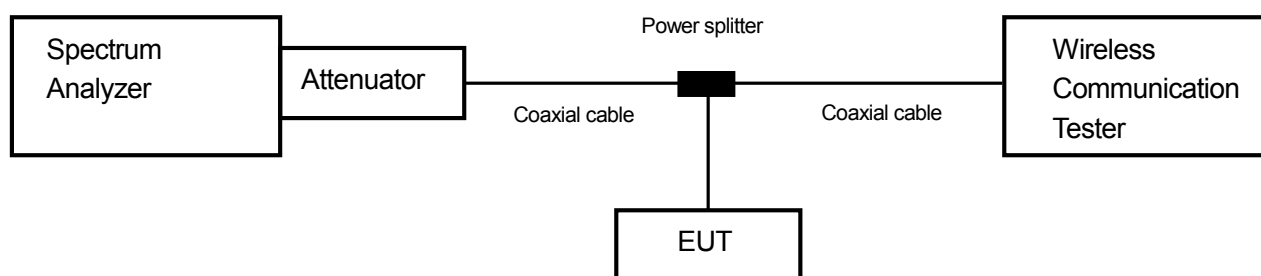

### 7.2 Limit

-13dBm or less

### 7.3 Measurement result

Date : Jul 11 2013  
 Temperature : 24.0 [°C]  
 Humidity : 64.0 [%]  
 Test place : Shielded room

Test personnel :

Tested by :

Chiaki Kanno



Band	Channel	Frequency [MHz]	Limit [dB]	Results	Results
Cellular CDMA	1013	824.70	-13	See the trace data	PASS
	384	836.52	-13	See the trace data	PASS
	777	848.31	-13	See the trace data	PASS



Zacta

**7.4 Trace data**  
**[Cellular CDMA]**  
**(Band Edge)**



**Channel: 1013**

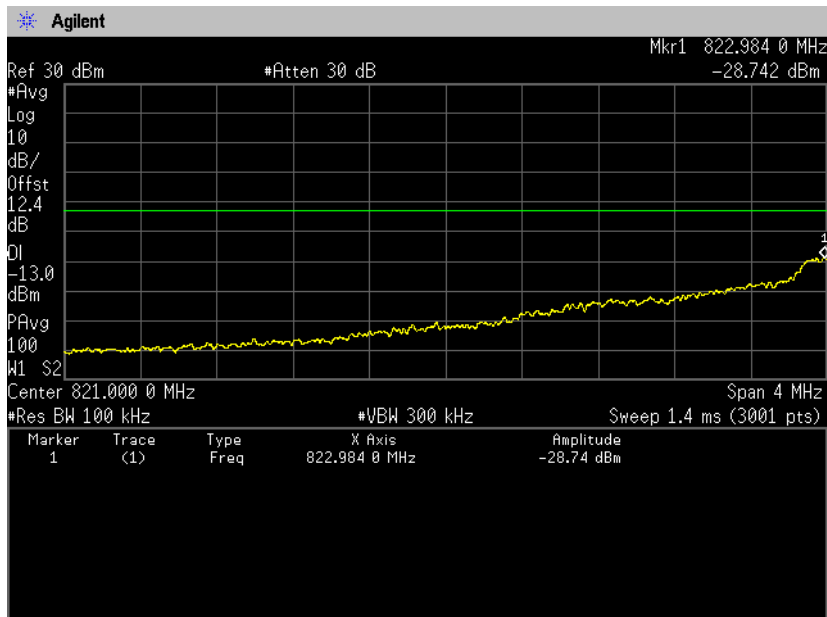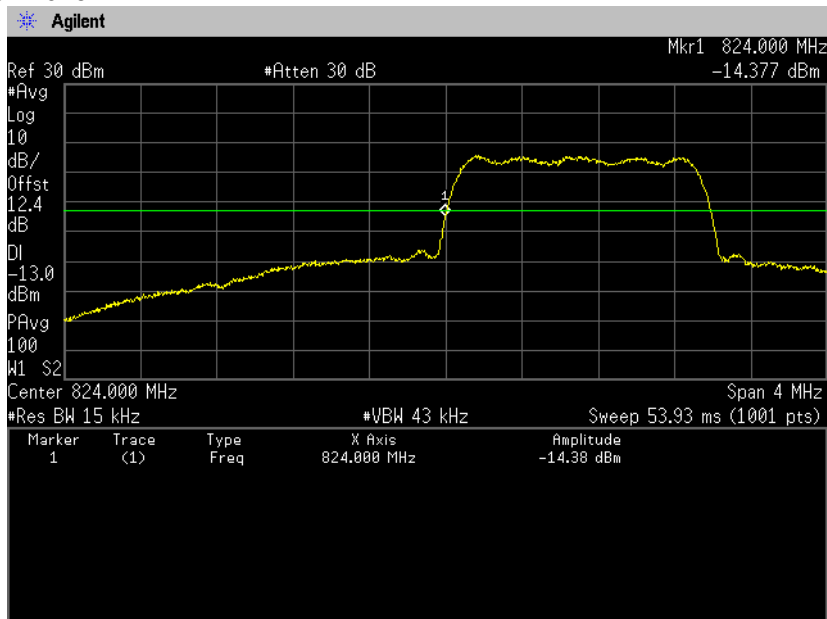



Zacta


Channel: 777

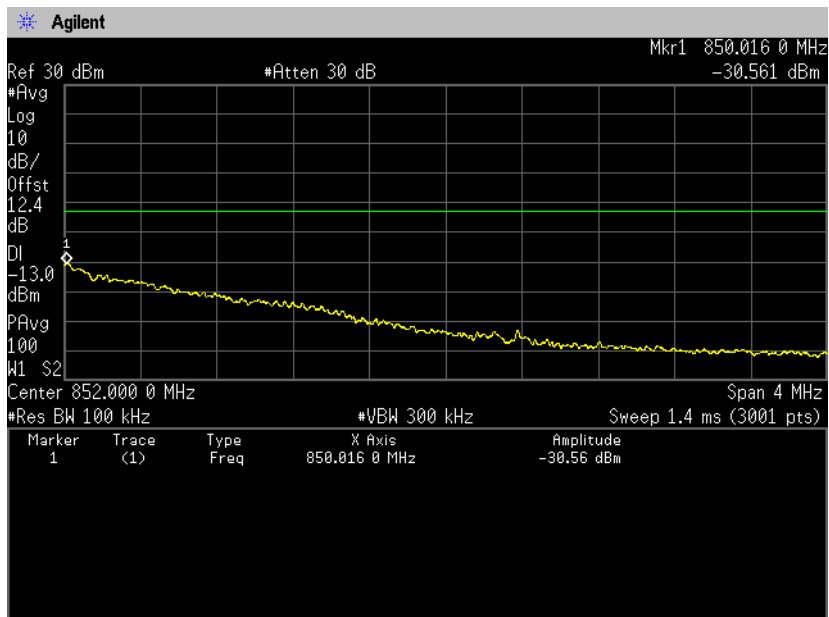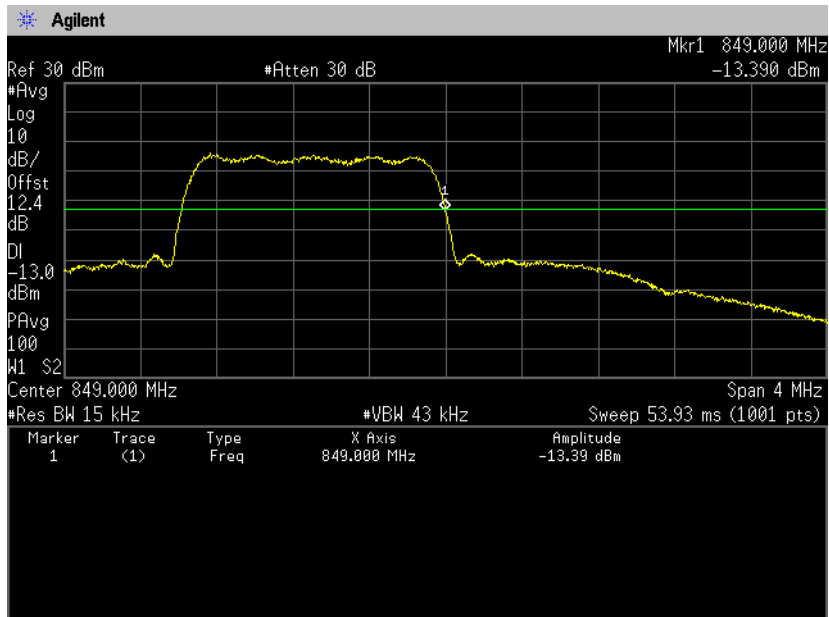




Zacta

**(Spurious Emissions)**  
**Channel: 1013**  
**30MHz-5GHz**

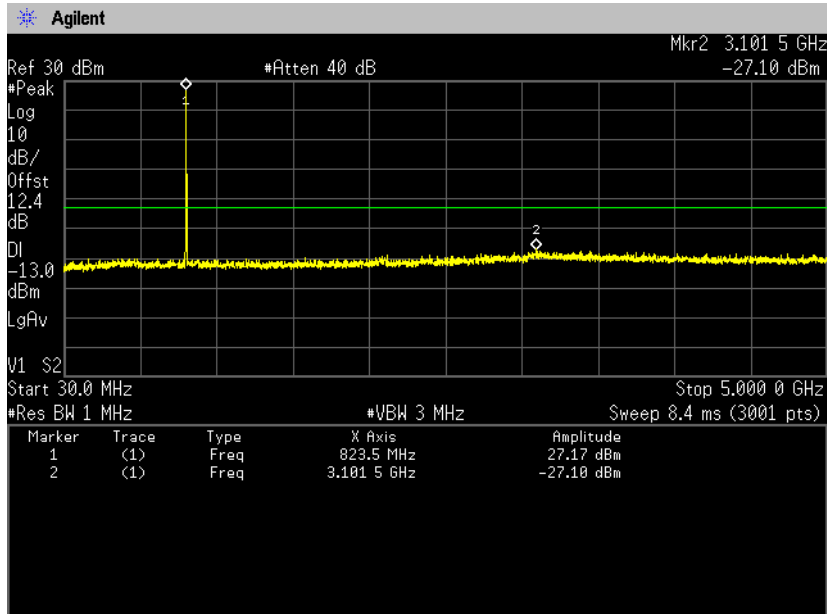


**5GHz-10GHz**

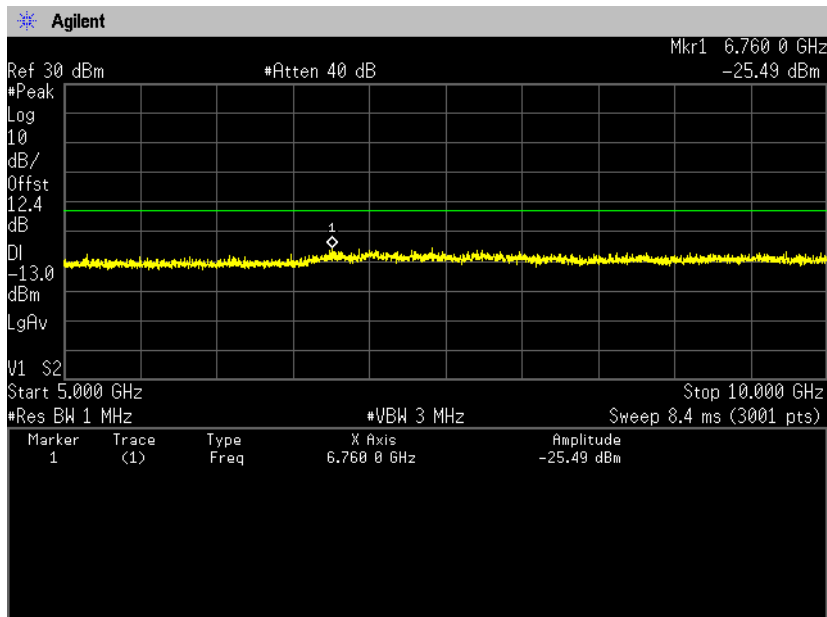




Zacta

**Channel: 384  
30MHz-5GHz**

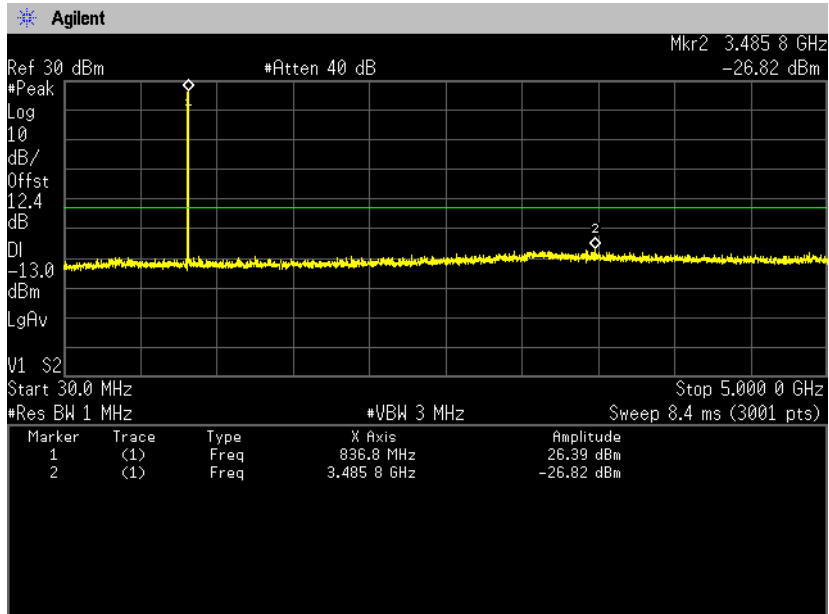

**5GHz-10GHz**

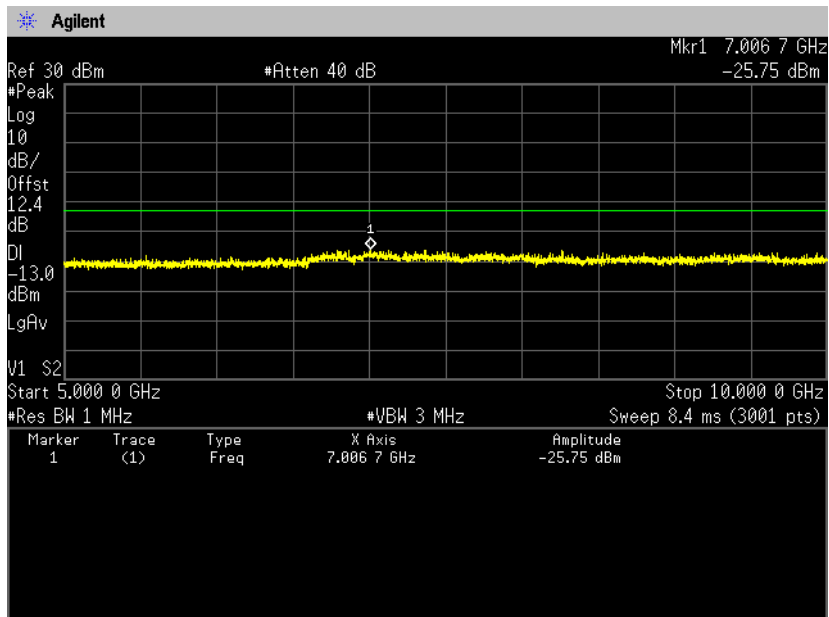







Zacta

**Channel: 777  
30MHz-5GHz**

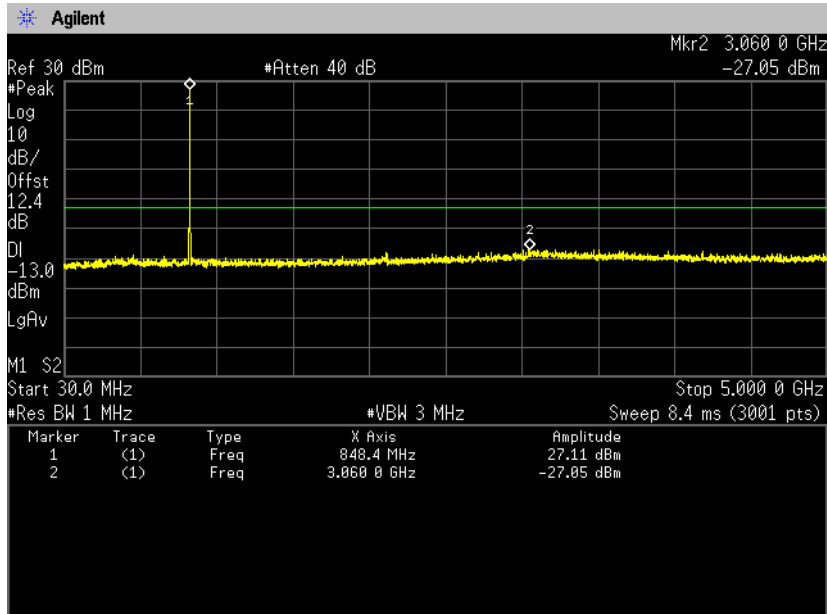

**5GHz-10GHz**

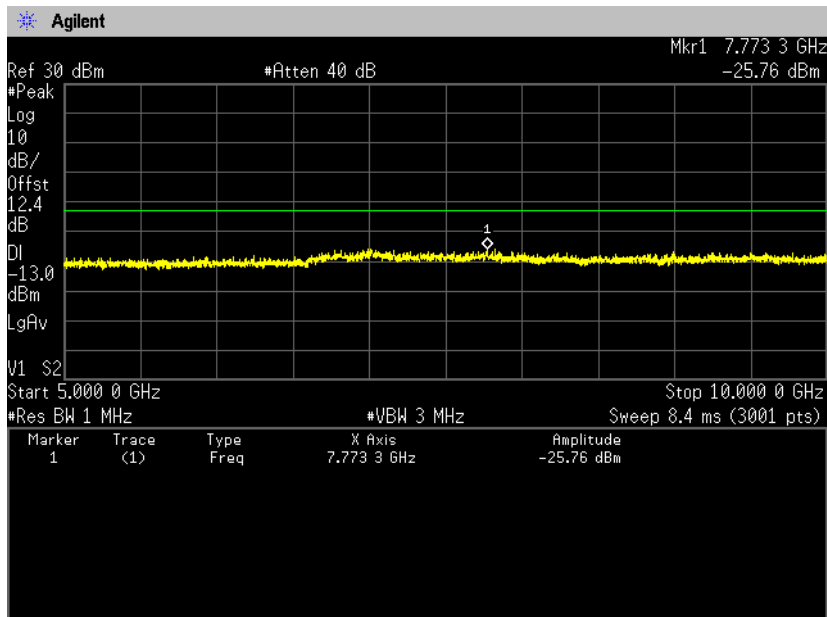

## 8. Radiated Emissions and Harmonic Emissions

### 8.1 Measurement procedure [FCC 22.917(a), 2.1053]


#### <Step 1>

The EUT and support equipment are placed on a 1 meter x 1.5 meter surface, 0.8 meter height FRP table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (TRILOG antenna and double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission. The bandwidth of the spectrum analyzer is set to 1MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission. The frequency is investigated up to 20GHz.

#### <Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT). The frequency of the signal generator is adjusted to the measurement frequency. Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

- Test configuration

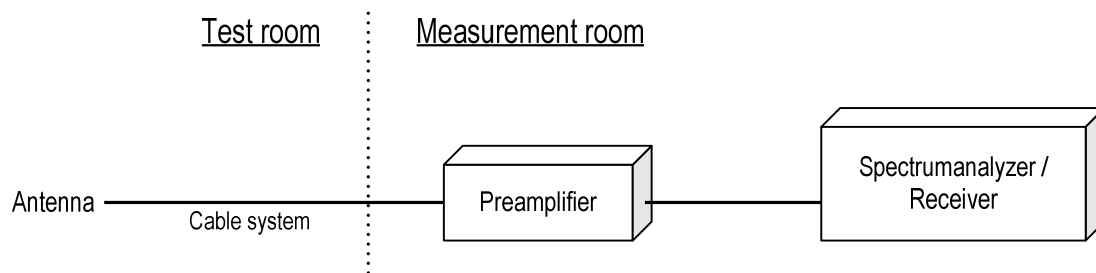

### 8.2 Calculation method

Result = S.G Reading – Cable loss + Antenna Gain

Margin = Limit – Result (EIRP)

### 8.3 Limit

-13dBm or less



Zacta

## 8.4 Test data

Date : Jul. 19, 2013      Test personnel :  
 Temperature : 23.0 [°C]  
 Humidity : 58.0 [%]      Tested by :  
 Test place : 3m Semi-anechoic chamber      Chiaki Kanno

### [Cellular CDMA] (Channel: 1013)

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1649.0	-37.0	-39.3	1.0	6.7	-33.6	-13.0	20.6
V	1649.0	-43.2	-45.9	1.0	6.7	-40.2	-13.0	27.2
H	2473.0	-34.5	-33.0	1.3	7.5	-26.8	-13.0	13.8
V	2473.0	-35.9	-32.7	1.3	7.5	-26.5	-13.0	13.5
V	4122.0	-57.4	-51.3	1.7	8.0	-44.9	-13.0	31.9

### (Channel: 384)

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1672.0	-36.2	-38.2	1.0	6.6	-32.7	-13.0	19.7
V	1672.0	-38.6	-40.4	1.0	6.6	-34.9	-13.0	21.9
H	2509.0	-37.2	-35.6	1.3	7.5	-29.4	-13.0	16.4
V	2509.0	-34.4	-31.2	1.3	7.5	-25.0	-13.0	12.0

### (Channel: 777)

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1696.0	-36.1	-37.0	1.0	6.3	-31.7	-13.0	18.7
V	1696.0	-38.8	-40.3	1.0	6.3	-35.0	-13.0	22.0
H	2545.0	-41.0	-39.3	1.3	7.4	-33.2	-13.0	20.2
V	2545.0	-39.2	-35.8	1.3	7.4	-29.7	-13.0	16.7


Note: No emission were detected in frequency range 30MHz to 1000MHz at the 3 meters distance.

## 9. Frequency Stability

### 9.1 Measurement procedure [FCC 22.355, 2.1055]

The EUT was placed of an inside of an constant temperature chamber as the temperature in the chamber was varied between  $-30^{\circ}\text{C}$  and  $+50^{\circ}\text{C}$ . The temperature was incremented by  $10^{\circ}\text{C}$  intervals and the unit was allowed to stabilize at each measurement. The frequency drift was measured with the normal Temperature and voltage tolerance and it is presented as the ppm unit.

- Test configuration

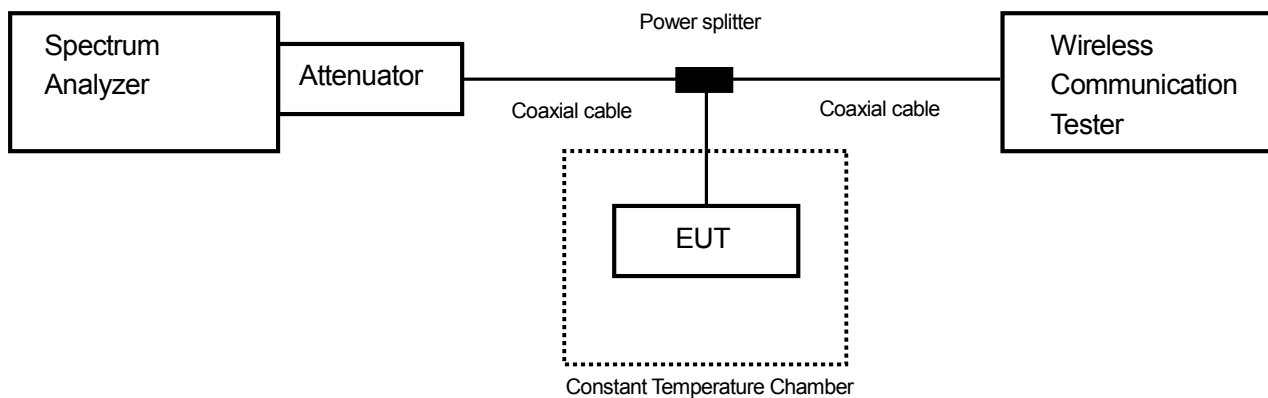

### 9.2 Limit

$\pm 2.5\text{ppm}$

### 9.3 Measurement result

Date : Jul. 12, 2013  
 Temperature : 25.0 [°C]  
 Humidity : 68.0 [%]  
 Test place : Shielded room

Test personnel

Tested by :

Chiaki Kanno

#### [Cellular CDMA]

(Channel: 384)

Limit: $\pm 0.00025\% = \pm 2.5\text{ppm}$					
Power Supply [V]	Temperature [°C]	Measurements Frequency [Hz]	Frequency Tolerance [ppm]	Limit [ppm]	Result
3.70	25(Ref.)	836,519,662	0.00000	$\pm 2.5$	PASS
	50	836,519,623	-0.04662	$\pm 2.5$	PASS
	40	836,520,690	1.22890	$\pm 2.5$	PASS
	30	836,520,694	1.23368	$\pm 2.5$	PASS
	20	836,520,503	1.00536	$\pm 2.5$	PASS
	10	836,520,302	0.76507	$\pm 2.5$	PASS
	0	836,519,771	0.13030	$\pm 2.5$	PASS
	-10	836,520,815	1.37833	$\pm 2.5$	PASS
	-20	836,520,424	0.91092	$\pm 2.5$	PASS
	-30	836,520,696	1.23607	$\pm 2.5$	PASS
3.145	25	836,520,993	1.59112	$\pm 2.5$	PASS
4.255	25	836,519,559	-0.12313	$\pm 2.5$	PASS

Calculation;

$$\text{Frequency Tolerance (ppm)} = \frac{\text{Measurements Frequency (Hz)} - \text{Reference Frequency (Hz)}}{\text{Reference Frequency (Hz)}} \times 1000000$$



Zacta

## 10. Uncertainty of measurement

---

Expanded uncertainties stated are calculated with a coverage Factor  $k=2$ .

Please note that these results are not taken into account when determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission at mains port	$\pm 3.0\text{dB}$
Radiated emission (9kHz – 30MHz)	$\pm 4.4\text{dB}$
Radiated emission (30MHz – 1000MHz)	$\pm 4.5\text{dB}$
Radiated emission (1000MHz – 26GHz)	$\pm 3.9\text{dB}$



Zacta

## 11. Laboratory description

### 1. Location:

TÜV SÜD Zacta Ltd. Yonezawa Testing Center  
 4149-7 Hachimanpara 5-chome Yonezawa-shi Yamagata 992-1128 Japan  
 Phone: +81-238-28-2880 Fax: +81-238-28-2888

### 2. Facility filing information:

1) NVLAP accreditation: NVLAP Lab. code: 200306-0

2) VLAC accreditation: Lab. code: VLAC-013

Site name	Radiated emission	Conducted emission for mains port	Conducted emission for telecom port	Radiated emission (CMAD)	Expiry Date
3m Semi-anechoic chamber	VLAC-013	-	-	-	Jul. 3, 2015
10m Semi-anechoic chamber				VLAC-013	
Shielded room No.1	-	VLAC-013	-	-	

3) FCC filing:

Site name	Registration Number	Expiry Date
Site 2	91065	Oct.31, 2014
Site 3		
3m Semi-anechoic chamber	540072	Jan. 9, 2016
10m Semi-anechoic chamber		
Shielded room No.1		

4) Industry Canada Oats site filing:

Site name	Sites on file: Oats 3m/10m	Expiry Date
Site 2	4224A-2	Jan. 23, 2015
Site 3	4224A-3	
3m Semi-anechoic chamber	4224A-4	
10m Semi-anechoic chamber	4224A-5	

5) VCCI site filing:

Site name	Radiated emission	Conducted emission for mains port	Conducted emission for telecom port	Expiry Date
Site 2	R-137	C-133	T-1221	Nov. 16, 2014 Nov. 28, 2014* (*:Telecom port)
Site 3	R-138	C-134	T-1222	
3m Semi-anechoic chamber	-	A-0166	-	Jul. 3, 2015
10m Semi-anechoic chamber				
Shielded room No.1				

6) TÜV SÜD PS authorization:

Authorized as an EMC test laboratory

7) TÜV Rheinland authorization:

Authorized as an EMC test laboratory



Zacta

## Appendix A. Test equipment

### [Antenna port conducted test]

Equipment	Company	Model No.	Serial No.	Cal. due	Cal. date
Spectrum analyzer	Agilent Technologies	E4440A	US40420937	Oct. 2013	Oct. 19, 2012
Microwave cable	RS	YH20_S1	N/A (S389)	Aug. 2013	Aug. 30, 2012
Microwave cable	SUHNER	SUCOFLEX104/1.5m	199121/4	Oct. 2013	Oct. 7, 2012
Microwave cable	SUHNER	SUCOFLEX104/1.5m	322086/4	Jul. 2013	Jul. 30, 2012
Attenuator	Weinschel	56-10	J4180	Nov. 2013	Nov. 12, 2012
Power splitter	ANRITSU	K240B	020205	Nov. 2013	Nov. 12, 2012
Wideband radio frequency tester	ROHDE&SCHWARZ	CMW500	126079	Jul. 2013	Jul. 20, 2012
Operation type temperature controlled bath	Espec	PL3KP	14016727	Dec. 2013	Dec. 27, 2012

### Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ECSI	100451	Oct. 2013	Oct. 13, 2012
Preamplifier	ANRITSU	MH648A	M96057	Jun. 2014	Jun. 12, 2013
Loop antenna	ROHDE&SCHWARZ	HFH2-Z2	892246/010	Sep. 2013	Sep. 14, 2012
TRILOG Antenna	Schwarzbeck	VULB9160	9160-3218	Apr. 2014	Apr. 10, 2013
Attenuator	TME	CFA-01NPJ-6	N/A (S274)	Jun. 2014	Jun. 12, 2013
Spectrum analyzer	Agilent Technologies	E4447A	MY46180188	Mar. 2014	Mar. 8, 2013
Preamplifier	Agilent Technologies	8449B	3008A1008	Dec. 2013	Dec. 9, 2012
Double ridged guide antenna	EMCO	3115	4328	Jan. 2014	Jan. 21, 2013
Attenuator	AEROFLEX	40A-03	081217-20	Feb. 2014	Feb. 23, 2013
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170189	May 2015	May 2, 2013
Preamplifier	TSJ	MLA-1840-B03-35	1240332	May 2015	May 2, 2013
Dipole antenna	Schwarzbeck	VHAP	1020	Aug. 2013	Aug. 30, 2012
Dipole antenna	Schwarzbeck	UHAP	994	Aug. 2013	Aug. 30, 2012
Double ridged guide antenna	EMCO	3115	00058532	Aug. 2013	Aug. 31, 2012
Signal generator	ROHDE&SCHWARZ	SMB100A	100341	Oct. 2013	Oct. 2, 2012
Signal generator	ROHDE&SCHWARZ	SMR27	839256/034	Jan. 2014	Jan. 30, 2013
Microwave cable	SUHNER	SUCOFLEX104/1.5m	199121/4	Oct. 2013	Oct. 7, 2012
Wideband radio frequency tester	ROHDE&SCHWARZ	CMW500	126079	Jul. 2013	Jul. 20, 2012
Microwave cable	SUHNER	SUCOFLEX104/9m	346316/4	Oct. 2013	Oct. 6, 2012
		SUCOFLEX104/1m	322084/4	Oct. 2013	Oct. 6, 2012
		SUCOFLEX104/1.5m	317226/4	Oct. 2013	Oct. 6, 2012
		SUCOFLEX104/7m	41625/6	Oct. 2013	Oct. 6, 2012
PC	DELL	DIMENSION E521	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V5.3.61	N/A	N/A
3m Semi-anechoic chamber	TOKIN	N/A	N/A (9002-NSA)	May 2014	May 6, 2013