

# SAR TEST REPORT

Test item : Mobile Phone  
Model No. : KYY22  
Order No. : DEMC1311-03595  
Date of receipt : 2013-11-27  
Test duration : 2013-12-04 ~ 2013-12-20  
Date of issue : 2013-12-20  
Use of report : FCC Original Grant

Applicant : KYOCERA Corporation  
Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa, Japan

Test laboratory : Digital EMC Co., Ltd.  
683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Gyeonggi-Do, 449-080, Korea

Test rule part : 47CFR §2.1093  
Test environment : See appended test report  
Test result :  Pass  Fail

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DIGITAL EMC CO., LTD.

Tested by:



Engineer  
NoKyun, Im

Witnessed by:

Engineer  
N/A

Reviewed by:



Technical Director  
Harvey Sung

## Table of Contents

<b>1. DESCRIPTION OF DEVICE</b> .....	<b>5</b>
1.1 Guidance Applied .....	6
1.2 Device Overview .....	6
1.3 Nominal and Maximum Output Power Specifications .....	7
1.4 DUT Antenna Locations & SAR Test Configurations .....	8
1.5 SAR Test Exclusions Applied .....	9
1.6 Device Serial Numbers .....	9
<b>2. INTROCUCTION</b> .....	<b>10</b>
<b>3. DESCRIPTION OF TEST EQUIPMENT</b> .....	<b>11</b>
3.1 SAR MEASUREMENT SETUP .....	11
3.2 EX3DV4 Probe Specification .....	12
3.3 Probe Calibration Process .....	13
3.3.1 E-Probe Calibration .....	13
3.4 Data Extrapolation.....	14
3.5 SAM Twin PHANTOM .....	15
3.6 Device Holder for Transmitters.....	15
3.7 Brain & Muscle Simulation Mixture Characterization .....	16
3.8 SAR TEST EQUIPMENT .....	17
<b>4. TEST SYSTEM SPECIFICATIONS</b> .....	<b>18</b>
<b>5. SAR MEASUREMENT PROCEDURE</b> .....	<b>19</b>
5.1 Measurement Procedure.....	19
<b>6. DEFINITION OF REFERENCE POINTS</b> .....	<b>20</b>
6.1 Ear Reference Point.....	20
6.2 Handset Reference Points .....	20
<b>7. TEST CONFIGURATION POSITIONS FOR HANDSETS</b> .....	<b>21</b>
7.1 Device Holder.....	21
7.2 Positioning for Cheek/Touch .....	21
7.3 Positioning for Ear / 15 ° Tilt.....	21
7.4 Body-Worn Accessory Configurations.....	22
7.5 Extremity Exposure Configurations.....	22
7.6 Wireless Router Configurations .....	23
<b>8. RF EXPOSURE LIMITS</b> .....	<b>24</b>
<b>9. FCC MEASUREMENT PROCEDURES</b> .....	<b>25</b>
9.1 Measured and Reported SAR .....	25
9.2 Procedures Used to Establish RF Signal for SAR .....	25
9.2.1 SAR Measurement Conditions for UMTS .....	25
9.2.2 SAR Measurement Conditions for CDMA2000 .....	26
9.2.3 SAR Testing with 802.11 Transmitters.....	27
<b>10. RF CONDUCTED POWERS</b> .....	<b>29</b>
<b>11. SYSTEM VERIFICATION</b> .....	<b>34</b>
11.1 Tissue Verification.....	34
11.2 Test System Verification .....	36
<b>12. SAR TEST RESULTS</b> .....	<b>38</b>
12.1 Head SAR Results .....	38
12.2 Standalone Body-Worn SAR Results.....	40
12.3 Standalone Wireless router SAR Results .....	41
12.4 SAR Test Notes .....	43
<b>13. FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS</b> .....	<b>45</b>

---

## Table of Contents

---

13.1 Introduction.....	45
13.2 Simultaneous Transmission Procedures.....	45
13.3 Simultaneous Transmission Capabilities .....	46
13.4 Head SAR Simultaneous Transmission Analysis .....	47
13.5 Body-Worn Simultaneous Transmission Analysis.....	48
10.6 Hotspot SAR Simultaneous Transmission Analysis.....	50
13.5 Simultaneous Transmission Conclusion .....	50
<b>14. SAR MEASUREMENT VARIABILITY .....</b>	<b>53</b>
14.1 Measurement Variability.....	53
14.2 Measurement Uncertainty.....	53
<b>15. IEEE P1528 –MEASUREMENT UNCERTAINTIES.....</b>	<b>54</b>
<b>16.CONCLUSION.....</b>	<b>70</b>
<b>17. REFERENCES .....</b>	<b>71</b>
<b>Attachment 1. – Probe Calibration Data .....</b>	<b>73</b>
<b>Attachment 2. – Dipole Calibration Data .....</b>	<b>85</b>
<b>Attachment 3. – SAR SYSTEM VALIDATION.....</b>	<b>126</b>

## Test Report Version

Test Report No.	Date	Description
DRTFCC1312-1206	Dec. 20, 2013	Final version for approval

## 1. DESCRIPTION OF DEVICE

Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

### General Information:

Equipment type	Mobile Phone				
FCC ID	JOYKYY22				
Equipment model name	KYY22				
Equipment add model name	N/A				
Equipment serial no.	Identical prototype				
Mode(s) of Operation	GSM850, PCS1900, WCDMA850, CDMA Cellular, W-LAN(802.11a/b)				
TX Frequency Range	824.2 ~ 848.8 MHz(Cellular Band) / 826.4 ~ 846.6 MHz(WCDMA FDD V) 824.7 ~ 848.31 MHz(CDMA Cellular) / 1850.2 ~ 1909.8 MHz(PCS Band) 2412 ~ 2462 MHz(802.11b) / 5180 ~ 5240 MHz(802.11a - 5.2 GHz Band) 5260 ~ 5320 MHz(802.11a - 5.3 GHz Band) / 5500 ~ 5700 MHz(802.11a - 5.5 GHz Band)				
RX Frequency Range	869.2 ~ 893.8 MHz(Cellular Band) / 871.4 ~ 891.6 MHz(WCDMA FDD V) 869.7 ~ 893.31 MHz(CDMA Cellular) / 1930.2 ~ 1989.8 MHz(PCS Band) 2412 ~ 2462 MHz(802.11b) / 5180 ~ 5240 MHz(802.11a - 5.2 GHz Band) 5260 ~ 5320 MHz(802.11a - 5.3 GHz Band) / 5500 ~ 5700 MHz(802.11a - 5.5 GHz Band)				
Equipment Class	Band	Measured Conducted Power [dBm]	Reported SAR		
			1g SAR (W/kg)		
			Head	Body-worn	Body
PCE	GSM850	32.9	0.34	0.89	<b>1.09</b>
PCE	PCS1900	29.7	<b>0.54</b>	0.66	0.74
PCE	WCDMA850	23.51	0.31	0.75	0.75
PCE	Cell. CDMA	23.48	0.35	<b>0.95</b>	0.95
DTS	2.4 GHz W-LAN	15.48	0.44	0.23	0.23
UNII	5.2 GHz W-LAN	12.40	<0.10	<0.10	N/A
UNII	5.3 GHz W-LAN	13.62	0.15	<0.10	N/A
UNII	5.5 GHz W-LAN	13.45	0.18	0.12	N/A
DSS/DTS	Bluetooth	6.10	N/A		
Simultaneous SAR per KDB 690783 D01v01r03			0.98	1.17	<b>1.31</b>
FCC Equipment Class	Licensed Portable Transmitter Held to Ear (PCE)				
Date(s) of Tests	2013-12-04 ~ 2013-12-20				
Antenna Type	Internal Type Antenna				
Functions	<ul style="list-style-type: none"> <li>● GSM/GPRS(GPRS Class: 12) / EDGE(RX Only) supported * DTM is not supported</li> <li>● BT(2.4GHz) / WLAN(2.4GHz 802.11b/g/n(HT20), 5 GHz 802.11a/n(HT20, HT40) supported * No simultaneous transmission between BT &amp; WLAN * 5.8 GHz W-LAN (DTS Band) is not supported.</li> <li>● Simultaneous transmission between GSM, CDMA, WCDMA voice &amp; WLAN / GPRS, WCDMA, CDMA&amp; WLAN</li> <li>● VoIP is not supported.</li> <li>● Mobile Hotspot is supported.</li> </ul>				

## 1.1 Guidance Applied

- IEEE 1528-2003
- FCC KDB Publication 941225 D01-D06 (2G/3G and Hotspot)
- FCC KDB Publication 248227 D01v01r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v05r01 (General SAR Guidance)
- FCC KDB Publication 865664 D01-D02 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 648474 D04v01r02 (Handset SAR)

## 1.2 Device Overview

Band & Mode	Operating Modes	Tx Frequency
GSM/GPRS/EDGE Rx Only 850	Voice/Data	824.2 ~ 848.8 MHz
Cell. CDMA	Voice/Data	824.70 ~ 848.31 MHz
WCDMA850	Voice/Data	826.4 ~ 846.6 MHz
GSM/GPRS/EDGE Rx Only 1900	Voice/Data	1850.2 ~ 1909.8 MHz
2.4 GHz WLAN	Data	2412 ~ 2462 MHz
5.2 GHz WLAN	Data	5180 ~ 5240 MHz
5.3 GHz WLAN	Data	5260 ~ 5320 MHz
5.5 GHz WLAN	Data	5500 ~ 5700 MHz
Bluetooth	Data	2402 ~ 2480 MHz

### 1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v05r01.

Band & Mode		Voice [dBm]	Burst Average GMSK [dBm]			
		1 TX Slot	1 TX Slot	2 TX Slot	3 TX Slot	4 TX Slot
GSM/GPRS 850	Maximum	33.0	33.0	30.0	28.3	27.0
	Nominal	32.5	32.5	29.5	27.8	26.5
GSM/GPRS 1900	Maximum	30.0	30.0	27.0	25.0	24.0
	Nominal	29.5	29.5	26.5	24.5	23.5


Band & Mode		Modulated Average [dBm]		
		3GPP RMC	3GPP HSDPA	3GPP HSUPA
WCDMA 850	Maximum	23.6	23.6	N/A
	Nominal	23.1	23.1	N/A

Band & Mode		Modulated Average [dBm]
Cell. CDMA	Maximum	23.5
	Nominal	23.0

Band & Mode	Modulated Average [dBm]	
IEEE 802.11b (2.4 GHz)	Maximum	15.7
	Nominal	14.5
IEEE 802.11g (2.4 GHz)	Maximum	12.0
	Nominal	10.8
IEEE 802.11n (2.4 GHz)	Maximum	11.4
	Nominal	10.2
IEEE 802.11a (5.2, 5.3, 5.5 GHz)	Maximum	13.9
	Nominal	12.7
IEEE 802.11n - HT20 (5.2, 5.3, 5.5 GHz)	Maximum	13.9
	Nominal	12.7
IEEE 802.11n - HT40 (5.2, 5.3, 5.5 GHz)	Maximum	11.6
	Nominal	10.4
Bluetooth	Maximum	6.2
	Nominal	5.0
Bluetooth LE	Maximum	1.2
	Nominal	0.0

## 1.4 DUT Antenna Locations & SAR Test Configurations

### DUT Antenna Locations (Rear Side View):

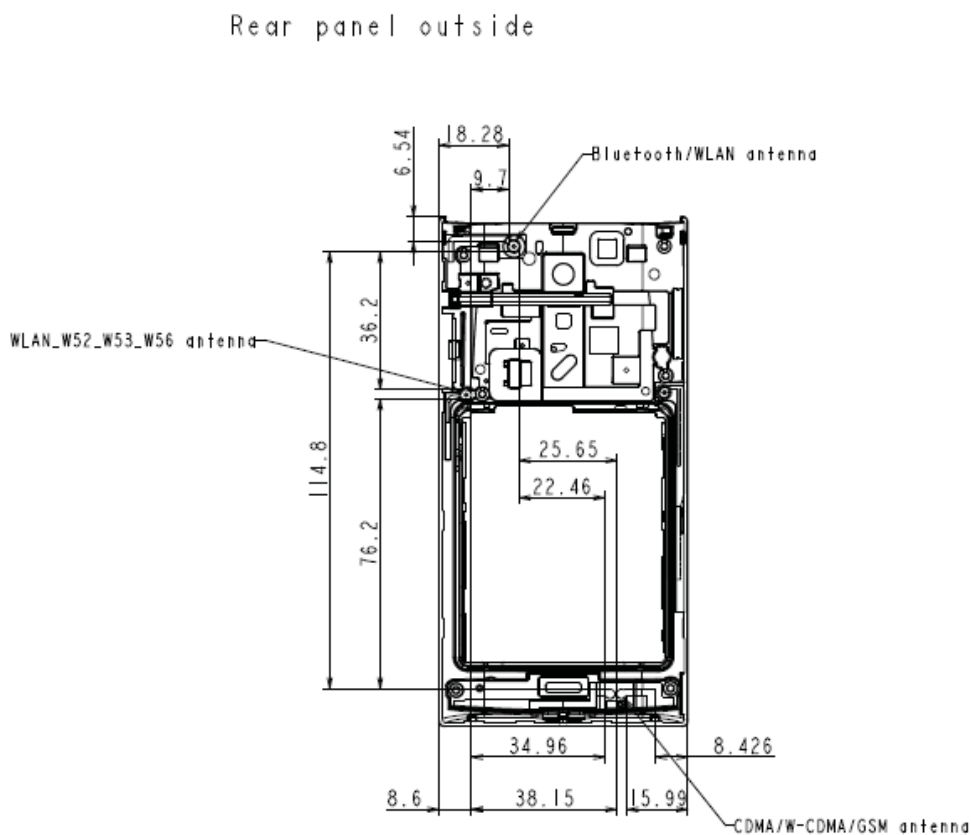

Note: Exact antenna dimensions and separation distances are shown in the Technical Descriptions in the FCC Filing.

### SAR Test Configurations

Mode	Mobile Hotspot Sides for SAR Testing					
	Top	Bottom	Front	Rear	Right	Left
GSM850	X	O	O	O	O	O
Cell. CDMA	X	O	O	O	O	O
WCDMA 850	X	O	O	O	O	O
PCS1900	X	O	O	O	O	O
2.4G W-LAN(802.11b/g/n)	O	X	O	O	O	X

Table 1.1 Mobile Hotspot Sides for SAR Testing

Note: Particular DUT edges were not required to be evaluated for Wireless Router SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06v01guidance, page 2. The antenna document shows the distances between the transmit antennas and the edges of the device. When the wireless router mode is enabled, all 5 GHz bands (5.2 ~ 5.5 GHz Bands) are disabled. Therefore 5 GHz WIFI is not considered in this section.



## 1.5 SAR Test Exclusions Applied

### (A) BT & WIFI

Since Wireless Router operations are not allowed by the chipset firmware using 5 GHz WIFI, only 2.4 GHz WIFI Hotspot SAR tests and combinations are considered for SAR with respect to Wireless Router configurations according to FCC KDB 941225 D06v01.

Per FCC KDB 447498 D01v05, **Bluetooth SAR was not required and 2.4 GHz / 5 GHz WIFI SAR was required** based on the maximum conducted power and the Bluetooth/WIFI antenna to user separation distance as followings.

Per FCC KDB 447498 D01v05, the SAR exclusion threshold for distances < 50 mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 3.0$$

Based on the maximum conducted power of Bluetooth and the antenna to use separation distance, **Bluetooth SAR was not required;  $(4 / 10) * \sqrt{2.480} = 0.7 < 3.0$ .**

Based on the maximum conducted power of Bluetooth LE and the antenna to use separation distance, **Bluetooth LE SAR was not required;  $(1 / 10) * \sqrt{2.480} = 0.2 < 3.0$ .**

Based on the maximum conducted power of 2.4 GHz WIFI and the antenna to use separation distance, **2.4 GHz WIFI SAR was required;  $(37 / 10) * \sqrt{2.412} = 5.8 > 3.0$ .**

Based on the maximum conducted power of 5 GHz WIFI and the antenna to use separation distance, **5 GHz WIFI SAR was required;  $(25 / 10) * \sqrt{5.280} = 5.6 > 3.0$ .**

Per KDB Publication 447498 D01v05r01, the maximum power of the channel was rounded to the nearest mW before calculation.

This device supports 20 MHz and 40 MHz Bandwidths for IEEE 802.11n for 5 GHz WIFI only. IEEE 802.11n was not evaluated for SAR since the average output power of 20 MHz and 40 MHz bandwidths was not more than 0.25 dB higher than the average output power of IEEE 802.11a.

### (B) Licensed Transmitter(s)

GSM/GPRS DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS Data.

CDMA 1x Advanced technology and EVDO are not supported for this device.

## 1.6 Device Serial Numbers

Band & Mode	Head Serial Number	Body-Worn Serial Number	Hotspot Serial Number
GSM/GPRS/EDGE Rx Only 850	FCC #1	FCC #1	FCC #1
Cell. CDMA	FCC #1	FCC #1	FCC #1
WCDMA 850	FCC #1	FCC #1	FCC #1
GSM/GPRS/EDGE Rx Only 1900	FCC #1	FCC #1	FCC #1
2.4 GHz WLAN	FCC #1	FCC #1	FCC #1
5 GHz WLAN	FCC #1	FCC #1	FCC #1

## 2. INTROCUCTION

The FCC and Industry Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices.

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95\*.1-2005 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. The measurement procedure described in IEEE/ANSI C95.3-1992 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86 NCRP, 1986, Bethesda, MD 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

### SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density ( $\rho$ ) It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Fig. 2.1)

$$SAR = \frac{d}{dt} \left( \frac{dU}{dm} \right) = \frac{d}{dt} \left( \frac{dU}{\rho dv} \right)$$

Fig. 2.1 SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- $\sigma$  = conductivity of the tissue-simulating material (S/m)
- $\rho$  = mass density of the tissue-simulating material ( $\text{kg/m}^3$ )
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.

### 3. DESCRIPTION OF TEST EQUIPMENT

#### 3.1 SAR MEASUREMENT SETUP

Measurements are performed using the DASY5 automated dosimetric assessment system. The DASY5 is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Staubli), robot controller, desktop computer, near-field probe, probe alignment sensor, and the generic twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Fig. 3.1).

A cell controller system contains the power supply, robot controller teach pendant (Joystick), and a remote control used to drive the robot motors. The PC consists of the Intel Core i7-3770 3.40 GHz desktop computer with Windows NT system and SAR Measurement Software DASY5, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

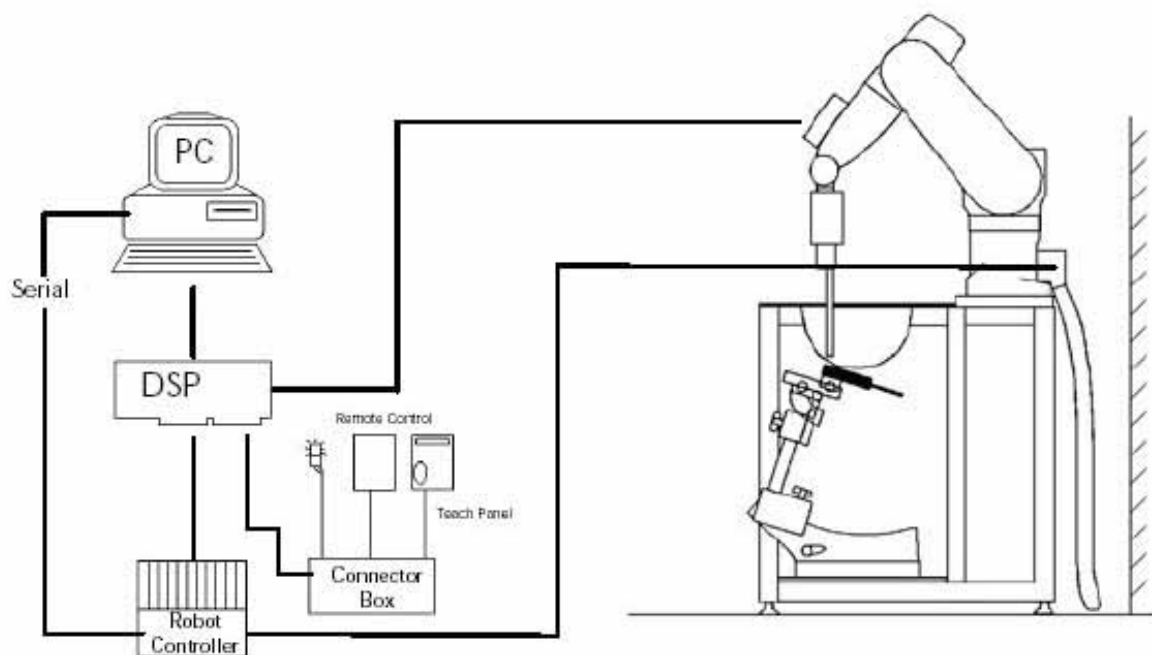


Figure 3.1 SAR Measurement System Setup

The DAE consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail.

### 3.2 EX3DV4 Probe Specification

<b>Calibration</b>	In air from 10 MHz to 6 GHz In brain and muscle simulating tissue at Frequencies of 450 MHz, 600 MHz, 750 MHz, 835 MHz, 900 MHz, 1750 MHz, 1900 MHz, 2300 MHz, 2450 MHz, 2600 MHz, 3500 MHz, 5200 MHz, 5300 MHz, 5500 MHz, 5600 MHz, 5800 MHz
<b>Frequency</b>	10 MHz to 6 GHz
<b>Linearity</b>	$\pm 0.2$ dB (30 MHz to 6 GHz)
<b>Dynamic</b>	5 $\mu$ W/g to > 100 mW/g
<b>Range</b>	Linearity : $\pm 0.2$ dB
<b>Dimensions</b>	Overall length : 330 mm
<b>Tip length</b>	20 mm
<b>Body diameter</b>	12 mm
<b>Tip diameter</b>	2.5 mm
<b>Distance from probe tip to sensor center</b>	1.0 mm
<b>Application</b>	SAR Dosimetry Testing Compliance tests of mobile phones




Figure 3.2 Triangular Probe Configurations



Figure 3.3 Probe Thick-Film Technique



DAE System

The SAR measurements were conducted with the dosimetric probe EX3DV4, designed in the classical triangular configuration (see Fig. 3.2) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multitier line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped at reaching the maximum.

### 3.3 Probe Calibration Process

#### 3.3.1 E-Probe Calibration

##### Dosimetric Assessment Procedure

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than +/- 10%. The spherical isotropy was evaluated with the procedure and found to be better than +/-0.25dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe is tested.

##### Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a waveguide above 1GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity at the proper orientation with the field. The probe is then rotated 360 degrees.

##### Temperature Assessment \*

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium, correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent the remits or based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

where:

$\Delta t$  = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

$\Delta T$  = temperature increase due to RF exposure.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

where:

$\sigma$  = simulated tissue conductivity,

$\rho$  = Tissue density (1.25 g/cm<sup>3</sup> for brain tissue)

SAR is proportional to  $\Delta T / \Delta t$ , the initial rate of tissue heating, before thermal diffusion takes place. Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E- field;

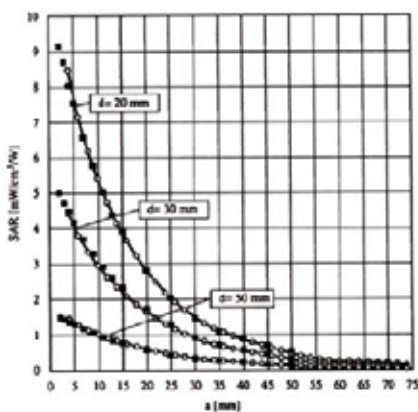


Figure 3.4 E-Field and Temperature Measurements at 900MHz

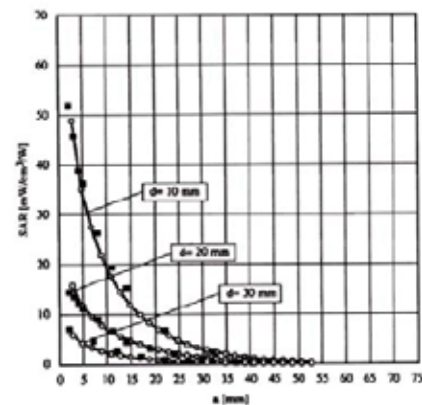


Figure 3.5 E-Field and Temperature Measurements at 1800MHz

### 3.4 Data Extrapolation

The DASY software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given like below;

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with  $V_i$  = compensated signal of channel i (i=x,y,z)  
 $U_i$  = input signal of channel i (i=x,y,z)  
 $cf$  = crest factor of exciting field (DASY parameter)  
 $dcp_i$  = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes: with  $V_i$  = compensated signal of channel i (i = x,y,z)  
 $Norm_i$  = sensor sensitivity of channel i (i = x,y,z)  
 $\mu V/(V/m)^2$  for E-field probes  
 $ConvF$  = sensitivity of enhancement in solution  
 $E_i$  = electric field strength of channel i in V/m

$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

The RSS value of the field components gives the total field strength (Hermetian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in W/g  
 $E_{tot}$  = total field strength in V/m  
 $\sigma$  = conductivity in [mho/m] or [Siemens/m]  
 $\rho$  = equivalent tissue density in g/cm<sup>3</sup>

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{free} = \frac{E_{tot}^2}{3770}$$

with  $P_{pwe}$  = equivalent power density of a plane wave in W/cm<sup>2</sup>  
 $E_{tot}$  = total electric field strength in V/m



### 3.5 SAM Twin PHANTOM

The SAM Twin Phantom V5.0 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid.

Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (see Fig. 3.6)



Figure 3.6 SAM Twin Phantom

#### SAM Twin Phantom Specification:

<b>Construction</b>	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.
	Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.
<b>Shell Thickness</b>	$2 \pm 0.2$ mm
<b>Filling Volume</b>	Approx. 25 liters
<b>Dimensions</b>	Length: 1000 mm Width: 500 mm Height: adjustable feet

#### Specific Anthropomorphic Mannequin (SAM) Specifications:

The phantom for handset SAR assessment testing is a low-loss dielectric shell, with shape and dimensions derived from the anthropometric data of the 90th percentile adult male head dimensions as tabulated by the US Army. The SAM Twin Phantom shell is bisected along the mid-sagittal plane into right and left halves (see Fig. 3.7). The perimeter sidewalls of each phantom halves are extended to allow filling with liquid to a depth that is sufficient to minimize reflections from the upper surface. The liquid depth is maintained at a minimum depth of 15cm to minimize reflections from the upper surface.



Figure 3.7 Sam Twin Phantom shell

#### 3.6 Device Holder for Transmitters

In combination with the Twin SAM Phantom V4.0/V4.0c, V5.0 or ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to IEC, IEEE, FCC or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat).

Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produce infinite number of configurations. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.



Figure 3.8 Mounting Device

### 3.7 Brain & Muscle Simulation Mixture Characterization

The brain and muscle mixtures consist of a viscous gel using hydrox-ethylcellulose (HEC) gelling agent and saline solution (see Table 3.1). Preservation with a bactericide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The mixture characterizations used for the brain and muscle tissue simulating liquids are according to the data by C. Gabriel and G. Harts grove.



Figure 3.9 Simulated Tissue

Table 3.1 Composition of the Tissue Equivalent Matter

Ingredients (% by weight)	Frequency (MHz)									
	835		900		1900		2450		5200 ~ 5800	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	40.19	50.75	41.45	52.50	55.24	70.23	71.88	73.40	65.52	80.00
Salt (NaCl)	1.480	0.940	1.450	1.400	0.310	0.290	0.160	0.060	-	-
Sugar	57.90	48.21	56.00	45.00	-	-	-	-	-	-
HEC	0.250	-	1.000	1.000	-	-	-	-	-	-
Bactericide	0.180	0.100	0.100	0.100	-	-	-	-	-	-
Triton X-100	-	-	-	-	-	-	19.97	-	17.24	-
DGBE	-	-	-	-	44.45	29.48	7.990	26.54	-	-
Diethylene glycol hexyl ether	-	-	-	-	-	-	-	-	17.24	-
Polysorbate (Tween) 80	-	-	-	-	-	-	-	-	-	20.00
Target for Dielectric Constant	41.5	55.2	41.5	55.0	40.0	53.3	39.2	52.7	-	-
Target for Conductivity (S/m)	0.90	0.97	0.97	1.05	1.40	1.52	1.80	1.95	-	-

Salt: 99 % Pure Sodium Chloride                      Sugar: 98 % Pure Sucrose  
 Water: De-ionized, 16M resistivity                      HEC: Hydroxyethyl Cellulose  
 DGBE: 99 % Di(ethylene glycol) butyl ether,[2-(2-butoxyethoxy) ethanol]  
 Triton X-100(ultra pure): Polyethylene glycol mono[4-(1,1,3,3-tetramethylbutyl)phenyl] ether



### 3.8 SAR TEST EQUIPMENT

Table 3.2 Test Equipment Calibration

	Type	Manufacturer	Model	Cal.Date	Next.Cal.Date	S/N
<input checked="" type="checkbox"/>	SEMITEC Engineering	SEMITEC	N/A	N/A	N/A	Shield Room
<input checked="" type="checkbox"/>	Robot	SCHMID	TX90XL	N/A	N/A	F13/5RR2A1/A/01
<input checked="" type="checkbox"/>	Robot Controller	SCHMID	C58C	N/A	N/A	F13/5RR2A1/C/01
<input checked="" type="checkbox"/>	Joystick	SCHMID	N/A	N/A	N/A	S-13200990
<input checked="" type="checkbox"/>	Intel Core i7-3770 3,40 GHz Windows 7 Professional	N/A	N/A	N/A	N/A	N/A
<input checked="" type="checkbox"/>	Probe Alignment Unit LB	N/A	N/A	N/A	N/A	SE UKS 030 AA
<input checked="" type="checkbox"/>	Mounting Device	SCHMID	Holder	N/A	N/A	SD000H01KA
<input type="checkbox"/>	Twin SAM Phantom	SCHMID	QD000P40CD	N/A	N/A	1785
<input checked="" type="checkbox"/>	Twin SAM Phantom	SCHMID	QD000P40CD	N/A	N/A	1786
<input checked="" type="checkbox"/>	Head/Body Equivalent Matter(835 MHz)	N/A	N/A	2013-01-01	2014-01-01	N/A
<input checked="" type="checkbox"/>	Head/Body Equivalent Matter(1900 MHz)	N/A	N/A	2013-01-01	2014-01-01	N/A
<input checked="" type="checkbox"/>	Head/Body Equivalent Matter(2450 MHz)	N/A	N/A	2013-01-01	2014-01-01	N/A
<input checked="" type="checkbox"/>	Head/Body Equivalent Matter(5 GHz)	N/A	N/A	2013-01-01	2014-01-01	N/A
<input checked="" type="checkbox"/>	Data Acquisition Electronics	SCHMID	DAE4	2013-09-23	2014-09-23	1396
<input checked="" type="checkbox"/>	Dosimetric E-Field Probe	SCHMID	EX3DV4	2013-09-24	2014-09-24	3933
<input type="checkbox"/>	Dummy Probe	N/A	N/A	N/A	N/A	N/A
<input checked="" type="checkbox"/>	835MHz SAR Dipole	SCHMID	D835V2	2013-09-05	2015-09-05	4d159
<input checked="" type="checkbox"/>	1900MHz SAR Dipole	SCHMID	D1900V2	2013-09-05	2015-09-05	5d176
<input checked="" type="checkbox"/>	2450MHz SAR Dipole	SCHMID	D2450V2	2013-09-10	2015-09-10	920
<input checked="" type="checkbox"/>	5000MHz System Validation Dipole	SCHMID	D5GHZV2	2013-03-15	2015-03-15	1103
<input checked="" type="checkbox"/>	Network Analyzer	Agilent	E5071C	2013-10-21	2014-10-21	MY46106970
<input checked="" type="checkbox"/>	Signal Generator	Rohde Schwarz	SMR20	2013-02-28	2014-02-28	101251
<input checked="" type="checkbox"/>	Amplifier	EMPOWER	BBS3Q7ELU	2013-09-12	2014-09-12	1020
<input checked="" type="checkbox"/>	High Power RF Amplifier	EMPOWER	BBS3Q8CCJ	2013-10-22	2014-10-22	1005
<input checked="" type="checkbox"/>	Power Meter	HP	EPM-442A	2013-02-28	2014-02-28	GB37170267
<input checked="" type="checkbox"/>	Power Meter	Anritsu	ML2495A	2013-03-06	2014-03-06	1306007
<input checked="" type="checkbox"/>	Wide Bandwidth Power Sensor	Anritsu	MA2490A	2013-03-06	2014-03-06	1249001
<input checked="" type="checkbox"/>	Power Sensor	HP	8481A	2013-02-28	2014-02-28	3318A96566
<input checked="" type="checkbox"/>	Power Sensor	HP	8481A	2013-02-14	2014-02-14	3318A96030
<input checked="" type="checkbox"/>	Dual Directional Coupler	Agilent	778D-012	2013-01-08	2014-01-08	50228
<input checked="" type="checkbox"/>	Directional Coupler	HP	773D	2013-06-27	2014-06-27	2389A00640
<input checked="" type="checkbox"/>	Low Pass Filter 1,5GHz	Micro LAB	LA-15N	2013-01-08	2014-01-08	N/A
<input checked="" type="checkbox"/>	Low Pass Filter 3,0GHz	Micro LAB	LA-30N	2013-09-12	2014-09-12	N/A
<input checked="" type="checkbox"/>	Low Pass Filter 6,0GHz	Micro LAB	LA-60N	2013-03-12	2014-03-12	03942
<input checked="" type="checkbox"/>	Attenuators(3 dB)	Agilent	8491B	2013-06-27	2014-06-27	MY39260700
<input checked="" type="checkbox"/>	Attenuators(10 dB)	WEINSCHEL	23-10-34	2013-01-08	2014-01-08	BP4387
<input type="checkbox"/>	Step Attenuator	HP	8494A	2013-09-12	2014-09-12	3308A33341
<input checked="" type="checkbox"/>	Dielectric Probe kit	SCHMID	DAK-3.5	2012-12-11	2013-12-11	1092
<input checked="" type="checkbox"/>	Dielectric Probe kit	SCHMID	DAK-3.5	2013-03-19	2014-03-19	1046
<input checked="" type="checkbox"/>	8960 Series 10 Wireless Comms. Test Set	Agilent	E5515C	2013-02-28	2014-02-28	GB43461134

**NOTE:** The E-field probe was calibrated by SPEAG, by temperature measurement procedure. Dipole Verification measurement is performed by Digital EMC before each test. The brain and muscle simulating material are calibrated by Digital EMC using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain-equivalent material.

## 4. TEST SYSTEM SPECIFICATIONS

### Automated TEST SYSTEM SPECIFICATIONS:

#### Positioner

<b>Robot</b>	Stäubli Unimation Corp. Robot Model: TX90XL
<b>Repeatability</b>	0.02 mm
<b>No. of axis</b>	6

#### Data Acquisition Electronic (DAE) System

##### Cell Controller

<b>Processor</b>	Intel Core i7-3770
<b>Clock Speed</b>	3,40 GHz
<b>Operating System</b>	Windows 7 Professional
<b>Data Card</b>	DASY5 PC-Board

##### Data Converter

<b>Features</b>	Signal, multiplexer, A/D converter. & control logic
<b>Software</b>	DASY5
<b>Connecting Lines</b>	Optical downlink for data and status info Optical uplink for commands and clock

##### PC Interface Card

<b>Function</b>	24 bit (64 MHz) DSP for real time processing Link to DAE 4 16 bit A/D converter for surface detection system serial link to robot direct emergency stop output for robot
-----------------	--

##### E-Field Probes

<b>Model</b>	EX3DV4 S/N: 3933
<b>Construction</b>	Triangular core fiber optic detection system
<b>Frequency</b>	10 MHz to 6 GHz
<b>Linearity</b>	$\pm 0.2$ dB (30 MHz to 6 GHz)

##### Phantom

<b>Phantom</b>	SAM Twin Phantom (V5.0)
<b>Shell Material</b>	Composite
<b>Thickness</b>	$2.0 \pm 0.2$ mm

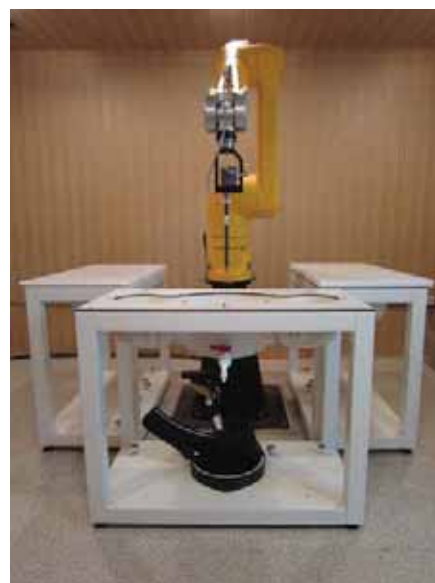


Figure 2.2 DASY5 Test System

## 5. SAR MEASUREMENT PROCEDURE

### 5.1 Measurement Procedure

The evaluation was performed using the following procedure:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664D01v01r02 (See Table 5.1).
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations / drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r02 (See Table 5.1). On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
  - a. The data was extrapolated to the surface of the outer-shell of the phantom. The combined distance extrapolated was the combined distance from the center of the dipoles 2.7mm away from the tip of the probe housing plus the 1.2 mm distance between the surface and the lowest measuring point. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
  - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
  - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.

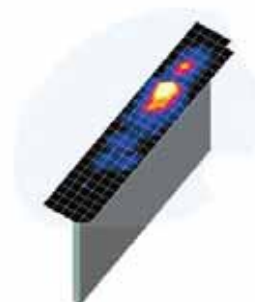


Figure 5.1  
Sample SAR Area Scan

Frequency	Maximum Area Scan Resolution (mm) ( $\Delta x_{area}$ , $\Delta y_{area}$ )	Maximum Zoom Scan Resolution (mm) ( $\Delta x_{zoom}$ , $\Delta y_{zoom}$ )	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
				$\Delta z_{zoom}(n)$	$\Delta z_{zoom}(1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 22

Table 5.1 Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r02

## 6. DEFINITION OF REFERENCE POINTS

### 6.1 Ear Reference Point

Figure 6.1 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point(ERP), and “RE” is the right ERP. The ERPs are 15mm posterior to the entrance to the Ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 6.5. The plane Passing, through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck- Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 6.1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning.

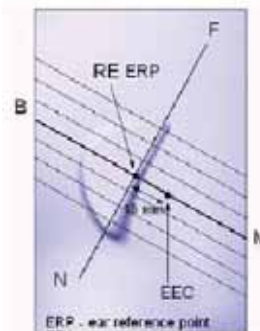


Figure 6.1  
Close-up side view of ERP

### 6.2 Handset Reference Points

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Fig. 6.3). The “test device reference point” was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at it’s top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 6.2 Front, back and side view SAM Twin Phantom

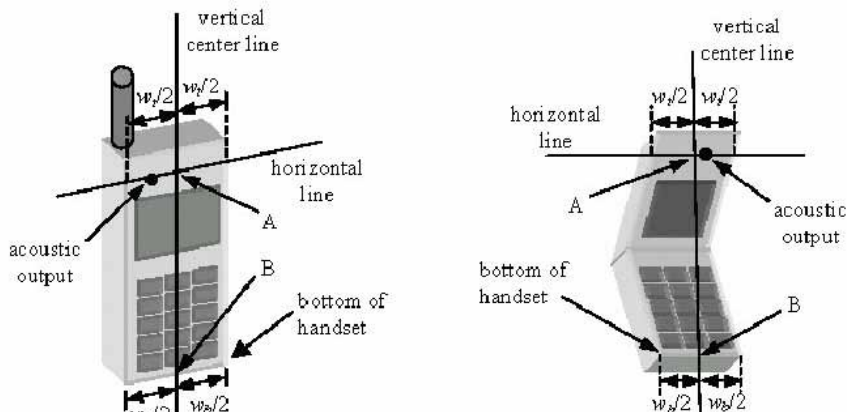


Figure 6.3 Handset Vertical Center & Horizontal Line Reference Points

## 7. TEST CONFIGURATION POSITIONS FOR HANDSETS

### 7.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ .

### 7.2 Positioning for Cheek/Touch

1. The test device was positioned with the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 7.1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.



Figure 7.1 Front, Side and Top View of Cheek/Touch Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the ear.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the plane normal to MB-NF including the line MB (reference plane).
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, the handset was rotated about the line NF until any point on the handset made contact with a phantom point below the ear (cheek). (See Figure 7.2)

### 7.3 Positioning for Ear / 15 ° Tilt

With the test device aligned in the “Cheek/Touch Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
2. The phone was then rotated around the horizontal line by 15 degree.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the phone touches the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. The tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 7.3).




Figure 7.2 Side view w/relevant markings



Figure 7.3 Front, Side and Top View of Ear/15° Position

## 7.4 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6.7). Per FCC KDB Publication 648474 D04v01r02, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v05r01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is  $> 1.2$  W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented.

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

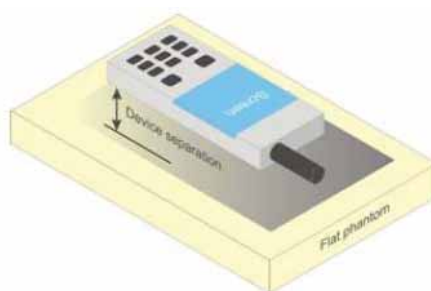


Figure 6.7 Sample Body-Worn Diagram

## 7.5 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v05r01 should be applied to determine SAR test requirements.

Per KDB Publication 447498 D01v05r01, Cell phones (handsets) are not normally designed to be used on extremities or operated in extremity only exposure conditions. The maximum output power levels of handsets generally do not require extremity SAR testing to show compliance. Therefore, extremity SAR was not evaluated for this device.



## 7.6 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v01r01 where SAR test considerations for handsets ( $L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$ ) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes.

Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v05r01 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

## 8. RF EXPOSURE LIMITS

### Uncontrolled Environment:

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### Controlled Environment:

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 8.1.SAR Human Exposure Specified in ANSI/IEEE C95.1-2005**

	HUMAN EXPOSURE LIMITS	
	General Public Exposure (W/kg) or (mW/g)	Occupational Exposure (W/kg) or (mW/g)
SPATIAL PEAK SAR * (Brain)	1.60	8.00
SPATIAL AVERAGE SAR ** (Whole Body)	0.08	0.40
SPATIAL PEAK SAR *** (Hands / Feet / Ankle / Wrist)	4.00	20.0

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e.as a result of employment or occupation).



## 9. FCC MEASUREMENT PROCEDURES

---

Power measurements were performed using a base station simulator under digital average power.

### 9.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v05r01, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. The highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

### 9.2 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v02 "SAR Measurement Procedures for 3G Devices" v02, October 2007.

The device was placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test were evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device was tested throughout the SAR test at maximum output power, the SAR measurement system measures a "point SAR" at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviated by more than 5%, the SAR test and drift measurements were repeated.

#### 9.2.1 SAR Measurement Conditions for UMTS

##### Output Power Verification

Maximum output power is measured on the High, Middle and Low channels for each applicable transmission band according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1s".

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121 (release 5), using the appropriate RMC with TPC(transmit power control) set to all "1s" or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

##### Head SAR Measurements for Handsets

SAR for head exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all "1s". SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than 0.25 dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2 AMR with a 3.4 kbps SRB (signaling radio bearer) using the exposure configuration that resulted in the highest SAR for that RF channel in the 12.2 kbps RMC mode.

##### Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all "1s".

## SAR Measurements for Handsets with Rel 5 HSDPA

Body SAR for HSDPA is not required for handsets with HSDPA capabilities when the maximum average output power of each RF channel with HSDPA active is less than 0.25 dB higher than that measured without HSDPA using 12.2 kbps RMC and the maximum SAR for 12.2 kbps RMC is  $\leq 75\%$  of the SAR limit. Otherwise, SAR is measured for HSDPA, using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration measured in 12.2 kbps RMC without HSDPA, on the maximum output channel with the body exposure configuration that resulted in the highest SAR in 12.2 kbps RMC mode for that RF channel.

The H-set used in FRC for HSDPA should be configured according to the UE category of a test device. The number of HS-DSCH/HSPDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the applicable H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the FRC for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 2 ms to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors of  $\beta_c=9$  and  $\beta_d=15$ , and power offset parameters of  $\Delta ACK = \Delta NACK = 5$  and  $\Delta CQI=2$  is used. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the FRC.

### 9.2.2 SAR Measurement Conditions for CDMA2000

The following procedures were performed according to FCC KDB Publication 941225 D01 "SAR Measurement Procedures for 3G Devices" v02, October 2007.

#### Output Power Verification

See 3GPP2 C.S0011/TIA-98-E as recommended by "SAR Measurement Procedures for 3G Devices" v02, October 2007. Maximum output power is verified on the High, Middle and Low channels according to procedures in section 4.4.5.2 of 3GPP2 C.S0011/TIA-98-E. SO55 tests were measured with power control bits in the "All Up" condition.

1. If the mobile station (MS) supports Reverse TCH RC 1 and Forward TCH RC 1, set up a call using Fundamental Channel Test Mode 1 (RC=1/1) with 9600 bps data rate only.
2. Under RC1, C.S0011 Table 4.4.5.2-1, Table 11-1 parameters were applied.
3. If the MS supports the RC 3 Reverse FCH, RC3 Reverse SCH0 and demodulation of RC 3, 4, or 5, set up a call using Supplemental Channel Test Mode 3 (RC 3/3) with 9600 bps Fundamental Channel and 9600 bps SCH0 data rate.
4. Under RC3, C.S0011 Table 4.4.5.2-2, Table 11-2 was applied.

#### Parameters for Max. Power for RC1

Parameter	Units	Value
$I_{or}$	dBm/1.23 MHz	-104
$\frac{Pilot E_c}{I_{or}}$	dB	-7
$\frac{Traffic E_c}{I_{or}}$	dB	-7.4

Table 11-1

#### Parameters for Max. Power for RC3

Parameter	Units	Value
$I_{or}$	dBm/1.23 MHz	-86
$\frac{Pilot E_c}{I_{or}}$	dB	-7
$\frac{Traffic E_c}{I_{or}}$	dB	-7.4

Table 11-2

5. FCHs were configured at full rate for maximum SAR with "All Up" power control bits.

## **CDMA 2000 1x Advanced**

This device additionally supports 1x Advanced. Conducted powers were measured using SO75 with RC8 on the uplink and RC11 on the downlink per Oct 2012 TCB Workshop notes. Smart blanking was disabled for all measurements. The EUT was configured with forward power control Mode 000 and reverse power control at 400 bps. Conducted powers were measured on an Agilent 8960 Series 10 Wireless Communications Test Set, Model E5515C using the CDMA2000 1x Advanced application, Option E1962B-410.

Based on the maximum output power measured for 1x Advanced, SAR is required for 1x advanced when if the maximum output for 1x Advanced is more than 0.25 dB higher than the maximum measured for 1x. Also, if the measured SAR in any 1x mode exposure conditions (head, body etc.) is larger than 1.2 W/kg, the highest of those configurations above 1.2 W/kg for each exposure condition in 1x Advanced has to be repeated. All measured SAR in 1x mode higher than 1.5 W/kg must be repeated for 1x Advanced.

## **Head SAR Measurements**

SAR for head exposure configurations is measured in RC3 with the DUT configured to transmit at full rate using Loopback Service Option SO55. SAR for RC1 is not required when the maximum average output of each channel is less than ¼ dB higher than that measured in RC3. Otherwise, SAR is measured on the maximum output channel in RC1 using the exposure configuration that results in the highest SAR for that channel in RC3.

## **Body SAR Measurements**

SAR for body exposure configurations is measured in RC3 with the DUT configured to transmit at full rate on FCH with all other code channels disabled using TDSO / SO32. SAR for multiple code channels (FCH + SCHn) is not required when the maximum average output of each RF channel is less than ¼ dB higher than that measured with FCH only. Otherwise, SAR is measured on the maximum output channel (FCH + SCHn) with FCH at full rate and SCH0 enabled at 9600 bps using the exposure configuration that results in the highest SAR for that channel with FCH only. When multiple code channels are enabled, the DUT output may shift by more than 0.5 dB and lead to higher SAR drifts and SCH dropouts. Body SAR was measured using TDSO /SO32 with power control bits in the "All Up".

Body SAR in RC1 is not required when the maximum average output of each channel is less than ¼ dB higher than that measured in RC3. Otherwise, SAR is measured on the maximum output channel in RC1; with Loopback Service Option SO55, at full rate, using the body exposure configuration that results in the highest SAR for that channel in RC3.

## **9.2.3 SAR Testing with 802.11 Transmitters**

### **SAR Testing with IEEE 802.11 a/b/g Transmitters**

Per KDB publication 248227, normal network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g/n transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 for more details.

### **General Device Setup**

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

**Frequency Channel Configurations**

For 2.4 GHz, the highest average RF output power channel between the low, mid and high channel at the lowest data rate was selected for SAR evaluation in 802.11b mode. 802.11g/n modes and higher data rates for 802.11b were additionally evaluated for SAR if the output power of the respective mode was 0.25 dB or higher than the powers of the SAR configurations tested in the 802.11b mode.

For 5 GHz, the highest average RF output power channel across the default test channels at the lowest data rate was selected for SAR evaluation in 802.11a. When the adjacent channels are higher in power than the default channels, these "required channels" were considered instead of the default channels for SAR testing. 802.11n modes and higher data rates for 802.11a/n were evaluated only if the respective mode was 0.25 dB or higher than the 802.11a mode.

If the maximum extrapolated peak SAR of the zoom scan for the highest output channel was less than 1.6 W/kg or if the 1g averaged SAR was less than 0.8 W/kg, SAR testing was not required for the other test channels in the band.

## 10. RF CONDUCTED POWERS

### GSM Conducted Powers for KYY22 (Burst-Averaged)

Band	Channel	Test Result(dBm)								
		Voice	GPRS/EDGE (GMSK) Data				EDGE(8-PSK) Data			
		GSM CS 1 Slot	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1TX Slot	EDGE 2TX Slot	EDGE 3TX Slot	EDGE 4TX Slot
GSM 850	128	32.8	32.8	29.7	28.1	26.9	N/A	N/A	N/A	N/A
	190	32.9	32.8	29.8	28.1	26.9	N/A	N/A	N/A	N/A
	251	32.9	32.9	29.8	28.0	26.9	N/A	N/A	N/A	N/A
PCS 1900	512	29.7	29.6	26.6	24.8	23.6	N/A	N/A	N/A	N/A
	661	29.7	29.6	26.6	24.9	23.6	N/A	N/A	N/A	N/A
	810	29.7	29.6	26.6	24.9	23.5	N/A	N/A	N/A	N/A

Table 10.1 The power was measured by E5515C

### GSM Conducted Powers for KYY22 (Calculated Frame-Averaged)

Band	Channel	Test Result(dBm)								
		Voice	GPRS/EDGE (GMSK) Data				EDGE(8-PSK) Data			
		GSM CS 1 Slot	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1TX Slot	EDGE 2TX Slot	EDGE 3TX Slot	EDGE 4TX Slot
GSM 850	128	23.77	23.77	23.68	23.84	23.89	N/A	N/A	N/A	N/A
	190	23.87	23.77	23.78	23.84	23.89	N/A	N/A	N/A	N/A
	251	23.87	23.87	23.78	23.74	23.89	N/A	N/A	N/A	N/A
PCS 1900	512	20.67	20.57	20.58	20.54	20.59	N/A	N/A	N/A	N/A
	661	20.67	20.67	20.58	20.64	20.59	N/A	N/A	N/A	N/A
	810	20.67	20.57	20.58	20.64	20.49	N/A	N/A	N/A	N/A

Note:

- Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- The bolded GPRS modes were selected according to the highest frame-averaged output power table according to KDB 941225 D03v01.
- GPRS/EDGE (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
- This device does not support EDGE. (EDGE RX only)

GSM Class: B  
 GPRS Multislot class: 12 (max 4 TX Uplink slots)  
 EDGE Multislot class: Rx Only  
 DTM Multislot Class: N/A

**WCDMA (HSDPA) Conducted Powers for KYY22**

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band (dBm)			PCS Band (dBm)			3GPP MPR (dB)
			4132	4183	4233	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	23.42	23.51	23.58	N/A	N/A	N/A	-
99		12.2 kbps AMR	23.40	23.50	23.57	N/A	N/A	N/A	-
5	HSDPA	Subtest 1	23.38	23.48	23.55	N/A	N/A	N/A	0
5		Subtest 2	23.35	23.46	23.54	N/A	N/A	N/A	0
5		Subtest 3	22.98	22.98	23.03	N/A	N/A	N/A	0.5
5		Subtest 4	22.94	22.97	23.01	N/A	N/A	N/A	0.5

Table 10.2 The power was measured E5515C

WCDMA SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v02r02. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.

This device does not support DC-HSDPA.

**CDMA Conducted Powers for KYY22**

Band	Channel	Loopback				Data	
		Frequency	SO55 [dBm]	SO55 [dBm]	SO75 [dBm]	TDSO SO32 [dBm]	TDSO SO32 [dBm]
	F-RC	MHz	RC1	RC3	RC8	FCH+SCH	FCH
Cellular	1013	824.70	23.42	23.43	Note2 N/A	23.41	23.42
	384	836.52	23.46	23.48	Note2 N/A	23.44	23.47
	777	848.31	23.39	23.42	Note2 N/A	23.40	23.41

Table 10.3 The power was measured by E5515C

Note1: RC1 is only applicable for IS-95 compatibility.

Note2: This device does not support 1xAdvanced (SO75) and EVDO.

Per KDB Publication 941225 D01v02:

1. Head SAR was tested with SO55 RC3. SO55 RC1 was not required since the average output power was not more than 0.25 dB than the SO55 RC3 powers.
2. Body-Worn SAR was tested with 1x RTT with TDSO / SO32 FCH Only. TDSO / SO32 FCH+SCH SAR tests were not required since the average output power was not more than 0.25 dB higher than the TDSO / SO32 FCH only powers.

**GSM, WCDMA and CDMA Power Measurement Setup**

**WLAN Conducted Powers for KYY22**

Band	Channel	Conducted Power (dBm)			
		Data Rate (Mbps)			
		1	2	5.5	11
802.11b	1	<u>15.48</u>	15.45	15.43	15.39
	6	15.09	15.01	15.03	15.02
	11	14.91	14.88	14.89	14.81

Table 10.4 IEEE 802.11b Average RF Power

Band	Channel	Conducted Power (dBm)							
		Data Rate (Mbps)							
		6	9	12	18	24	36	48	54
802.11g	1	11.06	11.02	11.01	10.99	10.84	10.85	9.55	9.31
	6	10.73	11.69	11.64	11.66	11.61	10.59	9.29	9.01
	11	10.65	11.66	11.63	11.51	11.46	11.39	10.11	9.81

Table 10.5 IEEE 802.11g Average RF Power

Band	Channel	Conducted Power (dBm)							
		Data Rate (Mbps)							
		6.5	13	19.5	26	39	52	58.5	65
802.11n (HT-20)	1	11.05	11.01	10.92	10.87	10.91	9.38	9.34	9.30
	6	10.71	10.65	10.54	10.47	10.51	9.01	8.92	8.95
	11	10.60	10.54	10.41	10.31	10.42	8.90	8.85	8.81

Table 10.6 IEEE 802.11n Average RF Power

Mode	Freq [MHz]	Channel	conducted Power [dBm]							
			Data Rate [Mbps]							
			6	9	12	18	24	36	48	54
802.11a	5180	36	12.21	12.19	12.18	12.13	12.10	12.01	11.81	11.78
	5200	40	12.20	12.15	12.11	12.10	12.09	11.97	11.81	11.75
	5240	48	<u>12.40</u>	12.37	12.36	12.31	12.25	12.21	12.01	11.99
	5260	52	13.60	13.55	13.58	13.52	13.45	13.41	13.20	13.21
	5280	56	<u>13.62</u>	13.61	13.59	13.53	13.41	13.40	13.24	13.29
	5320	64	13.29	13.21	13.22	13.14	13.11	13.10	12.93	12.87
	5500	100	13.21	13.17	13.16	13.08	13.05	13.02	12.89	12.79
	5580	116	<u>13.45</u>	13.40	13.37	13.35	13.21	13.21	13.04	12.98
	5700	140	13.05	13.03	12.95	12.94	12.86	12.78	12.60	12.55

Table 10.7 IEEE 802.11a Average RF Power



Mode	Freq [MHz]	Channel	conducted Power [dBm] 20M Bandwidth							
			Data Rate [Mbps]							
			6.5	13	19.5	26	39	52	58.5	65
802.11n	5180	36	12.11	12.01	11.91	11.83	11.71	11.62	11.49	11.41
	5200	40	12.12	12.01	11.93	11.81	11.70	11.58	11.47	11.37
	5240	48	12.28	12.18	12.10	12.06	11.90	11.77	11.61	11.53
	5260	52	13.60	13.51	13.47	13.36	13.25	13.21	12.99	12.95
	5280	56	13.21	13.11	13.01	12.91	12.83	12.71	12.51	12.52
	5320	64	13.25	13.14	13.10	13.03	12.94	12.73	12.62	12.54
	5500	100	13.19	13.11	13.01	12.94	12.93	12.71	12.53	12.50
	5580	116	13.40	13.33	13.21	13.18	13.04	12.91	12.81	12.73
	5700	140	13.05	12.99	12.90	12.81	12.71	12.60	12.35	12.35

Table 10.8 IEEE 802.11n Average RF Power – 20 MHz Bandwidth

Mode	Freq [MHz]	Channel	conducted Power [dBm] 40MHz Bandwidth							
			Data Rate [Mbps]							
			13.5/15	27/30	40.5/45	54/60	81/90	108/120	121.5 /135	135/150
802.11n	5190	38	11.30	10.38	10.37	9.11	9.08	9.07	8.89	8.17
	5230	46	11.03	10.01	10.02	8.75	8.74	8.70	8.57	7.80
	5270	54	11.35	10.40	10.35	9.12	9.05	9.01	8.91	8.20
	5310	62	10.95	10.08	9.91	8.73	8.67	8.65	8.55	7.77
	5510	102	11.30	10.30	10.31	9.09	9.05	8.96	8.81	8.16
	5550	110	11.32	10.35	10.33	9.01	9.02	8.96	8.80	8.10
	5670	134	11.20	10.20	10.19	8.92	8.90	8.90	8.71	8.03

Table 10.9 IEEE 802.11n Average RF Power – 40 MHz Bandwidth

**Bluetooth Conducted Powers for KKY22**

Channel	Frequency (MHz)	Output Power(1Mbps)		Output power (2Mbps)		Output power (3Mbps)		Output power (LE)	
		(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)
Low	2402	4.81	3.027	3.35	2.163	3.4	2.188	0.35	1.084
Mid	2441	5.37	3.443	3.93	2.472	3.99	2.506	0.46	1.112
High	2480	6.10	4.074	4.68	2.938	4.72	2.965	0.55	1.135

Table 10.10 Bluetooth Average RF Power



Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v01r02 and October 2012 / April 2013 FCC/TCB Meeting Notes:

- For 2.4 GHz, highest average RF output power channel for the lowest data rate for IEEE 802.11b were selected for SAR evaluation. Other IEEE 802.11 modes (including 802.11g/n) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11b mode.
- For 5 GHz, highest average RF output power channel for the lowest data rate for IEEE 802.11a were selected for SAR evaluation. Other IEEE 802.11 modes (including 802.11n 20 MHz and 40 MHz) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11a mode.
- When the maximum extrapolated peak SAR of the zoom scan for the maximum output channel is  $<1.6$  W/kg and the reported 1g averaged SAR is  $<0.8$  W/kg, SAR testing on other channels is not required. Otherwise, the other default (or corresponding required) test channels were additionally tested using the lowest data rate.
- The underlined data rate and channel above were tested for SAR.

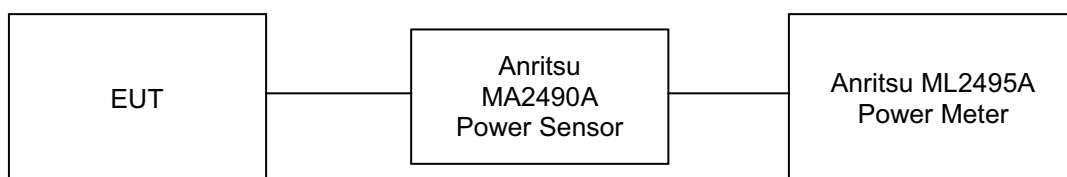


Figure 10.3 Power Measurement Setup for Bandwidths  $< 50$  MHz

## 11. SYSTEM VERIFICATION

### 11.1 Tissue Verification

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, $\epsilon_r$	Target Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon_r$	Measured Conductivity, $\sigma$ (S/m)	$\epsilon_r$ Deviation [%]	$\sigma$ Deviation [%]
Dec. 05. 2013	835 Head	21.0	21.8	824.2	41.551	0.899	40.160	0.922	-3.35	2.56
				835.0	41.500	0.900	40.118	0.925	-3.33	2.78
				836.6	41.500	0.902	40.114	0.926	-3.34	2.66
				848.8	41.500	0.915	40.080	0.931	-3.42	1.75
Dec. 05. 2013	835 Body	21.0	21.8	824.2	55.240	0.969	55.320	0.973	0.14	0.41
				835.0	55.200	0.970	55.230	0.984	0.05	1.44
				836.6	55.195	0.972	55.217	0.986	0.04	1.44
				848.8	55.158	0.987	55.127	0.999	-0.06	1.22
Dec. 06. 2013	835 Head	22.2	22.8	826.4	41.540	0.899	40.330	0.922	-2.91	2.56
				835.0	41.500	0.900	40.300	0.925	-2.89	2.78
				836.6	41.500	0.902	40.294	0.926	-2.91	2.66
				846.6	41.500	0.912	40.270	0.931	-2.96	2.08
Dec. 06. 2013	835 Body	22.2	22.8	826.4	55.230	0.969	55.228	0.976	0.00	0.72
				835.0	55.200	0.970	55.155	0.985	-0.08	1.55
				836.6	55.195	0.972	55.137	0.987	-0.11	1.54
				846.6	55.160	0.984	55.071	0.997	-0.16	1.32
Dec. 04. 2013	835 Head	20.7	21.3	824.70	41.549	0.899	40.400	0.884	-2.77	-1.67
				835.00	41.500	0.900	40.355	0.889	-2.76	-1.22
				836.52	41.500	0.902	40.348	0.890	-2.78	-1.33
				848.31	41.500	0.914	40.300	0.896	-2.89	-1.97
Dec. 04. 2013	835 Body	20.7	21.3	824.70	55.240	0.969	55.032	0.981	-0.38	1.24
				835.00	55.200	0.970	54.940	0.989	-0.47	1.96
				836.52	55.195	0.972	54.928	0.991	-0.48	1.95
				848.31	55.159	0.986	54.816	1.000	-0.62	1.42
Dec. 07. 2013	1900 Head	21.4	22.1	1850.2	40.000	1.400	38.792	1.407	-3.02	0.50
				1880.0	40.000	1.400	38.745	1.424	-3.14	1.71
				1900.0	40.000	1.400	38.706	1.436	-3.23	2.57
				1909.8	40.000	1.400	38.695	1.443	-3.26	3.07
Dec. 07. 2013	1900 Body	21.4	22.1	1850.2	53.300	1.520	52.747	1.472	-1.04	-3.16
				1880.0	53.300	1.520	52.704	1.506	-1.12	-0.92
				1900.0	53.300	1.520	52.649	1.525	-1.22	0.33
				1909.8	53.300	1.520	52.626	1.535	-1.26	0.99
Dec. 20. 2013	2450 Head	21.0	21.9	2412	39.268	1.766	38.525	1.764	-1.89	-0.11
				2437	39.223	1.788	38.460	1.786	-1.95	-0.11
				2450	39.200	1.800	38.423	1.797	-1.98	-0.17
				2462	39.184	1.813	38.400	1.808	-2.00	-0.28
Dec. 20. 2013	2450 Body	21.0	21.9	2412	52.751	1.914	52.648	1.941	-0.20	1.41
				2437	52.717	1.938	52.580	1.977	-0.26	2.01
				2450	52.700	1.950	52.550	1.992	-0.28	2.15
				2462	52.685	1.967	52.520	2.004	-0.31	1.88

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, $\epsilon_r$	Target Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon_r$	Measured Conductivity, $\sigma$ (S/m)	$\epsilon_r$ Deviation [%]	$\sigma$ Deviation [%]
Dec. 13. 2013	5 GHz Head	21.5	22.3	5200	36.00	4.660	35.651	4.748	-0.97	1.89
				5240	35.95	4.700	35.622	4.796	-0.91	2.04
				5280	35.89	4.740	35.525	4.839	-1.02	2.09
				5300	35.87	4.760	35.475	4.860	-1.10	2.10
				5500	35.60	4.960	35.190	5.087	-1.15	2.56
				5580	35.52	5.048	35.046	5.191	-1.33	2.83
				5600	35.00	5.068	35.039	5.212	0.11	2.84
			5800	35.30	5.270	34.661	5.439	-1.81	3.21	
Dec. 14. 2013	5 GHz Body	20.8	21.4	5200	49.00	5.300	48.248	5.373	-1.53	1.38
				5240	48.95	5.347	47.861	5.341	-2.22	-0.11
				5280	48.89	5.393	47.809	5.443	-2.21	0.93
				5300	48.87	5.417	47.968	5.513	-1.85	1.77
				5500	48.60	5.650	47.291	5.689	-2.69	0.69
				5580	48.52	5.746	47.443	5.862	-2.22	2.02
				5600	48.49	5.769	47.224	5.836	-2.61	1.16
			5800	48.20	6.000	47.176	6.237	-2.12	3.95	

### Tissue Verification Note:

Note: The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per IEEE 1528 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

### Measurement Procedure for Tissue verification:

- 1) The network analyzer and probe system was configured and calibrated.
- 2) The probe was immersed in the sample which was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured
- 4) The complex relative permittivity, for example from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\epsilon_r\epsilon_0}{[\ln(b/a)]^2} \int_a^b \int_a^b \int_0^\pi \cos\phi' \frac{\exp[-j\omega r(\mu_0\epsilon_r\epsilon_0)^{1/2}]}{r} d\phi' d\rho' d\rho$$

where Y is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively,  $r^2 = \rho^2 + \rho'^2 - 2\rho\rho'\cos\phi'$ ,  $\omega$  is the angular frequency, and  $j = \sqrt{-1}$ .

## 11.2 Test System Verification

Prior to assessment, the system is verified to the  $\pm 10\%$  of the specifications at 835 MHz, 1900 MHz, 2450 MHz and 5 GHz by using the SAR Dipole kit(s). (Graphic Plots Attached)

SYSTEM DIPOLE VERIFICATION TARGET & MEASURED												
SAR System #1	Freq. [MHz]	SAR Dipole kits	Date(s)	Liquid	Ambient Temp.[°C]	Liquid Temp.[°C]	Probe S/N	Input Power (mW)	1 W Target SAR <sub>1g</sub> (W/kg)	Measured SAR <sub>1g</sub> (W/kg)	1 W Normalized SAR <sub>1g</sub> (W/kg)	Deviation [%]
F	835	D835V2, SN:4d159	Dec. 05. 2013	Head	21.0	21.8	3933	250	9.44	2.36	9.44	0.00
F	835	D835V2, SN: 4d159	Dec. 05. 2013	Body	21.0	21.8	3933	250	9.28	2.38	9.52	2.59
F	835	D835V2, SN:4d159	Dec. 06. 2013	Head	22.2	22.8	3933	250	9.44	2.41	9.64	2.12
F	835	D835V2, SN: 4d159	Dec. 06. 2013	Body	22.2	22.8	3933	250	9.28	2.49	9.96	7.33
F	835	D835V2, SN:4d159	Dec. 04. 2013	Head	20.7	21.3	3933	250	9.44	2.25	9.00	-4.66
F	835	D835V2, SN: 4d159	Dec. 04. 2013	Body	20.7	21.3	3933	250	9.28	2.44	9.76	5.17
F	1900	D1900V2, SN:5d176	Dec. 07. 2013	Head	21.4	22.1	3933	250	40.4	10.7	42.80	5.94
F	1900	D1900V2, SN: 5d176	Dec. 07. 2013	Body	21.4	22.1	3933	250	40.7	10.6	42.40	4.18
F	2450	D2450V2, SN:920	Dec. 20. 2013	Head	21.0	21.9	3933	250	52.8	13.4	53.60	1.52
F	2450	D2450V2, SN: 920	Dec. 20. 2013	Body	21.0	21.9	3933	250	48.9	12.9	51.60	5.52
F	5200	D5GHzV2 SN: 1103	Dec. 13. 2013	Head	21.5	22.3	3933	100	81.1	7.8	78.00	-3.82
F	5300	D5GHzV2 SN: 1103							82.5	8.56	85.60	3.76
F	5500	D5GHzV2 SN: 1103							85.3	9.03	90.30	5.86
F	5600	D5GHzV2 SN: 1103							84.5	8.58	85.80	1.54
F	5800	D5GHzV2 SN: 1103							80.5	8.12	81.20	0.87
F	5200	D5GHzV2 SN: 1103	Dec. 14. 2013	Body	20.8	21.4	3933	100	74.7	7.92	79.20	6.02
F	5300	D5GHzV2 SN: 1103							76.0	8.17	81.70	7.50
F	5500	D5GHzV2 SN: 1103							80.0	8.05	80.50	0.63
F	5600	D5GHzV2 SN: 1103							81.3	8.68	86.80	6.77
F	5800	D5GHzV2 SN: 1103							75.5	7.42	74.20	-1.72

Note1 : Validation was measured with input 250 mW, 100 mW and normalized to 1W.

Note2 : To confirm the proper SAR liquid depth, the z-axis plots from the system verifications were included since the system verifications were performed using the same liquid, probe and DAE as the SAR tests in the same time period.

Note3: Full system validation status and results can be found in Attachment 3.

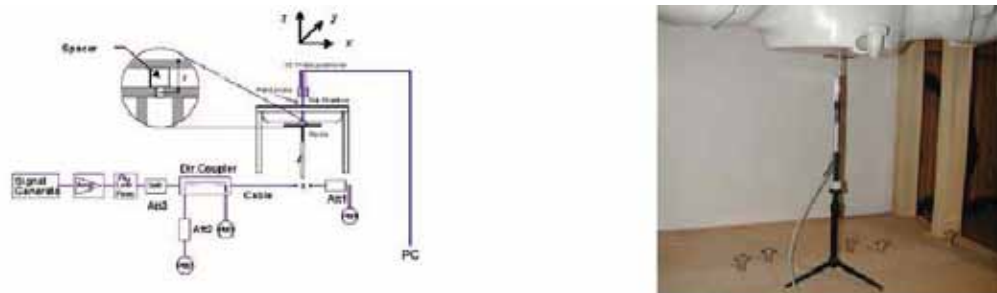


Figure 11.1 Dipole Verification Test Setup

## 12. SAR TEST RESULTS

### 12.1 Head SAR Results

Table 12.1 GSM 850 Head SAR

MEASUREMENT RESULTS													
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)
MHz	Ch												
836.6	190	GSM850	GSM	33.0	32.9	-0.080	Left Touch	FCC #1	1	1:8.3	0.336	1.023	0.344
836.6	190	GSM850	GSM	33.0	32.9	-0.060	Right Touch	FCC #1	1	1:8.3	0.332	1.023	0.340
836.6	190	GSM850	GSM	33.0	32.9	0.150	Left Tilt	FCC #1	1	1:8.3	0.292	1.023	0.299
836.6	190	GSM850	GSM	33.0	32.9	-0.160	Right Tilt	FCC #1	1	1:8.3	0.295	1.023	0.302
ANSI / IEEE C95.1-2005- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Head 1.6 W/kg (mW/g) averaged over 1 gram				

Table 12.2 PCS 1900 Head SAR

MEASUREMENT RESULTS													
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)
MHz	Ch												
1880.0	661	PCS1900	PCS	30.0	29.7	-0.070	Left Touch	FCC #1	1	1:8.3	0.507	1.072	0.543
1880.0	661	PCS1900	PCS	30.0	29.7	0.000	Right Touch	FCC #1	1	1:8.3	0.313	1.072	0.335
1880.0	661	PCS1900	PCS	30.0	29.7	0.090	Left Tilt	FCC #1	1	1:8.3	0.167	1.072	0.179
1880.0	661	PCS1900	PCS	30.0	29.7	-0.030	Right Tilt	FCC #1	1	1:8.3	0.146	1.072	0.156
ANSI / IEEE C95.1-2005- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Head 1.6 W/kg (mW/g) averaged over 1 gram				

Table 12.3 WCDMA 850 Head SAR

MEASUREMENT RESULTS													
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	
MHz	Ch												
836.6	4183	WCDMA 850	RMC	23.6	23.51	0.040	Left Touch	FCC #1	1:1	0.259	1.021	0.264	
836.6	4183	WCDMA 850	RMC	23.6	23.51	0.080	Right Touch	FCC #1	1:1	0.296	1.021	0.302	
836.6	4183	WCDMA 850	RMC	23.6	23.51	-0.050	Left Tilt	FCC #1	1:1	0.305	1.021	0.311	
836.6	4183	WCDMA 850	RMC	23.6	23.51	-0.030	Right Tilt	FCC #1	1:1	0.286	1.021	0.292	
ANSI / IEEE C95.1-2005- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Head 1.6 W/kg (mW/g) averaged over 1 gram				

Table 12.4 Cell. CDMA Head SAR

MEASUREMENT RESULTS													
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	
MHz	Ch												
836.52	384	Cell. CDMA	RC3/SO55	23.5	23.48	0.060	Left Touch	FCC #1	1:1	0.342	1.005	0.344	
836.52	384	Cell. CDMA	RC3/SO55	23.5	23.48	0.070	Right Touch	FCC #1	1:1	0.349	1.005	0.351	
836.52	384	Cell. CDMA	RC3/SO55	23.5	23.48	-0.040	Left Tilt	FCC #1	1:1	0.313	1.005	0.314	
836.52	384	Cell. CDMA	RC3/SO55	23.5	23.48	-0.010	Right Tilt	FCC #1	1:1	0.314	1.005	0.315	
ANSI / IEEE C95.1-2005- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Head 1.6 W/kg (mW/g) averaged over 1 gram				

Table 12.5 DTS Head SAR

MEASUREMENT RESULTS													
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)
MHz	Ch												
2412	1	802.11b	DSSS	15.7	15.48	-0.060	Left Touch	FCC #1	1	1:1	0.419	1.052	0.441
2412	1	802.11b	DSSS	15.7	15.48	0.150	Right Touch	FCC #1	1	1:1	0.165	1.052	0.174
2412	1	802.11b	DSSS	15.7	15.48	0.170	Left Tilt	FCC #1	1	1:1	0.304	1.052	0.320
2412	1	802.11b	DSSS	15.7	15.48	0.040	Right Tilt	FCC #1	1	1:1	0.139	1.052	0.146
ANSI / IEEE C95.1-2005– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram					

Table 12.6 NII Head SAR

MEASUREMENT RESULTS													
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)
MHz	Ch												
5240	48	802.11a	OFDM	13.9	12.40	0.000	Left Touch	FCC #1	6	1:1	0.060	1.413	0.085
5240	48	802.11a	OFDM	13.9	12.40	0.000	Right Touch	FCC #1	6	1:1	0.040	1.413	0.057
5240	48	802.11a	OFDM	13.9	12.40	0.000	Left Tilt	FCC #1	6	1:1	0.027	1.413	0.038
5240	48	802.11a	OFDM	13.9	12.40	0.000	Right Tilt	FCC #1	6	1:1	0.014	1.413	0.020
5280	56	802.11a	OFDM	13.9	13.62	0.000	Left Touch	FCC #1	6	1:1	0.141	1.067	0.150
5280	56	802.11a	OFDM	13.9	13.62	0.000	Right Touch	FCC #1	6	1:1	0.081	1.067	0.086
5280	56	802.11a	OFDM	13.9	13.62	0.000	Left Tilt	FCC #1	6	1:1	0.048	1.067	0.051
5280	56	802.11a	OFDM	13.9	13.62	0.000	Right Tilt	FCC #1	6	1:1	0.022	1.067	0.023
5580	116	802.11a	OFDM	13.9	13.45	0.000	Left Touch	FCC #1	6	1:1	0.158	1.109	0.175
5580	116	802.11a	OFDM	13.9	13.45	0.000	Right Touch	FCC #1	6	1:1	0.148	1.109	0.164
5580	116	802.11a	OFDM	13.9	13.45	0.000	Left Tilt	FCC #1	6	1:1	0.101	1.109	0.112
5580	116	802.11a	OFDM	13.9	13.45	0.000	Right Tilt	FCC #1	6	1:1	0.157	1.109	0.174
ANSI / IEEE C95.1-2005– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram					

## 12.2 Standalone Body-Worn SAR Results

Table 12.7 GSM/PCS/WCDMA/Cell. CDMA Body-Worn SAR

FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Spacing [Side]	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)
MHz	Ch												
824.2	128	GSM850	GSM	33.0	32.8	-0.130	10 mm [Rear]	FCC #1	1	1:8.3	0.824	1.047	0.863
836.6	190	GSM850	GSM	33.0	32.9	0.010	10 mm [Rear]	FCC #1	1	1:8.3	0.867	1.023	0.887
848.8	251	GSM850	GSM	33.0	32.9	-0.020	10 mm [Rear]	FCC #1	1	1:8.3	0.723	1.023	0.740
1880.0	661	PCS1900	PCS	30.0	29.7	0.160	10 mm [Rear]	FCC #1	1	1:8.3	0.620	1.072	0.664
836.6	4183	WCDMA 850	RMC	23.6	23.51	-0.060	10 mm [Rear]	FCC #1	N/A	1:1	0.734	1.021	0.749
824.70	1013	Cell. CDMA	TDSO/SO32	23.5	23.42	0.050	10 mm [Rear]	FCC #1	N/A	1:1	0.928	1.019	0.945
836.52	384	Cell. CDMA	TDSO/SO32	23.5	23.47	0.100	10 mm [Rear]	FCC #1	N/A	1:1	0.847	1.007	0.853
848.31	777	Cell. CDMA	TDSO/SO32	23.5	23.41	-0.060	10 mm [Rear]	FCC #1	N/A	1:1	0.628	1.021	0.641
836.6	190	GSM850	GSM	33.0	32.9	0.000	10 mm [Rear]	FCC #1	1	1:8.3	0.854	1.023	0.874
824.70	1013	Cell. CDMA	TDSO/SO32	23.5	23.42	-0.050	10 mm [Rear]	FCC #1	N/A	1:1	0.926	1.019	0.943
ANSI / IEEE C95.1-2005– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram					

Note: Blue entries represent repeatability measurements.

Table 12.8 DTS Body-Worn SAR

FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Spacing [Side]	Device Serial Number	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)
MHz	Ch												
2412	1	802.11b	DSSS	15.7	15.48	-0.040	10 mm [Rear]	FCC #1	1	1:1	0.217	1.052	0.228
ANSI / IEEE C95.1-2005– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram					

Table 12.9NII Body-Worn SAR

FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Spacing [Side]	Device Serial Number	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)
MHz	Ch												
5240	48	802.11a	OFDM	13.9	12.40	-0.050	10 mm [Rear]	FCC #1	6	1:1	0.042	1.413	0.059
5280	56	802.11a	OFDM	13.9	13.62	0.160	10 mm [Rear]	FCC #1	6	1:1	0.059	1.067	0.063
5580	116	802.11a	OFDM	13.9	13.45	-0.070	10 mm [Rear]	FCC #1	6	1:1	0.109	1.109	0.121
ANSI / IEEE C95.1-2005– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram					



## 12.3 Standalone Wireless router SAR Results

Table 12.10 GPRS/WCDMA Hotspot SAR

MEASUREMENT RESULTS													
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Spacing [Side]	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)
MHz	Ch												
836.6	190	GSM 850	GPRS	27.0	26.9	-0.040	10 mm [Bottom]	FCC #1	4	1:2.075	0.107	1.023	0.109
836.6	190	GSM 850	GPRS	27.0	26.9	0.090	10 mm [Front]	FCC #1	4	1:2.075	0.655	1.023	0.670
824.2	128	GSM 850	GPRS	33.0	32.8	-0.140	10 mm [Rear]	FCC #1	1	1:8.3	0.890	1.047	0.932
836.6	190	GSM 850	GPRS	33.0	32.8	-0.010	10 mm [Rear]	FCC #1	1	1:8.3	0.939	1.047	0.983
848.8	251	GSM 850	GPRS	33.0	32.9	0.190	10 mm [Rear]	FCC #1	1	1:8.3	0.728	1.023	0.745
824.2	128	GSM 850	GPRS	30.0	29.7	0.070	10 mm [Rear]	FCC #1	2	1:4.15	0.866	1.072	0.928
836.6	190	GSM 850	GPRS	30.0	29.8	-0.140	10 mm [Rear]	FCC #1	2	1:4.15	0.795	1.047	0.832
848.8	251	GSM 850	GPRS	30.0	29.8	0.060	10 mm [Rear]	FCC #1	2	1:4.15	0.704	1.047	0.737
824.2	128	GSM 850	GPRS	28.3	28.1	0.170	10 mm [Rear]	FCC #1	3	1:2.77	0.946	1.047	0.991
836.6	190	GSM 850	GPRS	28.3	28.1	0.050	10 mm [Rear]	FCC #1	3	1:2.77	0.933	1.047	0.977
848.8	251	GSM 850	GPRS	28.3	28.0	-0.010	10 mm [Rear]	FCC #1	3	1:2.77	0.813	1.072	0.871
824.2	128	GSM 850	GPRS	27.0	26.9	-0.010	10 mm [Rear]	FCC #1	4	1:2.075	1.060	1.023	1.085
836.6	190	GSM 850	GPRS	27.0	26.9	-0.050	10 mm [Rear]	FCC #1	4	1:2.075	0.948	1.023	0.970
848.8	251	GSM 850	GPRS	27.0	26.9	-0.140	10 mm [Rear]	FCC #1	4	1:2.075	0.909	1.023	0.930
824.2	128	GSM 850	GPRS	27.0	26.9	0.140	10 mm [Right]	FCC #1	4	1:2.075	0.947	1.023	0.969
836.6	190	GSM 850	GPRS	27.0	26.9	-0.030	10 mm [Right]	FCC #1	4	1:2.075	0.922	1.023	0.943
848.8	251	GSM 850	GPRS	27.0	26.9	0.010	10 mm [Right]	FCC #1	4	1:2.075	0.898	1.023	0.919
836.6	190	GSM 850	GPRS	27.0	26.9	0.030	10 mm [Left]	FCC #1	4	1:2.075	0.597	1.023	0.611
824.2	128	GSM 850	GPRS	27.0	26.9	0.140	10 mm [Rear]	FCC #1	4	1:2.075	1.020	1.023	1.044
1880.0	661	PCS1900	GPRS	25.0	24.9	0.120	10 mm [Bottom]	FCC #1	3	1:2.77	0.291	1.023	0.298
1880.0	661	PCS1900	GPRS	25.0	24.9	-0.030	10 mm [Front]	FCC #1	3	1:2.77	0.636	1.023	0.651
1880.0	661	PCS1900	GPRS	30.0	29.7	0.000	10 mm [Rear]	FCC #1	1	1:8.3	0.627	1.072	0.672
1880.0	661	PCS1900	GPRS	27.0	26.6	-0.170	10 mm [Rear]	FCC #1	2	1:4.15	0.630	1.096	0.691
1880.0	661	PCS1900	GPRS	25.0	24.9	0.050	10 mm [Rear]	FCC #1	3	1:2.77	0.719	1.023	0.736
1880.0	661	PCS1900	GPRS	24.0	23.6	0.050	10 mm [Rear]	FCC #1	4	1:2.075	0.643	1.096	0.705
1880.0	661	PCS1900	GPRS	25.0	24.9	0.030	10 mm [Right]	FCC #1	3	1:2.77	0.184	1.023	0.188
1880.0	661	PCS1900	GPRS	25.0	24.9	0.010	10 mm [Left]	FCC #1	3	1:2.77	0.407	1.023	0.416
ANSI / IEEE C95.1-2005– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram					

Note: Blue entries represent repeatability measurements.

Table 12.11 WCDMA/Cell. CDMA Hotspot SAR

MEASUREMENT RESULTS													
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Spacing [Side]	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)
MHz	Ch												
836.6	4183	WCDMA 850	RMC	23.6	23.51	-0.000	10 mm [Bottom]	FCC #1	N/A	1:1	0.077	1.021	0.079
836.6	4183	WCDMA 850	RMC	23.6	23.51	-0.090	10 mm [Front]	FCC #1	N/A	1:1	0.533	1.021	0.544
836.6	4183	WCDMA 850	RMC	23.6	23.51	-0.060	10 mm [Rear]	FCC #1	N/A	1:1	0.734	1.021	0.749
836.6	4183	WCDMA 850	RMC	23.6	23.51	-0.030	10 mm [Right]	FCC #1	N/A	1:1	0.679	1.021	0.693
836.6	4183	WCDMA 850	RMC	23.6	23.51	-0.120	10 mm [Left]	FCC #1	N/A	1:1	0.473	1.021	0.483
836.52	384	Cell. CDMA	TDSO/SO32	23.5	23.47	-0.150	10 mm [Bottom]	FCC #1	N/A	1:1	0.013	1.007	0.013
836.52	384	Cell. CDMA	TDSO/SO32	23.5	23.47	-0.030	10 mm [Front]	FCC #1	N/A	1:1	0.690	1.007	0.695
824.70	1013	Cell. CDMA	TDSO/SO32	23.5	23.42	0.050	10 mm [Rear]	FCC #1	N/A	1:1	0.928	1.019	0.945
836.52	384	Cell. CDMA	TDSO/SO32	23.5	23.47	0.100	10 mm [Rear]	FCC #1	N/A	1:1	0.847	1.007	0.853
848.31	777	Cell. CDMA	TDSO/SO32	23.5	23.41	-0.060	10 mm [Rear]	FCC #1	N/A	1:1	0.628	1.021	0.641
836.52	384	Cell. CDMA	TDSO/SO32	23.5	23.47	-0.160	10 mm [Right]	FCC #1	N/A	1:1	0.637	1.007	0.641
836.52	384	Cell. CDMA	TDSO/SO32	23.5	23.47	-0.010	10 mm [Left]	FCC #1	N/A	1:1	0.447	1.007	0.450
ANSI / IEEE C95.1-2005- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram					

Table 12.12 W-LAN Hotspot SAR

MEASUREMENT RESULTS													
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Spacing [Side]	Device Serial Number	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)
MHz	Ch												
2412	1	802.11b	DSSS	15.7	15.48	-0.130	10 mm [Top]	FCC #1	1	1:1	0.081	1.052	0.085
2412	1	802.11b	DSSS	15.7	15.48	-0.120	10 mm [Front]	FCC #1	1	1:1	0.131	1.052	0.138
2412	1	802.11b	DSSS	15.7	15.48	-0.040	10 mm [Rear]	FCC #1	1	1:1	0.217	1.052	0.228
2412	1	802.11b	DSSS	15.7	15.48	0.100	10 mm [Right]	FCC #1	1	1:1	0.169	1.052	0.178
ANSI / IEEE C95.1-2005- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram					

## 12.4 SAR Test Notes

### General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2003, FCC KDB Publication 865664 D01v01r02 and FCC KDB Publication 447498 D01v05r01.
2. Batteries are fully charged at the beginning of the SAR measurements. A standard battery was used for all SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v05r01.
6. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 10 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
7. Per FCC KDB Publication 648474 D04v01r02, SAR was evaluated without a headset connected to the device. Since the standalone reported SAR was  $\leq 1.2$  W/kg, no additional SAR evaluations using a headset cable were required.
8. During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v01r01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated (See Section 6.7 for more details).
9. Per FCC KDB 865664 D01v01r02, variability SAR tests were performed when the measured SAR results for a frequency band were greater than 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 14 for variability analysis.

### GSM Notes:

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. Per FCC KDB Publication 447498 D01v05r01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.

### WCDMA Notes:

1. WCDMA mode was tested under RMC 12.2 kbps with HSDPA Inactive per KDB Publication 941225 D01v02.
2. Body SAR for HSDPA is not required for handsets with HSDPA capabilities when the maximum average output power of each RF channel with HSPA active is less than 0.25 dB higher than that measured without HSDPA using 12.2 kbps RMC and the maximum SAR for 12.2 kbps RMC is  $\leq 75\%$  of the SAR limit.
3. Per FCC KDB Publication 447498 D01v05r01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.

## CDMA Notes:

1. Head SAR for CDMA2000 mode was tested under RC3/SO55 per FCC KDB Publication 941225 D01v02.
2. Body-Worn SAR was tested with 1x RTT with TDSO / SO32 FCH Only. TDSO / SO32 FCH+SCH SAR tests were not required since the average output power was not more than 0.25 dB higher than the TDSO / SO32 FCH only powers, per FCC KDB Publication 941225 D01v02.
3. Per FCC KDB Publication 447498 D01v05, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel must be used.

## WLAN Notes:

1. Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v01r02 and October 2012 FCC/TCB Meeting Notes for 2.4 GHz WIFI: Highest average RF output power channel for the lowest data rate was selected for SAR evaluation in 802.11b. Other IEEE 802.11 modes (including 802.11g/n) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11b mode.
2. Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v01r02 and October 2012 FCC/TCB Meeting Notes for 5 GHz WIFI: Highest average RF output power channel for the lowest data rate was selected for SAR evaluation in 802.11a. Other IEEE 802.11 modes (including 802.11n 20 MHz and 40 MHz bandwidths) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11a mode.
3. When Hotspot is enabled, all 5 GHz bands are disabled. Therefore no 5 GHz WIFI Wireless Router SAR Data was required.
4. WIFI transmission was verified using a spectrum analyzer.
5. Since the maximum extrapolated peak SAR of the zoom scan for the maximum output channel is  $< 1.6$  W/kg and the reported 1g averaged SAR is  $< 0.8$  W/kg, SAR testing on other default channels was not required.

## 13. FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

### 13.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v05r01 are applicable to handsets with built-in unlicensed transmitters such as Bluetooth devices which may simultaneously transmit with the licensed transmitter.

### 13.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v05r01 IV.C.1.iii, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is  $\leq 1.6$  W/kg. When standalone SAR is not required to be measured, per FCC KDB 447498 D01v05r01 4.3.2 2), the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{7.5} * \frac{(\text{Max Power of channel, mW})}{\text{Min. Separation Distance, mm}}$$

Table 13.1 Estimated SAR

Mode	Frequency	Maximum Allowed Power		Separation Distance (Body)	Estimated SAR (Body)
	[MHz]	[dBm]	[mW]	[mm]	[W/kg]
Bluetooth	2480	6.2	4	10	0.084

Note: Held-to ear configurations are not applicable to Bluetooth operations and therefore were not considered for simultaneous transmission. Per KDB Publication 447498 D01v05r01, the maximum power of the channel was rounded to the nearest mW before calculation.

### 13.3 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v05r01, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the DUT are shown in Figure 13.1 and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.

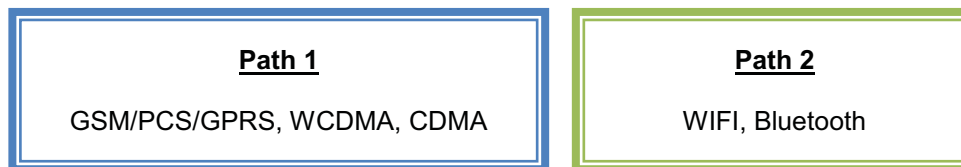


Figure 13.1 Simultaneous Transmission Paths

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v05r01 3) procedures.

Table 13.2 Simultaneous Transmission Scenarios

Ref.	Simultaneous Transmit Configurations	Head	Body-Worn Accessory	Hot Spot	Note
		IEEE1528, Supp C	Supplement C	FCC KDB 941225 D06 Edges/sides	
1	GSM850 Voice + 2.4 GHz WIFI	Yes	Yes	N/A	
2	1x CDMA Voice + 2.4 GHz WIFI	Yes	Yes	N/A	
3	WCDMA850 + 2.4 GHz WIFI	Yes	Yes	N/A	
4	PCS1900 Voice + 2.4 GHz WIFI	Yes	Yes	N/A	
5	GSM850 Voice + 5 GHz WIFI	Yes	Yes	N/A	
6	1x CDMA Voice + 5 GHz WIFI	Yes	Yes	N/A	
7	WCDMA850 + 5 GHz WIFI	Yes	Yes	N/A	
8	PCS1900 Voice + 5 GHz WIFI	Yes	Yes	N/A	
9	GSM850 GPRS + 2.4 GHz WIFI	N/A	N/A	Yes	
10	1x CDMA + 2.4 GHz WIFI	N/A	N/A	Yes	
11	WCDMA850 + 2.4 GHz WIFI	N/A	N/A	Yes	WCDMA + WIFI Hotspot
12	GPRS1900 GPRS + 2.4 GHz WIFI	N/A	N/A	Yes	
13	GSM850 GPRS + 5 GHz WIFI	N/A	N/A	N/A	
14	GPRS1900 GPRS + 5 GHz WIFI	N/A	N/A	N/A	
15	GSM850 Voice + Bluetooth	N/A	Yes	N/A	
16	1x CDMA Voice+ Bluetooth	N/A	Yes	N/A	
17	WCDMA850 + Bluetooth	N/A	Yes	N/A	
18	PCS1900 Voice + Bluetooth	N/A	Yes	N/A	

Notes:

1. WCDMA data and GPRS supports Hotspot.
2. Bluetooth and WIFI cannot transmit simultaneously since they share the same chip.
3. GSM and WCDMA cannot transmit simultaneously since they share the same chip.
4. This device do not supports VoIP.

### 13.4 Head SAR Simultaneous Transmission Analysis

Table 13.3 Simultaneous Transmission Scenario with 2.4 GHz W-LAN (Held to Ear)

Simult TX	Configuration	GSM850 SAR (W/kg)	2.4G W-LAN (802.11b) SAR (W/kg)	$\Sigma$ SAR (W/kg)	Simult TX	Configuration	PCS1900 SAR (W/kg)	2.4G W-LAN (802.11b) SAR (W/kg)	$\Sigma$ SAR (W/kg)
Head SAR	Left Touch	0.344	0.441	0.785	Head SAR	Left Touch	0.543	0.441	0.984
	Right Touch	0.340	0.174	0.514		Right Touch	0.335	0.174	0.509
	Left Tilt	0.299	0.320	0.619		Left Tilt	0.179	0.320	0.499
	Right Tilt	0.302	0.146	0.448		Right Tilt	0.156	0.146	0.302

Table 13.4 Simultaneous Transmission Scenario with 2.4 GHz W-LAN (Held to Ear)

Simult TX	Configuration	WCDMA 850 SAR (W/kg)	2.4G W-LAN (802.11b) SAR (W/kg)	$\Sigma$ SAR (W/kg)	Simult TX	Configuration	Cell. CDMA SAR (W/kg)	2.4G W-LAN (802.11b) SAR (W/kg)	$\Sigma$ SAR (W/kg)
Head SAR	Left Touch	0.264	0.441	0.705	Head SAR	Left Touch	0.344	0.441	0.785
	Right Touch	0.302	0.174	0.476		Right Touch	0.351	0.174	0.525
	Left Tilt	0.311	0.320	0.631		Left Tilt	0.314	0.320	0.634
	Right Tilt	0.292	0.146	0.438		Right Tilt	0.315	0.146	0.461

Table 13.5 Simultaneous Transmission Scenario with 5.2 GHz W-LAN (Held to Ear)

Simult TX	Configuration	GSM850 SAR (W/kg)	5.2G W-LAN (802.11a) SAR (W/kg)	$\Sigma$ SAR (W/kg)	Simult TX	Configuration	PCS1900 SAR (W/kg)	5.2G W-LAN (802.11a) SAR (W/kg)	$\Sigma$ SAR (W/kg)
Head SAR	Left Touch	0.344	0.085	0.429	Head SAR	Left Touch	0.543	0.085	0.628
	Right Touch	0.340	0.057	0.397		Right Touch	0.335	0.057	0.392
	Left Tilt	0.299	0.038	0.337		Left Tilt	0.179	0.038	0.217
	Right Tilt	0.302	0.020	0.322		Right Tilt	0.156	0.020	0.176

Table 13.6 Simultaneous Transmission Scenario with 5.2 GHz W-LAN (Held to Ear)

Simult TX	Configuration	WCDMA 850 SAR (W/kg)	5.2G W-LAN (802.11a) SAR (W/kg)	$\Sigma$ SAR (W/kg)	Simult TX	Configuration	Cell. CDMA SAR (W/kg)	5.2G W-LAN (802.11a) SAR (W/kg)	$\Sigma$ SAR (W/kg)
Head SAR	Left Touch	0.264	0.085	0.349	Head SAR	Left Touch	0.344	0.085	0.429
	Right Touch	0.302	0.057	0.359		Right Touch	0.351	0.057	0.408
	Left Tilt	0.311	0.038	0.349		Left Tilt	0.314	0.038	0.352
	Right Tilt	0.292	0.020	0.312		Right Tilt	0.315	0.020	0.335

Table 13.7 Simultaneous Transmission Scenario with 5.3 GHz W-LAN (Held to Ear)

Simult TX	Configuration	GSM850 SAR (W/kg)	5.3G W-LAN (802.11a) SAR (W/kg)	$\Sigma$ SAR (W/kg)	Simult TX	Configuration	PCS1900 SAR (W/kg)	5.3G W-LAN (802.11a) SAR (W/kg)	$\Sigma$ SAR (W/kg)
Head SAR	Left Touch	0.344	0.150	0.494	Head SAR	Left Touch	0.543	0.150	0.693
	Right Touch	0.340	0.086	0.426		Right Touch	0.335	0.086	0.421
	Left Tilt	0.299	0.051	0.350		Left Tilt	0.179	0.051	0.230
	Right Tilt	0.302	0.023	0.325		Right Tilt	0.156	0.023	0.179



Table 13.8 Simultaneous Transmission Scenario with 5.3 GHz W-LAN (Held to Ear)

Simult TX	Configuration	WCDMA 850 SAR (W/kg)	5.3G W-LAN (802.11a) SAR (W/kg)	$\Sigma$ SAR (W/kg)	Simult TX	Configuration	Cell. CDMA SAR (W/kg)	5.3G W-LAN (802.11a) SAR (W/kg)	$\Sigma$ SAR (W/kg)
Head SAR	Left Touch	0.264	0.150	0.414	Head SAR	Left Touch	0.344	0.150	0.494
	Right Touch	0.302	0.086	0.388		Right Touch	0.351	0.086	0.437
	Left Tilt	0.311	0.051	0.362		Left Tilt	0.314	0.051	0.365
	Right Tilt	0.292	0.023	0.315		Right Tilt	0.315	0.023	0.338

Table 13.9 Simultaneous Transmission Scenario with 5.5 GHz W-LAN (Held to Ear)

Simult TX	Configuration	GSM850 SAR (W/kg)	5.5G W-LAN (802.11a) SAR (W/kg)	$\Sigma$ SAR (W/kg)	Simult TX	Configuration	PCS1900 SAR (W/kg)	5.5G W-LAN (802.11a) SAR (W/kg)	$\Sigma$ SAR (W/kg)
Head SAR	Left Touch	0.344	0.175	0.519	Head SAR	Left Touch	0.543	0.175	0.718
	Right Touch	0.340	0.164	0.504		Right Touch	0.335	0.164	0.499
	Left Tilt	0.299	0.112	0.411		Left Tilt	0.179	0.112	0.291
	Right Tilt	0.302	0.174	0.476		Right Tilt	0.156	0.174	0.330

Table 13.10 Simultaneous Transmission Scenario with 5.5 GHz W-LAN (Held to Ear)

Simult TX	Configuration	WCDMA 850 SAR (W/kg)	5.5G W-LAN (802.11a) SAR (W/kg)	$\Sigma$ SAR (W/kg)	Simult TX	Configuration	Cell. CDMA SAR (W/kg)	5.5G W-LAN (802.11a) SAR (W/kg)	$\Sigma$ SAR (W/kg)
Head SAR	Left Touch	0.264	0.175	0.439	Head SAR	Left Touch	0.344	0.175	0.519
	Right Touch	0.302	0.164	0.466		Right Touch	0.351	0.164	0.515
	Left Tilt	0.311	0.112	0.423		Left Tilt	0.314	0.112	0.426
	Right Tilt	0.292	0.174	0.466		Right Tilt	0.315	0.174	0.489

### 13.5 Body-Worn Simultaneous Transmission Analysis

Table 13.11 Simultaneous Transmission Scenario with 2.4 GHz W-LAN (Body-Worn at 10 mm)

Configuration	Mode	2G/3G SAR (W/kg)	2.4G W-LAN (802.11b) SAR (W/kg)	$\Sigma$ SAR (W/kg)
Rear Side	GSM850	0.887	0.228	1.115
Rear Side	PCS1900	0.664	0.228	0.892
Rear Side	WCDMA850	0.749	0.228	0.977
Rear Side	Cell. CDMA	0.945	0.228	1.173

Table 13.12 Simultaneous Transmission Scenario with 5.2 GHz W-LAN (Body-Worn at 10 mm)

Configuration	Mode	2G/3G SAR (W/kg)	5.2G W-LAN (802.11b) SAR (W/kg)	$\Sigma$ SAR (W/kg)
Rear Side	GSM850	0.887	0.059	0.946
Rear Side	PCS1900	0.664	0.059	0.723
Rear Side	WCDMA850	0.749	0.059	0.808
Rear Side	Cell. CDMA	0.945	0.059	1.004

Table 13.13 Simultaneous Transmission Scenario with 5.3 GHz W-LAN (Body-Worn at 10 mm)

Configuration	Mode	2G/3G SAR (W/kg)	5.3G W-LAN (802.11b) SAR (W/kg)	$\Sigma$ SAR (W/kg)
Rear Side	GSM850	0.887	0.063	0.950
Rear Side	PCS1900	0.664	0.063	0.727
Rear Side	WCDMA850	0.749	0.063	0.812
Rear Side	Cell. CDMA	0.945	0.063	1.008

Table 13.14 Simultaneous Transmission Scenario with 5.5 GHz W-LAN (Body-Worn at 10 mm)

Configuration	Mode	2G/3G SAR (W/kg)	5.5G W-LAN (802.11b) SAR (W/kg)	$\Sigma$ SAR (W/kg)
Rear Side	GSM850	0.887	0.121	1.008
Rear Side	PCS1900	0.664	0.121	0.785
Rear Side	WCDMA850	0.749	0.121	0.870
Rear Side	Cell. CDMA	0.945	0.121	1.066

Table 13.15 Simultaneous Transmission Scenario with Bluetooth (Body-Worn at 10 mm)

Configuration	Mode	2G/3G SAR (W/kg)	Bluetooth SAR (W/kg)	$\Sigma$ SAR (W/kg)
Rear Side	GSM850	0.887	0.084	0.971
Rear Side	PCS1900	0.664	0.084	0.748
Rear Side	WCDMA850	0.749	0.084	0.833
Rear Side	Cell. CDMA	0.945	0.084	1.029

Note: Bluetooth SAR was not required to be measured per FCC KDB 447498. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

## 10.6 Hotspot SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 941225 D06v01, the device edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR ("-").

Table 13.16 Simultaneous Transmission Scenario (Hotspot at 10 mm)

Simult TX	Configuration	GSM850 SAR (W/kg)	2.4G W-LAN (802.11b) SAR (W/kg)	ΣSAR (W/kg)	Simult TX	Configuration	PCS1900 SAR (W/kg)	2.4G W-LAN (802.11b) SAR (W/kg)	ΣSAR (W/kg)
Body SAR	Top	-	0.085	0.085	Body SAR	Top	-	0.085	0.085
	Bottom	0.109	-	0.109		Bottom	0.298	-	0.298
	Front	0.670	0.138	0.808		Front	0.651	0.138	0.789
	Rear	1.085	0.228	1.313		Rear	0.736	0.228	0.964
	Right	0.969	0.178	1.147		Right	0.188	0.178	0.366
	Left	0.611	-	0.611		Left	0.416	-	0.416

Table 13.17 Simultaneous Transmission Scenario (Hotspot at 10 mm)

Simult TX	Configuration	WCDMA 850 SAR (W/kg)	2.4G W-LAN (802.11b) SAR (W/kg)	ΣSAR (W/kg)	Simult TX	Configuration	Cell. CDMA SAR (W/kg)	2.4G W-LAN (802.11b) SAR (W/kg)	ΣSAR (W/kg)
Body SAR	Top	-	0.085	0.085	Body SAR	Top	-	0.085	0.085
	Bottom	0.079	-	0.079		Bottom	0.013	-	0.013
	Front	0.544	0.138	0.682		Front	0.695	0.138	0.833
	Rear	0.749	0.228	0.977		Rear	0.945	0.228	1.173
	Right	0.693	0.178	0.871		Right	0.641	0.178	0.819
	Left	0.483	-	0.483		Left	0.450	-	0.45

## 13.5 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v05r01.


## Description of Volume Scan:

In order to determine the EM field distribution in a three-dimensional spatial extension, volume scans are required. In free space, these assessments can help to gain more information on the performance of the DUT (e.g., to determine the degree of symmetry of the field radiated from a horn antenna).

For dosimetric application, it is necessary to assess the peak spatial SAR value averaged over a volume. For this purpose, fine resolution volume scans need to be performed at the peak SAR location(s) determined during the Area Scan. In DASY4 software these scans are called Zoom Scan jobs. The default Zoom Scan measures  $7 \times 7 \times 7$  points with a step size of 5 mm. Faster evaluations can be achieved with a reduced number of measurement points. For example, a Zoom Scan with a grid step size in x- and y-directions of 7.5 mm ( $5 \times 5 \times 7$  cube configuration) reduces the measurement time to almost half with only 1-2% difference in SAR reading compared to the fine-resolution  $7 \times 7 \times 7$  scan.

For SAR evaluations with larger spatial extensions (e.g., within a complete phantom head section) a Volume Scan job should be used.

The Volume Scan job is compatible with DASY4 SAR, PRO and NEO system levels. Volume Scans are used to assess peak SAR and averaged SAR measurement in largely extended 3-dimensional volumes within any phantom. This measurement does not need any previous area scan. The grid can be anchored to a user specific point or to the current probe location. With an Administrator access mode, the grid can be optionally graded in Z-direction, whereby the smallest grid step and the grading ratio can be defined. Chosen grading ratio is automatically adjusted so that the desired extent in Z-direction is fully covered.

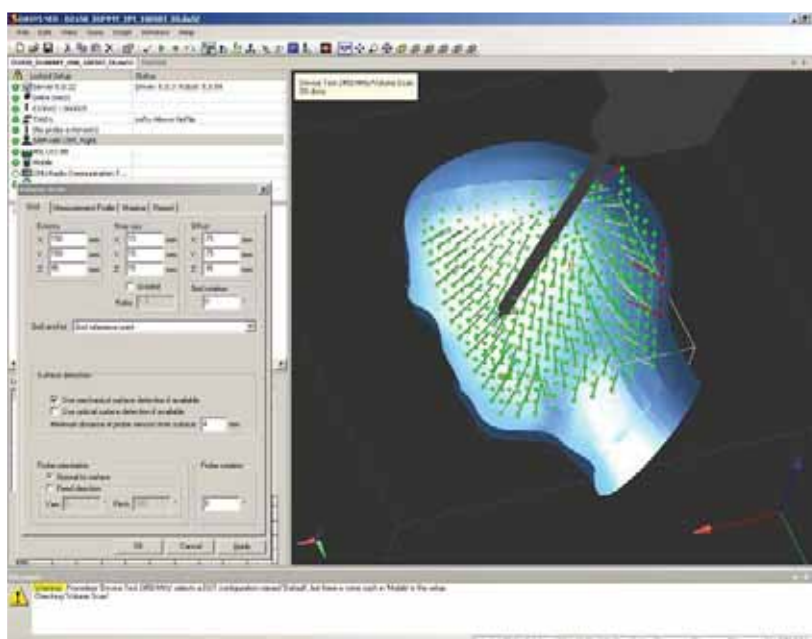

Under the Report page, the quantity to be evaluated for an instant report may be selected. This quantity can be: field magnitude, SAR, interpolated SAR or averaged SAR.

**SAR Assessment:****Alternative1**

- Evaluation Method
  - Maximum summed SAR Value
- Description
  - Easiest and most conservative method to determine the upper limit of multi-band SAR
- Example
  - F1's SAR Value is 0.9
  - F2's SAR Value is 1.3
  - Multi-band SAR Value is  $0.9 + 1.3 = 2.2$

**Alternative2**


- Evaluation Method
  - Selection of highest assessed maximum SAR Value
- Description
  - Accurate estimate of the multi-band SAR
- Example
  - F1's SAR Value is 0.9
  - F2's SAR Value is 1.3
  - Multi-band SAR Value is 1.3

**Alternative3**

- Evaluation Method
  - Combining existing Area and Zoom Scan results by Post-Processor
- Description
  - Rapid way of obtaining the multi-band SAR. It is always applicable.
- Example
  - F1's SAR Value is 0.9
  - F2's SAR Value is 1.3
  - Combining results by Post-Processor

**Alternative4**

- Evaluation Method
  - Combining existing Area and Zoom Scan results by Post-Processor
- Description
  - The most accurate way of assessing the multi-band SAR and always applicable.
- Example
  - F1's SAR Value is 0.9
  - F2's SAR Value is 1.3
  - Combining results by Post-Processor

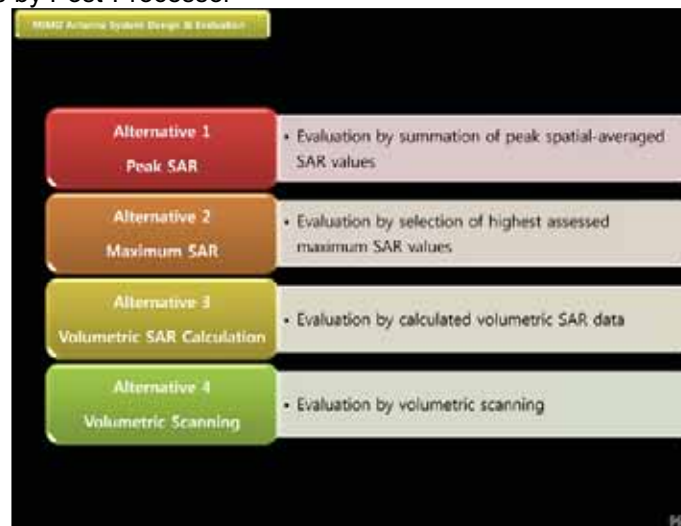

## 14. SAR MEASUREMENT VARIABILITY

### 14.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r01, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

*SAR Measurement Variability was assessed using the following procedures for each frequency band:*

1. When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.
2. A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).
3. A third repeated measurement was performed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .
4. Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg

**Table 14.1 Body SAR Measurement Variability Results**

Frequency		Mode	Service	# of Time Slots	Spacing [Side]	Measured SAR (1g)	1st Repeated SAR(1g)	Ratio	2nd Repeated SAR(1g)	Ratio	3rd Repeated SAR(1g)	Ratio
MHz	Ch.					(W/kg)	(W/kg)		(W/kg)		(W/kg)	
836.6	190	GSM850	GSM	1	10 mm [Rear]	0.867	0.854	1.02	N/A	N/A	N/A	N/A
824.70	1013	Cell. CDMA	TDSO/SO32	N/A	10 mm [Rear]	0.928	0.926	1.002	N/A	N/A	N/A	N/A
824.2	128	GSM 850	GPRS	4	10 mm [Rear]	1.060	1.020	1.04	N/A	N/A	N/A	N/A
<b>ANSI / IEEE C95.1-2005– SAFETY LIMIT</b>							<b>Body</b>					
<b>Spatial Peak</b>							<b>1.6 W/kg (mW/g)</b>					
<b>Uncontrolled Exposure/General Population Exposure</b>							<b>averaged over 1 gram</b>					

### 14.2 Measurement Uncertainty

The measured SAR was  $< 1.5$  W/kg for all frequency bands. Therefore, per KDB Publication 865664 D01v01r01, the standard measurement uncertainty analysis per IEEE 1528-2003 was not required.

## 15. IEEE P1528 –MEASUREMENT UNCERTAINTIES

### 835 MHz Head

Error Description	Uncertain value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
<b>Measurement System</b>						
Probe calibration	$\pm 6.0$	Normal	1	1	$\pm 6.0 \%$	$\infty$
Axial isotropy	$\pm 4.7$	Rectangular	$\sqrt{3}$	1	$\pm 2.714 \%$	$\infty$
Hemispherical isotropy	$\pm 9.6$	Rectangular	$\sqrt{3}$	1	$\pm 5.543 \%$	$\infty$
Boundary Effects	$\pm 0.8$	Rectangular	$\sqrt{3}$	1	$\pm 0.462 \%$	$\infty$
Probe Linearity	$\pm 4.7$	Rectangular	$\sqrt{3}$	1	$\pm 2.714 \%$	$\infty$
Detection limits	$\pm 0.25$	Rectangular	$\sqrt{3}$	1	$\pm 0.144 \%$	$\infty$
Readout Electronics	$\pm 1.0$	Normal	1	1	$\pm 1.0 \%$	$\infty$
Response time	$\pm 0.8$	Rectangular	$\sqrt{3}$	1	$\pm 0.462 \%$	$\infty$
Integration time	$\pm 2.6$	Rectangular	$\sqrt{3}$	1	$\pm 1.501 \%$	$\infty$
RF Ambient Conditions	$\pm 3.0$	Rectangular	$\sqrt{3}$	1	$\pm 1.732 \%$	$\infty$
Probe Positioner	$\pm 0.4$	Rectangular	$\sqrt{3}$	1	$\pm 0.231 \%$	$\infty$
Probe Positioning	$\pm 2.9$	Rectangular	$\sqrt{3}$	1	$\pm 1.674 \%$	$\infty$
Algorithms for Max. SAR Eval.	$\pm 1.0$	Rectangular	$\sqrt{3}$	1	$\pm 0.577 \%$	$\infty$
<b>Test Sample Related</b>						
Device Positioning	$\pm 2.9$	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	$\pm 3.6$	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	$\pm 5.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.887 \%$	$\infty$
<b>Physical Parameters</b>						
Phantom Shell	$\pm 4.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.309 \%$	$\infty$
Liquid conductivity (Target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.64	$\pm 2.887 \%$	$\infty$
Liquid conductivity (Meas.)	$\pm 4.5$	Normal	1	0.64	$\pm 4.5 \%$	$\infty$
Liquid permittivity (Target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.6	$\pm 2.887 \%$	$\infty$
Liquid permittivity (Meas.)	$\pm 4.8$	Normal	1	0.6	$\pm 4.8 \%$	$\infty$
<b>Combined Standard Uncertainty</b>					<b><math>\pm 12.2 \%</math></b>	<b>330</b>
<b>Expanded Uncertainty (k=2)</b>					<b><math>\pm 24.4 \%</math></b>	

The above measurement uncertainties are according to IEEE P1528 (2003)



**835 MHz Body**

Error Description	Uncertain value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
<b>Measurement System</b>						
Probe calibration	$\pm 6.0$	Normal	1	1	$\pm 6.0 \%$	$\infty$
Axial isotropy	$\pm 4.7$	Rectangular	$\sqrt{3}$	1	$\pm 2.714 \%$	$\infty$
Hemispherical isotropy	$\pm 9.6$	Rectangular	$\sqrt{3}$	1	$\pm 5.543 \%$	$\infty$
Boundary Effects	$\pm 0.8$	Rectangular	$\sqrt{3}$	1	$\pm 0.462 \%$	$\infty$
Probe Linearity	$\pm 4.7$	Rectangular	$\sqrt{3}$	1	$\pm 2.714 \%$	$\infty$
Detection limits	$\pm 0.25$	Rectangular	$\sqrt{3}$	1	$\pm 0.144 \%$	$\infty$
Readout Electronics	$\pm 1.0$	Normal	1	1	$\pm 1.0 \%$	$\infty$
Response time	$\pm 0.8$	Rectangular	$\sqrt{3}$	1	$\pm 0.462 \%$	$\infty$
Integration time	$\pm 2.6$	Rectangular	$\sqrt{3}$	1	$\pm 1.501 \%$	$\infty$
RF Ambient Conditions	$\pm 3.0$	Rectangular	$\sqrt{3}$	1	$\pm 1.732 \%$	$\infty$
Probe Positioner	$\pm 0.4$	Rectangular	$\sqrt{3}$	1	$\pm 0.231 \%$	$\infty$
Probe Positioning	$\pm 2.9$	Rectangular	$\sqrt{3}$	1	$\pm 1.674 \%$	$\infty$
Algorithms for Max. SAR Eval.	$\pm 1.0$	Rectangular	$\sqrt{3}$	1	$\pm 0.577 \%$	$\infty$
<b>Test Sample Related</b>						
Device Positioning	$\pm 2.9$	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	$\pm 3.6$	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	$\pm 5.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.887 \%$	$\infty$
<b>Physical Parameters</b>						
Phantom Shell	$\pm 4.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.309 \%$	$\infty$
Liquid conductivity (Target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.64	$\pm 2.887 \%$	$\infty$
Liquid conductivity (Meas.)	$\pm 4.7$	Normal	1	0.64	$\pm 4.7 \%$	$\infty$
Liquid permittivity (Target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.6	$\pm 2.887 \%$	$\infty$
Liquid permittivity (Meas.)	$\pm 4.9$	Normal	1	0.6	$\pm 4.9 \%$	$\infty$
<b>Combined Standard Uncertainty</b>					<b><math>\pm 12.3 \%</math></b>	<b>330</b>
<b>Expanded Uncertainty (k=2)</b>					<b><math>\pm 24.6 \%</math></b>	

The above measurement uncertainties are according to IEEE P1528 (2003)

**1900 MHz Head**

Error Description	Uncertain value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
<b>Measurement System</b>						
Probe calibration	$\pm 6.0$	Normal	1	1	$\pm 6.0 \%$	$\infty$
Axial isotropy	$\pm 4.7$	Rectangular	$\sqrt{3}$	1	$\pm 2.714 \%$	$\infty$
Hemispherical isotropy	$\pm 9.6$	Rectangular	$\sqrt{3}$	1	$\pm 5.543 \%$	$\infty$
Boundary Effects	$\pm 0.8$	Rectangular	$\sqrt{3}$	1	$\pm 0.462 \%$	$\infty$
Probe Linearity	$\pm 4.7$	Rectangular	$\sqrt{3}$	1	$\pm 2.714 \%$	$\infty$
Detection limits	$\pm 0.25$	Rectangular	$\sqrt{3}$	1	$\pm 0.144 \%$	$\infty$
Readout Electronics	$\pm 1.0$	Normal	1	1	$\pm 1.0 \%$	$\infty$
Response time	$\pm 0.8$	Rectangular	$\sqrt{3}$	1	$\pm 0.462 \%$	$\infty$
Integration time	$\pm 2.6$	Rectangular	$\sqrt{3}$	1	$\pm 1.501 \%$	$\infty$
RF Ambient Conditions	$\pm 3.0$	Rectangular	$\sqrt{3}$	1	$\pm 1.732 \%$	$\infty$
Probe Positioner	$\pm 0.4$	Rectangular	$\sqrt{3}$	1	$\pm 0.231 \%$	$\infty$
Probe Positioning	$\pm 2.9$	Rectangular	$\sqrt{3}$	1	$\pm 1.674 \%$	$\infty$
Algorithms for Max. SAR Eval.	$\pm 1.0$	Rectangular	$\sqrt{3}$	1	$\pm 0.577 \%$	$\infty$
<b>Test Sample Related</b>						
Device Positioning	$\pm 2.9$	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	$\pm 3.6$	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	$\pm 5.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.887 \%$	$\infty$
<b>Physical Parameters</b>						
Phantom Shell	$\pm 4.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.309 \%$	$\infty$
Liquid conductivity (Target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.64	$\pm 2.887 \%$	$\infty$
Liquid conductivity (Meas.)	$\pm 4.4$	Normal	1	0.64	$\pm 4.4 \%$	$\infty$
Liquid permittivity (Target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.6	$\pm 2.887 \%$	$\infty$
Liquid permittivity (Meas.)	$\pm 4.9$	Normal	1	0.6	$\pm 4.9 \%$	$\infty$
<b>Combined Standard Uncertainty</b>					<b><math>\pm 12.2 \%</math></b>	<b>330</b>
<b>Expanded Uncertainty (k=2)</b>					<b><math>\pm 24.4 \%</math></b>	

The above measurement uncertainties are according to IEEE P1528 (2003)

**1900 MHz Body**

Error Description	Uncertain value ±%	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
<b>Measurement System</b>						
Probe calibration	± 6.0	Normal	1	1	± 6.0 %	∞
Axial isotropy	± 4.7	Rectangular	√3	1	± 2.714 %	∞
Hemispherical isotropy	± 9.6	Rectangular	√3	1	± 5.543 %	∞
Boundary Effects	± 0.8	Rectangular	√3	1	± 0.462 %	∞
Probe Linearity	± 4.7	Rectangular	√3	1	± 2.714 %	∞
Detection limits	± 0.25	Rectangular	√3	1	± 0.144 %	∞
Readout Electronics	± 1.0	Normal	1	1	± 1.0 %	∞
Response time	± 0.8	Rectangular	√3	1	± 0.462 %	∞
Integration time	± 2.6	Rectangular	√3	1	± 1.501 %	∞
RF Ambient Conditions	± 3.0	Rectangular	√3	1	± 1.732 %	∞
Probe Positioner	± 0.4	Rectangular	√3	1	± 0.231 %	∞
Probe Positioning	± 2.9	Rectangular	√3	1	± 1.674 %	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	√3	1	± 0.577 %	∞
<b>Test Sample Related</b>						
Device Positioning	± 2.9	Normal	1	1	± 2.9 %	145
Device Holder	± 3.6	Normal	1	1	± 3.6 %	5
Power Drift	± 5.0	Rectangular	√3	1	± 2.887 %	∞
<b>Physical Parameters</b>						
Phantom Shell	± 4.0	Rectangular	√3	1	± 2.309 %	∞
Liquid conductivity (Target)	± 5.0	Rectangular	√3	0.64	± 2.887 %	∞
Liquid conductivity (Meas.)	± 4.0	Normal	1	0.64	± 4.0 %	∞
Liquid permittivity (Target)	± 5.0	Rectangular	√3	0.6	± 2.887 %	∞
Liquid permittivity (Meas.)	± 4.5	Normal	1	0.6	± 4.5 %	∞
<b>Combined Standard Uncertainty</b>					<b>± 12.1 %</b>	<b>330</b>
<b>Expanded Uncertainty (k=2)</b>					<b>± 24.2 %</b>	

The above measurement uncertainties are according to IEEE P1528 (2003)

**2450 MHz Head**

Error Description	Uncertain value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
<b>Measurement System</b>						
Probe calibration	$\pm 6.0$	Normal	1	1	$\pm 6.0 \%$	$\infty$
Axial isotropy	$\pm 4.7$	Rectangular	$\sqrt{3}$	1	$\pm 2.714 \%$	$\infty$
Hemispherical isotropy	$\pm 9.6$	Rectangular	$\sqrt{3}$	1	$\pm 5.543 \%$	$\infty$
Boundary Effects	$\pm 0.8$	Rectangular	$\sqrt{3}$	1	$\pm 0.462 \%$	$\infty$
Probe Linearity	$\pm 4.7$	Rectangular	$\sqrt{3}$	1	$\pm 2.714 \%$	$\infty$
Detection limits	$\pm 0.25$	Rectangular	$\sqrt{3}$	1	$\pm 0.144 \%$	$\infty$
Readout Electronics	$\pm 1.0$	Normal	1	1	$\pm 1.0 \%$	$\infty$
Response time	$\pm 0.8$	Rectangular	$\sqrt{3}$	1	$\pm 0.462 \%$	$\infty$
Integration time	$\pm 2.6$	Rectangular	$\sqrt{3}$	1	$\pm 1.501 \%$	$\infty$
RF Ambient Conditions	$\pm 3.0$	Rectangular	$\sqrt{3}$	1	$\pm 1.732 \%$	$\infty$
Probe Positioner	$\pm 0.4$	Rectangular	$\sqrt{3}$	1	$\pm 0.231 \%$	$\infty$
Probe Positioning	$\pm 2.9$	Rectangular	$\sqrt{3}$	1	$\pm 1.674 \%$	$\infty$
Algorithms for Max. SAR Eval.	$\pm 1.0$	Rectangular	$\sqrt{3}$	1	$\pm 0.577 \%$	$\infty$
<b>Test Sample Related</b>						
Device Positioning	$\pm 2.9$	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	$\pm 3.6$	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	$\pm 5.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.887 \%$	$\infty$
<b>Physical Parameters</b>						
Phantom Shell	$\pm 4.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.309 \%$	$\infty$
Liquid conductivity (Target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.64	$\pm 2.887 \%$	$\infty$
Liquid conductivity (Meas.)	$\pm 4.1$	Normal	1	0.64	$\pm 4.1 \%$	$\infty$
Liquid permittivity (Target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.6	$\pm 2.887 \%$	$\infty$
Liquid permittivity (Meas.)	$\pm 4.3$	Normal	1	0.6	$\pm 4.3 \%$	$\infty$
<b>Combined Standard Uncertainty</b>					<b><math>\pm 12.1 \%</math></b>	<b>330</b>
<b>Expanded Uncertainty (k=2)</b>					<b><math>\pm 24.2 \%</math></b>	

The above measurement uncertainties are according to IEEE P1528 (2003)

**2450 MHz Body**

Error Description	Uncertain value ±%	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
<b>Measurement System</b>						
Probe calibration	± 6.0	Normal	1	1	± 6.0 %	∞
Axial isotropy	± 4.7	Rectangular	√3	1	± 2.714 %	∞
Hemispherical isotropy	± 9.6	Rectangular	√3	1	± 5.543 %	∞
Boundary Effects	± 0.8	Rectangular	√3	1	± 0.462 %	∞
Probe Linearity	± 4.7	Rectangular	√3	1	± 2.714 %	∞
Detection limits	± 0.25	Rectangular	√3	1	± 0.144 %	∞
Readout Electronics	± 1.0	Normal	1	1	± 1.0 %	∞
Response time	± 0.8	Rectangular	√3	1	± 0.462 %	∞
Integration time	± 2.6	Rectangular	√3	1	± 1.501 %	∞
RF Ambient Conditions	± 3.0	Rectangular	√3	1	± 1.732 %	∞
Probe Positioner	± 0.4	Rectangular	√3	1	± 0.231 %	∞
Probe Positioning	± 2.9	Rectangular	√3	1	± 1.674 %	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	√3	1	± 0.577 %	∞
<b>Test Sample Related</b>						
Device Positioning	± 2.9	Normal	1	1	± 2.9 %	145
Device Holder	± 3.6	Normal	1	1	± 3.6 %	5
Power Drift	± 5.0	Rectangular	√3	1	± 2.887 %	∞
<b>Physical Parameters</b>						
Phantom Shell	± 4.0	Rectangular	√3	1	± 2.309 %	∞
Liquid conductivity (Target)	± 5.0	Rectangular	√3	0.64	± 2.887 %	∞
Liquid conductivity (Meas.)	± 4.6	Normal	1	0.64	± 4.6 %	∞
Liquid permittivity (Target)	± 5.0	Rectangular	√3	0.6	± 2.887 %	∞
Liquid permittivity (Meas.)	± 4.4	Normal	1	0.6	± 4.4 %	∞
<b>Combined Standard Uncertainty</b>					<b>± 12.2 %</b>	<b>330</b>
<b>Expanded Uncertainty (k=2)</b>					<b>± 24.4 %</b>	

The above measurement uncertainties are according to IEEE P1528 (2003)

**5200 MHz Head**

Error Description	Uncertain value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
<b>Measurement System</b>						
Probe calibration	$\pm 6.55$	Normal	1	1	$\pm 6.55 \%$	$\infty$
Axial isotropy	$\pm 4.7$	Rectangular	$\sqrt{3}$	1	$\pm 2.714 \%$	$\infty$
Hemispherical isotropy	$\pm 9.6$	Rectangular	$\sqrt{3}$	1	$\pm 5.543 \%$	$\infty$
Boundary Effects	$\pm 0.8$	Rectangular	$\sqrt{3}$	1	$\pm 0.462 \%$	$\infty$
Probe Linearity	$\pm 4.7$	Rectangular	$\sqrt{3}$	1	$\pm 2.714 \%$	$\infty$
Detection limits	$\pm 0.25$	Rectangular	$\sqrt{3}$	1	$\pm 0.144 \%$	$\infty$
Readout Electronics	$\pm 1.0$	Normal	1	1	$\pm 1.0 \%$	$\infty$
Response time	$\pm 0.8$	Rectangular	$\sqrt{3}$	1	$\pm 0.462 \%$	$\infty$
Integration time	$\pm 2.6$	Rectangular	$\sqrt{3}$	1	$\pm 1.501 \%$	$\infty$
RF Ambient Conditions	$\pm 3.0$	Rectangular	$\sqrt{3}$	1	$\pm 1.732 \%$	$\infty$
Probe Positioner	$\pm 0.4$	Rectangular	$\sqrt{3}$	1	$\pm 0.231 \%$	$\infty$
Probe Positioning	$\pm 2.9$	Rectangular	$\sqrt{3}$	1	$\pm 1.674 \%$	$\infty$
Algorithms for Max. SAR Eval.	$\pm 1.0$	Rectangular	$\sqrt{3}$	1	$\pm 0.577 \%$	$\infty$
<b>Test Sample Related</b>						
Device Positioning	$\pm 2.9$	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	$\pm 3.6$	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	$\pm 5.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.887 \%$	$\infty$
<b>Physical Parameters</b>						
Phantom Shell	$\pm 4.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.309 \%$	$\infty$
Liquid conductivity (Target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.64	$\pm 2.887 \%$	$\infty$
Liquid conductivity (Meas.)	$\pm 4.1$	Normal	1	0.64	$\pm 4.1 \%$	$\infty$
Liquid permittivity (Target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.6	$\pm 2.887 \%$	$\infty$
Liquid permittivity (Meas.)	$\pm 4.4$	Normal	1	0.6	$\pm 4.4 \%$	$\infty$
<b>Combined Standard Uncertainty</b>					<b><math>\pm 12.4 \%</math></b>	<b>330</b>
<b>Expanded Uncertainty (k=2)</b>					<b><math>\pm 24.8 \%</math></b>	

The above measurement uncertainties are according to IEEE P1528 (2003)

**5200 MHz Body**

Error Description	Uncertain value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
<b>Measurement System</b>						
Probe calibration	$\pm 6.55$	Normal	1	1	$\pm 6.55 \%$	$\infty$
Axial isotropy	$\pm 4.7$	Rectangular	$\sqrt{3}$	1	$\pm 2.714 \%$	$\infty$
Hemispherical isotropy	$\pm 9.6$	Rectangular	$\sqrt{3}$	1	$\pm 5.543 \%$	$\infty$
Boundary Effects	$\pm 0.8$	Rectangular	$\sqrt{3}$	1	$\pm 0.462 \%$	$\infty$
Probe Linearity	$\pm 4.7$	Rectangular	$\sqrt{3}$	1	$\pm 2.714 \%$	$\infty$
Detection limits	$\pm 0.25$	Rectangular	$\sqrt{3}$	1	$\pm 0.144 \%$	$\infty$
Readout Electronics	$\pm 1.0$	Normal	1	1	$\pm 1.0 \%$	$\infty$
Response time	$\pm 0.8$	Rectangular	$\sqrt{3}$	1	$\pm 0.462 \%$	$\infty$
Integration time	$\pm 2.6$	Rectangular	$\sqrt{3}$	1	$\pm 1.501 \%$	$\infty$
RF Ambient Conditions	$\pm 3.0$	Rectangular	$\sqrt{3}$	1	$\pm 1.732 \%$	$\infty$
Probe Positioner	$\pm 0.4$	Rectangular	$\sqrt{3}$	1	$\pm 0.231 \%$	$\infty$
Probe Positioning	$\pm 2.9$	Rectangular	$\sqrt{3}$	1	$\pm 1.674 \%$	$\infty$
Algorithms for Max. SAR Eval.	$\pm 1.0$	Rectangular	$\sqrt{3}$	1	$\pm 0.577 \%$	$\infty$
<b>Test Sample Related</b>						
Device Positioning	$\pm 2.9$	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	$\pm 3.6$	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	$\pm 5.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.887 \%$	$\infty$
<b>Physical Parameters</b>						
Phantom Shell	$\pm 4.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.309 \%$	$\infty$
Liquid conductivity (Target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.64	$\pm 2.887 \%$	$\infty$
Liquid conductivity (Meas.)	$\pm 4.1$	Normal	1	0.64	$\pm 4.1 \%$	$\infty$
Liquid permittivity (Target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.6	$\pm 2.887 \%$	$\infty$
Liquid permittivity (Meas.)	$\pm 4.2$	Normal	1	0.6	$\pm 4.2 \%$	$\infty$
<b>Combined Standard Uncertainty</b>					<b><math>\pm 12.4 \%</math></b>	<b>330</b>
<b>Expanded Uncertainty (k=2)</b>					<b><math>\pm 24.8 \%</math></b>	

The above measurement uncertainties are according to IEEE P1528 (2003)



**5300 MHz Head**

Error Description	Uncertain value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
<b>Measurement System</b>						
Probe calibration	$\pm 6.55$	Normal	1	1	$\pm 6.55 \%$	$\infty$
Axial isotropy	$\pm 4.7$	Rectangular	$\sqrt{3}$	1	$\pm 2.714 \%$	$\infty$
Hemispherical isotropy	$\pm 9.6$	Rectangular	$\sqrt{3}$	1	$\pm 5.543 \%$	$\infty$
Boundary Effects	$\pm 0.8$	Rectangular	$\sqrt{3}$	1	$\pm 0.462 \%$	$\infty$
Probe Linearity	$\pm 4.7$	Rectangular	$\sqrt{3}$	1	$\pm 2.714 \%$	$\infty$
Detection limits	$\pm 0.25$	Rectangular	$\sqrt{3}$	1	$\pm 0.144 \%$	$\infty$
Readout Electronics	$\pm 1.0$	Normal	1	1	$\pm 1.0 \%$	$\infty$
Response time	$\pm 0.8$	Rectangular	$\sqrt{3}$	1	$\pm 0.462 \%$	$\infty$
Integration time	$\pm 2.6$	Rectangular	$\sqrt{3}$	1	$\pm 1.501 \%$	$\infty$
RF Ambient Conditions	$\pm 3.0$	Rectangular	$\sqrt{3}$	1	$\pm 1.732 \%$	$\infty$
Probe Positioner	$\pm 0.4$	Rectangular	$\sqrt{3}$	1	$\pm 0.231 \%$	$\infty$
Probe Positioning	$\pm 2.9$	Rectangular	$\sqrt{3}$	1	$\pm 1.674 \%$	$\infty$
Algorithms for Max. SAR Eval.	$\pm 1.0$	Rectangular	$\sqrt{3}$	1	$\pm 0.577 \%$	$\infty$
<b>Test Sample Related</b>						
Device Positioning	$\pm 2.9$	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	$\pm 3.6$	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	$\pm 5.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.887 \%$	$\infty$
<b>Physical Parameters</b>						
Phantom Shell	$\pm 4.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.309 \%$	$\infty$
Liquid conductivity (Target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.64	$\pm 2.887 \%$	$\infty$
Liquid conductivity (Meas.)	$\pm 4.4$	Normal	1	0.64	$\pm 4.4 \%$	$\infty$
Liquid permittivity (Target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.6	$\pm 2.887 \%$	$\infty$
Liquid permittivity (Meas.)	$\pm 4.6$	Normal	1	0.6	$\pm 4.6 \%$	$\infty$
<b>Combined Standard Uncertainty</b>					<b><math>\pm 12.5 \%</math></b>	<b>330</b>
<b>Expanded Uncertainty (k=2)</b>					<b><math>\pm 25.0 \%</math></b>	

The above measurement uncertainties are according to IEEE P1528 (2003)

**5300 MHz Body**

Error Description	Uncertain value ±%	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
<b>Measurement System</b>						
Probe calibration	± 6.55	Normal	1	1	± 6.55 %	∞
Axial isotropy	± 4.7	Rectangular	√3	1	± 2.714 %	∞
Hemispherical isotropy	± 9.6	Rectangular	√3	1	± 5.543 %	∞
Boundary Effects	± 0.8	Rectangular	√3	1	± 0.462 %	∞
Probe Linearity	± 4.7	Rectangular	√3	1	± 2.714 %	∞
Detection limits	± 0.25	Rectangular	√3	1	± 0.144 %	∞
Readout Electronics	± 1.0	Normal	1	1	± 1.0 %	∞
Response time	± 0.8	Rectangular	√3	1	± 0.462 %	∞
Integration time	± 2.6	Rectangular	√3	1	± 1.501 %	∞
RF Ambient Conditions	± 3.0	Rectangular	√3	1	± 1.732 %	∞
Probe Positioner	± 0.4	Rectangular	√3	1	± 0.231 %	∞
Probe Positioning	± 2.9	Rectangular	√3	1	± 1.674 %	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	√3	1	± 0.577 %	∞
<b>Test Sample Related</b>						
Device Positioning	± 2.9	Normal	1	1	± 2.9 %	145
Device Holder	± 3.6	Normal	1	1	± 3.6 %	5
Power Drift	± 5.0	Rectangular	√3	1	± 2.887 %	∞
<b>Physical Parameters</b>						
Phantom Shell	± 4.0	Rectangular	√3	1	± 2.309 %	∞
Liquid conductivity (Target)	± 5.0	Rectangular	√3	0.64	± 2.887 %	∞
Liquid conductivity (Meas.)	± 4.1	Normal	1	0.64	± 4.1 %	∞
Liquid permittivity (Target)	± 5.0	Rectangular	√3	0.6	± 2.887 %	∞
Liquid permittivity (Meas.)	± 4.5	Normal	1	0.6	± 4.5 %	∞
<b>Combined Standard Uncertainty</b>					<b>± 12.4 %</b>	<b>330</b>
<b>Expanded Uncertainty (k=2)</b>					<b>± 24.8 %</b>	

The above measurement uncertainties are according to IEEE P1528 (2003)

**5500 MHz Head**

Error Description	Uncertain value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
<b>Measurement System</b>						
Probe calibration	$\pm 6.55$	Normal	1	1	$\pm 6.55 \%$	$\infty$
Axial isotropy	$\pm 4.7$	Rectangular	$\sqrt{3}$	1	$\pm 2.714 \%$	$\infty$
Hemispherical isotropy	$\pm 9.6$	Rectangular	$\sqrt{3}$	1	$\pm 5.543 \%$	$\infty$
Boundary Effects	$\pm 0.8$	Rectangular	$\sqrt{3}$	1	$\pm 0.462 \%$	$\infty$
Probe Linearity	$\pm 4.7$	Rectangular	$\sqrt{3}$	1	$\pm 2.714 \%$	$\infty$
Detection limits	$\pm 0.25$	Rectangular	$\sqrt{3}$	1	$\pm 0.144 \%$	$\infty$
Readout Electronics	$\pm 1.0$	Normal	1	1	$\pm 1.0 \%$	$\infty$
Response time	$\pm 0.8$	Rectangular	$\sqrt{3}$	1	$\pm 0.462 \%$	$\infty$
Integration time	$\pm 2.6$	Rectangular	$\sqrt{3}$	1	$\pm 1.501 \%$	$\infty$
RF Ambient Conditions	$\pm 3.0$	Rectangular	$\sqrt{3}$	1	$\pm 1.732 \%$	$\infty$
Probe Positioner	$\pm 0.4$	Rectangular	$\sqrt{3}$	1	$\pm 0.231 \%$	$\infty$
Probe Positioning	$\pm 2.9$	Rectangular	$\sqrt{3}$	1	$\pm 1.674 \%$	$\infty$
Algorithms for Max. SAR Eval.	$\pm 1.0$	Rectangular	$\sqrt{3}$	1	$\pm 0.577 \%$	$\infty$
<b>Test Sample Related</b>						
Device Positioning	$\pm 2.9$	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	$\pm 3.6$	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	$\pm 5.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.887 \%$	$\infty$
<b>Physical Parameters</b>						
Phantom Shell	$\pm 4.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.309 \%$	$\infty$
Liquid conductivity (Target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.64	$\pm 2.887 \%$	$\infty$
Liquid conductivity (Meas.)	$\pm 4.6$	Normal	1	0.64	$\pm 4.6 \%$	$\infty$
Liquid permittivity (Target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.6	$\pm 2.887 \%$	$\infty$
Liquid permittivity (Meas.)	$\pm 4.2$	Normal	1	0.6	$\pm 4.2 \%$	$\infty$
<b>Combined Standard Uncertainty</b>					<b><math>\pm 12.4 \%</math></b>	<b>330</b>
<b>Expanded Uncertainty (k=2)</b>					<b><math>\pm 24.8 \%</math></b>	

The above measurement uncertainties are according to IEEE P1528 (2003)

**5500 MHz Body**

Error Description	Uncertain value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
<b>Measurement System</b>						
Probe calibration	$\pm 6.55$	Normal	1	1	$\pm 6.55 \%$	$\infty$
Axial isotropy	$\pm 4.7$	Rectangular	$\sqrt{3}$	1	$\pm 2.714 \%$	$\infty$
Hemispherical isotropy	$\pm 9.6$	Rectangular	$\sqrt{3}$	1	$\pm 5.543 \%$	$\infty$
Boundary Effects	$\pm 0.8$	Rectangular	$\sqrt{3}$	1	$\pm 0.462 \%$	$\infty$
Probe Linearity	$\pm 4.7$	Rectangular	$\sqrt{3}$	1	$\pm 2.714 \%$	$\infty$
Detection limits	$\pm 0.25$	Rectangular	$\sqrt{3}$	1	$\pm 0.144 \%$	$\infty$
Readout Electronics	$\pm 1.0$	Normal	1	1	$\pm 1.0 \%$	$\infty$
Response time	$\pm 0.8$	Rectangular	$\sqrt{3}$	1	$\pm 0.462 \%$	$\infty$
Integration time	$\pm 2.6$	Rectangular	$\sqrt{3}$	1	$\pm 1.501 \%$	$\infty$
RF Ambient Conditions	$\pm 3.0$	Rectangular	$\sqrt{3}$	1	$\pm 1.732 \%$	$\infty$
Probe Positioner	$\pm 0.4$	Rectangular	$\sqrt{3}$	1	$\pm 0.231 \%$	$\infty$
Probe Positioning	$\pm 2.9$	Rectangular	$\sqrt{3}$	1	$\pm 1.674 \%$	$\infty$
Algorithms for Max. SAR Eval.	$\pm 1.0$	Rectangular	$\sqrt{3}$	1	$\pm 0.577 \%$	$\infty$
<b>Test Sample Related</b>						
Device Positioning	$\pm 2.9$	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	$\pm 3.6$	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	$\pm 5.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.887 \%$	$\infty$
<b>Physical Parameters</b>						
Phantom Shell	$\pm 4.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.309 \%$	$\infty$
Liquid conductivity (Target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.64	$\pm 2.887 \%$	$\infty$
Liquid conductivity (Meas.)	$\pm 4.7$	Normal	1	0.64	$\pm 4.7 \%$	$\infty$
Liquid permittivity (Target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.6	$\pm 2.887 \%$	$\infty$
Liquid permittivity (Meas.)	$\pm 4.8$	Normal	1	0.6	$\pm 4.8 \%$	$\infty$
<b>Combined Standard Uncertainty</b>					<b><math>\pm 12.5 \%</math></b>	<b>330</b>
<b>Expanded Uncertainty (k=2)</b>					<b><math>\pm 25.0 \%</math></b>	

The above measurement uncertainties are according to IEEE P1528 (2003)

**5600 MHz Head**

Error Description	Uncertain value ±%	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
<b>Measurement System</b>						
Probe calibration	± 6.55	Normal	1	1	± 6.55 %	∞
Axial isotropy	± 4.7	Rectangular	√3	1	± 2.714 %	∞
Hemispherical isotropy	± 9.6	Rectangular	√3	1	± 5.543 %	∞
Boundary Effects	± 0.8	Rectangular	√3	1	± 0.462 %	∞
Probe Linearity	± 4.7	Rectangular	√3	1	± 2.714 %	∞
Detection limits	± 0.25	Rectangular	√3	1	± 0.144 %	∞
Readout Electronics	± 1.0	Normal	1	1	± 1.0 %	∞
Response time	± 0.8	Rectangular	√3	1	± 0.462 %	∞
Integration time	± 2.6	Rectangular	√3	1	± 1.501 %	∞
RF Ambient Conditions	± 3.0	Rectangular	√3	1	± 1.732 %	∞
Probe Positioner	± 0.4	Rectangular	√3	1	± 0.231 %	∞
Probe Positioning	± 2.9	Rectangular	√3	1	± 1.674 %	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	√3	1	± 0.577 %	∞
<b>Test Sample Related</b>						
Device Positioning	± 2.9	Normal	1	1	± 2.9 %	145
Device Holder	± 3.6	Normal	1	1	± 3.6 %	5
Power Drift	± 5.0	Rectangular	√3	1	± 2.887 %	∞
<b>Physical Parameters</b>						
Phantom Shell	± 4.0	Rectangular	√3	1	± 2.309 %	∞
Liquid conductivity (Target)	± 5.0	Rectangular	√3	0.64	± 2.887 %	∞
Liquid conductivity (Meas.)	± 4.9	Normal	1	0.64	± 4.9 %	∞
Liquid permittivity (Target)	± 5.0	Rectangular	√3	0.6	± 2.887 %	∞
Liquid permittivity (Meas.)	± 4.8	Normal	1	0.6	± 4.8 %	∞
<b>Combined Standard Uncertainty</b>					<b>± 12.6 %</b>	<b>330</b>
<b>Expanded Uncertainty (k=2)</b>					<b>± 25.2 %</b>	

The above measurement uncertainties are according to IEEE P1528 (2003)

**5600 MHz Body**

Error Description	Uncertain value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
<b>Measurement System</b>						
Probe calibration	$\pm 6.55$	Normal	1	1	$\pm 6.55 \%$	$\infty$
Axial isotropy	$\pm 4.7$	Rectangular	$\sqrt{3}$	1	$\pm 2.714 \%$	$\infty$
Hemispherical isotropy	$\pm 9.6$	Rectangular	$\sqrt{3}$	1	$\pm 5.543 \%$	$\infty$
Boundary Effects	$\pm 0.8$	Rectangular	$\sqrt{3}$	1	$\pm 0.462 \%$	$\infty$
Probe Linearity	$\pm 4.7$	Rectangular	$\sqrt{3}$	1	$\pm 2.714 \%$	$\infty$
Detection limits	$\pm 0.25$	Rectangular	$\sqrt{3}$	1	$\pm 0.144 \%$	$\infty$
Readout Electronics	$\pm 1.0$	Normal	1	1	$\pm 1.0 \%$	$\infty$
Response time	$\pm 0.8$	Rectangular	$\sqrt{3}$	1	$\pm 0.462 \%$	$\infty$
Integration time	$\pm 2.6$	Rectangular	$\sqrt{3}$	1	$\pm 1.501 \%$	$\infty$
RF Ambient Conditions	$\pm 3.0$	Rectangular	$\sqrt{3}$	1	$\pm 1.732 \%$	$\infty$
Probe Positioner	$\pm 0.4$	Rectangular	$\sqrt{3}$	1	$\pm 0.231 \%$	$\infty$
Probe Positioning	$\pm 2.9$	Rectangular	$\sqrt{3}$	1	$\pm 1.674 \%$	$\infty$
Algorithms for Max. SAR Eval.	$\pm 1.0$	Rectangular	$\sqrt{3}$	1	$\pm 0.577 \%$	$\infty$
<b>Test Sample Related</b>						
Device Positioning	$\pm 2.9$	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	$\pm 3.6$	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	$\pm 5.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.887 \%$	$\infty$
<b>Physical Parameters</b>						
Phantom Shell	$\pm 4.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.309 \%$	$\infty$
Liquid conductivity (Target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.64	$\pm 2.887 \%$	$\infty$
Liquid conductivity (Meas.)	$\pm 4.3$	Normal	1	0.64	$\pm 4.3 \%$	$\infty$
Liquid permittivity (Target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.6	$\pm 2.887 \%$	$\infty$
Liquid permittivity (Meas.)	$\pm 4.6$	Normal	1	0.6	$\pm 4.6 \%$	$\infty$
<b>Combined Standard Uncertainty</b>					<b><math>\pm 12.4 \%</math></b>	<b>330</b>
<b>Expanded Uncertainty (k=2)</b>					<b><math>\pm 24.8 \%</math></b>	

The above measurement uncertainties are according to IEEE P1528 (2003)

**5800 MHz Head**

Error Description	Uncertain value ±%	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
<b>Measurement System</b>						
Probe calibration	± 6.55	Normal	1	1	± 6.55 %	∞
Axial isotropy	± 4.7	Rectangular	√3	1	± 2.714 %	∞
Hemispherical isotropy	± 9.6	Rectangular	√3	1	± 5.543 %	∞
Boundary Effects	± 0.8	Rectangular	√3	1	± 0.462 %	∞
Probe Linearity	± 4.7	Rectangular	√3	1	± 2.714 %	∞
Detection limits	± 0.25	Rectangular	√3	1	± 0.144 %	∞
Readout Electronics	± 1.0	Normal	1	1	± 1.0 %	∞
Response time	± 0.8	Rectangular	√3	1	± 0.462 %	∞
Integration time	± 2.6	Rectangular	√3	1	± 1.501 %	∞
RF Ambient Conditions	± 3.0	Rectangular	√3	1	± 1.732 %	∞
Probe Positioner	± 0.4	Rectangular	√3	1	± 0.231 %	∞
Probe Positioning	± 2.9	Rectangular	√3	1	± 1.674 %	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	√3	1	± 0.577 %	∞
<b>Test Sample Related</b>						
Device Positioning	± 2.9	Normal	1	1	± 2.9 %	145
Device Holder	± 3.6	Normal	1	1	± 3.6 %	5
Power Drift	± 5.0	Rectangular	√3	1	± 2.887 %	∞
<b>Physical Parameters</b>						
Phantom Shell	± 4.0	Rectangular	√3	1	± 2.309 %	∞
Liquid conductivity (Target)	± 5.0	Rectangular	√3	0.64	± 2.887 %	∞
Liquid conductivity (Meas.)	± 4.6	Normal	1	0.64	± 4.6 %	∞
Liquid permittivity (Target)	± 5.0	Rectangular	√3	0.6	± 2.887 %	∞
Liquid permittivity (Meas.)	± 4.8	Normal	1	0.6	± 4.8 %	∞
<b>Combined Standard Uncertainty</b>					<b>± 12.5 %</b>	<b>330</b>
<b>Expanded Uncertainty (k=2)</b>					<b>± 25.0 %</b>	

The above measurement uncertainties are according to IEEE P1528 (2003)



**5800 MHz Body**

Error Description	Uncertain value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
<b>Measurement System</b>						
Probe calibration	$\pm 6.55$	Normal	1	1	$\pm 6.55 \%$	$\infty$
Axial isotropy	$\pm 4.7$	Rectangular	$\sqrt{3}$	1	$\pm 2.714 \%$	$\infty$
Hemispherical isotropy	$\pm 9.6$	Rectangular	$\sqrt{3}$	1	$\pm 5.543 \%$	$\infty$
Boundary Effects	$\pm 0.8$	Rectangular	$\sqrt{3}$	1	$\pm 0.462 \%$	$\infty$
Probe Linearity	$\pm 4.7$	Rectangular	$\sqrt{3}$	1	$\pm 2.714 \%$	$\infty$
Detection limits	$\pm 0.25$	Rectangular	$\sqrt{3}$	1	$\pm 0.144 \%$	$\infty$
Readout Electronics	$\pm 1.0$	Normal	1	1	$\pm 1.0 \%$	$\infty$
Response time	$\pm 0.8$	Rectangular	$\sqrt{3}$	1	$\pm 0.462 \%$	$\infty$
Integration time	$\pm 2.6$	Rectangular	$\sqrt{3}$	1	$\pm 1.501 \%$	$\infty$
RF Ambient Conditions	$\pm 3.0$	Rectangular	$\sqrt{3}$	1	$\pm 1.732 \%$	$\infty$
Probe Positioner	$\pm 0.4$	Rectangular	$\sqrt{3}$	1	$\pm 0.231 \%$	$\infty$
Probe Positioning	$\pm 2.9$	Rectangular	$\sqrt{3}$	1	$\pm 1.674 \%$	$\infty$
Algorithms for Max. SAR Eval.	$\pm 1.0$	Rectangular	$\sqrt{3}$	1	$\pm 0.577 \%$	$\infty$
<b>Test Sample Related</b>						
Device Positioning	$\pm 2.9$	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	$\pm 3.6$	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	$\pm 5.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.887 \%$	$\infty$
<b>Physical Parameters</b>						
Phantom Shell	$\pm 4.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.309 \%$	$\infty$
Liquid conductivity (Target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.64	$\pm 2.887 \%$	$\infty$
Liquid conductivity (Meas.)	$\pm 4.1$	Normal	1	0.64	$\pm 4.1 \%$	$\infty$
Liquid permittivity (Target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.6	$\pm 2.887 \%$	$\infty$
Liquid permittivity (Meas.)	$\pm 4.5$	Normal	1	0.6	$\pm 4.5 \%$	$\infty$
<b>Combined Standard Uncertainty</b>					<b><math>\pm 12.4 \%</math></b>	<b>330</b>
<b>Expanded Uncertainty (k=2)</b>					<b><math>\pm 24.8 \%</math></b>	

The above measurement uncertainties are according to IEEE P1528 (2003)

## 16. CONCLUSION

---

### Measurement Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC. These measurements are taken to simulate the RF effects exposure under the worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role impossible biological effect are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease).

Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

## 17. REFERENCES

---

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radio frequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.

- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.
- [21] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radio communication Apparatus (All Frequency Bands) Issue 4, March 2010.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement procedures for IEEE 802.11a/b/g KDB Publication 248227 D01v01r02
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] 615223 D01 802 16e WiMax SAR Guidance v01, Nov. 13, 2009
- [30] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [31] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.