

# RF TEST REPORT

Test item : Mobile Phone  
Model No. : KYY21  
Order No. : DEMC1303-01111  
Date of receipt : 2013-03-26  
Test duration : 2013-04-26 ~ 2013-05-13  
Date of issue : 2013-05-14  
Use of report : FCC Original Grant


Applicant : KYOCERA Corporation  
2-1-1 Kagahara, Tsuzuki-ku, Yokohama-Shi, Kanagawa 224-8502, Japan

Test laboratory : Digital EMC Co., Ltd.  
683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Kyunggi-Do, 449-080, Korea

Test specification : FCC Part 15.225 Subpart C  
Test environment : See appended test report  
Test result :  Pass  Fail

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DIGITAL EMC CO., LTD.

Tested by:



Engineer  
JaeJin Lee

Witnessed by:

N/A

Reviewed by:



Deputy General Manager  
WonJung Lee

## Test Report Version

Test Report No.	Date	Description
DRTFCC1305-0490	May. 14, 2013	Initial issue

## CONTENTS

<b>1. Equipment information.....</b>	<b>4</b>
1.1 Equipment description.....	4
1.2 Ancillary equipment .....	4
<b>2. Information about test items.....</b>	<b>5</b>
2.1 Test mode .....	5
2.2 Auxiliary equipment .....	5
2.3 Tested frequency .....	5
2.4 Tested environment .....	5
2.5 EMI Suppression Device(s)/Modifications .....	5
<b>3. Test Report .....</b>	<b>6</b>
3.1 Summary of tests .....	6
3.2 Transmitter requirements .....	7
3.2.1 20dB Bandwidth Measurement .....	7
3.2.2 In-Band Radiated Spurious Emission .....	8
3.2.3 Radiated Spurious Emission Measurements, Out-of-Band.	9
3.2.4 Frequency Stability .....	11
3.2.5 AC Line Conducted Emissions.....	12
<b>APPENDIX.....</b>	<b>15</b>

## 1. Equipment information

### 1.1 Equipment description

FCC Equipment Class	Low Power Communications Device Transmitter(DXX)
Equipment type	Mobile Phone
Equipment model name	KYY21
Equipment add model name	N/A
Equipment serial no.	Identical prototype
Frequency band	13.56MHz
Modulation type	ASK
Channel	1
Power	Li-ion Battery: DC 3.8V AC-DC Adaptor: AC 120V 60Hz
Antenna type	Loop Antenna

### 1.2 Ancillary equipment

Equipment	Model No.	Serial No.	Manufacturer	Note
-	-	-	-	-
-	-	-	-	-

## 2. Information about test items

### 2.1 Test mode

<b>Test mode</b>	Continuous transmitting mode
------------------	------------------------------

Note: For this test mode, a test program was supported by manufacturer.

### 2.2 Auxiliary equipment

Equipment	Model No.	Serial No.	Manufacturer	Note
-	-	-	-	-
-	-	-	-	-

### 2.3 Tested frequency

	TX Frequency (MHz)	RX Frequency (MHz)
<b>Lowest Channel</b>	13.56	13.56
<b>Middle Channel</b>	-	-
<b>Highest Channel</b>	-	-

### 2.4 Tested environment

<b>Temperature</b>	: 23 ~ 24 °C
<b>Relative humidity content</b>	: 38 ~ 45 % R.H.
<b>Details of power supply</b>	: Battery: DC 3.8 V AC 120V 60Hz

### 2.5 EMI Suppression Device(s)/Modifications

EMI suppression device(s) added and/or modifications made during testing  
 → None

### 3. Test Report

#### 3.1 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status Note 1
<b>I. Test Items</b>				
2.1049	20 dB Bandwidth	N/A	Radiated	<b>C</b>
15.225 (a)	In-Band Emissions	15,848 $\mu$ V/m @ 30m 15.553 – 13.567 MHz		<b>C</b>
15.225 (b)	In-Band Emissions	334 $\mu$ V/m @ 30m 13.410 – 13.553 MHz 13.567 – 13.710 MHz		<b>C</b>
15.225 (c)	In-Band Emissions	106 $\mu$ V/m @ 30m 13.110 – 13.410 MHz 13.710 – 14.010 MHz		<b>C</b>
15.225 (d) 15.205 15.209	Out-of Band Emissions	Emissions outside of the specified band (13.110-14.010 MHz) must meet the radiated limits detailed in 15.209		<b>C</b>
15.225 (e)	Frequency Stability Tolerance	$\pm$ 0.01% of operating frequency	Conducted	<b>C</b>
15.207	AC Conducted Emissions	EN 55022	AC Line Conducted	<b>C</b>
15.203	Antenna requirements	FCC Part 15.203	-	<b>C</b>
Note 1: <b>C</b> =Comply <b>NC</b> =Not Comply <b>NT</b> =Not Tested <b>NA</b> =Not Applicable				

The sample was tested according to the following specification:  
 ANSI C-63.4-2003, KDB 174176

### 3.2 Transmitter requirements

#### 3.2.1 20dB Bandwidth Measurement

**- Procedure:**

The 20dB Bandwidth is measured with a spectrum analyzer connected via a receive antenna placed near the EUT while the EUT is operating in transmission mode.

**- Measurement Data: Comply**



**- Minimum Standard: Part 2.1049**

None

### 3.2.2 In-Band Radiated Spurious Emission

**- Procedure:**

The EUT was placed on a 0.8m high wooden table inside a 10m semi anechoic chamber. An antenna was placed at 3 m distance from the EUT. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions. A loop antenna was used for this test item. And this test item was performed for both vertical and horizontal polarization.

**- Measurement Data: Comply**

Test Frequency Band [MHz]	Freq. [MHz]	EUT Posi.	Reading Level [dBuV]	T.F	Field Strength @3m [dBuV/m]	Field Strength @30m [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13.110 ~ 13.410	13.348	Z	18.20	19.70	37.90	-2.10	40.51	42.61
13.410 ~ 13.553	13.553	Z	31.20	19.70	50.90	10.90	50.47	39.57
13.553 ~ 13.567	13.560	Z	35.40	19.70	55.10	15.10	84.00	68.90
13.567 ~ 13.710	13.569	Z	28.90	19.70	48.60	8.60	50.47	41.87
13.710 ~ 14.010	13.771	Z	19.10	19.70	38.80	-1.20	40.51	41.71

**Note 1.** This test item was performed using a loop antenna.

**Note 2.** This test item was performed at 3m and the data were extrapolated to the specified measurement distance of 30m using the square of an inverse linear distance extrapolation factor (40 dB/decade) as specified in §15.31(f)2.

▪ Extrapolation Factor =  $20 \log_{10}(30/3)^2 = 40\text{dB}$

**Note 3.** All data were recorded using a spectrum analyzer employing a peak detector.

If PK results were meet Quasi-peak limit, Quasi-peak measurements were omitted.

**Note 4.** Sample Calculation.

Margin = Limit – Field Strength @ 30m / Field Strength @ 30m = Field Strength @ 3m – 40

Field Strength @ 3m = Reading + T.F / T.F = AF + CL – AG

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

**- Minimum Standard: Part 15.225(a), (b), (c)**

Frequency Band [MHz]	Limit	
	[uV/m]	[dBuV/m]
13.553-13.567	15,848	84.00
13.410-13.553 13.567-13.710	334	50.47
13.110-13.410 13.710-14.010	106	40.51



### 3.2.3 Radiated Spurious Emission Measurements, Out-of-Band

**- Procedure:**

The EUT was tested from 9kHz up to the 1GHz excluding the band 13.110-14.010MHz. All measurements were recorded with spectrum analyzer employing a peak detector for emissions below 30MHz. Above 30MHz a Quasi-peak detector was used. All out-of-band emissions must not exceed the limits §15.209. A loop antenna was used for searching for emissions below 30MHz.

**- Measurement Data: Comply** (refer to the next page)

**- Minimum Standard: Part 15. 205, 209, 225(d)**

▪ **FCC Part 15.205 (a):** Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	3.6 ~ 4.4	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	4.5 ~ 5.15	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~ 12.52025	149.9 ~ 150.05	1645.5 ~ 1646.5	5.35 ~ 5.46	17.7 ~ 21.4
4.125 ~ 4.128	12.57675 ~ 12.57725	156.52475 ~ 156.52525	1660 ~ 1710	7.25 ~ 7.75	22.01 ~ 23.12
4.17725 ~ 4.17775	13.36 ~ 13.41	156.7 ~ 156.9	1718.8 ~ 1722.2	8.025 ~ 8.5	23.6 ~ 24.0
4.20725 ~ 4.20775	16.42 ~ 16.423	162.0125 ~ 167.17	2200 ~ 2300	9.0 ~ 9.2	31.2 ~ 31.8
6.215 ~ 6.218	16.69475 ~ 16.69525	167.72 ~ 173.2	2310 ~ 2390	9.3 ~ 9.5	36.43 ~ 36.5
6.26775 ~ 6.26825	16.80425 ~ 16.80475	240 ~ 285	2483.5 ~ 2500	10.6 ~ 12.7	Above 38.6
6.31175 ~ 6.31225	25.5 ~ 25.67	322 ~ 335.4	2655 ~ 2900	13.25 ~ 13.4	
8.291 ~ 8.294	37.5 ~ 38.25	399.90 ~ 410	3260 ~ 3267		
8.362 ~ 8.366	73 ~ 74.6	608 ~ 614	3332 ~ 3339		
8.37625 ~ 8.38675	74.8 ~ 75.2	960 ~ 1240	3345.8 ~ 3358		

▪ **FCC Part 15.205(b):**

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

▪ **FCC Part 15.209(a):**

Frequency [MHz]	Field Strength [uV/m]	Measurement Distance [Meters]
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30	30	30
30 ~ 88	100 **	3
88 ~ 216	150 **	3
216 ~ 960	200 **	3
Above 960	200	3

\*\* Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

▪ **FCC Part 15.209(b):**

In the emission table above, the tighter limit applies at the band edges.

**- Measurement Data:**

Tested Frequency : 13.56MHz  
 Measurement Distance : 3 Meters

Frequency [MHz]	EUT Posi.	ANT Pol	Reading [dBuV]	T.F [dB/m]	Distance factor	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
1.120	X	H	13.4	18.0	40.0	-8.6	26.6	35.2
3.812	X	H	9.0	18.3	40.0	-12.7	29.5	42.2
30.350	Z	V	28.3	-4.4	0.0	23.9	40.0	16.1
922.397	Z	V	18.2	6.0	0.0	24.2	46.0	21.8
-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-

- Note 1.** All measurements were recorded using a spectrum analyzer employing a peak detector for below 30MHz and a Quasi-peak detector for above 30MHz.
- Note 2.** Both Vertical and Horizontal polarities of the receiver antenna were evaluated with the worst case emissions being reported.
- Note 3.** The worst-case emissions are reported.
- Note 4.** No other spurious and harmonic emissions were reported greater than listed emissions above table.
- Note 5.** Sample calculation  
 Margin = Limit – Field Strength  
 Field Strength = Reading + T.F – Distance factor  
 T.F = AF + CL – AG  
 Distance factor =  $20\log(\text{Measurement distance} / \text{The measured distance})^2$   
 Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

### 3.2.4 Frequency Stability

**- Procedure:**

Part 15.225 requires that devices operating in the 13.553 – 13.567 MHz shall maintain the carrier frequency within 0.01% of the operating frequency over the temperature variation of -20 degrees to + 50 degrees C at normal supply voltage.

**- Measurement Data: Comply**

Operating Frequency : 13,560,042 Hz

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100%	3.800	+25(ref)	13,560,042	0	0.000000
100%		-20	13,559,951	-91	-0.000671
100%		-10	13,560,013	-29	-0.000214
100%		0	13,559,997	-45	-0.000332
100%		+10	13,560,010	-32	-0.000236
100%		+20	13,560,028	-14	-0.000103
100%		+30	13,560,034	-8	-0.000059
100%		+40	13,560,069	27	0.000199
100%		+50	13,560,097	55	0.000406
85%		3.230	+25	13,560,051	9
115%	4.370	+25	13,560,036	-6	-0.000044
BATT.ENDPOINT	3.200	+25	13,560,038	-4	-0.000029

**- Minimum Standard: Part 15. 225(e)**

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency.

**3.2.5 AC Line Conducted Emissions**

**- Procedure:**

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.21(m). Emissions closest to the limit are measured in the quasi-peak and average detector mode with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

**- Measurement Data:** **Comply** (refer to the next page)

**- Minimum Standard: FCC Part 15.207(a)**

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

\* Decreases with the logarithm of the frequency

- Measurement Data (With Dummy Load)





Results of Conducted Emission

Digital EMC  
 Date : 2013-05-13

Model No.	: KYY21	Reference No.	:
Type	:	Power Supply	: 120 V 60 Hz
Serial No.	: Identical prototype	Temp/Humi.	: 23 °C 42 % R.H.
Test Condition	: NFC	Operator	: J.J.LEE

Memo :  
 LIMIT : FCC P15.207 QP  
 FCC P15.207 AV

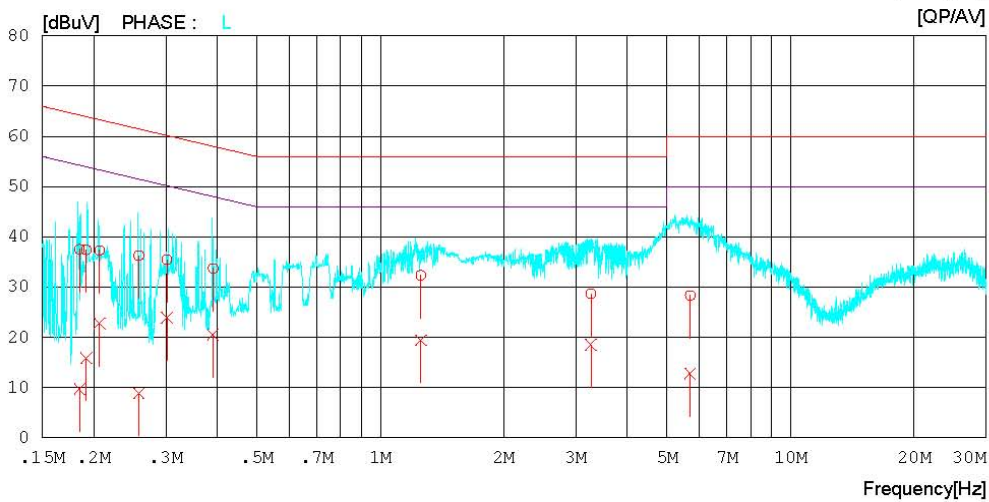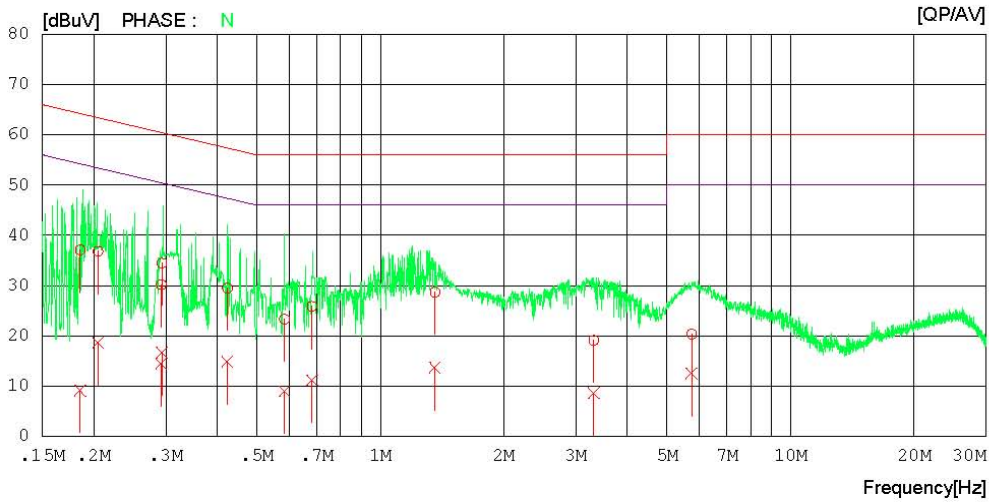

## Results of Conducted Emission

Digital EMC  
 Date : 2013-05-13

Model No. :	KYY21	Reference No. :	:
Type :		Power Supply :	120 V 60 Hz
Serial No. :	Identical prototype	Temp/Humi. :	23 °C 42 % R.H.
Test Condition :	NFC	Operator :	J.J.LEE

Memo :

LIMIT : FCC P15.207 QP  
 FCC P15.207 AV

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.18550	37.0	9.0	0.1	37.1	9.1	64.2	54.2	27.1	45.1	N
2	0.20516	36.7	18.5	0.1	36.8	18.6	63.4	53.4	26.6	34.8	N
3	0.29266	30.0	14.3	0.1	30.1	14.4	60.4	50.4	30.3	36.0	N
4	0.29350	34.4	16.6	0.1	34.5	16.7	60.4	50.4	25.9	33.7	N
5	0.42384	29.4	14.8	0.1	29.5	14.9	57.4	47.4	27.9	32.5	N
6	0.58375	23.2	8.8	0.1	23.3	8.9	56.0	46.0	32.7	37.1	N
7	0.68155	25.7	11.0	0.1	25.8	11.1	56.0	46.0	30.2	34.9	N
8	1.35900	28.6	13.6	0.1	28.7	13.7	56.0	46.0	27.3	32.3	N
9	3.31450	19.0	8.5	0.1	19.1	8.6	56.0	46.0	36.9	37.4	N
10	5.74500	20.1	12.3	0.2	20.3	12.5	60.0	50.0	39.7	37.5	N
11	0.18486	37.4	9.6	0.1	37.5	9.7	64.3	54.3	26.8	44.6	L
12	0.19195	37.3	15.8	0.1	37.4	15.9	64.0	54.0	26.6	38.1	L
13	0.20688	37.2	22.7	0.1	37.3	22.8	63.3	53.3	26.0	30.5	L
14	0.25793	36.2	8.8	0.1	36.3	8.9	61.5	51.5	25.2	42.6	L
15	0.30191	35.4	23.8	0.1	35.5	23.9	60.2	50.2	24.7	26.3	L
16	0.39116	33.6	20.4	0.1	33.7	20.5	58.0	48.0	24.3	27.5	L
17	1.25500	32.3	19.4	0.1	32.4	19.5	56.0	46.0	23.6	26.5	L
18	3.25900	28.6	18.4	0.1	28.7	18.5	56.0	46.0	27.3	27.5	L
19	5.69700	28.1	12.6	0.2	28.3	12.8	60.0	50.0	31.7	37.2	L

# **APPENDIX**

## **TEST EQUIPMENT FOR TESTS**

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent	E4440A	12/10/22	13/10/22	US45303022
TEMP & HUMIDITY Chamber	JISICO	KR-100/J-RHC2	12/09/17	13/09/17	30604493/021031
Digital Multimeter	H.P	34401A	13/02/27	14/02/27	3146A13475
Thermo hygrometer	BODYCOM	BJ5478	13/01/14	14/01/14	090205-4
DC Power Supply	HP	6622A	13/02/27	14/02/27	3448A03760
LOOP Antenna	Schwarzbeck	FMZB1513	12/09/24	13/09/24	1513-128
EMI TEST RECEIVER	R&S	ESU	13/01/08	14/01/08	100014
Vector Signal Generator	Rohde Schwarz	SMJ100A	13/01/08	14/01/08	100148
BILOG ANTENNA	SCHAFFNER	CBL6112B	12/11/16	14/11/16	2737
Amplifier (22dB)	H.P	8447E	13/01/08	14/01/08	2945A02865
CVCF	KIKUSUI	PCR1000L	12/09/15	13/09/15	14110610
EMI Test Receiver	R&S	ECSI	13/02/27	14/02/27	100364
LISN	R&S	ESH2-Z5	12/09/18	13/09/18	828739/006