

# TEST REPORT



**Dt&C Co., Ltd.**

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042  
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRRFCC2406-0034(1)

2. Customer

• Name : Kyocera Corporation

• Address : Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa, Japan

3. Use of Report : FCC Original Grant

4. Product Name / Model Name : Mobile Phone / EB1190EM

FCC ID : JOYPC9699

5. FCC Regulation(s) : CFR 47 Part 2 subpart 2.1093

Test Method Used : IEEE 1528-2013, IEC/IEEE 62209-1528

FCC SAR KDB Publications (Details in test report)

6. Date of Test : 2024.05.15 ~ 2024.05.27

7. Location of Test :  Permanent Testing Lab  On Site Testing

8. Testing Environment : Refer to appended test report.

9. Test Result : Refer to attached test report.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test report is not related to KOLAS accreditation.

Affirmation	Tested by Name : WonJu Ji 	Reviewed by Name : HakMin Kim 
-------------	--	--

2024 . 06 . 25 .

**Dt&C Co., Ltd.**

If this report is required to confirmation of authenticity, please contact to [report@dtnc.net](mailto:report@dtnc.net)

## Test Report Version

Test Report No.	Date	Description	Tested by	Reviewed by
DRRFCC2406-0034	Jun. 18, 2024	Initial issue	WonJu Ji	HakMin Kim
DRRFCC2406-0034(1)	Jun. 25, 2024	Revised Model Name	WonJu Ji	HakMin Kim

## Table of Contents

<b>1. DESCRIPTION OF DEVICE .....</b>	<b>5</b>
1.1 General Information .....	5
1.2 Power Reduction for SAR .....	7
1.3 Nominal and Maximum Output Power Specifications .....	7
1.4 DUT Antenna Locations .....	7
1.5 Simultaneous Transmission Capabilities .....	7
1.6 Miscellaneous SAR Test Considerations .....	8
1.7 Guidance Applied .....	9
1.8 Device Serial Numbers .....	9
1.9 FCC & ISED MRA test lab designation no. : KR0034 .....	9
<b>2. LTE INFORMATION .....</b>	<b>10</b>
<b>3. INTROCUCTION .....</b>	<b>11</b>
<b>4. DOSIMETRIC ASSESSMENT .....</b>	<b>12</b>
4.1 Measurement Procedure .....	12
<b>5. DEFINITION OF REFERENCE POINTS .....</b>	<b>14</b>
5.1 Ear Reference Point .....	14
5.2 Handset Reference Points .....	14
<b>6. TEST CONFIGURATION POSITIONS FOR HANDSETS .....</b>	<b>15</b>
6.1 Device Holder .....	15
6.2 Positioning for Cheek/Touch .....	15
6.3 Positioning for Ear / 15 ° Tilt .....	15
6.4 Body-Worn Accessory Configurations .....	16
6.5 Extremity Exposure Configurations .....	16
6.6 Wireless Router Configurations .....	17
<b>7. RF EXPOSURE LIMITS .....</b>	<b>18</b>
<b>8. FCC MEASUREMENT PROCEDURES .....</b>	<b>19</b>
8.1 Measured and Reported SAR .....	19
8.2 Procedures Used to Establish RF Signal for SAR .....	19
8.3 SAR Measurement Conditions for WCDMA (UMTS) .....	19
8.3.1 Output Power Verification .....	19
8.3.2 Head SAR Measurements for Handsets .....	19
8.3.3 Body SAR Measurements .....	20
8.3.4 Release 5 HSDPA Data Devices .....	20
8.3.5 Release 6 HSUPA Data Devices .....	20
8.4 SAR Measurement Conditions for LTE .....	22
8.4.1 Spectrum Plots for RB Configurations .....	22
8.4.2 MPR .....	22
8.4.3 A-MPR .....	22
8.4.4 Required RB Size and RB Offsets for SAR Testing .....	22
8.4.5 64QAM uplink .....	22
8.4.6 LTE TDD Consideration setup for SAR measurement .....	23
8.5 SAR Testing with 802.11 Transmitters .....	24
8.5.1 General Device Setup .....	24
8.5.2 U-NII and U-NII-2A .....	25
8.5.3 U-NII-2C and U-NII-3 .....	25
8.5.4 Initial Test Position Procedure .....	25
8.5.5 2.4 GHz SAR Test Requirements .....	25
8.5.6 OFDM Transmission Mode and SAR Test Channel Selection .....	26
8.5.7 Initial Test Configuration Procedure .....	26
8.5.8 Subsequent Test Configuration Procedures .....	26
<b>9. RF CONDUCTED POWERS .....</b>	<b>27</b>
9.1 GSM Nominal and Maximum Output Power Spec and Conducted Powers .....	27
9.2 WCDMA Nominal and Maximum Output Power Spec and Conducted Powers .....	28
9.3 LTE Nominal and Maximum Output Power Spec and Conducted Powers .....	29
9.4 WLAN Nominal and Maximum Output Power Spec and Conducted Powers .....	40
9.5 Bluetooth Conducted Powers .....	43

<b>10. SYSTEM VERIFICATION</b>	<b>45</b>
10.1 Tissue Verification	45
10.2 Test System Verification	47
<b>11. SAR TEST RESULTS</b>	<b>48</b>
11.1 Head SAR Results	48
11.2 Standalone Body-Worn SAR Worn SAR Results	52
11.3 Standalone Hotspot SAR Results	54
11.4 Standalone Phablet SAR Results	57
11.5 Standalone Extremity SAR Results	58
11.6 SAR Test Notes	59
<b>12. FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS</b>	<b>62</b>
12.1 Introduction	62
12.2 Simultaneous Transmission Procedures	62
12.3 Simultaneous Transmission Capabilities	62
12.4 Head SAR Simultaneous Transmission Analysis	63
12.5 Body-Worn Simultaneous Transmission Analysis	63
12.6 Hotspot SAR Simultaneous Transmission Analysis	64
12.7 Phablet SAR Simultaneous Transmission Analysis	64
12.8 Simultaneous Transmission Conclusion	64
<b>13. SAR MEASUREMENT VARIABILITY</b>	<b>65</b>
13.1 Measurement Variability	65
13.2 Measurement Uncertainty	65
<b>14. EQUIPMENT LIST</b>	<b>66</b>
<b>15. MEASUREMENT UNCERTAINTIES</b>	<b>67</b>
<b>16. CONCLUSION</b>	<b>70</b>
<b>17. REFERENCES</b>	<b>71</b>
<b>APPENDIX A. – Probe Calibration Data</b>	<b>73</b>
<b>APPENDIX B. – Dipole Calibration Data</b>	<b>74</b>
<b>APPENDIX C. – SAR Tissue Specifications</b>	<b>147</b>
<b>APPENDIX D. – SAR SYSTEM VALIDATION</b>	<b>151</b>
<b>APPENDIX E. – Description of Test Equipment</b>	<b>153</b>

# 1. DESCRIPTION OF DEVICE

## 1.1 General Information

EUT type	Mobile Phone					
FCC ID	JOYPC9699					
Equipment model name	EB1190EM					
Equipment add model name	The basic model EB1190EM and EB1201 supports Fingerprint sensor, NFC and Camera. EB1190: Fingerprint sensor and NFC are not supported. EB1190NC: Fingerprint sensor, NFC, and Camera are not supported.					
	Model number	EB1190EM *1	EB1201	EB1190 *2	EB1190NC *2	
	Memory	expansion	standard	standard	standard	
	Camera	with	with	with	without	
	Finger print sensor	with	with	without	without	
	NFC	with	with	without	without	
	Size	73.0*157.0*11.43 [mm]				
	*1: Tested model *2: Tested model in worst case on EB1190EM.					
Equipment serial no.	Identical prototype					
FCC & ISED MRA Designation No.	KR0034					
ISED#	5740A					
Mode(s) of Operation	GSM 850, GSM 1900, WCDMA 850, WCDMA 1700, WCDMA 1900, LTE Band 12, 5, 4, 2, 41, 2.4 G W-LAN (802.11b/g/n-HT20/ac-VHT20), 5 G W-LAN (802.11a/n-HT20/n-HT40/ac-VHT20/ac-VHT80), Bluetooth, NFC					
TX Frequency Range	<b>Band</b>	<b>Mode</b>	<b>Operating Modes</b>	<b>Bandwidth</b>	<b>Frequency</b>	
	GSM 850	GSM/GPRS	Voice/Data	-	824.2 ~ 848.8 MHz	
	GSM 1900	GSM/GPRS	Voice/Data	-	1 850.2 ~ 1 909.8 MHz	
	WCDMA 850	WCDMA	Voice/Data	-	826.4 ~ 846.6 MHz	
	WCDMA 1700	WCDMA	Voice/Data	-	1 712.4 ~ 1 752.6 MHz	
	WCDMA 1900	WCDMA	Voice/Data	-	1 852.4 ~ 1 907.6 MHz	
	LTE Band 12	LTE	Voice/Data	1.4/3/5/10MHz	699.7 ~ 715.3 MHz	
	LTE Band 5	LTE	Voice/Data	1.4/3/5/10MHz	824.7 ~ 848.3 MHz	
	LTE Band 4	LTE	Voice/Data	1.4/3/5/10/15/20MHz	1 710.7 ~ 1 754.3 MHz	
	LTE Band 2	LTE	Voice/Data	1.4/3/5/10/15/20MHz	1 850.7 ~ 1 909.3 MHz	
	LTE Band 41	LTE	Voice/Data	5/10/15/20MHz	2 498.5 ~ 2 687.5 MHz	
	2.4 GHz W-LAN	802.11b/g/n/ac	Voice/Data	HT20/ VHT20	2 412 ~ 2 462 MHz	
	5.2 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5 180 ~ 5 240 MHz	
		802.11n/ac	Voice/Data	HT40/VHT40	5 190 ~ 5 230 MHz	
		802.11ac	Voice/Data	VHT80	5 210 MHz	
	5.3 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5 260 ~ 5 320 MHz	
		802.11n/ac	Voice/Data	HT40/VHT40	5 270 ~ 5 310 MHz	
		802.11ac	Voice/Data	VHT80	5 290 MHz	
	5.6 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5 500 ~ 5 720 MHz	
		802.11n/ac	Voice/Data	HT40/VHT40	5 510 ~ 5 710 MHz	
		802.11ac	Voice/Data	VHT80	5 530 ~ 5 690 MHz	
	Bluetooth	-	Data	-	2 402 ~ 2 480 MHz	
	NFC	-	Type A/B/F	-	13.56 MHz	
	RX Frequency Range	GSM 850	GSM/GPRS	Voice/Data	-	869.2 ~ 893.8 MHz
		GSM 1900	GSM/GPRS	Voice/Data	-	1 930.2 ~ 1 989.8 MHz
		WCDMA 850	WCDMA	Voice/Data	-	871.4 ~ 891.6 MHz
		WCDMA 1700	WCDMA	Voice/Data	-	2 112.4 ~ 2 152.6 MHz
WCDMA 1900		WCDMA	Voice/Data	-	1 932.4 ~ 1 987.6 MHz	
LTE Band 12		LTE	Voice/Data	1.4/3/5/10MHz	729.7 ~ 745.3 MHz	
LTE Band 5		LTE	Voice/Data	1.4/3/5/10MHz	869.7 ~ 893.3 MHz	
LTE Band 4		LTE	Voice/Data	1.4/3/5/10/15/20MHz	2 110.7 ~ 2 154.3 MHz	
LTE Band 2		LTE	Voice/Data	1.4/3/5/10/15/20MHz	1 930.7 ~ 1 989.3 MHz	
LTE Band 41		LTE	Voice/Data	5/10/15/20MHz	2 498.5 ~ 2 687.5 MHz	
2.4 GHz W-LAN		802.11b/g/n/ac	Voice/Data	HT20/ VHT20	2 412 ~ 2 462 MHz	
5.2 GHz W-LAN		802.11a/n/ac	Voice/Data	HT20/VHT20	5 180 ~ 5 240 MHz	
		802.11n/ac	Voice/Data	HT40/VHT40	5 190 ~ 5 230 MHz	
		802.11ac	Voice/Data	VHT80	5 210 MHz	
5.3 GHz W-LAN		802.11a/n/ac	Voice/Data	HT20/VHT20	5 260 ~ 5 320 MHz	
		802.11n/ac	Voice/Data	HT40/VHT40	5 270 ~ 5 310 MHz	
		802.11ac	Voice/Data	VHT80	5 290 MHz	
5.6 GHz W-LAN		802.11a/n/ac	Voice/Data	HT20/VHT20	5 500 ~ 5 720 MHz	
		802.11n/ac	Voice/Data	HT40/VHT40	5 510 ~ 5 710 MHz	
		802.11ac	Voice/Data	VHT80	5 530 ~ 5 690 MHz	
Bluetooth		-	Data	-	2 402 ~ 2 480 MHz	
NFC		-	Type A/B/F	-	13.56 MHz	

**SAR Summary Table**

Equipment Class	Band	Reported SAR				
		1g SAR (W/kg)			10g SAR (W/kg)	
		Head	Body-Worn	Hotspot	Phablet	Extremity
PCE	GSM 850	0.34	0.26	-	-	-
PCE	GPRS 850	0.31	0.25	0.49	-	-
PCE	GSM 1900	0.35	0.30	-	-	-
PCE	GPRS 1900	0.40	0.34	0.78	-	-
PCE	WCDMA 850	0.44	0.26	0.47	-	-
PCE	WCDMA 1700	0.51	0.52	0.96	-	-
PCE	WCDMA 1900	0.77	0.45	1.12	-	-
PCE	LTE Band 12	0.16	0.14	0.26	-	-
PCE	LTE Band 5	0.26	0.29	0.34	-	-
PCE	LTE Band 4	0.44	0.65	0.83	-	-
PCE	LTE Band 2	0.53	0.58	0.78	-	-
PCE	LTE Band 41	0.30	0.55	1.27	1.85	-
DTS	2.4 GHz W-LAN	0.20	0.14	0.31	-	-
U-NII-1	5.2 GHz W-LAN	-	-	-	-	-
U-NII-2A	5.3 GHz W-LAN	0.30	0.44	-	1.22	-
U-NII-2C	5.6 GHz W-LAN	0.19	0.19	-	0.55	-
DSS	Bluetooth	0.12	< 0.1	0.21	-	-
DXX	NFC	-	-	-	-	< 0.1
Simultaneous SAR per KDB 690783 D01v01r03		0.95	1.17	1.58	3.07	-
FCC Equipment Class	Licensed Portable Transmitter Held to Ear (PCE) Part 15 Spread Spectrum Transmitter(DSS) Digital Transmission System(DTS) Unlicensed National Information Infrastructure (UNII) Low Power Communications Device Transmitter (DXX)					
Date(s) of Tests	2024.05.15 ~ 2024.05.27					
Antenna Type	Internal Antenna					
Functions	<ul style="list-style-type: none"> <li>● GSM/GPRS (GPRS Class: 12) supported.</li> <li>* DTM not supported.</li> <li>● VoIP is supported.</li> <li>● W-LAN 2.4GHz is supported Hotspot.</li> <li>● W-LAN 5 GHz is not supported Hotspot.</li> </ul>					

## 1.2 Power Reduction for SAR

There is no power reduction used for any band/mode implemented in this device for SAR purposes.

## 1.3 Nominal and Maximum Output Power Specifications

The Nominal and Maximum Output Power Specifications are in section 9 of this test report.

## 1.4 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. A diagram showing the location of the device of the device antenna can be found in Antenna Location. Since the display diagonal dimension of this device is > 150 mm it is considered a "phablet".

Mode	Device Sides for SAR Testing					
	Top	Bottom	Front	Rear	Right	Left
GSM/GPRS 850	X	O	O	O	X	O
GSM/GPRS 1900	X	O	O	O	X	O
WCDMA 850	X	O	O	O	X	O
WCDMA 1700	X	O	O	O	X	O
WCDMA 1900	X	O	O	O	X	O
LTE Band 12	X	O	O	O	X	O
LTE Band 5	X	O	O	O	X	O
LTE Band 4	X	O	O	O	X	O
LTE Band 2	X	O	O	O	X	O
LTE Band 41	X	O	O	O	X	O
2.4G W-LAN	O	X	O	O	X	O
5G W-LAN	O	X	O	O	X	O
Bluetooth	O	X	O	O	X	O
NFC	O	O	O	O	O	O

Note 1: Particular DUT edges were not required to be evaluated for Hotspot SAR or Phablet SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 648474 D04v01r03. The antenna document shows the distances between the transmit antennas and the edges of the device.

Note 2: O - Test / X - Not test.

## 1.5 Simultaneous Transmission Capabilities

The Simultaneous Transmission Capabilities are in section 12 of this test report.

## 1.6 Miscellaneous SAR Test Considerations

### (A) WIFI

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg, SAR is not required for U-NII-1 band according to FCC KDB publication 248227 D01v02r02.

Since Wireless Router operations are not allowed by the chipset firmware using 5 GHz WIFI, only 2.4 GHz WIFI Hotspot SAR tests and combinations are considered for SAR with respect to Wireless Router configurations according to FCC KDB 941225 D06v02r01.

### (B) Licensed Transmitter(s)

GSM/GPRS DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS Data.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

This device supports LTE capabilities with overlapping transmission frequency ranges. When the supported frequency range of an LTE Band falls completely within an LTE band with a larger transmission frequency range, both LTE bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both LTE bands share the same transmission path and signal characteristics, SAR was only assessed for the band with the larger transmission frequency range.



## 1.7 Guidance Applied

- IEEE 1528-2013
- IEC/IEEE 62209-1528
- FCC KDB Publication 941225 D01v03r01 (3G SAR Procedures)
- FCC KDB Publication 941225 D05v02r05 (SAR for LTE Devices)
- FCC KDB Publication 941225 D05Av01r02 (LTE Rel.10 KDB Inquiry Sheet)
- FCC KDB Publication 941225 D06v02r01(Hotspot Mode)
- FCC KDB Publication 248227 D01v02r02 (802.11 Wi-Fi SAR)
- FCC KDB Publication 447498 D01v06 (General RF Exposure Guidance)
- FCC KDB Publication 648474 D04v01r03 (Handset SAR)
- FCC KDB Publication 690783 D01v01r03 (SAR Listings on Grants)
- FCC KDB Publication 865664 D01v01r04 (SAR Measurement 100 MHz to 6 GHz)
- FCC KDB Publication 865664 D02v01r02 (RF Exposure Reporting)
- October 2013 TCB Workshop Notes (GPRS testing criteria)
- April 2015 TCB Workshop Notes (Simultaneous transmission summation clarified)
- October 2016 TCB Workshop Notes (Bluetooth Duty Factor)
- April 2019 TCB Workshop Notes (Tissue Simulating Liquids)

## 1.8 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 11.

## 1.9 FCC & ISED MRA test lab designation no. : KR0034

## 2. LTE INFORMATION

LTE Information					
FCC ID	JOYPC9699				
Form Factor	Mobile Phone				
Frequency Range of each LTE transmission Band	LTE Band 12 (699.7 ~ 715.3 MHz) LTE Band 5 (Cell) (824.7 ~ 848.3 MHz) LTE Band 4 (AWS) (1 710.7 ~ 1 754.3 MHz) LTE Band 2 (PCS) (1 850.7 ~ 1 909.3 MHz) LTE Band 41 (2 498.5 ~ 2 687.5 MHz)				
Channel Bandwidths	LTE Band 12 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 5 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 4 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 2 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 41: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
Channel Number and Frequencies(MHz)	Low	Low-Mid	Mid	Mid-High	High
LTE Band 12: 1.4 MHz	699.7 (23017)	N/A	707.5 (23095)	N/A	715.3 (23173)
LTE Band 12: 3 MHz	700.5 (23025)	N/A	707.5 (23095)	N/A	714.5 (23165)
LTE Band 12: 5 MHz	701.5 (23035)	N/A	707.5 (23095)	N/A	713.5 (23155)
LTE Band 12: 10 MHz	704.0 (23060)	N/A	707.5 (23095) <sup>Note1</sup>	N/A	711.0 (23130)
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)	N/A	836.5 (20525)	N/A	848.3 (20643)
LTE Band 5 (Cell): 3 MHz	825.5 (20415)	N/A	836.5 (20525)	N/A	847.5 (20635)
LTE Band 5 (Cell): 5 MHz	826.5 (20425)	N/A	836.5 (20525)	N/A	846.5 (20625)
LTE Band 5 (Cell): 10 MHz	829.0 (20450)	N/A	836.5 (20525) <sup>Note2</sup>	N/A	844.0 (20600)
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)	N/A	1732.5 (20175)	N/A	1754.3 (20393)
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)	N/A	1732.5 (20175)	N/A	1753.5 (20385)
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)	N/A	1732.5 (20175)	N/A	1752.5 (20375)
LTE Band 4 (AWS): 10 MHz	1715.0 (20000)	N/A	1732.5 (20175)	N/A	1750.0 (20350)
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)	N/A	1732.5 (20175)	N/A	1747.5 (20325)
LTE Band 4 (AWS): 20 MHz	1720.0 (20050)	N/A	1732.5 (20175) <sup>Note3</sup>	N/A	1745.0 (20300)
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)	N/A	1880.0 (18900)	N/A	1909.3 (19193)
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)	N/A	1880.0 (18900)	N/A	1908.5 (19185)
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)	N/A	1880.0 (18900)	N/A	1907.5 (19175)
LTE Band 2 (PCS): 10 MHz	1855.0 (18650)	N/A	1880.0 (18900)	N/A	1905.0 (19150)
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)	N/A	1880.0 (18900)	N/A	1902.5 (19125)
LTE Band 2 (PCS): 20 MHz	1860.0 (18700)	N/A	1880.0 (18900)	N/A	1900.0 (19100)
LTE Band 41: 5 MHz	2498.5 (39675)	2545.8 (40148)	2593.0 (40620)	2640.3 (41093)	2687.5 (41565)
LTE Band 41: 10 MHz	2501.0 (39700)	2547.0 (40160)	2593.0 (40620)	2639.0 (41080)	2685.0 (41540)
LTE Band 41: 15 MHz	2503.5 (39725)	2548.3 (40173)	2593.0 (40620)	2637.8 (41068)	2682.5 (41515)
LTE Band 41: 20 MHz	2506.0 (39750)	2549.5 (40185)	2593.0 (40620)	2636.5 (41055)	2680.0 (41490)
UE Category	LTE Rel.10, UE Cat 4				
Modulations Supported in UL	QPSK, 16QAM, 64QAM				
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.5? (manufacturer attestation to be provided)	Yes				
A-MPR (Additional MPR) disabled for SAR Testing?	Yes				
LTE Carrier Aggregation Possible Combinations	LTE Carrier Aggregation is not supported.				
LTE Additional Information	This device does not support CA features on 3GPP Release 10. All uplink communications are identical to the Release 8 Specifications. The following LTE Release 10 Features are not supported: Relay, HetNet, Enhanced MIMO, eICIC, WIFI Offloading, MDH, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.				

### Note(s)

- LTE B12 can not contain three non-overlapping channels of 10 MHz bandwidth.  
Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
- LTE B5(Cell) can not contain three non-overlapping channels of 10 MHz bandwidth.  
Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
- LTE B4 (AWS) can not contain three non-overlapping channels of 20 MHz bandwidth.  
Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

### 3. INTROCUCTION

The FCC and Industry Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices.

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86 NCRP, 1986, Bethesda, MD 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

#### SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density ( $\rho$ ) It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Fig. 3.1)

$$SAR = \frac{d}{dt} \left( \frac{dU}{dm} \right) = \frac{d}{dt} \left( \frac{dU}{\rho dv} \right)$$

Fig. 3.1 SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- $\sigma$  = conductivity of the tissue-simulating material (S/m)
- $\rho$  = mass density of the tissue-simulating material (kg/m<sup>3</sup>)
- E = Total RMS electric field strength (V/m)


NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.

## 4. DOSIMETRIC ASSESSMENT

### 4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4.1) and IEEE1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4.1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
  - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4.1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
  - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
  - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.



**Figure 4.1**  
**Sample SAR Area Scan**


		$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		$5 \text{ mm} \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \text{ mm} \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$		$\leq 2$ GHz: $\leq 15 \text{ mm}$ 2 – 3 GHz: $\leq 12 \text{ mm}$	3 – 4 GHz: $\leq 12 \text{ mm}$ 4 – 6 GHz: $\leq 10 \text{ mm}$
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8 \text{ mm}$ 2 – 3 GHz: $\leq 5 \text{ mm}^*$	3 – 4 GHz: $\leq 5 \text{ mm}^*$ 4 – 6 GHz: $\leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5 \text{ mm}$	3 – 4 GHz: $\leq 4 \text{ mm}$ 4 – 5 GHz: $\leq 3 \text{ mm}$ 5 – 6 GHz: $\leq 2 \text{ mm}$
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4 \text{ mm}$
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1) \text{ mm}$
Minimum zoom scan volume	x, y, z	$\geq 30 \text{ mm}$	3 – 4 GHz: $\geq 28 \text{ mm}$ 4 – 5 GHz: $\geq 25 \text{ mm}$ 5 – 6 GHz: $\geq 22 \text{ mm}$
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is $\leq 1.4 \text{ W/kg}$ , $\leq 8 \text{ mm}$ , $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

Table 4.1 Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04\*

## 5. DEFINITION OF REFERENCE POINTS

### 5.1 Ear Reference Point

Figure 5.1 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point(ERP), and “RE” is the right ERP. The ERPs are 15 mm posterior to the entrance to the Ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5.1. The plane Passing, through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck- Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 5.1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning.




**Figure 5.1**  
Close-up side view of ERP

### 5.2 Handset Reference Points

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Fig. 5.3). The “test device reference point” was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



**Figure 5.2** Front, back and side view SAM Twin Phantom

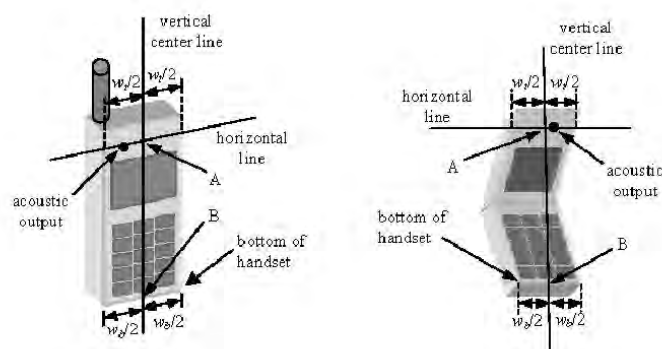

**Figure 5.3** Handset Vertical Center & Horizontal Line Reference Points

## 6. TEST CONFIGURATION POSITIONS FOR HANDSETS

### 6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ .

### 6.2 Positioning for Cheek/Touch

1. The test device was positioned with the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6.1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.



Figure 6.1 Front, Side and Top View of Cheek/Touch Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the ear.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the plane normal to MB-NF including the line MB (reference plane).
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, the handset was rotated about the line NF until any point on the handset made contact with a phantom point below the ear (cheek). (See Figure 6.2)

### 6.3 Positioning for Ear / 15 ° Tilt

With the test device aligned in the “Cheek/Touch Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degree.
2. The phone was then rotated around the horizontal line by 15 degree.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the phone touches the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. The tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6.3).




Figure 6.2 Side view w/relevant markings



Figure 6.3 Front, Side and Top View of Ear/15° Position

## 6.4 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6.4). Per FCC KDB Publication 648474 D04v01r03, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is  $> 1.2 \text{ W/kg}$ , the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

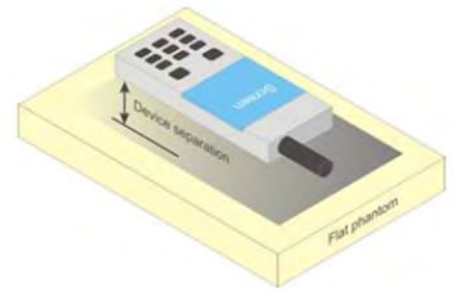


Figure 6.4 Sample Body-Worn Diagram

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented.

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

## 6.5 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v06 should be applied to determine SAR test requirements.



## 6.6 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets ( $L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$ ) are based on a composite test separation distance of 10 mm from the front, rear and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative test separation distance configuration may be used to support both SAR conditions.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitter often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each KDB Publication 447498 D01v06 procedures. The "Portable Hotspot" feature on the handset was not activated during SAR assessment, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

## 7. RF EXPOSURE LIMITS

### Uncontrolled Environment:

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### Controlled Environment:

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 8.1.SAR Human Exposure Specified in ANSI/IEEE C95.1-1992**

	HUMAN EXPOSURE LIMITS	
	General Public Exposure (W/kg) or (mW/g)	Occupational Exposure (W/kg) or (mW/g)
SPATIAL PEAK SAR * (Brain)	1.60	8.00
SPATIAL AVERAGE SAR ** (Whole Body)	0.08	0.40
SPATIAL PEAK SAR *** (Hands / Feet / Ankle / Wrist)	4.00	20.0

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e.as a result of employment or occupation).

## 8. FCC MEASUREMENT PROCEDURES

---

Power measurements were performed using a base station simulator under digital average power.

### 8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. The highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

### 8.2 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01.

The device was placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test were evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device was tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviated by more than 5%, the SAR test and drift measurements were repeated.

### 8.3 SAR Measurement Conditions for WCDMA (UMTS)

#### 8.3.1 Output Power Verification

Maximum output power is measured on the High, Middle and Low channels for each applicable transmission band according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1s”.

Maximum output power is verified on the High, Middle and Low channels according to the general, descriptions in section 5.2 of 3GPP TS 34.121 (release 5), using the appropriate RMC with TPC,(transmit power control) set to all “1s” or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

#### 8.3.2 Head SAR Measurements for Handsets

SAR for head exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all “1s”. SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than 0.25 dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2 AMR with a 3.4 kbps SRB (signaling radio bearer) using the exposure configuration that resulted in the highest SAR for that RF channel in the 12.2 kbps RMC mode.

### 8.3.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all "1s".

### 8.3.4 Release 5 HSDPA Data Devices

The following procedures are applicable to HSDPA data devices operating under 3GPP Release 5. SAR is required for devices in body-worn accessory and other body exposure conditions, including handsets and data modems operating in various electronic devices. HSDPA operates in conjunction with WCDMA and requires an active DPCCH. The default test configuration is to measure SAR in WCDMA with HSDPA remain inactive, to establish a radio link between the test device and a communication test set using a 12.2 kbps RMC configured in Test Loop Mode 1. SAR for HSDPA is selectively measured using the highest reported SAR configuration in WCDMA, with an FRC in H-set 1 and a 12.2 kbps RMC. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCHn) according to exposure conditions, device operating capabilities and maximum output power specified for production units, including tune-up tolerance by applying the 3G SAR test reduction procedures. Maximum output power is verified according to the applicable versions of 3GPP TS 34.121. SAR must be measured based on these maximum output conditions and requirements in KDB Publication 447498, with respect to the UE Categories, and explained in the SAR report. When Maximum Power Reduction (MPR) applies, the implementations must be clearly identified in the SAR report to support test results according to Cubic Metric (CM) and, as appropriate, Enhanced MPR (E-MPR) requirements.

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{hs}^{(1)}$	CM (dB) <sup>(2)</sup>
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 <sup>(3)</sup>	15/15 <sup>(3)</sup>	64	12/15 <sup>(3)</sup>	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$   
 Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$ .  
 Note 3: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

Figure 9.1 Table 1

### 8.3.5 Release 6 HSUPA Data Devices

The following procedures are applicable to HSPA (HSUPA/HSDPA) data devices operating under 3GPP Release 6. SAR is required for devices in body-worn accessory and other body exposure conditions, including handsets and data modems operating in various electronic devices. HSUPA operates in conjunction with WCDMA and HSDPA. SAR is initially measured in WCDMA test configurations with HSPA remain inactive. The default test configuration is to establish a radio link between the test device and a communication test set to configure a 12.2 kbps RMC in Test Loop Mode 1. SAR for HSPA is selectively measured with HS-DPCCH, E-DPCCH and E-DPDCH, all enabled, along with a 12.2 kbps RMC using the highest reported SAR configuration in WCDMA with 12.2 kbps RMC only.

An FRC is configured according to HS-DPCCH Sub-test 1 using H-set 1 and QPSK. HSPA is configured according to E-DCH Sub-test 5 requirements. SAR for other HSPA sub-test configurations is confirmed selectively according to exposure conditions, E-DCH UE Category and maximum output power of production units, including tune-up tolerance by applying the 3G SAR test reduction procedure. Maximum output power is verified according to procedures in applicable versions of 3GPP TS 34.121. SAR must be measured based on these maximum output conditions and requirements in KDB Publication 447498, with respect to the UE Categories for HS-DPCCH and HSPA, and explained in the SAR report. When Maximum Power Reduction (MPR) applies, the implementations must be clearly identified in the SAR report to support test results according to Cubic Metric (CM) and, as appropriate, Enhanced MPR (E-MPR)

requirements.

Sub-test	$\beta_c$	$\beta_d$	$\beta_a$ (SF)	$\beta_c \beta_d$	$\beta_{hs}^{(1)}$	$\beta_{ec}$	$\beta_{ed}$	$\beta_{ed}$ (SF)	$\beta_{ed}$ (codes)	CM <sup>(2)</sup> (dB)	MPR (dB)	AG <sup>(4)</sup> Index	E-TFCI
1	11/15 <sup>(3)</sup>	15/15 <sup>(3)</sup>	64	11/15 <sup>(3)</sup>	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed}: 47/15$ $\beta_{ed}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 <sup>(4)</sup>	15/15 <sup>(4)</sup>	64	15/15 <sup>(4)</sup>	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$ .

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6:  $\beta_{ed}$  cannot be set directly; it is set by Absolute Grant Value.

**Figure 9.2 Table 2**

## 8.4 SAR Measurement Conditions for LTE

LTE modes were tested according to FCC KDB 941225 D05v02r05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR. The call simulator was used for LTE output power measurement and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

### 8.4.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

### 8.4.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36. 101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

### 8.4.3 A-MPR

A-MPR (Addition MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

### 8.4.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r05:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
  - i. The required channel and offset combination with the highest maximum output power is required for SAR.
  - ii. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channel is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
  - iii. When the reported SAR for a required test channel is  $> 1.45$  W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is  $< 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to 0.5 dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is  $< 1.45$  W/kg.

### 8.4.5 64QAM uplink

(1) Per KDB 941225 D05 V02r05, we'll measure conducted powers per Section 5.1 for all uplink modulations (QPSK, 16QAM, 64QAM) and include in the test report.

(2) From these power measurements, we will apply the procedures in Section 5.2.4 ("Higher Order Modulations") to determine SAR test reduction for 16QAM and 64QAM test cases.

### 8.4.6 LTE TDD Consideration setup for SAR measurement

According to KDB 941225 D05 SAR for LTE Devices v02r05 for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33 %) using Uplink-downlink configuration 0 and Special subframe configuration 6.

LTE TDD Band 41 supports 3GPP TS 36.211 section 4.2 for Type 2 Frame and Table 4.2-2 for uplink-downlink configuration and Table 4.2-1 for Special subframe configurations.

**Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).**

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink				
	DwPTS	UpPTS		DwPTS	UpPTS			
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$		
1	$19760 \cdot T_s$			$20480 \cdot T_s$				
2	$21952 \cdot T_s$			$23040 \cdot T_s$				
3	$24144 \cdot T_s$			$25600 \cdot T_s$				
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$		
5	$6592 \cdot T_s$			$20480 \cdot T_s$				
6	$19760 \cdot T_s$			$23040 \cdot T_s$				
7	$21952 \cdot T_s$			-			-	-
8	$24144 \cdot T_s$			-			-	-

**Table 4.2-2: Uplink-downlink configurations.**

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle = Extended cyclic prefix in uplink \* (Ts) \* # of S + # of U

$T_s = 1/(15000 * 2048)$  seconds

Example for calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle =  $5120 * [1/(15000 * 2048)] * 2 + 6 \text{ ms} = 63.33 \%$

## 8.5 SAR Testing with 802.11 Transmitters

The normal network operating configurations are not suitable for measuring the SAR of 802.11 b/g/n transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227D01v02r02 for more details.

### 8.5.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92-96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.



### 8.5.2 U-NII and U-NII-2A

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following, with respect to the highest reported SAR and maximum output power specified for production units. The procedures are applied independently to each exposure configuration; for example, head, body, hotspot mode etc.

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.

### 8.5.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements.

When Terminal Doppler Weather Rader (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification.

Unless band gap channels are permanently disabled, SAR must be considered for these channels. When band gap channels are disabled, each band is tested independently according to the normally required OFDM SAR measurements and probe calibration frequency points requirements.

### 8.5.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all position in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4$  W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is  $\leq 0.8$  W/kg or all test position are measured.

#### 8.5.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is  $> 0.8$  W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power is  $> 1.2$  W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

### 8.5.6 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a and 802.11n or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n or 802.11g then 802.11n is used for SAR measurement. When the maximum output power were the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

### 8.5.7 Initial Test Configuration Procedure

For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is  $\leq 0.8$  W/kg, no additional measurements on other test channels are required.

Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is  $\leq 1.2$  W/kg or all channels are measured.

### 8.5.8 Subsequent Test Configuration Procedures

For OFDM configurations, in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure, when applicable. When the highest reported SAR for the initial test configuration, adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power is  $\leq 1.2$  W/kg, no additional SAR testing for the subsequent test configurations is required.

## 9. RF CONDUCTED POWERS

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06

### 9.1 GSM Nominal and Maximum Output Power Spec and Conducted Powers

Band & Mode		Voice[dBm]	Burst Average GSMK [dBm]			
		1 TX Slot	1 TX Slot	2 TX Slot	3 TX Slot	4 TX Slot
GSM/GPRS 850	Maximum	33.90	33.90	30.90	29.10	27.90
	Nominal	32.50	32.50	29.50	27.70	26.50
GSM/GPRS 1900	Maximum	30.90	30.90	27.90	26.10	24.90
	Nominal	29.50	29.50	26.50	24.70	23.50

Table 9.1.1 GSM Nominal and Maximum Output Power Spec

Band	Channel	Maximum Burst-Averaged Output Power(dBm)				
		Voice GSM CS 1 Slot	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot
GSM850	128	33.30	33.31	30.78	28.98	27.86
	190	33.20	33.21	30.76	28.85	27.76
	251	33.15	33.16	30.70	28.85	27.70
PCS 1900	512	29.20	29.20	26.86	25.15	23.95
	661	28.96	28.97	26.28	24.53	23.33
	810	28.92	28.93	26.05	24.25	23.05
Band	Channel	Calculated Maximum Frame-Averaged Output Power(dBm)				
		Voice GSM CS 1 Slot	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot
GSM850	128	24.27	24.28	24.76	24.72	24.85
	190	24.17	24.18	24.74	24.59	24.75
	251	24.12	24.13	24.68	24.59	24.69
PCS 1900	512	20.17	20.17	20.84	20.89	20.94
	661	19.93	19.94	20.26	20.27	20.32
	810	19.89	19.90	20.03	19.99	20.04
<b>GSM850</b>	<b>Frame Avg. Targets:</b>	<b>23.47</b>	23.47	23.48	23.44	<b>23.49</b>
<b>PCS 1900</b>		<b>20.47</b>	20.47	20.48	20.44	<b>20.49</b>

Table 9.1.2 GSM Conducted Power

Note:

- Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- GPRS (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.

GPRS Multislot class: 12 (max 4 TX Uplink slots)  
DTM Multislot Class: N/A



Figure 9.1 Power Measurement Setup

## 9.2 WCDMA Nominal and Maximum Output Power Spec and Conducted Powers

3GPP Release Version	Mode		Cellular Band (dBm)		AWS Band (dBm)		PCS Band (dBm)		3GPP MPR (dB)
99	WCDMA	Voice	Maximum	24.30	24.30	24.30	24.30	-	
			Nominal	23.00	23.00	23.00	23.00	-	
5	HSDPA	Subtest 1	Maximum	23.30	23.30	23.30	23.30	0	
			Nominal	22.00	22.00	22.00	22.00	0	
5		Subtest 2	Maximum	23.30	23.30	23.30	23.30	0	
			Nominal	22.00	22.00	22.00	22.00	0	
5		Subtest 3	Maximum	22.80	22.80	22.80	22.80	0.5	
			Nominal	21.50	21.50	21.50	21.50	0.5	
5		Subtest 4	Maximum	22.80	22.80	22.80	22.80	0.5	
			Nominal	21.50	21.50	21.50	21.50	0.5	
6	HSUPA	Subtest 1	Maximum	23.30	23.30	23.30	23.30	0	
			Nominal	22.00	22.00	22.00	22.00	0	
6		Subtest 2	Maximum	21.30	21.30	21.30	21.30	2	
			Nominal	20.00	20.00	20.00	20.00	2	
6		Subtest 3	Maximum	22.30	22.30	22.30	22.30	1	
			Nominal	21.00	21.00	21.00	21.00	1	
6		Subtest 4	Maximum	21.30	21.30	21.30	21.30	2	
			Nominal	20.00	20.00	20.00	20.00	2	
6		Subtest 5	Maximum	23.30	23.30	23.30	23.30	0	
			Nominal	22.00	22.00	22.00	22.00	0	

Table 9.2.1 WCDMA Nominal and Maximum Output Power Spec

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band (dBm)			AWS Band (dBm)			PCS Band (dBm)			3GPP MPR (dB)
			4132	4183	4233	1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	22.07	22.09	22.16	22.67	22.61	22.71	22.44	22.40	22.29	-
99		12.2 kbps AMR	22.06	22.08	22.15	22.66	22.60	22.70	22.43	22.39	22.28	-
5	HSDPA	Subtest 1	22.08	22.09	22.15	21.63	21.60	21.69	21.42	21.39	21.30	0
5		Subtest 2	22.08	22.09	22.14	21.65	21.62	21.70	21.44	21.41	21.31	0
5		Subtest 3	21.62	21.63	21.68	21.17	21.14	21.25	20.99	20.95	20.85	0.5
5		Subtest 4	21.59	21.60	21.65	21.14	21.12	21.22	20.94	20.92	20.82	0.5
6	HSUPA	Subtest 1	22.08	22.09	22.15	21.63	21.60	21.66	21.42	21.40	21.26	0
6		Subtest 2	20.10	20.09	20.15	19.64	19.61	19.71	19.45	19.42	19.37	2
6		Subtest 3	21.11	21.12	21.17	20.66	20.61	20.70	20.44	20.40	20.29	1
6		Subtest 4	20.13	20.14	20.18	19.64	19.61	19.71	19.49	19.44	19.35	2
6		Subtest 5	21.78	21.78	21.85	21.33	21.23	21.36	21.11	21.09	21.02	0

Table 9.2.2 WCDMA Conducted Power

WCDMA SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.

The manufacturer declares that the HSDPA and HSUPA transmitter's power will not exceed the R99 maximum transmit power in devices based on Qualcomm's HSPA chipset solutions.



Figure 9.2 Power Measurement Setup

### 9.3 LTE Nominal and Maximum Output Power Spec and Conducted Powers

Band & Mode	Modulated Average[dBm]	
	LTE Band 12	Maximum
	Nominal	23.00

Table 9.3.1.1 Nominal and Maximum Output Power Spec

#### 1) LTE Band 12

LTE Band 12 Conducted Power-- 10 MHz Bandwidth								
Modulation	RB Size	RB Offset	Mid Channel		MPR Allowed Per 3GPP(dB)	MPR (dB)		
			23095 (70.5 MHz)					
			Conducted Power (dBm)					
QPSK	1	0	22.90		≤ 1	0		
	1	25	22.79					
	1	49	22.72					
	25	0	21.75			1		
	25	12	21.64					
	25	25	21.55					
16QAM	50	0	21.55		≤ 1	1		
	1	0	21.91					
	1	25	21.75					
	1	49	21.69			≤ 2	2	
	25	0	20.71					
	25	12	20.61					
64QAM	25	25	20.53		≤ 2	2		
	50	0	20.51					
	1	0	20.88				≤ 2	2
	1	25	20.76					
	1	49	20.71			≤ 3		
	25	0	19.73					
25	12	19.66						
	25	25	19.56		≤ 3	3		
	50	0	19.50					

Table 9.3.1.2 LTE Conducted Power

Note: LTE B12 can not contain three non-overlapping channels of 10 MHz bandwidth.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

LTE Band 12 Conducted Power-- 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)		
			23035 (70.5 MHz)	23095 (70.5 MHz)	23155 (713.5 MHz)				
			Conducted Power (dBm)						
QPSK	1	0	22.82	22.80	22.79	≤ 1	0		
	1	12	22.80	22.77	22.75				
	1	24	22.73	22.72	22.69			1	
	12	0	21.66	21.56	21.47				
	12	6	21.44	21.30	21.32				
	16QAM	12	13	21.40	21.27		21.30	≤ 1	1
25		0	21.46	21.34	21.30				
1		0	21.86	21.83	21.80	≤ 1	1		
1		12	21.81	21.73	21.70				
1		24	21.71	21.65	21.60				≤ 2
12		0	20.59	20.46	20.40				
12	6	20.46	20.34	20.35					
64QAM	12	13	20.42	20.31	20.32		≤ 2	2	
	25	0	20.44	20.31	20.30				
	1	0	20.85	20.81	20.80	≤ 2			2
	1	12	20.79	20.71	20.68				
	1	24	20.76	20.68	20.66			≤ 3	
	12	0	19.52	19.44	19.38				
12	6	19.45	19.37	19.35					
	12	13	19.43	19.35	19.32		≤ 3	3	
	15	0	19.43	19.28	19.25				

Table 9.3.1.3 LTE Conducted Power

LTE Band 12 Conducted Power– 3 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			23025 (700.5 MHz)	23095 (707.5 MHz)	23165 (714.5 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	22.80	22.79	22.69	≤ 1	0	
	1	7	22.73	22.69	22.66			
	1	14	22.66	22.61	22.53			
	8	0	21.49	21.42	21.32		1	
	8	4	21.47	21.30	21.31			
	8	7	21.46	21.29	21.27			
16QAM	15	0	21.47	21.26	21.11	≤ 1	1	
	1	0	21.83	21.74	21.67			
	1	7	21.79	21.71	21.65			
	1	14	21.75	21.59	21.52		≤ 2	
	8	0	20.55	20.36	20.34			
	8	4	20.53	20.34	20.33			
64QAM	8	7	20.52	20.33	20.30	≤ 2	2	
	15	0	20.45	20.26	20.10			
	1	0	20.80	20.77	20.64			≤ 2
	1	7	20.73	20.75	20.61			
	1	14	20.62	20.52	20.51		≤ 3	
	8	0	19.56	19.38	19.34			
8	4	19.52	19.34	19.33				
64QAM	8	7	19.51	19.31	19.28	≤ 3	3	
	15	0	19.43	19.25	19.16			

Table 9.3.1.4 LTE Conducted Power

LTE Band 12 Conducted Power– 1.4 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			23017 (699.7 MHz)	23095 (707.5 MHz)	23173 (715.3 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	22.81	22.75	22.70	≤ 1	0	
	1	2	22.77	22.65	22.56			
	1	5	22.57	22.53	22.43			
	3	0	22.50	22.42	22.32		0	
	3	2	22.50	22.30	22.22			
	3	3	22.49	22.29	22.20			
16QAM	6	0	21.53	21.31	21.29	≤ 1	1	
	1	0	21.83	21.70	21.63			
	1	2	21.80	21.63	21.60			
	1	5	21.57	21.53	21.46		≤ 2	
	3	0	21.55	21.44	21.39			
	3	2	21.50	21.29	21.20			
64QAM	3	3	21.48	21.28	21.18	≤ 2	1	
	6	0	20.53	20.35	20.31			
	1	0	20.85	20.66	20.61			≤ 2
	1	2	20.70	20.62	20.56			
	1	5	20.58	20.51	20.43		≤ 2	
	3	0	20.60	20.43	20.40			
3	2	20.59	20.39	20.39				
64QAM	3	3	20.58	20.38	20.33	≤ 2	2	
	6	0	19.42	19.28	19.21			
	6	0	19.42	19.28	19.21			≤ 3

Table 9.3.1.5 LTE Conducted Power

Band & Mode		Modulated Average[dBm]
LTE Band 5	Maximum	24.30
	Nominal	23.00

Table 9.3.2.1 Nominal and Maximum Output Power Spec

## 2) LTE Band 5 (Cell)

LTE Band 5 (Cell) Conducted Power-- 10 MHz Bandwidth						
Modulation	RB Size	RB Offset	Mid Channel		MPR Allowed Per 3GPP(dB)	MPR (dB)
			20525 (836.5 MHz)			
			Conducted Power (dBm)			
QPSK	1	0	22.72		≤ 1	0
	1	25	23.40			
	1	49	23.15			
	25	0	21.91			1
	25	12	22.35			
	25	25	22.05			
16QAM	1	0	21.73		≤ 1	1
	1	25	22.39			
	1	49	22.20			
	25	0	20.86		≤ 2	2
	25	12	21.34			
	25	25	21.11			
64QAM	1	0	20.88		≤ 2	2
	1	25	21.44			
	1	49	21.21			
	25	0	19.83		≤ 3	3
	25	12	20.33			
	25	25	20.01			
	50	0	19.85			3

Table 9.3.2.2 LTE Conducted Power

Note: LTE B5(Cell) can not contain three non-overlapping channels of 10 MHz bandwidth.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

LTE Band 5 (Cell) Conducted Power-- 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20425 (826.5 MHz)	20525 (836.5 MHz)	20625 (846.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	22.85	22.80	22.64	≤ 1	0
	1	12	23.34	23.22	23.18		
	1	24	23.23	23.19	23.02		
	12	0	21.81	21.77	21.71		1
	12	6	22.36	22.32	22.14		
	12	13	22.07	22.06	21.99		
16QAM	25	0	22.05	21.89	21.83	≤ 1	1
	1	0	21.93	21.75	21.55		
	1	12	22.42	22.24	22.11		
	1	24	22.34	22.23	22.04	≤ 2	2
	12	0	20.89	20.72	20.70		
	12	6	21.35	21.31	21.19		
64QAM	12	13	21.05	21.01	20.96	≤ 2	2
	25	0	21.09	20.81	20.75		
	1	0	20.95	20.80	20.61		
	1	12	21.45	21.28	21.19	≤ 3	3
	1	24	21.28	21.27	21.13		
	12	0	19.79	19.73	19.71		
64QAM	12	6	20.38	20.30	20.07	≤ 3	3
	12	13	19.98	19.94	19.86		
	25	0	20.01	19.89	19.79		

Table 9.3.2.3 LTE Conducted Power

LTE Band 5 (Cell) Conducted Power– 3 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			20415 (825.5 MHz)	20525 (836.5 MHz)	20635 (847.5 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	22.72	22.69	22.50	≤ 1	0	
	1	7	23.36	23.21	23.10			
	1	14	23.11	23.06	23.02			
	8	0	21.80	21.74	21.67		1	
	8	4	22.29	22.27	22.05			
	8	7	22.03	22.00	21.78			
16QAM	15	0	21.99	21.98	21.67	≤ 1	1	
	1	0	21.71	21.70	21.51			
	1	7	22.30	22.22	22.07			
	1	14	22.17	22.05	22.02		≤ 2	
	8	0	20.84	20.71	20.66			
	8	4	21.32	21.25	21.10			
64QAM	8	7	21.11	21.10	20.71	≤ 2	2	
	15	0	20.91	20.90	20.70			
	1	0	20.77	20.71	20.53			≤ 2
	1	7	21.30	21.12	21.10			
	1	14	21.14	21.05	21.01		≤ 3	
	8	0	19.89	19.73	19.61			
8	4	20.30	20.27	20.10				
64QAM	8	7	20.09	20.03	19.79	≤ 3	3	
	15	0	20.02	19.96	19.73			

Table 9.3.2.4 LTE Conducted Power

LTE Band 5 (Cell) Conducted Power– 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20407 (824.7 MHz)	20525 (836.5 MHz)	20643 (848.3 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	22.71	22.56	22.40	≤ 1	0
	1	2	23.33	23.16	23.10		
	1	5	23.15	23.10	23.06		
	3	0	21.81	21.69	21.54		0
	3	2	22.28	22.24	22.07		
	3	3	22.00	21.85	21.80		
	6	0	21.98	21.82	21.60		
16QAM	1	0	21.77	21.51	21.43	≤ 1	1
	1	2	22.36	22.15	22.11		
	1	5	22.20	22.04	21.97		
	3	0	20.80	20.63	20.57		1
	3	2	21.22	21.20	21.05		
	3	3	20.91	20.82	20.75		
	6	0	20.99	20.79	20.64		
64QAM	1	0	20.73	20.53	20.38	≤ 2	2
	1	2	21.42	21.09	21.02		
	1	5	21.25	21.01	20.98		
	3	0	19.79	19.61	19.55		2
	3	2	20.26	20.23	20.01		
	3	3	19.93	19.90	19.75		
	6	0	19.90	19.81	19.66		

Table 9.3.2.5 LTE Conducted Power



Band & Mode	Modulated Average[dBm]
LTE Band 4	Maximum
	Nominal

24.30

23.00

**Table 9.3.3.1 Nominal and Maximum Output Power Spec**
**3) LTE Band 4**

Modulation	RB Size	RB Offset	LTE Band 4 (AWS) Conducted Power– 20 MHz Bandwidth		MPR Allowed Per 3GPP(dB)	MPR (dB)
			Mid Channel			
			20175 (1 732.5 MHz)	Conducted Power (dBm)		
QPSK	1	0	23.50	≤ 1	0	
	1	50	23.13			
	1	99	23.00			
	50	0	22.03			
	50	25	21.79			
	50	50	21.51			
16QAM	100	0	21.85	≤ 1	1	
	1	0	22.42			
	1	50	22.13			
	1	99	22.08			
	50	0	21.00			
	50	25	20.77			
64QAM	50	50	20.52	≤ 2	2	
	100	0	20.86			
	1	0	21.40			
	1	50	21.11			
	1	99	20.92			
	50	0	20.00			
64QAM	50	25	19.70	≤ 3	3	
	50	50	19.53			
	100	0	19.85			

**Table 9.3.3.2 LTE Conducted Power**

Note: LTE B4 (AWS) can not contain three non-overlapping channels of 20 MHz bandwidth.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Modulation	RB Size	RB Offset	LTE Band 4 (AWS) Conducted Power– 15 MHz Bandwidth			MPR Allowed Per 3GPP(dB)	MPR (dB)
			Low Channel	Mid Channel	High Channel		
			20025 (1 717.5 MHz)	20175 (1 732.5 MHz)	20325 (1 747.5 MHz)		
QPSK	1	0	23.10	23.11	23.02	≤ 1	0
	1	36	22.88	22.90	22.81		
	1	74	22.67	22.85	22.66		
	36	0	21.84	21.90	21.80		
	36	18	21.51	21.69	21.49		
	36	37	21.30	21.55	21.27		
16QAM	75	0	21.54	21.60	21.48	≤ 1	1
	1	0	22.16	22.17	22.09		
	1	36	21.83	21.93	21.82		
	1	74	21.69	21.88	21.65		
	36	0	20.84	20.91	20.81		
	36	18	20.56	20.68	20.52		
64QAM	36	37	20.31	20.48	20.22	≤ 2	2
	75	0	20.55	20.59	20.46		
	1	0	21.15	21.19	21.11		
	1	36	20.81	20.99	20.80		
	1	74	20.65	20.86	20.64		
	36	0	19.86	19.93	19.83		
64QAM	36	18	19.55	19.66	19.54	≤ 3	3
	36	37	19.38	19.51	19.36		
	75	0	19.53	19.55	19.41		

**Table 9.3.3.3 LTE Conducted Power**

LTE Band 4 (AWS) Conducted Power- 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20000 (1 715.0 MHz)	20175 (1 732.5 MHz)	20350 (1 750.0 MHz)		
Conducted Power (dBm)							
QPSK	1	0	22.98	23.10	22.50	≤ 1	0
	1	25	22.58	22.78	22.24		
	1	49	22.60	22.62	22.15		
	25	0	21.63	21.67	21.53		1
	25	12	21.27	21.35	21.22		
	25	25	21.06	21.15	20.96		
	50	0	21.40	21.50	21.37		
16QAM	1	0	21.96	22.11	21.50	≤ 1	1
	1	25	21.59	21.81	21.26		
	1	49	21.63	21.64	21.07		
	25	0	20.63	20.69	20.61		2
	25	12	20.39	20.44	20.37		
	25	25	20.08	20.25	20.06		
	50	0	20.40	20.51	20.35		
64QAM	1	0	20.97	21.15	20.52	≤ 2	2
	1	25	20.65	20.88	20.12		
	1	49	20.64	20.69	20.00		
	25	0	19.63	19.70	19.60		3
	25	12	19.35	19.36	19.24		
	25	25	19.05	19.22	19.00		
	50	0	19.40	19.53	19.33		

Table 9.3.3.4 LTE Conducted Power

LTE Band 4 (AWS) Conducted Power- 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			19975 (1 712.5 MHz)	20175 (1 732.5 MHz)	20375 (1 752.5 MHz)		
Conducted Power (dBm)							
QPSK	1	0	22.92	23.09	22.64	≤ 1	0
	1	12	22.69	22.85	22.26		
	1	24	22.62	22.69	22.14		
	12	0	21.28	21.33	21.25		1
	12	6	20.96	21.07	20.91		
	12	13	20.76	20.95	20.71		
	25	0	21.12	21.27	20.84		
16QAM	1	0	21.98	22.08	21.61	≤ 1	1
	1	12	21.72	21.75	21.26		
	1	24	21.54	21.59	21.23		
	12	0	20.32	20.39	20.30		2
	12	6	19.94	20.11	19.90		
	12	13	19.70	19.94	19.68		
	25	0	20.11	20.29	19.84		
64QAM	1	0	20.99	21.09	20.67	≤ 2	2
	1	12	20.72	20.77	20.43		
	1	24	20.57	20.73	20.32		
	12	0	19.32	19.36	19.30		3
	12	6	18.96	19.01	18.91		
	12	13	18.75	18.90	18.71		
	25	0	19.19	19.23	18.82		

Table 9.3.3.5 LTE Conducted Power

LTE Band 4 (AWS) Conducted Power- 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			19965 (1 711.5 MHz)	20175 (1 732.5 MHz)	20385 (1 753.5 MHz)		
Conducted Power (dBm)							
QPSK	1	0	22.57	22.65	22.55	≤ 1	0
	1	7	22.25	22.28	22.24		
	1	14	22.21	22.10	22.20		
	8	0	21.04	21.15	21.00		1
	8	4	20.73	20.81	20.62		
	8	7	20.56	20.70	20.55		
	15	0	20.90	20.94	20.88		
16QAM	1	0	21.51	21.66	21.50	≤ 1	1
	1	7	21.12	21.37	21.11		
	1	14	21.07	21.18	21.06		
	8	0	20.13	20.19	20.11		2
	8	4	19.90	19.94	19.66		
	8	7	19.64	19.72	19.60		
	15	0	19.91	19.94	19.86		
64QAM	1	0	20.55	20.61	20.43	≤ 2	2
	1	7	20.23	20.36	20.10		
	1	14	20.15	20.28	20.03		
	8	0	19.12	19.20	19.05		3
	8	4	18.84	18.91	18.70		
	8	7	18.72	18.79	18.59		
	15	0	18.90	18.94	18.88		

Table 9.3.3.6 LTE Conducted Power

TE Band 4 (AWS) Conducted Power- 1.4 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			19957 (1 710.7 MHz)	20175 (1 732.5 MHz)	20393 (1 754.3 MHz)			
Conducted Power (dBm)								
QPSK	1	0	22.06	22.33	21.96	≤ 1	0	
	1	2	21.78	22.03	21.74			
	1	5	21.70	22.00	21.71			
	3	0	21.80	21.90	21.77		≤ 1	0
	3	2	21.45	21.67	21.40			
	3	3	21.27	21.47	21.26			
	6	0	21.42	21.45	21.40			1
16QAM	1	0	21.02	21.28	20.99	≤ 1	1	
	1	2	20.67	20.99	20.61			
	1	5	20.51	20.92	20.60			
	3	0	20.89	20.91	20.81		≤ 1	1
	3	2	20.50	20.68	20.44			
	3	3	20.31	20.39	20.30			
	6	0	20.44	20.48	20.40			2
64QAM	1	0	20.05	20.24	19.98	≤ 2	2	
	1	2	19.77	19.95	19.63			
	1	5	19.76	19.86	19.60			
	3	0	19.88	20.05	19.86		≤ 2	2
	3	2	19.59	19.75	19.51			
	3	3	19.39	19.50	19.37			
	6	0	19.41	19.45	19.39			3

Table 9.3.3.7 LTE Conducted Power

Band & Mode	Modulated Average[dBm]	
	LTE Band 2(PCS)	Maximum
	Nominal	23.00

Table 9.3.4.1 Nominal and Maximum Output Power Spec

#### 4) LTE Band 2 (PCS)

Modulation	RB Size	RB Offset	LTE Band 2 (PCS) Conducted Power– 20 MHz Bandwidth			MPR Allowed Per 3GPP(dB)	MPR (dB)	
			Low Channel	Mid Channel	High Channel			
			18700 (1 860.0 MHz)	18900 (1 880.0 MHz)	19100 (1 900.0 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	22.63	22.59	22.00	≤ 1	0	
	1	50	23.59	23.53	23.46			
	1	99	22.73	22.72	22.16			
	50	0	22.13	22.16	21.91		1	
	50	25	22.46	22.44	22.20			
	50	50	22.23	22.17	21.99			
	100	0	21.90	21.03	20.96			
16QAM	1	0	21.72	21.68	21.19	≤ 1	1	
	1	50	22.56	22.50	22.45			
	1	99	21.80	21.79	21.27			
	50	0	21.11	21.10	20.95		≤ 2	2
	50	25	21.49	21.45	21.29			
	50	50	21.17	21.19	21.01			
	100	0	20.93	20.11	20.00			
64QAM	1	0	20.77	20.74	20.12	≤ 2	2	
	1	50	21.52	21.47	21.39			
	1	99	20.83	20.80	20.24			
	50	0	20.18	20.14	19.86		≤ 3	3
	50	25	20.55	20.51	20.27			
	50	50	20.33	20.20	19.88			
	100	0	20.01	19.15	19.11			

Table 9.3.4.2 LTE Conducted Power

Modulation	RB Size	RB Offset	LTE Band 2 (PCS) Conducted Power– 15 MHz Bandwidth			MPR Allowed Per 3GPP(dB)	MPR (dB)	
			Low Channel	Mid Channel	High Channel			
			18675 (1 857.5 MHz)	18900 (1 880.0 MHz)	19125 (1 902.5 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	22.95	22.73	22.76	≤ 1	0	
	1	36	23.37	23.16	23.10			
	1	74	23.01	22.93	22.90			
	36	0	22.07	21.68	21.50		1	
	36	18	22.40	22.10	22.05			
	36	37	22.18	21.75	21.80			
	75	0	21.76	20.78	20.86			
16QAM	1	0	21.83	21.82	21.72	≤ 1	1	
	1	36	22.25	22.11	22.10			
	1	74	21.90	21.95	21.90			
	36	0	20.98	20.76	20.59		≤ 2	2
	36	18	21.38	21.11	21.09			
	36	37	21.00	20.87	20.81			
	75	0	20.83	19.87	19.93			
64QAM	1	0	20.92	20.91	20.75	≤ 2	2	
	1	36	21.19	21.15	21.05			
	1	74	20.98	20.99	20.91			
	36	0	19.94	19.67	19.54		≤ 3	3
	36	18	20.45	20.15	20.19			
	36	37	20.12	19.80	19.87			
	75	0	19.85	18.92	19.01			

Table 9.3.4.3 LTE Conducted Power

Modulation	RB Size	RB Offset	LTE Band 2 (PCS) Conducted Power– 10 MHz Bandwidth			MPR Allowed Per 3GPP(dB)	MPR (dB)	
			Low Channel	Mid Channel	High Channel			
			18650 (1 855.0 MHz)	18900 (1 880.0 MHz)	19150 (1 905.0 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	22.98	22.84	22.75	≤ 1	0	
	1	25	23.26	23.16	23.12			
	1	49	23.12	22.92	22.85			
	25	0	21.98	22.00	21.78		1	
	25	12	22.32	22.30	22.25			
	25	25	22.06	22.03	21.93			
	50	0	21.83	20.77	20.99			
16QAM	1	0	21.99	21.85	21.82	≤ 1	1	
	1	25	22.28	22.18	22.15			
	1	49	22.22	21.95	21.86			
	25	0	20.95	20.85	20.77		≤ 2	2
	25	12	21.31	21.30	21.29			
	25	25	21.07	21.02	20.97			
	50	0	20.79	19.78	20.05			
64QAM	1	0	21.03	20.85	20.65	≤ 2	2	
	1	25	21.26	21.14	21.10			
	1	49	21.20	20.98	20.80			
	25	0	19.97	19.91	19.81		≤ 3	3
	25	12	20.33	20.28	20.26			
	25	25	20.03	19.97	20.01			
	50	0	19.79	18.77	19.04			

Table 9.3.4.4 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power- 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18625 (1 852.5 MHz)	18900 (1 880.0 MHz)	19175 (1 907.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.16	22.81	21.68	≤ 1	0
	1	12	23.44	23.20	23.07		
	1	24	23.24	22.93	22.78		
	12	0	21.75	21.78	21.70		1
	12	6	22.07	22.04	22.00		
	12	13	21.78	21.83	21.76		
	25	0	21.60	20.78	21.09		
16QAM	1	0	22.11	21.88	20.66	≤ 1	1
	1	12	22.40	22.28	22.19		
	1	24	22.19	21.99	21.74		
	12	0	20.70	20.63	20.60		≤ 2
	12	6	21.04	21.01	21.00		
	12	13	20.83	20.68	20.68		
	25	0	20.49	19.74	20.06		
64QAM	1	0	21.09	20.88	19.59	≤ 2	2
	1	12	21.43	21.22	21.25		
	1	24	21.19	20.91	20.73		
	12	0	19.60	19.69	19.60		≤ 3
	12	6	20.08	20.05	20.02		
	12	13	19.71	19.76	19.62		
	25	0	19.52	18.76	19.09		

Table 9.3.4.5 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power- 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18615 (1 851.5 MHz)	18900 (1 880.0 MHz)	19185 (1 908.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	22.74	22.77	22.57	≤ 1	0
	1	7	23.56	23.53	23.49		
	1	14	22.83	22.80	22.61		
	8	0	21.84	21.78	21.73		1
	8	4	22.19	22.10	22.06		
	8	7	21.96	21.84	21.74		
	15	0	21.32	20.71	20.75		
16QAM	1	0	21.73	21.76	21.51	≤ 1	1
	1	7	22.55	22.51	22.46		
	1	14	21.84	21.81	21.67		
	8	0	20.69	20.85	20.65		≤ 2
	8	4	21.20	21.16	21.05		
	8	7	20.86	20.87	20.69		
	15	0	20.26	19.71	19.78		
64QAM	1	0	20.67	20.60	20.60	≤ 2	2
	1	7	21.53	21.50	21.45		
	1	14	20.80	20.79	20.64		
	8	0	19.69	19.82	19.66		≤ 3
	8	4	20.20	20.15	20.10		
	8	7	19.88	19.92	19.83		
	15	0	19.24	18.70	18.82		

Table 9.3.4.6 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power- 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18607 (1 850.7 MHz)	18900 (1 880.0 MHz)	19193 (1 909.3 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	22.81	22.85	22.50	≤ 1	0
	1	2	23.39	23.19	23.07		
	1	5	23.00	22.95	22.64		
	3	0	22.07	21.91	21.99		0
	3	2	22.44	22.39	22.36		
	3	3	22.20	22.03	22.07		
	6	0	21.29	20.86	20.65		
16QAM	1	0	21.93	21.80	21.59	≤ 1	1
	1	2	22.33	22.15	22.06		
	1	5	21.99	21.91	21.69		
	3	0	20.93	20.96	20.88		1
	3	2	21.40	21.35	21.31		
	3	3	21.06	21.07	20.91		
	6	0	20.26	19.81	19.71		
64QAM	1	0	20.81	20.88	20.63	≤ 2	2
	1	2	21.31	21.16	21.06		
	1	5	20.94	20.90	20.66		
	3	0	20.09	19.82	19.94		2
	3	2	20.41	20.22	20.21		
	3	3	20.16	19.96	20.00		
	6	0	19.22	18.74	18.63		

Table 9.3.4.7 LTE Conducted Power

Band & Mode		Modulated Average[dBm]
LTE Band 41	Maximum	24.8
	Nominal	23.5

Table 9.3.5.1 Nominal and Maximum Output Power Spec

## 5) LTE Band 41

LTE Band 41 Conducted Power– 20 MHz Bandwidth											
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)		
			39750 (2 506.0 MHz)	40185 (2 549.5 MHz)	40620 (2 593.0 MHz)	41055 (2 636.5 MHz)	41490 (2 680.0 MHz)				
Conducted Power (dBm)											
QPSK	1	0	22.50	22.42	22.38	22.35	22.32	≤ 1	0		
	1	50	22.20	22.14	22.02	22.01	21.90		1		
	1	99	22.27	22.22	22.16	22.11	22.02				
	50	0	21.46	21.40	21.35	21.34	21.32				
	50	25	21.03	20.89	20.88	20.81	20.80				
	50	50	21.30	21.22	21.15	21.14	21.10				
16QAM	100	0	21.15	21.09	20.99	20.91	20.88	≤ 1		1	
	1	0	21.45	21.43	21.37	21.31	21.30		≤ 2	2	
	1	50	21.18	21.11	21.02	20.97	20.94				
	1	99	21.26	21.23	21.17	21.15	21.09				
	50	0	20.41	20.37	20.35	20.31	20.22				
	50	25	19.90	19.88	19.81	19.80	19.71				
64QAM	50	50	20.31	20.23	20.18	20.13	20.10	≤ 2			2
	100	0	20.09	20.05	19.98	19.96	19.83				
	1	0	20.49	20.44	20.42	20.36	20.35		≤ 2	2	
	1	50	20.14	20.10	20.06	20.02	19.98				
	1	99	20.21	20.19	20.12	20.10	20.06				
	50	0	19.38	19.36	19.33	19.31	19.29				
50	25	19.01	18.88	18.78	18.71	18.69					
64QAM	50	50	19.33	19.30	19.28	19.26	19.17	≤ 3			3
	100	0	19.09	19.05	18.99	18.93	18.80				

Table 9.3.5.2 LTE Conducted Power

LTE Band 41 Conducted Power– 15 MHz Bandwidth											
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)		
			39725 (2 503.5 MHz)	40173 (2 548.3 MHz)	40620 (2 593.0 MHz)	41068 (2 637.8 MHz)	41515 (2 682.5 MHz)				
Conducted Power (dBm)											
QPSK	1	0	22.42	22.38	22.35	22.33	22.26	≤ 1	0		
	1	36	22.15	22.14	22.03	21.97	21.85		1		
	1	74	22.27	22.15	22.07	22.03	22.00				
	36	0	21.45	21.43	21.39	21.31	21.28				
	36	18	20.87	20.72	20.69	20.55	20.53				
	36	37	21.33	21.28	21.22	21.13	21.08				
16QAM	75	0	20.80	20.78	20.66	20.61	20.59	≤ 1		1	
	1	0	21.45	21.39	21.30	21.25	21.21		≤ 2	2	
	1	36	21.10	21.05	21.02	20.95	20.91				
	1	74	21.25	21.15	21.09	21.02	21.00				
	36	0	20.45	20.41	20.39	20.33	20.26				
	36	18	19.88	19.77	19.66	19.53	19.50				
64QAM	36	37	20.30	20.22	20.19	20.17	20.04	≤ 2			2
	75	0	19.83	19.77	19.68	19.60	19.57				
	1	0	20.40	20.34	20.33	20.26	20.19		≤ 2	2	
	1	36	20.14	20.05	20.04	19.99	19.91				
	1	74	20.19	20.10	20.05	20.00	19.95				
	36	0	19.41	19.40	19.35	19.28	19.25				
36	18	18.86	18.75	18.65	18.57	18.49					
64QAM	36	37	19.34	19.29	19.23	19.15	19.02	≤ 3			3
	75	0	18.83	18.76	18.67	18.63	18.57				

Table 9.3.5.3 LTE Conducted Power

LTE Band 41 Conducted Power– 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			39700 (2 501.0 MHz)	40160 (2 547.0 MHz)	40620 (2 593.0 MHz)	41080 (2 639.0 MHz)	41540 (2 685.0 MHz)		
Conducted Power (dBm)									
QPSK	1	0	22.47	22.39	22.36	22.25	22.21	≤ 1	0
	1	25	22.10	22.00	21.93	21.85	21.83		
	1	49	22.11	22.02	22.00	21.91	21.90		
	25	0	21.34	21.30	21.28	21.21	21.18		1
	25	12	20.96	20.91	20.84	20.71	20.70		
	25	25	21.20	21.14	21.11	21.09	21.05		
16QAM	50	0	21.06	20.98	20.92	20.79	20.76	≤ 1	1
	1	0	21.41	21.37	21.33	21.22	21.20		
	1	25	21.15	21.01	20.95	20.82	20.81		
	1	49	21.16	21.06	21.04	20.95	20.94		≤ 2
	25	0	20.39	20.31	20.30	20.17	20.06		
	25	12	19.99	19.92	19.88	19.69	19.66		
64QAM	25	25	20.21	20.17	20.13	20.09	19.93	≤ 2	2
	50	0	20.05	19.96	19.93	19.77	19.76		
	1	0	20.40	20.39	20.39	20.18	20.15		
	1	25	20.11	20.01	19.97	19.82	19.80		≤ 3
	1	49	20.13	20.05	20.00	19.95	19.94		
	25	0	19.30	19.26	19.22	19.20	19.15		
64QAM	25	12	18.92	18.88	18.86	18.68	18.61	≤ 3	3
	25	25	19.25	19.14	19.12	19.03	18.99		
	50	0	19.01	18.92	18.90	18.79	18.72		

Table 9.3.5.4 LTE Conducted Power

LTE Band 41 Conducted Power– 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			39675 (2 498.5 MHz)	40148 (2 545.8 MHz)	40620 (2 593.0 MHz)	41093 (2 640.3 MHz)	41565 (2 687.5 MHz)		
Conducted Power (dBm)									
QPSK	1	0	22.37	22.35	22.28	22.16	22.10	≤ 1	0
	1	12	21.98	21.95	21.87	21.80	21.77		
	1	24	22.15	22.12	22.05	21.94	21.86		
	12	0	21.39	21.33	21.28	21.13	21.11		1
	12	6	20.71	20.68	20.66	20.57	20.42		
	12	13	21.14	21.10	20.92	20.85	20.66		
16QAM	25	0	20.77	20.74	20.65	20.50	20.47	≤ 1	1
	1	0	21.36	21.34	21.24	21.15	21.14		
	1	12	21.07	20.92	20.82	20.78	20.80		
	1	24	21.17	21.12	21.01	20.94	20.87		≤ 2
	12	0	20.33	20.26	20.25	20.10	20.05		
	12	6	19.72	19.66	19.64	19.56	19.43		
64QAM	12	13	20.15	20.11	19.96	19.88	19.60	≤ 2	2
	25	0	19.78	19.70	19.64	19.44	19.43		
	1	0	20.35	20.26	20.25	20.18	20.14		
	1	12	20.00	19.97	19.89	19.84	19.77		≤ 3
	1	24	20.13	20.08	20.05	19.91	19.85		
	12	0	19.36	19.26	19.22	19.18	19.15		
64QAM	12	6	18.71	18.67	18.65	18.55	18.47	≤ 3	3
	12	13	19.11	19.05	18.91	18.87	18.65		
	25	0	18.77	18.66	18.61	18.45	18.44		

Table 9.3.5.5 LTE Conducted Power

### 9.4 WLAN Nominal and Maximum Output Power Spec and Conducted Powers

Band (GHz)	Mode	Ch	Modulated Average[dBm]	
			Maximum	Nominal
2.4	802.11b	1	16.0	13.0
		6	16.0	13.0
		11	16.0	13.0
	802.11g	1	15.0	12.0
		6	15.0	12.0
		11	15.0	12.0
	802.11n (HT-20)	1	15.0	12.0
		6	15.0	12.0
		11	15.0	12.0
	802.11ac (VHT-20)	1	15.0	12.0
		6	15.0	12.0
		11	15.0	12.0

Table 9.4.1 Nominal and Maximum Output Power Spec

Mode	Freq. (MHz)	Channel	IEEE 802.11 (2.4 GHz) Conducted Power[dBm]
802.11b	2 412	1	14.52
	2 437	6	14.55
	2 462	11	14.30
802.11g	2 412	1	14.19
	2 437	6	13.69
	2 462	11	13.87
802.11n (HT-20)	2 412	1	13.49
	2 437	6	13.69
	2 462	11	13.67
802.11n (HT-40)	2 422	3	13.94
	2 437	6	13.66
	2 452	9	13.67

Table 9.4.2 IEEE 802.11 Average RF Power



Band (GHz)	Mode	Ch	Modulated Average[dBm]	
			Maximum	Nominal
5 (UNII)	802.11a	36-144	16.0	13.0
	802.11n/ac (20MHz)	36-144	16.0	13.0
	802.11n/ac (40MHz)	38-142	16.0	13.0
	802.11ac (80MHz)	42-138	16.0	13.0

Table 9.4.3 Nominal and Maximum Output Power Spec

Mode	Freq. (MHz)	Channel	IEEE 802.11a (5 GHz) Conducted Power[dBm]	
			Maximum	Nominal
802.11a	5 180	36	14.21	
	5 200	40	14.57	
	5 220	44	14.10	
	5 240	48	14.02	
	5 260	52	14.49	
	5 280	56	14.39	
	5 300	60	14.33	
	5 320	64	14.23	
	5 500	100	15.05	
	5 580	116	14.75	
	5 660	132	14.02	
	5 700	140	14.13	
	5 720	144	14.11	

Table 9.4.4 IEEE 802.11a Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11n HT20 (5 GHz) Conducted Power[dBm]	
			Maximum	Nominal
802.11n (HT-20)	5 180	36	14.59	
	5 200	40	14.07	
	5 220	44	14.01	
	5 240	48	14.03	
	5 260	52	14.28	
	5 280	56	14.26	
	5 300	60	14.14	
	5 320	64	14.05	
	5 500	100	14.92	
	5 580	116	14.56	
	5 660	132	14.04	
	5 700	140	14.04	
	5 720	144	14.03	

Table 9.4.5 IEEE 802.11n HT20 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11ac VHT20 (5 GHz) Conducted Power[dBm]	
			Maximum	Nominal
802.11ac (VHT-20)	5 180	36	14.02	
	5 200	40	14.44	
	5 220	44	14.30	
	5 240	48	14.28	
	5 260	52	14.72	
	5 280	56	14.76	
	5 300	60	14.67	
	5 320	64	14.49	
	5 500	100	15.33	
	5 580	116	15.01	
	5 660	132	14.34	
	5 700	140	14.45	
	5 720	144	14.01	

Table 9.4.6 IEEE 802.11ac VHT20 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11n HT40 (5 GHz) Conducted Power[dBm]
802.11n (HT-40)	5 190	38	14.00
	5 230	46	14.06
	5 270	54	14.30
	5 310	62	14.22
	5 510	102	14.87
	5 550	110	14.80
	5 670	134	14.02
	5 710	142	14.07

Table 9.4.7 IEEE 802.11n HT40 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11ac VHT40 (5 GHz) Conducted Power[dBm]
802.11ac (VHT-40)	5 190	38	14.62
	5 230	46	14.42
	5 270	54	14.75
	5 310	62	14.19
	5 510	102	15.45
	5 550	110	14.91
	5 670	134	14.02
	5 710	142	14.04

Table 9.4.8 IEEE 802.11ac VHT40 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11ac VHT80 (5 GHz) Conducted Power[dBm]
802.11ac (VHT-80)	5 210	42	14.41
	<u>5 290</u>	<u>58</u>	<u>14.78</u>
	5 530	106	14.91
	<u>5 610</u>	<u>122</u>	<u>15.31</u>
	5 690	138	14.06

Table 9.4.9 IEEE 802.11ac VHT80 Average RF Power

Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, duo to an even number of channels, both channels were measured.
- Output Power and SAR is not required for 802.11 g/n HT20/ac VHT20 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjust SAR is  $\leq 1.2$  W/kg.
- The underlined data rate and channel above were tested for SAR.

The average output powers of this device were tested by below configuration.




Figure 9.4 Power Measurement Setup

9.5 Bluetooth Conducted Powers

Channel	Frequency	Burst AVG Output Power (1Mbps)	Frame AVG Output Power (1Mbps)	Burst AVG Output Power (2Mbps)	Frame AVG Output Power (2Mbps)	Burst AVG Output Power (3Mbps)	Frame AVG Output Power (3Mbps)
	(MHz)	(dBm)		(dBm)		(dBm)	
Low	2 402	14.3	13.15	11.4	10.25	11.4	10.25
Mid	2 441	14.3	13.15	11.4	10.25	11.4	10.25
High	2 480	14.3	13.15	11.4	10.25	11.4	10.25

Table 9.5.1 Nominal and Maximum Output Power Spec (Burst & Frame)

Channel	Frequency	Burst AVG Output Power (1Mbps)	Frame AVG Output Power (1Mbps)	Burst AVG Output Power (2Mbps)	Frame AVG Output Power (2Mbps)	Burst AVG Output Power (3Mbps)	Frame AVG Output Power (3Mbps)
	(MHz)	(dBm)		(dBm)		(dBm)	
Low	2 402	8.23	7.08	4.93	3.78	5.09	3.94
Mid	2 441	11.36	10.21	8.40	7.25	8.56	7.41
High	2 480	10.39	9.24	7.29	6.14	7.46	6.31

Table 9.5.2 Bluetooth Burst and Frame Average RF Power

Channel	Frequency	Burst AVG Output Power(LE / 1Mbps)	Frame AVG Output Power(LE / 1Mbps)	Burst AVG Output Power(LE / 2Mbps)	Frame AVG Output Power(LE / 2Mbps)
	(MHz)	(dBm)		(dBm)	
Low	2 402	9.7	9.00	9.7	7.27
Mid	2 440	9.7	9.00	9.7	7.27
High	2 480	9.7	9.00	9.7	7.27

Table 9.5.3 Nominal and Maximum Output Power Spec (Burst & Frame)

Channel	Frequency	Burst AVG Output Power(LE / 1Mbps)	Frame AVG Output Power(LE / 1Mbps)	Burst AVG Output Power(LE / 2Mbps)	Frame AVG Output Power(LE / 2Mbps)
	(MHz)	(dBm)		(dBm)	
Low	2 402	5.57	4.87	5.65	3.22
Mid	2 440	6.54	5.84	6.54	4.11
High	2 480	5.93	5.23	6.09	3.66

Table 9.5.4 Bluetooth LE Burst and Frame Average RF Power

Bluetooth Conducted Powers procedures

1. Bluetooth (BDR, EDR)
  - 1) Enter DUT mode in EUT and operate it.  
When it operating, The EUT is transmitting at maximum power level and duty cycle fixed.
  - 2) Instruments and EUT were connected like Figure 9.5.1.
  - 3) The maximum output powers of BDR(1 Mbps), EDR(2, 3 Mbps) and each frequency were set by a Bluetooth Tester.
  - 4) Power levels were measured by a Power Meter.




Figure 9.5.1 Average Power Measurement Setup

● Bluetooth Transmission Plot



Figure 9.5.2 Bluetooth Transmission Plot

● Bluetooth Duty Cycle Calculation

$$\text{Duty Cycle} = \text{Pulse/Period} * 100\% = (2.880/3.750) * 100 = 76.8\%$$

# 10. SYSTEM VERIFICATION

## 10.1 Tissue Verification

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp. [°C]	Liquid Temp. [°C]	Measured Frequency [MHz]	Target Dielectric Constant, $\epsilon_r$	Target Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon_r$	Measured Conductivity, $\sigma$ (S/m)	Er Deviation [%]	$\sigma$ Deviation [%]
May. 27. 2024	13 Head	20.1	20.0	13.0	55.000	0.750	54.420	0.725	-1.05	-3.33
				13.6	55.000	0.750	54.390	0.730	-1.11	-2.67
May. 17. 2024	750 Head	20.6	20.5	707.5	42.129	0.887	40.667	0.909	-3.47	2.48
				750.0	41.900	0.890	40.534	0.918	-3.26	3.15
May. 15. 2024	835 Head	20.4	20.3	829.0	41.528	0.899	40.031	0.910	-3.60	1.22
				835.0	41.500	0.900	40.020	0.912	-3.57	1.33
				836.5	41.500	0.901	40.013	0.913	-3.58	1.33
				844.0	41.500	0.910	40.005	0.915	-3.60	0.55
May. 16. 2024	835 Head	20.5	20.4	824.2	41.552	0.899	39.926	0.924	-3.91	2.78
				826.4	41.542	0.899	39.921	0.924	-3.90	2.78
				835.0	41.500	0.900	39.904	0.927	-3.85	3.00
				836.6	41.500	0.901	39.903	0.928	-3.85	3.00
				846.6	41.500	0.912	39.878	0.931	-3.91	2.08
				848.8	41.500	0.914	39.874	0.931	-3.92	1.86
May. 19. 2024	1 800 Head	20.7	20.6	1 712.4	40.126	1.350	39.519	1.345	-1.51	-0.37
				1 720.0	40.114	1.354	39.511	1.348	-1.50	-0.44
				1 732.4	40.097	1.361	39.507	1.354	-1.47	-0.51
				1 732.5	40.097	1.361	39.506	1.354	-1.47	-0.51
				1 745.0	40.079	1.369	39.503	1.361	-1.44	-0.58
				1 752.6	40.069	1.373	39.503	1.365	-1.41	-0.58
				1 770.0	40.043	1.383	39.494	1.375	-1.37	-0.58
				1 800.0	40.000	1.400	39.473	1.393	-1.32	-0.50
May. 20. 2024	1 900 Head	20.9	20.8	1 850.2	40.000	1.400	39.434	1.398	-1.42	-0.14
				1 852.4	40.000	1.400	39.431	1.399	-1.42	-0.07
				1 860.0	40.000	1.400	39.424	1.403	-1.44	0.21
				1 880.0	40.000	1.400	39.410	1.414	-1.48	1.00
				1 900.0	40.000	1.400	39.390	1.426	-1.53	1.86
				1 907.6	40.000	1.400	39.385	1.430	-1.54	2.14
				1 909.8	40.000	1.400	39.382	1.431	-1.55	2.21
				2402.0	39.282	1.757	38.172	1.722	-2.83	-1.99
May. 21. 2024	2 450 Head	20.4	20.3	2412.0	39.265	1.766	38.164	1.731	-2.80	-1.98
				2437.0	39.222	1.788	38.142	1.749	-2.75	-2.18
				2441.0	39.215	1.792	38.139	1.752	-2.74	-2.23
				2450.0	39.200	1.800	38.134	1.760	-2.72	-2.22
				2462.0	39.184	1.813	38.129	1.769	-2.69	-2.43
				2472.0	39.171	1.823	38.120	1.776	-2.68	-2.58
				2480.0	39.160	1.832	38.113	1.785	-2.67	-2.57
				2 506.0	39.130	1.860	38.420	1.845	0.74	-0.81
May. 22. 2024	2 600 Head	20.3	20.2	2 510.0	39.120	1.864	39.416	1.848	0.76	-0.86
				2 535.0	39.087	1.891	39.392	1.867	0.78	-1.27
				2 549.5	39.068	1.906	39.373	1.878	0.78	-1.47
				2 560.0	39.053	1.917	39.364	1.886	0.80	-1.62
				2 593.0	39.010	1.953	39.332	1.911	0.83	-2.15
				2 600.0	39.000	1.960	39.324	1.917	0.83	-2.19
				2 636.5	38.960	2.000	39.287	1.945	0.84	-2.75
				2 680.0	38.900	2.048	39.238	1.980	0.87	-3.32
May. 23. 2024	5 300 Head	20.5	20.4	5 210.0	35.990	4.670	35.226	4.791	-2.12	2.59
				5 290.0	35.910	4.750	35.054	4.893	-2.38	3.01
				5 300.0	35.900	4.760	35.025	4.906	-2.44	3.07
May. 24. 2024	5 600 Head	20.4	20.3	5 500.0	35.650	4.965	36.791	5.134	3.20	3.40
				5 530.0	35.605	4.997	36.743	5.164	3.20	3.34
				5 600.0	35.500	5.070	36.634	5.241	3.19	3.37
				5 610.0	35.490	5.080	36.628	5.251	3.21	3.37
				5 690.0	35.410	5.160	36.488	5.333	3.04	3.35
				5 800.0	35.300	5.270	36.320	5.449	2.89	3.40

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB 865664 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

**Measurement Procedure for Tissue verification:**

- 1) The network analyzer and probe system was configured and calibrated.
- 2) The probe was immersed in the sample which was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured
- 4) The complex relative permittivity , for example from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\epsilon_r\epsilon_0}{[\ln(b/a)]^2} \int_a^b \int_a^b \int_0^\pi \cos\phi' \frac{\exp[-j\omega r(\mu_0\epsilon_r'\epsilon_0)^{1/2}]}{r} d\phi' d\rho' d\rho$$

where Y is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively,  $r^2 = \rho^2 + \rho'^2 - 2\rho\rho'\cos\phi'$ ,  $\omega$  is the angular frequency, and  $j = \sqrt{-1}$ .

## 10.2 Test System Verification

Prior to assessment, the system is verified to the  $\pm 10\%$  of the specifications at using the SAR Dipole kit(s). (Graphic Plots Attached)


**Table 10.2.1 System Verification Results (1g)**

SYSTEM DIPOLE VERIFICATION TARGET & MEASURED												
SAR System #	Freq. [MHz]	SAR Dipole kits	Date(s)	Tissue Type	Ambient Temp. [°C]	Liquid Temp. [°C]	Probe S/N	Input Power (mW)	1 W Target SAR <sub>1g</sub> (W/kg)	Measured SAR <sub>1g</sub> (W/kg)	1 W Normalized SAR <sub>1g</sub> (W/kg)	Deviation [%]
D	750	D750V3, SN:1049	May. 17. 2024	Head	20.6	20.5	3933	250	8.48	2.18	8.72	2.83
D	835	D835V2, SN:4d159	May. 15. 2024	Head	20.4	20.3	3933	250	9.86	2.37	9.48	-3.85
D	835	D835V2, SN:4d159	May. 16. 2024	Head	20.5	20.4	3933	250	9.86	2.39	9.56	-3.04
D	1 800	D1800V2, SN:2d202	May. 19. 2024	Head	20.7	20.6	3933	100	38.7	3.97	39.7	2.58
D	1 900	D1900V2, SN:5d176	May. 20. 2024	Head	20.9	20.8	3933	100	40.0	4.20	42.0	5.00
D	2 450	D2450V2, SN: 726	May. 21. 2024	Head	20.4	20.3	3933	100	52.7	5.46	54.6	3.61
D	2 600	D2600V2, SN: 1103	May. 22. 2024	Head	20.3	20.2	3933	100	56.2	5.74	57.4	2.14
D	5 300	D5GHZV2, SN:1212	May. 23. 2024	Head	20.5	20.4	3933	100	79.9	8.07	80.7	1.00
D	5 600	D5GHZV2, SN:1212	May. 24. 2024	Head	20.4	20.3	3933	100	84.4	8.25	82.5	-2.25

**Table 10.2.2 System Verification Results (10g)**

SYSTEM DIPOLE VERIFICATION TARGET & MEASURED												
SAR System #	Freq. [MHz]	SAR Dipole kits	Date(s)	Tissue Type	Ambient Temp. [°C]	Liquid Temp. [°C]	Probe S/N	Input Power (mW)	1 W Target SAR <sub>10g</sub> (W/kg)	Measured SAR <sub>10g</sub> (W/kg)	1 W Normalized SAR <sub>10g</sub> (W/kg)	Deviation [%]
D	13	CLA13, SN:1030	May. 27. 2024	Head	20.1	20.0	3933	250	0.324	0.081	0.324	0.00
D	2 450	D2450V2, SN: 726	May. 21. 2024	Head	20.4	20.3	3933	100	24.8	2.61	26.1	5.24
D	2 600	D2600V2, SN: 1103	May. 22. 2024	Head	20.3	20.2	3933	100	25.4	2.61	26.1	2.76
D	5 300	D5GHZV2, SN:1212	May. 23. 2024	Head	20.5	20.4	3933	100	22.8	2.34	23.4	2.63
D	5 600	D5GHZV2, SN:1212	May. 24. 2024	Head	20.4	20.3	3933	100	24.0	2.39	23.9	-0.42

Note(s):  
 1. System Verification was measured with input 250 mW, 100 mW and normalized to 1W.  
 2. Full system validation status and results can be found in Appendix D.



**Figure 10.1 Dipole Verification Test Setup Diagram & Photo**

# 11. SAR TEST RESULTS

## 11.1 Head SAR Results

**Table 11.1.1 GSM/GPRS 850 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
836.6	190	GSM850	GSM	33.90	33.20	0.010	Left Touch	FCC #1	1	1:8.3	0.285	1.175	0.335	A1
836.6	190	GSM850	GSM	33.90	33.20	0.180	Right Touch	FCC #1	1	1:8.3	0.269	1.175	0.316	
836.6	190	GSM850	GSM	33.90	33.20	0.170	Left Tilt	FCC #1	1	1:8.3	0.150	1.175	0.176	
836.6	190	GSM850	GSM	33.90	33.20	0.110	Right Tilt	FCC #1	1	1:8.3	0.121	1.175	0.142	
836.6	190	GSM850	GPRS	27.90	27.76	-0.070	Left Touch	FCC #1	4	1:2.075	0.299	1.033	0.309	A2
836.6	190	GSM850	GPRS	27.90	27.76	-0.050	Right Touch	FCC #1	4	1:2.075	0.291	1.033	0.301	
836.6	190	GSM850	GPRS	27.90	27.76	0.120	Left Tilt	FCC #1	4	1:2.075	0.159	1.033	0.164	
836.6	190	GSM850	GPRS	27.90	27.76	0.100	Right Tilt	FCC #1	4	1:2.075	0.128	1.033	0.132	
836.6	190	GSM850	GSM	33.90	33.20	0.000	Left Touch	FCC #1	4	1:8.3	0.284	1.175	0.334	
836.6	190	GSM850	GSM	33.90	33.20	0.140	Left Touch	FCC #1	4	1:8.3	0.244	1.175	0.287	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram			

Note(s):  
 1. Purple entries represent EB1190 (NFC are not supported.) measurements.  
 2. Blue entries represent EB1190NC (NFC and Camera are not supported.) measurements.

**Table 11.1.2 PCS/GPRS 1900 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
1880.0	661	PCS1900	PCS	30.90	28.96	0.180	Left Touch	FCC #1	1	1:8.3	0.221	1.563	0.345	A3
1880.0	661	PCS1900	PCS	30.90	28.96	0.000	Right Touch	FCC #1	1	1:8.3	0.131	1.563	0.205	
1880.0	661	PCS1900	PCS	30.90	28.96	0.120	Left Tilt	FCC #1	1	1:8.3	0.063	1.563	0.098	
1880.0	661	PCS1900	PCS	30.90	28.96	0.000	Right Tilt	FCC #1	1	1:8.3	0.056	1.563	0.088	
1880.0	661	PCS1900	GPRS	24.90	23.33	0.160	Left Touch	FCC #1	4	1:2.075	0.280	1.435	0.402	A4
1880.0	661	PCS1900	GPRS	24.90	23.33	0.000	Right Touch	FCC #1	4	1:2.075	0.152	1.435	0.218	
1880.0	661	PCS1900	GPRS	24.90	23.33	0.160	Left Tilt	FCC #1	4	1:2.075	0.062	1.435	0.089	
1880.0	661	PCS1900	GPRS	24.90	23.33	0.000	Right Tilt	FCC #1	4	1:2.075	0.054	1.435	0.077	
1880.0	661	PCS1900	GPRS	24.90	23.33	0.120	Left Touch	FCC #1	4	1:2.075	0.253	1.435	0.363	
1880.0	661	PCS1900	GPRS	24.90	23.33	0.150	Left Touch	FCC #1	4	1:2.075	0.212	1.435	0.304	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram			

Note(s):  
 1. Purple entries represent EB1190 (NFC are not supported.) measurements.  
 2. Blue entries represent EB1190NC (NFC and Camera are not supported.) measurements.

**Table 11.1.3 WCDMA 850 Head SAR**

MEASUREMENT RESULTS													
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch												
836.6	4183	WCDMA 850	RMC	24.30	22.09	-0.110	Left Touch	FCC #1	1:1	0.140	1.663	0.233	
836.6	4183	WCDMA 850	RMC	24.30	22.09	-0.120	Right Touch	FCC #1	1:1	0.265	1.663	0.441	A5
836.6	4183	WCDMA 850	RMC	24.30	22.09	-0.000	Left Tilt	FCC #1	1:1	0.082	1.663	0.136	
836.6	4183	WCDMA 850	RMC	24.30	22.09	0.160	Right Tilt	FCC #1	1:1	0.090	1.663	0.150	
836.6	4183	WCDMA 850	RMC	24.30	22.09	-0.110	Right Touch	FCC #1	1:1	0.250	1.663	0.416	
836.6	4183	WCDMA 850	RMC	24.30	22.09	0.060	Right Touch	FCC #1	1:1	0.250	1.663	0.416	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram		

Note(s):  
 1. Purple entries represent EB1190 (NFC are not supported.) measurements.  
 2. Blue entries represent EB1190NC (NFC and Camera are not supported.) measurements.

**Table 11.1.4 WCDMA 1700 Head SAR**

MEASUREMENT RESULTS													
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch												
1732.4	1412	WCDMA 1700	RMC	24.30	22.61	-0.030	Left Touch	FCC #1	1:1	0.342	1.476	0.505	A6
1732.4	1412	WCDMA 1700	RMC	24.30	22.61	-0.190	Right Touch	FCC #1	1:1	0.161	1.476	0.238	
1732.4	1412	WCDMA 1700	RMC	24.30	22.61	0.140	Left Tilt	FCC #1	1:1	0.119	1.476	0.176	
1732.4	1412	WCDMA 1700	RMC	24.30	22.61	0.080	Right Tilt	FCC #1	1:1	0.086	1.476	0.127	
1732.4	1412	WCDMA 1700	RMC	24.30	22.61	0.110	Left Touch	FCC #1	1:1	0.314	1.476	0.463	
1732.4	1412	WCDMA 1700	RMC	24.30	22.61	0.070	Left Touch	FCC #1	1:1	0.232	1.476	0.342	
ANSI / IEEE C95.1-2005- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram		

Note(s):  
 1. Purple entries represent EB1190 (NFC are not supported.) measurements.  
 2. Blue entries represent EB1190NC (NFC and Camera are not supported.) measurements.



**Table 11.1.5 WCDMA 1900 Head SAR**

MEASUREMENT RESULTS													
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch												
1880.0	9400	WCDMA 1900	RMC	24.30	22.40	0.100	Left Touch	FCC #1	1:1	0.499	1.549	0.773	A7
1880.0	9400	WCDMA 1900	RMC	24.30	22.40	0.170	Right Touch	FCC #1	1:1	0.104	1.549	0.161	
1880.0	9400	WCDMA 1900	RMC	24.30	22.40	-0.090	Left Tilt	FCC #1	1:1	0.164	1.549	0.254	
1880.0	9400	WCDMA 1900	RMC	24.30	22.40	0.120	Right Tilt	FCC #1	1:1	0.090	1.549	0.139	
1880.0	9400	WCDMA 1900	RMC	24.30	22.40	-0.160	Left Touch	FCC #1	1:1	0.347	1.549	0.538	
1880.0	9400	WCDMA 1900	RMC	24.30	22.40	0.050	Left Touch	FCC #1	1:1	0.339	1.549	0.525	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram		

Note(s):  
 1. Purple entries represent EB1190 (NFC are not supported.) measurements.  
 2. Blue entries represent EB1190NC (NFC and Camera are not supported.) measurements.

**Table 11.1.6 LTE Band 12 Head SAR**

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
707.5	23095	LTE B12	10	24.30	22.90	0.000	0	Left Touch	FCC #1	QPSK	1	0	1:1	0.042	1.380	0.058	
707.5	23095	LTE B12	10	23.30	21.75	0.000	1	Left Touch	FCC #1	QPSK	25	0	1:1	0.034	1.429	0.049	
707.5	23095	LTE B12	10	24.30	22.90	0.050	0	Right Touch	FCC #1	QPSK	1	0	1:1	0.114	1.380	0.157	A8
707.5	23095	LTE B12	10	23.30	21.75	0.070	1	Right Touch	FCC #1	QPSK	25	0	1:1	0.094	1.429	0.134	
707.5	23095	LTE B12	10	24.30	22.90	0.000	0	Left Tilt	FCC #1	QPSK	1	0	1:1	0.029	1.380	0.040	
707.5	23095	LTE B12	10	23.30	21.75	0.000	1	Left Tilt	FCC #1	QPSK	25	0	1:1	0.022	1.429	0.031	
707.5	23095	LTE B12	10	24.30	22.90	0.100	0	Right Tilt	FCC #1	QPSK	1	0	1:1	0.019	1.380	0.026	
707.5	23095	LTE B12	10	23.30	21.75	0.150	1	Right Tilt	FCC #1	QPSK	25	0	1:1	0.016	1.429	0.023	
707.5	23095	LTE B12	10	24.30	22.90	0.000	0	Right Touch	FCC #1	QPSK	1	0	1:1	0.109	1.380	0.150	
707.5	23095	LTE B12	10	24.30	22.90	0.000	0	Right Touch	FCC #1	QPSK	1	0	1:1	0.108	1.380	0.149	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram						

Note(s):  
 1. Purple entries represent EB1190 (NFC are not supported.) measurements.  
 2. Blue entries represent EB1190NC (NFC and Camera are not supported.) measurements.

**Table 11.1.7 LTE Band 5 (Cell) Head SAR**

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
836.5	20525	LTE B5	10	24.30	23.40	0.000	0	Left Touch	FCC #1	QPSK	1	25	1:1	0.122	1.230	0.150	
836.5	20525	LTE B5	10	23.30	22.35	0.000	1	Left Touch	FCC #1	QPSK	25	12	1:1	0.108	1.245	0.134	
836.5	20525	LTE B5	10	24.30	23.40	0.000	0	Right Touch	FCC #1	QPSK	1	25	1:1	0.211	1.230	0.260	A9
836.5	20525	LTE B5	10	23.30	22.35	0.170	1	Right Touch	FCC #1	QPSK	25	12	1:1	0.182	1.245	0.227	
836.5	20525	LTE B5	10	24.30	23.40	0.000	0	Left Tilt	FCC #1	QPSK	1	25	1:1	0.062	1.230	0.076	
836.5	20525	LTE B5	10	23.30	22.35	0.000	1	Left Tilt	FCC #1	QPSK	25	12	1:1	0.055	1.245	0.068	
836.5	20525	LTE B5	10	24.30	23.40	0.130	0	Right Tilt	FCC #1	QPSK	1	25	1:1	0.053	1.230	0.065	
836.5	20525	LTE B5	10	23.30	22.35	-0.110	1	Right Tilt	FCC #1	QPSK	25	12	1:1	0.040	1.245	0.050	
836.5	20525	LTE B5	10	24.30	23.40	0.160	0	Right Touch	FCC #1	QPSK	1	25	1:1	0.202	1.230	0.248	
836.5	20525	LTE B5	10	24.30	23.40	-0.140	0	Right Touch	FCC #1	QPSK	1	25	1:1	0.199	1.230	0.245	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram						

Note(s):  
 1. Purple entries represent EB1190 (NFC are not supported.) measurements.  
 2. Blue entries represent EB1190NC (NFC and Camera are not supported.) measurements.

**Table 11.1.8 LTE Band 4 (AWS) Head SAR**

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1732.5	20175	LTE B4	20	24.30	23.50	0.050	0	Left Touch	FCC #1	QPSK	1	0	1:1	0.366	1.202	0.440	A10
1732.5	20175	LTE B4	20	23.30	22.03	-0.050	1	Left Touch	FCC #1	QPSK	50	0	1:1	0.285	1.340	0.382	
1732.5	20175	LTE B4	20	24.30	23.50	-0.190	0	Right Touch	FCC #1	QPSK	1	0	1:1	0.136	1.202	0.163	
1732.5	20175	LTE B4	20	23.30	22.03	0.170	1	Right Touch	FCC #1	QPSK	50	0	1:1	0.083	1.340	0.111	
1732.5	20175	LTE B4	20	24.30	23.50	0.120	0	Left Tilt	FCC #1	QPSK	1	0	1:1	0.142	1.202	0.171	
1732.5	20175	LTE B4	20	23.30	22.03	0.130	1	Left Tilt	FCC #1	QPSK	50	0	1:1	0.099	1.340	0.133	
1732.5	20175	LTE B4	20	24.30	23.50	-0.050	0	Right Tilt	FCC #1	QPSK	1	0	1:1	0.139	1.202	0.167	
1732.5	20175	LTE B4	20	23.30	22.03	-0.080	1	Right Tilt	FCC #1	QPSK	50	0	1:1	0.098	1.340	0.131	
1732.5	20175	LTE B4	20	24.30	23.50	-0.050	1	Left Touch	FCC #1	QPSK	50	0	1:1	0.291	1.202	0.350	
1732.5	20175	LTE B4	20	24.30	23.50	0.170	1	Left Touch	FCC #1	QPSK	50	0	1:1	0.290	1.202	0.349	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram						

Note(s):  
 1. Purple entries represent EB1190 (NFC are not supported.) measurements.  
 2. Blue entries represent EB1190NC (NFC and Camera are not supported.) measurements.

**Table 11.1.9 LTE Band 2 (PCS) Head SAR**

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1860.0	18700	LTE B2	20	24.30	23.59	-0.120	0	Left Touch	FCC #1	QPSK	1	50	1:1	0.449	1.178	0.529	A11
1860.0	18700	LTE B2	20	23.30	22.46	0.010	1	Left Touch	FCC #1	QPSK	50	25	1:1	0.367	1.213	0.445	
1860.0	18700	LTE B2	20	24.30	23.59	0.170	0	Right Touch	FCC #2	QPSK	1	50	1:1	0.153	1.178	0.180	
1860.0	18700	LTE B2	20	23.30	22.46	0.090	1	Right Touch	FCC #1	QPSK	50	25	1:1	0.134	1.213	0.163	
1860.0	18700	LTE B2	20	24.30	23.59	-0.070	0	Left Tilt	FCC #1	QPSK	1	50	1:1	0.142	1.178	0.167	
1860.0	18700	LTE B2	20	23.30	22.46	-0.060	1	Left Tilt	FCC #1	QPSK	50	25	1:1	0.107	1.213	0.130	
1860.0	18700	LTE B2	20	24.30	23.59	0.150	0	Right Tilt	FCC #1	QPSK	1	50	1:1	0.160	1.178	0.188	
1860.0	18700	LTE B2	20	23.30	22.46	0.190	1	Right Tilt	FCC #1	QPSK	50	25	1:1	0.126	1.213	0.153	
1880.0	18900	LTE B2	20	24.30	23.59	-0.120	0	Left Touch	FCC #1	QPSK	1	50	1:1	0.329	1.178	0.388	
1880.0	18900	LTE B2	20	24.30	23.59	0.140	0	Left Touch	FCC #1	QPSK	1	50	1:1	0.330	1.178	0.389	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram						

Note(s):  
 1. Purple entries represent EB1190 (NFC are not supported.) measurements.  
 2. Blue entries represent EB1190NC (NFC and Camera are not supported.) measurements.

**Table 11.1.10 LTE Band 41 Head SAR**

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
2 506.0	39750	LTE B41	20	24.80	22.50	0.170	0	Left Touch	FCC #1	QPSK	1	0	1:1.58	0.178	1.698	0.302	A12
2 506.0	39750	LTE B41	20	23.80	21.46	0.140	1	Left Touch	FCC #1	QPSK	50	0	1:1.58	0.149	1.714	0.255	
2 506.0	39750	LTE B41	20	24.80	22.50	0.180	0	Right Touch	FCC #1	QPSK	1	0	1:1.58	0.123	1.698	0.209	
2 506.0	39750	LTE B41	20	23.80	21.46	0.140	1	Right Touch	FCC #1	QPSK	50	0	1:1.58	0.085	1.714	0.163	
2 506.0	39750	LTE B41	20	24.80	22.50	0.150	0	Left Tilt	FCC #1	QPSK	1	0	1:1.58	0.085	1.698	0.144	
2 506.0	39750	LTE B41	20	23.80	21.46	0.170	1	Left Tilt	FCC #1	QPSK	50	0	1:1.58	0.067	1.714	0.115	
2 506.0	39750	LTE B41	20	24.80	22.50	0.170	0	Right Tilt	FCC #1	QPSK	1	0	1:1.58	0.073	1.698	0.124	
2 506.0	39750	LTE B41	20	23.80	21.46	0.190	1	Right Tilt	FCC #1	QPSK	50	0	1:1.58	0.057	1.714	0.098	
2 593.0	40620	LTE B41	20	24.80	22.50	0.190	0	Left Touch	FCC #1	QPSK	1	0	1:1.58	0.161	1.698	0.273	
2 593.0	40620	LTE B41	20	24.80	22.50	-0.010	0	Left Touch	FCC #1	QPSK	1	0	1:1.58	0.176	1.698	0.299	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure													Head 1.6 W/kg (mW/g) averaged over 1 gram				

Note(s):  
 1. Purple entries represent EB1190 (NFC are not supported.) measurements.  
 2. Blue entries represent EB1190NC (NFC and Camera are not supported.) measurements.

**Table 11.1.11 DTS Head SAR**

MEASUREMENT RESULTS																	
FREQUENCY		Mode (Antenna)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #		
MHz	Ch																
2 437.0	6	802.11b	16.00	14.55	-0.100	Left Touch	FCC #2	0.117	1	97.5	0.109	1.396	1.026	0.156			
2 437.0	6	802.11b	16.00	14.55	0.110	Right Touch	FCC #2	0.100	1	97.5	0.117	1.396	1.026	0.168			
2 437.0	6	802.11b	16.00	14.55	-0.120	Left Tilt	FCC #2	0.122	1	97.5	0.099	1.396	1.026	0.142			
2 437.0	6	802.11b	16.00	14.55	0.100	Right Tilt	FCC #2	0.131	1	97.5	0.138	1.396	1.026	0.198	A13		
2 437.0	6	802.11b	16.00	14.55	0.130	Right Tilt	FCC #2	0.105	1	97.5	0.113	1.396	1.026	0.162			
2 437.0	6	802.11b	16.00	14.55	-0.020	Right Tilt	FCC #2	0.073	1	97.5	0.075	1.396	1.026	0.107			
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure													Head 1.6 W/kg (mW/g) averaged over 1 gram				

Note(s):  
 1. Purple entries represent EB1190 (NFC are not supported.) measurements.  
 2. Blue entries represent EB1190NC (NFC and Camera are not supported.) measurements.

**Adjusted SAR results for OFDM SAR**

Adjusted SAR results for OFDM SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1g Adjusted SAR (W/kg)	Determine OFDM SAR
MHz	Ch											
2 437.0	6	802.11b	DSSS	16.00	0.198	2 437.0	802.11g	OFDM	15.00	0.794	0.157	X
2 437.0	6	802.11b	DSSS	16.00	0.198	2 437.0	802.11n (HT20)	OFDM	15.00	0.794	0.157	X
2 437.0	6	802.11b	DSSS	16.00	0.198	2 437.0	802.11ac (VHT20)	OFDM	15.00	0.794	0.157	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram		

Note: SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

**Table 11.1.12 UNII Head SAR**

MEASUREMENT RESULTS																	
FREQUENCY		Mode (Antenna)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #		
MHz	Ch																
5 290.0	58	802.11ac	16.00	14.78	-0.130	Left Touch	FCC #2	0.068	MCS0	90.5	0.098	1.324	1.105	0.143			
5 290.0	58	802.11ac	16.00	14.78	0.120	Right Touch	FCC #2	0.204	MCS0	90.5	0.205	1.324	1.105	0.300	A14		
5 290.0	58	802.11ac	16.00	14.78	-0.060	Left Tilt	FCC #2	0.050	MCS0	90.5	0.058	1.324	1.105	0.085			
5 290.0	58	802.11ac	16.00	14.78	0.040	Right Tilt	FCC #2	0.139	MCS0	90.5	0.134	1.324	1.105	0.196			
5 290.0	58	802.11ac	16.00	14.78	0.130	Right Touch	FCC #2	0.201	MCS0	90.5	0.200	1.324	1.105	0.293			
5 290.0	58	802.11ac	16.00	14.78	0.140	Right Touch	FCC #2	0.203	MCS0	90.5	0.194	1.324	1.105	0.284			
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure													Head 1.6 W/kg (mW/g) averaged over 1 gram				

Note(s):  
 1. Purple entries represent EB1190 (NFC are not supported.) measurements.  
 2. Blue entries represent EB1190NC (NFC and Camera are not supported.) measurements.

**Adjusted SAR results for UNII-1 and UNII-2A SAR**

Adjusted SAR results for UNII-1 and UNII-2A SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Adjusted Factor	1g Adjusted SAR (W/kg)	SAR for the band with lower maximum output power
MHz	Ch											
5 290.0	58	802.11ac	OFDM	16.0	0.300	5 210.0	802.11ac	OFDM	16.0	1.000	0.300	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram		

Note: U-NII-1 and U-NII-2A Bands: When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

**Table 11.1.13 UNII Head SAR**

MEASUREMENT RESULTS																	
FREQUENCY		Mode (Antenna)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #		
MHz	Ch																
5 610.0	122	802.11ac	16.00	15.31	0.000	Left Touch	FCC #2	0.056	MCS0	90.5	0.064	1.172	1.105	0.083			
5 610.0	122	802.11ac	16.00	15.31	0.000	Right Touch	FCC #2	0.176	MCS0	90.5	0.146	1.172	1.105	0.189	A15		
5 610.0	122	802.11ac	16.00	15.31	0.000	Left Tilt	FCC #2	0.032	MCS0	90.5	0.048	1.172	1.105	0.062			
5 610.0	122	802.11ac	16.00	15.31	0.000	Right Tilt	FCC #2	0.060	MCS0	90.5	0.053	1.172	1.105	0.069			
5 610.0	122	802.11ac	16.00	15.31	0.000	Right Touch	FCC #2	0.164	MCS0	90.5	0.134	1.172	1.105	0.174			
5 610.0	122	802.11ac	16.00	15.31	0.000	Right Touch	FCC #2	0.130	MCS0	90.5	0.053	1.172	1.105	0.069			
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure													Head 1.6 W/kg (mW/g) averaged over 1 gram				

Note(s):  
 1. Purple entries represent EB1190 (NFC are not supported.) measurements.  
 2. Blue entries represent EB1190NC (NFC and Camera are not supported.) measurements.

**Table 11.1.14 Bluetooth Head SAR**

FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
2 441.0	39	Bluetooth	14.30	11.36	0.000	Left Touch	FCC #2	1	76.8	0.012	1.968	1.302	0.031	
2 441.0	39	Bluetooth	14.30	11.36	-0.140	Right Touch	FCC #2	1	76.8	0.047	1.968	1.302	0.120	A16
2 441.0	39	Bluetooth	14.30	11.36	0.000	Left Tilt	FCC #2	1	76.8	0.014	1.968	1.302	0.036	
2 441.0	39	Bluetooth	14.30	11.36	0.000	Right Tilt	FCC #2	1	76.8	0.022	1.968	1.302	0.056	
2 441.0	39	Bluetooth	14.30	11.36	0.140	Right Touch	FCC #2	1	76.8	0.046	1.968	1.302	0.118	
2 441.0	39	Bluetooth	14.30	11.36	0.000	Right Touch	FCC #2	1	76.8	0.022	1.968	1.302	0.056	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Head 1.6 W/kg (mW/g) averaged over 1 gram					

- Note(s):
1. Purple entries represent EB1190 (NFC are not supported.) measurements.
  2. Blue entries represent EB1190NC (NFC and Camera are not supported.) measurements.

## 11.2 Standalone Body-Worn SAR Worn SAR Results

**Table 11.2.1 GSM/PCS/GPRS/WCDMA Body-Worn SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Spacing [Side]	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
836.6	190	GSM850	GSM	33.90	33.20	-0.020	15 mm [Front]	FCC #1	1	1:8.3	0.167	1.175	0.196	
836.6	190	GSM850	GSM	33.90	33.20	-0.000	15 mm [Rear]	FCC #1	1	1:8.3	0.217	1.175	0.255	A17
836.6	190	GSM850	GPRS	27.90	27.76	0.040	15 mm [Front]	FCC #1	4	1:2.075	0.177	1.033	0.183	
836.6	190	GSM850	GPRS	27.90	27.76	-0.030	15 mm [Rear]	FCC #1	4	1:2.075	0.237	1.033	0.245	A18
836.6	190	GSM850	GSM	33.90	33.20	-0.040	15 mm [Rear]	FCC #1	1	1:8.3	0.202	1.175	0.237	
836.6	190	GSM850	GSM	33.90	33.20	-0.010	15 mm [Rear]	FCC #1	1	1:8.3	0.207	1.175	0.243	
1880.0	661	PCS1900	PCS	30.90	28.96	-0.020	15 mm [Front]	FCC #1	1	1:8.3	0.137	1.563	0.214	
1880.0	661	PCS1900	PCS	30.90	28.96	-0.120	15 mm [Rear]	FCC #1	1	1:8.3	0.189	1.563	0.295	A19
1880.0	661	PCS1900	GPRS	24.90	23.33	-0.190	15 mm [Front]	FCC #1	4	1:2.075	0.191	1.435	0.274	
1880.0	661	PCS1900	GPRS	24.90	23.33	-0.110	15 mm [Rear]	FCC #1	4	1:2.075	0.234	1.435	0.336	A20
1880.0	661	PCS1900	GPRS	24.90	23.33	-0.140	15 mm [Rear]	FCC #1	4	1:2.075	0.232	1.435	0.333	
1880.0	661	PCS1900	GPRS	24.90	23.33	-0.160	15 mm [Rear]	FCC #1	4	1:2.075	0.226	1.435	0.324	
836.6	4183	WCDMA 850	RMC	24.30	22.09	-0.050	15 mm [Front]	FCC #1	N/A	1:1	0.131	1.663	0.218	
836.6	4183	WCDMA 850	RMC	24.30	22.09	-0.030	15 mm [Rear]	FCC #1	N/A	1:1	0.156	1.663	0.259	A21
836.6	4183	WCDMA 850	RMC	24.30	22.09	-0.060	15 mm [Rear]	FCC #1	N/A	1:1	0.152	1.663	0.253	
836.6	4183	WCDMA 850	RMC	24.30	22.09	-0.020	15 mm [Rear]	FCC #1	N/A	1:1	0.155	1.663	0.258	
1732.4	1412	WCDMA 1700	RMC	24.30	22.61	0.030	15 mm [Front]	FCC #1	N/A	1:1	0.190	1.476	0.280	
1732.4	1412	WCDMA 1700	RMC	24.30	22.61	-0.000	15 mm [Rear]	FCC #1	N/A	1:1	0.349	1.476	0.515	A22
1732.4	1412	WCDMA 1700	RMC	24.30	22.61	-0.030	15 mm [Rear]	FCC #1	N/A	1:1	0.323	1.476	0.477	
1732.4	1412	WCDMA 1700	RMC	24.30	22.61	-0.030	15 mm [Rear]	FCC #1	N/A	1:1	0.323	1.476	0.477	
1880.0	9400	WCDMA 1900	RMC	24.30	22.40	-0.010	15 mm [Front]	FCC #1	N/A	1:1	0.241	1.549	0.373	
1880.0	9400	WCDMA 1900	RMC	24.30	22.40	-0.100	15 mm [Rear]	FCC #1	N/A	1:1	0.291	1.549	0.451	A23
1880.0	9400	WCDMA 1900	RMC	24.30	22.40	-0.030	15 mm [Rear]	FCC #1	N/A	1:1	0.287	1.549	0.445	
1880.0	9400	WCDMA 1900	RMC	24.30	22.40	-0.070	15 mm [Rear]	FCC #1	N/A	1:1	0.286	1.549	0.443	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Body 1.6 W/kg (mW/g) averaged over 1 gram			

Note(s):  
1. Purple entries represent EB1190 (NFC are not supported.) measurements.  
2. Blue entries represent EB1190NC (NFC and Camera are not supported.) measurements.

**Table 11.2.2 LTE Body-Worn SAR**

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
707.5	23095	LTE B12	10	24.30	22.90	0.050	0	15 mm [Front]	FCC #1	QPSK	25	0	1:1	0.045	1.380	0.062	
707.5	23095	LTE B12	10	24.30	21.75	0.060	1	15 mm [Front]	FCC #1	QPSK	25	0	1:1	0.038	1.429	0.054	
707.5	23095	LTE B12	10	24.30	22.90	0.020	0	15 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.100	1.380	0.138	A24
707.5	23095	LTE B12	10	24.30	21.75	0.030	1	15 mm [Rear]	FCC #1	QPSK	25	0	1:1	0.082	1.429	0.117	
707.5	23095	LTE B12	10	24.30	22.90	-0.020	0	15 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.083	1.380	0.115	
707.5	23095	LTE B12	10	24.30	22.90	0.070	0	15 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.083	1.380	0.115	
836.5	20525	LTE B5	10	24.30	23.40	-0.020	0	15 mm [Front]	FCC #1	QPSK	1	25	1:1	0.188	1.230	0.231	
836.5	20525	LTE B5	10	24.30	23.35	-0.010	1	15 mm [Front]	FCC #1	QPSK	25	12	1:1	0.160	1.245	0.199	
836.5	20525	LTE B5	10	24.30	23.40	-0.020	0	15 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.232	1.230	0.285	A25
836.5	20525	LTE B5	10	24.30	23.35	-0.040	1	15 mm [Rear]	FCC #1	QPSK	25	12	1:1	0.189	1.245	0.235	
836.5	20525	LTE B5	10	24.30	23.40	-0.010	0	15 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.230	1.230	0.283	
836.5	20525	LTE B5	10	24.30	23.40	-0.020	0	15 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.229	1.230	0.282	
1732.5	20175	LTE B4	20	24.30	23.50	-0.050	0	15 mm [Front]	FCC #1	QPSK	1	0	1:1	0.386	1.202	0.464	
1732.5	20175	LTE B4	20	24.30	22.03	-0.040	1	15 mm [Front]	FCC #1	QPSK	50	0	1:1	0.290	1.340	0.389	
1732.5	20175	LTE B4	20	24.30	23.50	-0.050	0	15 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.541	1.202	0.650	A26
1732.5	20175	LTE B4	20	24.30	22.03	0.020	1	15 mm [Rear]	FCC #1	QPSK	50	0	1:1	0.399	1.340	0.535	
1732.5	20175	LTE B4	20	24.30	23.50	-0.010	0	15 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.519	1.202	0.624	
1732.5	20175	LTE B4	20	24.30	23.50	-0.040	0	15 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.523	1.202	0.629	
1860.0	18700	LTE B2	20	24.30	23.59	-0.020	0	15 mm [Front]	FCC #1	QPSK	1	50	1:1	0.350	1.178	0.412	
1860.0	18700	LTE B2	20	24.30	22.46	-0.040	1	15 mm [Front]	FCC #1	QPSK	50	25	1:1	0.312	1.213	0.378	
1860.0	18700	LTE B2	20	24.30	23.59	-0.060	0	15 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.489	1.178	0.576	A27
1860.0	18700	LTE B2	20	24.30	22.46	-0.080	1	15 mm [Rear]	FCC #1	QPSK	50	25	1:1	0.425	1.213	0.516	
1860.0	18700	LTE B2	20	24.30	23.59	-0.090	0	15 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.488	1.178	0.575	
1860.0	18700	LTE B2	20	24.30	23.59	-0.070	0	15 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.486	1.178	0.573	
2506.0	39750	LTE B41	20	24.80	22.50	0.020	0	15 mm [Front]	FCC #1	QPSK	1	0	1:1.58	0.171	1.698	0.290	
2506.0	39750	LTE B41	20	24.80	21.46	-0.000	1	15 mm [Front]	FCC #1	QPSK	50	0	1:1.58	0.121	1.714	0.207	
2506.0	39750	LTE B41	20	24.80	22.50	-0.070	0	15 mm [Rear]	FCC #1	QPSK	1	0	1:1.58	0.324	1.698	0.550	A28
2506.0	39750	LTE B41	20	24.80	21.46	0.100	1	15 mm [Rear]	FCC #1	QPSK	50	0	1:1.58	0.220	1.714	0.377	
2506.0	39750	LTE B41	20	24.80	22.50	-0.100	0	15 mm [Rear]	FCC #1	QPSK	1	0	1:1.58	0.265	1.698	0.450	
2506.0	39750	LTE B41	20	24.80	22.50	-0.130	0	15 mm [Rear]	FCC #1	QPSK	1	0	1:1.58	0.303	1.698	0.514	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Body 1.6 W/kg (mW/g) averaged over 1 gram						

Note(s):  
1. Purple entries represent EB1190 (NFC are not supported.) measurements.  
2. Blue entries represent EB1190NC (NFC and Camera are not supported.) measurements.

**Table 11.2.3 DTS Body-Worn SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	SAR (W/kg)	Plots #
MHz	Ch														
2437.0	6	802.11b	16.00	14.55	-0.130	15 mm [Front]	FCC #2	0.023	1	97.5	0.013	1.396	1.026	0.019	
2437.0	6	802.11b	16.00	14.55	0.120	15 mm [Rear]	FCC #2	0.092	1	97.5	0.095	1.396	1.026	0.136	A29
2437.0	6	802.11b	16.00	14.55	0.140	15 mm [Rear]	FCC #2	0.080	1	97.5	0.082	1.396	1.026	0.117	
2437.0	6	802.11b	16.00	14.55	-0.020	15 mm [Rear]	FCC #2	0.080	1	97.5	0.081	1.396	1.026	0.116	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Body 1.6 W/kg (mW/g) averaged over 1 gram				

Note(s):  
1. Purple entries represent EB1190 (NFC are not supported.) measurements.  
2. Blue entries represent EB1190NC (NFC and Camera are not supported.) measurements.

Adjusted SAR results for OFDM SAR													
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1g Adjusted SAR (W/kg)	Determine OFDM SAR	
MHz	Ch												
2437.0	6	802.11b	DSSS	16.00	0.136	2437.0	802.11g	OFDM	15.00	0.794	0.108	X	
2437.0	6	802.11b	DSSS	16.00	0.136	2437.0	802.11n (HT20)	OFDM	15.00	0.794	0.108	X	
2437.0	6	802.11b	DSSS	16.00	0.136	2437.0	802.11ac (VHT20)	OFDM	15.00	0.794	0.108	X	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Body 1.6 W/kg (mW/g) averaged over 1 gram		

Note: SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

This test report is prohibited to copy or reissue in whole or in part without the approval of Dt&C Co., Ltd.

**Table 11.2.4 UNII Body-Worn SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5 290.0	58	802.11ac	16.00	14.78	-0.080	15 mm [Front]	FCC #2	0.056	MCS0	90.5	0.038	1.324	1.105	0.056	
5 290.0	58	802.11ac	16.00	14.78	-0.030	15 mm [Rear]	FCC #2	0.281	MCS0	90.5	0.297	1.324	1.105	0.435	A30
5 290.0	58	802.11ac	16.00	14.78	-0.080	15 mm [Rear]	FCC #2	0.287	MCS0	90.5	0.279	1.324	1.105	0.408	
5 290.0	58	802.11ac	16.00	14.78	-0.140	15 mm [Rear]	FCC #2	0.304	MCS0	90.5	0.268	1.324	1.105	0.392	
ANSI / IEEE C95.1-2005- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Body 1.6 W/kg (mW/g) averaged over 1 gram				

Note(s):  
 1. Purple entries represent EB1190 (NFC are not supported.) measurements.  
 2. Blue entries represent EB1190NC (NFC and Camera are not supported.) measurements.

Adjusted SAR results for UNII-1 and UNII-2A SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Adjusted Factor	1g Adjusted SAR (W/kg)	SAR for the band with lower maximum output power
MHz	Ch											
5 290.0	58	802.11ac	OFDM	16.0	0.435	5 210.0	802.11ac	OFDM	16.0	1.000	0.435	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Body 1.6 W/kg (mW/g) averaged over 1 gram	

Note: U-NII-1 and U-NII-2A Bands: When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

**Table 11.2.5 UNII Body-Worn SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5 610.0	122	802.11ac	16.00	15.31	0.000	15 mm [Front]	FCC #2	0.012	MCS0	90.5	0.011	1.172	1.105	0.014	
5 610.0	122	802.11ac	16.00	15.31	-0.020	15 mm [Rear]	FCC #2	0.126	MCS0	90.5	0.146	1.172	1.105	0.189	A31
5 610.0	122	802.11ac	16.00	15.31	-0.060	15 mm [Rear]	FCC #2	0.219	MCS0	90.5	0.131	1.172	1.105	0.170	
5 610.0	122	802.11ac	16.00	15.31	0.000	15 mm [Rear]	FCC #2	0.157	MCS0	90.5	0.142	1.172	1.105	0.184	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Body 1.6 W/kg (mW/g) averaged over 1 gram				

Note(s):  
 1. Purple entries represent EB1190 (NFC are not supported.) measurements.  
 2. Blue entries represent EB1190NC (NFC and Camera are not supported.) measurements.

**Table 11.2.6 Bluetooth Body-Worn SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #	
MHz	Ch														
2 441.0	39	Bluetooth	14.30	11.36	0.000	15 mm [Front]	FCC #2	1	76.8	0.004	1.968	1.302	0.010		
2 441.0	39	Bluetooth	14.30	11.36	0.110	15 mm [Rear]	FCC #2	1	76.8	0.035	1.968	1.302	0.090	A32	
2 441.0	39	Bluetooth	14.30	11.36	-0.190	15 mm [Rear]	FCC #2	1	76.8	0.028	1.968	1.302	0.072		
2 441.0	39	Bluetooth	14.30	11.36	0.090	15 mm [Rear]	FCC #2	1	76.8	0.026	1.968	1.302	0.067		
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Body 1.6 W/kg (mW/g) averaged over 1 gram				

Note(s):  
 1. Purple entries represent EB1190 (NFC are not supported.) measurements.  
 2. Blue entries represent EB1190NC (NFC and Camera are not supported.) measurements.

### 11.3 Standalone Hotspot SAR Results

**Table 11.3.1 GPRS/WCDMA Hotspot SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Spacing [Side]	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
836.6	190	GSM850	GPRS	27.90	27.76	0.110	10 mm [Bottom]	FCC #1	4	1:2.075	0.263	1.033	0.272	
836.6	190	GSM850	GPRS	27.90	27.76	-0.110	10 mm [Front]	FCC #1	4	1:2.075	0.294	1.033	0.304	
836.6	190	GSM850	GPRS	27.90	27.76	0.060	10 mm [Rear]	FCC #1	4	1:2.075	0.475	1.033	0.491	A33
836.6	190	GSM850	GPRS	27.90	27.76	-0.060	10 mm [Left]	FCC #1	4	1:2.075	0.237	1.033	0.245	
836.6	190	GSM850	GPRS	27.90	27.76	-0.070	10 mm [Rear]	FCC #1	4	1:2.075	0.435	1.033	0.449	
836.6	190	GSM850	GPRS	27.90	27.76	0.020	10 mm [Rear]	FCC #1	4	1:2.075	0.387	1.033	0.400	
1880.0	661	PCS1900	GPRS	24.90	23.33	0.190	10 mm [Bottom]	FCC #1	4	1:2.075	0.175	1.435	0.251	
1880.0	661	PCS1900	GPRS	24.90	23.33	-0.070	10 mm [Front]	FCC #1	4	1:2.075	0.330	1.435	0.474	
1880.0	661	PCS1900	GPRS	24.90	23.33	0.040	10 mm [Rear]	FCC #1	4	1:2.075	0.543	1.435	0.779	A34
1880.0	661	PCS1900	GPRS	24.90	23.33	0.030	10 mm [Left]	FCC #1	4	1:2.075	0.370	1.435	0.531	
1880.0	661	PCS1900	GPRS	24.90	23.33	-0.070	10 mm [Rear]	FCC #1	4	1:2.075	0.534	1.435	0.766	
1880.0	661	PCS1900	GPRS	24.90	23.33	-0.150	10 mm [Rear]	FCC #1	4	1:2.075	0.539	1.435	0.773	
836.6	4183	WCDMA 850	RMC	24.30	22.09	-0.130	10 mm [Bottom]	FCC #1	N/A	1:1	0.223	1.663	0.371	
836.6	4183	WCDMA 850	RMC	24.30	22.09	0.030	10 mm [Front]	FCC #1	N/A	1:1	0.218	1.663	0.363	
836.6	4183	WCDMA 850	RMC	24.30	22.09	-0.050	10 mm [Rear]	FCC #1	N/A	1:1	0.280	1.663	0.466	A35
836.6	4183	WCDMA 850	RMC	24.30	22.09	0.040	10 mm [Left]	FCC #1	N/A	1:1	0.154	1.663	0.256	
836.6	4183	WCDMA 850	RMC	24.30	22.09	-0.010	10 mm [Rear]	FCC #1	N/A	1:1	0.247	1.663	0.411	
836.6	4183	WCDMA 850	RMC	24.30	22.09	-0.060	10 mm [Rear]	FCC #1	N/A	1:1	0.251	1.663	0.417	
1732.4	1412	WCDMA 1700	RMC	24.30	22.61	-0.150	10 mm [Bottom]	FCC #1	N/A	1:1	0.335	1.476	0.494	
1732.4	1412	WCDMA 1700	RMC	24.30	22.61	-0.050	10 mm [Front]	FCC #1	N/A	1:1	0.450	1.476	0.664	
1712.4	1312	WCDMA 1700	RMC	24.30	22.67	-0.010	10 mm [Rear]	FCC #1	N/A	1:1	0.495	1.455	0.720	
1732.4	1412	WCDMA 1700	RMC	24.30	22.61	0.060	10 mm [Rear]	FCC #1	N/A	1:1	0.648	1.476	0.956	A36
1752.6	1513	WCDMA 1700	RMC	24.30	22.71	0.080	10 mm [Rear]	FCC #1	N/A	1:1	0.514	1.442	0.741	
1732.4	1412	WCDMA 1700	RMC	24.30	22.61	0.010	10 mm [Left]	FCC #1	N/A	1:1	0.383	1.476	0.565	
1732.4	1412	WCDMA 1700	RMC	24.30	22.61	-0.050	10 mm [Rear]	FCC #1	N/A	1:1	0.588	1.476	0.868	
1732.4	1412	WCDMA 1700	RMC	24.30	22.61	-0.050	10 mm [Rear]	FCC #1	N/A	1:1	0.643	1.476	0.949	
1880.0	9400	WCDMA 1900	RMC	24.30	22.40	-0.110	10 mm [Bottom]	FCC #1	N/A	1:1	0.256	1.549	0.397	
1852.4	9262	WCDMA 1900	RMC	24.30	22.44	-0.100	10 mm [Front]	FCC #1	N/A	1:1	0.514	1.535	0.789	
1880.0	9400	WCDMA 1900	RMC	24.30	22.40	0.040	10 mm [Front]	FCC #1	N/A	1:1	0.541	1.549	0.838	
1907.6	9538	WCDMA 1900	RMC	24.30	22.29	-0.130	10 mm [Front]	FCC #1	N/A	1:1	0.519	1.589	0.825	
1852.4	9262	WCDMA 1900	RMC	24.30	22.44	0.060	10 mm [Rear]	FCC #1	N/A	1:1	0.626	1.535	0.961	
1880.0	9400	WCDMA 1900	RMC	24.30	22.40	-0.120	10 mm [Rear]	FCC #1	N/A	1:1	0.725	1.549	1.123	A37
1907.6	9538	WCDMA 1900	RMC	24.30	22.29	0.090	10 mm [Rear]	FCC #1	N/A	1:1	0.577	1.589	0.917	
1880.0	9400	WCDMA 1900	RMC	24.30	22.40	-0.010	10 mm [Left]	FCC #1	N/A	1:1	0.524	1.549	0.812	
1880.0	9400	WCDMA 1900	RMC	24.30	22.40	0.020	10 mm [Rear]	FCC #1	N/A	1:1	0.523	1.549	0.810	
1880.0	9400	WCDMA 1900	RMC	24.30	22.40	-0.090	10 mm [Rear]	FCC #1	N/A	1:1	0.512	1.549	0.793	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Body 1.6 W/kg (mW/g) averaged over 1 gram				

Note(s):  
 1. Purple entries represent EB1190 (NFC are not supported.) measurements.  
 2. Blue entries represent EB1190NC (NFC and Camera are not supported.) measurements.

**Table 11.3.2 LTE Hotspot SAR**

**MEASUREMENT RESULTS**

FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1 g SAR (W/kg)	Scaling Factor	1 g Scaled SAR (W/kg)	Plots #
MHz	Ch																
707.5	23095	LTE B12	10	24.30	22.90	0.090	0	10 mm (Bottom)	FCC #1	QPSK	1	0	1:1	0.058	1.380	0.080	
707.5	23095	LTE B12	10	23.30	21.75	0.060	1	10 mm (Bottom)	FCC #1	QPSK	25	0	1:1	0.046	1.429	0.066	
707.5	23095	LTE B12	10	24.30	22.90	-0.030	0	10 mm (Front)	FCC #1	QPSK	1	0	1:1	0.054	1.380	0.075	
707.5	23095	LTE B12	10	23.30	21.75	0.050	1	10 mm (Front)	FCC #1	QPSK	25	0	1:1	0.046	1.429	0.066	
707.5	23095	LTE B12	10	24.30	22.90	0.010	0	10 mm (Rear)	FCC #1	QPSK	1	0	1:1	0.191	1.380	0.264	A38
707.5	23095	LTE B12	10	23.30	21.75	-0.040	1	10 mm (Rear)	FCC #1	QPSK	25	0	1:1	0.092	1.429	0.131	
707.5	23095	LTE B12	10	24.30	22.90	0.110	0	10 mm (Left)	FCC #1	QPSK	1	0	1:1	0.075	1.380	0.104	
707.5	23095	LTE B12	10	23.30	21.75	0.030	1	10 mm (Left)	FCC #1	QPSK	25	0	1:1	0.060	1.429	0.086	
707.5	23095	LTE B12	10	24.30	22.90	0.000	0	10 mm (Right)	FCC #1	QPSK	1	0	1:1	0.109	1.380	0.150	
707.5	23095	LTE B12	10	24.30	22.90	0.000	0	10 mm (Right)	FCC #1	QPSK	1	0	1:1	0.186	1.380	0.257	
836.5	20525	LTE B5	10	24.30	23.40	0.020	0	10 mm (Bottom)	FCC #1	QPSK	1	25	1:1	0.165	1.230	0.203	
836.5	20525	LTE B5	10	23.30	22.35	0.000	1	10 mm (Bottom)	FCC #1	QPSK	25	12	1:1	0.143	1.245	0.178	
836.5	20525	LTE B5	10	24.30	23.40	0.030	0	10 mm (Front)	FCC #1	QPSK	1	25	1:1	0.207	1.230	0.255	
836.5	20525	LTE B5	10	23.30	22.35	-0.020	1	10 mm (Front)	FCC #1	QPSK	25	12	1:1	0.173	1.245	0.215	
836.5	20525	LTE B5	10	24.30	23.40	-0.040	0	10 mm (Rear)	FCC #1	QPSK	1	25	1:1	0.277	1.230	0.341	A39
836.5	20525	LTE B5	10	23.30	22.35	0.020	1	10 mm (Rear)	FCC #1	QPSK	25	12	1:1	0.219	1.245	0.273	
836.5	20525	LTE B5	10	24.30	23.40	0.000	0	10 mm (Left)	FCC #1	QPSK	1	25	1:1	0.220	1.230	0.271	
836.5	20525	LTE B5	10	23.30	22.35	-0.040	1	10 mm (Left)	FCC #1	QPSK	25	12	1:1	0.181	1.245	0.225	
836.5	20525	LTE B5	10	24.30	23.40	-0.030	0	10 mm (Right)	FCC #1	QPSK	1	25	1:1	0.244	1.230	0.300	
836.5	20525	LTE B5	10	24.30	23.40	-0.010	0	10 mm (Right)	FCC #1	QPSK	1	25	1:1	0.255	1.230	0.314	
1732.5	20175	LTE B4	20	24.30	23.50	0.020	0	10 mm (Bottom)	FCC #1	QPSK	1	0	1:1	0.399	1.202	0.480	
1732.5	20175	LTE B4	20	23.30	22.03	-0.010	1	10 mm (Bottom)	FCC #1	QPSK	50	0	1:1	0.271	1.340	0.363	
1732.5	20175	LTE B4	20	24.30	23.50	-0.020	0	10 mm (Front)	FCC #1	QPSK	1	0	1:1	0.458	1.202	0.551	
1732.5	20175	LTE B4	20	23.30	22.03	0.020	1	10 mm (Front)	FCC #1	QPSK	50	0	1:1	0.345	1.340	0.462	
1732.5	20175	LTE B4	20	24.30	23.50	-0.040	0	10 mm (Rear)	FCC #1	QPSK	1	0	1:1	0.694	1.202	0.834	A40
1732.5	20175	LTE B4	20	23.30	22.03	-0.030	1	10 mm (Rear)	FCC #1	QPSK	50	0	1:1	0.594	1.340	0.796	
1732.5	20175	LTE B4	20	23.30	21.85	-0.010	1	10 mm (Rear)	FCC #1	QPSK	100	0	1:1	0.526	1.396	0.734	
1732.5	20175	LTE B4	20	24.30	23.50	0.130	0	10 mm (Left)	FCC #1	QPSK	1	0	1:1	0.419	1.202	0.504	
1732.5	20175	LTE B4	20	23.30	22.03	0.060	1	10 mm (Left)	FCC #1	QPSK	50	0	1:1	0.317	1.340	0.425	
1732.5	20175	LTE B5	20	24.30	23.50	-0.050	0	10 mm (Right)	FCC #1	QPSK	1	25	1:1	0.659	1.202	0.792	
1732.5	20175	LTE B4	20	24.30	23.50	0.060	0	10 mm (Right)	FCC #1	QPSK	1	0	1:1	0.661	1.202	0.795	
1860.0	18700	LTE B2	20	24.30	23.59	0.030	0	10 mm (Bottom)	FCC #1	QPSK	1	50	1:1	0.250	1.178	0.295	
1860.0	18700	LTE B2	20	23.30	22.46	0.010	1	10 mm (Bottom)	FCC #1	QPSK	50	25	1:1	0.206	1.213	0.250	
1860.0	18700	LTE B2	20	24.30	23.59	-0.050	0	10 mm (Front)	FCC #1	QPSK	1	50	1:1	0.390	1.178	0.459	
1860.0	18700	LTE B2	20	23.30	22.46	-0.050	1	10 mm (Front)	FCC #1	QPSK	50	25	1:1	0.307	1.213	0.372	
1860.0	18700	LTE B2	20	24.30	23.59	-0.080	0	10 mm (Rear)	FCC #1	QPSK	1	50	1:1	0.660	1.178	0.777	A41
1860.0	18700	LTE B2	20	23.30	22.46	-0.030	1	10 mm (Rear)	FCC #1	QPSK	50	25	1:1	0.507	1.213	0.615	
1860.0	18700	LTE B2	20	24.30	23.59	0.020	0	10 mm (Left)	FCC #1	QPSK	1	50	1:1	0.440	1.178	0.518	
1860.0	18700	LTE B2	20	23.30	22.46	-0.000	1	10 mm (Left)	FCC #1	QPSK	50	25	1:1	0.361	1.213	0.438	
1860.0	18700	LTE B2	20	24.30	23.59	-0.070	0	10 mm (Right)	FCC #1	QPSK	1	50	1:1	0.526	1.178	0.620	
1860.0	18700	LTE B2	20	24.30	23.59	-0.030	0	10 mm (Right)	FCC #1	QPSK	1	50	1:1	0.518	1.178	0.610	
2506.0	39750	LTE B41	20	24.80	22.50	-0.080	0	10 mm (Bottom)	FCC #1	QPSK	1	0	1:1.58	0.078	1.698	0.132	
2506.0	39750	LTE B41	20	23.80	21.46	-0.130	1	10 mm (Bottom)	FCC #1	QPSK	50	0	1:1.58	0.066	1.714	0.113	
2506.0	39750	LTE B41	20	24.80	22.50	-0.010	0	10 mm (Front)	FCC #1	QPSK	1	0	1:1.58	0.282	1.698	0.479	
2506.0	39750	LTE B41	20	23.80	21.46	0.040	1	10 mm (Front)	FCC #1	QPSK	50	0	1:1.58	0.268	1.714	0.460	
2506.0	39750	LTE B41	20	24.80	22.50	-0.010	0	10 mm (Rear)	FCC #1	QPSK	1	0	1:1.58	0.750	1.698	1.274	A42
2506.0	39750	LTE B41	20	23.80	21.46	0.090	1	10 mm (Rear)	FCC #1	QPSK	50	0	1:1.58	0.558	1.714	0.956	
2506.0	39750	LTE B41	20	23.80	21.15	0.120	1	10 mm (Rear)	FCC #1	QPSK	100	0	1:1.58	0.502	1.841	0.924	
2549.5	40185	LTE B41	20	24.80	22.42	0.100	0	10 mm (Rear)	FCC #1	QPSK	1	0	1:1.58	0.722	1.730	1.249	
2549.5	40185	LTE B41	20	23.80	21.40	0.050	1	10 mm (Rear)	FCC #1	QPSK	50	0	1:1.58	0.618	1.738	1.074	
2549.5	40185	LTE B41	20	23.80	21.09	-0.030	1	10 mm (Rear)	FCC #1	QPSK	100	0	1:1.58	0.437	1.866	0.815	
2593.0	40620	LTE B41	20	24.80	22.38	0.100	0	10 mm (Rear)	FCC #1	QPSK	1	0	1:1.58	0.717	1.746	1.252	
2593.0	40620	LTE B41	20	23.80	21.35	0.110	1	10 mm (Rear)	FCC #1	QPSK	50	0	1:1.58	0.608	1.758	1.069	
2593.0	40620	LTE B41	20	23.80	20.99	-0.040	1	10 mm (Rear)	FCC #1	QPSK	100	0	1:1.58	0.453	1.910	0.865	
2636.5	41055	LTE B41	20	24.80	22.35	0.140	0	10 mm (Rear)	FCC #1	QPSK	1	0	1:1.58	0.687	1.758	1.208	
2636.5	41055	LTE B41	20	23.80	21.34	-0.010	1	10 mm (Rear)	FCC #1	QPSK	50	0	1:1.58	0.622	1.762	1.096	
2636.5	41055	LTE B41	20	23.80	20.91	-0.020	1	10 mm (Rear)	FCC #1	QPSK	100	0	1:1.58	0.463	1.945	0.901	
2680.0	41490	LTE B41	20	24.80	22.32	0.140	0	10 mm (Rear)	FCC #1	QPSK	1	0	1:1.58	0.706	1.770	1.250	
2680.0	41490	LTE B41	20	23.80	21.32	-0.090	1	10 mm (Rear)	FCC #1	QPSK	50	0	1:1.58	0.600	1.770	1.062	
2680.0	41490	LTE B41	20	23.80	20.88	0.030	1	10 mm (Rear)	FCC #1	QPSK	100	0	1:1.58	0.481	1.959	0.942	
2506.0	39750	LTE B41	20	24.80	22.50	0.140	0	10 mm (Left)	FCC #1	QPSK	1	0	1:1.58	0.337	1.698	0.572	
2506.0	39750	LTE B41	20	23.80	21.46	0.180	1	10 mm (Left)	FCC #1	QPSK	50	0	1:1.58	0.264	1.714	0.452	
2506.0	39750	LTE B41	20	24.80	22.50	-0.040	0	10 mm (Right)	FCC #1	QPSK	1	0	1:1.58	0.738	1.698	1.253	
2506.0	39750	LTE B41	20	24.80	22.50	-0.040	0	10 mm (Right)	FCC #1	QPSK	1	0	1:1.58	0.737	1.698	1.251	
2506.0	39750	LTE B41	20	24.80	22.50	0.170	0	10 mm (Right)	FCC #1	QPSK	1	0	1:1.58	0.681	1.698	1.156	

ANSI / IEEE C95.1-1992- SAFETY LIMIT  
Spatial Peak  
Uncontrolled Exposure/General Population Exposure

Body  
1.6 W/kg (mW/g)  
averaged over 1 gram

- Note(s):
1. Purple entries represent EB1190 (NFC are not supported.) measurements.
  2. Blue entries represent EB1190NC (NFC and Camera are not supported.) measurements.
  3. Green entries represent headset measurements.

**Table 11.3.3 DTS Hotspot SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	SAR (W/kg)	Plots #
MHz	Ch														
2 437.0	6	802.11b	16.00	14.55	-0.070	10 mm [Top]	FCC #2	0.034	1	97.5	0.037	1.396	1.026	0.053	
2 437.0	6	802.11b	16.00	14.55	-0.090	10 mm [Front]	FCC #2	0.028	1	97.5	0.026	1.396	1.026	0.037	
2 437.0	6	802.11b	16.00	14.55	-0.030	10 mm [Rear]	FCC #2	0.224	1	97.5	0.213	1.396	1.026	0.305	A43
2 437.0	6	802.11b	16.00	14.55	0.060	10 mm [Left]	FCC #2	0.101	1	97.5	0.105	1.396	1.026	0.150	
2 437.0	6	802.11b	16.00	14.55	0.030	10 mm [Rear]	FCC #2	0.169	1	97.5	0.165	1.396	1.026	0.236	
2 437.0	6	802.11b	16.00	14.55	-0.190	10 mm [Rear]	FCC #2	0.140	1	97.5	0.168	1.396	1.026	0.241	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Body 1.6 W/kg (mW/g) averaged over 1 gram				

Note(s):  
 1. Purple entries represent EB1190 (NFC are not supported.) measurements.  
 2. Blue entries represent EB1190NC (NFC and Camera are not supported.) measurements.

Adjusted SAR results for OFDM SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1g Adjusted SAR (W/kg)	Determine OFDM SAR
MHz	Ch											
2 437.0	6	802.11b	DSSS	16.00	0.305	2 437.0	802.11g	OFDM	15.00	0.794	0.242	X
2 437.0	6	802.11b	DSSS	16.00	0.305	2 437.0	802.11n (HT20)	OFDM	15.00	0.794	0.242	X
2 437.0	6	802.11b	DSSS	16.00	0.305	2 437.0	802.11ac (VHT20)	OFDM	15.00	0.794	0.242	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram			

Note: SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

**Table 11.3.4 Bluetooth Hotspot SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
2 441.0	39	Bluetooth	14.30	11.36	0.010	10 mm [Top]	FCC #2	1	76.8	0.017	1.968	1.302	0.044	
2 441.0	39	Bluetooth	14.30	11.36	-0.100	10 mm [Front]	FCC #2	1	76.8	0.013	1.968	1.302	0.033	
2 441.0	39	Bluetooth	14.30	11.36	-0.190	10 mm [Rear]	FCC #2	1	76.8	0.081	1.968	1.302	0.208	A44
2 441.0	39	Bluetooth	14.30	11.36	-0.030	10 mm [Left]	FCC #2	1	76.8	0.054	1.968	1.302	0.138	
2 441.0	39	Bluetooth	14.30	11.36	-0.010	10 mm [Rear]	FCC #2	1	76.8	0.076	1.968	1.302	0.195	
2 441.0	39	Bluetooth	14.30	11.36	0.180	10 mm [Rear]	FCC #2	1	76.8	0.080	1.968	1.302	0.205	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Body 1.6 W/kg (mW/g) averaged over 1 gram			

Note(s):  
 1. Purple entries represent EB1190 (NFC are not supported.) measurements.  
 2. Blue entries represent EB1190NC (NFC and Camera are not supported.) measurements.



### 11.4 Standalone Phablet SAR Results

Per FCC KDB Publication 648474 D04 Handset SAR, Phablet SAR tests were not required when Hotspot 1g SAR (scaled to maximum output power including tolerance) < 1.2 W/kg.

**Table 11.4.1 LTE Phablet SAR**

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	10 g SAR (W/kg)	Scaling Factor	10 g Scaled SAR (W/kg)	Plots #
MHz	Ch																
2 506.0	39750	LTE B41	20	24.80	22.50	0.060	0	0 mm [Bottom]	FCC #1	QPSK	1	0	1:1	0.265	1.698	0.450	
2 506.0	39750	LTE B41	20	23.80	21.46	0.060	1	0 mm [Bottom]	FCC #1	QPSK	50	0	1:1	0.216	1.714	0.370	
2 506.0	39750	LTE B41	20	24.80	22.50	-0.090	0	0 mm [Front]	FCC #1	QPSK	1	0	1:1	0.587	1.698	0.997	
2 506.0	39750	LTE B41	20	23.80	21.46	-0.100	1	0 mm [Front]	FCC #1	QPSK	50	0	1:1	0.479	1.714	0.821	
2 506.0	39750	LTE B41	20	24.80	22.50	0.010	0	0 mm [Rear]	FCC #1	QPSK	1	0	1:1	1.090	1.698	1.851	A45
2 506.0	39750	LTE B41	20	23.80	21.46	-0.020	1	0 mm [Rear]	FCC #1	QPSK	50	0	1:1	0.892	1.714	1.529	
2 506.0	39750	LTE B41	20	24.80	22.50	-0.180	0	0 mm [Left]	FCC #1	QPSK	1	0	1:1	0.746	1.698	1.267	
2 506.0	39750	LTE B41	20	23.80	21.46	-0.110	1	0 mm [Left]	FCC #1	QPSK	50	0	1:1	0.587	1.714	1.006	
2 506.0	39750	LTE B41	20	24.80	22.50	-0.020	0	0 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.910	1.698	1.545	
2 506.0	39750	LTE B41	20	24.80	22.50	0.140	0	0 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.902	1.698	1.532	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure													Phablet 4.0 W/kg (mW/g) averaged over 10 gram				

Note(s):  
 1. Purple entries represent EB1190 (NFC are not supported.) measurements.  
 2. Blue entries represent EB1190NC (NFC and Camera are not supported.) measurements.

**Table 11.4.2 UNII Phablet SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	10g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	10g Scaled SAR (W/kg)	Plots #	
MHz	Ch															
5 290.0	58	802.11ac	16.00	14.78	-0.050	0 mm [Top]	FCC #2	0.022	MCS0	90.5	0.021	1.324	1.105	0.031		
5 290.0	58	802.11ac	16.00	14.78	0.100	0 mm [Front]	FCC #2	0.160	MCS0	90.5	0.179	1.324	1.105	0.262		
5 290.0	58	802.11ac	16.00	14.78	-0.030	0 mm [Rear]	FCC #2	0.603	MCS0	90.5	0.831	1.324	1.105	1.216	A46	
5 290.0	58	802.11ac	16.00	14.78	0.040	0 mm [Left]	FCC #2	0.380	MCS0	90.5	0.717	1.324	1.105	1.049		
5 290.0	58	802.11ac	16.00	14.78	0.170	0 mm [Rear]	FCC #2	0.546	MCS0	90.5	0.688	1.324	1.105	1.007		
5 290.0	58	802.11ac	16.00	14.78	0.130	0 mm [Rear]	FCC #2	0.519	MCS0	90.5	0.679	1.324	1.105	0.993		
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Phablet 4.0 W/kg (mW/g) averaged over 10 gram					

Note(s):  
 1. Purple entries represent EB1190 (NFC are not supported.) measurements.  
 2. Blue entries represent EB1190NC (NFC and Camera are not supported.) measurements.

**Adjusted SAR results for UNII-1 and UNII-2A SAR**

FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	10g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Adjusted Factor	10g Adjusted SAR (W/kg)	SAR for the band with lower maximum output power
MHz	Ch											
5 290.0	58	802.11ac	OFDM	16.0	1.216	5 210.0	802.11ac	OFDM	16.0	1.000	1.216	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Phablet 4.0 W/kg (mW/g) averaged over 10 gram			

Note: U-NII-1 and U-NII-2A Bands: When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 3.0 W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

**Table 11.4.3 UNII Phablet SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	10g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	10g Scaled SAR (W/kg)	Plots #	
MHz	Ch															
5 610.0	122	802.11ac	16.00	15.31	-0.030	0 mm [Top]	FCC #2	0.008	MCS0	90.5	0.004	1.172	1.019	0.005		
5 610.0	122	802.11ac	16.00	15.31	-0.130	0 mm [Front]	FCC #2	0.067	MCS0	90.5	0.053	1.172	1.019	0.063		
5 610.0	122	802.11ac	16.00	15.31	0.170	0 mm [Rear]	FCC #2	0.351	MCS0	90.5	0.460	1.172	1.019	0.549	A47	
5 610.0	122	802.11ac	16.00	15.31	-0.190	0 mm [Left]	FCC #2	0.166	MCS0	90.5	0.447	1.172	1.019	0.534		
5 610.0	122	802.11ac	16.00	15.31	-0.180	0 mm [Rear]	FCC #2	0.227	MCS0	90.5	0.412	1.172	1.019	0.492		
5 610.0	122	802.11ac	16.00	15.31	0.160	0 mm [Rear]	FCC #2	0.236	MCS0	90.5	0.446	1.172	1.019	0.533		
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Phablet 4.0 W/kg (mW/g) averaged over 10 gram					

Note(s):  
 1. Purple entries represent EB1190 (NFC are not supported.) measurements.  
 2. Blue entries represent EB1190NC (NFC and Camera are not supported.) measurements.

## 11.5 Standalone Extremity SAR Results

**Table 11.5.1 NFC Extremity SAR**

MEASUREMENT RESULTS								
FREQUENCY		Mode	Drift Power [dB]	Phantom Position	Device Serial Number	Duty Cycle (%)	10 g SAR (W/kg)	Plots #
MHz	Ch							
13.6	13600	NFC	0.000	0 mm [Top]	FCC #1	100	0.0001	
13.6	13600	NFC	0.000	0 mm [Bottom]	FCC #1	100	0.0010	
13.6	13600	NFC	0.000	0 mm [Front]	FCC #1	100	0.0060	
13.6	13600	NFC	-0.040	0 mm [Rear]	FCC #1	100	<b>0.0160</b>	A48
13.6	13600	NFC	0.000	0 mm [Right]	FCC #1	100	0.0003	
13.6	13600	NFC	0.000	0 mm [Left]	FCC #1	100	0.0001	
ANSI / IEEE C95.1-1992- SAFETY LIMIT						Extremity		
Spatial Peak						4.0 W/kg (mW/g)		
Uncontrolled Exposure/General Population Exposure						averaged over 10 gram		

Note(s):

1. Purple entries represent EB1190 (NFC are not supported.) measurements.
2. Blue entries represent EB1190NC (NFC and Camera are not supported.) measurements.

## 11.6 SAR Test Notes

### General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
2. Batteries are fully charged at the beginning of the SAR measurements. A standard battery was used for all SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
6. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 15 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
7. Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was not > 1.2 W/kg, no additional body-worn SAR evaluations using a headset cable were performed.
8. During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02r01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated.
9. SAR measurements were performed using the DASY5 automated system. The procedure for spatial peak SAR evaluation has been implemented according to the IEEE 1528 standard. During a maximum search, global and local maxima searches are automatically performed in 2-D after each area scan measurement. The algorithm will find the global maximum and all local maxima within 2 dB of the global maxima for all SAR distributions. All local maxima within 2 dB of the global maximum were searched and passed for the Zoom Scan measurement.

### GSM Notes:

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. This device supports GSM VOIP in the head and body-worn configurations; therefore GPRS was additionally evaluated for head and body-worn compliance.
3. Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR.
4. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is not required for such test configuration(s). Since the maximum output power variation across the required test channels is not >  $\frac{1}{2}$  dB, the middle channel was used for testing.

**WCDMA (UMTS) Notes:**

1. WCDMA (UMTS) mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.

**LTE Notes:**

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r05. The general test procedures used for testing can be found in Section 8.4.4.
2. According to FCC KDB 941225 D05v02r05, when the reported SAR is  $\leq 0.8$  W/kg, testing of the 100% RB allocation and required test channels is not required.  
Otherwise, SAR is required for the remaining required test channels using the 1 RB, 50% RB and 100% RB allocation with highest output power for that channel.  
Only one channel, and as reported SAR values for 1 RB allocation and 50% RB allocation were less than 1.45 W/kg only the highest power RB offset for each allocation was required.
3. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36. 101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
4. A-MPR was disabled for all SAR tests by setting NS=1 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
5. Per FCC KDB Publication 447498 D01v06, when the reported (scaled) for LTE Band 41 SAR measured at the highest output power channel in a given a test configuration was  $> 0.6$  W/kg for 1g evaluations, testing at the other channels was required for such test configurations.
6. TDD LTE was tested per the guidance provided in FCC KDB Publication 941225 D05v02r05. Testing was performed using UL-DL configuration 0 with 6 UL sub frames and 2S sub frames using extended cyclic prefix only and special sub frame configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Sec. 4, the duty factor using extended cyclic prefix is 0.633 (cf=1.58).
7. SAR test reduction is applied using the following criteria:  
Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is  $> 0.8$  W/kg, testing for other channels is performed at the highest output power level for 1 RB, and 50% RB configuration for that channel. Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High channel when the highest reported SAR for 1 RB and 50% RB are  $> 0.8$  W/kg, Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation  $< 1.45$  W/kg. Testing for 16QAM modulation is not required because the reported SAR for QPSK is  $< 1.45$  W/kg and its output power is not more than 0.5 dB higher than that a QPSK. Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is  $< 1.45$  W/kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

**WLAN Notes:**

1. The initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4$  W/kg, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is  $\leq 0.8$  W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output and the adjust SAR is  $\leq 1.2$  W/kg.
3. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg.
4. When the maximum reported 1g averaged SAR  $\leq 0.8$  W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was  $\leq 1.20$  W/kg or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor to determine compliance.

**Bluetooth Notes:**

1. Bluetooth SAR was measured with the device connected to a call with hopping disabled with DH5 operation and Tx test mode type. Per October 2016 TCB Workshop Notes, the reported SAR was scaled to the 100% transmission duty factor to determine compliance. Refer to section 9.5 for the time-domain plot and calculation for the duty factor of the device.
2. Head and hotspot Bluetooth SAR were evaluated for BT tethering applications.

## 12. FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

### 12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to handsets with built-in unlicensed transmitters such as 802.11b/g/n and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

### 12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the sum 1-g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is  $\leq 1.6$  W/kg. The different test position in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1-g or 10-g SAR.

### 12.3 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06.

**Table 12.3.1 Simultaneous SAR Cases**

No.	Capable Transmit Configuration	Head SAR	Body-Worn SAR	Hotspot SAR	Phablet SAR	Note
1	GSM Voice + Wi-Fi 2.4 GHz	Yes	Yes	N/A	Yes	
2	GSM Voice + Wi-Fi 5 GHz	Yes	Yes	N/A	Yes	
3	GSM Voice + Bluetooth 2.4 GHz	Yes <sup>A</sup>	Yes	N/A	Yes	<sup>A</sup> Bluetooth Tethering is considered.
4	GSM Voice + Wi-Fi 5 GHz + Bluetooth 2.4 GHz	Yes <sup>A</sup>	Yes	N/A	Yes	<sup>A</sup> Bluetooth Tethering is considered.
5	WCDMA + Wi-Fi 2.4 GHz	Yes	Yes	Yes	Yes	
6	WCDMA + Wi-Fi 5 GHz	Yes	Yes	N/A	Yes	
7	WCDMA + Bluetooth 2.4 GHz	Yes <sup>A</sup>	Yes	Yes	Yes	<sup>A</sup> Bluetooth Tethering is considered.
8	WCDMA + Wi-Fi 5 GHz + Bluetooth 2.4 GHz	Yes <sup>A</sup>	Yes	Yes	Yes	<sup>A</sup> Bluetooth Tethering is considered.
9	LTE + Wi-Fi 2.4 GHz	Yes	Yes	Yes	Yes	
10	LTE + Wi-Fi 5 GHz	Yes	Yes	N/A	Yes	
11	LTE + Bluetooth 2.4 GHz	Yes <sup>A</sup>	Yes	Yes	Yes	<sup>A</sup> Bluetooth Tethering is considered.
12	LTE + Wi-Fi 5 GHz + Bluetooth 2.4 GHz	Yes <sup>A</sup>	Yes	Yes	Yes	<sup>A</sup> Bluetooth Tethering is considered.
13	GPRS + Wi-Fi 2.4 GHz	Yes <sup>*</sup>	Yes <sup>*</sup>	Yes	Yes	<sup>*</sup> Pre-installed VOIP applications are considered.
14	GPRS + Wi-Fi 5 GHz	Yes <sup>*</sup>	Yes <sup>*</sup>	N/A	Yes	<sup>*</sup> Pre-installed VOIP applications are considered.
15	GPRS + Bluetooth 2.4 GHz	Yes <sup>^A</sup>	Yes <sup>*</sup>	Yes	Yes	<sup>*</sup> Pre-installed VOIP applications are considered. <sup>A</sup> Bluetooth Tethering is considered.
16	GPRS + Wi-Fi 5 GHz + Bluetooth 2.4 GHz	Yes <sup>^A</sup>	Yes <sup>*</sup>	Yes	Yes	<sup>*</sup> Pre-installed VOIP applications are considered. <sup>A</sup> Bluetooth Tethering is considered.

Notes:

- WiFi 2.4GHz is supported Hotspot and WiFi-Direct(GO/GC).
- WiFi 5GHz is not supported Hotspot and WiFi-Direct(GO/GC).
- LTE, WCDMA, GPRS is supported Hotspot.
- VoIP is supported in LTE, WCDMA, GSM.
- GSM, WCDMA and LTE can not transmit simultaneously since they share the same chip.

## 12.4 Head SAR Simultaneous Transmission Analysis

**Table 12.4.1 Simultaneous Transmission Scenario (Held to Ear)**

Exp. Con.	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN SAR (W/kg)	5G W-LAN SAR (W/kg)	BT SAR (W/kg)	ΣSAR (W/kg)			
			1	2	3	4	1+2	1+3	1+4	1+3+4
Head SAR	GSM 850	Left Touch	0.335	0.156	0.143	0.031	0.491	0.478	0.366	0.509
		Right Touch	0.315	0.168	0.300	0.120	0.464	0.616	0.437	0.736
		Left Tilt	0.176	0.142	0.085	0.036	0.318	0.281	0.212	0.297
		Right Tilt	0.142	0.198	0.196	0.056	0.340	0.338	0.199	0.395
	GPRS 850	Left Touch	0.309	0.156	0.143	0.031	0.465	0.452	0.340	0.483
		Right Touch	0.301	0.168	0.300	0.120	0.468	0.601	0.421	0.721
		Left Tilt	0.164	0.142	0.085	0.036	0.306	0.249	0.200	0.285
		Right Tilt	0.132	0.198	0.196	0.056	0.330	0.328	0.189	0.385
	GSM 1900	Left Touch	0.345	0.156	0.143	0.031	0.501	0.489	0.376	0.520
		Right Touch	0.205	0.168	0.300	0.120	0.372	0.505	0.325	0.625
		Left Tilt	0.098	0.142	0.085	0.036	0.240	0.183	0.134	0.219
		Right Tilt	0.088	0.198	0.196	0.056	0.285	0.284	0.144	0.340
	GPRS 1900	Left Touch	0.402	0.156	0.143	0.031	0.558	0.545	0.433	0.576
		Right Touch	0.218	0.168	0.300	0.120	0.386	0.518	0.339	0.638
		Left Tilt	0.089	0.142	0.085	0.036	0.231	0.174	0.125	0.210
		Right Tilt	0.077	0.198	0.196	0.056	0.275	0.274	0.134	0.330
	WCDMA 850	Left Touch	0.233	0.156	0.143	0.031	0.389	0.376	0.264	0.407
		Right Touch	0.441	0.168	0.300	0.120	0.608	0.741	0.561	0.861
		Left Tilt	0.136	0.142	0.085	0.036	0.278	0.221	0.172	0.257
		Right Tilt	0.150	0.198	0.196	0.056	0.347	0.346	0.208	0.402
	WCDMA 1700	Left Touch	0.505	0.156	0.143	0.031	0.661	0.648	0.538	0.679
		Right Touch	0.238	0.168	0.300	0.120	0.405	0.538	0.358	0.658
		Left Tilt	0.176	0.142	0.085	0.036	0.317	0.260	0.212	0.296
		Right Tilt	0.127	0.198	0.196	0.056	0.325	0.323	0.183	0.379
	WCDMA 1900	Left Touch	0.773	0.156	0.143	0.031	0.929	0.916	0.804	0.947
		Right Touch	0.161	0.168	0.300	0.120	0.329	0.461	0.282	0.581
		Left Tilt	0.254	0.142	0.085	0.036	0.396	0.339	0.290	0.375
		Right Tilt	0.139	0.198	0.196	0.056	0.337	0.335	0.196	0.392
	LTE Band 12	Left Touch	0.058	0.156	0.143	0.031	0.214	0.201	0.089	0.232
		Right Touch	0.157	0.168	0.300	0.120	0.325	0.457	0.278	0.578
		Left Tilt	0.040	0.142	0.085	0.036	0.182	0.125	0.076	0.161
		Right Tilt	0.026	0.198	0.196	0.056	0.224	0.222	0.083	0.279
	LTE Band 5	Left Touch	0.150	0.156	0.143	0.031	0.306	0.293	0.181	0.324
		Right Touch	0.260	0.168	0.300	0.120	0.427	0.559	0.380	0.680
		Left Tilt	0.076	0.142	0.085	0.036	0.218	0.161	0.112	0.197
		Right Tilt	0.065	0.198	0.196	0.056	0.263	0.261	0.122	0.318
	LTE Band 4	Left Touch	0.440	0.156	0.143	0.031	0.596	0.583	0.471	0.614
		Right Touch	0.163	0.168	0.300	0.120	0.331	0.463	0.284	0.584
		Left Tilt	0.171	0.142	0.085	0.036	0.312	0.256	0.207	0.291
		Right Tilt	0.167	0.198	0.196	0.056	0.365	0.363	0.223	0.419
	LTE Band 2	Left Touch	0.529	0.156	0.143	0.031	0.685	0.672	0.560	0.703
		Right Touch	0.180	0.168	0.300	0.120	0.348	0.480	0.301	0.601
		Left Tilt	0.167	0.142	0.085	0.036	0.309	0.252	0.203	0.288
		Right Tilt	0.188	0.198	0.196	0.056	0.386	0.385	0.245	0.441
	LTE Band 41	Left Touch	0.302	0.156	0.143	0.031	0.458	0.446	0.333	0.476
		Right Touch	0.209	0.168	0.300	0.120	0.376	0.509	0.329	0.629
		Left Tilt	0.144	0.142	0.085	0.036	0.286	0.229	0.180	0.265
		Right Tilt	0.124	0.198	0.196	0.056	0.322	0.320	0.180	0.376

## 12.5 Body-Worn Simultaneous Transmission Analysis

**Table 12.5.1 Simultaneous Transmission Scenario (Body-Worn at 15 mm)**

Exp. Con.	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN SAR (W/kg)	5G W-LAN SAR (W/kg)	BT SAR (W/kg)	ΣSAR (W/kg)			
			1	2	3	4	1+2	1+3	1+4	1+3+4
Body-Worn SAR	GSM 850	Front	0.196	0.019	0.056	0.010	0.215	0.252	0.208	0.262
		Rear	0.255	0.136	0.435	0.090	0.391	0.689	0.345	0.779
	GPRS 850	Front	0.183	0.019	0.056	0.010	0.201	0.238	0.193	0.249
		Rear	0.245	0.136	0.435	0.090	0.381	0.679	0.335	0.769
	GSM 1900	Front	0.214	0.019	0.056	0.010	0.233	0.270	0.224	0.280
		Rear	0.295	0.136	0.435	0.090	0.431	0.730	0.385	0.820
	GPRS 1900	Front	0.274	0.019	0.056	0.010	0.293	0.330	0.284	0.340
		Rear	0.336	0.136	0.435	0.090	0.472	0.770	0.425	0.860
	WCDMA 850	Front	0.218	0.019	0.056	0.010	0.236	0.273	0.228	0.284
		Rear	0.259	0.136	0.435	0.090	0.395	0.694	0.349	0.784
	WCDMA 1700	Front	0.280	0.019	0.056	0.010	0.299	0.336	0.291	0.346
		Rear	0.515	0.136	0.435	0.090	0.651	0.950	0.605	1.039
	WCDMA 1900	Front	0.373	0.019	0.056	0.010	0.392	0.429	0.384	0.439
		Rear	0.451	0.136	0.435	0.090	0.587	0.885	0.540	0.975
	LTE Band 12	Front	0.062	0.019	0.056	0.010	0.081	0.118	0.072	0.128
		Rear	0.138	0.136	0.435	0.090	0.274	0.573	0.228	0.662
	LTE Band 5	Front	0.231	0.019	0.056	0.010	0.250	0.287	0.241	0.297
		Rear	0.285	0.136	0.435	0.090	0.421	0.720	0.375	0.810
	LTE Band 4	Front	0.464	0.019	0.056	0.010	0.483	0.520	0.474	0.530
		Rear	0.650	0.136	0.435	0.090	0.786	1.085	0.740	1.174
	LTE Band 2	Front	0.412	0.019	0.056	0.010	0.431	0.468	0.423	0.478
		Rear	0.576	0.136	0.435	0.090	0.712	1.011	0.666	1.100
	LTE Band 41	Front	0.290	0.019	0.056	0.010	0.309	0.346	0.301	0.356
		Rear	0.550	0.136	0.435	0.090	0.686	0.985	0.640	1.074

## 12.6 Hotspot SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 941225 D06v02r01, the device edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR ("--").

**Table 12.6.1 Simultaneous Transmission Scenario (Hotspot at 10 mm)**

Exp. Con.	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN SAR (W/kg)	BT SAR (W/kg)	ΣSAR (W/kg)	
			1	2	3	1+2	1+3
Hotspot SAR	GSM 850	Top	-	0.053	0.044	0.053	0.044
		Bottom	0.272	-	-	0.272	-
		Front	0.304	0.037	0.033	0.341	0.337
		Rear	0.491	0.305	0.208	0.796	0.698
		Right	-	-	-	0.000	0.000
	Left	0.245	0.150	0.138	0.395	0.383	
	GPRS 850	Top	-	0.053	0.044	0.053	0.044
		Bottom	0.251	-	-	0.251	0.251
		Front	0.474	0.037	0.033	0.511	0.507
		Rear	0.779	0.305	0.208	1.084	0.987
		Right	-	-	-	0.000	0.000
	Left	0.531	0.150	0.138	0.681	0.669	
	GSM 1900	Top	-	0.053	0.044	0.053	0.044
		Bottom	0.371	-	-	0.371	0.371
		Front	0.383	0.037	0.033	0.400	0.396
		Rear	0.466	0.305	0.208	0.771	0.673
		Right	-	-	-	0.000	0.000
	Left	0.256	0.150	0.138	0.406	0.394	
	GPRS 1900	Top	-	0.053	0.044	0.053	0.044
		Bottom	0.494	-	-	0.494	0.494
		Front	0.664	0.037	0.033	0.701	0.698
		Rear	0.956	0.305	0.208	1.261	1.164
		Right	-	-	-	0.000	0.000
	Left	0.565	0.150	0.138	0.716	0.704	
	WCDMA 850	Top	-	0.053	0.044	0.053	0.044
		Bottom	0.397	-	-	0.397	0.397
		Front	0.838	0.037	0.033	0.875	0.871
		Rear	1.123	0.305	0.208	1.428	1.331
		Right	-	-	-	0.000	0.000
	Left	0.812	0.150	0.138	0.962	0.950	
	WCDMA 1700	Top	-	0.053	0.044	0.053	0.044
		Bottom	0.080	-	-	0.080	0.080
		Front	0.075	0.037	0.033	0.112	0.108
		Rear	0.264	0.305	0.208	0.569	0.471
		Right	-	-	-	0.000	0.000
	Left	0.104	0.150	0.138	0.254	0.242	
	WCDMA 1900	Top	-	0.053	0.044	0.053	0.044
		Bottom	0.203	-	-	0.203	0.203
		Front	0.255	0.037	0.033	0.292	0.288
		Rear	0.341	0.305	0.208	0.646	0.548
		Right	-	-	-	0.000	0.000
	Left	0.271	0.150	0.138	0.421	0.409	
	LTE Band 12	Top	-	0.053	0.044	0.053	0.044
		Bottom	0.480	-	-	0.480	0.480
		Front	0.551	0.037	0.033	0.588	0.584
		Rear	0.834	0.305	0.208	1.139	1.042
		Right	-	-	-	0.000	0.000
	Left	0.504	0.150	0.138	0.654	0.642	
	LTE Band 5	Top	-	0.053	0.044	0.053	0.044
		Bottom	0.295	-	-	0.295	0.295
		Front	0.459	0.037	0.033	0.497	0.493
		Rear	0.777	0.305	0.208	1.082	0.985
		Right	-	-	-	0.000	0.000
	Left	0.518	0.150	0.138	0.669	0.657	
	LTE Band 4	Top	-	0.053	0.044	0.053	0.044
		Bottom	0.132	-	-	0.132	0.132
		Front	0.479	0.037	0.033	0.516	0.512
		Rear	1.274	0.305	0.208	1.578	1.481
		Right	-	-	-	0.000	0.000
	Left	0.572	0.150	0.138	0.723	0.711	
LTE Band 2	Top	-	0.053	0.044	0.053	0.044	
	Bottom	0.272	-	-	0.272	0.272	
	Front	0.304	0.037	0.033	0.341	0.337	
	Rear	0.491	0.305	0.208	0.796	0.698	
	Right	-	-	-	0.000	0.000	
Left	0.245	0.150	0.138	0.395	0.383		
LTE Band 41	Top	-	0.053	0.044	0.053	0.044	
	Bottom	0.251	-	-	0.251	0.251	
	Front	0.474	0.037	0.033	0.511	0.507	
	Rear	0.779	0.305	0.208	1.084	0.987	
	Right	-	-	-	0.000	0.000	
Left	0.531	0.150	0.138	0.681	0.669		

## 12.7 Phablet SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 648474 D04 Handset SAR, Phablet SAR tests were not required of Hotspot 1g SAR (scaled to maximum output power, including tolerance) < 1.2 W/kg.

**Table 12.7.1 Simultaneous Transmission Scenario (Phablet at 0 mm)**

Exp. Con.	Mode	Configuration	4G SAR (W/kg)	5G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+3
Phablet SAR	LTE Band 41	Top	-	0.031	0.031
		Bottom	0.450	-	0.450
		Front	0.997	0.262	1.259
		Rear	1.851	1.216	3.067
		Right	-	-	0.000
		Left	1.267	1.049	2.316

## 12.8 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528-2013 Section 6.3.4.1.2.



---

## 13. SAR MEASUREMENT VARIABILITY

---

### 13.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

1. When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.
2. A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg (~10% from the 1-g SAR limit).
3. A third repeated measurement was performed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .
4. Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg
5. The same procedures should be adapted for measurements according to extremity exposure limits by applying a factor of 2.5 for extremity exposure to the corresponding SAR thresholds.

### 13.2 Measurement Uncertainty

The measured SAR was  $< 1.5$  W/kg for 1g and  $< 3.75$  W/kg for 10g for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

## 14. EQUIPMENT LIST

**Table 14.1 Test Equipment Calibration**

Type	Manufacturer	Model	Cal.Date	Next.Cal.Date	S/N
<input checked="" type="checkbox"/> SEMITEC Engineering	SEMITEC	N/A	N/A	N/A	Shield Room
<input checked="" type="checkbox"/> Robot	SPEAG	TX90XL	N/A	N/A	F13/5RR2A1/A/01
<input checked="" type="checkbox"/> Robot Controller	SPEAG	CS8C	N/A	N/A	F13/5RR2A1/C/01
<input checked="" type="checkbox"/> Joystick	SPEAG	N/A	N/A	N/A	S-13200990
<input checked="" type="checkbox"/> Intel Core i7-3 770 3.40 GHz Windows 7 Professional	N/A	N/A	N/A	N/A	N/A
<input checked="" type="checkbox"/> Probe Alignment Unit LB	N/A	N/A	N/A	N/A	SE UKS 030 AA
<input checked="" type="checkbox"/> Device Holder	SPEAG	SD000H01KA	N/A	N/A	N/A
<input checked="" type="checkbox"/> 2mm Oval Phantom ELI5	SPEAG	QDIVA001BB	N/A	N/A	1223
<input checked="" type="checkbox"/> Twin SAM Phantom	SPEAG	QD000P40CD	N/A	N/A	1785
<input checked="" type="checkbox"/> Data Acquisition Electronics	SPEAG	DAE4V1	2024-04-30	2025-04-30	1396
<input checked="" type="checkbox"/> Dosimetric E-Field Probe	SPEAG	EX3DV4	2023-10-26	2024-10-26	3933
<input checked="" type="checkbox"/> Confined Loop Antenna (13 MHz)	SPEAG	CLA13	2023-11-14	2024-11-14	1030
<input checked="" type="checkbox"/> 750 MHz SAR Dipole	SPEAG	D750V3	2024-03-20	2026-03-20	1049
<input checked="" type="checkbox"/> 835 MHz SAR Dipole	SPEAG	D835V2	2024-03-20	2026-03-20	44159
<input checked="" type="checkbox"/> 1 800MHz SAR Dipole	SPEAG	D1800V2	2024-01-25	2026-01-25	24202
<input checked="" type="checkbox"/> 1 900 MHz SAR Dipole	SPEAG	D1900V2	2024-03-13	2026-03-13	54176
<input checked="" type="checkbox"/> 2 450 MHz SAR Dipole	SPEAG	D2450V2	2023-07-19	2025-07-19	726
<input checked="" type="checkbox"/> 2 600MHz SAR Dipole	SPEAG	D2600V2	2023-11-22	2025-11-22	1016
<input checked="" type="checkbox"/> 5 GHz SAR Dipole	SPEAG	D5GHZV2	2023-11-23	2025-11-23	1212
<input checked="" type="checkbox"/> Signal Generator	Agilent	E4438C	2023-06-23	2024-06-23	US41461520
<input checked="" type="checkbox"/> Broadband Amplifier	SUNGSAN	SA1077	2023-12-15	2024-12-15	SA1077-001
<input checked="" type="checkbox"/> Amplifier	EMPOWER	BBS3Q7ELU	2023-06-23	2024-06-23	1020
<input checked="" type="checkbox"/> High Power RF Amplifier	EMPOWER	BBS3Q8CCJ	2023-06-23	2024-06-23	1005
<input checked="" type="checkbox"/> Power Meter	HP	EPM-442A	2023-12-15	2024-12-15	GB37170267
<input checked="" type="checkbox"/> Power Meter	Anritsu	ML2488B	2023-12-15	2024-12-15	0846003
<input checked="" type="checkbox"/> Power Sensor	Anritsu	MA2472D	2023-12-15	2024-12-15	0845419
<input checked="" type="checkbox"/> Power Sensor	HP	8481A	2023-12-15	2024-12-15	2702A65976
<input checked="" type="checkbox"/> Power Sensor	HP	8481A	2023-12-15	2024-12-15	2702A61707
<input checked="" type="checkbox"/> Dual Directional Coupler	Agilent	778D-012	2023-12-15	2024-12-15	50399
<input checked="" type="checkbox"/> Directional Coupler	HP	772D	2023-12-15	2024-12-15	2839A00902
<input checked="" type="checkbox"/> Low Pass Filter 1 GHz	Wainwright Instruments	WLK6-1000-1400-9000-60SS	2023-06-23	2024-06-23	165
<input checked="" type="checkbox"/> Low Pass Filter 1.5 GHz	Micro LAB	LA-15N	2023-06-23	2024-06-23	2
<input checked="" type="checkbox"/> Low Pass Filter 3.0 GHz	MICROLAB	LA-30N	2023-06-23	2024-06-23	2
<input checked="" type="checkbox"/> Low Pass Filter 6.0 GHz	MICROLAB	LA-60N	2023-12-15	2024-12-15	03942
<input checked="" type="checkbox"/> Mini Circuits Low Pass Filter DC-8 400 MHz	Mini Circuits	VLF-8400+	2023-12-15	2024-12-15	15542
<input checked="" type="checkbox"/> Attenuators(10 dB)	WEINSCHEL	23-10-34	2023-12-15	2024-12-15	BP4387
<input checked="" type="checkbox"/> Attenuators	Saluki	3.5TS2-3dB-26.5G	2023-06-23	2024-06-23	21090703
<input checked="" type="checkbox"/> Dielectric Probe kit	SPEAG	DAKS-12	2023-09-21	2024-09-21	1040
<input checked="" type="checkbox"/> Dielectric Probe kit	SPEAG	R60	2023-09-21	2024-09-21	22323001
<input checked="" type="checkbox"/> Dielectric Probe kit	SPEAG	DAK-3.5	2023-07-17	2024-07-17	1046
<input checked="" type="checkbox"/> Dielectric Probe kit	SPEAG	R140	2023-07-31	2024-07-31	0101213
<input checked="" type="checkbox"/> 8960 Series 10 Wireless Comms. Test Set	Agilent	E5515C	2023-06-23	2024-06-23	GB41321164
<input checked="" type="checkbox"/> Wideband Radio Communication Tester	Rohde Schwarz	CMW500	2023-12-15	2024-12-15	101414
<input checked="" type="checkbox"/> Wideband Radio Communication Tester	Rohde Schwarz	CMW500	2023-12-15	2024-12-15	166448
<input checked="" type="checkbox"/> Bluetooth Tester	TESCOM	TC-3000C	2023-06-23	2024-06-23	3000C000563

**NOTE(S):**

1. The E-field probe was calibrated by SPEAG, by temperature measurement procedure. Dipole Verification measurement is performed by Dt&C before each test. The brain and muscle simulating material are calibrated by Dt&C using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain and muscle-equivalent material. Each equipment item was used solely within its respective calibration period.

2. CBT(Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

## 15. MEASUREMENT UNCERTAINTIES

### 750 ~ 2 600 MHz Head (SN: 3933)

Error Description	Uncertainty value %	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g (%)	Standard 10 g (%)	Ci x U <sub>i</sub> 1 g	Ci x U <sub>i</sub> 10 g	vi 2 or Veff
<b>Measurement System</b>										
Probe calibration	6.0	Normal	1	1	1	6.0	6.0	6.0	6.0	∞
Axial isotropy	4.7	Rectangular	√3	1	1	2.7	2.7	2.7	2.7	∞
Hemispherical isotropy	9.6	Rectangular	√3	1	1	5.5	5.5	5.5	5.5	∞
Boundary Effects	0.8	Rectangular	√3	1	1	0.46	0.46	0.46	0.46	∞
Probe Linearity	4.7	Rectangular	√3	1	1	2.7	2.7	2.7	2.7	∞
Probe modulation response	2.4	Rectangular	√3	1	1	1.4	1.4	1.4	1.4	∞
Detection limits	0.25	Rectangular	√3	1	1	0.14	0.14	0.14	0.14	∞
Readout Electronics	1.0	Normal	1	1	1	1.0	1.0	1.0	1.0	∞
Response time	0.8	Rectangular	√3	1	1	0.46	0.46	0.46	0.46	∞
Integration time	2.6	Rectangular	√3	1	1	1.5	1.5	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	√3	1	1	1.8	1.8	1.8	1.8	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	√3	1	1	1.8	1.8	1.8	1.8	∞
Probe Positioner	0.4	Rectangular	√3	1	1	0.23	0.23	0.23	0.23	∞
Probe Positioning	2.9	Rectangular	√3	1	1	1.7	1.7	1.7	1.7	∞
Spatial x-y-Resolution	10.0	Rectangular	√3	1	1	5.8	5.8	5.8	5.8	∞
Fast SAR z-Approximation	7.0	Rectangular	√3	1	1	4.0	4.0	4.0	4.0	∞
<b>Test Sample Related</b>										
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	3.6	3.6	5
Power Drift	5.0	Rectangular	√3	1	1	2.9	2.9	2.9	2.9	∞
SAR Scaling	2.0	Rectangular	√3	1	1	1.2	1.2	1.2	1.2	∞
<b>Physical Parameters</b>										
Phantom Shell	7.6	Rectangular	√3	1	1	4.4	4.4	4.4	4.4	∞
Liquid conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	1.8	1.2	1.2	0.5	∞
Liquid conductivity (Meas.)	3.9	Normal	1	0.78	0.71	3.0	2.8	2.4	2.0	10
Liquid permittivity (Target)	5.0	Rectangular	√3	0.60	0.49	1.7	1.4	1.0	0.7	∞
Liquid permittivity (Meas.)	4.0	Normal	1	0.23	0.26	0.92	1.0	0.21	0.27	10
Temp. unc. - Conductivity	2.0	Rectangular	√3	0.78	0.71	0.90	0.82	0.70	0.58	∞
Temp. unc. - Permittivity	1.8	Rectangular	√3	0.23	0.26	0.24	0.27	0.05	0.07	∞
<b>Combined Standard Uncertainty</b>						<b>13</b>	<b>13</b>			<b>330</b>
<b>Expanded Uncertainty (k=2)</b>						<b>26</b>	<b>26</b>			

$$\begin{aligned}
 U(1\text{ g}) &= k \cdot u_c \\
 &= 2 \cdot 13\% \\
 &= 26\% \text{ (The confidence level is about 95\% } k=2) \\
 U(10\text{ g}) &= k \cdot u_c \\
 &= 2 \cdot 13\% \\
 &= 26\% \text{ (The confidence level is about 95\% } k=2)
 \end{aligned}$$

**3 500 ~ 5 800 MHz SAR (SN: 3933)**

Error Description	Uncertainty value %	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g (%)	Standard 10 g (%)	Ci x U <sub>i</sub> 1 g	Ci x U <sub>i</sub> 10 g	Vi or Veff
<b>Measurement System</b>										
Probe calibration	6.6	Normal	1	1	1	6.6	6.6	6.6	6.6	∞
Axial isotropy	4.7	Rectangular	√3	1	1	2.7	2.7	2.7	2.7	∞
Hemispherical isotropy	9.6	Rectangular	√3	1	1	5.5	5.5	5.5	5.5	∞
Boundary Effects	0.8	Rectangular	√3	1	1	0.46	0.46	0.46	0.46	∞
Probe Linearity	4.7	Rectangular	√3	1	1	2.7	2.7	2.7	2.7	∞
Probe modulation response	2.4	Rectangular	√3	1	1	1.4	1.4	1.4	1.4	∞
Detection limits	0.25	Rectangular	√3	1	1	0.14	0.14	0.14	0.14	∞
Readout Electronics	1.0	Normal	1	1	1	1.0	1.0	1.0	1.0	∞
Response time	0.8	Rectangular	√3	1	1	0.46	0.46	0.46	0.46	∞
Integration time	2.6	Rectangular	√3	1	1	1.5	1.5	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	√3	1	1	1.8	1.8	1.8	1.8	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	√3	1	1	1.8	1.8	1.8	1.8	∞
Probe Positioner	0.4	Rectangular	√3	1	1	0.23	0.23	0.23	0.23	∞
Probe Positioning	2.9	Rectangular	√3	1	1	1.7	1.7	1.7	1.7	∞
Spatial x-y-Resolution	10.0	Rectangular	√3	1	1	5.8	5.8	5.8	5.8	∞
Fast SAR z-Approximation	7.0	Rectangular	√3	1	1	4.0	4.0	4.0	4.0	∞
<b>Test Sample Related</b>										
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	3.6	3.6	5
Power Drift	5.0	Rectangular	√3	1	1	2.9	2.9	2.9	2.9	∞
SAR Scaling	2.0	Rectangular	√3	1	1	1.2	1.2	1.2	1.2	∞
<b>Physical Parameters</b>										
Phantom Shell	7.6	Rectangular	√3	1	1	4.4	4.4	4.4	4.4	∞
Liquid conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	1.8	1.2	1.2	0.5	∞
Liquid conductivity (Meas.)	3.8	Normal	1	0.78	0.71	3.0	2.7	2.3	1.9	10
Liquid permittivity (Target)	5.0	Rectangular	√3	0.60	0.49	1.7	1.4	1.0	0.7	∞
Liquid permittivity (Meas.)	3.9	Normal	1	0.23	0.26	0.90	1.0	0.21	0.26	10
Temp. unc. - Conductivity	2.0	Rectangular	√3	0.78	0.71	0.90	0.82	0.70	0.58	∞
Temp. unc. - Permittivity	1.8	Rectangular	√3	0.23	0.26	0.24	0.27	0.05	0.07	∞
<b>Combined Standard Uncertainty</b>						<b>14</b>	<b>13</b>			<b>330</b>
<b>Expanded Uncertainty (k=2)</b>						<b>28</b>	<b>26</b>			

$$U(1\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 14\%$$

$$= 28\% \text{ (The confidence level is about 95\% } k=2)$$

$$U(10\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13\%$$

$$= 26\% \text{ (The confidence level is about 95\% } k=2)$$

**13 MHz Head (SN: 3933)**

Error Description	Uncertainty value %	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g (%)	Standard 10 g (%)	Ci x U <sub>i</sub> 1 g	Ci x U <sub>i</sub> 10 g	vi 2 or Veff
<b>Measurement System</b>										
Probe calibration	6.7	Normal	1	1	1	6.7	6.7	6.7	6.7	∞
Axial isotropy	4.7	Rectangular	√3	1	1	2.7	2.7	2.7	2.7	∞
Hemispherical isotropy	9.6	Rectangular	√3	1	1	5.5	5.5	5.5	5.5	∞
Boundary Effects	0.8	Rectangular	√3	1	1	0.46	0.46	0.46	0.46	∞
Probe Linearity	4.7	Rectangular	√3	1	1	2.7	2.7	2.7	2.7	∞
Probe modulation response	2.4	Rectangular	√3	1	1	1.4	1.4	1.4	1.4	∞
Detection limits	0.3	Rectangular	√3	1	1	0.14	0.14	0.14	0.14	∞
Readout Electronics	1.0	Normal	1	1	1	1.0	1.0	1.0	1.0	∞
Response time	0.8	Rectangular	√3	1	1	0.46	0.46	0.46	0.46	∞
Integration time	2.6	Rectangular	√3	1	1	1.5	1.5	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	√3	1	1	1.8	1.8	1.8	1.8	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	√3	1	1	1.8	1.8	1.8	1.8	∞
Probe Positioner	0.4	Rectangular	√3	1	1	0.23	0.23	0.23	0.23	∞
Probe Positioning	2.9	Rectangular	√3	1	1	1.7	1.7	1.7	1.7	∞
Spatial x-y-Resolution	10.0	Rectangular	√3	1	1	5.8	5.8	5.8	5.8	∞
Fast SAR z-Approximation	7.0	Rectangular	√3	1	1	4.0	4.0	4.0	4.0	∞
<b>Test Sample Related</b>										
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	3.6	3.6	5
Power Drift	5.0	Rectangular	√3	1	1	2.9	2.9	2.9	2.9	∞
SAR Scaling	2.0	Rectangular	√3	1	1	1.2	1.2	1.2	1.2	∞
<b>Physical Parameters</b>										
Phantom Shell	7.6	Rectangular	√3	1	1	4.4	4.4	4.4	4.4	∞
Liquid conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	1.8	1.2	1.2	0.5	∞
Liquid conductivity (Meas.)	3.5	Normal	1	0.78	0.71	2.7	2.5	2.1	1.8	10
Liquid permittivity (Target)	5.0	Rectangular	√3	0.60	0.49	1.7	1.4	1.0	0.7	∞
Liquid permittivity (Meas.)	3.8	Normal	1	0.23	0.26	0.87	1.0	0.20	0.26	10
Temp. unc. - Conductivity	1.9	Rectangular	√3	0.78	0.71	0.86	0.78	0.67	0.55	∞
Temp. unc. - Permittivity	2.0	Rectangular	√3	0.23	0.26	0.27	0.30	0.06	0.08	∞
<b>Combined Standard Uncertainty</b>						<b>14</b>	<b>14</b>			<b>330</b>
<b>Expanded Uncertainty (k=2)</b>						<b>28</b>	<b>28</b>			

$$U(1\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 14\%$$

= 28 % (The confidence level is about 95 % k= 2)

$$U(10\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 14\%$$

= 28 % (The confidence level is about 95 % k= 2)

## 16. CONCLUSION

---

### Measurement Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC. These measurements are taken to simulate the RF effects exposure under the worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are every complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role impossible biological effect are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease).

Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

---

## 17. REFERENCES

---

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid& Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct.1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bio electromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computer mathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.

- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3 GHz), Feb. 2005.
- [21] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radio communication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225,D01-D07
- [24] SAR Measurement procedures for IEEE 802.11a/b/g KDB Publication 248227 D01v02
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474D02-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] 615223 D01 802 16e WI-Max SAR Guidance v01, Nov. 13, 2009
- [30] Anexo à Resolução No. 533, de 10 de September de 2009.
- [31] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body(frequency range of 30 MHz to 6 GHz), Mar. 2010.



## APPENDIX A. – Probe Calibration Data

**Calibration Laboratory of**  
 Schmid & Partner  
 Engineering AG  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client **Dt&C**  
 Gyeonggi-do, Republic of Korea

Certificate No. **EX-3933\_Oct23**

### CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3933**  
 Calibration procedure(s) **QA CAL-01.v10, QA CAL-12.v10, QA CAL-14.v7, QA CAL-23.v6,  
 QA CAL-25.v8  
 Calibration procedure for dosimetric E-field probes**  
 Calibration date **October 26, 2023**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.  
 All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^\circ\text{C}$  and humidity  $< 70\%$ .  
 Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP2	SN: 104778	30-Mar-23 (No. 217-03804/03805)	Mar-24
Power sensor NRP-Z91	SN: 103244	30-Mar-23 (No. 217-03804)	Mar-24
OCP DAK-3.5 (weighted)	SN: 1249	05-Oct-23 (OCP-DAK3.5-1249_Oct23)	Oct-24
OCP DAK-12	SN: 1016	05-Oct-23 (OCP-DAK12-1016_Oct23)	Oct-24
Reference 20 dB Attenuator	SN: CC2552 (20x)	30-Mar-23 (No. 217-03809)	Mar-24
DAE4	SN: 660	16-Mar-23 (No. DAE4-660_Mar23)	Mar-24
Reference Probe ES3DV2	SN: 3013	06-Jan-23 (No. ES3-3013_Jan23)	Jan-24

Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-22)	In house check: Jun-24
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-22)	In house check: Oct-24

	Name	Function	Signature
Calibrated by	Jeton Kastrati	Laboratory Technician	
Approved by	Sven Kühn	Technical Manager	

Issued: October 27, 2023  
 This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**

Zeughausstrasse 43, 8004 Zürich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

### Glossary

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

### Calibration is Performed According to the Following Standards:

- IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices – Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal. DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

EX3DV4 - SN:3933

October 26, 2023

## Parameters of Probe: EX3DV4 - SN:3933

### Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k = 2)
Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup>	0.56	0.63	0.64	±10.1%
DCP (mV) <sup>B</sup>	109.0	111.8	105.5	±4.7%

### Calibration Results for Modulation Response

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Max dev.	Max Unc <sup>E</sup> k = 2
0	CW	X	0.00	0.00	1.00	0.00	133.6	±3.5%	±4.7%
		Y	0.00	0.00	1.00		143.0		
		Z	0.00	0.00	1.00		146.7		
10352	Pulse Waveform (200Hz, 10%)	X	1.60	60.82	6.24	10.00	60.0	±3.0%	±9.6%
		Y	2.00	62.00	7.00		60.0		
		Z	1.52	60.40	6.12		60.0		
10353	Pulse Waveform (200Hz, 20%)	X	0.84	60.00	4.74	6.99	80.0	±2.6%	±9.6%
		Y	0.84	60.00	5.07		80.0		
		Z	0.81	60.00	4.71		80.0		
10354	Pulse Waveform (200Hz, 40%)	X	0.47	60.00	3.50	3.98	95.0	±3.0%	±9.6%
		Y	0.09	129.13	0.05		95.0		
		Z	0.17	142.51	0.30		95.0		
10355	Pulse Waveform (200Hz, 60%)	X	9.05	83.38	0.25	2.22	120.0	±1.7%	±9.6%
		Y	7.48	159.24	23.92		120.0		
		Z	6.71	159.90	16.30		120.0		
10387	QPSK Waveform, 1 MHz	X	0.75	67.64	14.28	1.00	150.0	±4.6%	±9.6%
		Y	0.44	60.94	10.08		150.0		
		Z	0.46	61.48	10.64		150.0		
10388	QPSK Waveform, 10 MHz	X	1.52	67.62	15.01	0.00	150.0	±1.2%	±9.6%
		Y	1.15	63.61	12.47		150.0		
		Z	1.20	64.32	12.77		150.0		
10396	64-QAM Waveform, 100 kHz	X	1.84	66.33	16.86	3.01	150.0	±1.1%	±9.6%
		Y	1.70	64.66	15.84		150.0		
		Z	1.61	63.88	15.65		150.0		
10399	64-QAM Waveform, 40 MHz	X	2.93	66.91	15.46	0.00	150.0	±2.4%	±9.6%
		Y	2.79	66.02	14.73		150.0		
		Z	2.71	65.66	14.59		150.0		
10414	WLAN CCDF, 64-QAM, 40 MHz	X	3.94	66.29	15.49	0.00	150.0	±4.2%	±9.6%
		Y	3.81	65.79	15.01		150.0		
		Z	3.84	66.21	15.22		150.0		

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Page 5).

<sup>B</sup> Linearization parameter uncertainty for maximum specified field strength.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4 - SN:3933

October 26, 2023

### Parameters of Probe: EX3DV4 - SN:3933

#### Sensor Model Parameters

	C1 fF	C2 fF	$\alpha$ $V^{-1}$	T1 $msV^{-2}$	T2 $msV^{-1}$	T3 ms	T4 $V^{-2}$	T5 $V^{-1}$	T6
x	11.1	78.42	32.44	4.41	0.00	4.90	0.64	0.00	1.00
y	10.5	74.59	32.58	4.31	0.00	4.95	0.64	0.00	1.01
z	9.4	67.69	32.88	2.18	0.00	4.90	0.26	0.00	1.00

#### Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle	-123.3°
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

**Note:** Measurement distance from surface can be increased to 3-4 mm for an *Area Scan* job.

EX3DV4 - SN:3933

October 26, 2023

### Parameters of Probe: EX3DV4 - SN:3933

#### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity <sup>F</sup> (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unc (k = 2)
13	55.0	0.75	17.92	17.92	17.92	0.00	1.00	±13.3%
750	41.9	0.89	10.22	10.22	10.22	0.49	0.80	±12.0%
835	41.5	0.90	9.71	9.71	9.71	0.51	0.80	±12.0%
900	41.5	0.97	9.41	9.41	9.41	0.36	0.98	±12.0%
1750	40.1	1.37	9.03	9.03	9.03	0.43	0.86	±12.0%
1900	40.0	1.40	8.47	8.47	8.47	0.41	0.86	±12.0%
2300	39.5	1.67	8.03	8.03	8.03	0.33	0.90	±12.0%
2450	39.2	1.80	7.72	7.72	7.72	0.41	0.90	±12.0%
2600	39.0	1.96	7.69	7.69	7.69	0.33	0.90	±12.0%
3500	37.9	2.91	7.11	7.11	7.11	0.35	1.30	±14.0%
3700	37.7	3.12	6.97	6.97	6.97	0.35	1.30	±14.0%
5200	36.0	4.66	5.56	5.56	5.56	0.40	1.80	±14.0%
5300	35.9	4.76	5.42	5.42	5.42	0.40	1.80	±14.0%
5500	35.6	4.96	4.89	4.89	4.89	0.40	1.80	±14.0%
5600	35.5	5.07	4.75	4.75	4.75	0.40	1.80	±14.0%
5800	35.3	5.27	4.85	4.85	4.85	0.40	1.80	±14.0%

<sup>C</sup> Frequency validity above 300MHz of ±100MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300MHz is ±10, 25, 40, 50 and 70MHz for ConvF assessments at 30, 64, 128, 150 and 220MHz respectively. Validity of ConvF assessed at 6MHz is 4–9MHz, and ConvF assessed at 13MHz is 9–19MHz. Above 5GHz frequency validity can be extended to ±110MHz.

<sup>F</sup> The probes are calibrated using tissue simulating liquids (TSL) that deviate for  $\epsilon$  and  $\sigma$  by less than ±5% from the target values (typically better than ±3%) and are valid for TSL with deviations of up to ±10%. If TSL with deviations from the target of less than ±5% are used, the calibration uncertainties are 11.1% for 0.7 - 3 GHz and 13.1% for 3 - 6 GHz.


<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ±1% for frequencies below 3GHz and below ±2% for frequencies between 3–6GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4 - SN:3933

October 26, 2023

### Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide:R22)


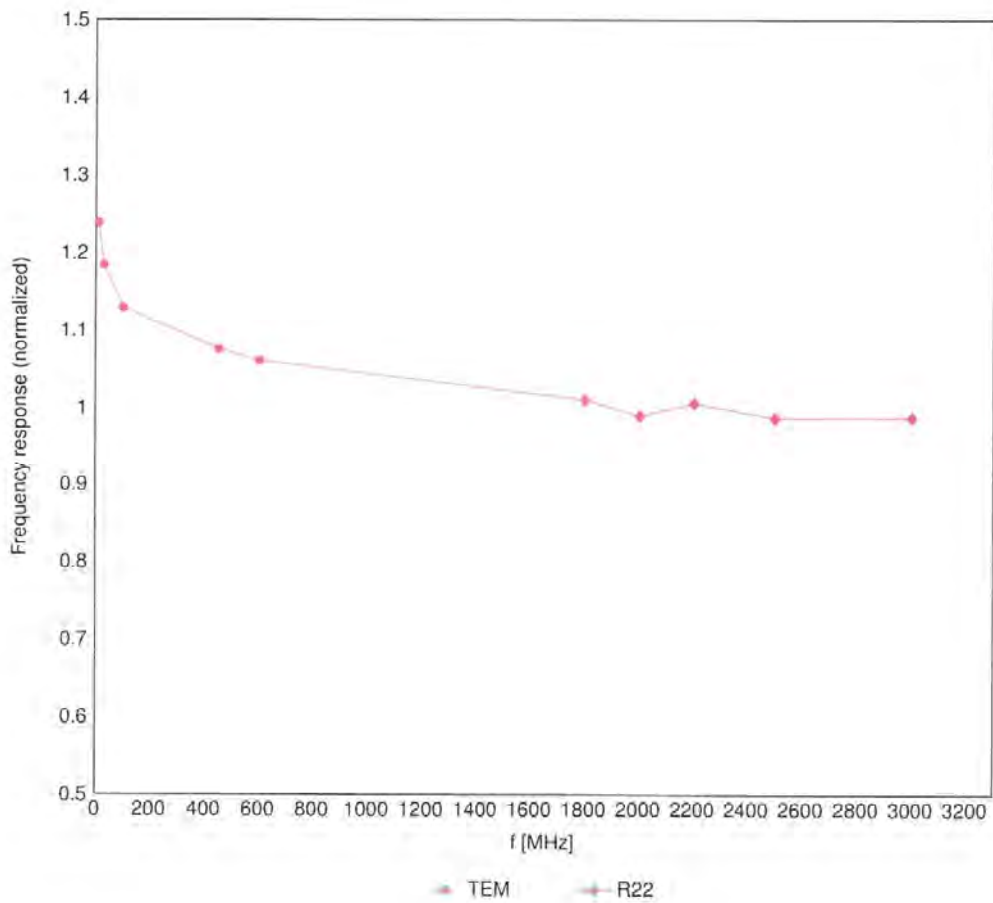


Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)

EX3DV4 - SN:3933

October 26, 2023

Receiving Pattern ( $\phi$ ),  $\vartheta = 0^\circ$

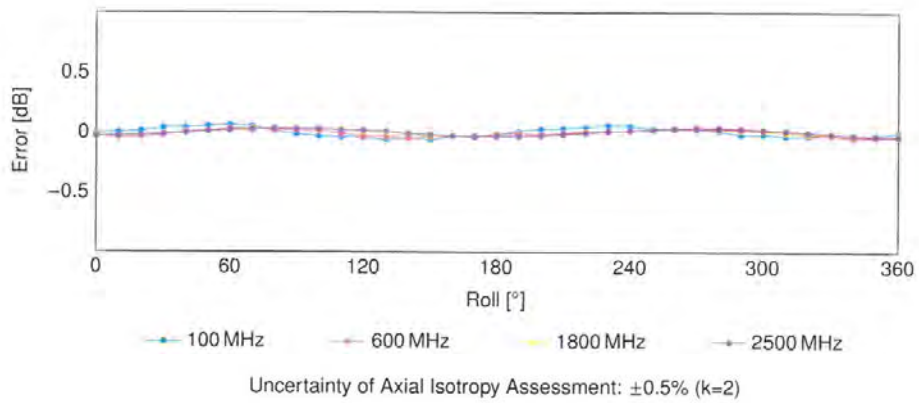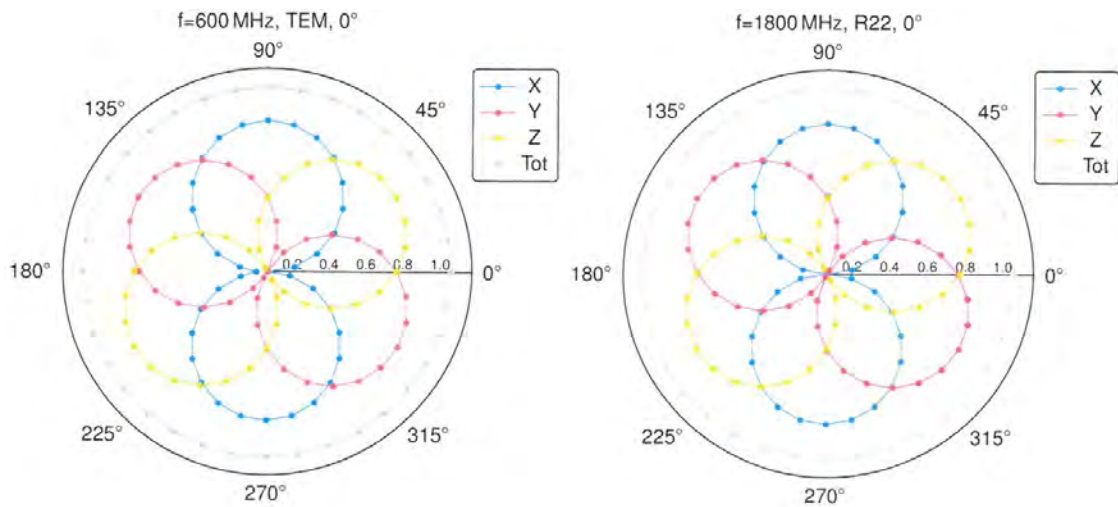





EX3DV4 - SN:3933

October 26, 2023

### Dynamic Range f(SAR<sub>head</sub>)

(TEM cell, f<sub>eval</sub> = 1900 MHz)

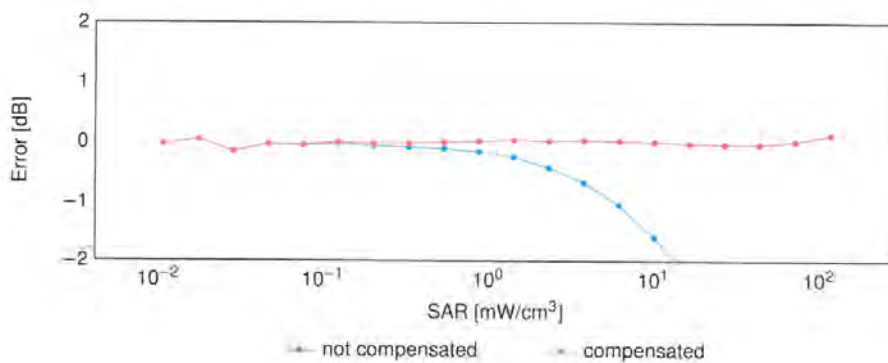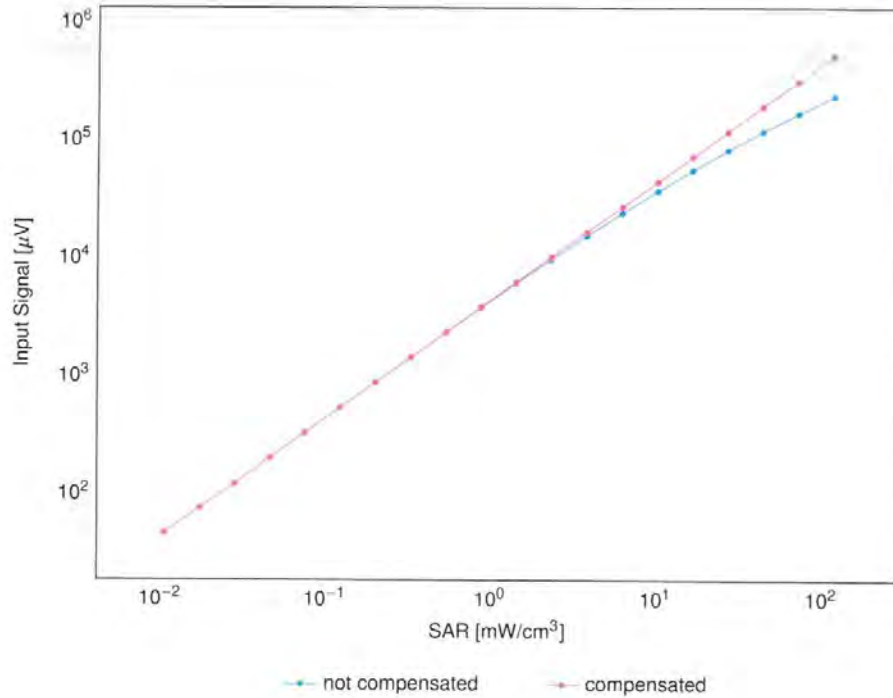


Uncertainty of Linearity Assessment: ±0.6% (k=2)

EX3DV4 - SN:3933


October 26, 2023

### Conversion Factor Assessment

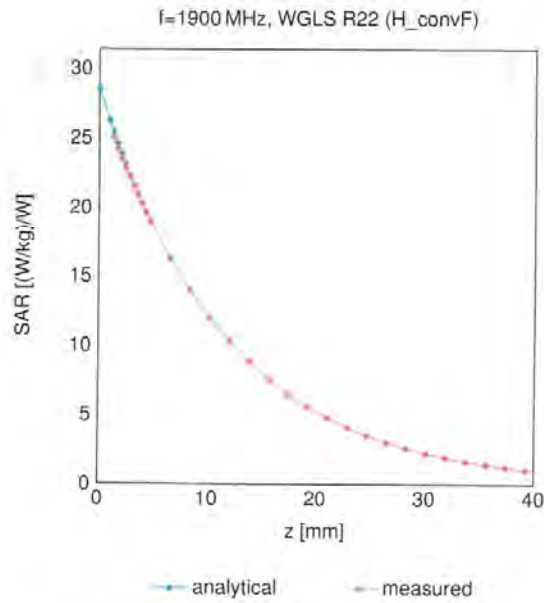

### Deviation from Isotropy in Liquid

Error ( $\phi, \theta$ ), f = 900 MHz

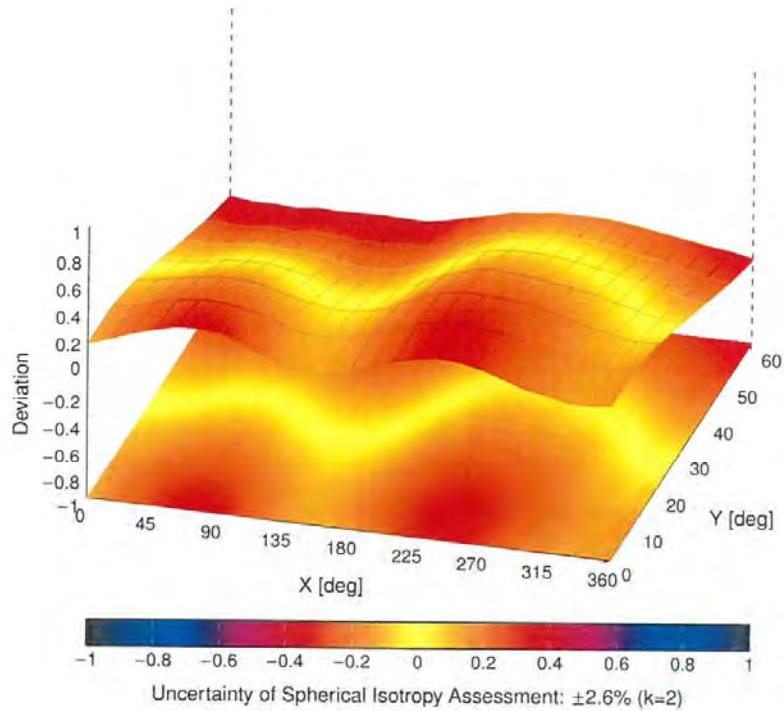

EX3DV4 - SN:3933

October 26, 2023

**Appendix: Modulation Calibration Parameters**

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
0		CW	CW	0.00	±4.7
10010	CAB	SAR Validation (Square, 100 ms, 10 ms)	Test	10.00	±9.6
10011	CAC	UMTS-FDD (WCDMA)	WCDMA	2.91	±9.6
10012	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	WLAN	1.87	±9.6
10013	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	WLAN	9.46	±9.6
10021	DAC	GSM-FDD (TDMA, GMSK)	GSM	9.39	±9.6
10023	DAC	GPRS-FDD (TDMA, GMSK, TN 0)	GSM	9.57	±9.6
10024	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	GSM	6.56	±9.6
10025	DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	GSM	12.62	±9.6
10026	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	GSM	9.55	±9.6
10027	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	GSM	4.80	±9.6
10028	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	GSM	3.55	±9.6
10029	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	GSM	7.78	±9.6
10030	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	Bluetooth	5.30	±9.6
10031	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	Bluetooth	1.87	±9.6
10032	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	Bluetooth	1.16	±9.6
10033	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	Bluetooth	7.74	±9.6
10034	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)	Bluetooth	4.53	±9.6
10035	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)	Bluetooth	3.83	±9.6
10036	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	Bluetooth	8.01	±9.6
10037	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	Bluetooth	4.77	±9.6
10038	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	Bluetooth	4.10	±9.6
10039	CAB	CDMA2000 (1xRTT, RC1)	CDMA2000	4.57	±9.6
10042	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate)	AMPS	7.78	±9.6
10044	CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	AMPS	0.00	±9.6
10048	CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	DECT	13.80	±9.6
10049	CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	DECT	10.79	±9.6
10056	CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	TD-SCDMA	11.01	±9.6
10058	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	GSM	6.52	±9.6
10059	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	WLAN	2.12	±9.6
10060	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	WLAN	2.83	±9.6
10061	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	WLAN	3.60	±9.6
10062	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	WLAN	8.68	±9.6
10063	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)	WLAN	8.63	±9.6
10064	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)	WLAN	9.09	±9.6
10065	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	WLAN	9.00	±9.6
10066	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)	WLAN	9.38	±9.6
10067	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)	WLAN	10.12	±9.6
10068	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)	WLAN	10.24	±9.6
10069	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	WLAN	10.56	±9.6
10071	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	WLAN	9.83	±9.6
10072	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	WLAN	9.62	±9.6
10073	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	WLAN	9.94	±9.6
10074	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	WLAN	10.30	±9.6
10075	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	WLAN	10.77	±9.6
10076	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	WLAN	10.94	±9.6
10077	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	WLAN	11.00	±9.6
10081	CAB	CDMA2000 (1xRTT, RC3)	CDMA2000	3.97	±9.6
10082	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate)	AMPS	4.77	±9.6
10090	DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	GSM	6.56	±9.6
10097	CAC	UMTS-FDD (HSDPA)	WCDMA	3.98	±9.6
10098	CAC	UMTS-FDD (HSUPA, Subtest 2)	WCDMA	3.98	±9.6
10099	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	GSM	9.55	±9.6
10100	CAF	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-FDD	5.67	±9.6
10101	CAF	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	±9.6
10102	CAF	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	±9.6
10103	CAH	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-TDD	9.29	±9.6
10104	CAH	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-TDD	9.97	±9.6
10105	CAH	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-TDD	10.01	±9.6
10108	CAH	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-FDD	5.80	±9.6
10109	CAH	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	±9.6
10110	CAH	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-FDD	5.75	±9.6
10111	CAH	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-FDD	6.44	±9.6

EX3DV4 - SN:3933

October 26, 2023

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>F</sup> k = 2
10112	CAH	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-FDD	6.59	+9.6
10113	CAH	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-FDD	6.62	+9.6
10114	CAD	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	WLAN	8.10	+9.6
10115	CAD	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	WLAN	8.46	+9.6
10116	CAD	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	WLAN	8.15	+9.6
10117	CAD	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	WLAN	8.07	+9.6
10118	CAD	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	WLAN	8.59	+9.6
10119	CAD	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	WLAN	8.13	+9.6
10140	CAF	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-FDD	6.49	+9.6
10141	CAF	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-FDD	6.53	+9.6
10142	CAF	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-FDD	5.73	+9.6
10143	CAF	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-FDD	6.35	+9.6
10144	CAF	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-FDD	6.65	+9.6
10145	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-FDD	5.76	+9.6
10146	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.41	+9.6
10147	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.72	+9.6
10149	CAF	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	+9.6
10150	CAF	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	+9.6
10151	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	9.28	+9.6
10152	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-TDD	9.92	+9.6
10153	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-TDD	10.05	+9.6
10154	CAH	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-FDD	5.75	+9.6
10155	CAH	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	+9.6
10156	CAH	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-FDD	5.79	+9.6
10157	CAH	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-FDD	6.49	+9.6
10158	CAH	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-FDD	6.62	+9.6
10159	CAH	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-FDD	6.56	+9.6
10160	CAF	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-FDD	5.82	+9.6
10161	CAF	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-FDD	6.43	+9.6
10162	CAF	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-FDD	6.58	+9.6
10166	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-FDD	5.46	+9.6
10167	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.21	+9.6
10168	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.79	+9.6
10169	CAF	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-FDD	5.73	+9.6
10170	CAF	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-FDD	6.52	+9.6
10171	AAF	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-FDD	6.49	+9.6
10172	CAH	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-TDD	9.21	+9.6
10173	CAH	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-TDD	9.48	+9.6
10174	CAH	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-TDD	10.25	+9.6
10175	CAH	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-FDD	5.72	+9.6
10176	CAH	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-FDD	6.52	+9.6
10177	CAJ	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-FDD	5.73	+9.6
10178	CAH	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-FDD	6.52	+9.6
10179	CAH	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-FDD	6.50	+9.6
10180	CAH	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-FDD	6.50	+9.6
10181	CAF	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-FDD	5.72	+9.6
10182	CAF	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-FDD	6.52	+9.6
10183	AAE	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-FDD	6.50	+9.6
10184	CAF	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-FDD	5.73	+9.6
10185	CAF	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-FDD	6.51	+9.6
10186	AAF	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	6.50	+9.6
10187	CAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-FDD	5.73	+9.6
10188	CAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.52	+9.6
10189	AAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.50	+9.6
10193	CAD	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	WLAN	8.09	+9.6
10194	CAD	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	WLAN	8.12	+9.6
10195	CAD	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	WLAN	8.21	+9.6
10196	CAD	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	WLAN	8.10	+9.6
10197	CAD	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	WLAN	8.13	+9.6
10198	CAD	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	WLAN	8.27	+9.6
10219	CAD	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	WLAN	8.03	+9.6
10220	CAD	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	WLAN	8.13	+9.6
10221	CAD	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	WLAN	8.27	+9.6
10222	CAD	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	WLAN	8.06	+9.6
10223	CAD	IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)	WLAN	8.48	+9.6
10224	CAD	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	WLAN	8.08	+9.6

EX3DV4 - SN:3933

October 26, 2023

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>F</sup> k = 2
10225	CAC	UMTS-FDD (HSPA+)	WCDMA	5.97	±9.6
10226	CAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.49	±9.6
10227	CAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.26	±9.6
10228	CAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-TDD	9.22	±9.6
10229	CAE	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10230	CAE	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10231	CAE	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-TDD	9.19	±9.6
10232	CAH	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10233	CAH	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10234	CAH	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-TDD	9.21	±9.6
10235	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10236	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10237	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-TDD	9.21	±9.6
10238	CAG	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10239	CAG	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10240	CAG	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-TDD	9.21	±9.6
10241	CAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.82	±9.6
10242	CAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-TDD	9.86	±9.6
10243	CAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-TDD	9.46	±9.6
10244	CAE	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-TDD	10.06	±9.6
10245	CAE	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-TDD	10.06	±9.6
10246	CAE	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-TDD	9.30	±9.6
10247	CAH	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-TDD	9.91	±9.6
10248	CAH	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-TDD	10.09	±9.6
10249	CAH	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-TDD	9.29	±9.6
10250	CAH	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-TDD	9.81	±9.6
10251	CAH	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-TDD	10.17	±9.6
10252	CAH	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-TDD	9.24	±9.6
10253	CAG	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-TDD	9.90	±9.6
10254	CAG	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-TDD	10.14	±9.6
10255	CAG	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-TDD	9.20	±9.6
10256	CAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.96	±9.6
10257	CAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.08	±9.6
10258	CAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-TDD	9.34	±9.6
10259	CAE	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-TDD	9.98	±9.6
10260	CAE	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-TDD	9.97	±9.6
10261	CAE	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-TDD	9.24	±9.6
10262	CAH	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-TDD	9.83	±9.6
10263	CAH	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-TDD	10.16	±9.6
10264	CAH	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-TDD	9.23	±9.6
10265	CAH	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-TDD	9.92	±9.6
10266	CAH	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-TDD	10.07	±9.6
10267	CAH	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-TDD	9.30	±9.6
10268	CAG	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-TDD	10.06	±9.6
10269	CAG	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-TDD	10.13	±9.6
10270	CAG	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-TDD	9.58	±9.6
10274	CAC	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	WCDMA	4.87	±9.6
10275	CAC	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	WCDMA	3.96	±9.6
10277	CAA	PHS (QPSK)	PHS	11.81	±9.6
10278	CAA	PHS (QPSK, BW 884 MHz, Rolloff 0.5)	PHS	11.81	±9.6
10279	CAA	PHS (QPSK, BW 884 MHz, Rolloff 0.38)	PHS	12.18	±9.6
10290	AAB	CDMA2000, RC1, SO55, Full Rate	CDMA2000	3.91	±9.6
10291	AAB	CDMA2000, RC3, SO55, Full Rate	CDMA2000	3.46	±9.6
10292	AAB	CDMA2000, RC3, SO32, Full Rate	CDMA2000	3.39	±9.6
10293	AAB	CDMA2000, RC3, SO3, Full Rate	CDMA2000	3.50	±9.6
10295	AAB	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	CDMA2000	12.49	±9.6
10297	AAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-FDD	5.81	±9.6
10298	AAE	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-FDD	5.72	±9.6
10299	AAE	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-FDD	6.39	±9.6
10300	AAE	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-FDD	6.60	±9.6
10301	AAA	IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, QPSK, PUSC)	WiMAX	12.03	±9.6
10302	AAA	IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, QPSK, PUSC, 3 CTRL symbols)	WiMAX	12.57	±9.6
10303	AAA	IEEE 802.16e WiMAX (31:15, 5 ms, 10 MHz, 64QAM, PUSC)	WiMAX	12.52	±9.6
10304	AAA	IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, 64QAM, PUSC)	WiMAX	11.86	±9.6
10305	AAA	IEEE 802.16e WiMAX (31:15, 10 ms, 10 MHz, 64QAM, PUSC, 15 symbols)	WiMAX	15.24	±9.6
10306	AAA	IEEE 802.16e WiMAX (29:18, 10 ms, 10 MHz, 64QAM, PUSC, 18 symbols)	WiMAX	14.67	±9.6

EX3DV4 - SN:3933

October 26, 2023

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>F</sup> k = 2
10307	AAA	IEEE 802.16e WiMAX (29:18, 10 ms, 10 MHz, QPSK, PUSC, 18 symbols)	WiMAX	14.49	±9.6
10308	AAA	IEEE 802.16e WiMAX (29:18, 10 ms, 10 MHz, 16QAM, PUSC)	WiMAX	14.46	±9.6
10309	AAA	IEEE 802.16e WiMAX (29:18, 10 ms, 10 MHz, 16QAM, AMC 2x3, 18 symbols)	WiMAX	14.58	±9.6
10310	AAA	IEEE 802.16e WiMAX (29:18, 10 ms, 10 MHz, QPSK, AMC 2x3, 18 symbols)	WiMAX	14.57	±9.6
10311	AAE	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-FDD	6.06	±9.6
10313	AAA	iDEN 1:3	iDEN	10.51	±9.6
10314	AAA	iDEN 1:6	iDEN	13.48	±9.6
10315	AAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	WLAN	1.71	±9.6
10316	AAB	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)	WLAN	8.36	±9.6
10317	AAD	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)	WLAN	8.36	±9.6
10352	AAA	Pulse Waveform (200Hz, 10%)	Generic	10.00	±9.6
10353	AAA	Pulse Waveform (200Hz, 20%)	Generic	6.99	±9.6
10354	AAA	Pulse Waveform (200Hz, 40%)	Generic	3.98	±9.6
10355	AAA	Pulse Waveform (200Hz, 60%)	Generic	2.22	±9.6
10356	AAA	Pulse Waveform (200Hz, 80%)	Generic	0.97	±9.6
10387	AAA	QPSK Waveform, 1 MHz	Generic	5.10	±9.6
10388	AAA	QPSK Waveform, 10 MHz	Generic	5.22	±9.6
10396	AAA	64-QAM Waveform, 100 kHz	Generic	6.27	±9.6
10399	AAA	64-QAM Waveform, 40 MHz	Generic	6.27	±9.6
10400	AAE	IEEE 802.11ac WiFi (20 MHz, 64-QAM, 99pc duty cycle)	WLAN	8.37	±9.6
10401	AAE	IEEE 802.11ac WiFi (40 MHz, 64-QAM, 99pc duty cycle)	WLAN	8.60	±9.6
10402	AAE	IEEE 802.11ac WiFi (80 MHz, 64-QAM, 99pc duty cycle)	WLAN	8.53	±9.6
10403	AAB	CDMA2000 (1xEV-DO, Rev. 0)	CDMA2000	3.76	±9.6
10404	AAB	CDMA2000 (1xEV-DO, Rev. A)	CDMA2000	3.77	±9.6
10406	AAB	CDMA2000, RC3, SO32, SCH0, Full Rate	CDMA2000	5.22	±9.6
10410	AAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9, Subframe Conf=4)	LTE-TDD	7.82	±9.6
10414	AAA	WLAN CCDF, 64-QAM, 40 MHz	Generic	8.54	±9.6
10415	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	WLAN	1.54	±9.6
10416	AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)	WLAN	8.23	±9.6
10417	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	WLAN	8.23	±9.6
10418	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble)	WLAN	8.14	±9.6
10419	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble)	WLAN	8.19	±9.6
10422	AAC	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	WLAN	8.32	±9.6
10423	AAC	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	WLAN	8.47	±9.6
10424	AAC	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	WLAN	8.40	±9.6
10425	AAC	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	WLAN	8.41	±9.6
10426	AAC	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	WLAN	8.45	±9.6
10427	AAC	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	WLAN	8.41	±9.6
10430	AAE	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	LTE-FDD	8.28	±9.6
10431	AAE	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	LTE-FDD	8.38	±9.6
10432	AAD	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	LTE-FDD	8.34	±9.6
10433	AAD	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	LTE-FDD	8.34	±9.6
10434	AAB	W-CDMA (BS Test Model 1, 64 DPCH)	WCDMA	8.60	±9.6
10435	AAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±9.6
10447	AAE	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.56	±9.6
10448	AAE	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.53	±9.6
10449	AAD	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.51	±9.6
10450	AAD	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.48	±9.6
10451	AAB	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	WCDMA	7.59	±9.6
10453	AAE	Validation (Square, 10 ms, 1 ms)	Test	10.00	±9.6
10456	AAC	IEEE 802.11ac WiFi (160 MHz, 64-QAM, 99pc duty cycle)	WLAN	8.63	±9.6
10457	AAB	UMTS-FDD (DC-HSDPA)	WCDMA	6.62	±9.6
10458	AAA	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	CDMA2000	6.55	±9.6
10459	AAA	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	CDMA2000	6.25	±9.6
10460	AAB	UMTS-FDD (WCDMA, AMR)	WCDMA	2.39	±9.6
10461	AAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±9.6
10462	AAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.30	±9.6
10463	AAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.56	±9.6
10464	AAD	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±9.6
10465	AAD	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	±9.6
10466	AAD	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	±9.6
10467	AAG	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±9.6
10468	AAG	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	±9.6
10469	AAG	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.56	±9.6
10470	AAG	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±9.6
10471	AAG	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	±9.6

EX3DV4 - SN:3933

October 26, 2023

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10472	AAG	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	+9.6
10473	AAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	+9.6
10474	AAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	+9.6
10475	AAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	+9.6
10477	AAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	+9.6
10478	AAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	+9.6
10479	AAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	+9.6
10480	AAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.18	+9.6
10481	AAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.45	+9.6
10482	AAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.71	+9.6
10483	AAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.39	+9.6
10484	AAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.47	+9.6
10485	AAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.59	+9.6
10486	AAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.38	+9.6
10487	AAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.60	+9.6
10488	AAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.70	+9.6
10489	AAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.31	+9.6
10490	AAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.54	+9.6
10491	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	+9.6
10492	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.41	+9.6
10493	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.55	+9.6
10494	AAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	+9.6
10495	AAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.37	+9.6
10496	AAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.54	+9.6
10497	AAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.67	+9.6
10498	AAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.40	+9.6
10499	AAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.68	+9.6
10500	AAD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.67	+9.6
10501	AAD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.44	+9.6
10502	AAD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.52	+9.6
10503	AAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.72	+9.6
10504	AAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.31	+9.6
10505	AAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.54	+9.6
10506	AAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	+9.6
10507	AAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.36	+9.6
10508	AAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.55	+9.6
10509	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.99	+9.6
10510	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.49	+9.6
10511	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.51	+9.6
10512	AAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	+9.6
10513	AAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.42	+9.6
10514	AAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.45	+9.6
10515	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)	WLAN	1.58	+9.6
10516	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)	WLAN	1.57	+9.6
10517	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)	WLAN	1.58	+9.6
10518	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)	WLAN	8.23	+9.6
10519	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)	WLAN	8.39	+9.6
10520	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)	WLAN	8.12	+9.6
10521	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle)	WLAN	7.97	+9.6
10522	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)	WLAN	8.45	+9.6
10523	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle)	WLAN	8.08	+9.6
10524	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle)	WLAN	8.27	+9.6
10525	AAC	IEEE 802.11ac WiFi (20 MHz, MCS0, 99pc duty cycle)	WLAN	8.36	+9.6
10526	AAC	IEEE 802.11ac WiFi (20 MHz, MCS1, 99pc duty cycle)	WLAN	8.42	+9.6
10527	AAC	IEEE 802.11ac WiFi (20 MHz, MCS2, 99pc duty cycle)	WLAN	8.21	+9.6
10528	AAC	IEEE 802.11ac WiFi (20 MHz, MCS3, 99pc duty cycle)	WLAN	8.36	+9.6
10529	AAC	IEEE 802.11ac WiFi (20 MHz, MCS4, 99pc duty cycle)	WLAN	8.36	+9.6
10531	AAC	IEEE 802.11ac WiFi (20 MHz, MCS6, 99pc duty cycle)	WLAN	8.43	+9.6
10532	AAC	IEEE 802.11ac WiFi (20 MHz, MCS7, 99pc duty cycle)	WLAN	8.29	+9.6
10533	AAC	IEEE 802.11ac WiFi (20 MHz, MCS8, 99pc duty cycle)	WLAN	8.38	+9.6
10534	AAC	IEEE 802.11ac WiFi (40 MHz, MCS0, 99pc duty cycle)	WLAN	8.45	+9.6
10535	AAC	IEEE 802.11ac WiFi (40 MHz, MCS1, 99pc duty cycle)	WLAN	8.45	+9.6
10536	AAC	IEEE 802.11ac WiFi (40 MHz, MCS2, 99pc duty cycle)	WLAN	8.32	+9.6
10537	AAC	IEEE 802.11ac WiFi (40 MHz, MCS3, 99pc duty cycle)	WLAN	8.44	+9.6
10538	AAC	IEEE 802.11ac WiFi (40 MHz, MCS4, 99pc duty cycle)	WLAN	8.54	+9.6
10540	AAC	IEEE 802.11ac WiFi (40 MHz, MCS6, 99pc duty cycle)	WLAN	8.39	+9.6