

# TEST REPORT

Report number : Z071C-13157

Issue date : May 23, 2013

The device, as described herewith, was tested pursuant to applicable test procedure and complies with the requirements of;

## FCC Part15 Subpart C

The test results are traceable to the international or national standards.

Applicant	: KYOCERA Corporation
Equipment under test (EUT)	: Mobile Phone
Model number	: YAKF-1
FCC ID	: JOYYAKF-1

Date of test : April 16, 17, 25, May 22, 23, 2013  
 Test place : TÜV SÜD Zacta Ltd. Yonezawa Testing Center  
               4149-7 Hachimanpara 5-chome  
               Yonezawa-shi Yamagata 992-1128 Japan  
               Phone: +81-238-28-2880 Fax: +81-238-28-2888  
 Test results : Complied

The results in this report are applicable only to the equipment tested.

This report shall not be re-produced except in full without the written approval of TÜV SÜD Zacta Ltd.  
 This test report must not be used by client to claim product certification, approval, or endorsement by  
 NVLAP, NIST, or any agency of the federal government.

Tested by : Chiaki Kanno  
 Chiaki Kanno

Tested by : Taiki Watanabe  
 Taiki Watanabe

Authorized by : Hiroaki Suzuki  
 Hiroaki Suzuki  
 Manager of EMC Technical Department

**NVLAP**<sup>®</sup>  
 NVLAP LAB CODE 200306-0

## Table of contents

---

	Page
<b>1. Summary of Test .....</b>	<b>4</b>
1.1 Purpose of test.....	4
1.2 Standards .....	4
1.3 List of applied test to the EUT .....	4
1.4 Modification to the EUT by laboratory.....	4
<b>2. Equipment Under Test .....</b>	<b>5</b>
2.1 General Description of equipment.....	5
2.2 EUT information .....	5
2.3 Variation of the family model(s).....	6
2.4 Operating channels and frequencies .....	6
2.5 Description of Test mode .....	6
2.6 Operating mode .....	7
<b>3. Configuration of equipment .....</b>	<b>8</b>
3.1 Equipment(s) used.....	8
3.2 Cable(s) used .....	8
3.3 System configuration .....	8
<b>4. 6dB Bandwidth .....</b>	<b>9</b>
4.1 Measurement procedure.....	9
4.2 Limit.....	9
4.3 Measurement result.....	9
4.4 Trace data .....	10
<b>5. Maximum Peak Output Power.....</b>	<b>13</b>
5.1 Measurement procedure.....	13
5.2 Limit.....	13
5.3 Measurement result.....	13
5.4 Trace data .....	15
<b>6. Band Edge Compliance of RF Conducted Emissions.....</b>	<b>18</b>
6.1 Measurement procedure.....	18
6.2 Limit.....	18
6.3 Measurement result.....	18
6.4 Trace data .....	20
<b>7. Spurious emissions - Conducted - .....</b>	<b>23</b>
7.1 Measurement procedure.....	23
7.2 Limit.....	23
7.3 Measurement result.....	23
7.4 Trace data .....	24
<b>8. Spurious Emissions - Radiated - .....</b>	<b>33</b>
8.1 Measurement procedure.....	33
8.2 Calculation method.....	34
8.3 Limit.....	34
8.4 Test data.....	35
<b>9. Restricted Band of Operation.....</b>	<b>37</b>
9.1 Measurement procedure.....	37



Zacta

<b>9.2 Limit.....</b>	<b>37</b>
<b>9.3 Measurement Result.....</b>	<b>37</b>
<b>9.4 Test data.....</b>	<b>38</b>
<b>10. Transmitter Power Spectral Density .....</b>	<b>44</b>
<b>10.1 Measurement procedure.....</b>	<b>44</b>
<b>10.2 Limit.....</b>	<b>44</b>
<b>10.3 Measurement result.....</b>	<b>44</b>
<b>10.4 Trace data .....</b>	<b>46</b>
<b>11. AC Power Line Conducted Emissions.....</b>	<b>49</b>
<b>11.1 Measurement procedure .....</b>	<b>49</b>
<b>11.2 Calculation method.....</b>	<b>49</b>
<b>11.3 Limit.....</b>	<b>49</b>
<b>11.4 Test data.....</b>	<b>50</b>
<b>12. Antenna requirement .....</b>	<b>53</b>
<b>13. Uncertainty of measurement.....</b>	<b>54</b>
<b>14. Laboratory description .....</b>	<b>55</b>
<b>Appendix A. Test equipment .....</b>	<b>56</b>

## 1. Summary of Test

---

### 1.1 Purpose of test

It is the original test in order to verify conformance to FCC Part 15 Subpart C.

### 1.2 Standards

CFR47 FCC Part 15 Subpart C

#### 1.2.1 Test Methods

ANSI C63.4-2003, KDB558074

#### 1.2.2 Deviation from standards

None

### 1.3 List of applied test to the EUT

Test items Section	Test items	Condition	Result
15.247(a)(2)	6dB Bandwidth	Conducted	PASS
15.247(b)(3)	Maximum Peak Output Power	Conducted	PASS
15.247(d)	Band Edge Compliance of RF Conducted Emissions	Conducted	PASS
15.247(d) 15.205 15.209	Spurious Emissions	Conducted Radiated	PASS
15.247(d) 15.205 15.209	Restricted Bands of Operation	Radiated	PASS
15.247(e)	Transmitter Power Spectral Density	Conducted	PASS
15.207	AC Power Line Conducted Emissions	Conducted	PASS

#### 1.3.1 Test set up

Table-Top

### 1.4 Modification to the EUT by laboratory

None

## 2. Equipment Under Test

---

### 2.1 General Description of equipment

EUT is the Mobile Phone.

### 2.2 EUT information

Applicant	: KYOCERA Corporation Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa, Japan Phone: +81-45-943-6253 Fax: +81-45-943-6314
Equipment under test	: Mobile Phone
Trade name	: Kyocera
Model number	: YAKF-1
Serial number	: N/A
EUT condition	: Pre-Production
Max. frequency	: 1.5GHz
Power ratings	: Battery: DC 3.8V
Size	: (W) 134 × (D) 66 × (H) 10.9 mm
Environment	: Indoor and Outdoor use
Terminal limitation	: -20°C to 60°C
RF Specification Protocol	: IEEE802.11b, IEEE802.11g, IEEE802.11n (HT20)
Frequency range	: 2412MHz-2462MHz
Number of RF Channels	: 11 Channels
Modulation type	: IEEE802.11b: DSSS (DBPSK, DQPSK, CCK) IEEE802.11g / n (HT20): OFDM (BPSK, QPSK, 16QAM, 64QAM)
Data rate	: IEEE802.11b: 1, 2, 5.5, 11Mbps IEEE802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps IEEE802.11n (HT20 LGI): 6.5, 13, 19.5, 26, 39, 52, 58.5, 65Mbps IEEE802.11n (HT20 SGI): 7.2, 14.4, 21.7, 28.9, 43.3, 57.8, 65, 72.2Mbps
Channel separation	: 5MHz
Output power	: 82.224mW (IEEE802.11b) 41.020mW (IEEE802.11g) 39.902mW (IEEE802.11n: HT20)
Antenna type	: Internal antenna
Antenna gain	: 0dBi

## 2.3 Variation of the family model(s)

Not applicable

## 2.4 Operating channels and frequencies

Channel	Frequency [MHz]
1	2412
2	2417
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452
10	2457
11	2462

## 2.5 Description of Test mode

The EUT had been tested under operating condition.

There are three channels have been tested as following:

Tested Channel	Frequency [MHz]
Low	2412
Middle	2437
High	2462

The pre-test has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates.

Tested Channel	Modulation Type	Data Rate
Low, Middle, High	IEEE802.11b: DSSS	1Mbps
Low, Middle, High	IEEE802.11g: OFDM	6Mbps
Low, Middle, High	IEEE802.11n (HT20): OFDM	MCS0

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in X axis and the worst case recorded.



Zacta

## 2.6 Operating mode

### [Tx mode]

- i) Test program setup to the DM tool
- ii) Select a Test mode

Operating frequency: Channel Low: 2412MHz, Channel Middle: 2437MHz, Channel High: 2462MHz

- iii) Start test mode

### [Rx mode]

- i) Test program setup to the DM tool
- ii) Select a Test mode

Operating frequency: Channel Low: 2412MHz, Channel Middle: 2437MHz, Channel High: 2462MHz

- iii) Start test mode

### **3. Configuration of equipment**

#### **3.1 Equipment(s) used**

No.	Equipment	Company	Model No.	Serial No.	FCC ID / DoC	Comment
1	Mobile Phone	KYOCERA	YAKF-1	N/A	JOYYAKF-1	EUT
2	AC Adapter	SoftBank	AC01-MU-K	N/A	-	*

\*: AC power line Conducted Emission Test.

#### **3.2 Cable(s) used**

No.	Cable	Length[m]	Shield	Connector	Comment
a	DC cable	1.5	No	Plastic	*

\*: AC power line Conducted Emission Test.

#### **3.3 System configuration**



# : Un-detachable cable

Note1: Numbers assigned to equipment or cables on this diagram correspond to the list in “3.1 Equipment(s) used” and “3.2 Cable(s) used”.

## 4. 6dB Bandwidth

### 4.1 Measurement procedure [FCC 15.247(a)(2), KDB558074]

The bandwidth at 6dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- RBW=100kHz, VBW=300kHz, Span=30MHz, Sweep=auto, Detector=Peak, Trace mode=Max hold


The EUT was set to operate with following conditions.

- Channel Low: 2412MHz, Channel Middle: 2437MHz, Channel High: 2462MHz

The test mode of EUT is as follows.

- Tx mode

- Test configuration

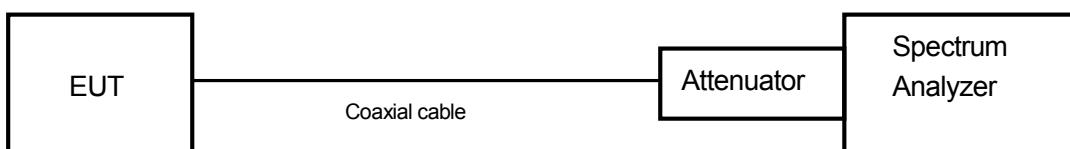

### 4.2 Limit

The minimum permissible 6dB bandwidth is 500kHz.


### 4.3 Measurement result

Date	: Apr. 16, 2013	Test personnel	:
Temperature	: 20.0 [°C]		
Humidity	: 52.0 [%]	Tested by	:
Test place	: Shielded room		Chiki Kanno


Channel	Frequency [MHz]	6dB bandwidth [MHz]		
		IEEE802.11b	IEEE802.11g	IEEE802.11n (HT20)
Low	2412	6.835	16.540	17.737
Middle	2437	7.820	16.551	17.799
High	2462	7.190	16.539	17.740

## 4.4 Trace data [IEEE802.11b]


### Channel Low

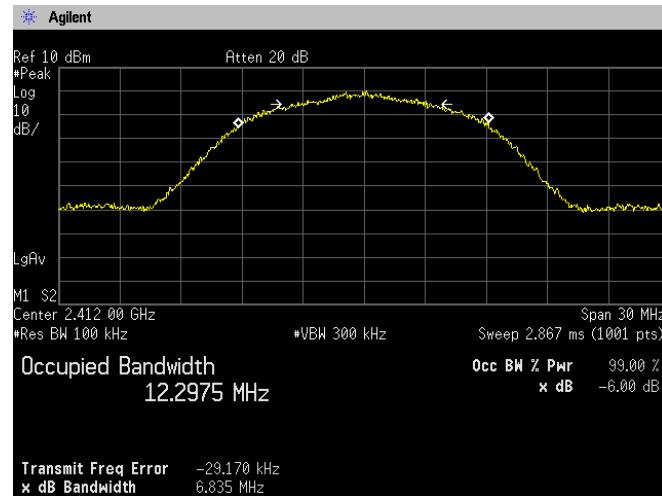




### Channel Middle

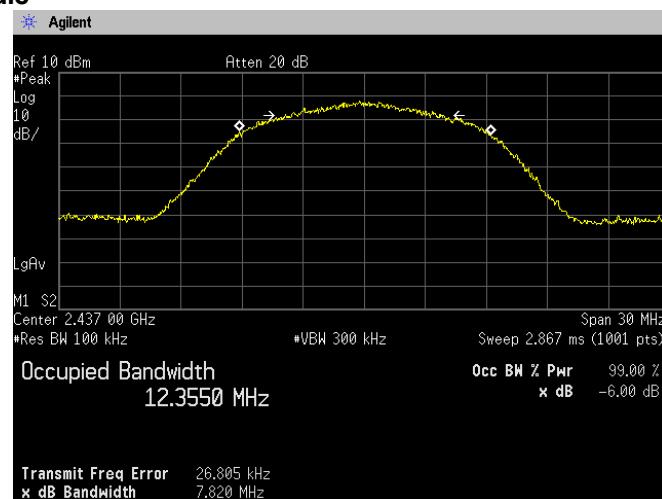

### Channel High

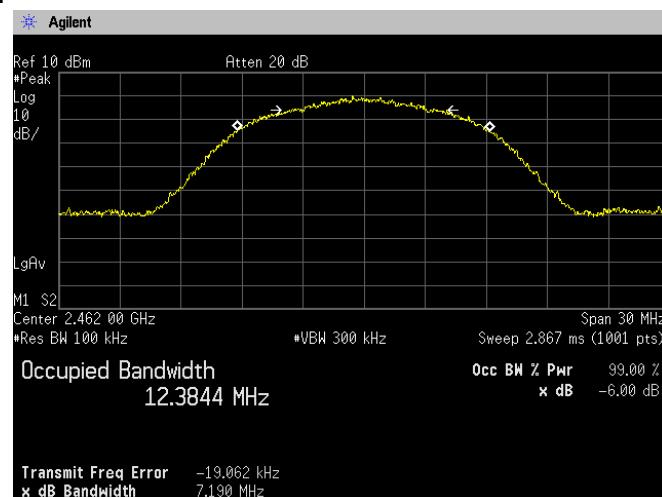

[IEEE802.11g]

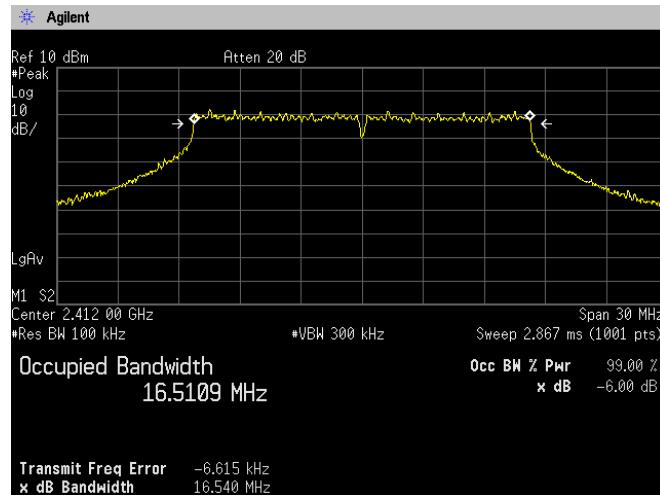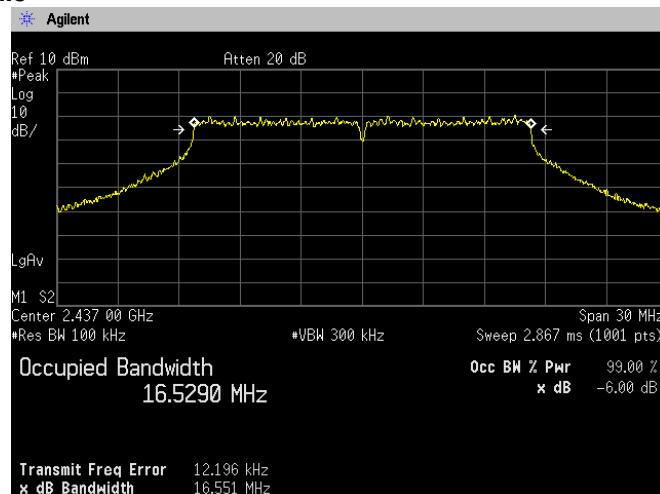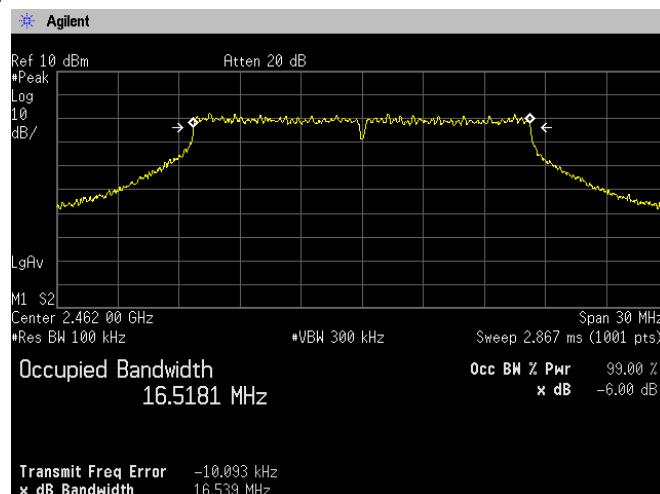
**Channel Low****Channel Middle****Channel High**




Zacta

### [IEEE802.11n (HT20)]


#### Channel Low

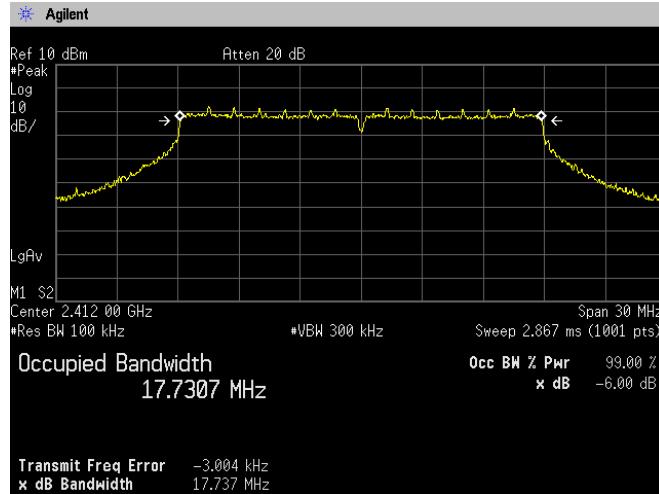

#### Channel Middle

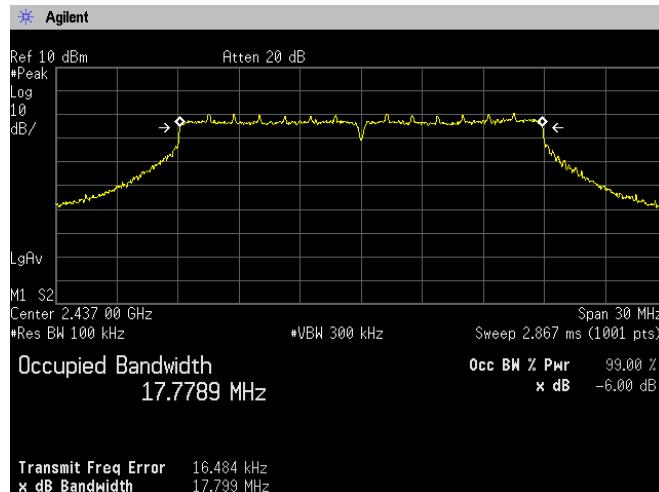

#### Channel High

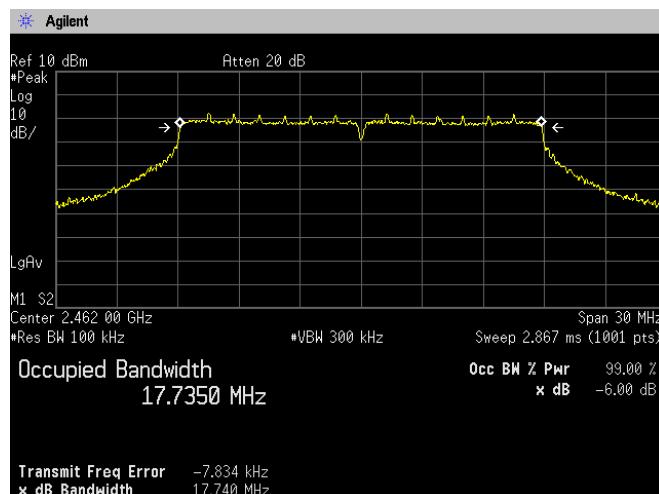

## 5. Maximum Peak Output Power

### 5.1 Measurement procedure

[FCC 15.247(b)(3), 15.31(e), KDB558074]

The peak power is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;


- RBW=1MHz, VBW=8MHz, Span=20MHz, Sweep=auto, Detector=Peak, Trace mode=Max hold
- The EUT was set to operate with following conditions.

- Channel Low: 2412MHz, Channel Middle: 2437MHz, Channel High: 2462MHz

The test mode of EUT is as follows.

- Tx mode

- Test configuration

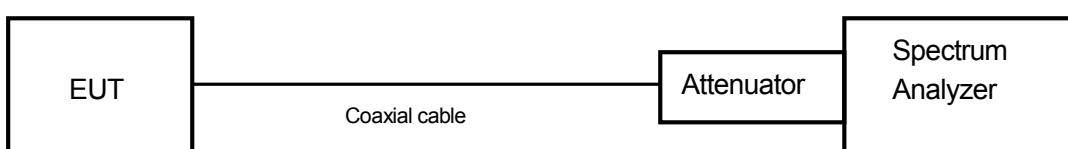

### 5.2 Limit

1W (1000mW) or less

### 5.3 Measurement result

Date	:	Apr. 16, 2013	Test personnel	:	
Temperature	:	20.0 [°C]	Tested by	:	
Humidity	:	52.0 [%]			
Test place	:	Shielded room			<u>Chiaki Kanno</u>

#### [IEEE802.11b]

Channel	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Peak Output Power (mW)	Limit (mW)	Result
Low	2412	8.02	10.67	18.69	73.961	≤1000	PASS
Middle	2437	6.85	10.67	17.52	56.494	≤1000	PASS
High	2462	8.48	10.67	19.15	82.224	≤1000	PASS

Calculation;

$$\text{Reading (dBm)} + \text{Factor (dB)} = \text{Level (dBm)}$$

$$10\log P = \text{Level (dBm)}$$

$$P = 10^{(\text{Maximum Peak Output Power} / 10)} \text{ (mW)}$$

**[IEEE802.11g]**

Channel	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Peak Output Power (mW)	Limit (mW)	Result
Low	2412	5.25	10.67	15.92	39.084	≤1000	PASS
Middle	2437	3.94	10.67	14.61	28.907	≤1000	PASS
High	2462	5.46	10.67	16.13	41.020	≤1000	PASS

Calculation;

$$\text{Reading (dBm)} + \text{Factor (dB)} = \text{Level (dBm)}$$

$$10\log P = \text{Level (dBm)}$$

$$P = 10^{(\text{Maximum Peak Output Power} / 10)} \text{ (mW)}$$

**[IEEE802.11n (HT20)]**

Channel	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Peak Output Power (mW)	Limit (mW)	Result
Low	2412	5.34	10.67	16.01	39.902	≤1000	PASS
Middle	2437	4.02	10.67	14.69	29.444	≤1000	PASS
High	2462	5.25	10.67	15.92	39.084	≤1000	PASS

Calculation;

$$\text{Reading (dBm)} + \text{Factor (dB)} = \text{Level (dBm)}$$

$$10\log P = \text{Level (dBm)}$$


$$P = 10^{(\text{Maximum Peak Output Power} / 10)} \text{ (mW)}$$

## 5.4 Trace data [IEEE802.11b]


### Channel Low






### Channel Middle



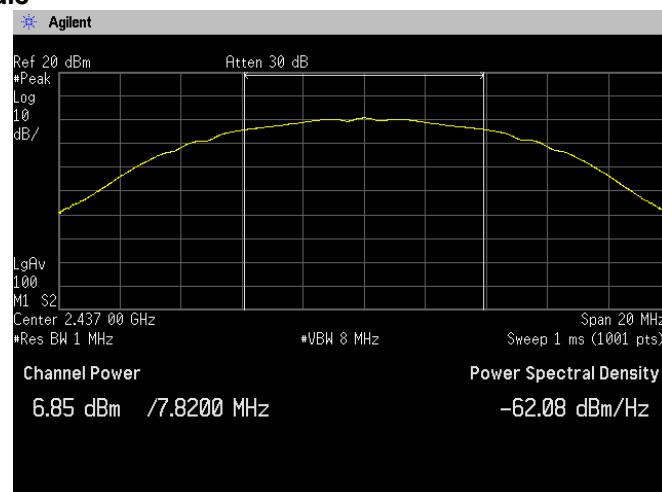


### Channel High

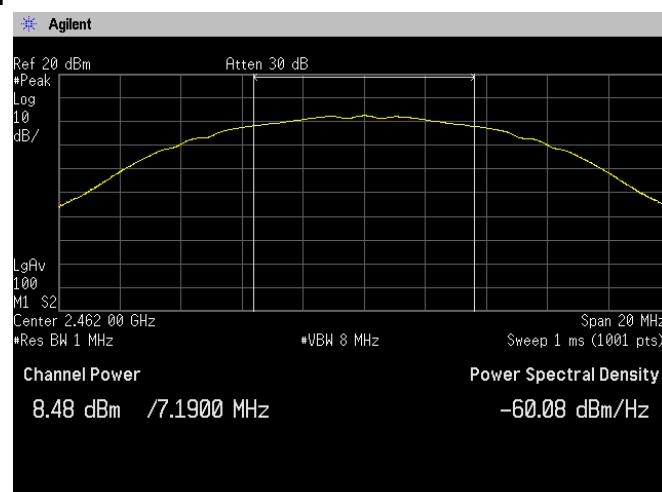

[IEEE802.11g]

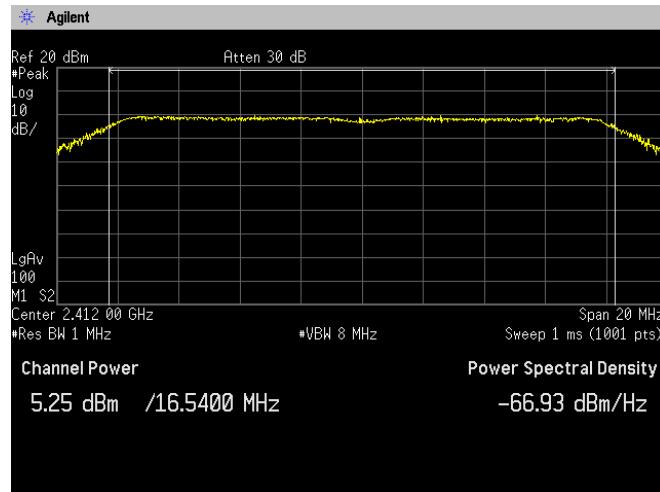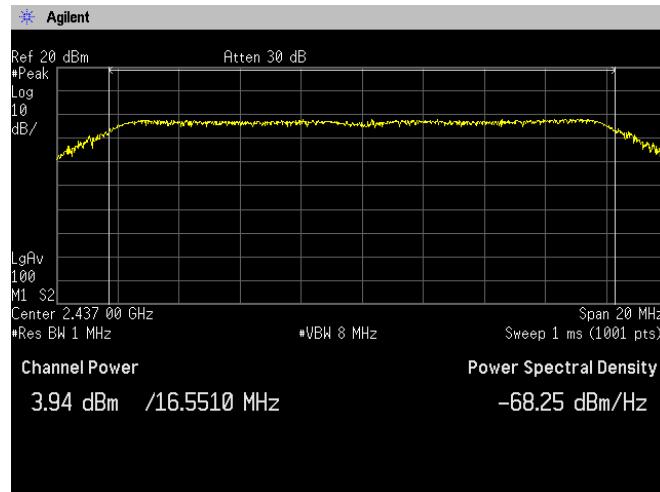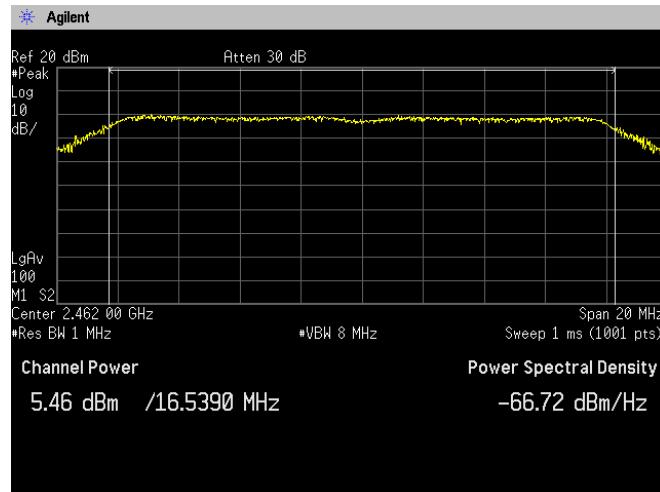**Channel Low****Channel Middle****Channel High**

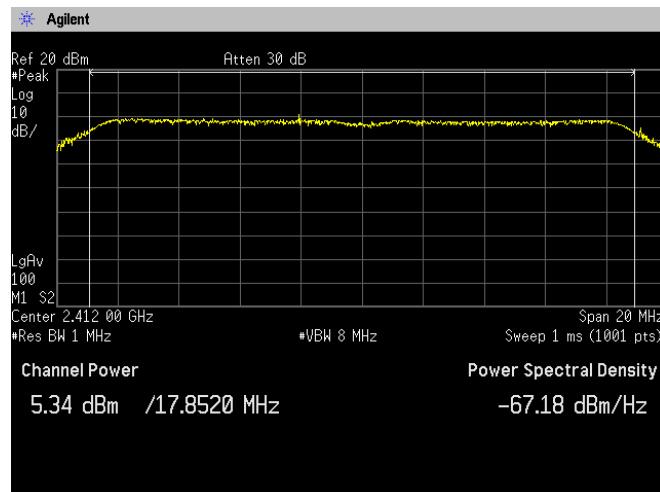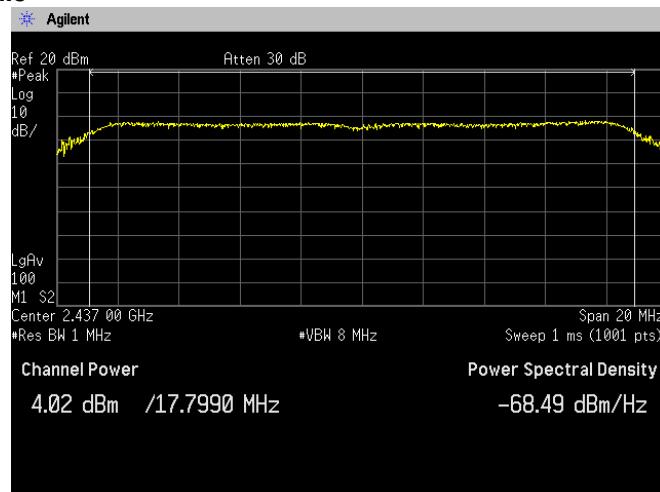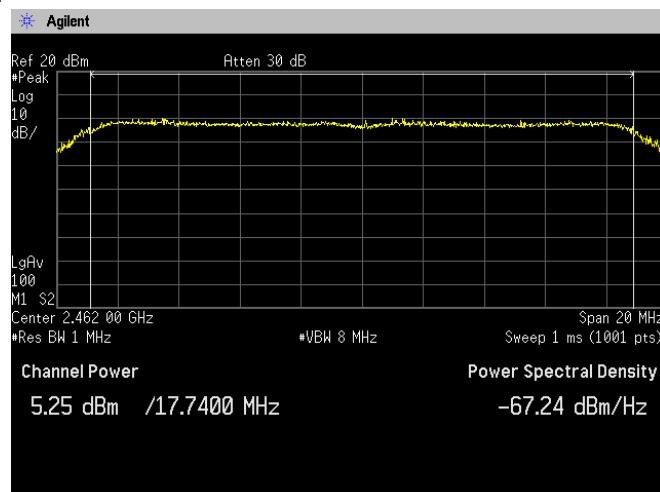**[IEEE802.11n (HT20)]**
**Channel Low**

**Channel Middle**

**Channel High**


## 6. Band Edge Compliance of RF Conducted Emissions

### 6.1 Measurement procedure

[FCC 15.247(d), KDB558074]

The Band Edge is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- RBW=100kHz, VBW=100kHz, Span=Arbitrary setting, Sweep=auto, Detector=Peak,
- Trace mode=Max hold


The EUT was set to operate with following conditions.

- Channel Low: 2412MHz, Channel High: 2462MHz

The test mode of EUT is as follows.

- Tx mode

- Test configuration

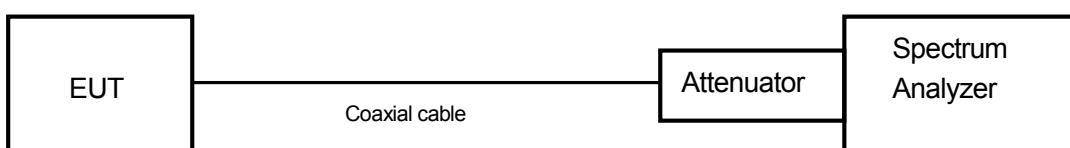

### 6.2 Limit

In any 100kHz bandwidth outside the frequency band the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

### 6.3 Measurement result

Date	:	Apr. 16, 2013	Test personnel	:	
Temperature	:	20.0 [°C]			
Humidity	:	52.0 [%]	Tested by	:	
Test place	:	Shielded room			Chiaki Kanno

#### [IEEE802.11b]

Channel	Frequency (MHz)	RF Power Level (dBm)	Band-edge Frequency (MHz)	Band-edge Level (dBm)	Difference Level (dBm)	Limit (dBm)	Result
Low	2412.00	-0.06	2388.48	-59.00	58.94	At least 20dB below from peak of RF	PASS
High	2462.00	-0.66	2488.94	-58.91	58.25	At least 20dB below from peak of RF	PASS

**[IEEE802.11g]**


Channel	Frequency (MHz)	RF Power Level (dBm)	Band-edge Frequency (MHz)	Band-edge Level (dBm)	Difference Level (dBm)	Limit (dBm)	Result
1	2412.00	-8.71	2389.84	-54.06	45.35	At least 20dB below from peak of RF	PASS
11	2462.00	-8.41	2483.82	-53.76	45.35	At least 20dB below from peak of RF	PASS

**[IEEE802.11n (HT20)]**


Channel	Frequency (MHz)	RF Power Level (dBm)	Band-edge Frequency (MHz)	Band-edge Level (dBm)	Difference Level (dBm)	Limit (dBm)	Result
1	2412.00	-8.68	2389.84	-53.24	44.56	At least 20dB below from peak of RF	PASS
11	2462.00	-8.37	2483.58	-52.08	43.71	At least 20dB below from peak of RF	PASS

## 6.4 Trace data [IEEE802.11b]

### Channel Low

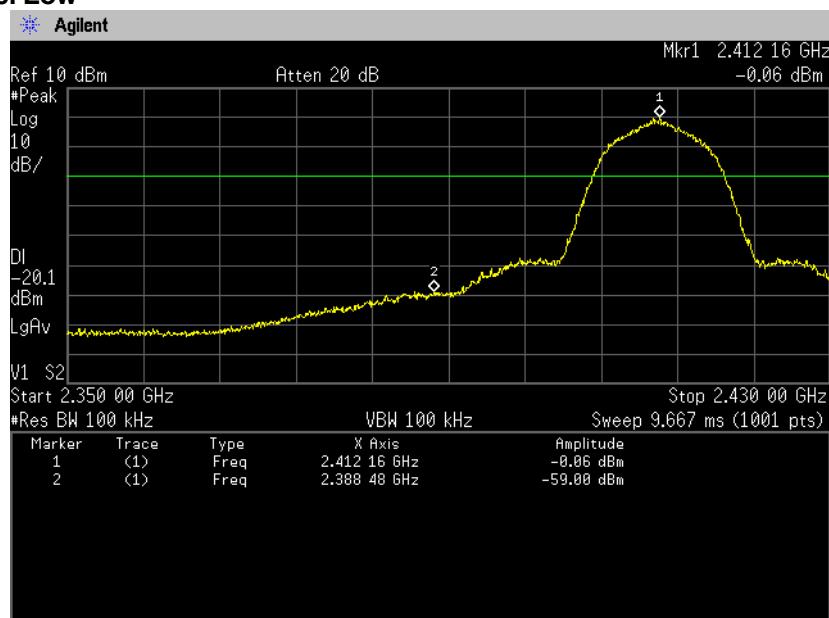


### Channel High

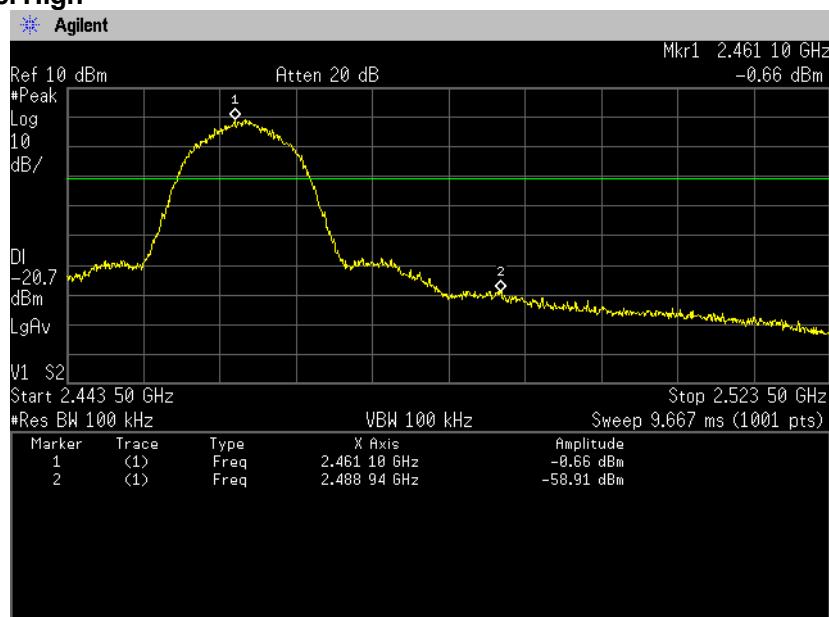


## [IEEE802.11g]

## Channel Low

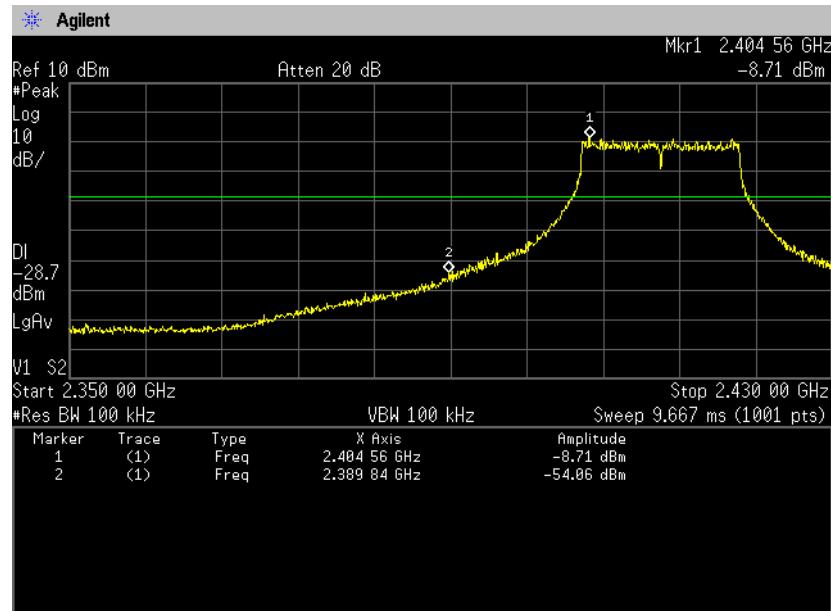


## Channel High

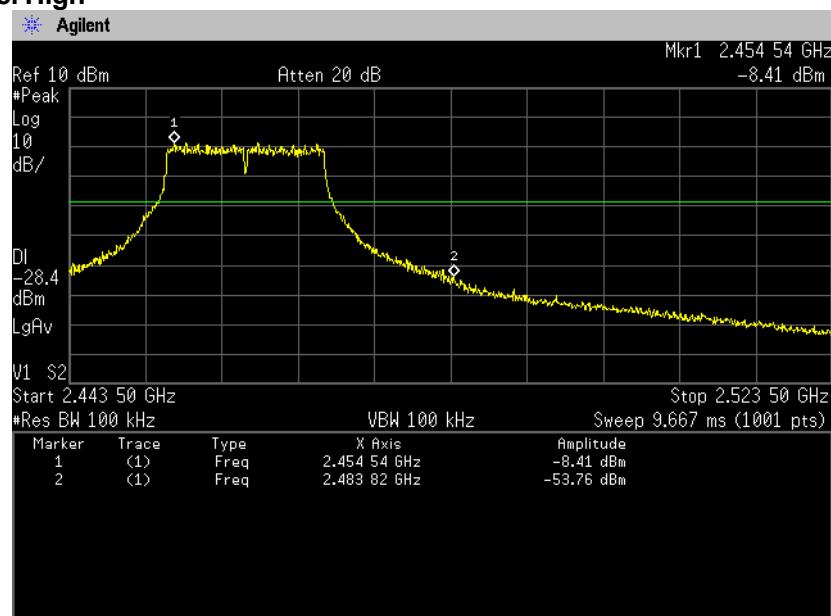


## [IEEE802.11n (HT20)]

## Channel Low

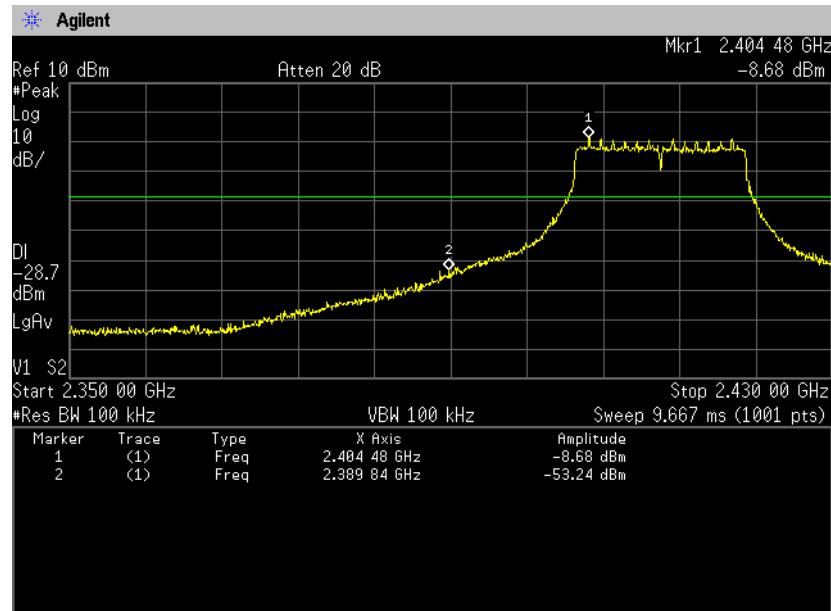

## Channel High

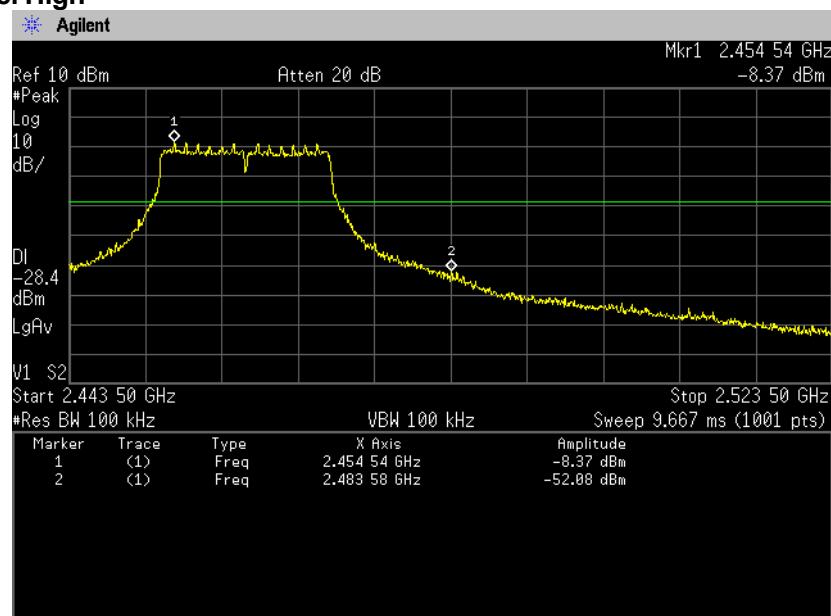

## **7. Spurious emissions - Conducted -**

### **7.1 Measurement procedure** **[FCC 15.247(d), KDB558074]**

The spurious emissions (Conducted) are measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- RBW=100kHz, VBW=300kHz, Span=Arbitrary setting, Sweep=auto, Detector=Peak,
- Trace mode=Max hold


The EUT was set to operate with following conditions.

- Channel Low: 2412MHz, Channel Middle: 2437MHz, Channel High: 2462MHz

The test mode of EUT is as follows.

- Tx mode

- Test configuration

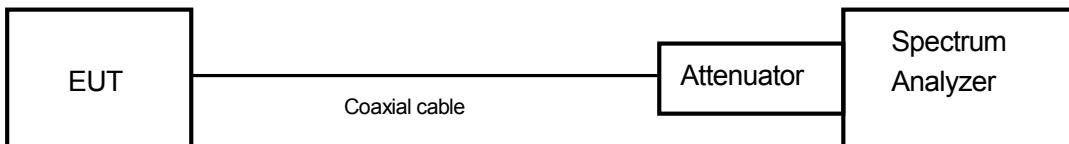

### **7.2 Limit**

In any 100kHz bandwidth outside the frequency band the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

### **7.3 Measurement result**

Date	:	Apr. 16, 2013	Test personnel	:	
Temperature	:	20.0 [°C]			
Humidity	:	52.0 [%]	Tested by	:	
Test place	:	Shielded room			Chiaki Kanno


Channel	Frequency [MHz]	Limit [dB]	Results Chart	Result
Low	2412	At least 20dB below from peak of RF	See the trace Data	PASS
Middle	2437	At least 20dB below from peak of RF	See the trace Data	PASS
High	2462	At least 20dB below from peak of RF	See the trace Data	PASS

## 7.4 Trace data

[IEEE802.11b]


Channel Low

30MHz-1GHz

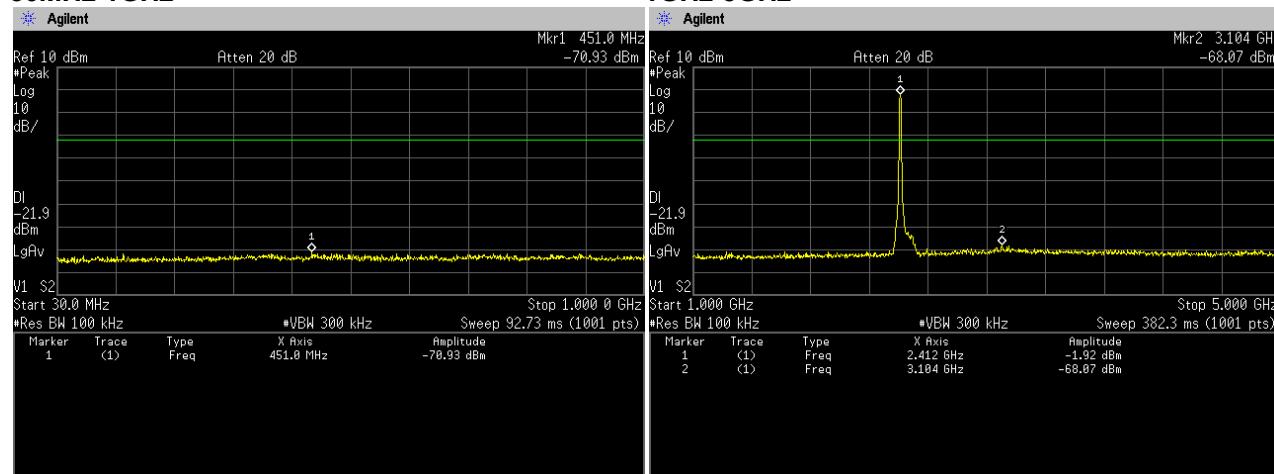


5GHz-10GHz

10GHz-15GHz

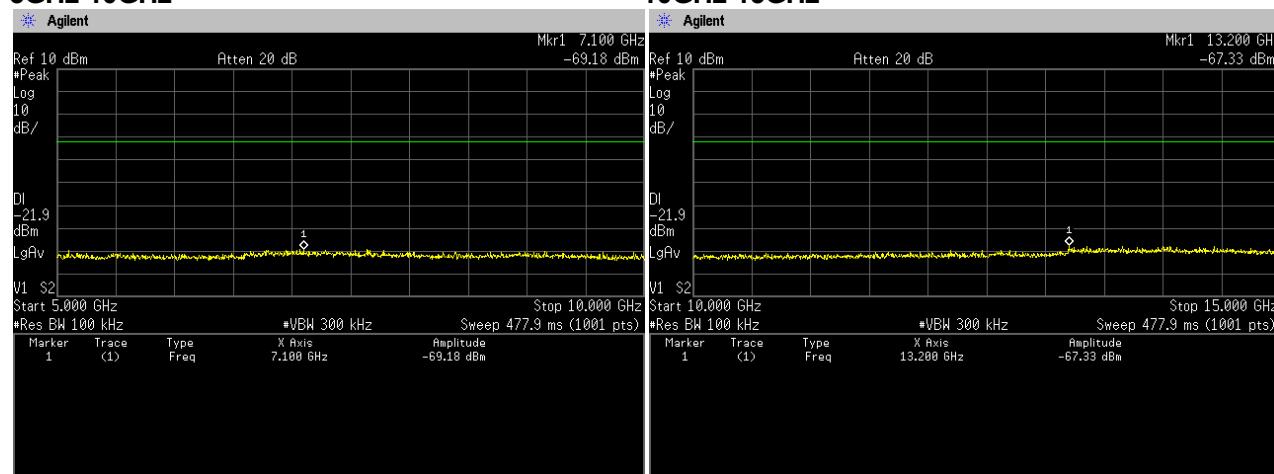


15GHz-20GHz

20GHz-25GHz

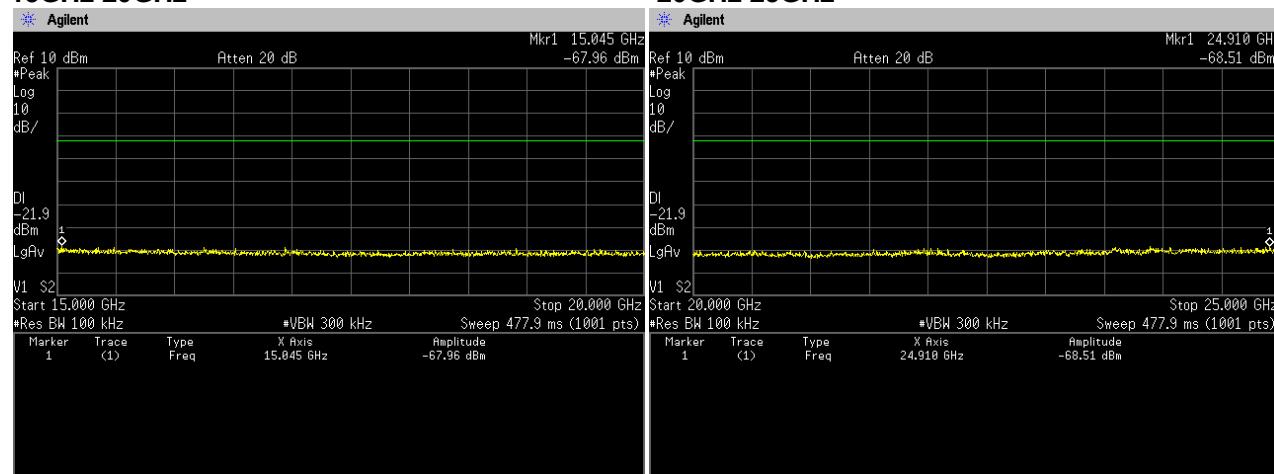


## Channel Middle 30MHz-1GHz

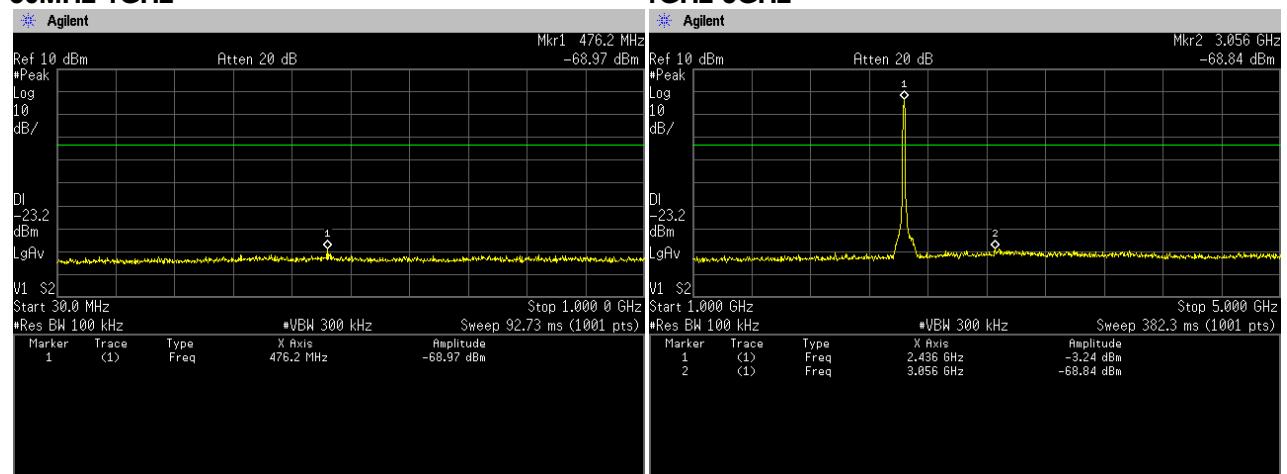


## 1GHz-5GHz

## 5GHz-10GHz

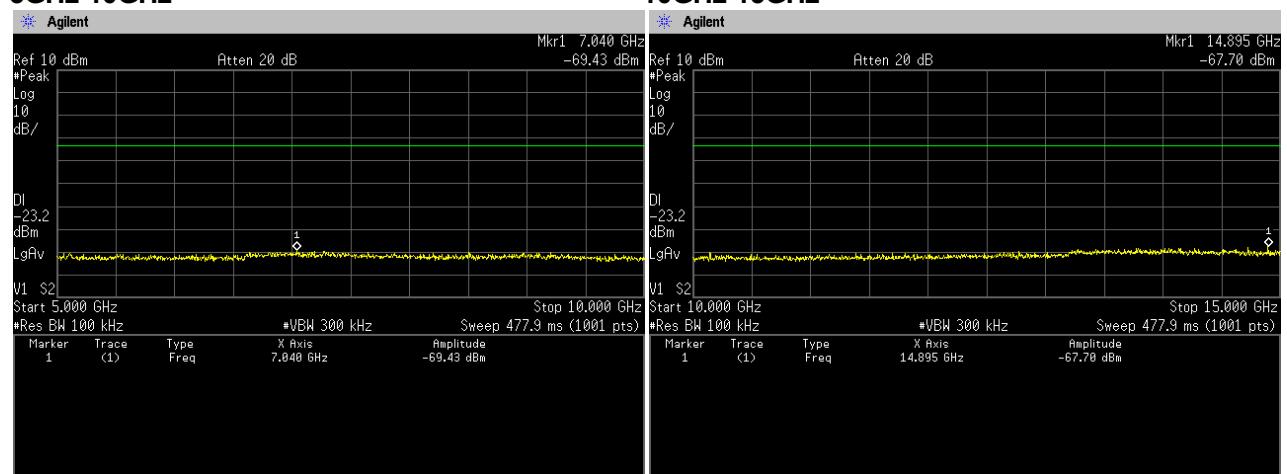


## 10GHz-15GHz

## 15GHz-20GHz

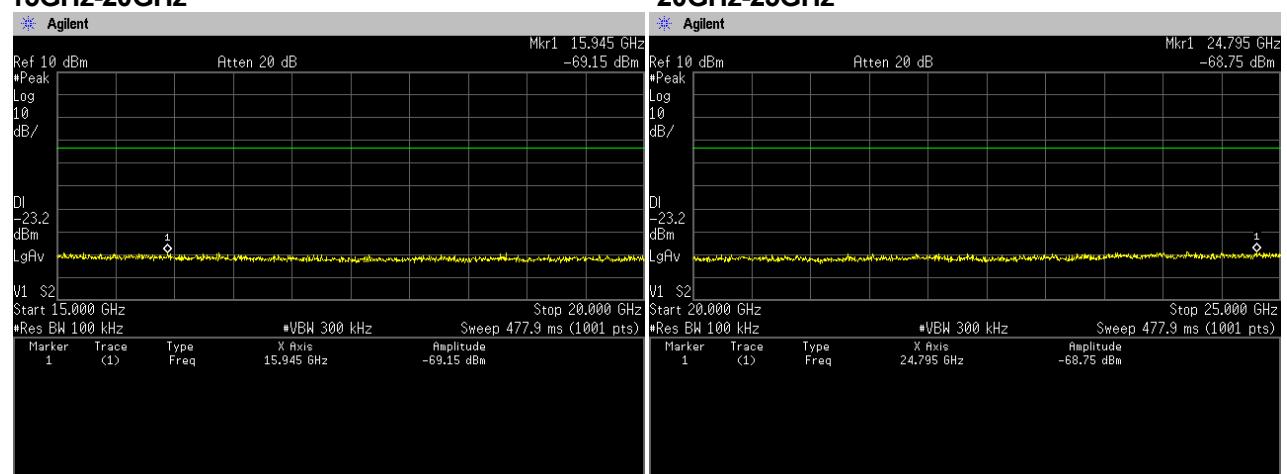


## 20GHz-25GHz


## Channel High 30MHz-1GHz

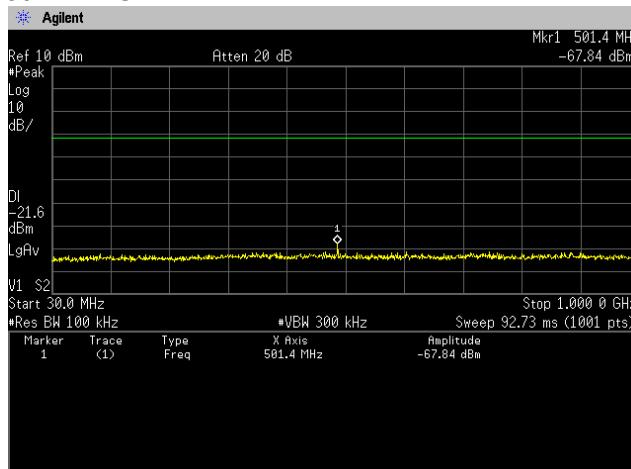


## 1GHz-5GHz

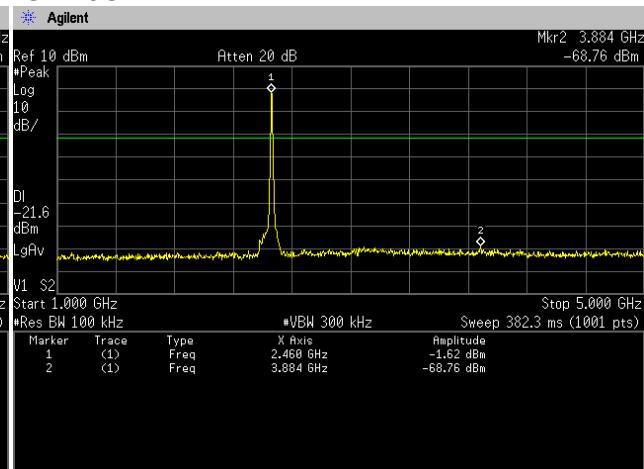


## 5GHz-10GHz

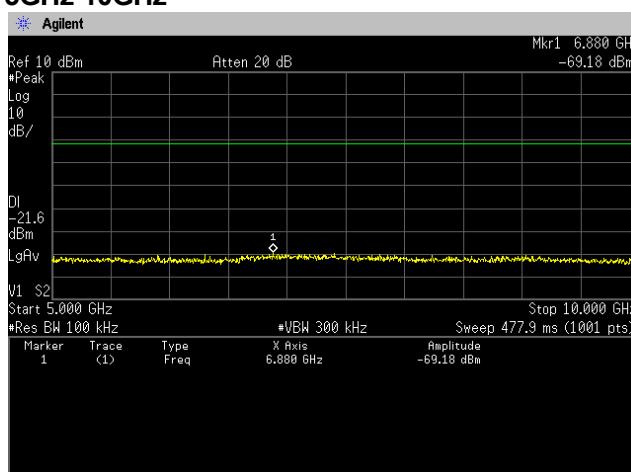


## 10GHz-15GHz

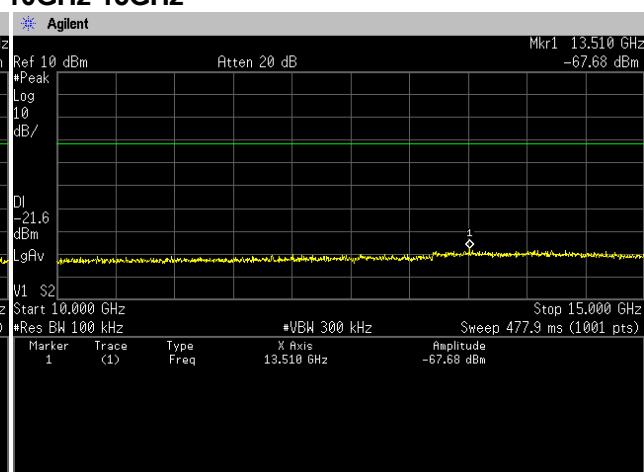

## 15GHz-20GHz



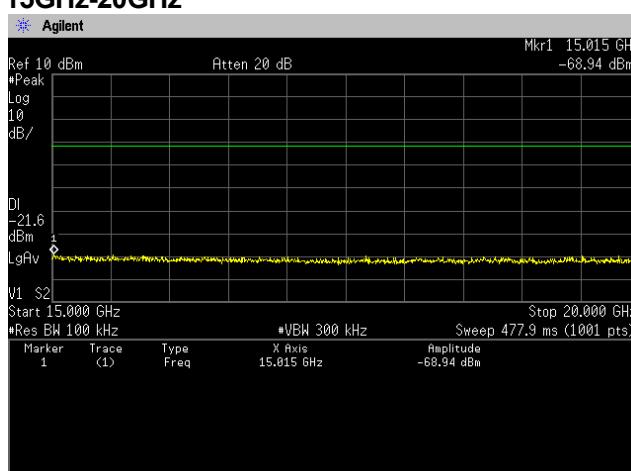


## 20GHz-25GHz

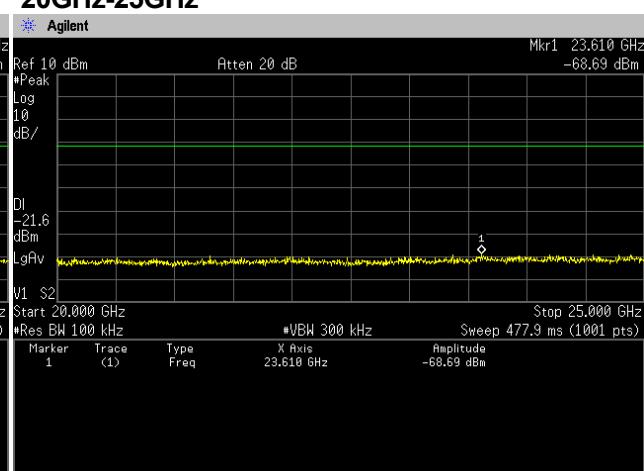





Zacta

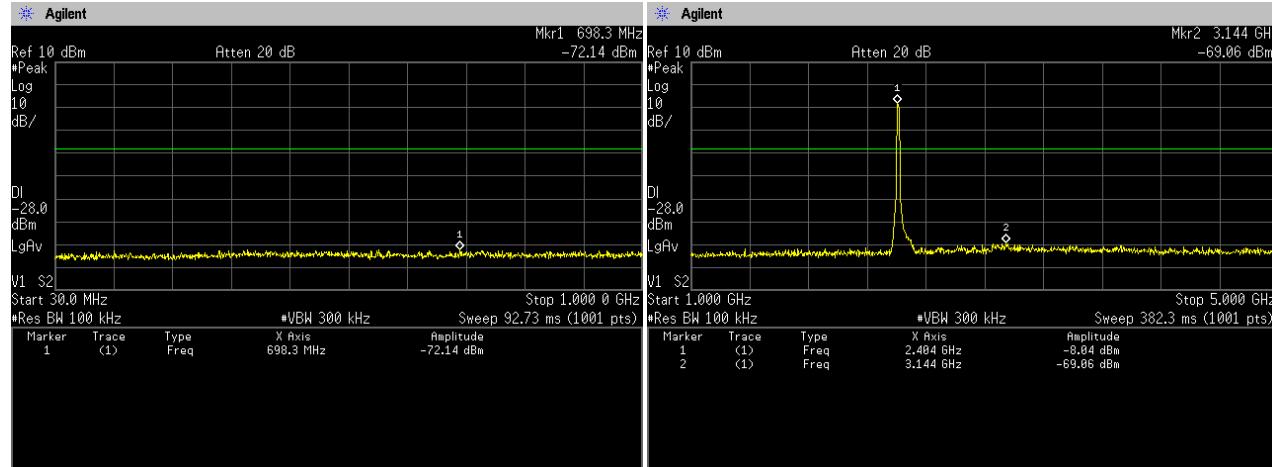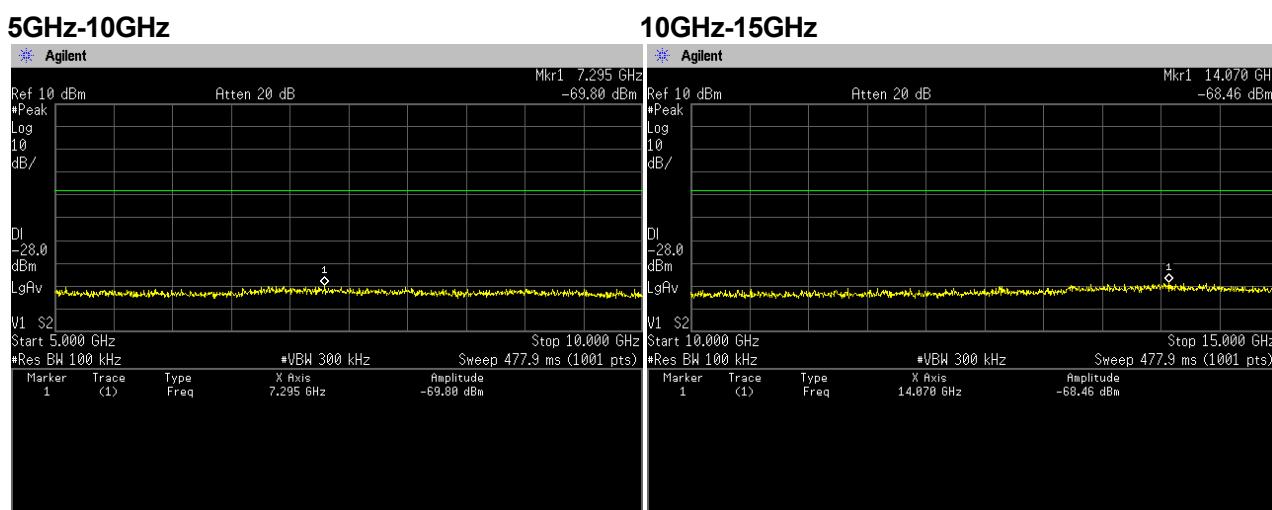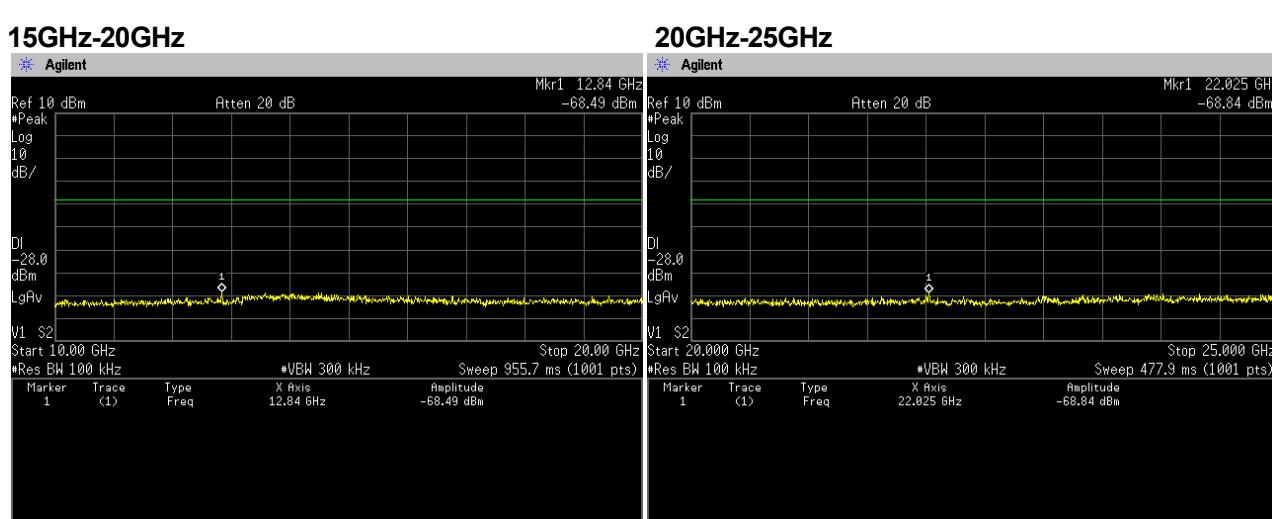**[IEEE802.11g]****Channel Low  
30MHz-1GHz****1GHz-5GHz****5GHz-10GHz****10GHz-15GHz****15GHz-20GHz**


## Channel Middle 30MHz-1GHz

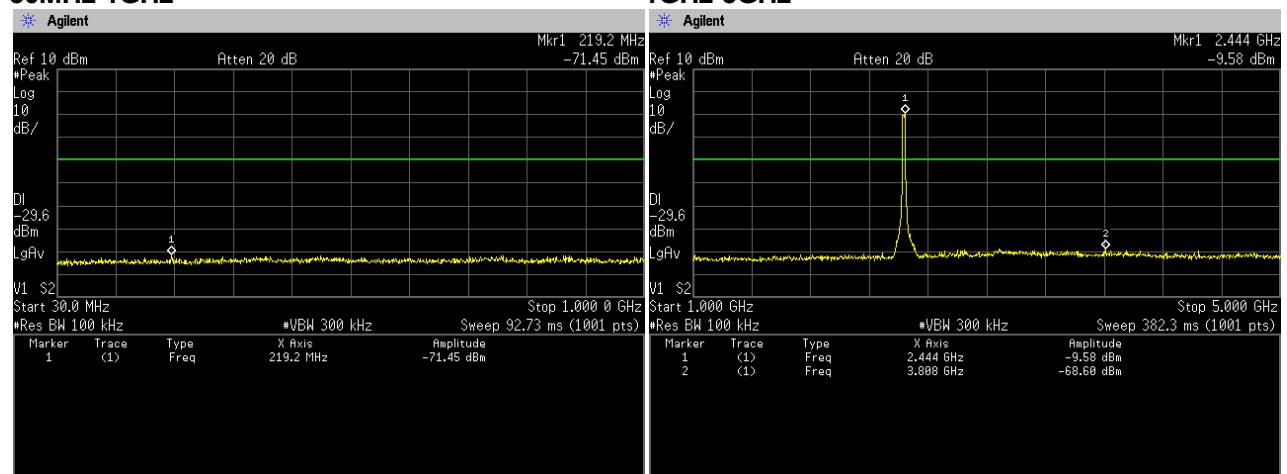


## 5GHz-10GHz

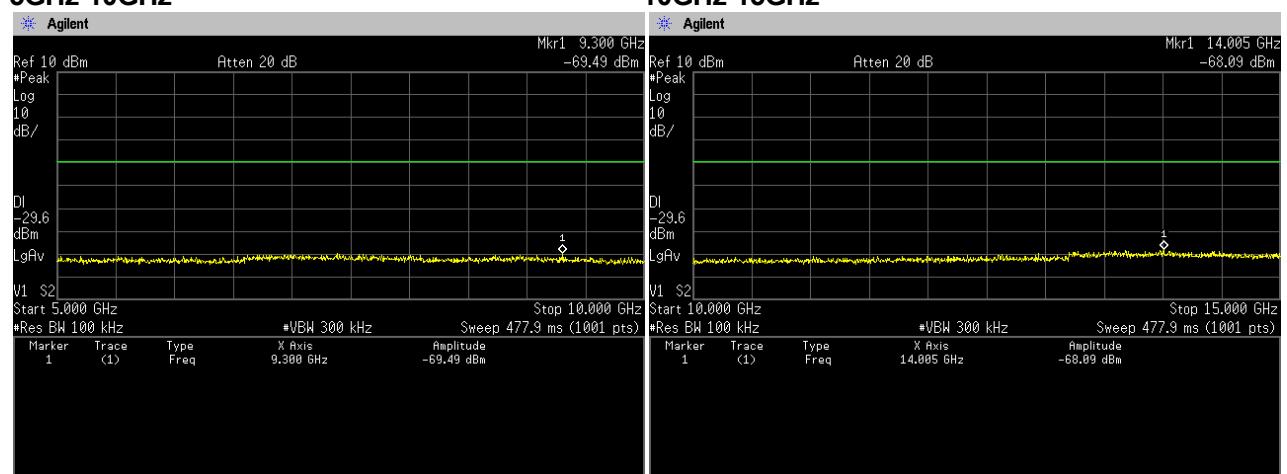


## 15GHz-20GHz

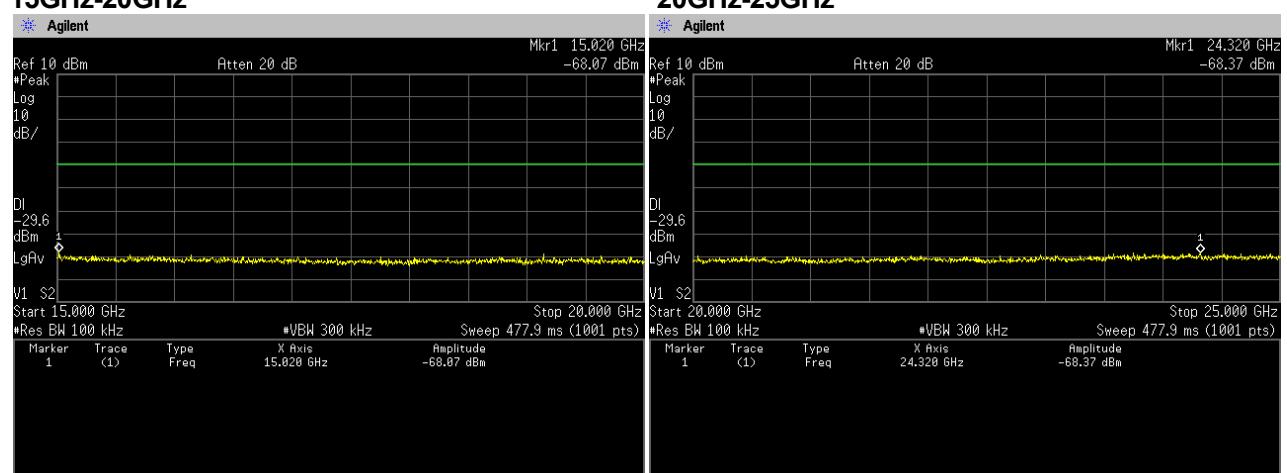


## Channel High 30MHz-1GHz

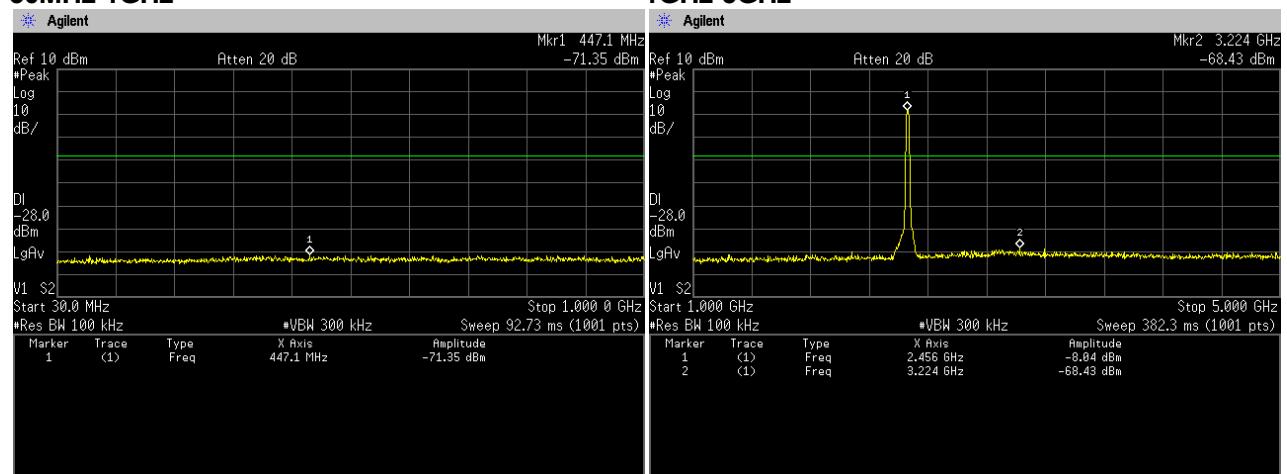

## 5GHz-10GHz

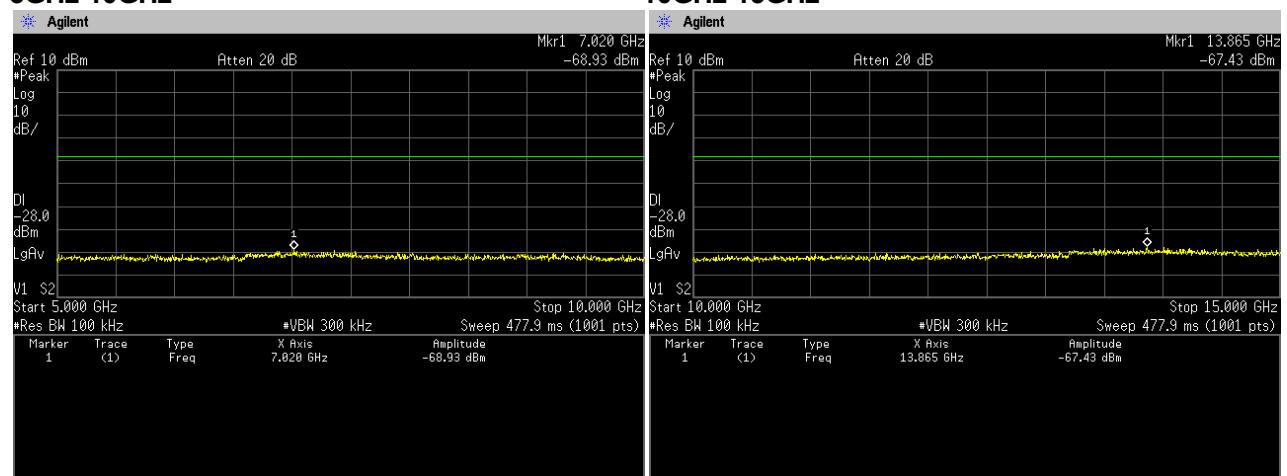


## 15GHz-20GHz

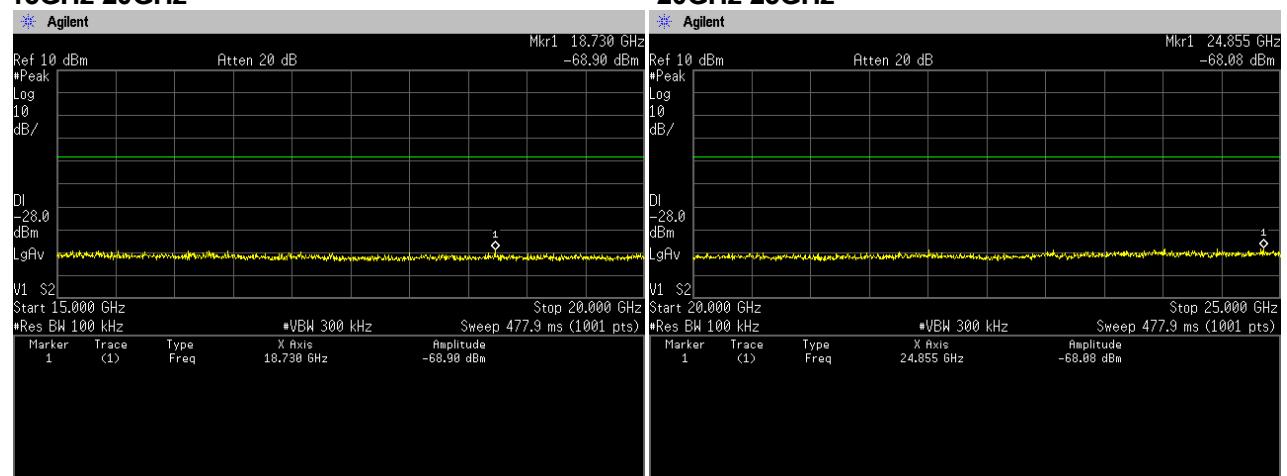




Zacta


## [IEEE802.11n (HT20)]

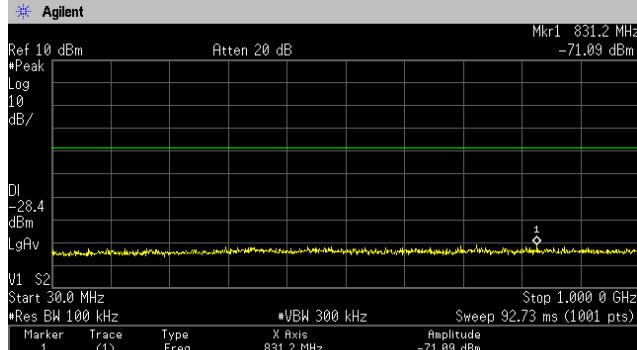Channel Low  
30MHz-1GHz


## 1GHz-5GHz

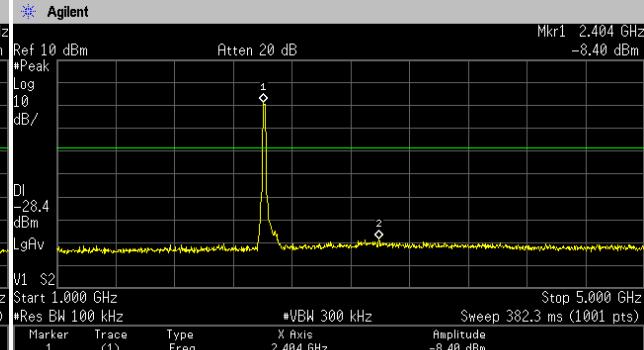


## 5GHz-10GHz

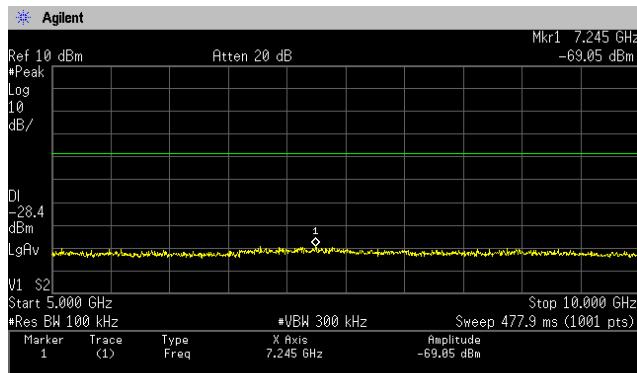


## 10GHz-15GHz

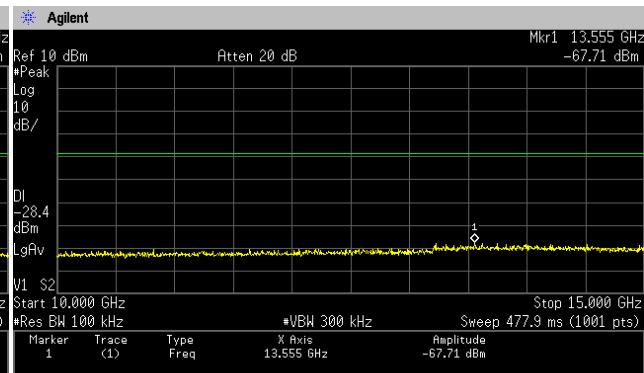


## 15GHz-20GHz

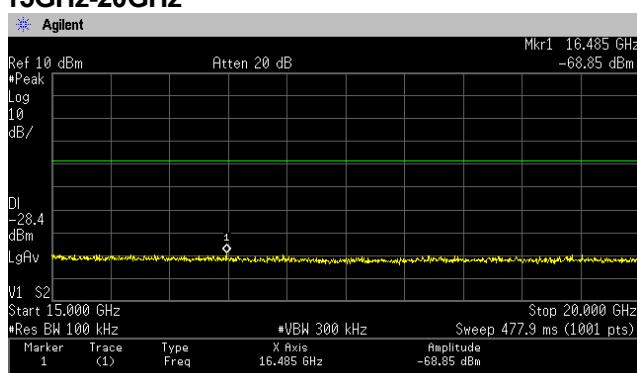


## 20GHz-25GHz

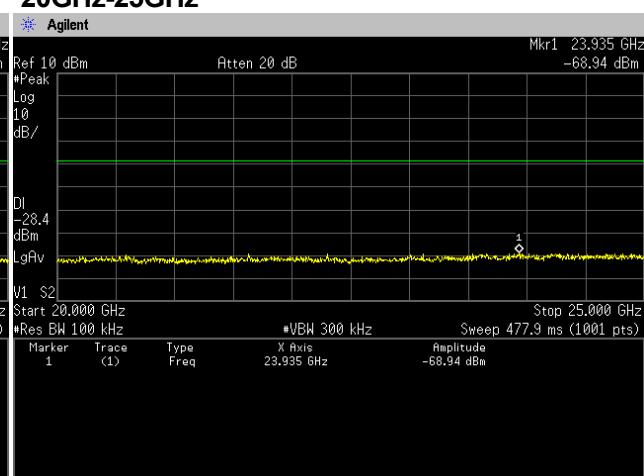


## Channel Middle 30MHz-1GHz

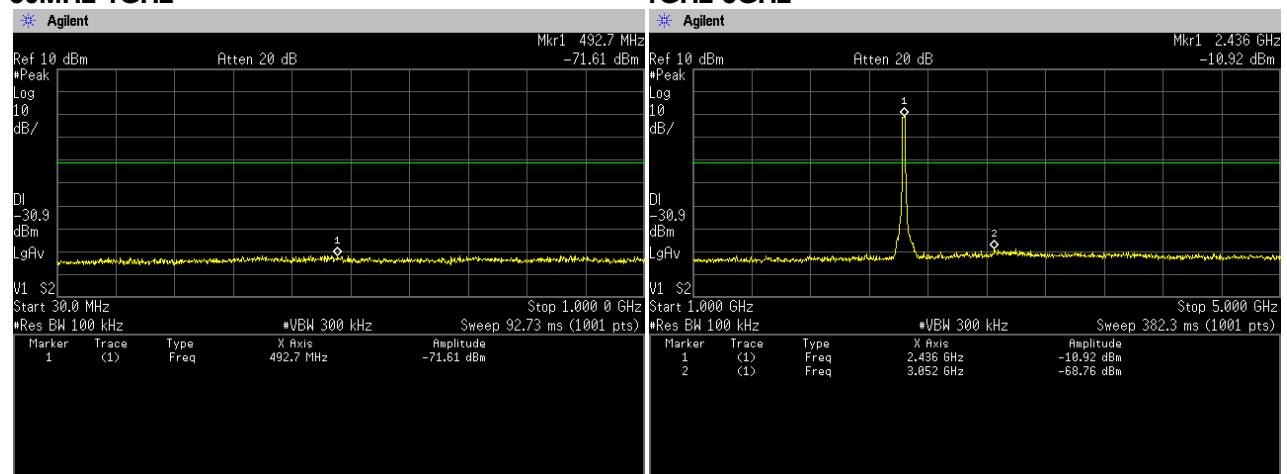


## 5GHz-10GHz

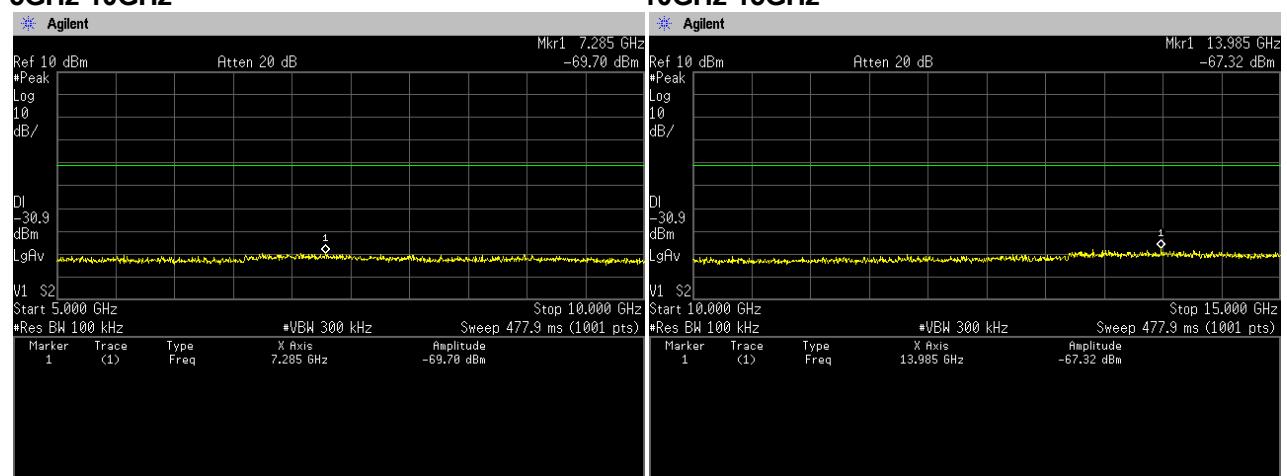


## 15GHz-20GHz

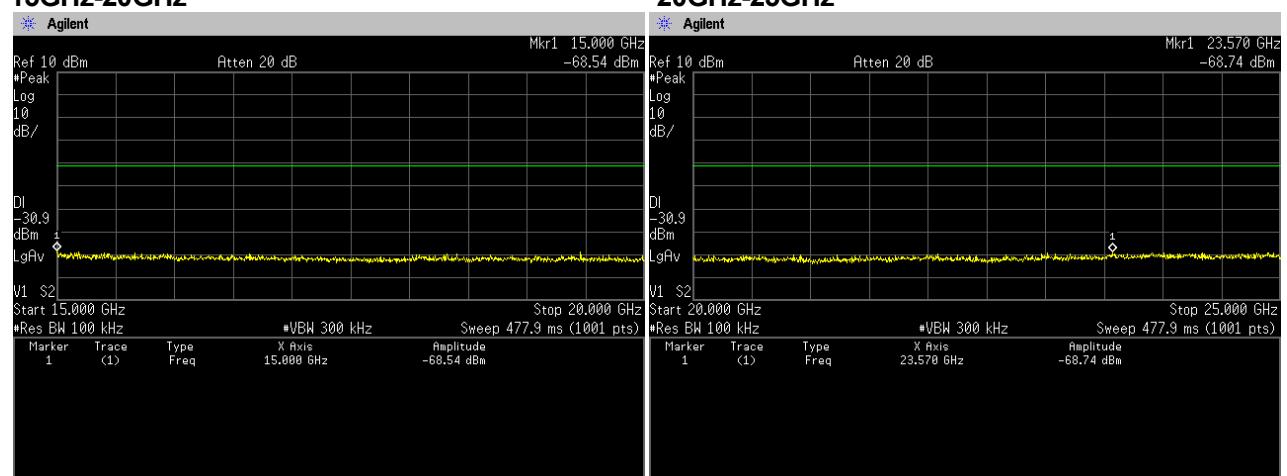


## Channel High 30MHz-1GHz

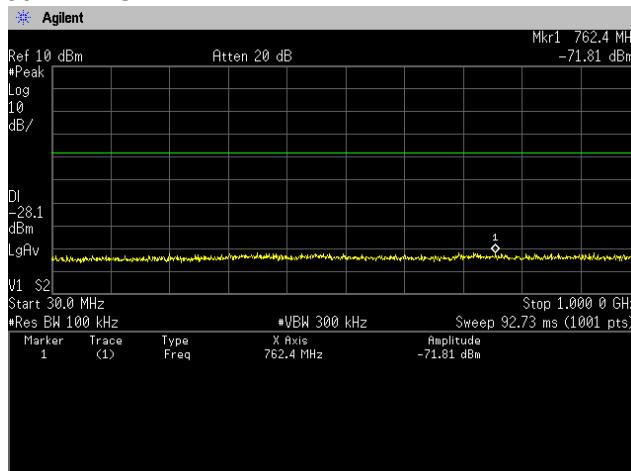


## 1GHz-5GHz

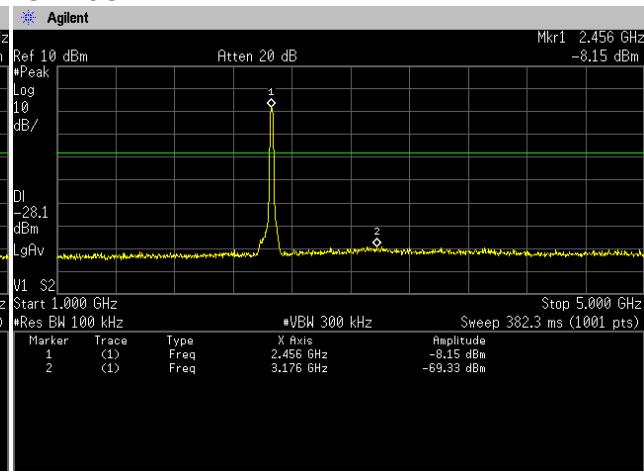


## 5GHz-10GHz

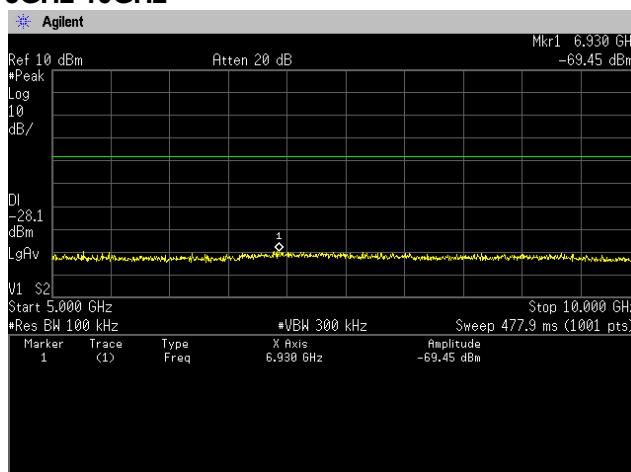


## 10GHz-15GHz

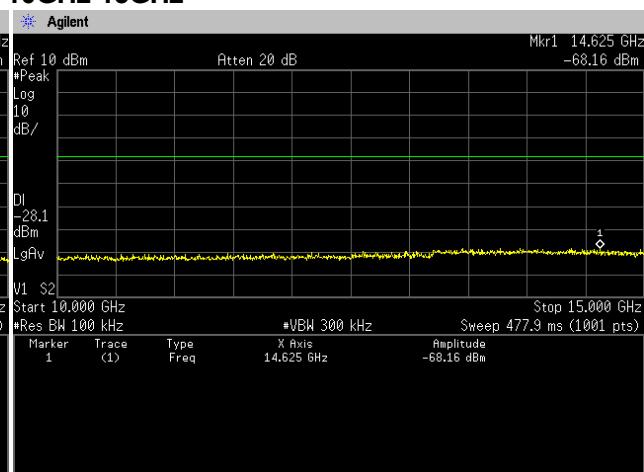

## 15GHz-20GHz

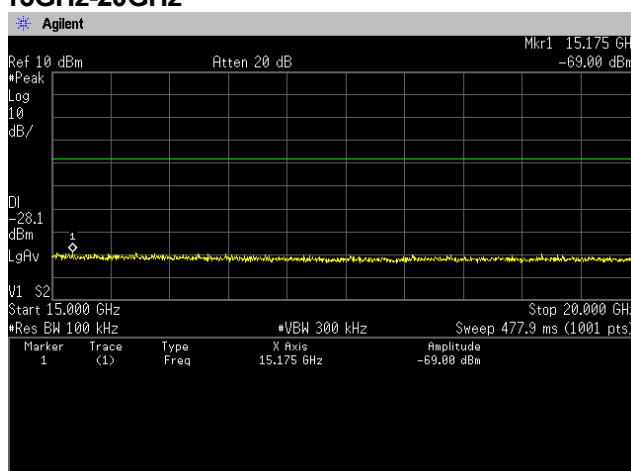

## 20GHz-25GHz

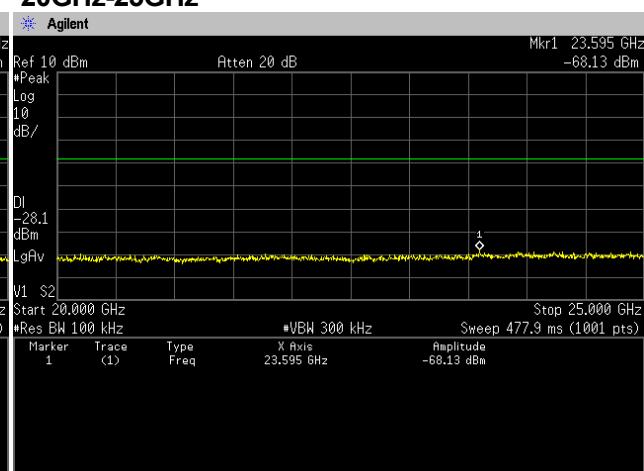

## 8. Spurious Emissions - Radiated -

### 8.1 Measurement procedure

[FCC 247(d), 15.205, 15.209]

Test was applied by following conditions.

Test method	:	ANSI C63.4
Frequency range	:	9kHz to 25GHz
Test place	:	3m Semi-anechoic chamber
EUT was placed on	:	FRP table / (W)2.0m × (D)1.0m × (H)0.8m
Antenna distance	:	3m
Test receiver setting	:	Below 1GHz
- Detector	:	Average (9kHz-90kHz, 110kHz-490kHz), Quasi-peak
- Bandwidth	:	200Hz, 120kHz
Spectrum analyzer setting	:	Above 1GHz
- Peak	:	RBW=1MHz, VBW=1MHz, Span=0Hz, Sweep=auto
- Average	:	RBW=1MHz, VBW=10Hz, Span=0Hz, Sweep=auto Display mode=Linear

Radiated emission measurements are performed at 3m distance with the broadband antenna (Loop antenna, TRILOG antenna and Double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1m to 4m and stopped at height producing the maximum emission. As for the Loop antenna, it is positioned with its plane vertical, and the center of the Loop antenna is 1m above the ground plane.


The EUT is Placed on a turntable, which is 0.8m above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. The test results represent the worst case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation. Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.

The EUT was set to operate with following conditions.

- Channel Low: 2412MHz, Channel Middle: 2437MHz, Channel High: 2462MHz

The test mode of EUT is as follows.

- Tx mode, Rx mode
- Test configuration

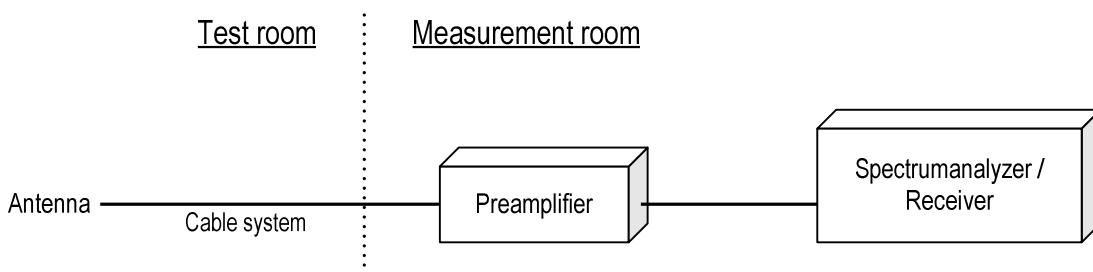

## 8.2 Calculation method

[9kHz to 150kHz]

Emission level = Reading + (Ant. factor + Cable system loss )

Margin = Limit – Emission level

[150kHz to 25GHz]

Emission level = Reading + (Ant. factor + Cable system loss –Amp. Gain)

Margin = Limit – Emission level

## 8.3 Limit

Frequency [MHz]	Field strength		Distance [m]
	[uV/m]	[dBuV/m]	
0.009-0.490	2400 / F [kHz]	20logE [uV/m]	300
0.490-1.705	24000 / F [kHz]	20logE [uV/m]	30
1.705-30	30	29.5	30
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	300	54.0	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level [dBuV/m] = 20log Emission [uV/m]
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition modulation.

## 8.4 Test data

Date	:	Apr. 17, 2013	Test personnel	:	
Temperature	:	24.1 [°C]			
Humidity	:	27.1 [%]	Tested by	:	
Test place	:	3m Semi-anechoic chamber			Taiki Watanabe

### [IEEE802.11b]

#### Channel Low

No.	Frequency	(P)	Reading	Reading	c.f.	Result	Result	Limit	Limit	Margin	Margin	Height	Angle
	[MHz]	PK	[dB(µV)]	AV	[dB(µV)]	PK	AV	PK	AV	PK	AV	[cm]	[°]
1	4824.000	H	48.9	36.4	8.7	57.6	45.1	74.0	54.0	16.4	8.9	100.0	0.0
2	4824.000	V	50.2	38.6	8.7	58.9	47.3	74.0	54.0	15.1	6.7	100.0	293.0

#### Channel Middle

No.	Frequency	(P)	Reading	Reading	c.f.	Result	Result	Limit	Limit	Margin	Margin	Height	Angle
	[MHz]	PK	[dB(µV)]	AV	[dB(µV)]	PK	AV	PK	AV	PK	AV	[cm]	[°]
1	4874.000	H	47.8	36.6	9.0	56.8	45.6	74.0	54.0	17.2	8.4	100.0	0.0
2	4874.000	V	50.0	38.7	9.0	59.0	47.7	74.0	54.0	15.0	6.3	100.0	288.0

#### Channel High

No.	Frequency	(P)	Reading	Reading	c.f.	Result	Result	Limit	Limit	Margin	Margin	Height	Angle
	[MHz]	PK	[dB(µV)]	AV	[dB(µV)]	PK	AV	PK	AV	PK	AV	[cm]	[°]
1	4924.000	H	49.8	37.2	9.1	58.9	46.3	74.0	54.0	15.1	7.7	100.0	198.0
2	4924.000	V	50.9	39.2	9.1	60.0	48.3	74.0	54.0	14.0	5.7	100.0	225.0

#### Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.
3. No emission was detected in the receive mode.

**[IEEE802.11g]****Channel Low**

No.	Frequency	(P)	Reading	Reading	c.f	Result	Result	Limit	Limit	Margin	Margin	Height	Angle
	[MHz]		[dB(µV)]	[dB(µV)]	[dB(1/m)]	[dB(µV/m)]	[dB(µV/m)]	[dB(µV/m)]	[dB(µV/m)]	[dB]	[dB]	[cm]	[°]
1	4824.000	H	43.7	31.2	8.7	52.4	39.9	74.0	54.0	21.6	14.1	100.0	0.0
2	4824.000	V	43.7	31.8	8.7	52.4	40.5	74.0	54.0	21.6	13.5	100.0	0.0
3	7236.000	H	44.1	31.7	13.6	57.7	45.3	74.0	54.0	16.3	8.7	100.0	0.0

**Channel Middle**

No.	Frequency	(P)	Reading	Reading	c.f	Result	Result	Limit	Limit	Margin	Margin	Height	Angle
	[MHz]		[dB(µV)]	[dB(µV)]	[dB(1/m)]	[dB(µV/m)]	[dB(µV/m)]	[dB(µV/m)]	[dB(µV/m)]	[dB]	[dB]	[cm]	[°]
1	4874.000	H	42.4	30.5	9.0	51.4	39.5	74.0	54.0	22.6	14.5	100.0	0.0
2	4874.000	V	43.3	31.5	9.0	52.3	40.5	74.0	54.0	21.7	13.5	100.0	0.0
3	7311.000	H	43.0	30.5	14.1	57.1	44.6	74.0	54.0	16.9	9.4	100.0	0.0

**Channel High**

No.	Frequency	(P)	Reading	Reading	c.f	Result	Result	Limit	Limit	Margin	Margin	Height	Angle
	[MHz]		[dB(µV)]	[dB(µV)]	[dB(1/m)]	[dB(µV/m)]	[dB(µV/m)]	[dB(µV/m)]	[dB(µV/m)]	[dB]	[dB]	[cm]	[°]
1	4924.000	H	43.1	30.2	9.1	52.2	39.3	74.0	54.0	21.8	14.7	100.0	0.0
2	4924.000	V	42.0	31.1	9.1	51.1	40.2	74.0	54.0	22.9	13.8	100.0	240.0
3	7386.000	H	43.2	30.8	14.2	57.4	45.0	74.0	54.0	16.6	9.0	100.0	0.0

## Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.
3. No emission was detected in the receive mode.

**[IEEE802.11n (HT20)]****Channel Low**

No.	Frequency	(P)	Reading	Reading	c.f	Result	Result	Limit	Limit	Margin	Margin	Height	Angle
	[MHz]		[dB(µV)]	[dB(µV)]	[dB(1/m)]	[dB(µV/m)]	[dB(µV/m)]	[dB(µV/m)]	[dB(µV/m)]	[dB]	[dB]	[cm]	[°]
1	4824.000	H	43.8	31.4	8.7	52.5	40.1	74.0	54.0	21.5	13.9	100.0	0.0
2	4824.000	V	44.5	32.2	8.7	53.2	40.9	74.0	54.0	20.8	13.1	100.0	219.0
3	7236.000	H	44.2	31.7	13.6	57.8	45.3	74.0	54.0	16.2	8.7	100.0	0.0

**Channel Middle**

No.	Frequency	(P)	Reading	Reading	c.f	Result	Result	Limit	Limit	Margin	Margin	Height	Angle
	[MHz]		[dB(µV)]	[dB(µV)]	[dB(1/m)]	[dB(µV/m)]	[dB(µV/m)]	[dB(µV/m)]	[dB(µV/m)]	[dB]	[dB]	[cm]	[°]
1	4874.000	H	43.1	30.5	9.0	52.1	39.5	74.0	54.0	21.9	14.5	100.0	0.0
2	4874.000	V	43.1	30.6	9.0	52.1	39.6	74.0	54.0	21.9	14.4	100.0	219.0
3	7311.000	H	43.7	30.6	14.1	57.8	44.7	74.0	54.0	16.2	9.3	100.0	0.0

**Channel High**

No.	Frequency	(P)	Reading	Reading	c.f	Result	Result	Limit	Limit	Margin	Margin	Height	Angle
	[MHz]		[dB(µV)]	[dB(µV)]	[dB(1/m)]	[dB(µV/m)]	[dB(µV/m)]	[dB(µV/m)]	[dB(µV/m)]	[dB]	[dB]	[cm]	[°]
1	4924.000	H	43.5	30.1	9.1	52.6	39.2	74.0	54.0	21.4	14.8	100.0	0.0
2	4924.000	V	43.1	30.2	9.1	52.2	39.3	74.0	54.0	21.8	14.7	100.0	0.0
3	7386.000	H	44.1	30.9	14.2	58.3	45.1	74.0	54.0	15.7	8.9	100.0	0.0

## Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.
3. No emission was detected in the receive mode.

## 9. Restricted Band of Operation

### 9.1 Measurement procedure

[FCC 247(d), 15.205, 15.209]

Test was applied by following conditions.

Test method : ANSI C63.4  
 Test place : 3m Semi-anechoic chamber  
 EUT was placed on FRP table / (W)2.0m × (D)1.0m × (H)0.8m  
 Antenna distance : 3m

Spectrum analyzer setting  
 - Peak : RBW=1MHz, VBW=1MHz, Span=Arbitrary setting, Sweep=auto  
 - Average : RBW=1MHz, VBW=10Hz, Span=Arbitrary setting, Sweep=auto  
 Display mode=Linear

Radiated emission measurements are performed at 3m distance with the broadband antenna (Double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1m to 4m and stopped at height producing the maximum emission.

The EUT is Placed on a turntable, which is 0.8m above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. The test results represent the worst case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation. Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.


The EUT was set to operate with following conditions.

- Channel Low: 2412MHz, Channel High: 2462MHz

The test mode of EUT is as follows.

- Tx mode

- Test configuration

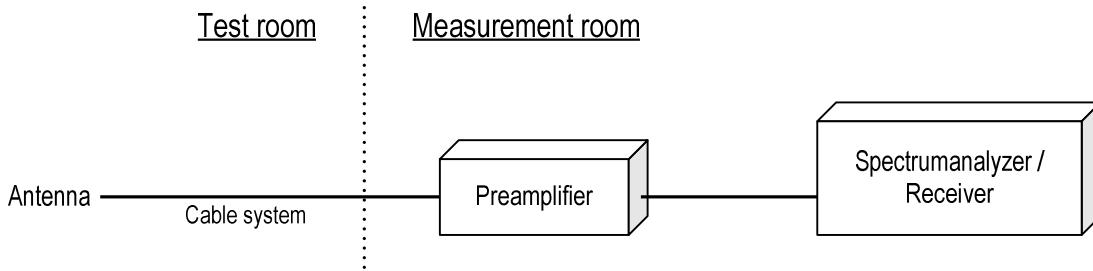

### 9.2 Limit

Emission at the boundary of the restricted band provided by 15.205 shall be lower than 15.209 limit.

### 9.3 Measurement Result

Channel	Frequency [MHz]	Results Chart	Result
Low	2412	See the Trace Data	Pass
High	2462	See the Trace Data	Pass


## 9.4 Test data

Date : Apr. 25, 2013  
 Temperature : 21.5 [°C]  
 Humidity : 33.5 [%]  
 Test place : 3m Semi-anechoic chamber


Test personnel :  
 Tested by : Chiaki Kanno

### [IEEE802.11b]

#### Channel Low Horizontal Peak

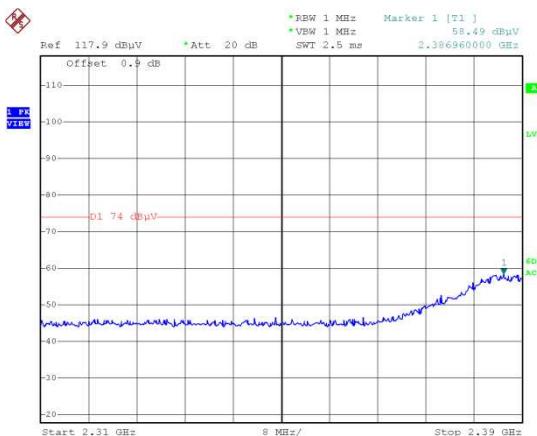


#### Average

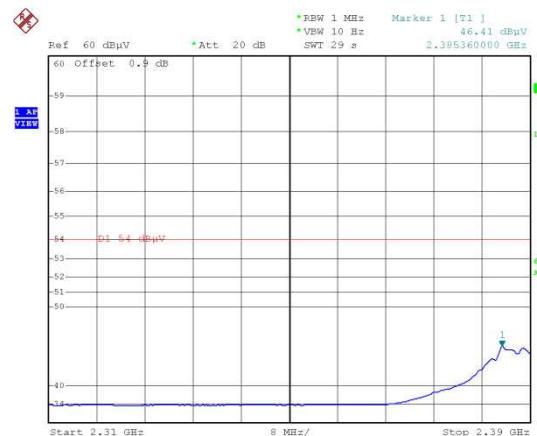


Date: 24.APR.2013 08:55:19

Date: 24.APR.2013 09:00:01

### Vertical Peak

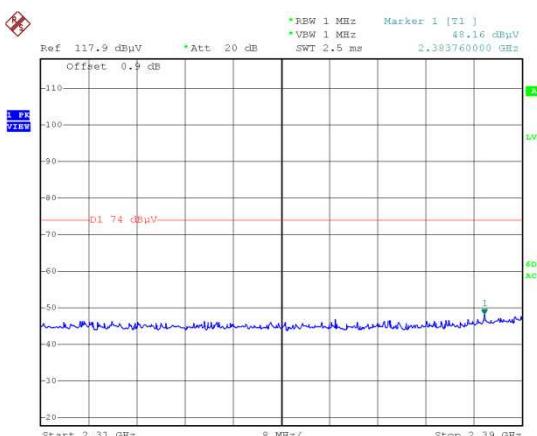


#### Average

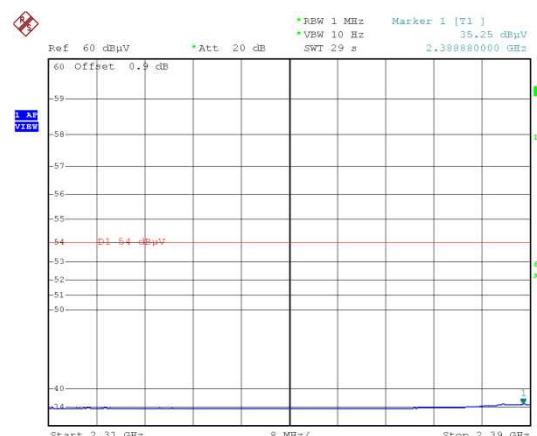

Date: 24.APR.2013 09:05:54


Date: 24.APR.2013 09:07:56

## Channel High Horizontal Peak

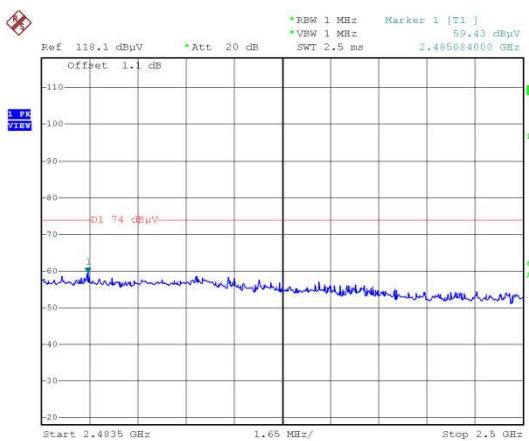


Date: 24.APR.2013 09:13:58

## Average

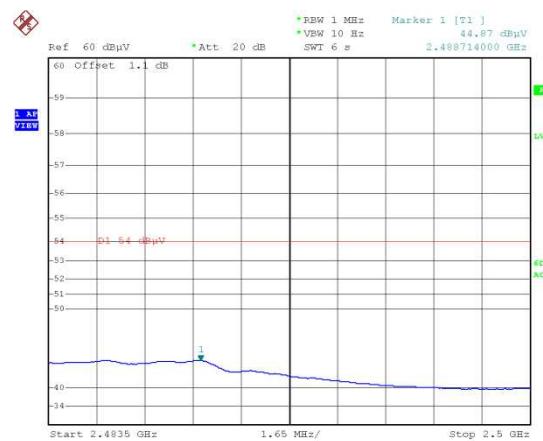


Date: 24.APR.2013 09:15:37

## Vertical Peak

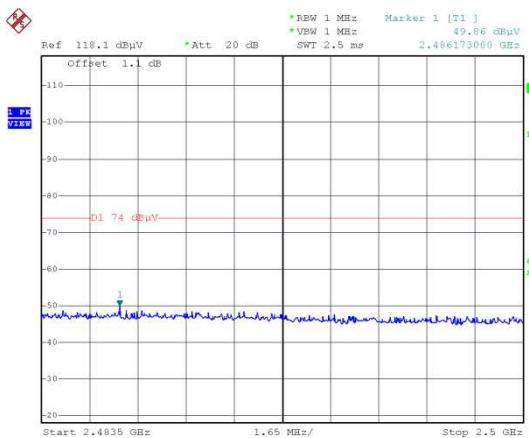


Date: 24.APR.2013 09:18:19

## Average

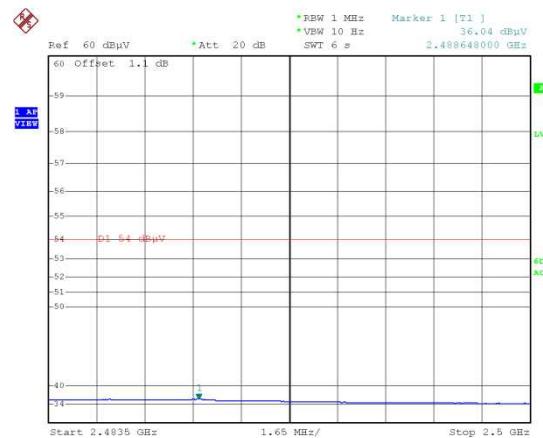


Date: 24.APR.2013 09:19:46

## [IEEE802.11g] Channel Low Horizontal Peak

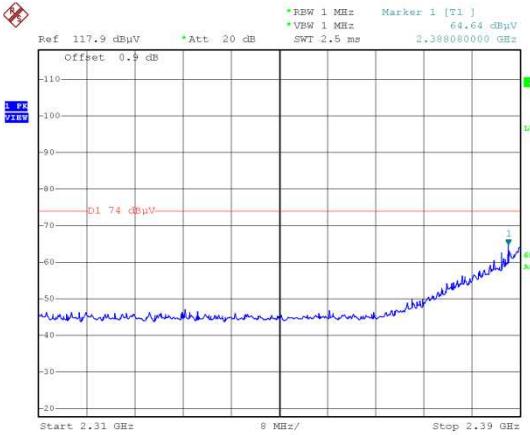


Date: 24.APR.2013 09:41:54

## Average

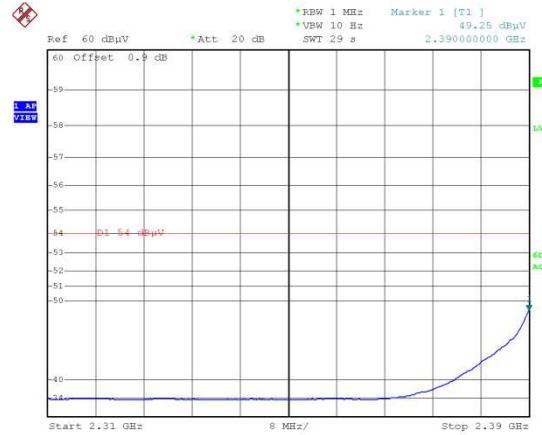


Date: 24.APR.2013 09:44:17

## Vertical Peak

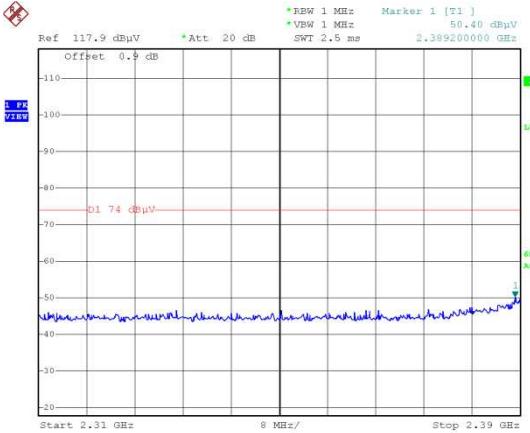


Date: 24.APR.2013 09:46:55

## Average

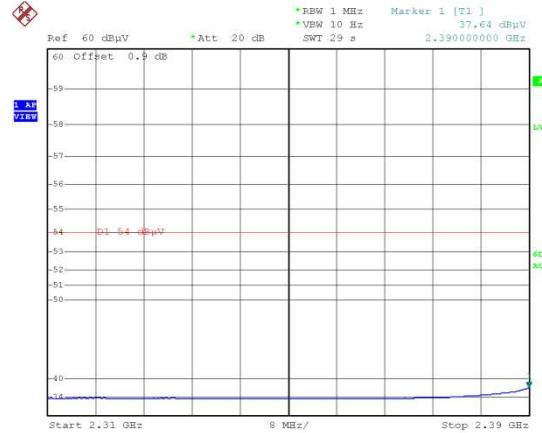


Date: 24.APR.2013 09:48:57

## Channel High Horizontal Peak

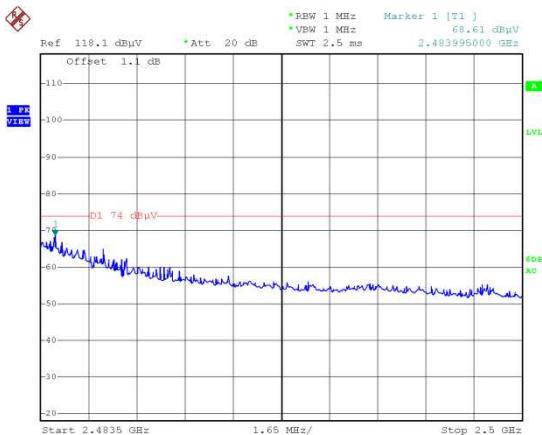


Date: 24.APR.2013 09:25:42

## Average

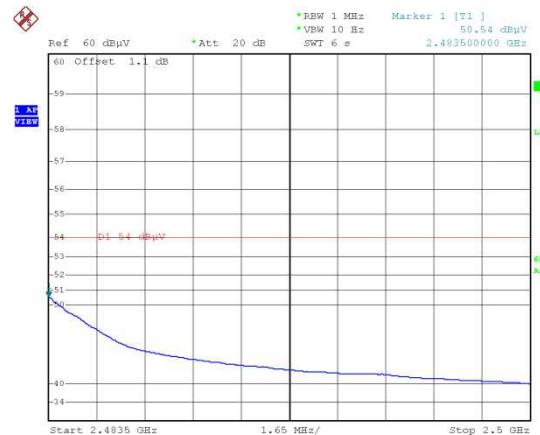


Date: 24.APR.2013 09:27:21

## Vertical Peak

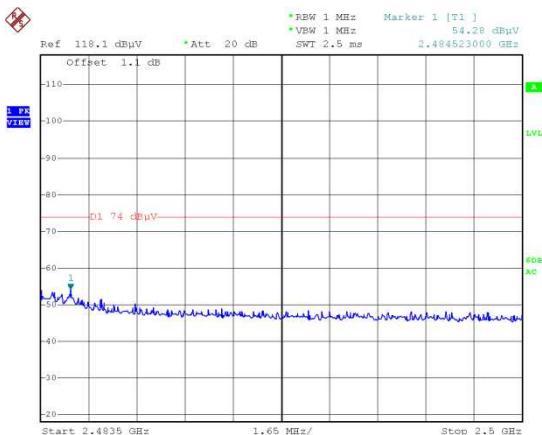



Date: 24.APR.2013 09:30:15

## Average

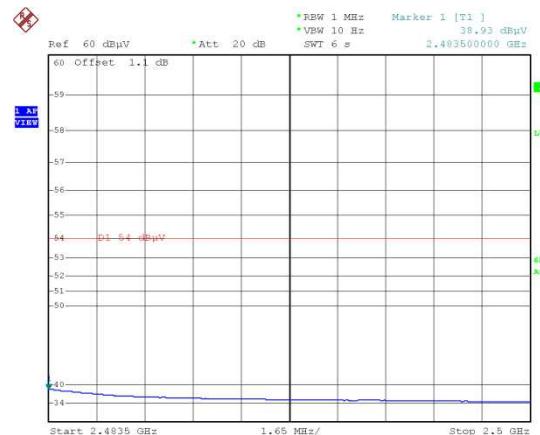

Date: 24.APR.2013 09:31:43



**[IEEE802.11n (HT20)]**  
**Channel Low**  
**Horizontal**  
**Peak**

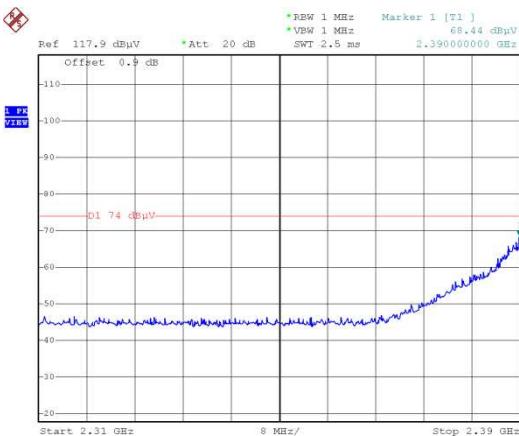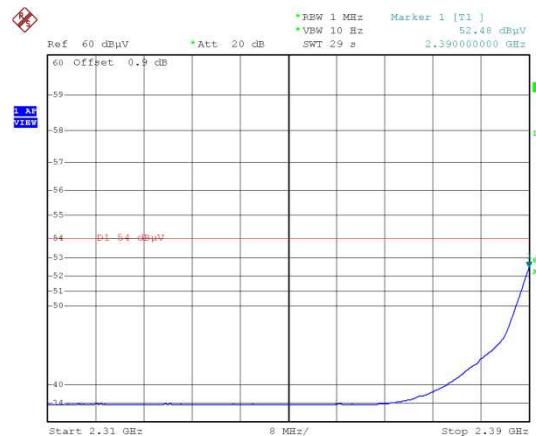**Average**

Date: 24.APR.2013 08:25:21

Date: 24.APR.2013 08:28:08


**Vertical**  
**Peak**

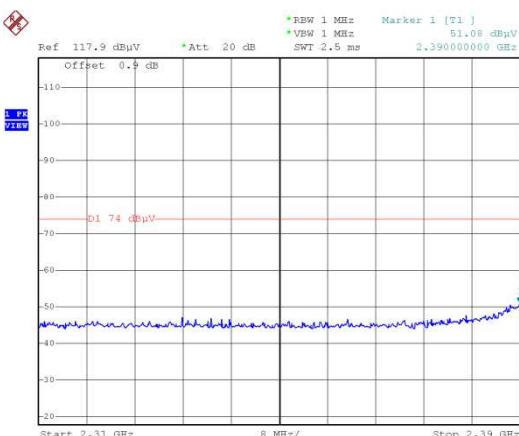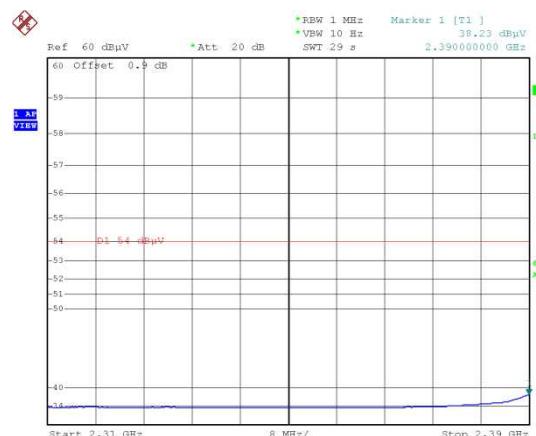**Average**

Date: 24.APR.2013 08:31:16


Date: 24.APR.2013 08:33:16

## Channel High Horizontal Peak

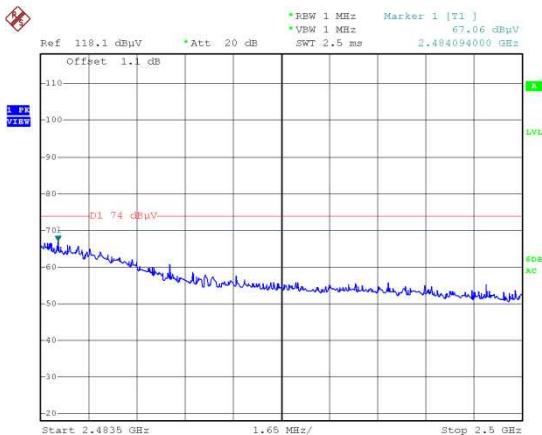


Date: 24.APR.2013 07:45:24

## Average

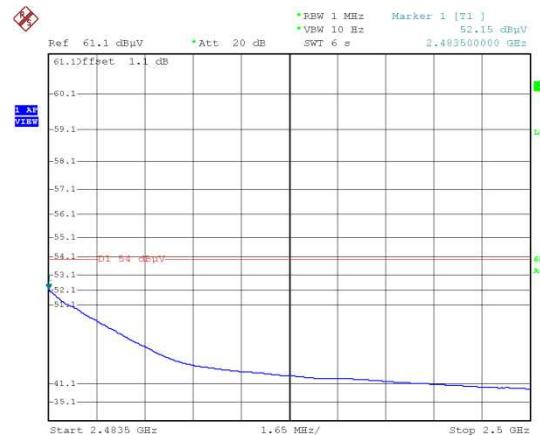


Date: 24.APR.2013 07:38:44

## Vertical Peak

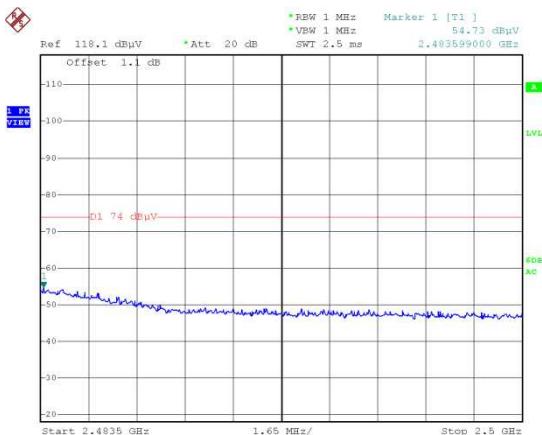

Date: 24.APR.2013 08:43:23

## Average

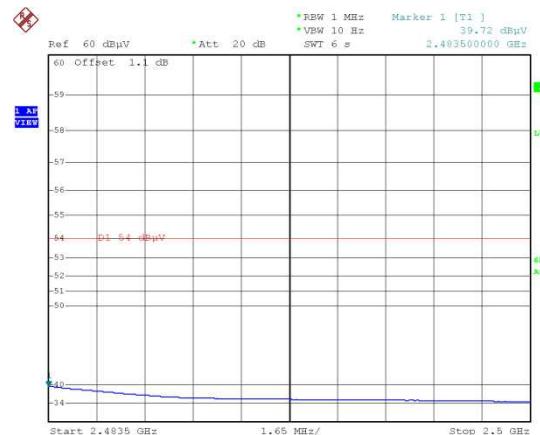

Date: 24.APR.2013 08:49:51

## 10. Transmitter Power Spectral Density

### 10.1 Measurement procedure [FCC 15.247(d), KDB558074]

The peak power is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- RBW=3kHz, VBW=10kHz, Span=10MHz/20MHz, Sweep=Auto, Detector=Peak, Trace mode=Max hold


The EUT was set to operate with following conditions.

- Channel Low: 2412MHz, Channel Middle: 2437MHz, Channel High: 2462MHz

The test mode of EUT is as follows.

- Tx mode

- Test configuration

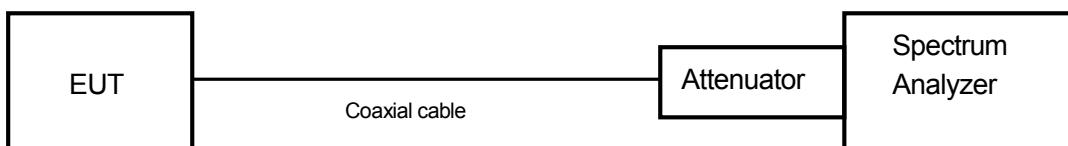

### 10.2 Limit

The peak power spectral density shall not be greater than 8dBm in any 3kHz band.

### 10.3 Measurement result

Date : Apr. 16, 2013  
 Temperature : 20.0 [°C]  
 Humidity : 52.0 [%]  
 Test place : Shielded room

Test personnel :  
 Tested by : Chiaki Kanno

#### [IEEE802.11b]

Channel	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dBm)	Result
Low	2412.00	-15.95	11.37	-4.58	8.00	12.58	PASS
Middle	2437.00	-16.41	11.37	-5.04	8.00	13.04	PASS
High	2462.00	-15.55	11.37	-4.18	8.00	12.18	PASS

Calculation;

$$\text{Transmitter Power Spectral Density Level (Margin)} = \text{Limit} - (\text{Reading} + \text{Factor})$$

**[IEEE802.11g]**

Channel	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dBm)	Result
Low	2412.00	-21.96	11.37	-10.59	8.00	18.59	PASS
Middle	2437.00	-23.22	11.37	-11.85	8.00	19.85	PASS
High	2462.00	-22.01	11.37	-10.64	8.00	18.64	PASS

Calculation;

$$\text{Transmitter Power Spectral Density Level (Margin)} = \text{Limit} - (\text{Reading} + \text{Factor})$$

**[IEEE802.11n (HT20)]**


Channel	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dBm)	Result
Low	2412.00	-23.16	11.37	-11.79	8.00	19.79	PASS
Middle	2437.00	-23.25	11.37	-11.88	8.00	19.88	PASS
High	2462.00	-22.25	11.37	-10.88	8.00	18.88	PASS

Calculation;


$$\text{Transmitter Power Spectral Density Level (Margin)} = \text{Limit} - (\text{Reading} + \text{Factor})$$

## 10.4 Trace data [IEEE802.11b]


### Channel Low

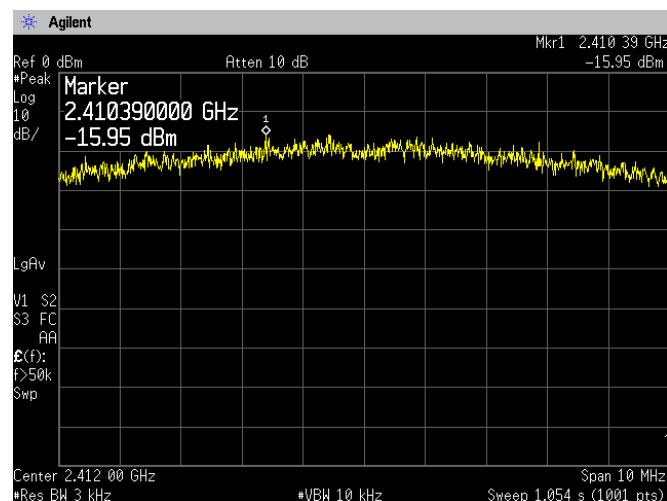

### Channel Middle



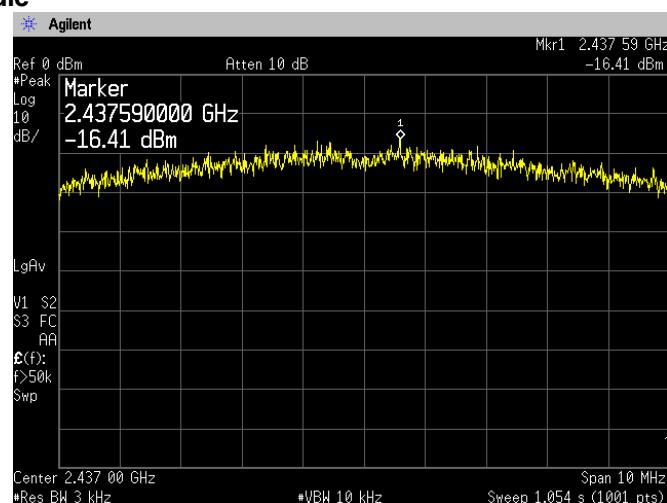


### Channel High

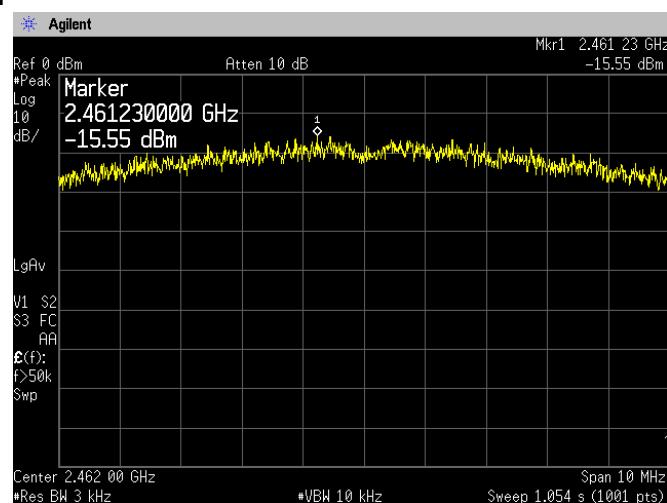



Zacta

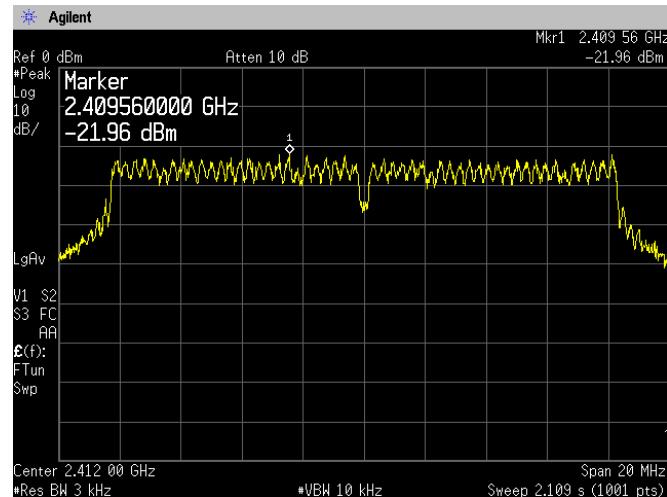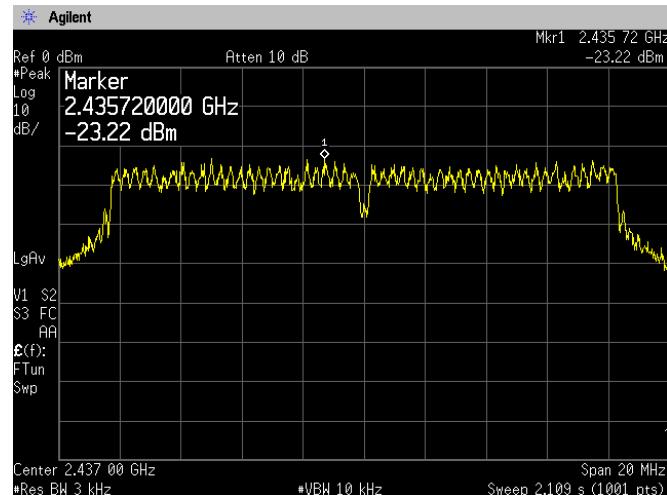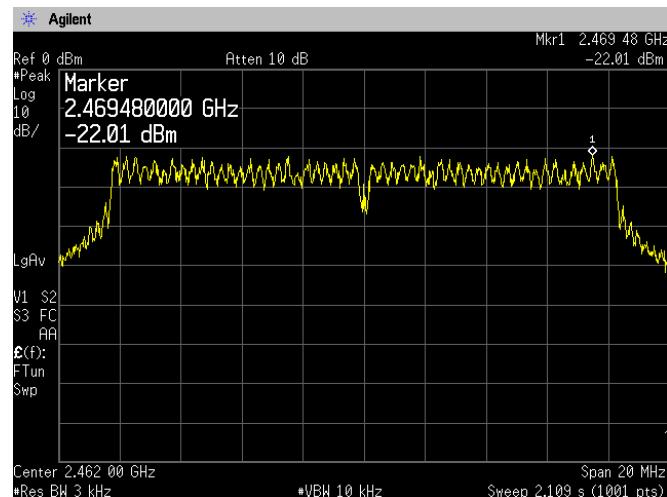
**[IEEE802.11g]****Channel Low****Channel Middle****Channel High**




Zacta

### [IEEE802.11n (HT20)]


#### Channel Low

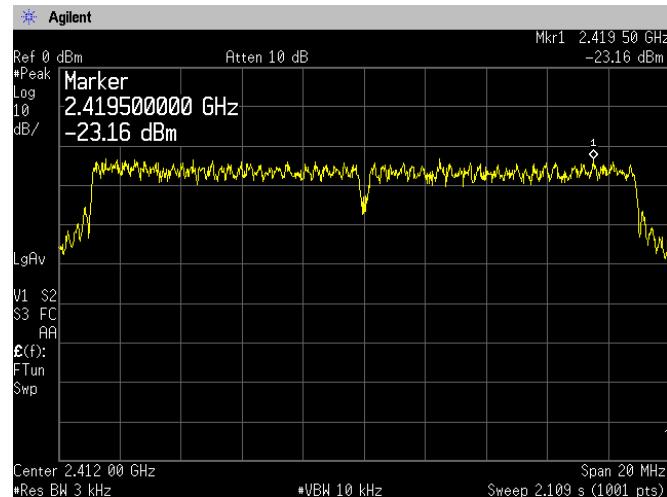

#### Channel Middle

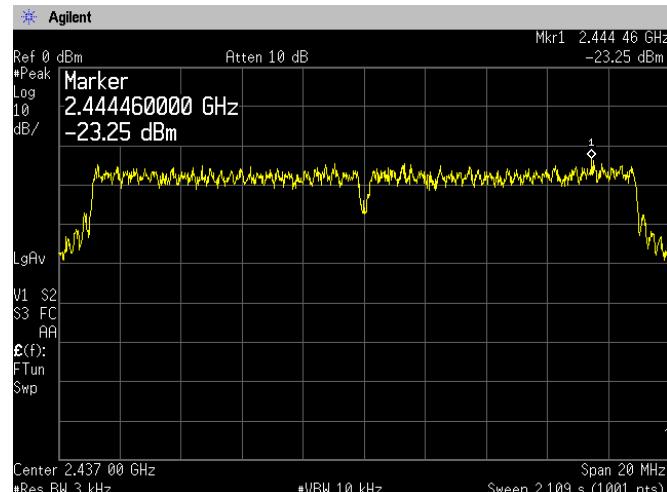

#### Channel High

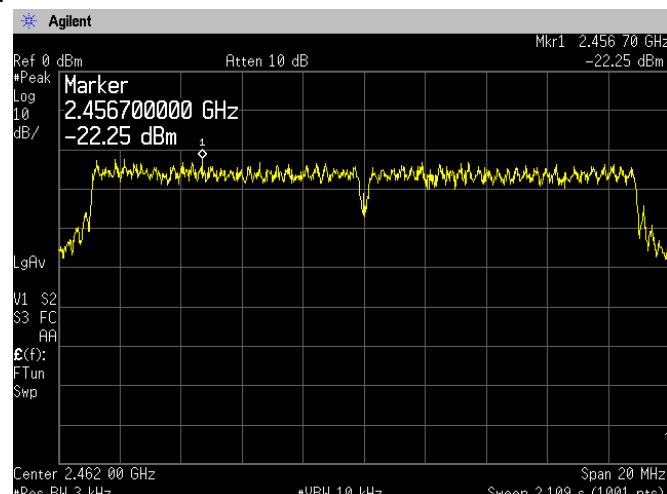

## 11. AC Power Line Conducted Emissions

### 11.1 Measurement procedure [FCC 15.207]

Test was applied by following conditions.


Test method	:	ANSI C63.4
Frequency range	:	0.15MHz to 30MHz
Test place	:	10m Semi-anechoic chamber
EUT was placed on	:	FRP table / (W)2.0m × (D)1.0m × (H)0.8m
Vertical Metal Reference Plane	:	(W)2.0m × (H)2.0m 0.4m away from EUT
Test receiver setting		
- Detector	:	Quasi-peak, Average
- Bandwidth	:	9kHz

EUT and peripherals are connected to  $50\Omega/50\mu\text{H}$  Line Impedance Stabilization Network (LISN) which are connected to reference ground plane, and are placed 80cm away from EUT. Excess of AC power cable is bundled in center.

LISN for peripheral is terminated in  $50\Omega$ .

EUT operating mode is selected to emit the maximum noise. Overall frequency range is investigated with spectrum analyzer using peak detector. Maximum emission configuration is determined by manipulating the EUT, peripherals, interconnecting cables. Then, emission measurements are performed with test receiver in above setting to each current-carrying conductor of the mains port. Sufficient time for EUT, peripherals and test equipment is provided in order for them to warm up to their normal operating condition. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits.

- Test configuration

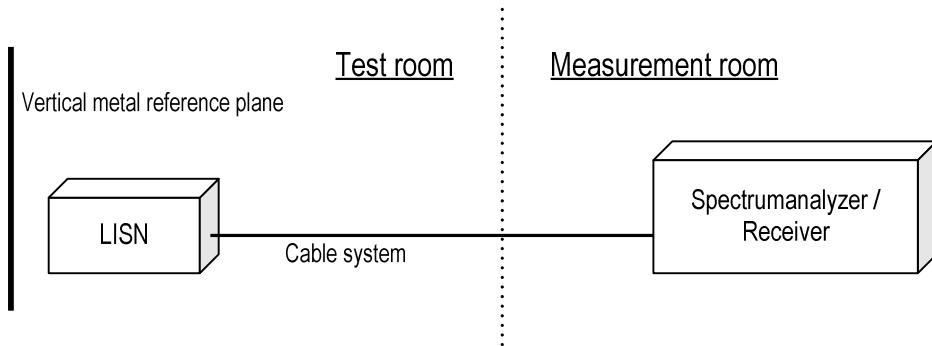

### 11.2 Calculation method

Emission level = Reading + (LISN. factor + Cable system loss)

Margin = Limit – Emission level


### 11.3 Limit

Frequency [MHz]	Limit	
	QP [dBuV]	AV [dBuV]
0.15-0.5	66-56*	56-46*
0.5-5	56	46
5-30	60	50

\*: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

## 11.4 Test data

\*\*\*\*\* CONDUCTED EMISSION at MAINS PORT \*\*\*\*\*  
 << 3m Semi-anechoic chamber >>

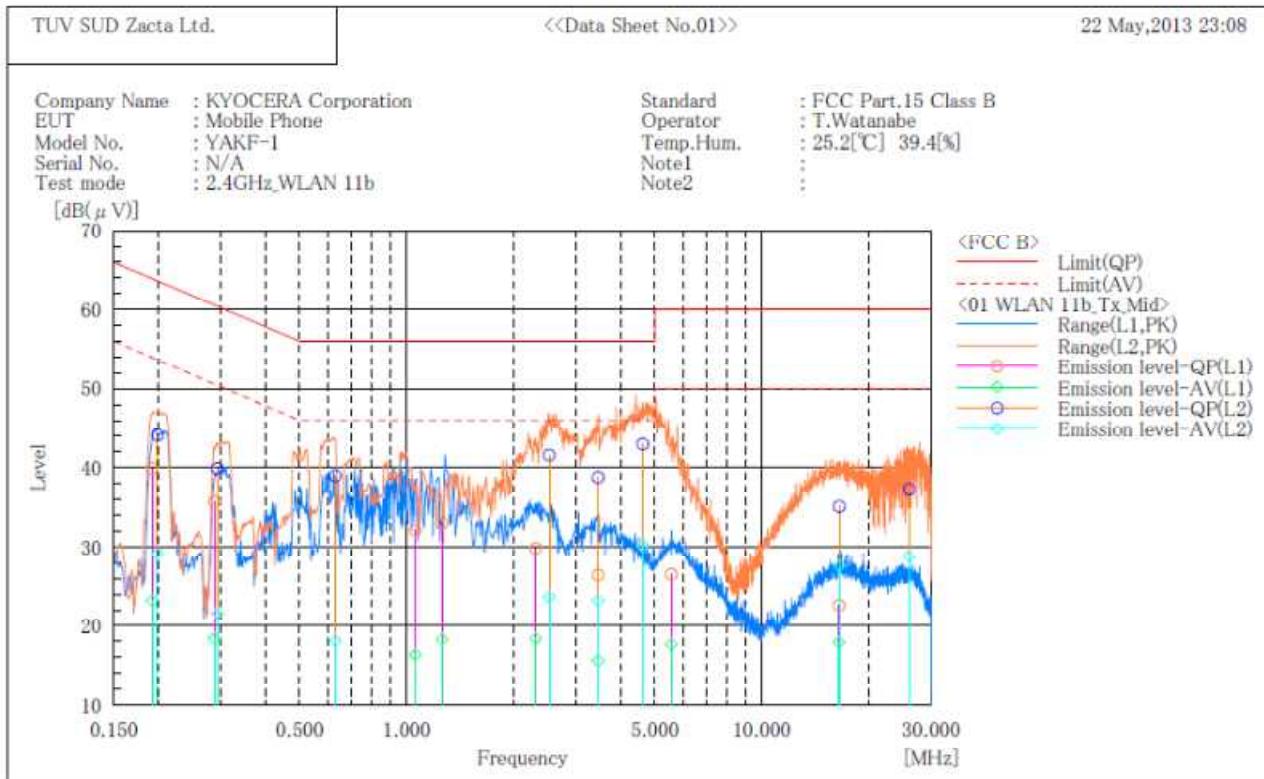


### Final Result

— L1 Phase —												
No.	Frequency	Reading QP	Reading AV	c.f	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV	Remark	
	[MHz]	[dB(μV)]	[dB(μV)]		[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]		
1	0.192	29.5	12.8	10.4	39.9	23.2	63.9	53.9	24.0	30.7		
2	0.288	25.4	8.1	10.3	35.7	18.4	60.6	50.6	24.9	32.2		
3	1.057	21.7	6.0	10.4	32.1	16.4	56.0	46.0	23.9	29.6		
4	1.258	22.6	7.9	10.4	33.0	18.3	56.0	46.0	23.0	27.7		
5	2.310	19.4	8.0	10.4	29.8	18.4	56.0	46.0	26.2	27.6		
6	3.460	15.9	5.1	10.5	26.4	15.6	56.0	46.0	29.6	30.4		
7	5.560	15.9	7.1	10.6	26.5	17.7	60.0	50.0	33.5	32.3		
8	16.490	11.7	7.0	10.9	22.6	17.9	60.0	50.0	37.4	32.1		

— L2 Phase —												
No.	Frequency	Reading QP	Reading AV	c.f	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV	Remark	
	[MHz]	[dB(μV)]	[dB(μV)]		[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]		
1	0.199	33.7	18.7	10.4	44.1	29.1	63.7	53.7	19.6	24.6		
2	0.293	29.6	11.3	10.3	39.9	21.6	60.4	50.4	20.5	28.8		
3	0.630	28.7	7.8	10.3	39.0	18.1	56.0	46.0	17.0	27.9		
4	2.520	31.2	13.3	10.4	41.6	23.7	56.0	46.0	14.4	22.3		
5	3.460	28.3	12.7	10.5	38.8	23.2	56.0	46.0	17.2	22.8		
6	4.624	32.5	19.7	10.5	43.0	30.2	56.0	46.0	13.0	15.8		
7	16.530	24.2	16.7	10.9	35.1	27.6	60.0	50.0	24.9	22.4		
8	25.990	26.0	17.5	11.3	37.3	28.8	60.0	50.0	22.7	21.2		

\*\*\*\*\* CONDUCTED EMISSION at MAINS PORT \*\*\*\*\*  
 << 3m Semi-anechoic chamber >>

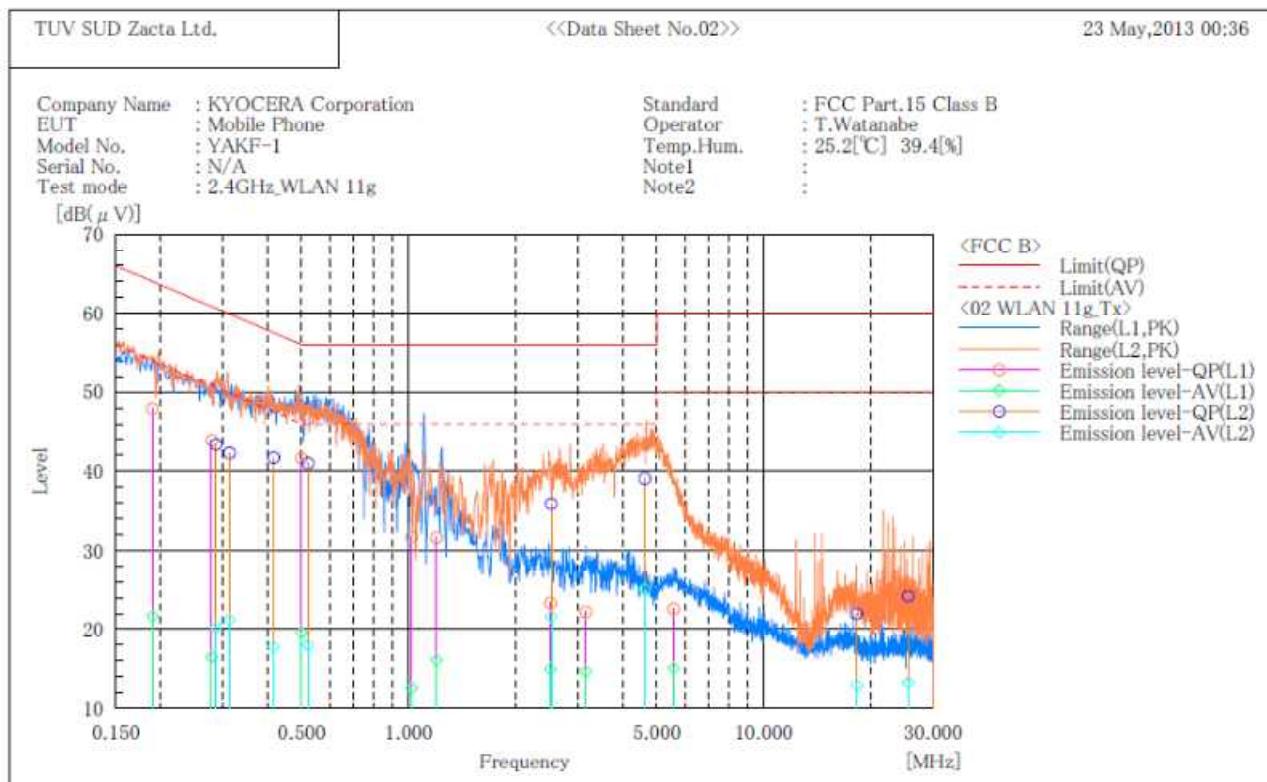

## Final Result


## — L1 Phase —

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	0.190	37.5	11.3	10.4	47.9	21.7	64.0	54.0	16.1	32.3
2	0.279	33.6	6.2	10.3	43.9	16.5	60.8	50.8	16.9	34.3
3	0.499	31.3	9.3	10.3	41.6	19.6	56.0	46.0	14.4	26.4
4	1.020	21.3	2.2	10.4	31.7	12.6	56.0	46.0	24.3	33.4
5	1.198	21.2	5.7	10.4	31.6	16.1	56.0	46.0	24.4	29.9
6	2.508	12.9	4.6	10.4	23.3	15.0	56.0	46.0	32.7	31.0
7	3.156	11.8	4.3	10.4	22.2	14.7	56.0	46.0	33.8	31.3
8	5.574	12.0	4.5	10.6	22.6	15.1	60.0	50.0	37.4	34.9

## — L2 Phase —

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	0.287	33.1	10.0	10.3	43.4	20.3	60.6	50.6	17.2	30.3
2	0.313	32.0	10.9	10.3	42.3	21.2	59.9	49.9	17.6	28.7
3	0.417	31.4	7.5	10.3	41.7	17.8	57.5	47.5	15.8	29.7
4	0.521	30.7	7.7	10.3	41.0	18.0	56.0	46.0	15.0	28.0
5	2.521	25.5	11.2	10.4	35.9	21.6	56.0	46.0	20.1	24.4
6	4.629	28.6	14.6	10.5	39.1	25.1	56.0	46.0	16.9	20.9
7	18.240	11.0	2.0	11.0	22.0	13.0	60.0	50.0	38.0	37.0
8	25.520	12.9	2.0	11.3	24.2	13.3	60.0	50.0	35.8	36.7

\*\*\*\*\* CONDUCTED EMISSION at MAINS PORT \*\*\*\*\*  
 << 3m Semi-anechoic chamber >>

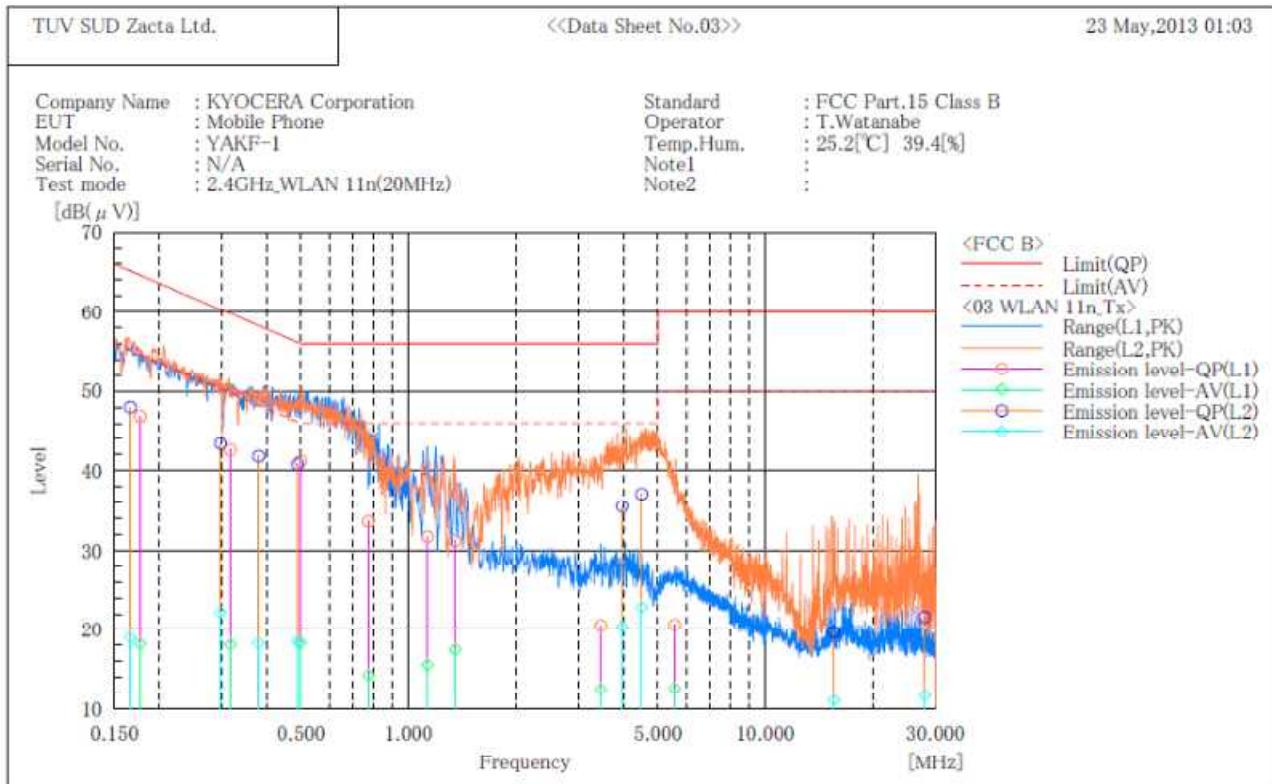

## Final Result

## — L1 Phase —

No.	Frequency	Reading QP	Reading AV	c.f.	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV
	[MHz]	[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]
1	0.177	36.5	7.8	10.4	46.9	18.2	64.6	54.6	17.7	36.4
2	0.317	32.3	7.8	10.3	42.6	18.1	59.8	49.8	17.2	31.7
3	0.498	30.9	8.0	10.3	41.2	18.3	56.0	46.0	14.8	27.7
4	0.772	23.3	4.0	10.3	33.6	14.3	56.0	46.0	22.4	31.7
5	1.131	21.3	5.2	10.4	31.7	15.6	56.0	46.0	24.3	30.4
6	1.350	20.8	7.1	10.4	31.2	17.5	56.0	46.0	24.8	28.5
7	3.462	10.0	2.0	10.5	20.5	12.5	56.0	46.0	35.5	33.5
8	5.570	10.0	2.0	10.6	20.6	12.6	60.0	50.0	39.4	37.4

## — L2 Phase —

No.	Frequency	Reading QP	Reading AV	c.f.	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV
	[MHz]	[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]
1	0.166	37.5	8.5	10.5	48.0	19.0	65.2	55.2	17.2	36.2
2	0.297	33.1	11.9	10.3	43.4	22.2	60.3	50.3	16.9	28.1
3	0.380	31.5	8.0	10.3	41.8	18.3	58.3	48.3	16.5	30.0
4	0.489	30.5	8.2	10.3	40.8	18.5	56.2	46.2	15.4	27.7
5	3.973	25.0	9.9	10.5	35.5	20.4	56.0	46.0	20.5	25.6
6	4.500	26.6	12.3	10.5	37.1	22.8	56.0	46.0	18.9	23.2
7	15.560	8.8	0.2	10.9	19.7	11.1	60.0	50.0	40.3	38.9
8	27.950	10.3	0.4	11.3	21.6	11.7	60.0	50.0	38.4	38.3



## **12. Antenna requirement**

---

According to FCC section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The antenna is a special antenna mounted inside of the EUT. Therefore, the EUT complies with the antenna requirement of FCC section 15.203.

### **13. Uncertainty of measurement**

Expanded uncertainties stated are calculated with a coverage Factor k=2.

Please note that these results are not taken into account when determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission at mains port	±3.0dB
Radiated emission (9kHz – 30MHz)	±4.4dB
Radiated emission (30MHz – 1000MHz)	±4.5dB
Radiated emission (1000MHz – 26GHz)	±3.9dB

## 14. Laboratory description

### 1. Location:

TÜV SÜD Zacta Ltd. Yonezawa Testing Center  
 4149-7 Hachimanpara 5-chome Yonezawa-shi Yamagata 992-1128 Japan  
 Phone: +81-238-28-2880 Fax: +81-238-28-2888

### 2. Facility filing information:

1) NVLAP accreditation: NVLAP Lab. code: 200306-0

2) VLAC accreditation: Lab. code: VLAC-013

Site name	Radiated emission	Conducted emission for mains port	Conducted emission for telecom port	Radiated emission (CMAD)	Expiry Date
10m Semi-anechoic chamber	VLAC-013			VLAC-013	Jul. 3, 2013
3m Semi-anechoic chamber				-	
Shielded room No.1	-	VLAC-013		-	

3) FCC filing:

Site name	Registration Number	Expiry Date
Site 2	91065	Oct.31, 2014
Site 3		
10m Semi-anechoic chamber	540072	Jan. 9, 2016
3m Semi-anechoic chamber		
Shielded room No.1		

4) Industry Canada Oats site filing:

Site name	Sites on file: Oats 3m/10m	Expiry Date
Site 2	4224A-2	Jan. 23, 2015
Site 3	4224A-3	
3m Semi-anechoic chamber	4224A-4	
10m Semi-anechoic chamber	4224A-5	

5) VCCI site filing:

Site name	Radiated emission	Conducted emission for mains port	Expiry Date	Conducted emission for telecom port	Expiry Date
Site 2	R-137	C-133	Nov. 16, 2014	T-1221	Nov. 28, 2014
Site 3	R-138	C-134		T-1222	
10m Semi-anechoic chamber	R-2480	C-2722	Jul. 3, 2013	T-1474	Jul. 3, 2013
	G-81	-		-	-
3m Semi-anechoic chamber	R-2481	C-2723		T-1475	Jul. 3, 2013
	G-82	-		-	-
Shielded room No.1	-	C-2724		T-1476	Jul. 3, 2013

6) TÜV SÜD PS authorization:

Authorized as an EMC test laboratory

7) TÜV Rheinland authorization:

Authorized as an EMC test laboratory

## Appendix A. Test equipment

---

### [Antenna port conducted test]

Equipment	Company	Model No.	Serial No.	Cal. due	Cal. date
Spectrum analyzer	Agilent Technologies	E4440A	US40420937	Oct. 2013	Oct. 19, 2012
Microwave cable	RS	YH_13S5	N/A (S403)	May 2013	May 10, 2012
Attenuator	Weinschel	56-10	J4180	Nov. 2013	Nov. 12, 2012

### Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ECSI	100764	Jul. 2013	Jul. 6, 2012
Preamplifier	ANRITSU	MH648A	M96057	Jun. 2013	Jun. 12, 2012
Loop antenna	ROHDE&SCHWARZ	HFH2-Z2	892246/010	Sep. 2013	Sep. 14, 2012
TRILOG Antenna	Schwarzbeck	VULB9160	9160-3218	May 2014	May 2, 2012
Attenuator	TME	CFA-01NPJ-6	N/A (S274)	Jun. 2013	Jun. 12, 2012
Spectrum analyzer	Agilent Technologies	E4447A	MY46180188	Mar. 2014	Mar. 8, 2013
Preamplifier	Agilent Technologies	8449B	3008A1008	Dec. 2013	Dec. 9, 2012
Double ridged guide antenna	EMCO	3115	4328	Jan. 2014	Jan. 21, 2013
Attenuator	AEROFLEX	40A-03	081217-20	Feb. 2014	Feb. 23, 2013
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170189	Apr. 2013	Apr. 20, 2010
Preamplifier	TSJ	MLA-1840-B03-35	1240332	Apr. 2013	Apr. 20, 2010
Microwave cable	SUHNER	SUCOFLEX104/9m	346316/4	Oct. 2013	Oct. 6, 2012
		SUCOFLEX104/1m	322084/4	Oct. 2013	Oct. 6, 2012
		SUCOFLEX104/1.5m	317226/4	Oct. 2013	Oct. 6, 2012
		SUCOFLEX104/7m	41625/6	Oct. 2013	Oct. 6, 2012
PC	DELL	DIMENSION E521	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V5.3.61	N/A	N/A
3m Semi-anechoic chamber	TOKIN	N/A	N/A (9002-NSA)	May 2013	May 19, 2012

### Conducted emission at mains port

Equipment	Company	Model No.	Serial No.	Cal. due	Cal. date
EMI Receiver	ROHDE&SCHWARZ	ECSI	100764	Jul. 2013	Jul. 6, 2012
Attenuator	HUBER+SUHNER	6810.01.A	N/A (S411)	Jun. 2013	Jun. 25, 2012
Line impedance stabilization network for EUT	Kyoritsu Electrical Works, Ltd.	KNW-407F	8-2003-1	Mar. 2014	Mar. 12, 2013
Coaxial cable	FUJIKURA	5D-2W/4m	N/A (S350)	Feb. 2014	Feb. 4, 2013
Coaxial cable	FUJIKURA	5D-2W/1m	N/A (S193)	Feb. 2014	Feb. 4, 2013
Coaxial cable	SUHNER	RG214/U/10m	N/A (S194)	Feb. 2014	Feb. 4, 2013
PC	DELL	DIMENSION	75465BX	N/A	N/A